


Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 1 of 121

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Product Name:	OF Universal WiFi -N Adapter
Brand Name:	IOGEAR
Model Name:	GWU627
Model Difference:	N/A
FCC ID:	QLEGWU627
Report No.:	ER/2011/20014-02
Issue Date:	Apr. 18, 2011
FCC Rule Part:	§15.247, Cat: DTS
Prepared for:	ATEN Technology Inc. dba IOGEAR.
	19641 Da Vinci, Foothill Ranch, CA 92610, USA
Prepared by:	SGS Taiwan Ltd.
	Electronics & Communication Laboratory
	No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan





FCC ID: QLEGWU627

Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 2 of 121

VERIFICATION OF COMPLIANCE

Applicant:	ATEN Technology Inc. dba IOGEAR.	
	19641 Da Vinci, Foothill Ranch, CA 92610, USA	
Equipment Under Test:	Universal WiFi -N Adapter	
Brand Name:	IOGEAR	
Model No.:	GWU627	
Model Difference:	N/A	
FCC ID:	QLEGWU627	
File Number:	ER/2011/20014-02	
Date of test:	Mar. 21, 2011 ~ Apr. 14, 2011	
Date of EUT Received:	Mar. 21, 2011	

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date	Apr. 18, 2011	
Prepared By:	Jazz Huang / Engineer Chemy Chem	Date	Apr. 18, 2011	
Approved By:	Cherry Chen / Clerk Tim Chang	Date	Apr. 18, 2011	_

Jim Chang / Supervisor



Version

Version No.	Date	Description
00	Apr. 18, 2011	Initial creation of document



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 4 of 121

Table of Contents

1	GEN	VERAL INFORMATION	6
	1.1	Related Submittal(s) / Grant (s)	7
	1.2	Test Methodology	7
	1.3	Test Facility	7
	1.4	Special Accessories	7
	1.5	Equipment Modifications	7
2	SYS	TEM TEST CONFIGURATION	8
	2.1	EUT Configuration	
	2.2	EUT Exercise	8
	2.3	Test Procedure	8
	2.4	Configuration of Tested System	9
3	SUM	IMARY OF TEST RESULTS	10
4	DES	CRIPTION OF TEST MODES	10
5	CON	NDUCTED EMISSION TEST	11
	5.1	Standard Applicable:	11
	5.2	Measurement Equipment Used:	11
	5.3	EUT Setup:	11
	5.4	Measurement Procedure:	12
	5.5	Measurement Result:	12
6	PEA	K OUTPUT POWER MEASUREMENT	15
	6.1	Standard Applicable:	15
	6.2	Measurement Equipment Used:	16
	6.3	Test Set-up:	16
	6.4	Measurement Procedure:	16
	6.5	Measurement Result:	17
7	6dB	Bandwidth	31
	7.1	Standard Applicable:	
	7.2	Measurement Equipment Used:	31
	7.3	Test Set-up:	31
	7.4	Measurement Procedure:	31
	7.5	Measurement Result:	
8	100K	KHz BANDWIDTH OF BAND EDGES MEASUREMENT	41
	8.1	Standard Applicable:	41
	8.2	Measurement Equipment Used:	41
	8.3	Test SET-UP:	42

except in full, without prior written permission of the Company. 歐非労有說明, U歌台結果僅對測風之体給負貨, 问时定体給僅保留功化。 希報台未經本公司書間計刊, 不可能分換吸。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any, holder of this docuresponsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



FCC ID: QLEGWU627

	8.4	Measurement Procedure:	43
	8.5	Field Strength Calculation:	43
	8.6	Measurement Result:	43
9	SPUR	RIOUS RADIATED EMISSION TEST	56
	9.1	Standard Applicable	56
	9.2	Measurement Equipment Used:	56
	9.3	Test SET-UP:	56
	9.4	Measurement Procedure:	56
	9.5	Field Strength Calculation	57
	9.6	Measurement Result:	57
10	Peak	Power Spectral Density	106
	10.1	Standard Applicable:	
	10.2	Measurement Equipment Used:	106
	10.3	Test Set-up:	106
	10.4	Measurement Procedure:	106
	10.5	Measurement Result:	107
11	ANTI	ENNA REQUIREMENT	116
	11.1	Standard Applicable:	116
	11.2	Antenna Connected Construction:	116
12.	Maxi	mum Permissible Exposure (MPE)	117
	12.1.	Standard Applicable	
	12.2.	Maximum Permissible Exposure (MPE) Evaluation	118
PH	OTOG	RAPHS OF SET UP	122
PH	OTOG	RAPHS OF EUT	125



1 GENERAL INFORMATION

General:

Product Name	Universal WiFi -N Adapter		
Brand Name	IOGEAR		
Model Name	GWU627		
Model Difference	N/A		
LAN cable	Model No.: N/A		
Dower Supply	5Vdc by AC power adapter		
Power Supply	Adapter:	Model: DSC-5PFC-05 FUS, Supplier: DVE	

WLAN:

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology	Type of Emission
11b/g	2412-2462	11	b : 8.48dBm g : 8.44dBm	DSSS, OFDM	b : 14M72G1D g : 16M45G1D
11n	HT20 2412-2462	11	n : 8.35dBm	OFDM	n HT20: 17M66G1D
11n	HT40 2422-2452	9	n : 8.40dBm	OFDM	n HT40:35M94G1D
Antenna Designation:		PIFA Antenna with 4.81dBi peak gain			
Modulation type:		CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM			
Transition Rate:			802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 65Mbps 802.11 n_40MHz: 13.5 – 300Mbps		1

The EUT is compliance with IEEE 802.11 b/g/n Standard.

This report applies for WLAN, and complies with FCC rule part 15C.



1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>**QLEGWU627**</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247

requirements.

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions,hm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.hm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_and_colicitors</u>, if any. The Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣五股工業區五工路 134 號



2.4 Configuration of Tested System

Fig. 2-1 Radiated Emission Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1	Notebook	IBM	T60	L3DK794

Fig. 2-2 Conducted Emission Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1	Notebook	HP	ProBook4411s	CNU9316V4C



3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)(c)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
	100 KHz Bandwidth Of	
§15.247(d)	Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz) mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n_20MHz mode: Channel low (2412MHz) v mid (2437MHz) and high (2462MHz) with

6.5Mbps lowest data rate are chosen for full testing.

802.11 n_40MHz mode: Channel low (2422MHz) v mid (2437MHz) and high (2452MHz) with

13.5Mbps lowest data rate are chosen for full testing.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions,hm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.hm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_and_colicitors</u>, if any. The Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣五股工業區五工路 134 號



5 CONDUCTED EMISSION TEST

5.1 Standard Applicable:

According to \$15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		
Note				
1. The lower limit shall apply at the transition frequencies				

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCS30	828985/004	09/16/2010	09/15/2011		
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2011	02/01/2012		
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2011	02/01/2012		
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2010	11/27/2011		

5.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 12 of 121

5.4 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:


The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 13 of 121

AC POWER LINE CONDUCTED EMISSION TEST DATA

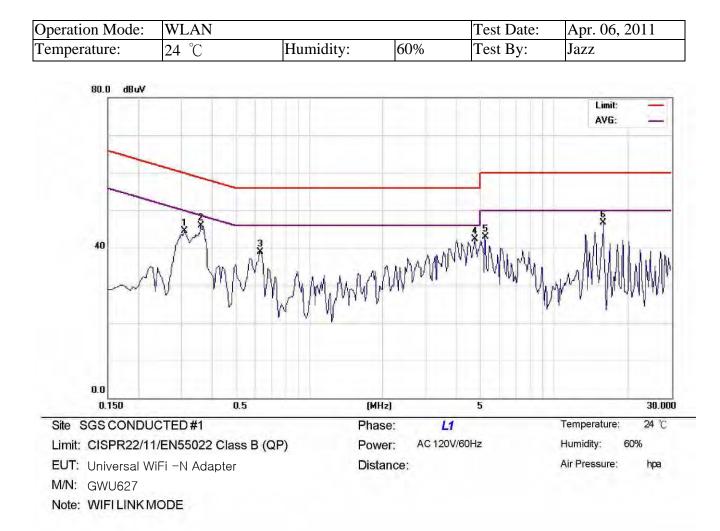


No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.3100	44.30	0.12	44.42	59.97	-15.55	peak	
2	*	0.3600	45.86	0.12	45.98	58.73	-12.75	peak	
3		0.6300	38.85	0.12	38.97	56.00	-17.03	peak	
4		4.7600	42.11	0.22	42.33	56.00	-13.67	peak	
5		5.2400	42.65	0.23	42.88	60.00	-17.12	peak	
6	-	15.9200	46.06	0.55	46.61	60.00	-13.39	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions</u>) are retained as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業 區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 14 of 121

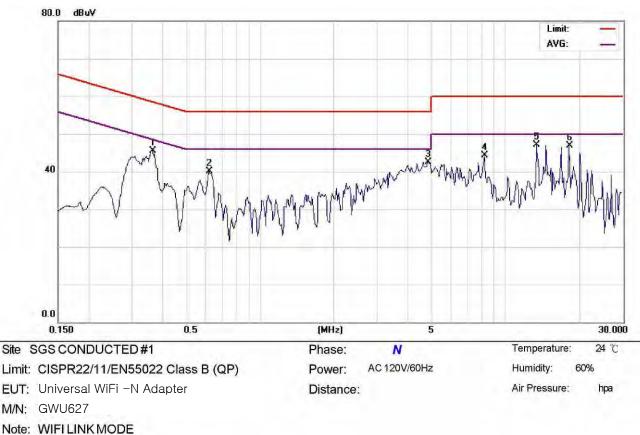

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.3650	45.44	0.12	45.56	58.61	-13.05	peak		
2		0.6200	39.96	0.12	40.08	56.00	-15.92	peak		
3		4.8300	42.30	0.22	42.52	56.00	-13.48	peak		
4	-	8.2400	43.87	0.38	44.25	60.00	-15.75	peak		
5	*	13.4200	46.58	0.51	47.09	60.00	-12.91	peak		
6	1	18.2400	46.41	0.44	46.85	60.00	-13.15	peak		



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 15 of 121

6 PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable:

According to §15.247(a)(2), (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and
5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions,htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_edocument.htm</u>). Attention is drawn to the limitians of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業 區五工路 134 號




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 16 of 121

6.2 Measurement Equipment Used:

	Conduct	ted Emission T	Test Site		
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Power Sensor	Anritsu	MA2411B	917032	01/21/2011	01/20/2012
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2011	01/24/2012
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2011	01/04/2012
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011

6.3 Test Set-up:



6.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz,Bandwidth=26dB occupied Bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.



6.5 Measurement Result:

802.11b

	Cable loss = 0	Peak Power Output (dBm)						
СН	CH Frequency (MHz)		Data	Required Limit				
CII	Frequency (WIIIZ)	1	2	5.5	11	- Required Limit		
1	2412	8.45	8.40	8.25	8.02	1 Watt = 30 dBm		
6	2437	8.48	8.42	8.30	8.12	1 Watt = 30 dBm		
11	2462	8.46	8.35	8.22	8.10	1 Watt = 30 dBm		

802.11g

Cat	ble loss $= 0$		Peak Power Output(dBm)									
СН	Frequency		Data Rate									
011	(MHz)	6	9	12	18	24	36	48	54	Required Limit		
1	2412	8.37	8.25	8.10	8.05	7.89	7.78	7.52	7.32	1 Watt = 30 dBm		
6	2437	8.43	8.31	8.21	8.12	8.05	7.88	7.55	7.25	1 Watt = 30 dBm		
11	2462	8.44	8.35	8.25	8.15	8.02	7.91	7.65	7.35	1 Watt = 30 dBm		



802.11n_20M

Cat	ble loss $= 0$		Peak Power Output(dBm)								
СН	Frequency		Required Limit								
011	(MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	nequii cu Liinie	
1	2412	8.29	8.10	8.05	7.99	7.89	7.79	7.21	7.10	1 Watt = 30 dBm	
6	2437	8.33	8.23	8.12	8.10	8.01	7.89	7.31	7.21	1 Watt = 30 dBm	
11	2462	8.35	8.28	8.10	8.02	7.86	7.88	7.20	7.12	1 Watt = 30 dBm	

802.11n_40M

Cat	ble loss $= 0$		Peak Power Output(dBm)							
СН	Frequency		Data Rate						Required Limit	
	(MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	nequi cu Linit
3	2422	8.36	8.25	8.05	8.01	7.75	7.65	7.21	7.10	1 Watt = 30 dBm
6	2437	8.40	8.35	8.25	8.21	7.85	7.75	7.10	7.05	1 Watt = 30 dBm
9	2452	8.40	8.32	8.30	8.25	7.87	7.85	7.25	7.08	1 Watt = 30 dBm

*Note: Offset 0.5dB


Note: Refer to next page for plots.




FCC ID: QLEGWU627

Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 19 of 121

802.11b, 1Mbps Peak Power Output Plot (CH Low)

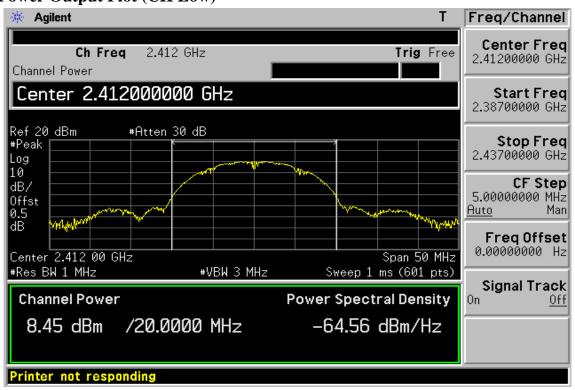


Peak Power Output Plot (CH Mid)

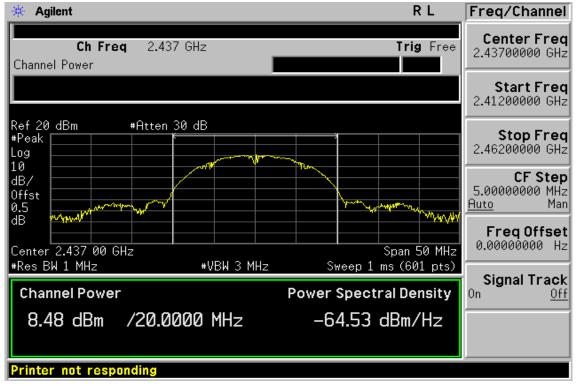




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 20 of 121

Peak Power Output Plot (CH High)

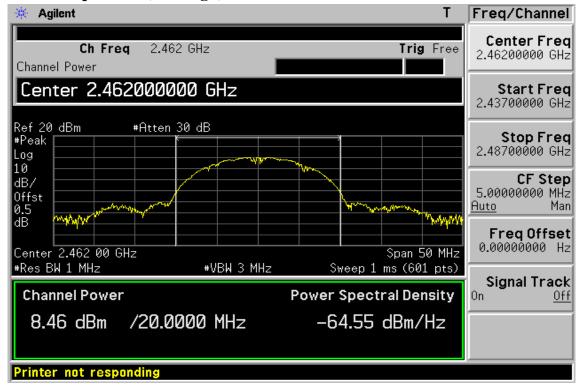


Avg. Power Output Plot (CH Low)

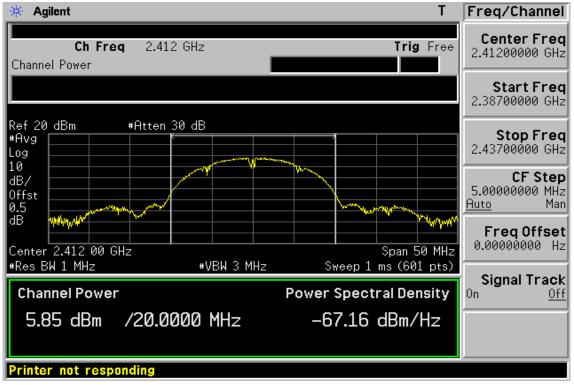




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 21 of 121

Avg. Power Output Plot (CH Mid)

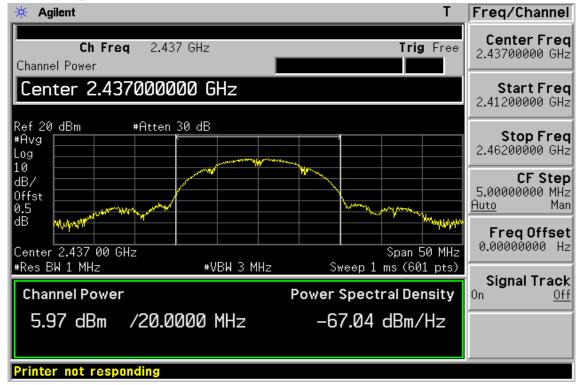

Avg. Power Output Plot (CH High)

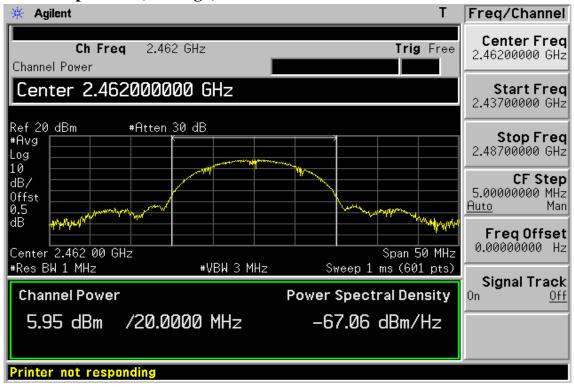





FCC ID: QLEGWU627

Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 22 of 121

802.11g, 6Mbps Peak Power Output Plot (CH Low)

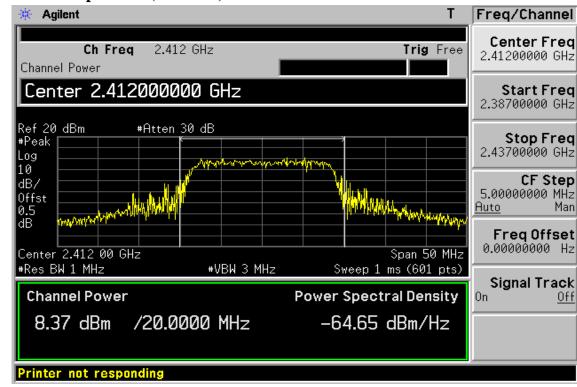


Peak Power Output Plot (CH Mid)

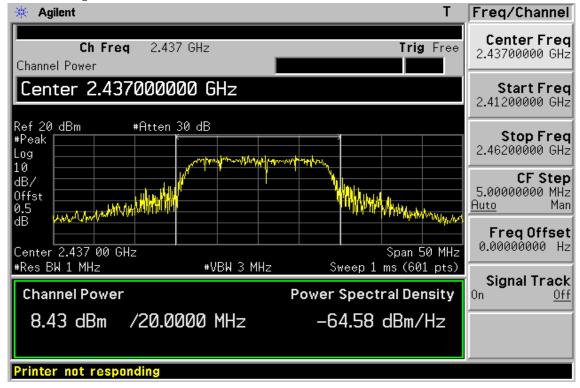




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 23 of 121

Peak Power Output Plot (CH High)

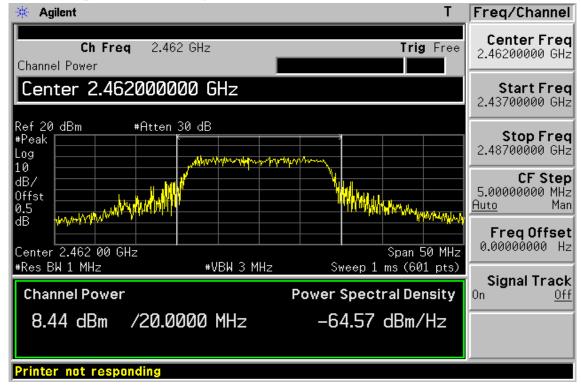


Avg. Power Output Plot (CH Low)

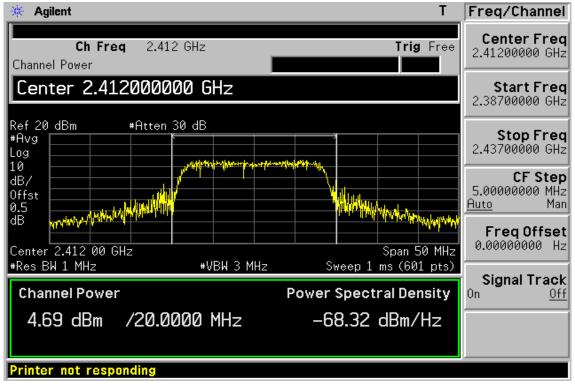




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 24 of 121

Avg. Power Output Plot (CH Mid)

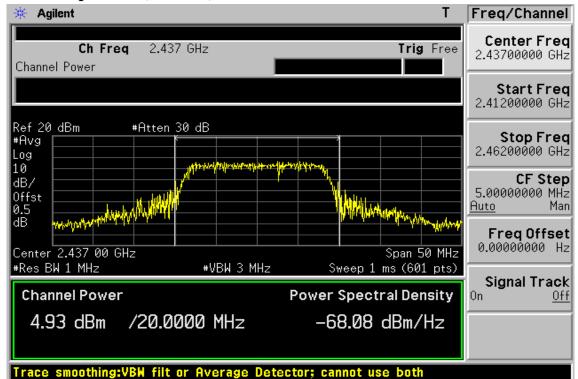

Avg. Power Output Plot (CH High)

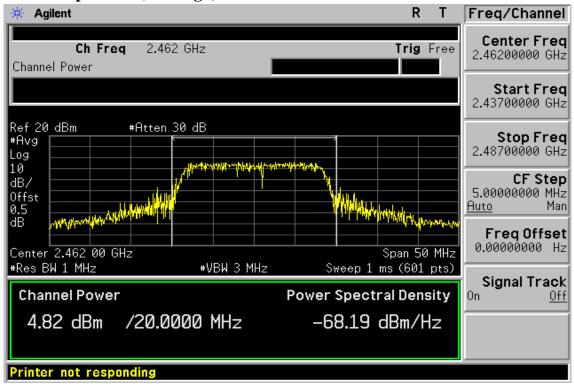





FCC ID: QLEGWU627

Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 25 of 121

802.11n_20M, 6.5Mbps Peak Power Output Plot (CH Low)

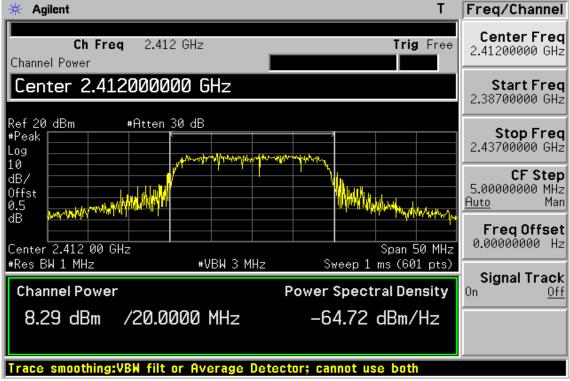


Peak Power Output Plot (CH Mid)

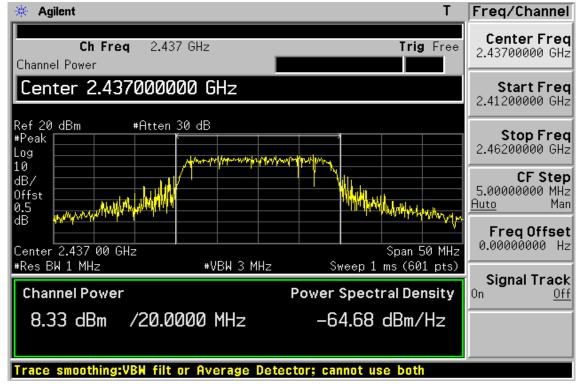




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 26 of 121

Peak Power Output Plot (CH High)

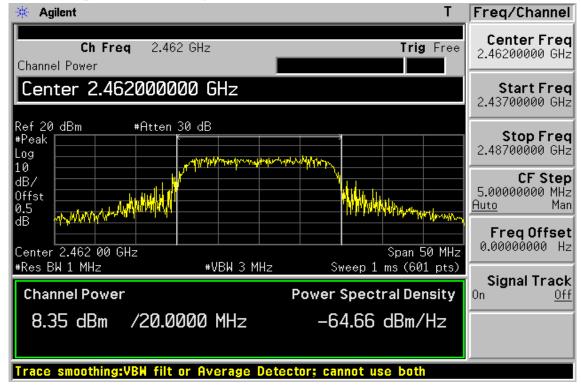


Avg. Power Output Plot (CH Low)

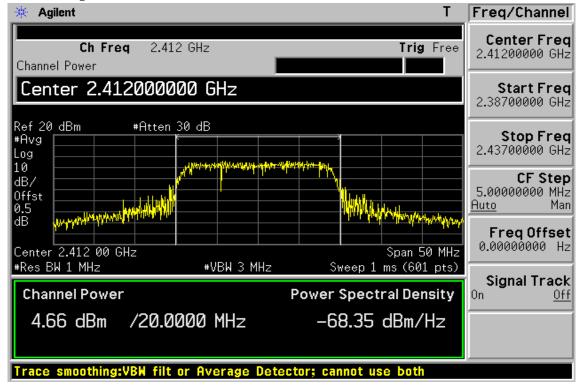




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 27 of 121

Avg. Power Output Plot (CH Mid)

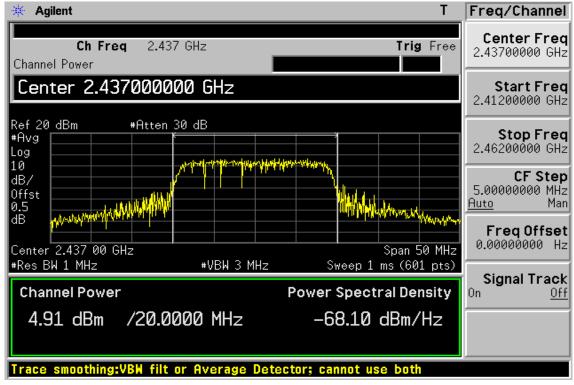


Avg. Power Output Plot (CH High)

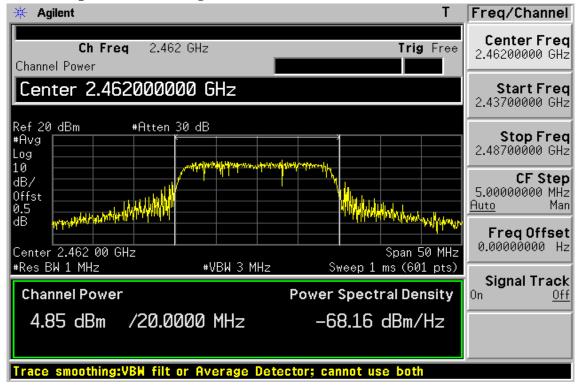





Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 28 of 121

802.11n_40M, 13.5Mbps Peak Power Output Plot (CH Low)

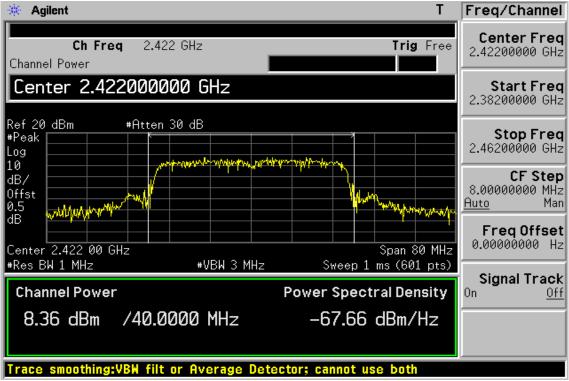




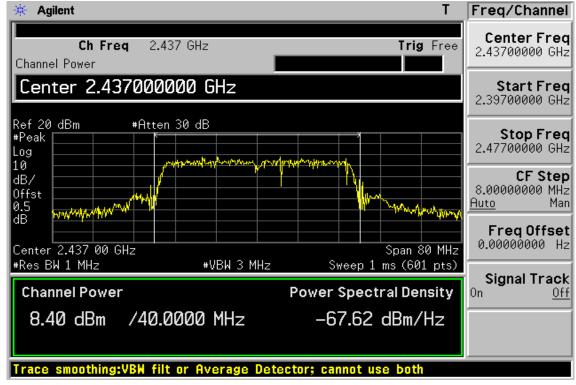




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 29 of 121

Peak Power Output Plot (CH High)

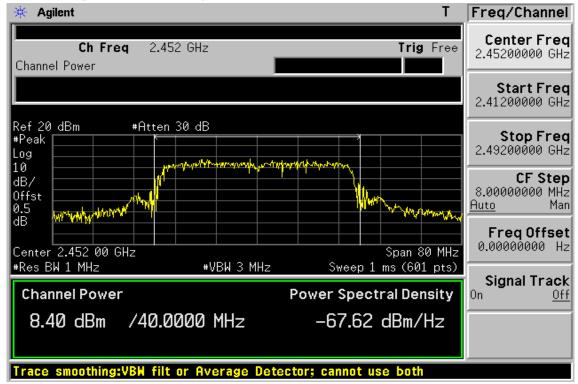


Avg. Power Output Plot (CH Low)

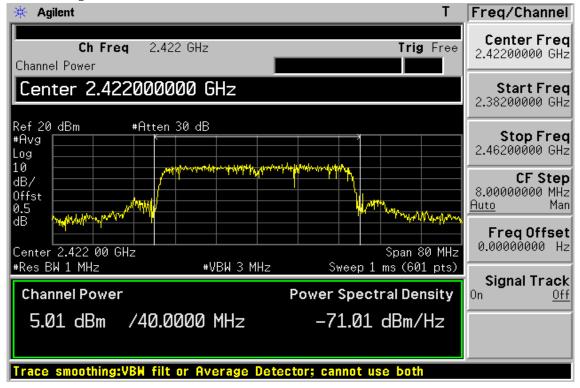




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 30 of 121

Avg. Power Output Plot (CH Mid)

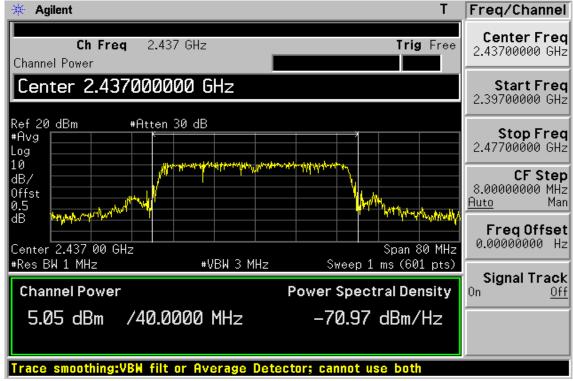

Avg. Power Output Plot (CH High)

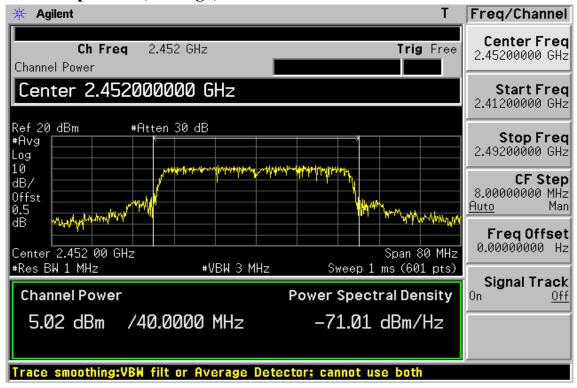



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 31 of 121

7 6dB Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

1.Place the EUT on the table and set it in transmitting mode.

- 2.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3.Set the spectrum analyzer as RBW=100KHz, VBW = 3*RBW, Span= 30M/50MHz, Sweep=auto
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.



7.5 Measurement Result:

802.11b			
Frequency (MHz)	Bandwidth	Bandwidth	Result
	(MHz)	(KHz)	
2412	10.112	> 500	PASS
2437	10.115	> 500	PASS
2462	10.108	> 500	PASS
802.11g			
Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	16.584	> 500	PASS
2437	16.559	> 500	PASS
2462	16.585	> 500	PASS
802.11n_20M			
Frequency (MHz)	Bandwidth	Bandwidth	Result
	(MHz)	(KHz)	
2412	17.781	> 500	PASS
2437	17.798	> 500	PASS
2462	17.805	> 500	PASS
802.11n_40M			
Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2422	36.477	> 500	PASS
2437	36.500	> 500	PASS
2452	36.472	> 500	PASS

*Offset 0.5dB

Note: Refer to next page for plots.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 33 of 121

802.11b 6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid





Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 34 of 121


6dB Band Width Test Data CH-High





Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 35 of 121

802.11g 6dB Band Width Test Data CH-Low

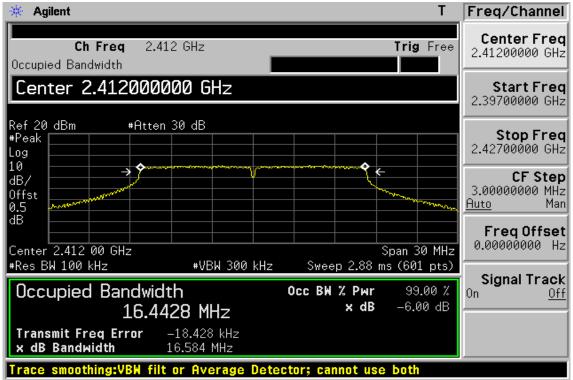


6dB Band Width Test Data CH-Mid





Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 36 of 121


6dB Band Width Test Data CH-High

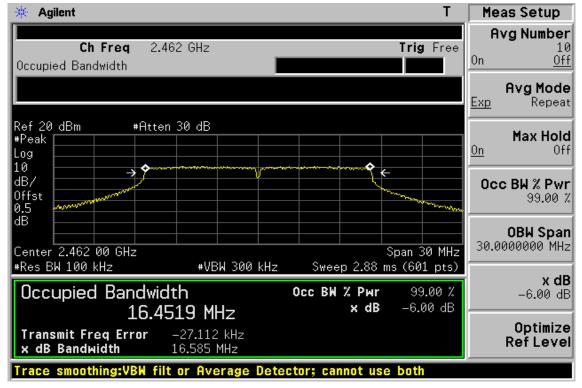




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 37 of 121

802.11n_20M 6dB Band Width Test Data CH-Low

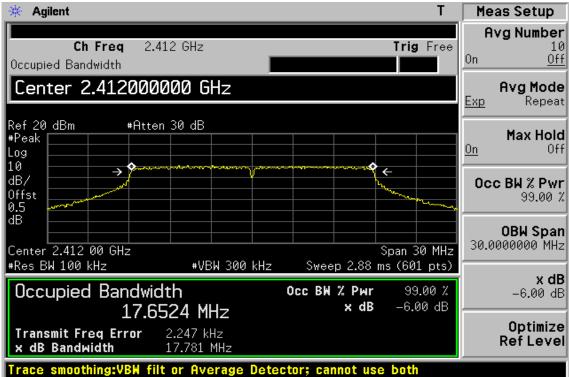


6dB Band Width Test Data CH-Mid

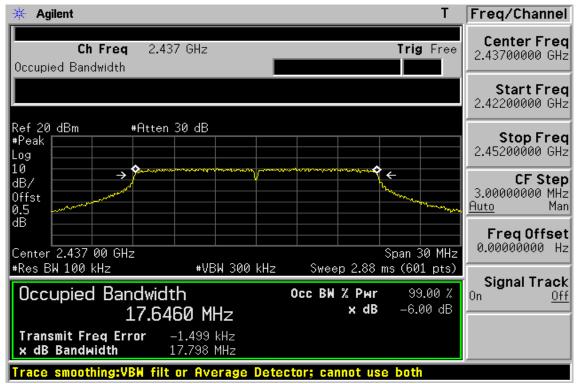



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 38 of 121


6dB Band Width Test Data CH-High

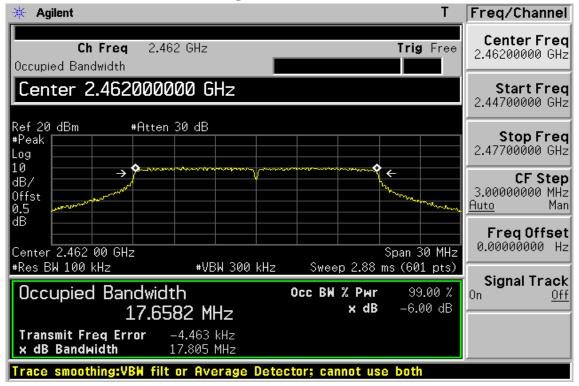




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 39 of 121

802.11n_40M 6dB Band Width Test Data CH-Low

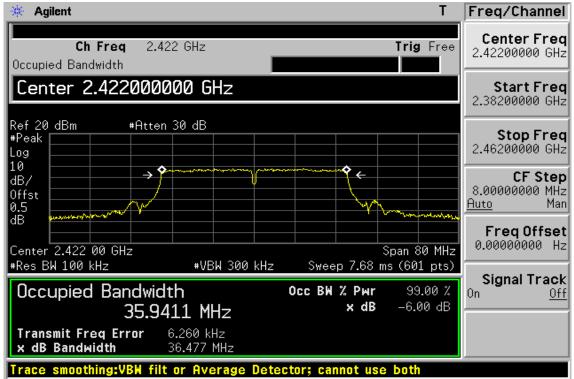

6dB Band Width Test Data CH-Mid

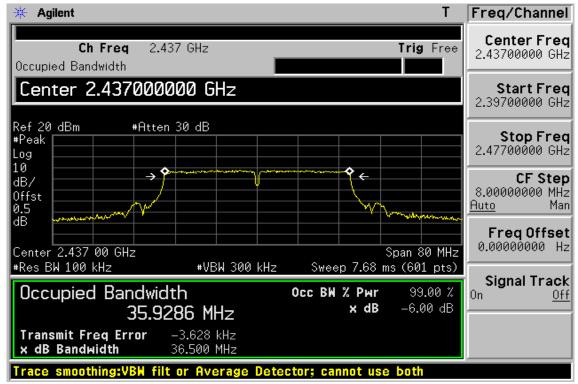


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, thm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u> of Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms and conditions</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣五殿工業區五工路 134 號

Member of SGS Group



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 40 of 121

6dB Band Width Test Data CH-High

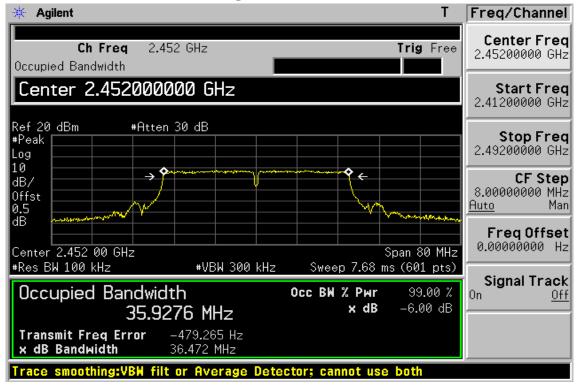



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 41 of 121

8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2 Radiated emission:

	966 Chamber											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.							
ТҮРЕ		NUMBER	NUMBER	CAL.								
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2011	02/11/2012							
Loop antenna	MESSTEC	FLA30	03/10086	07/08/2009	07/07/2011							
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/19/2010	11/18/2011							
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2010	05/08/2012							
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2010	11/27/2011							
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2011	01/04/2012							
Turn Table	HD	DT420	N/A	N.C.R	N.C.R							
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R							
Controller	HD	HD100	N/A	N.C.R	N.C.R							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2011	01/04/2012							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2011	01/04/2012							
3m Site	SGS	966 chamber	N/A	11/08/2010	11/09/2011							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

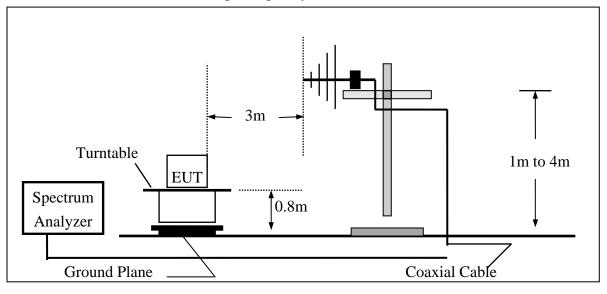

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

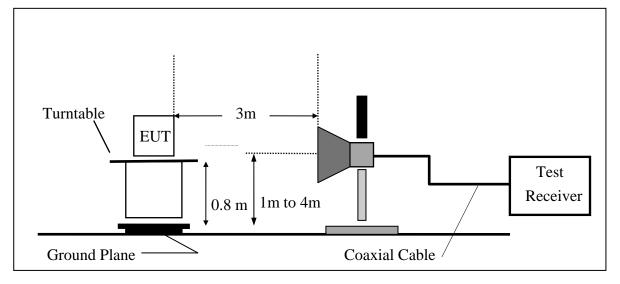



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 44 of 121

802.11b Band Edges Test Data CH-Low

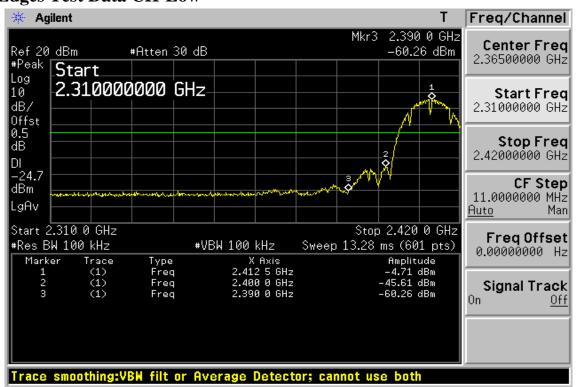



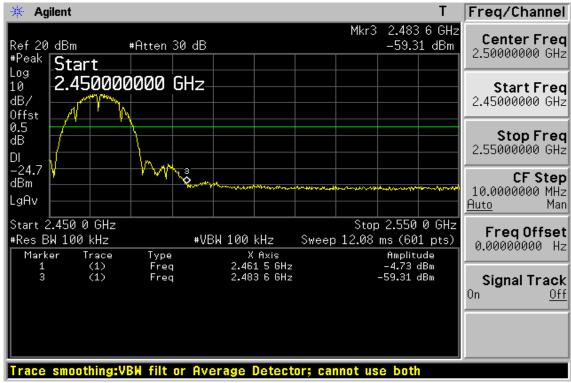



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 45 of 121

Radiated Emission: 802.11 b mode

Operation Mode	TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		
-			

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	U	Remark
2390.00	53.98		-1.39	52.59		74.00	54.00	-21.41	Peak
Operation			H Low					Apr. 01, 20	011
Fundamen	tal Frequei	ncy 2412	MHz			Test	By	Jazz	
Temperatu	re	25 °C	2			Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)		(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2390.00	53.41		-1.39	52.02		74.00	54.00	-21.98	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 46 of 121

Radiated Emission: 802.11 b mode

Operation Mode	TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)(dBuV/n	n) (dB)	
2483.50	53.82		-0.92	52.90		74.00	54.00	-21.10	Peak
Operation	Mode	TX C	H High			Test	Date	Apr. 01, 20	011
Fundamen	tal Frequer	ncy 2462	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		

		тсак	AV		Actu		ТСак	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)) (d Bu V/m)(dBuV/m)	(dB)	
	2483.50	53.86		-0.92	52.94		74.00	54.00	-21.06	Peak


Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 47 of 121

802.11g Band Edges Test Data CH-Low

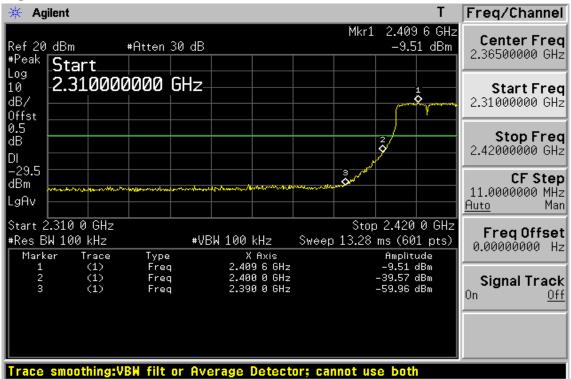



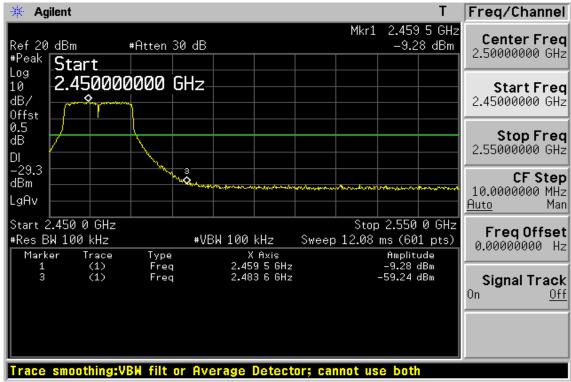

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_soms</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Member of SGS Group



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 48 of 121

Radiated Emission: 802.11 g mode

Operation Mode	TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412 MHz	Test By	Jazz
Temperature	25 ℃	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading	0		Peak	AV (dBuV/m)	Limit	Limit	0	Remark
(MHZ)	(dBuV)	(UDUV)						I, (UD)	
2390.00	54.19		-1.39	52.80		74.00	54.00	-21.20	Peak
Operation Fundament Temperatu Humidity	tal Frequer					Test Test Pol	By	Apr. 01, 20 Jazz Hor.	011
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2390.00	54.60		-1.39	53.21		74.00	54.00	-20.79	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 49 of 121

Radiated Emission: 802.11 g mode

TX CH High	Test Date	Apr. 01, 2011
2462 MHz	Test By	Jazz
25 °C	Pol	Ver.
65 %		
	2462 MHz 25 ℃	2462 MHzTest By25 °CPol

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(d Bu V/m)	(dBuV/n	n) (dB)	
2483.50	53.37		-0.92	52.45		74.00	54.00	-21.55	Peak
Operation Fundament Temperatu Humidity	tal Frequer		CH High MHz			Test Test Pol	By	Apr. 01, 20 Jazz Hor.)11
Peak AV Actual FS Peak AV									
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark

(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2483.50	53.45		-0.92	52.53		74.00	54.00	-21.47	Peak


Remark:

- (1)Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument us-(2)ing Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 50 of 121

802.11n_20M Band Edges Test Data CH-Low

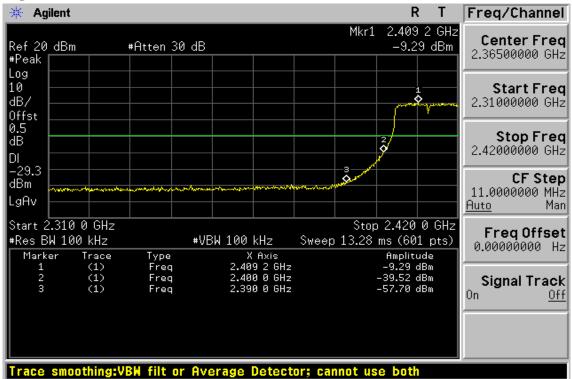



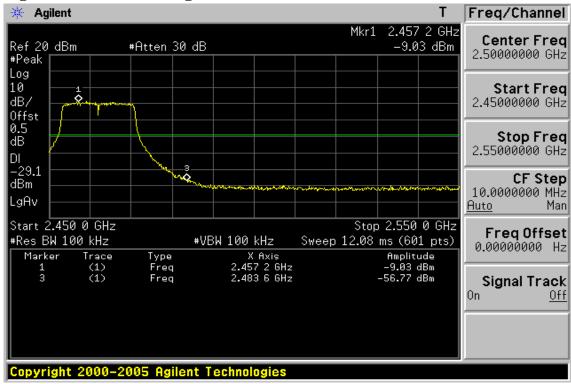



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 51 of 121

Radiated Emission: 802.11 n_20M mode

Operation Mode	TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq (MHz	U	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2390.0	0 54.27		-1.39	52.88		74.00	54.00	-21.12	Peak
-						Test Test Pol	By	Apr. 01, 20 Jazz Hor.)11
Freq (MHz	U	AV Reading (dBuV)		Actu Peak (dBuV/m)	al FS AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/n	0	Remark
2390.0	0 54.29		-1.39	52.90		74.00	54.00	-21.10	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 52 of 121

Radiated Emission: 802.11 n_20M mode

Operation Mode	TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		
Deele	A \$7		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(d Bu V/m)	(dBuV/m	(dB)	
2483.50	54.64	43.58	-0.92	53.72	42.66	74.00	54.00	-11.34	AV
Operation	Mode	TX C	H High			Test	Date .	Apr. 01, 20)11
Fundamen	tal Frequei	ncy 2462	MHz			Test	By .	Jazz	
Temperatu	re	25 °C				Pol]	Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	L im it	Margin	Remark

Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	53.03		-0.92	52.11		74.00	54.00	-21.89	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 53 of 121

802.11n_40M





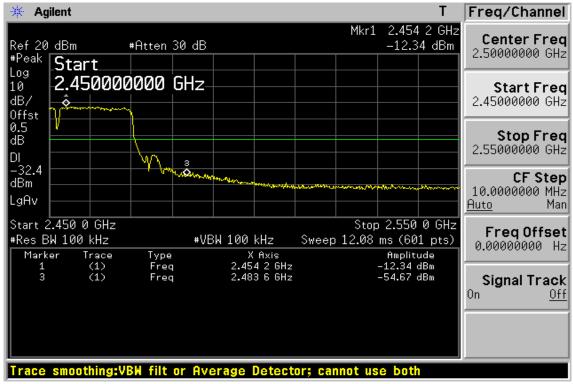



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 54 of 121

Radiated Emission: 802.11 n_40M mode

Operation Mode	TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2422 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2390.00	53.67		-1.39	52.28		74.00	54.00	-21.72	Peak
Operation Fundament	Mode tal Frequer		H Low MHz			Test Test		Apr. 01, 20 Jazz	011
Femperatu Humidity	re	25 °C 65 %	2			Pol	-	Hor.	
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2390.00	53.73		-1.39	52.34		74.00	54.00	-21.66	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 55 of 121

Radiated Emission: 802.11 n_40M mode

Operation Mode	TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2452 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(d Bu V/m)	(dBuV/n	n) (d B)	
2483.50	55.14	43.77	-0.92	54.22	42.85	74.00	54.00	-11.15	AV
Operation	Mode	TX C	H High			Test	Date	Apr. 01, 20	011
Fundamen	tal Frequei	ncy 2452	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
F	Deeding	Deeding	Amt /CT	Deals	A X 7	T :	T : :+	Manain	Domonly

-	Reading	U			AV			0	Remark
(MHz)	(dBuV)	(dBuV)	$\mathbf{CF}(\mathbf{dB})$	(dBuV/m)	(dBuV/m) (d Bu V/m)(dBuV/m	(dB)	
2483.50	53.72		-0.92	52.80		74.00	54.00	-21.20	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 56 of 121

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2 Radiated emission:

Refer to section 7.2 for details.

9.3 Test SET-UP:

9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2 Radiated emission:

Refer to section 7.3 for details.

9.4 Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

www.tw.sgs.com



9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG


Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 58 of 121

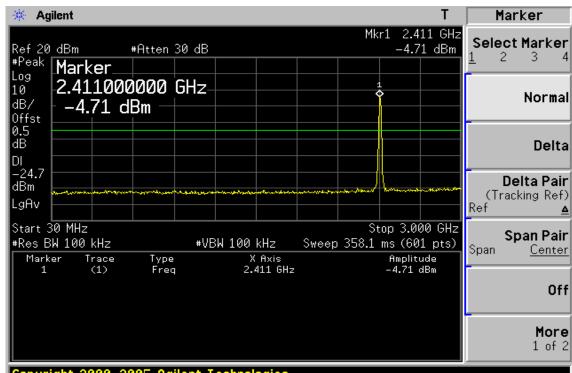

Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz


Copyright 2000–2005 Agilent Technologie

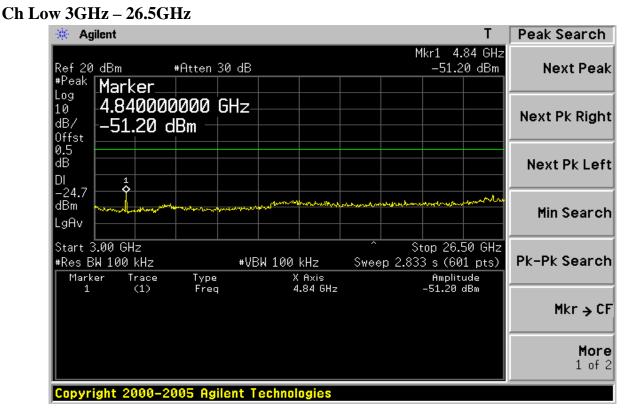




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 59 of 121

Ch Mid 30MHz - 3GHz

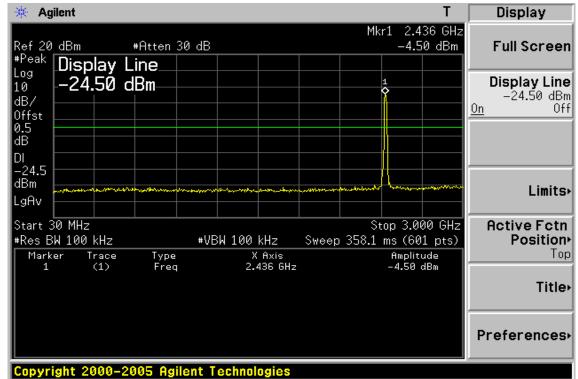

Ch Mid 3GHz – 26.5GHz

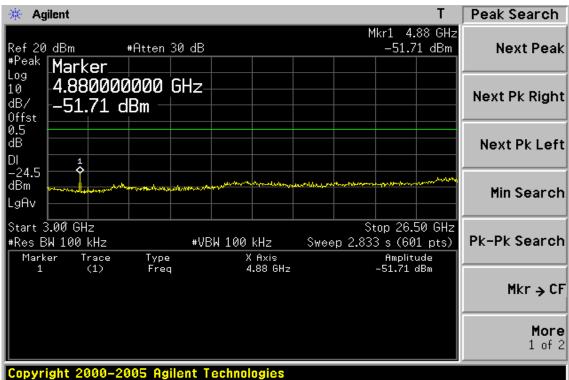


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_soms</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Member of SGS Group




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 60 of 121

Ch High 30MHz - 3GHz

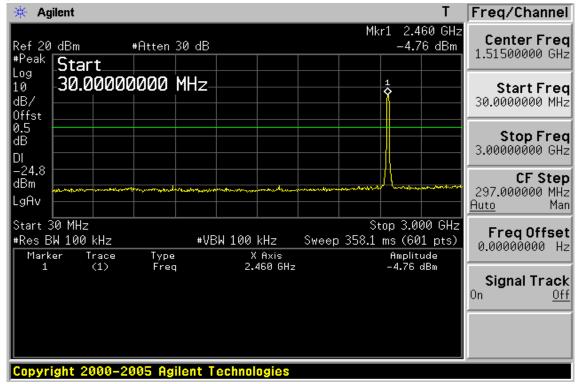

Ch High 3GHz – 26.5GHz

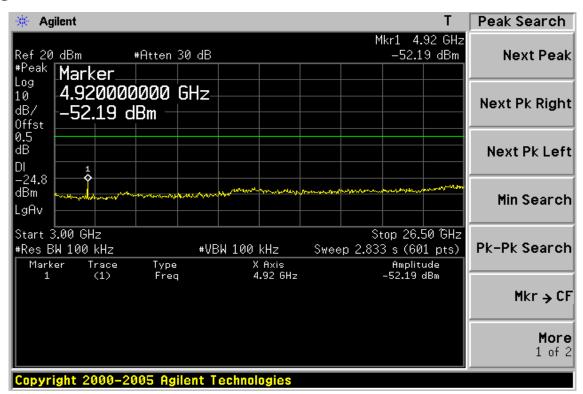


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.on/terms_e-docum/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台兆縣五殿工業區五工路 134 號

台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com


Member of SGS Group



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 61 of 121

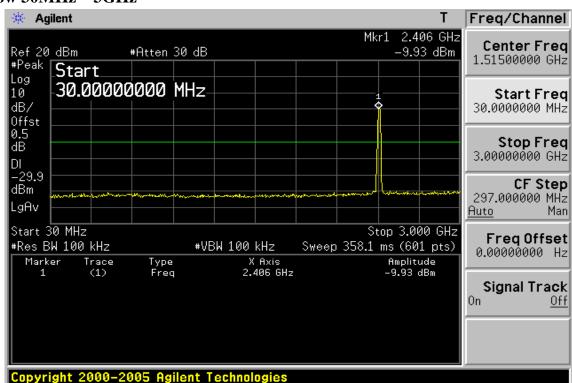


Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz – 3GHz

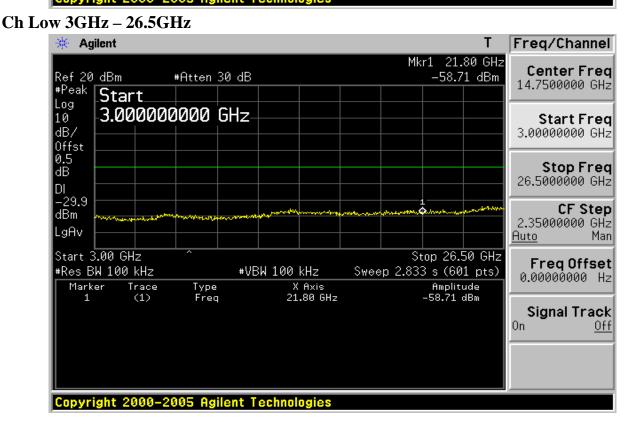




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 62 of 121

Ch Mid 30MHz - 3GHz

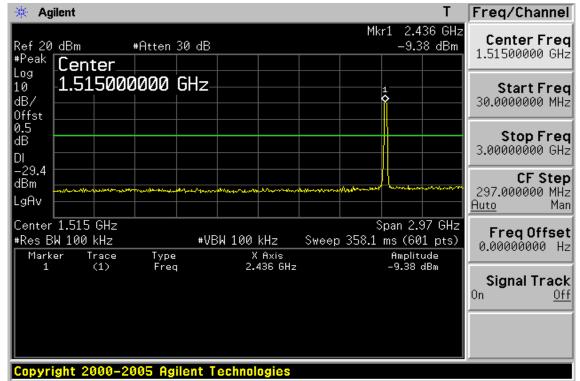

Ch Mid 3GHz – 26.5GHz

台

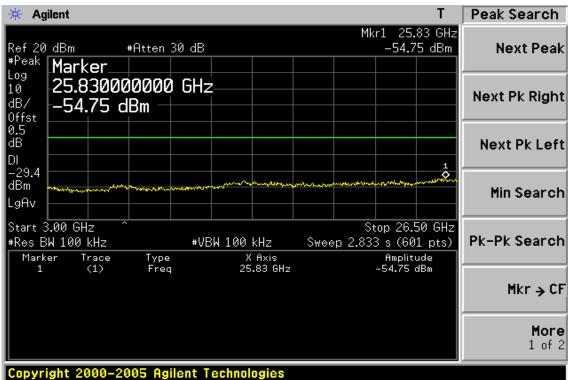

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>, Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號


灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com

Member of SGS Group




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 63 of 121

Ch High 30MHz - 3GHz

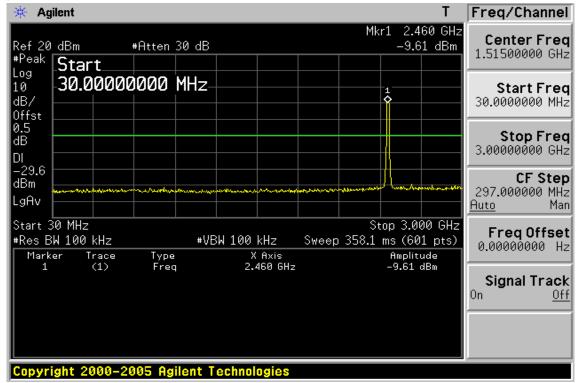


Ch High 3GHz – 26.5GHz

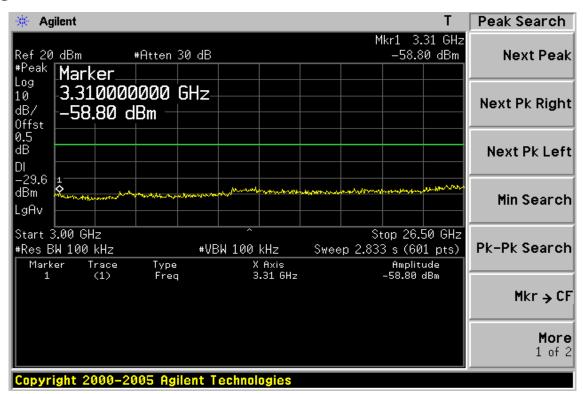




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 64 of 121



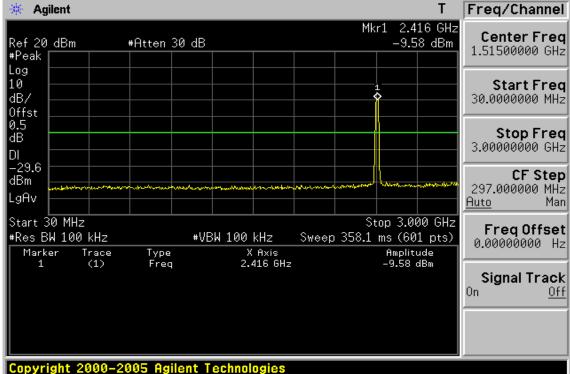


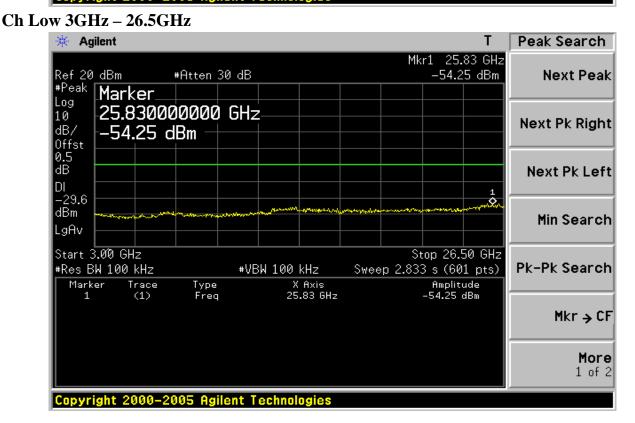




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 65 of 121

Ch Mid 30MHz - 3GHz

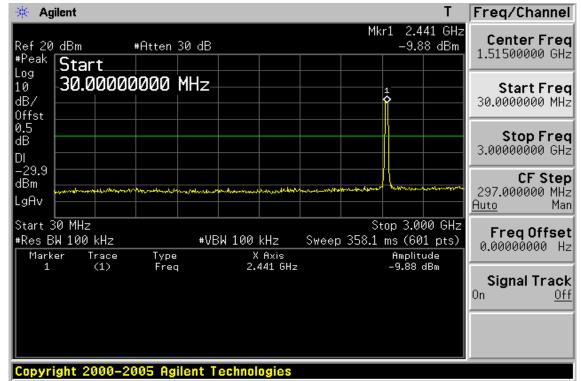


Ch Mid 3GHz – 26.5GHz

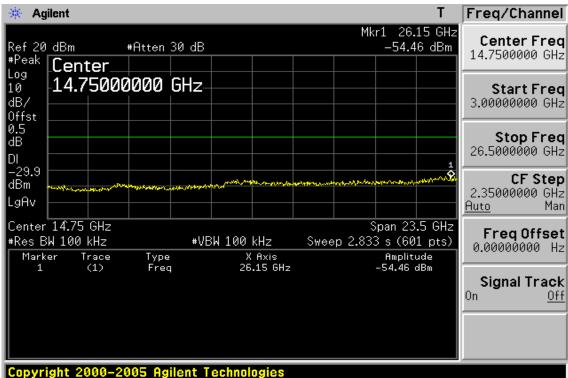




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 66 of 121

Ch High 30MHz - 3GHz

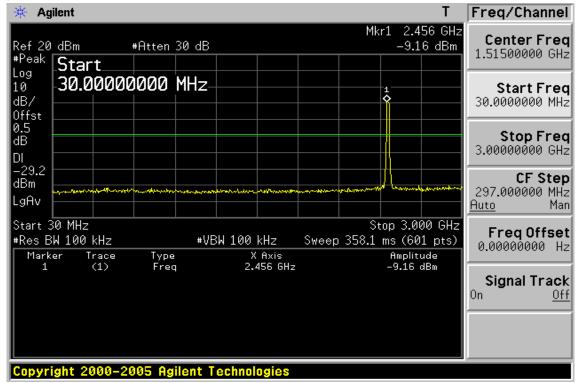


Ch High 3GHz - 26.5GHz

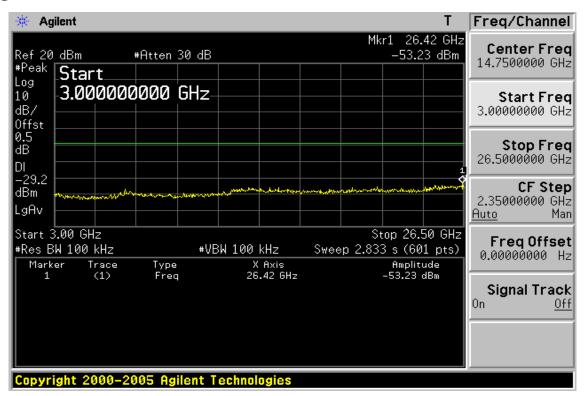




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 67 of 121



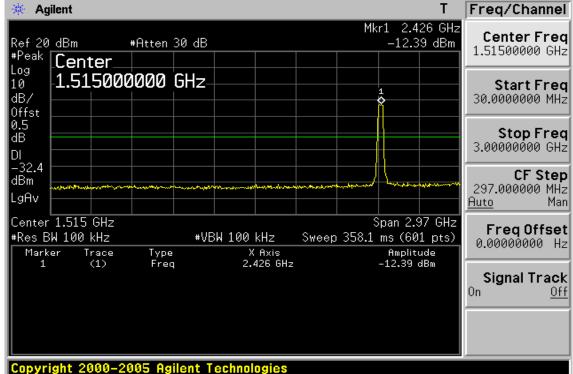

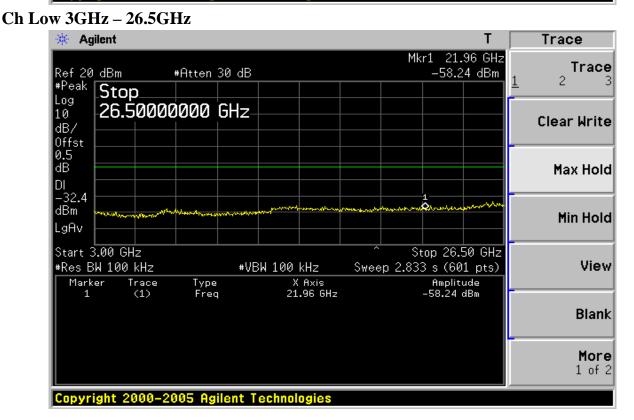


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_soms</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Member of SGS Group




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 68 of 121

Ch Mid 30MHz – 3GHz

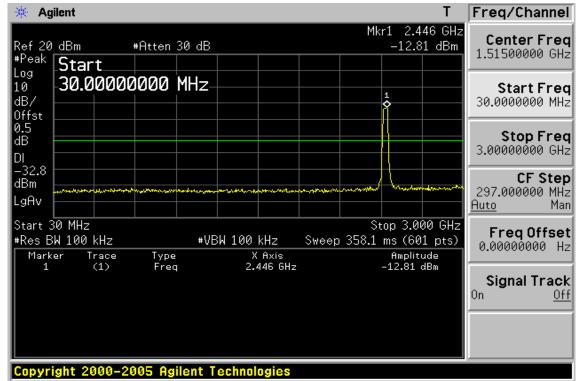


Ch Mid 3GHz – 26.5GHz

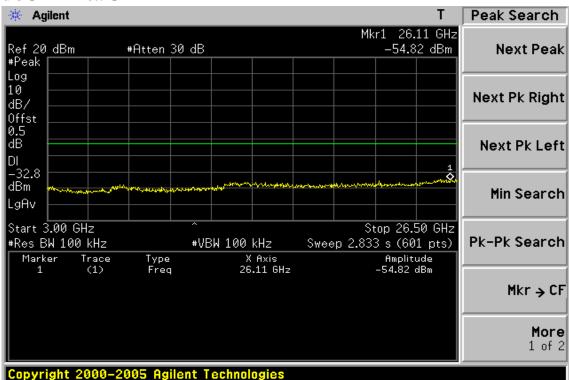




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 69 of 121

Ch High 30MHz - 3GHz

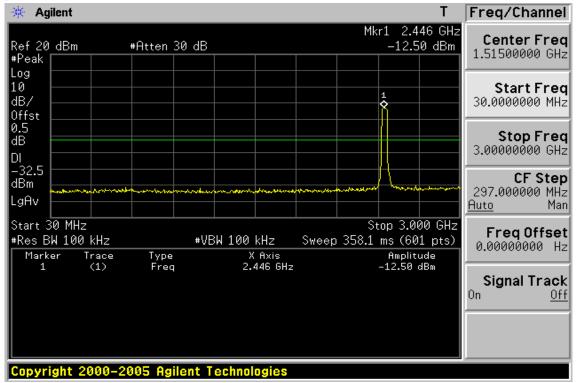

Ch High 3GHz – 26.5GHz

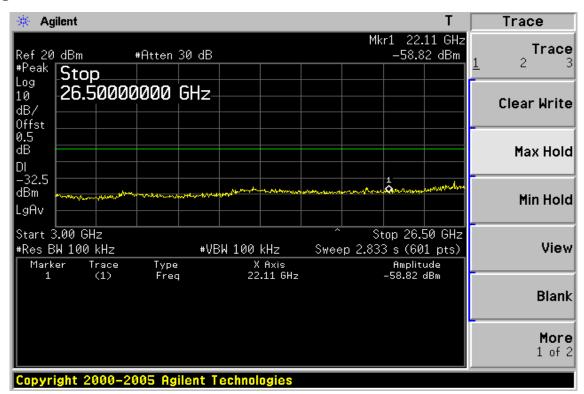



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 70 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
78.50	V	Peak	50.79	-17.63	33.16	40.00	-6.84
90.14	V	Peak	46.78	-17.62	29.16	43.50	-14.34
105.66	V	Peak	45.15	-16.56	28.59	43.50	-14.91
158.04	V	Peak	32.66	-13.28	19.38	43.50	-24.12
321.00	V	Peak	32.81	-12.53	20.28	46.00	-25.72
546.04	V	Peak	32.49	-7.70	24.79	46.00	-21.21
31.94	Н	Peak	43.80	-14.82	28.98	40.00	-11.02
105.66	Н	Peak	43.99	-16.56	27.43	43.50	-16.07
158.04	Н	Peak	33.33	-13.28	20.05	43.50	-23.45
474.26	Н	Peak	33.03	-8.55	24.48	46.00	-21.52
524.70	Н	Peak	32.61	-8.06	24.55	46.00	-21.45
798.24	Н	Peak	31.78	-3.08	28.70	46.00	-17.30

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 71 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	32.91	V	Peak	47.06	-14.73	32.33	40.00	-7.67
	78.50	V	Peak	51.42	-17.63	33.79	40.00	-6.21
	105.66	V	Peak	44.98	-16.56	28.42	43.50	-15.08
	151.25	V	Peak	32.62	-12.89	19.73	43.50	-23.77
	507.24	V	Peak	32.57	-8.40	24.17	46.00	-21.83
	600.36	V	Peak	32.33	-6.00	26.33	46.00	-19.67
	31.94	Н	Peak	44.44	-14.82	29.62	40.00	-10.38
	105.66	Н	Peak	44.30	-16.56	27.74	43.50	-15.76
	148.34	Н	Peak	32.24	-12.90	19.34	43.50	-24.16
	458.74	Н	Peak	32.51	-8.61	23.90	46.00	-22.10
	607.15	Н	Peak	32.69	-5.86	26.83	46.00	-19.17
	837.04	Н	Peak	32.96	-2.22	30.74	46.00	-15.26

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions</u>) are retained as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業 區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 72 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
78.50	V	Peak	51.41	-17.63	33.78	40.00	-6.22
105.66	V	Peak	45.41	-16.56	28.85	43.50	-14.65
146.40	V	Peak	32.76	-13.06	19.70	43.50	-23.80
324.88	V	Peak	31.86	-12.43	19.43	46.00	-26.57
490.75	V	Peak	32.89	-8.50	24.39	46.00	-21.61
742.95	V	Peak	32.50	-4.39	28.11	46.00	-17.89
39.70	Н	Peak	42.13	-13.73	28.40	40.00	-11.60
105.66	Н	Peak	44.09	-16.56	27.53	43.50	-15.97
148.34	Н	Peak	32.35	-12.90	19.45	43.50	-24.05
427.70	Н	Peak	33.15	-9.19	23.96	46.00	-22.04
652.74	Н	Peak	32.37	-4.96	27.41	46.00	-18.59
827.34	Н	Peak	32.54	-2.46	30.08	46.00	-15.92

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions</u>) are retained as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業 區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 73 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

(PK/QP)	(dBuV)	(dB)			
		(UD)	(dBuV/m)	(dBuV/m)	(dB)
Peak	47.74	-14.82	32.92	40.00	-7.08
Peak	51.50	-17.63	33.87	40.00	-6.13
Peak	48.35	-17.62	30.73	43.50	-12.77
Peak	44.55	-16.56	27.99	43.50	-15.51
Peak	32.90	-12.90	20.00	43.50	-23.50
Peak	32.31	-4.45	27.86	46.00	-18.14
Peak	40.71	-13.73	26.98	40.00	-13.02
Peak	43.34	-16.56	26.78	43.50	-16.72
Peak	32.01	-12.83	19.18	43.50	-24.32
Peak	32.24	-9.06	23.18	46.00	-22.82
Peak	32.66	-7.38	25.28	46.00	-20.72
Peak	32.74	-2.08	30.66	46.00	-15.34
	Peak Peak Peak Peak Peak Peak Peak Peak	Peak 51.50 Peak 48.35 Peak 44.55 Peak 32.90 Peak 32.31 Peak 40.71 Peak 43.34 Peak 32.01 Peak 32.24 Peak 32.66	Peak 51.50 -17.63 Peak 48.35 -17.62 Peak 44.55 -16.56 Peak 32.90 -12.90 Peak 32.31 -4.45 Peak 40.71 -13.73 Peak 43.34 -16.56 Peak 32.01 -12.83 Peak 32.24 -9.06 Peak 32.66 -7.38	Peak 51.50 -17.63 33.87 Peak 48.35 -17.62 30.73 Peak 44.55 -16.56 27.99 Peak 32.90 -12.90 20.00 Peak 32.31 -4.45 27.86 Peak 40.71 -13.73 26.98 Peak 43.34 -16.56 26.78 Peak 32.01 -12.83 19.18 Peak 32.24 -9.06 23.18 Peak 32.66 -7.38 25.28	Peak 51.50 -17.63 33.87 40.00 Peak 48.35 -17.62 30.73 43.50 Peak 44.55 -16.56 27.99 43.50 Peak 32.90 -12.90 20.00 43.50 Peak 32.31 -4.45 27.86 46.00 Peak 40.71 -13.73 26.98 40.00 Peak 43.34 -16.56 26.78 43.50 Peak 32.01 -12.83 19.18 43.50 Peak 32.24 -9.06 23.18 46.00 Peak 32.66 -7.38 25.28 46.00

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 74 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
78.50	V	Peak	49.53	-17.63	31.90	40.00	-8.10
90.14	V	Peak	48.73	-17.62	31.11	43.50	-12.39
148/.34	V	Peak	32.25	-12.90	19.35	54.00	-34.65
340.40	V	Peak	32.33	-12.01	20.32	46.00	-25.68
461.65	V	Peak	32.72	-8.61	24.11	46.00	-21.89
607.15	V	Peak	33.16	-5.86	27.30	46.00	-18.70
37.76	Н	Peak	42.20	-14.24	27.96	40.00	-12.04
105.66	Н	Peak	44.15	-16.56	27.59	43.50	-15.91
148.34	Н	Peak	32.21	-12.90	19.31	43.50	-24.19
432.55	Н	Peak	33.11	-9.06	24.05	46.00	-21.95
553.80	Н	Peak	32.42	-7.53	24.89	46.00	-21.11
648.86	Н	Peak	32.61	-4.97	27.64	46.00	-18.36

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 75 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
78.50	V	Peak	48.36	-17.63	30.73	40.00	-9.27
90.14	V	Peak	49.08	-17.62	31.46	43.50	-12.04
105.66	V	Peak	45.09	-16.56	28.53	43.50	-14.97
148.34	V	Peak	32.50	-12.90	19.60	43.50	-23.90
468.44	V	Peak	32.07	-8.55	23.52	46.00	-22.48
740.04	V	Peak	32.31	-4.43	27.88	46.00	-18.12
39.70	Н	Peak	41.97	-13.73	28.24	40.00	-11.76
105.66	Н	Peak	43.94	-16.56	27.38	43.50	-16.12
158.04	Н	Peak	33.40	-13.28	20.12	43.50	-23.38
255.04	Н	Peak	32.28	-13.69	18.59	46.00	-27.41
322.64	Н	Peak	33.02	-12.16	20.86	46.00	-25.14
468.44	Н	Peak	32.03	-8.55	23.48	46.00	-22.52

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 76 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
31.94	V	Peak	47.84	-14.82	33.02	40.00	-6.98
78.50	V	Peak	50.30	-17.63	32.67	40.00	-7.33
105.66	V	Peak	45.41	-16.56	28.85	43.50	-14.65
158.04	V	Peak	33.00	-13.28	19.72	43.50	-23.78
442.25	V	Peak	32.49	-8.74	23.75	46.00	-22.25
658.56	V	Peak	32.82	-4.98	27.84	46.00	-18.16
34.85	Н	Peak	43.20	-14.58	28.62	40.00	-11.38
105.66	Н	Peak	44.85	-16.56	28.29	43.50	-15.21
158.04	Н	Peak	32.70	-13.28	19.42	43.50	-24.08
371.44	Н	Peak	32.90	-11.02	21.88	46.00	-24.12
563.50	Н	Peak	32.49	-7.21	25.28	46.00	-20.72
726.46	Н	Peak	33.38	-4.67	28.71	46.00	-17.29

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 77 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
78.50	V	Peak	49.88	-17.63	32.25	40.00	-7.75
105.66	V	Peak	46.60	-16.56	30.04	43.50	-13.46
148.34	V	Peak	32.66	-12.90	19.76	43.50	-23.74
318.09	V	Peak	32.17	-12.59	19.58	46.00	-26.42
423.82	V	Peak	31.68	-9.29	22.39	46.00	-23.61
621.70	V	Peak	32.64	-5.55	27.09	46.00	-18.91
39.70	Н	Peak	42.68	-13.73	28.95	40.00	-11.05
105.66	Н	Peak	43.63	-16.56	27.07	43.50	-16.43
148.34	Н	Peak	33.18	-12.90	20.28	43.50	-23.22
321.00	Н	Peak	32.09	-12.53	19.56	46.00	-26.44
413.15	Н	Peak	31.90	-9.57	22.33	46.00	-23.67
655.65	Н	Peak	32.06	-4.97	27.09	46.00	-18.91

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 78 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	78.50	V	Peak	49.99	-17.63	32.36	40.00	-7.64
	105.66	V	Peak	45.05	-16.56	28.49	43.50	-15.01
	150.28	V	Peak	32.67	-12.83	19.84	43.50	-23.66
	335.55	V	Peak	32.39	-12.10	20.29	46.00	-25.71
	561.56	V	Peak	32.41	-7.28	25.13	46.00	-20.87
	784.66	V	Peak	32.51	-3.39	29.12	46.00	-16.88
	39.70	Н	Peak	42.69	-13.73	28.96	40.00	-11.04
	105.66	Н	Peak	45.17	-16.56	28.61	43.50	-14.89
	156.10	Н	Peak	32.93	-13.17	19.76	43.50	-23.74
	335.55	Н	Peak	32.03	-12.10	19.93	46.00	-26.07
	592.60	Н	Peak	32.44	-6.27	26.17	46.00	-19.83
	726.46	Н	Peak	32.96	-4.67	28.29	46.00	-17.71

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 79 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2422MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.		Ant.Pol.	Detector Mode	Reading	Reading Factor		Limit3m	Safe Margin	
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	31.94	V	Peak	47.84	-14.82	33.02	40.00	-6.98	
	78.50	V	Peak	50.30	-17.63	32.67	40.00	-7.33	
	105.66	V	Peak	45.41	-16.56	28.85	43.50	-14.65	
	158.04	V	Peak	33.00	-13.28	19.72	43.50	-23.78	
	442.25	V	Peak	32.49	-8.74	23.75	46.00	-22.25	
	658.56	V	Peak	32.82	-4.98	27.84	46.00	-18.16	
	34.85	Н	Peak	43.20	-14.58	28.62	40.00	-11.38	
	105.66	Н	Peak	44.85	-16.56	28.29	43.50	-15.21	
	158.04	Н	Peak	32.70	-13.28	19.42	43.50	-24.08	
	371.44	Н	Peak	32.90	-11.02	21.88	46.00	-24.12	
	563.50	Н	Peak	32.49	-7.21	25.28	46.00	-20.72	
	726.46	Н	Peak	33.38	-4.67	28.71	46.00	-17.29	

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 80 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading Factor		Actual FS	Limit3m	Safe Margin	
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
78.50	V	Peak	49.88	-17.63	32.25	40.00	-7.75	
105.66	V	Peak	46.60	-16.56	30.04	43.50	-13.46	
148.34	V	Peak	32.66	-12.90	19.76	43.50	-23.74	
318.09	V	Peak	32.17	-12.59	19.58	46.00	-26.42	
423.82	V	Peak	31.68	-9.29	22.39	46.00	-23.61	
621.70	V	Peak	32.64	-5.55	27.09	46.00	-18.91	
39.70	Н	Peak	42.68	-13.73	28.95	40.00	-11.05	
105.66	Н	Peak	43.63	-16.56	27.07	43.50	-16.43	
148.34	Н	Peak	33.18	-12.90	20.28	43.50	-23.22	
321.00	Н	Peak	32.09	-12.53	19.56	46.00	-26.44	
413.15	Н	Peak	31.90	-9.57	22.33	46.00	-23.67	
655.65	Н	Peak	32.06	-4.97	27.09	46.00	-18.91	

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 81 of 121

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2452MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.		Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin	
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	78.50	V	Peak	49.99	-17.63	32.36	40.00	-7.64	
	105.66	V	Peak	45.05	-16.56	28.49	43.50	-15.01	
	150.28	V	Peak	32.67	-12.83	19.84	43.50	-23.66	
	335.55	V	Peak	32.39	-12.10	20.29	46.00	-25.71	
	561.56	V	Peak	32.41	-7.28	25.13	46.00	-20.87	
	784.66	V	Peak	32.51	-3.39	29.12	46.00	-16.88	
	39.70	Н	Peak	42.69	-13.73	28.96	40.00	-11.04	
	105.66	Н	Peak	45.17	-16.56	28.61	43.50	-14.89	
	156.10	Н	Peak	32.93	-13.17	19.76	43.50	-23.74	
	335.55	Н	Peak	32.03	-12.10	19.93	46.00	-26.07	
	592.60	Н	Peak	32.44	-6.27	26.17	46.00	-19.83	
	726.46	Н	Peak	32.96	-4.67	28.29	46.00	-17.71	

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 82 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
41.63		6.05	47.68		74.00	54.00	-6.32	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 41.63 	Reading Reading (dBu) (dBu) 41.63	Reading Reading Ant./CL (dBuV) (dBuV) CF(dB) 41.63 6.05 - - <tr tr=""> </tr>	ReadingAnt./CLPeak(dBuV)(dBuV)(dBuV)41.636.0547.68 <td>ReadingAnt./CLPeakAV(dBu/)(CF(dB)(dBu/)(dBu/)41.636.0547.68</td> <td>ReadingAend, Aend, AendPeakAendLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)41.636.0547.6874.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00<!--</td--><td>Reading (dBuv)Ant./CLPeakAVLimitLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)41.636.0547.6874.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00</td><td>ReadingReadingAnt/CLPeakAVLinniLinniHangin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)41.63</td></td>	ReadingAnt./CLPeakAV(dBu/)(CF(dB)(dBu/)(dBu/)41.636.0547.68	ReadingAend, Aend, AendPeakAendLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)41.636.0547.6874.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00 </td <td>Reading (dBuv)Ant./CLPeakAVLimitLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)41.636.0547.6874.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00</td> <td>ReadingReadingAnt/CLPeakAVLinniLinniHangin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)41.63</td>	Reading (dBuv)Ant./CLPeakAVLimitLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)41.636.0547.6874.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00	ReadingReadingAnt/CLPeakAVLinniLinniHangin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)41.63

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 83 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.00	38.75		6.05	44.80		74.00	54.00	-9.20	Peak
7236.00						74.00	54.00		
9648.00						74.00	54.00		
12060.00						74.00	54.00		
14472.00						74.00	54.00		
16884.00						74.00	54.00		
19296.00						74.00	54.00		
21708.00						74.00	54.00		
24120.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.00	39.38		6.17	45.55		74.00	54.00	-8.45	Peak
7311.00						74.00	54.00		
9748.00						74.00	54.00		
12185.00						74.00	54.00		
14622.00						74.00	54.00		
17059.00						74.00	54.00		
19496.00						74.00	54.00		
21933.00						74.00	54.00		
24370.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
36.59		6.17	42.76		74.00	54.00	-11.24	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 36.59	Reading Reading (dBu) (dBu) 36.59	ReadingReadingAnt./CL(dBuV)(dBuV)CF(dB)36.596.17 <td< td=""><td>ReadingAnt./CLPeak(dBu/)(dBu/)(dBu/)36.596.1742.76</td><td>ReadingAnt./CLPeakAV(dBu/)(CF(dB)(dBu/)(dBu/)36.596.1742.76</td><td>ReadingAendromAendromAendromAendrom(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)36.596.1742.7674.00</td><td>ReadingAnt./CLPeakAVLinni(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)36.596.1742.7674.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00</td><td>ReadingReadingAnt/CLPeakAVLinniLinniMargin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)36.596.1742.7674.0054.00-11.2474.0054.0074.0054.0074.0054.0074.0054.00</td></td<>	ReadingAnt./CLPeak(dBu/)(dBu/)(dBu/)36.596.1742.76	ReadingAnt./CLPeakAV(dBu/)(CF(dB)(dBu/)(dBu/)36.596.1742.76	ReadingAendromAendromAendromAendrom(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)36.596.1742.7674.00	ReadingAnt./CLPeakAVLinni(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)36.596.1742.7674.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00	ReadingReadingAnt/CLPeakAVLinniLinniMargin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)36.596.1742.7674.0054.00-11.2474.0054.0074.0054.0074.0054.0074.0054.00

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 86 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.00	36.67		6.28	42.95		74.00	54.00	-11.05	Peak
7386.00						74.00	54.00		
9848.00						74.00	54.00		
12310.00						74.00	54.00		
14772.00						74.00	54.00		
17234.00						74.00	54.00		
19696.00						74.00	54.00		
22158.00						74.00	54.00		
24620.00						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號



Operation Mode	802.11b TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.00	35.32		6.28	41.60		74.00	54.00	-12.40	Peak
7386.00						74.00	54.00		
9848.00						74.00	54.00		
12310.00						74.00	54.00		
14772.00						74.00	54.00		
17234.00						74.00	54.00		
19696.00						74.00	54.00		
22158.00						74.00	54.00		
24620.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 88 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
34.06		6.05	40.11		74.00	54.00	-13.89	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 34.06	Reading Reading (dBu) (dBu) 34.06 <tr tr=""> </tr>	ReadingReadingAnt./CL(dBuV)(dBuV)CF(dB)34.066.05 <t< td=""><td>ReadingAnt./CLPeak(dBuV)(dBuV)(dBuV)34.066.0540.11</td><td>ReadingAnt./CLPeakAV(dBu/)(CF(dB)(dBu/)(dBu/)34.066.0540.11</td><td>ReadingReadingAnt./ClPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)34.006.0540.1174.00<t< td=""><td>ReadingAent/CLPeakAVLinni(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)34.006.0540.1174.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.0054.0054.0054.0054.0054.0054.0054.00</td><td>Reading (dBw)Ani/CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)34.00-6.0540.11-74.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00</td></t<></td></t<>	ReadingAnt./CLPeak(dBuV)(dBuV)(dBuV)34.066.0540.11	ReadingAnt./CLPeakAV(dBu/)(CF(dB)(dBu/)(dBu/)34.066.0540.11	ReadingReadingAnt./ClPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)34.006.0540.1174.00 <t< td=""><td>ReadingAent/CLPeakAVLinni(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)34.006.0540.1174.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.0054.0054.0054.0054.0054.0054.0054.00</td><td>Reading (dBw)Ani/CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)34.00-6.0540.11-74.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00</td></t<>	ReadingAent/CLPeakAVLinni(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)34.006.0540.1174.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.0054.0054.0054.0054.0054.0054.0054.00	Reading (dBw)Ani/CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)34.00-6.0540.11-74.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 89 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.00	34.43		6.05	40.48		74.00	54.00	-13.52	Peak
7236.00						74.00	54.00		
9648.00						74.00	54.00		
12060.00						74.00	54.00		
14472.00						74.00	54.00		
16884.00						74.00	54.00		
19296.00						74.00	54.00		
21708.00						74.00	54.00		
24120.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 90 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.00	33.44		6.17	39.61		74.00	54.00	-14.39	Peak
7311.00						74.00	54.00		
9748.00						74.00	54.00		
12185.00						74.00	54.00		
14622.00						74.00	54.00		
17059.00						74.00	54.00		
19496.00						74.00	54.00		
21933.00						74.00	54.00		
24370.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 91 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.00	33.15		6.17	39.32		74.00	54.00	-14.68	Peak
7311.00						74.00	54.00		
9748.00						74.00	54.00		
12185.00						74.00	54.00		
14622.00						74.00	54.00		
17059.00						74.00	54.00		
19496.00						74.00	54.00		
21933.00						74.00	54.00		
24370.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 92 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
33.98		6.28	40.26		74.00	54.00	-13.74	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 33.98 	Reading Reading (dBuV) (dBuV) 33.98	Reading Reading Ant./CL (dBuV) (dBuV) CF(dB) 33.98 6.28 - -	ReadingAnt./CLPeak(dBu/)CF(dB)(dBu/)33.986.2840.26	ReadingAnt./CLPeakAV(dBu/)(CF(dB)(dBu/)(dBu/)33.986.2840.26	ReadingReadingAnt./ClPeakAVLimit(dBuv)CF(dB)(dBuv)(dBuv)(dBuv)33.986.2840.2674.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00	ReadingReadingAnt./CLPeakAVLimitLimit(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)33.986.2840.2674.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00	Reading (dBw)An./CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)33.986.2840.2674.0054.00-13.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.00

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 93 of 121

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.00	33.37		6.28	39.65		74.00	54.00	-14.35	Peak
7386.00						74.00	54.00		
9848.00						74.00	54.00		
12310.00						74.00	54.00		
14772.00						74.00	54.00		
17234.00						74.00	54.00		
19696.00						74.00	54.00		
22158.00						74.00	54.00		
24620.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_20M TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.00	33.55		6.05	39.60		74.00	54.00	-14.40	Peak
7236.00						74.00	54.00		
9648.00						74.00	54.00		
12060.00						74.00	54.00		
14472.00						74.00	54.00		
16884.00						74.00	54.00		
19296.00						74.00	54.00		
21708.00						74.00	54.00		
24120.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_20M TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
32.78		6.05	38.83		74.00	54.00	-15.17	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 32.78 	Reading (dBuV) Reading (dBuV) 32.78	Reading (dBuV) Reading (dBuV) Ant./CL (dBuV) (dBuV) CF(dB) 32.78 6.05	Reading (dBuV) Ant./CL (Peak) 32.78 32.78 6.05 38.83 <	Reading (dBuV)Ant./CLPeakAV(dBuV)(dBuV)(dBuV/m)(dBuV/m)32.786.0538.83<	Reading (dBuV)Ant./CL CF(dB)PeakAVLimit32.786.0538.8374.00 <td>Reading (dBuV)Ant./CLPeakAVLimit(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)32.786.0538.8374.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00</td> <td>Reading (dBuV)Ant./CLPeakAVLimitLimitMargin(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)32.786.0538.8374.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.17</td>	Reading (dBuV)Ant./CLPeakAVLimit(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)32.786.0538.8374.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00	Reading (dBuV)Ant./CLPeakAVLimitLimitMargin(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)(dBuV)32.786.0538.8374.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.1774.0054.00-15.17

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_20M TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.00	33.16		6.17	39.33		74.00	54.00	-14.67	Peak
7311.00						74.00	54.00		
9748.00						74.00	54.00		
12185.00						74.00	54.00		
14622.00						74.00	54.00		
17059.00						74.00	54.00		
19496.00						74.00	54.00		
21933.00						74.00	54.00		
24370.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_20M TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.00	33.01		6.17	39.18		74.00	54.00	-14.82	Peak
7311.00						74.00	54.00		
9748.00						74.00	54.00		
12185.00						74.00	54.00		
14622.00						74.00	54.00		
17059.00						74.00	54.00		
19496.00						74.00	54.00		
21933.00						74.00	54.00		
24370.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_20M TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.00	33.81		6.28	40.09		74.00	54.00	-13.91	Peak
7386.00						74.00	54.00		
9848.00						74.00	54.00		
12310.00						74.00	54.00		
14772.00						74.00	54.00		
17234.00						74.00	54.00		
19696.00						74.00	54.00		
22158.00						74.00	54.00		
24620.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_20M TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
33.46		6.28	39.74		74.00	54.00	-14.26	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 33.46 	Reading Reading (dBuV) (dBuV) 33.46	ReadingReadingAnt./CL(dBuV)(dBuV)CF(dB)33.466.28 <td< td=""><td>ReadingAnt./CLPeak(dBuV)(dBuV)(dBuV)33.466.2839.74<td< td=""><td>ReadingAnt./CLPeakAV(dBu/)(dBu/)(dBu/)(dBu/)33.466.2839.74<</td><td>ReadingAnt./ClPeakAVLimit(dBu/)CF(dB)(dBu/)(dBu/)(dBu/)33.466.2839.7474.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00<t< td=""><td>Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)33.466.2839.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.0054.00</td><td>ReadingReadingAnt/CLPeakAVLimitLimitHangin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)33.4054.0039.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.00<td< td=""></td<></td></t<></td></td<></td></td<>	ReadingAnt./CLPeak(dBuV)(dBuV)(dBuV)33.466.2839.74 <td< td=""><td>ReadingAnt./CLPeakAV(dBu/)(dBu/)(dBu/)(dBu/)33.466.2839.74<</td><td>ReadingAnt./ClPeakAVLimit(dBu/)CF(dB)(dBu/)(dBu/)(dBu/)33.466.2839.7474.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00<t< td=""><td>Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)33.466.2839.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.0054.00</td><td>ReadingReadingAnt/CLPeakAVLimitLimitHangin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)33.4054.0039.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.00<td< td=""></td<></td></t<></td></td<>	ReadingAnt./CLPeakAV(dBu/)(dBu/)(dBu/)(dBu/)33.466.2839.74<	ReadingAnt./ClPeakAVLimit(dBu/)CF(dB)(dBu/)(dBu/)(dBu/)33.466.2839.7474.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00 <t< td=""><td>Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)33.466.2839.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.0054.00</td><td>ReadingReadingAnt/CLPeakAVLimitLimitHangin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)33.4054.0039.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.00<td< td=""></td<></td></t<>	Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)33.466.2839.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.0054.00	ReadingReadingAnt/CLPeakAVLimitLimitHangin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)33.4054.0039.7474.0054.0074.0054.0074.0054.0074.0054.0074.0054.00 <td< td=""></td<>

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2422MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4844.00	33.06		6.05	39.11		74.00	54.00	-14.89	Peak
7266.00						74.00	54.00		
9688.00						74.00	54.00		
12110.00						74.00	54.00		
14532.00						74.00	54.00		
16954.00						74.00	54.00		
19376.00						74.00	54.00		
21798.00						74.00	54.00		
24220.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH Low	Test Date	Apr. 01, 2011
Fundamental Frequency	2422MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4844.00	34.16		6.05	40.21		74.00	54.00	-13.79	Peak
7266.00						74.00	54.00		
9688.00						74.00	54.00		
12110.00						74.00	54.00		
14532.00						74.00	54.00		
16954.00						74.00	54.00		
19376.00						74.00	54.00		
21798.00						74.00	54.00		
24220.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.00	33.40		6.17	39.57		74.00	54.00	-14.43	Peak
7311.00						74.00	54.00		
9748.00						74.00	54.00		
12185.00						74.00	54.00		
14622.00						74.00	54.00		
17059.00						74.00	54.00		
19496.00						74.00	54.00		
21933.00						74.00	54.00		
24370.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH Mid	Test Date	Apr. 01, 2011
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.00	33.80		6.17	39.97		74.00	54.00	-14.03	Peak
7311.00						74.00	54.00		
9748.00						74.00	54.00		
12185.00						74.00	54.00		
14622.00						74.00	54.00		
17059.00						74.00	54.00		
19496.00						74.00	54.00		
21933.00						74.00	54.00		
24370.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2452MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4904.00	33.20		6.28	39.48		74.00	54.00	-14.52	Peak
7356.00						74.00	54.00		
9808.00						74.00	54.00		
12260.00						74.00	54.00		
14712.00						74.00	54.00		
17164.00						74.00	54.00		
19616.00						74.00	54.00		
22068.00						74.00	54.00		
24520.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH High	Test Date	Apr. 01, 2011
Fundamental Frequency	2452MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4904.00	33.31		6.28	39.59		74.00	54.00	-14.41	Peak
7356.00						74.00	54.00		
9808.00						74.00	54.00		
12260.00						74.00	54.00		
14712.00						74.00	54.00		
17164.00						74.00	54.00		
19616.00						74.00	54.00		
22068.00						74.00	54.00		
24520.00						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 106 of 121

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300kHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.



10.5 Measurement Result:

802.11b

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-24.73	0.00	-24.73	8
2437	-24.68	0.00	-24.68	8
2462	-25.67	0.00	-25.67	8

802.11g

Frequency MHz	RF Power Density		RF Power Density	
ΝΠΖ	Reading (dBm)	(dB)	Level (dBm)	(dBm)
2412	-24.69	0.00	-24.69	8
2437	-24.30	0.00	-24.30	8
2462	-24.40	0.00	-24.40	8

802.11n_20M

Frequency	RF Power Density	Cable loss	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dB)	Level (dBm)	(dBm)
2412	-24.68	0.00	-24.68	8
2437	-25.43	0.00	-25.43	8
2462	-23.40	0.00	-23.40	8

802.11n_40M

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2442	-25.16	0.00	-25.16	8
2437	-25.18	0.00	-25.18	8
2452	-27.43	0.00	-27.43	8


**Offset* 0.5 *dB*

Note: Refer to next page for plots.




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 108 of 121

802.11b Power Spectral Density Test Plot (CH-Low)

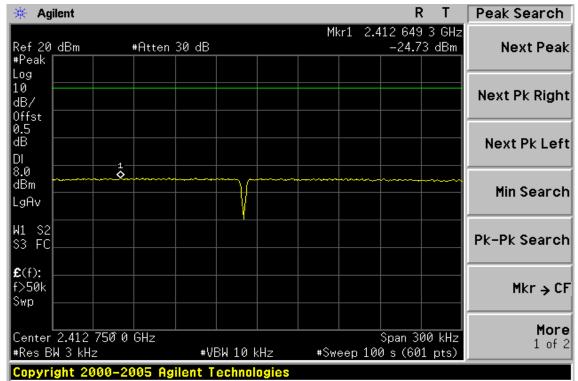

Power Spectral Density Test Plot (CH-Mid)

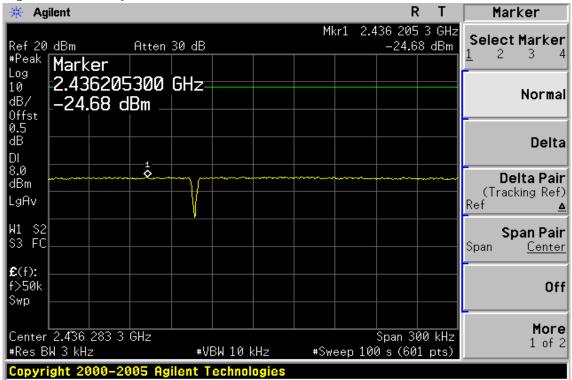


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_soms</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 109 of 121

Power Spectral Density Test Plot (CH-High)

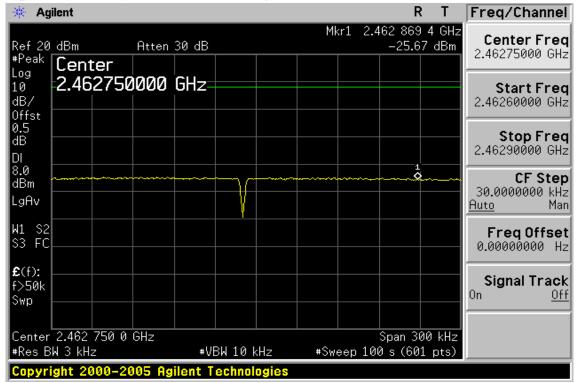


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_and_condutions</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 110 of 121

802.11g Power Spectral I



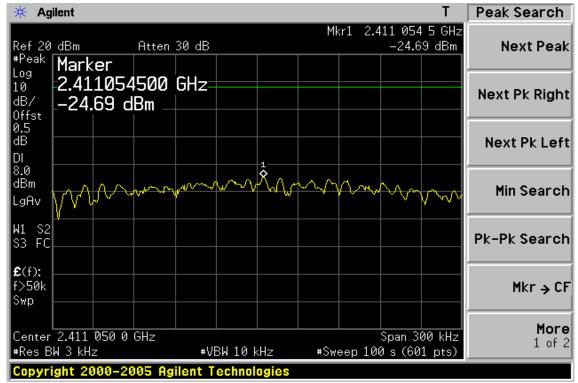

Power Spectral Density Test Plot (CH-Mid)

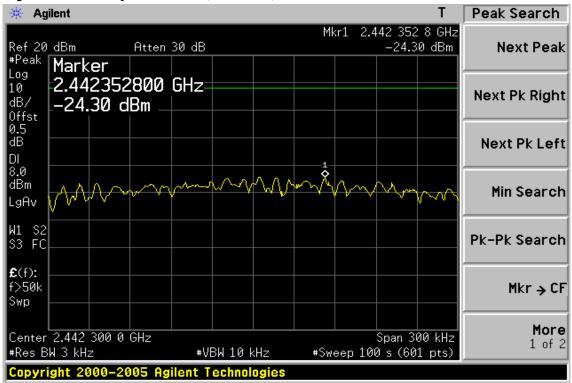


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_soms</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 111 of 121

Power Spectral Density Test Plot (CH-High)

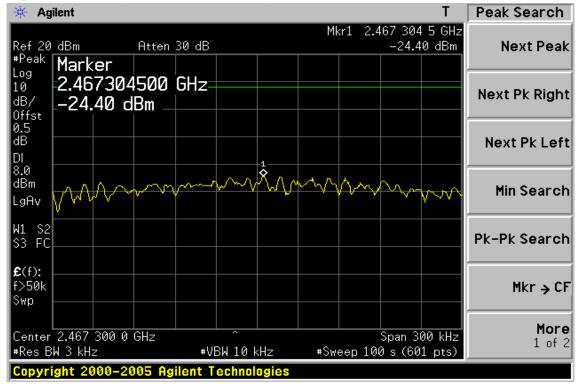


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_and_condutions</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




FCC ID: QLEGWU627

Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 112 of 121

802.11n_20M Power Spectral Density Test Plot (CH-Low)

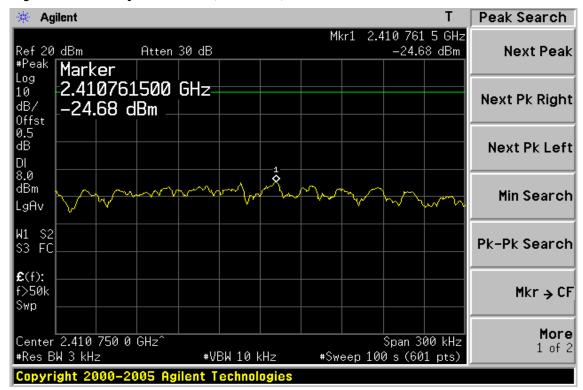

Power Spectral Density Test Plot (CH-Mid)

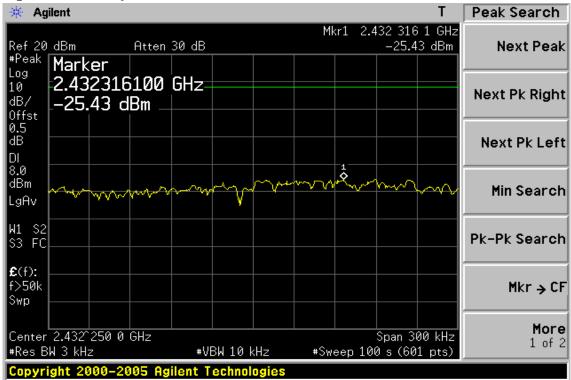


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_soms</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 113 of 121

Power Spectral Density Test Plot (CH-High)

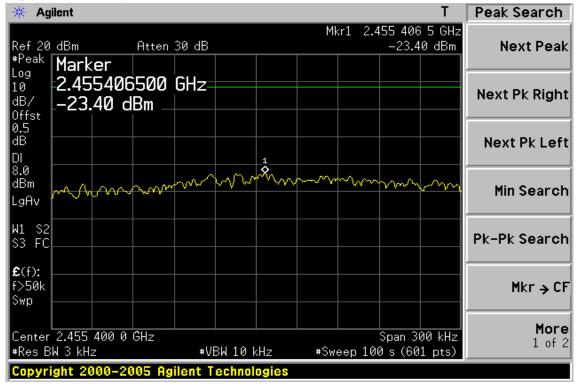


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_and_condutions</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 114 of 121

802.11n_40M

Power Spectral Density Test Plot (CH-Low)

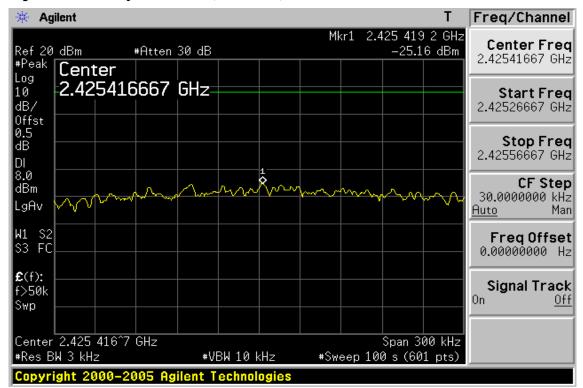

Power Spectral Density Test Plot (CH-Mid)

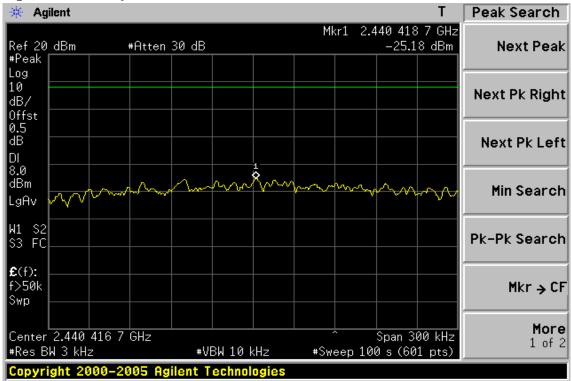


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms_soms</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 115 of 121

Power Spectral Density Test Plot (CH-High)

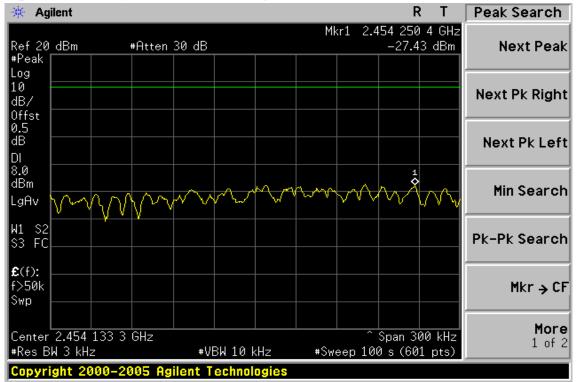

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions</u>) are retained as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業 區五工路 134 號



Report No.: ER/2011/20014-02 Issue Date: Apr. 18, 2011 Page: 116 of 121

11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 4.81 dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions,htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.osnite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



12. Maximum Permissible Exposure (MPE)

12.1. Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Mobile device, the MPE is required.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissive Exposure (MPE)

Frequency Range	Electric Field	Magnetic Field	Power Density	Averaging Time
(MHz)	Strength (V/m)	Strength (A/m)	(mW/cm^2)	(minute)
	Limits for Gene	ral Population/Uncont	trolled Exposure	
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	F/1500	30
1500-15000	/	/	1.0	30

F = frequency in MHz

* = Plane-wave equipment power density

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



12.2. Maximum Permissible Exposure (MPE) Evaluation

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	8.45	0.00	8.45	0.00700	1
2437.00	8.48	0.00	8.48	0.00705	1
2462.00	8.46	0.00	8.46	0.00701	1

802.11b Power Table

MPE Prediction (802.11b)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

 $S=PG/4 \pi R^2$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	8.48	(dBm)
Maximum peak output power at antenna input terminal:	7.04693069	(mW)
Duty cycle:	99	(%)
Maximum Pav :	6.976461383	(mW)
Antenna gain (typical):	4.81	(dBi)
Maximum antenna gain:	3.026913428	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2437	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)
Power density at predication frequency at 20 (cm)	0.0042033	(mW/cm^2)

Measurement Result

The predicted power density level at 20 cm is $0.0042033 \text{ mW/cm}^2$. This is below the uncontrolled exposure limit of 1 mW/cm^2 at 2437MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.osnite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



802.11g Power Table

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	8.37	0.00	8.37	0.00687	1
2437.00	8.43	0.00	8.43	0.00697	1
2462.00	8.44	0.00	8.44	0.00698	1

MPE Prediction (802.11g)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

 $S=PG/4 \pi R^2$

Where: S = Power density

 $\mathbf{P} = \mathbf{Power}$ input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	8.44	(dBm)
Maximum peak output power at antenna input terminal:	6.982324041	(mW)
Duty cycle:	99	(%)
Maximum Pav :	6.9125008	(mW)
Antenna gain (typical):	4.81	(dBi)
Maximum antenna gain:	3.026913428	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2462	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)
Power density at predication frequency at 20 (cm)	0.0041647	(mW/cm^2)

Measurement Result

The predicted power density level at 20 cm is 0.0041647 mW/cm2. This is below the uncontrolled exposure limit of 1 mW/cm2 at 2462.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>). This destruction is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



802.11n_20M Power Table

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	8.29	0.00	8.29	0.00675	1
2437.00	8.33	0.00	8.33	0.00681	1
2462.00	8.35	0.00	8.35	0.00684	1

MPE Prediction (802.11n_20M)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

 $S=PG/4 \pi R^2$

Where: S = Power density

 $\mathbf{P} = \mathbf{Power}$ input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

 $\mathbf{R} = \mathbf{D}\mathbf{i}\mathbf{s}\mathbf{t}$ and $\mathbf{R} = \mathbf{D}\mathbf{i}\mathbf{s}\mathbf{t}$ to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	8.35	(dBm)
Maximum peak output power at antenna input terminal:	6.839116473	(mW)
Duty cycle:	99	(%)
Maximum Pav :	6.770725308	(mW)
Antenna gain (typical):	4.81	(dBi)
Maximum antenna gain:	3.026913428	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2462	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)
Power density at predication frequency at 20 (cm)	0.0040793	(mW/cm^2)

Measurement Result

The predicted power density level at 20 cm is 0.0040793 mW/cm2. This is below the uncontrolled exposure limit of 1 mW/cm2 at 2462.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.ostite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



802.11n_40M Power Table

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2422.00	8.36	0.00	8.36	0.00685	1
2437.00	8.40	0.00	8.40	0.00692	1
2452.00	8.40	0.00	8.40	0.00692	1

MPE Prediction (802.11n_40M)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

 $S=PG/4 \pi R^2$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	8.4	(dBm)
Maximum peak output power at antenna input terminal:	6.918309709	(mW)
Duty cycle:	99	(%)
Maximum Pav :	6.849126612	(mW)
Antenna gain (typical):	4.81	(dBi)
Maximum antenna gain:	3.026913428	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2437/2452	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)
Power density at predication frequency at 20 (cm)	0.0041265	(mW/cm^2)

Measurement Result

The predicted power density level at 20 cm is 0.0041265 mW/cm2. This is below the uncontrolled exposure limit of 1 mW/cm2 at 2437/2452.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is to be treated at information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號