



FCC ID: QLEMSGKM552R

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

ATEN Technology Inc.

Long Range 2.4GHz Wireless Mouse

Model Number: GKM552R(M)

FCC ID: QLEMSGKM552R

Prepared for : ATEN Technology Inc.
19641 Da Vinci Foothill Ranch, CA 92610 USA

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F11176
Date of Test : Aug.05, 2011
Date of Report : Aug.10, 2011

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Tested Supporting System Details	2-1
2.3. EUT Configuration and operation conditions for test.....	2-1
2.4. Test Facility	2-2
2.5. Measurement Uncertainty (95% confidence levels, k=2)	2-2
3. POWER LINE CONDUCTED EMISSION TEST	3-1
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup	4-1
4.3. Radiated Emission Limit Standard: FCC 15.209 and 15.249	4-2
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results	4-3
5. 20 DB BANDWIDTH TEST	5-1
5.1. Test Equipment	5-1
5.2. Limit.....	5-1
5.3. Test Results	5-1
6. BAND EDGE COMPLIANCE TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit.....	6-1
6.3. Test Produce	6-1
6.4. Test Results	6-2
7. ANTENNA REQUIREMENT	7-1
8. RADIO FRREQUENCY EXPOSURE COMPLIANCE.....	8-1
9. DEVIATION TO TEST SPECIFICATIONS.....	9-1
10. PHOTOGRAPH OF TEST	10-1
10.1. Photos of Radiated Emission Test (30-1000MHz)	10-1
11. PHOTOGRAPH OF EUT	11-1

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15C: 15.207 ANSI C63.10-2009	N/A
Radiated Emission Test	FCC Part 15C: 15.209 FCC Part 15C: 15.249 ANSI C63.10-2009	PASS
Band Edge Compliance Test	FCC Part 15: 15.249 ANSI C63.10-2009	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10-2009	PASS

N/A is an abbreviation for Not Applicable.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	: Long Range 2.4GHz Wireless Mouse
Model Number	: GKM552R(M)
FCC ID	: QLEMSGKM552R
Operation frequency	: 2402MHz-2479MHz
Antenna	: Integrated PCB antenna, 0dBi gain
Modulation	: O-QPSK
Power Supply	: DC 1.5V (Note: Batteries were full charged for all the test.)
Applicant	: ATEN Technology Inc. 19641 Da Vinci Foothill Ranch, CA 92610 USA
Manufacturer	: G. tech Technology Ltd. No.21, Jingding Industrial Park, West Jinfeng Road, Tangjiawan Town, Xiangzhou District Zhuhai Guangdong China
Date of Test	: Aug.05, 2011
Date of Receipt	: Aug.02, 2011
Sample Type	: Prototype production

2.2. Tested Supporting System Details

N/A

2.3. EUT Configuration and operation conditions for test.

EUT

(EUT: Long Range 2.4GHz Wireless Mouse)

2.4. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Mar.31, 2012

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Dec.30, 2012

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jun.13, 2014

Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-01
Valid Date: Feb.01, 2014

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2012

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiation Emission test in 3m chamber	3.6 dB(30~200MHz, Polarize: H)
	3.7 dB(30~200MHz, Polarize: V)
	4.0 dB(200M~1GHz, Polarize: H)
	3.7 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	7×10^{-8}
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Dec.06,10	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 11	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 11	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 11	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Oct.26, 10	1 Year
6	RF Cable	MIYAZAKI	8D-FB	3# Chamber No.1	May.08, 11	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 11	1 Year

Frequency rang: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 11	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	May.25, 11	1.5 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 11	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX102	28622/2	May.08, 11	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	29091/2	May.08, 11	1 Year

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

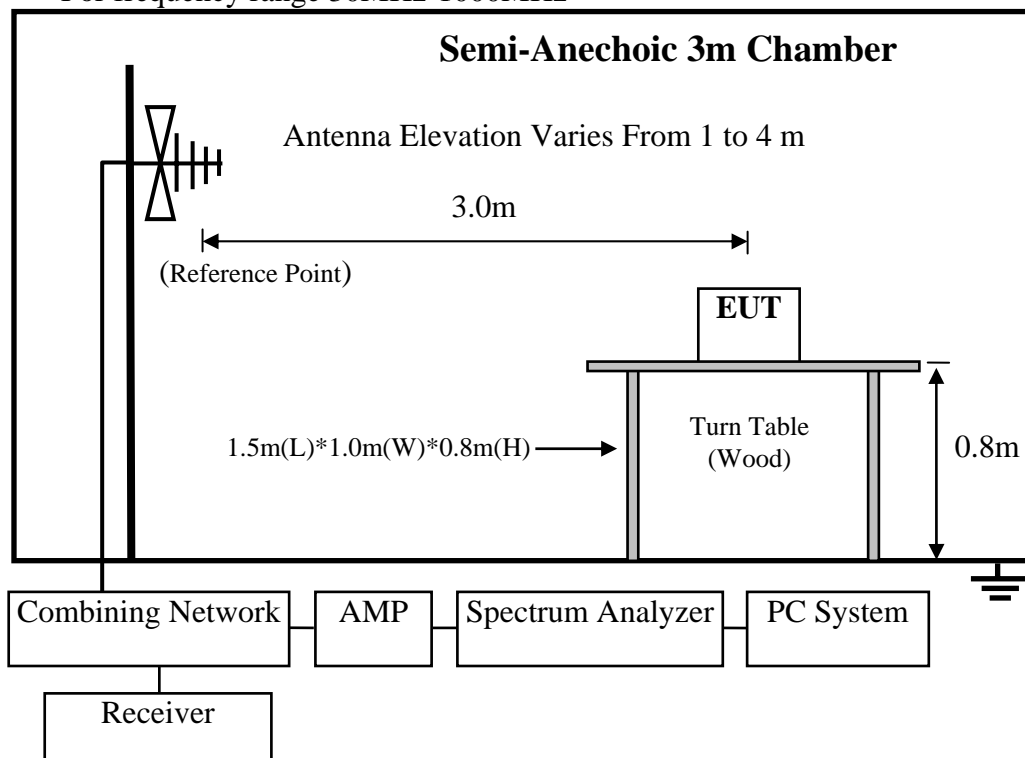

For frequency range above 1GHz

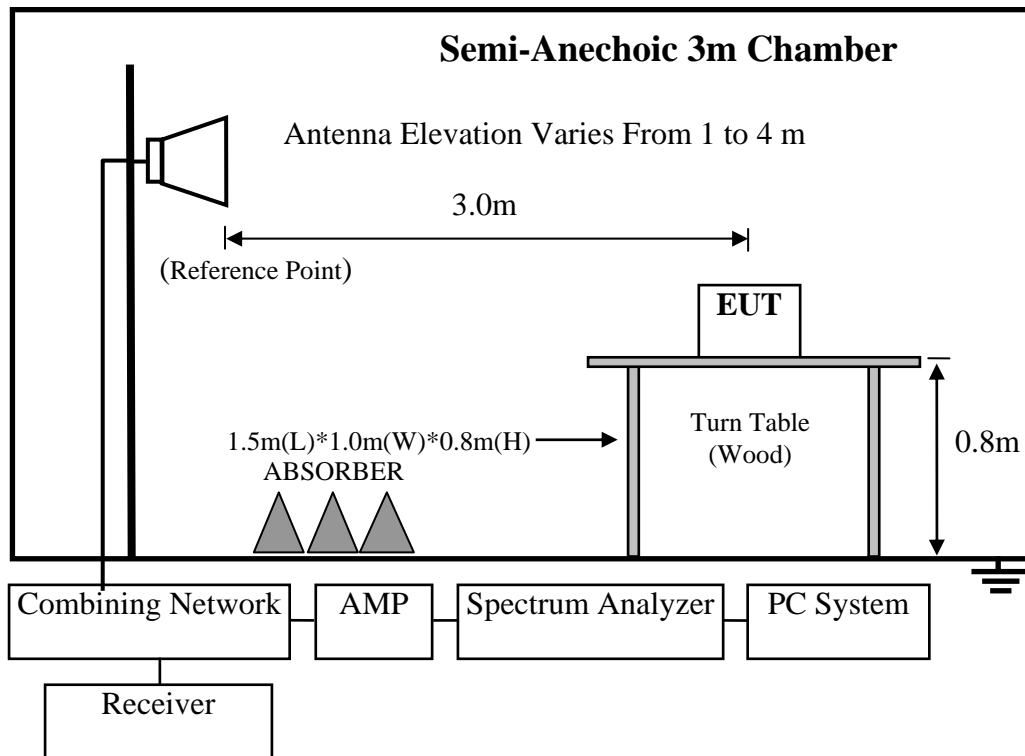

4.3. Radiated Emission Limit Standard: FCC 15.209 and 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Field Strength of fundamental emissions for 2.4GHz-2.4835GHz	3	114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.5.Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turned on the power of all equipment.
- 4.5.3. Let EUT work in Tx mode.

4.6.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2009 on radiated emission Test.

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation show in the test setup photos.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.



4.7.Radiated Emission Test Results


PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is 28.73dB, and average limit is 20dB below peak limit, so if peak measured level comply with peak limit, the average level was deemed to comply with average limit.

Duty cycle: $280\mu s * 7.65\text{ms} * 100\% = 3.66\%$
 Duty cycle factor = $20\log (1/\text{duty cycle}) = 28.73\text{dB}$

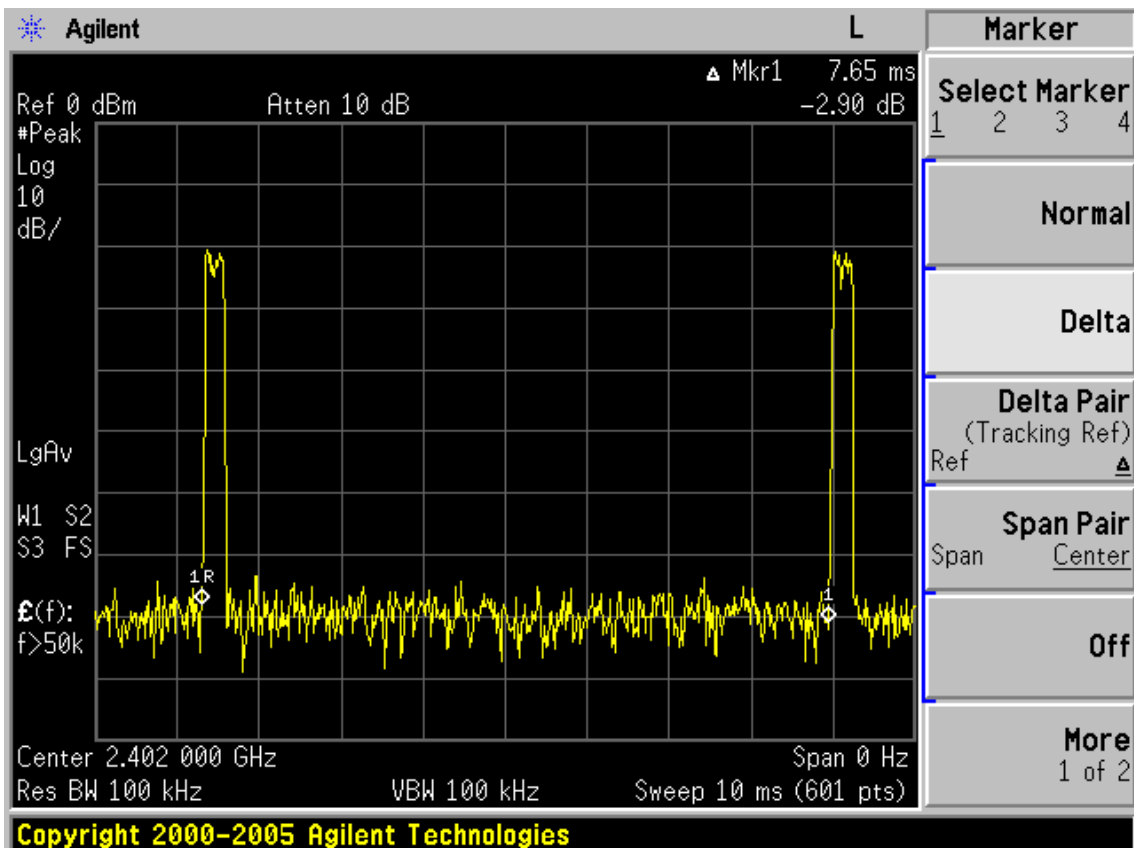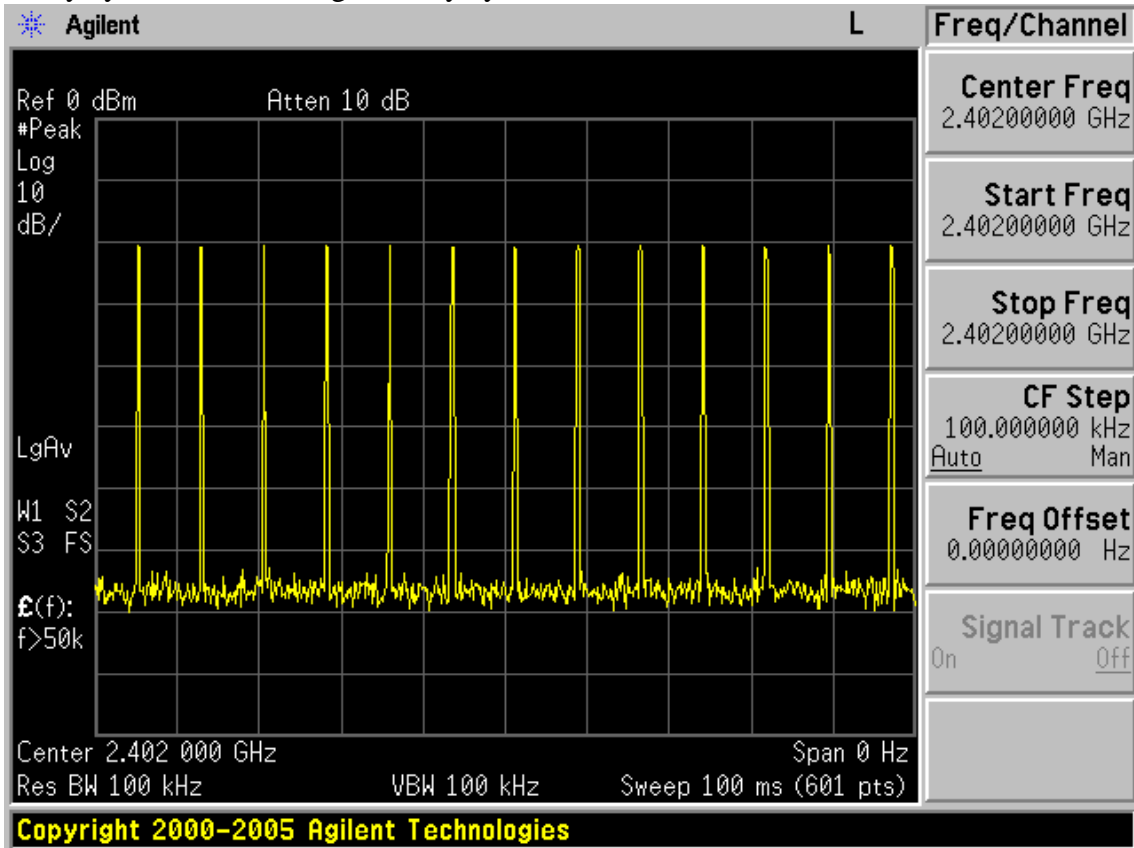

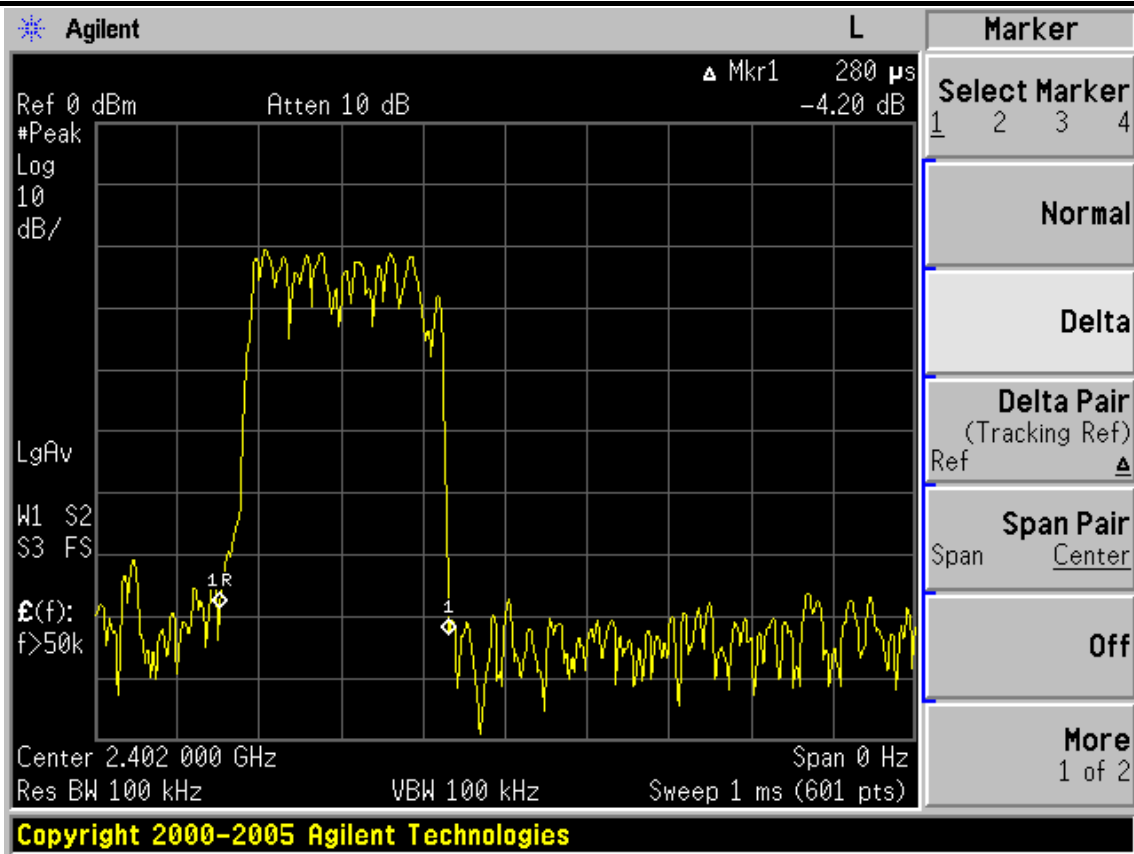


Frequency: 30MHz~1GHz

Data: 10

File: E:\2011 Report data\A\ATEN\ACS11Q1410.EM6 (12)


Date: 2011-08-05

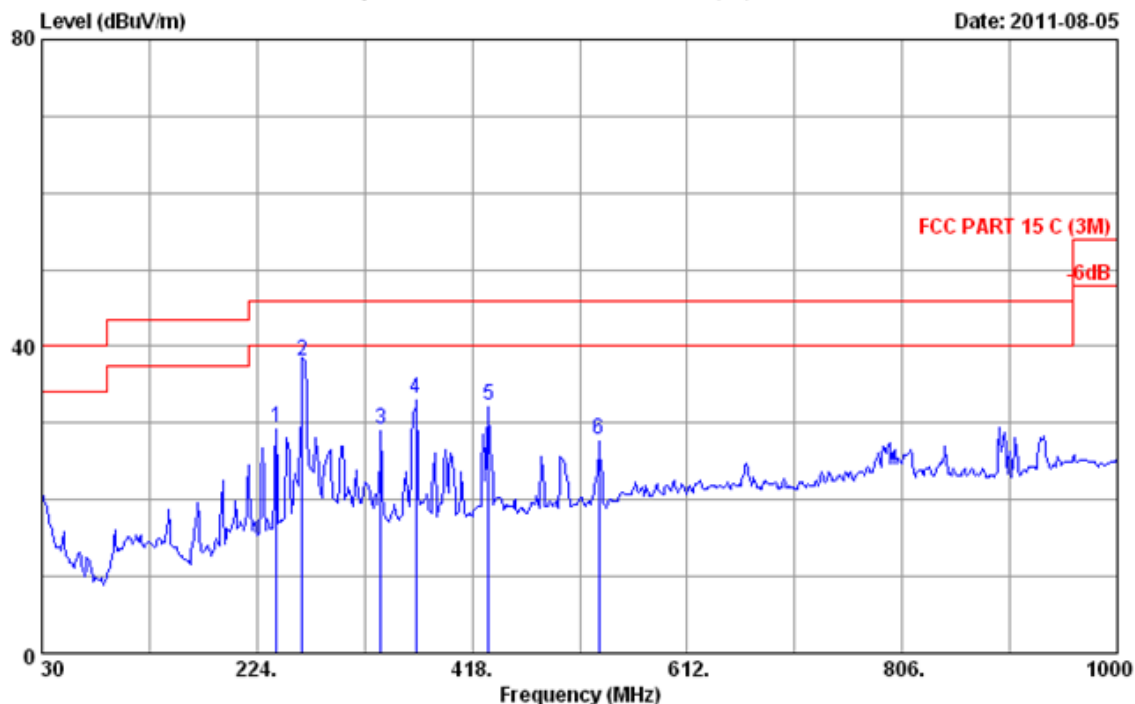

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2010 CBL6111C 2598 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : Long Range 2.4GHz Wireless Mouse
 Power rating : DC 1.5V
 Test Mode : Tx Mode
 M/N:GFK552R(M)

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	241.460	11.93	2.31	15.19	29.43	46.00	16.57	QP
2	264.740	13.80	2.59	21.73	38.12	46.00	7.88	QP
3	335.550	14.62	3.12	11.46	29.20	46.00	16.80	QP
4	367.560	15.53	3.22	14.46	33.21	46.00	12.79	QP
5	432.550	17.42	3.55	11.35	32.32	46.00	13.68	QP
6	532.460	18.27	4.16	5.51	27.94	46.00	18.06	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

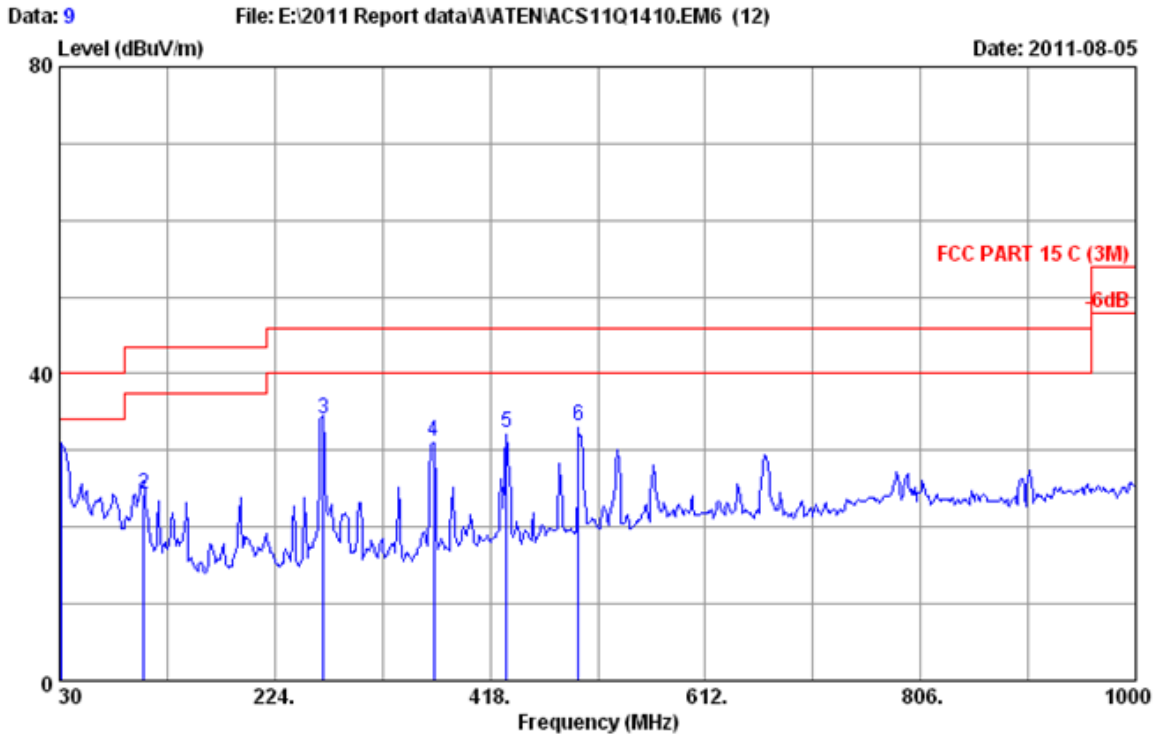


Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2010 CBL6111C 2598 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : Long Range 2.4GHz Wireless Mouse
 Power rating : DC 1.5V
 Test Mode : Tx Mode
 M/N:GFK552R(M)


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	31.940	18.88	0.61	8.79	28.28	40.00	11.72	QP
2	105.660	11.00	1.21	12.08	24.29	43.50	19.21	QP
3	267.650	13.50	2.63	18.00	34.13	46.00	11.87	QP
4	367.560	15.53	3.22	12.44	31.19	46.00	14.81	QP
5	432.550	17.42	3.55	11.39	32.36	46.00	13.64	QP
6	497.540	18.27	3.99	10.83	33.09	46.00	12.91	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

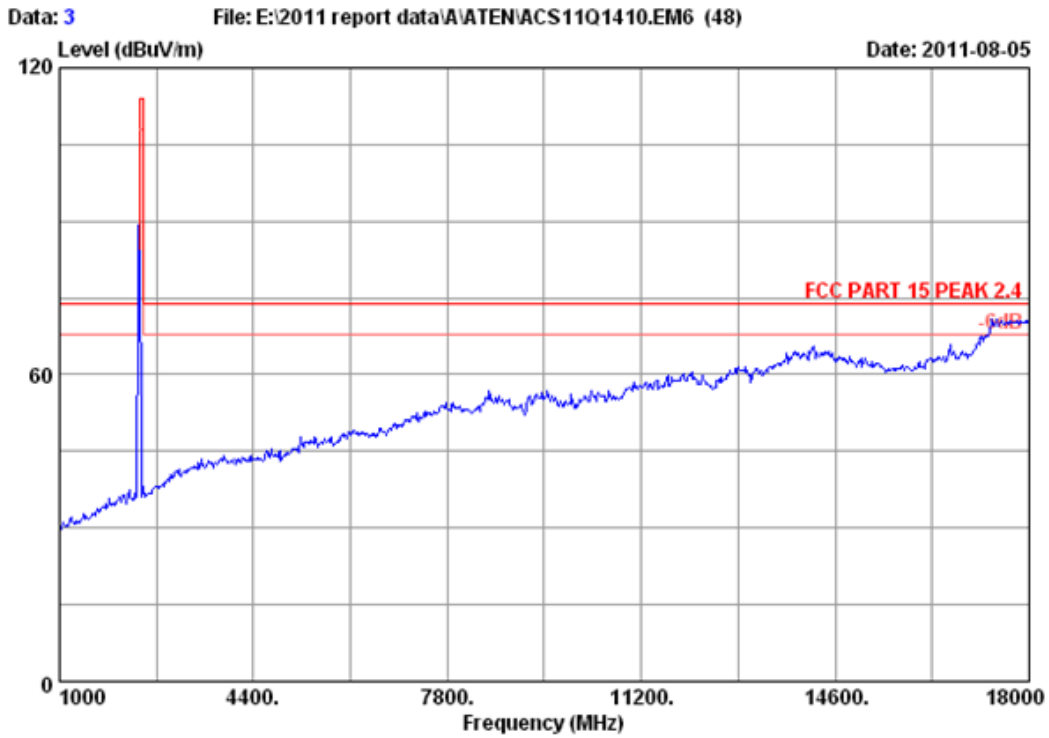

Site no.	: 3m Chamber	Data no. :	3
Dis. / Ant.	: 3m 2011 3115 4580	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 23*C/54%	Engineer :	Paul Tian
EUT	: Long Range 2.4GHz Wireless Mouse		
Power	: DC 1.5V		
Test mode	: Tx 2402MHz		
M/N	: GKM552R(M)		

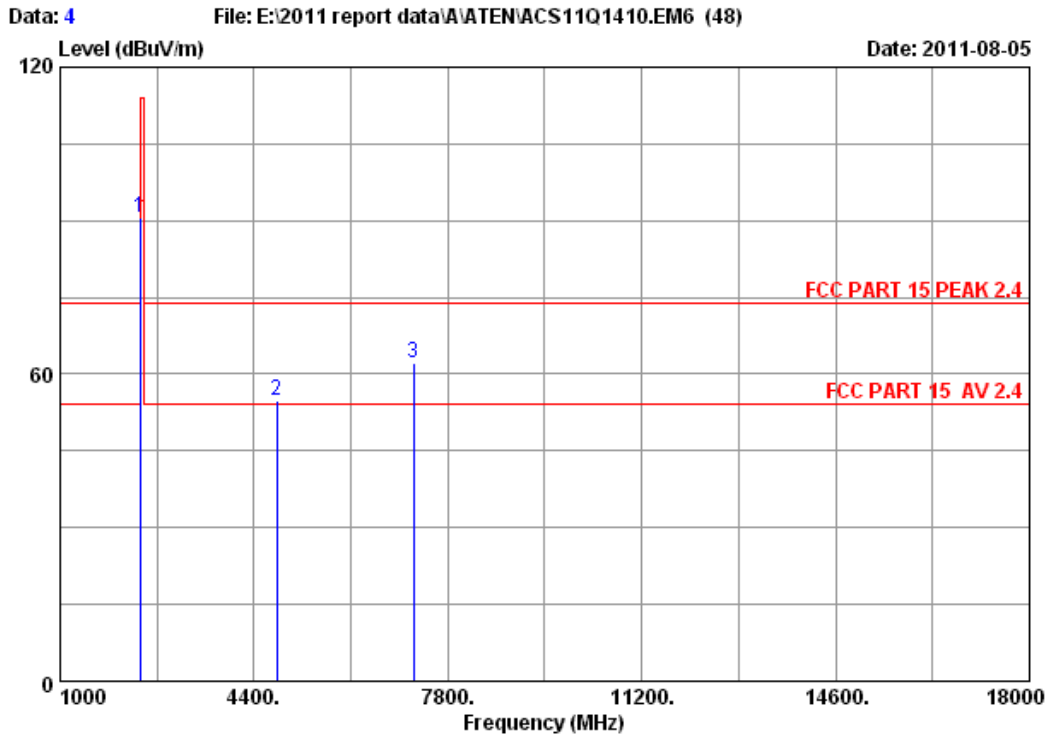


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23°C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2402MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	27.96	6.75	34.44	90.22	90.49	114.00	23.51	Peak
2	4804.000	32.86	9.55	34.60	46.95	54.76	74.00	19.24	Peak
3	7206.000	35.74	11.82	34.72	49.26	62.10	74.00	11.90	Peak


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2402	90.49	28.73	61.76	94	Pass
4804	54.76	28.73	26.03	54	Pass
7206	62.10	28.73	33.37	54	Pass

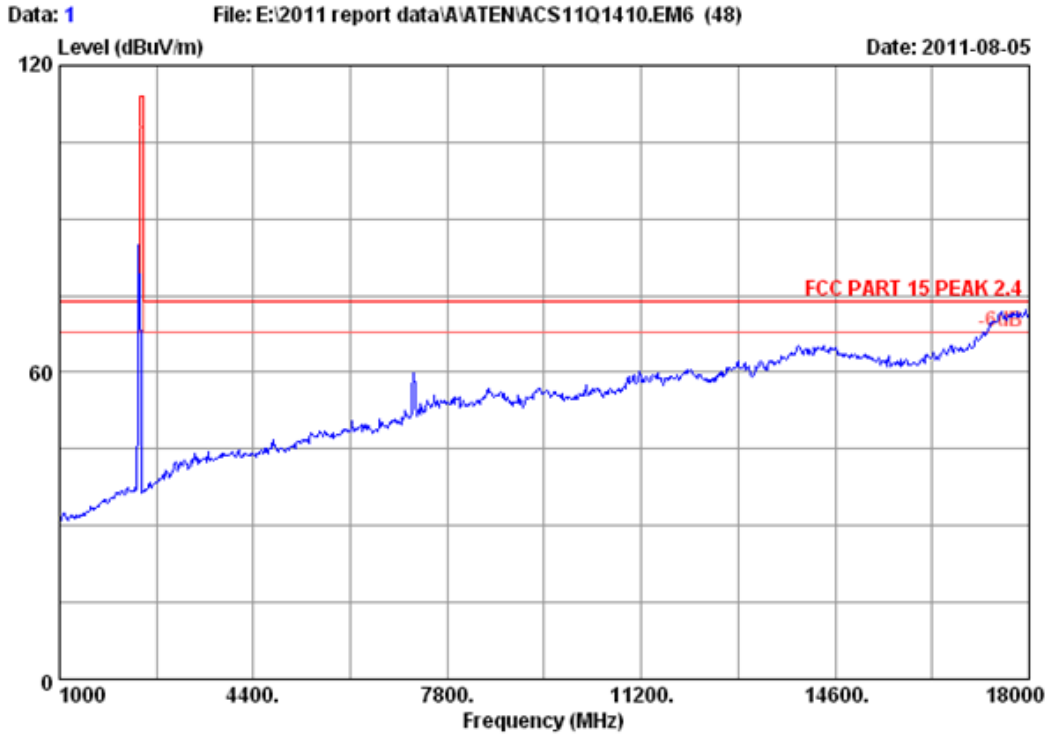

Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : VERTICAL
Limit : FCC PART 15 PEAK 2.4
Env. / Ins. : 23°C/54% Engineer : Paul Tian
EUT : Long Range 2.4GHz Wireless Mouse
Power : DC 1.5V
Test mode : Tx 2402MHz
M/N : GKM552R(M)

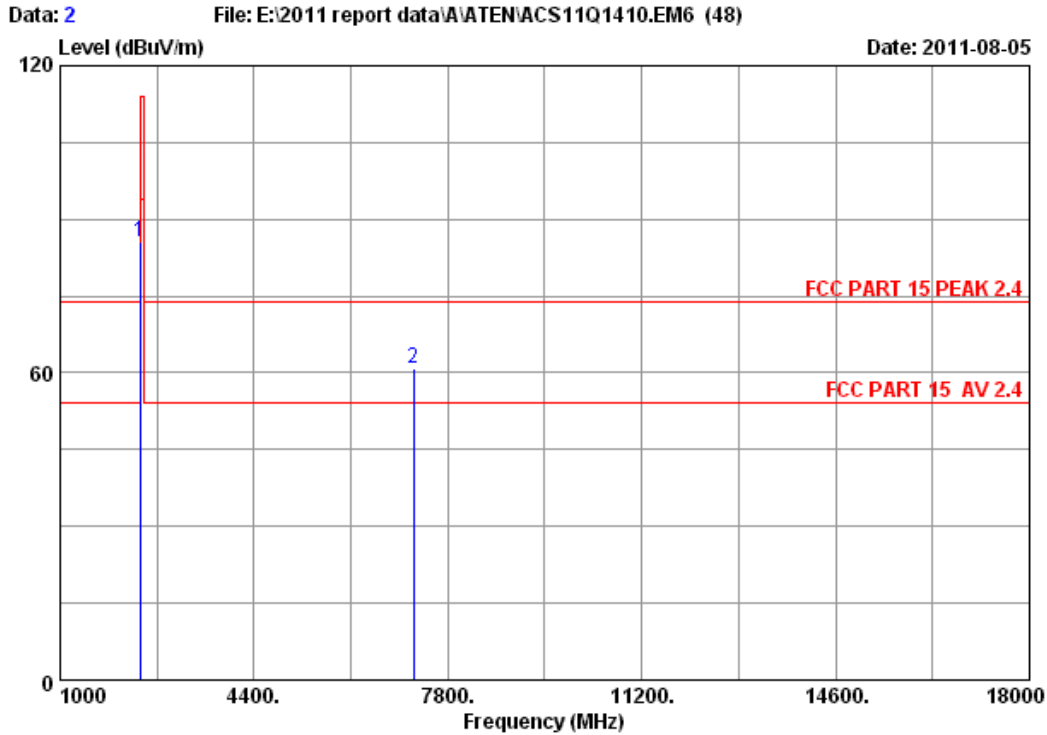


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23*C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2402MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	27.96	6.75	34.44	85.24	85.51	114.00	28.49	Peak
2	7205.000	35.74	11.82	34.72	48.14	60.98	74.00	13.02	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2402	85.51	28.73	56.78	94	Pass
7205	60.98	28.73	32.25	54	Pass

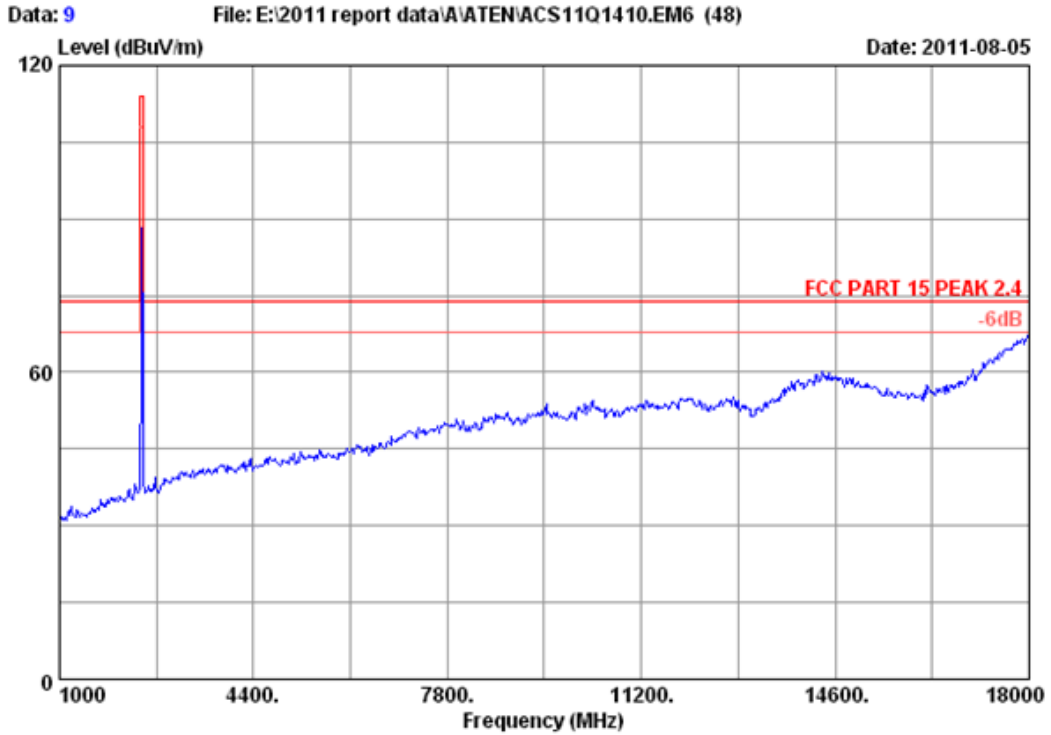

Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 PEAK 2.4
Env. / Ins. : 23°C/54% Engineer : Paul Tian
EUT : Long Range 2.4GHz Wireless Mouse
Power : DC 1.5V
Test mode : Tx 2439MHz
M/N : GKM552R(M)

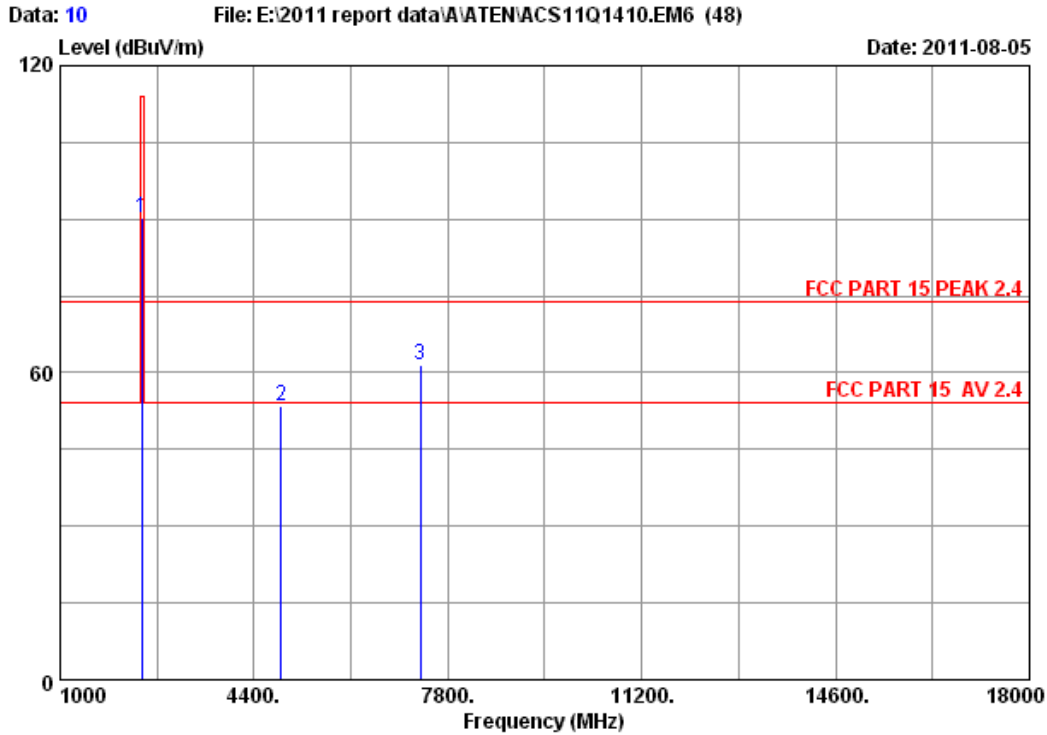


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23*C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2439MHz
 M/N : GKM552R(M)

	Freq.	Ant. Factor	Cable loss	Amp. Factor	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2439.000	28.03	6.81	34.44	89.87	90.27	114.00	23.73	Peak
2	4878.000	32.98	9.62	34.60	45.34	53.34	74.00	20.66	Peak
3	7317.000	36.05	11.89	34.73	48.43	61.64	74.00	12.36	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2439	90.27	28.73	61.54	94	Pass
4878	53.34	28.73	24.61	54	Pass
7317	61.64	28.73	32.91	54	Pass

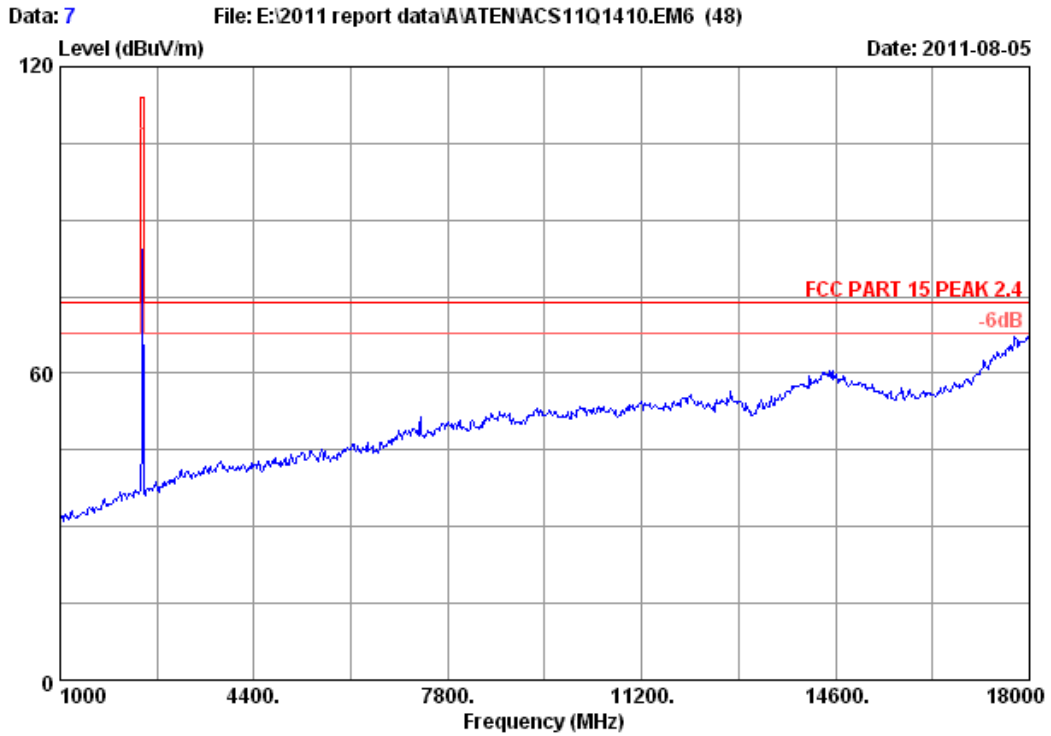

Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : VERTICAL
Limit : FCC PART 15 PEAK 2.4
Env. / Ins. : 23°C/54% Engineer : Paul Tian
EUT : Long Range 2.4GHz Wireless Mouse
Power : DC 1.5V
Test mode : Tx 2439MHz
M/N : GKM552R(M)

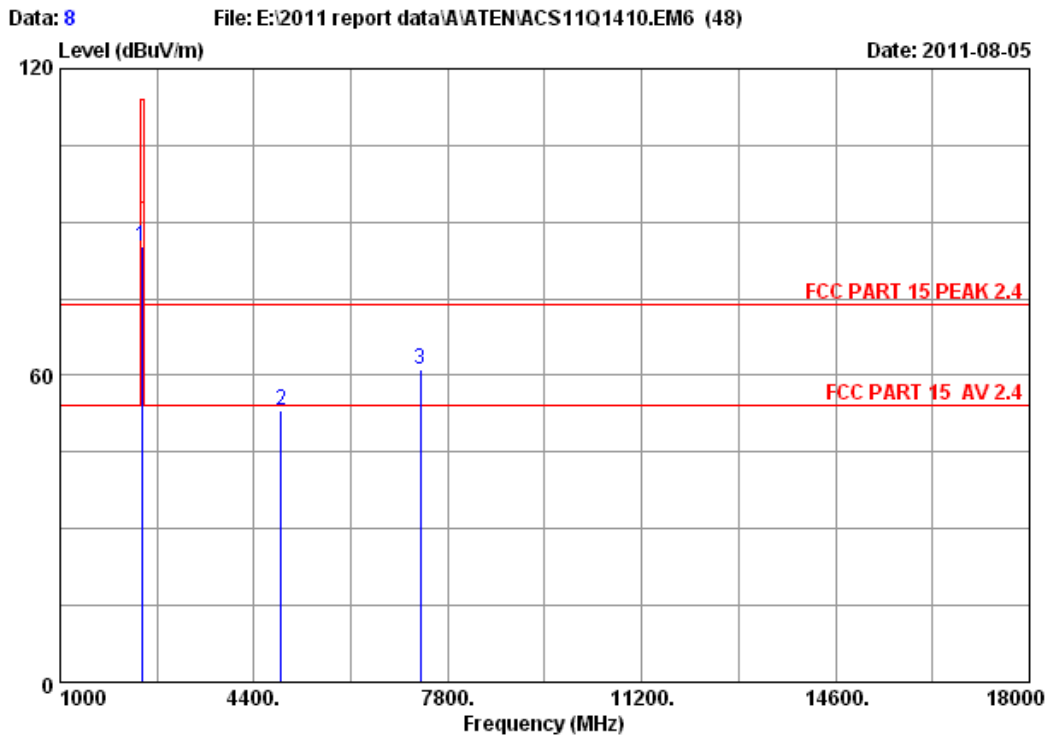


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23*C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2439MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2439.000	28.03	6.81	34.44	84.76	85.16	114.00	28.84	Peak
2	4878.000	32.98	9.62	34.60	45.22	53.22	74.00	20.78	Peak
3	7317.000	36.05	11.89	34.73	47.81	61.02	74.00	12.98	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2439	95.16	28.73	66.43	94	Pass
4878	53.22	28.73	24.49	54	Pass
7317	61.02	28.73	32.29	54	Pass

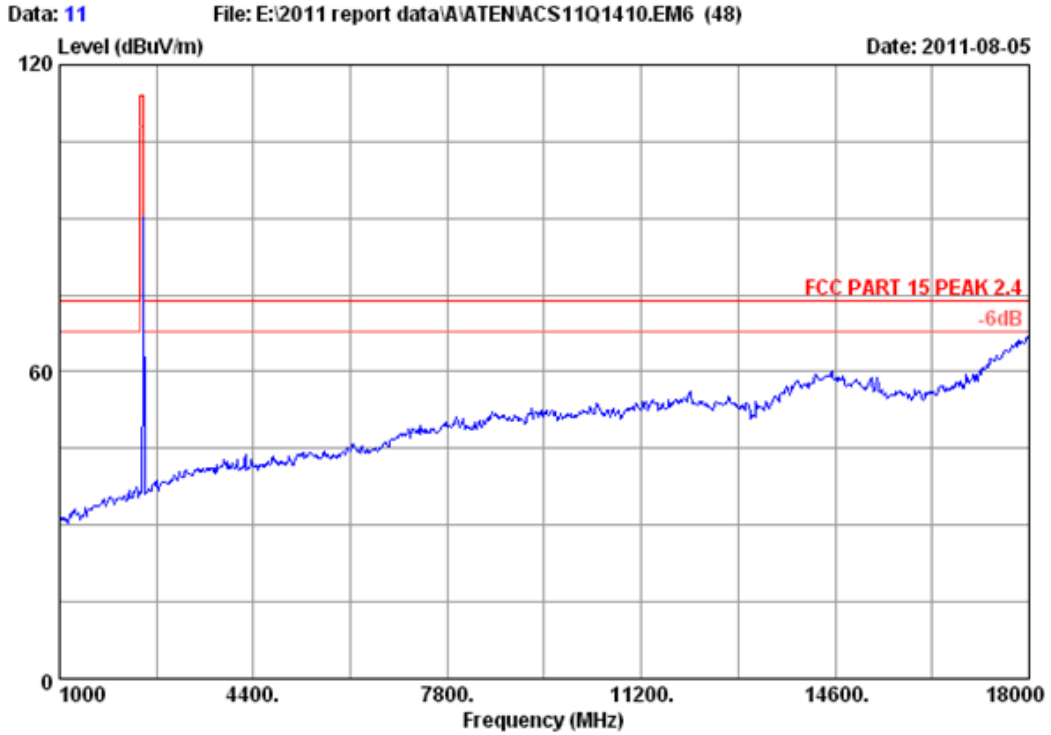

Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 PEAK 2.4
Env. / Ins. : 23°C/54% Engineer : Paul Tian
EUT : Long Range 2.4GHz Wireless Mouse
Power : DC 1.5V
Test mode : Tx 2479MHz
M/N : GKM552R(M)

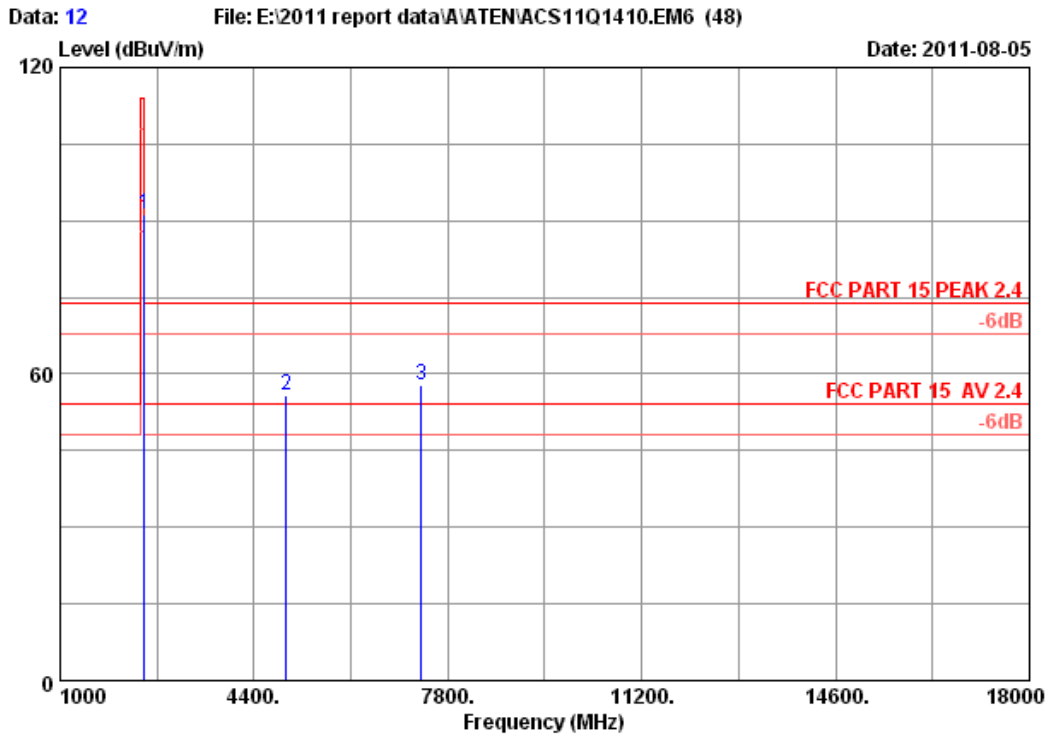


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23*C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2479MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2479.000	28.08	6.87	34.45	90.59	91.09	114.00	22.91	Peak
2	4958.000	33.14	9.69	34.60	47.44	55.67	74.00	18.33	Peak
3	7337.000	36.10	11.90	34.73	44.70	57.97	74.00	16.03	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBUV/m)	Duty cycle factor (dB)	AV level (dBUV/m)	Limit(dBUV/m)	Conclusion
2479	91.09	28.73	62.36	94	Pass
4958	55.67	28.73	26.94	54	Pass
7337	57.97	28.73	29.24	54	Pass

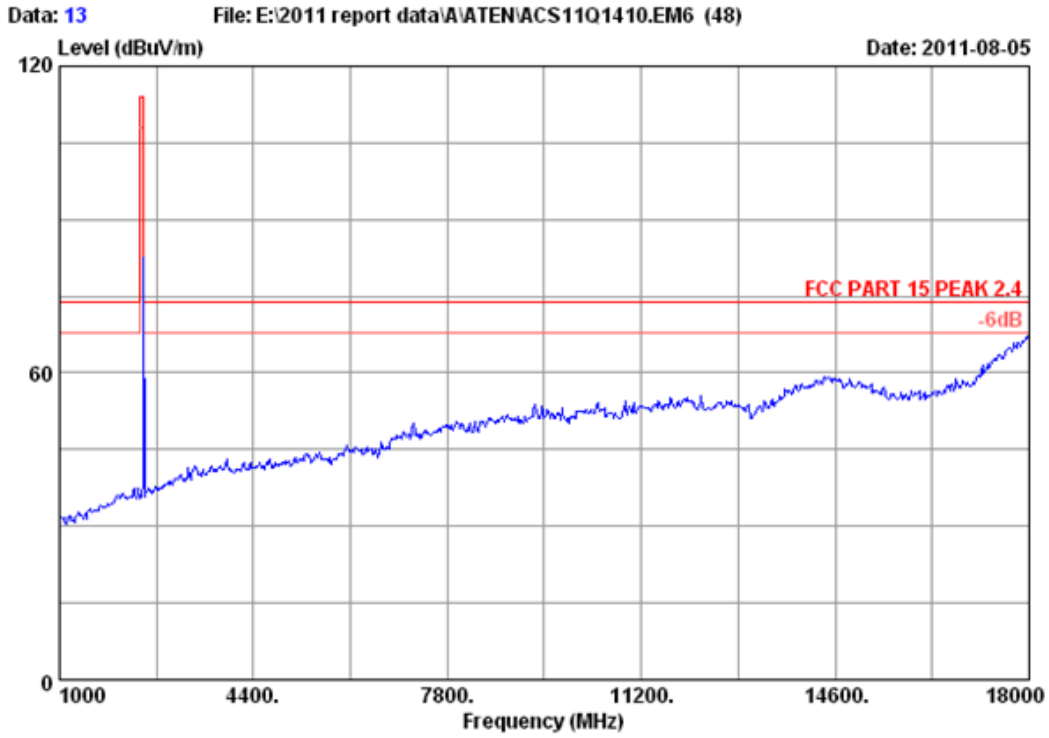

Site no.	: 3m Chamber	Data no. :	13
Dis. / Ant.	: 3m 2011 3115 4580	Ant. pol. :	VERTICAL
Limit	: FCC PART 15 PEAK 2.4		
Env. / Ins.	: 23°C/54%	Engineer :	Paul Tian
EUT	: Long Range 2.4GHz Wireless Mouse		
Power	: DC 1.5V		
Test mode	: Tx 2479MHz		
M/N	: GKM552R(M)		

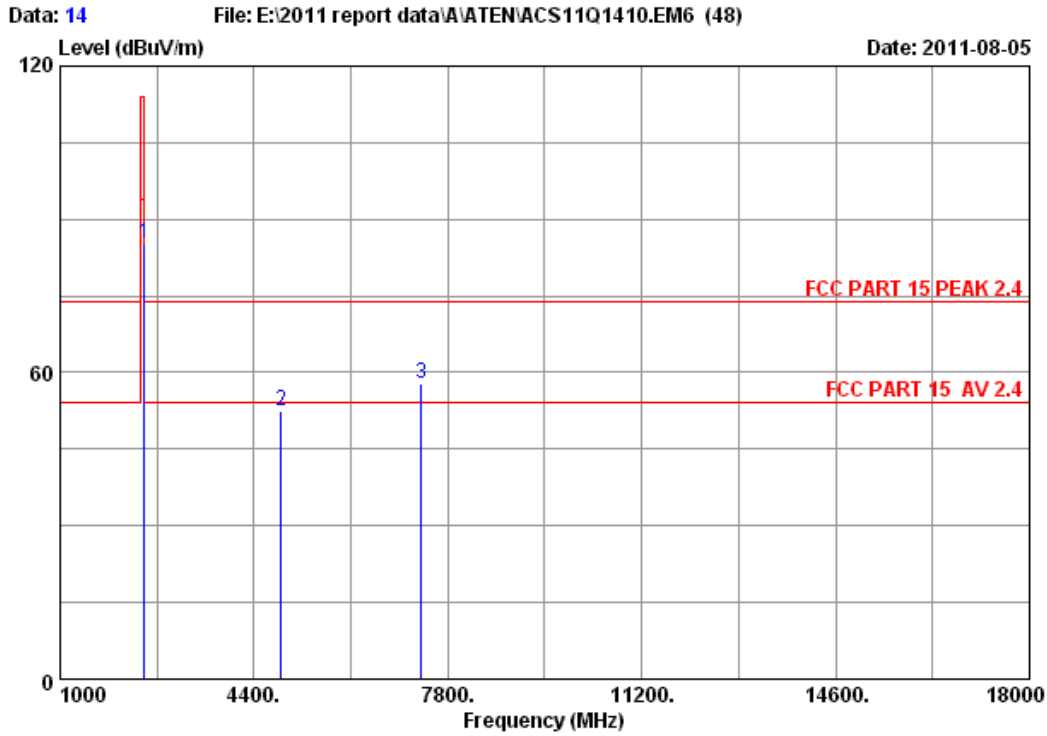

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23°C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2479MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2479.000	28.08	6.87	34.45	84.67	85.17	114.00	28.83	Peak
2	4878.000	32.98	9.62	34.60	44.38	52.38	74.00	21.62	Peak
3	7337.000	36.10	11.90	34.73	44.53	57.80	74.00	16.20	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBUV/m)	Duty cycle factor (dB)	AV level (dBUV/m)	Limit(dBUV/m)	Conclusion
2479	58.17	28.73	29.44	94	Pass
4958	52.38	28.73	23.65	54	Pass
7337	57.80	28.73	29.07	54	Pass

5. 20 DB BANDWIDTH TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year

5.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test Results

EUT: Long Range 2.4GHz Wireless Mouse		
M/N: GKM552R(M)		
Test date:2011-08-05	Pressure: 101.8 kpa	Humidity: 52 %
Tested by: Leo-Li	Test site: RF site	Temperature : 25.6 °C


Frequency	20dB bandwidth (KHz)	Limit (KHz)
2402MHz	1307	N/A
2439MHz	1422	N/A
2479MHz	1294	N/A
Conclusion : PASS		

Test Frequency: 2402MHz

<p>Agilent L</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.402000000 GHz</p> <p>Ref 0 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.402 000 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5.28 ms (601 pts)</p> <p>Occupied Bandwidth 1.1984 MHz</p> <p>Transmit Freq Error -22.215 kHz</p> <p>x dB Bandwidth 1.307 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -20.00 dB</p>		<p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.39950000 GHz</p> <p>Stop Freq 2.40450000 GHz</p> <p>CF Step 500.000000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>File Operation Status, A:\SCREN382.GIF file saved</p>		

Test Frequency: 2439MHz

<p>Agilent L</p> <p>Ch Freq 2.439 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.439000000 GHz</p> <p>Ref 0 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/</p> <p>Center 2.439 000 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5.28 ms (601 pts)</p> <p>Occupied Bandwidth 1.3183 MHz</p> <p>Transmit Freq Error -115.457 kHz</p> <p>x dB Bandwidth 1.422 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -20.00 dB</p>		<p>Trace</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>Copyright 2000-2005 Agilent Technologies</p>		

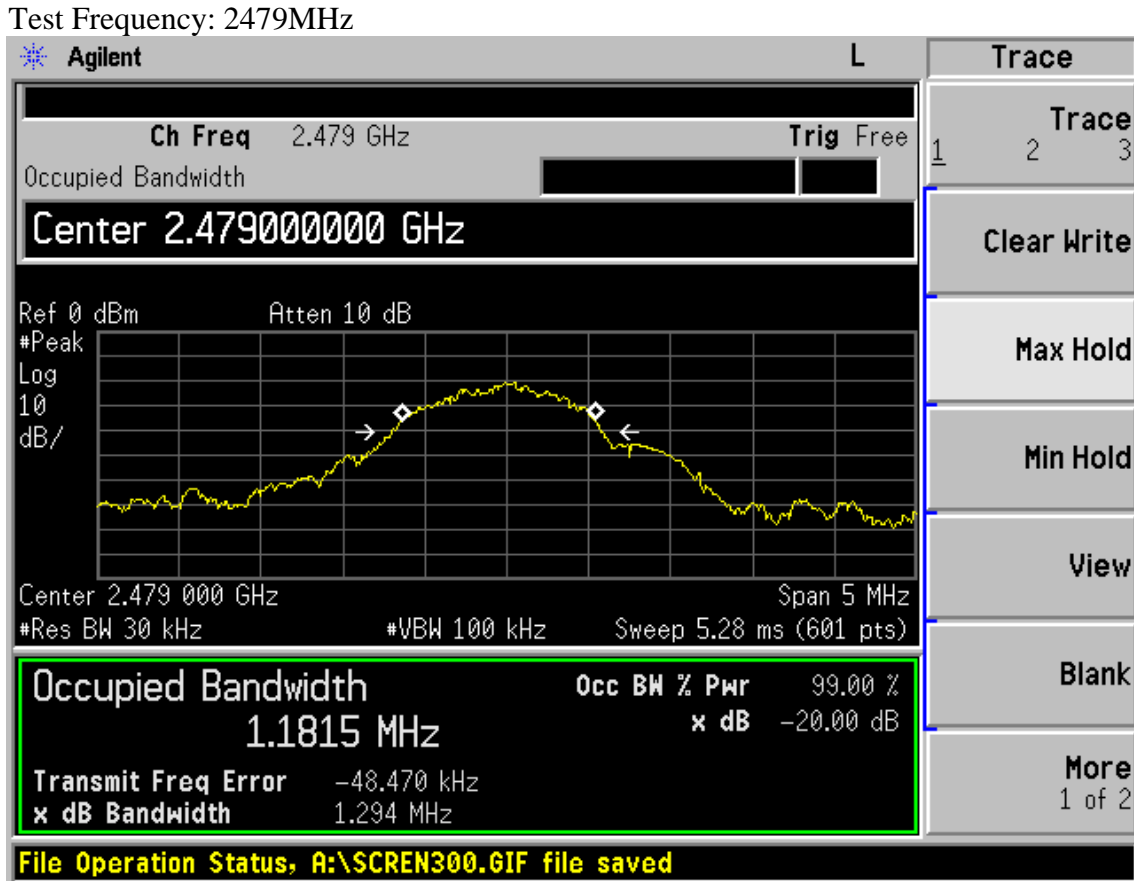

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year
2.	Horn Antenna	EMCO	3115	9607-4877	Nov.25, 10	1.5 Year
3.	Amplifier	Agilent	8449B	3008A02495	May.08, 11	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08,11	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	May.08,11	1 Year

6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Produce


1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level

6.4. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Note: The duty cycle factor for calculate average level is 28.73dB, and average limit is 20dB below peak limit, so if peak measured level comply with peak limit, the average level was deemed to comply with average limit.

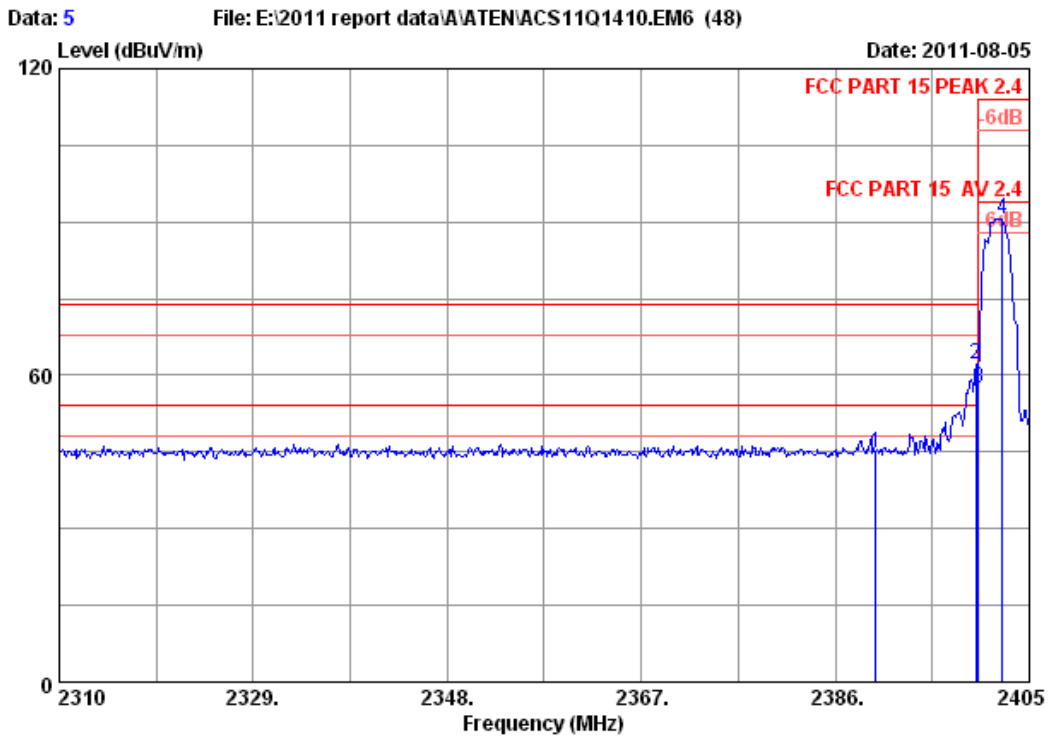


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23°C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2402MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Cable Factor (dB/m)	Amp. loss (dB)	Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.96	6.72	34.44	44.69	44.93	74.00	29.07	Peak
2	2399.775	27.96	6.75	34.44	61.92	62.19	74.00	11.81	Peak
3	2400.000	27.96	6.75	34.44	57.19	57.46	74.00	16.54	Peak
4	2402.340	27.96	6.75	34.44	90.25	90.52	114.00	23.48	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2390.000	44.93	28.73	16.2	94	Pass
2399.775	62.19	28.73	33.46	54	Pass
2400.000	57.46	28.73	28.73	54	Pass
2402.340	90.52	28.73	61.79	54	Pass

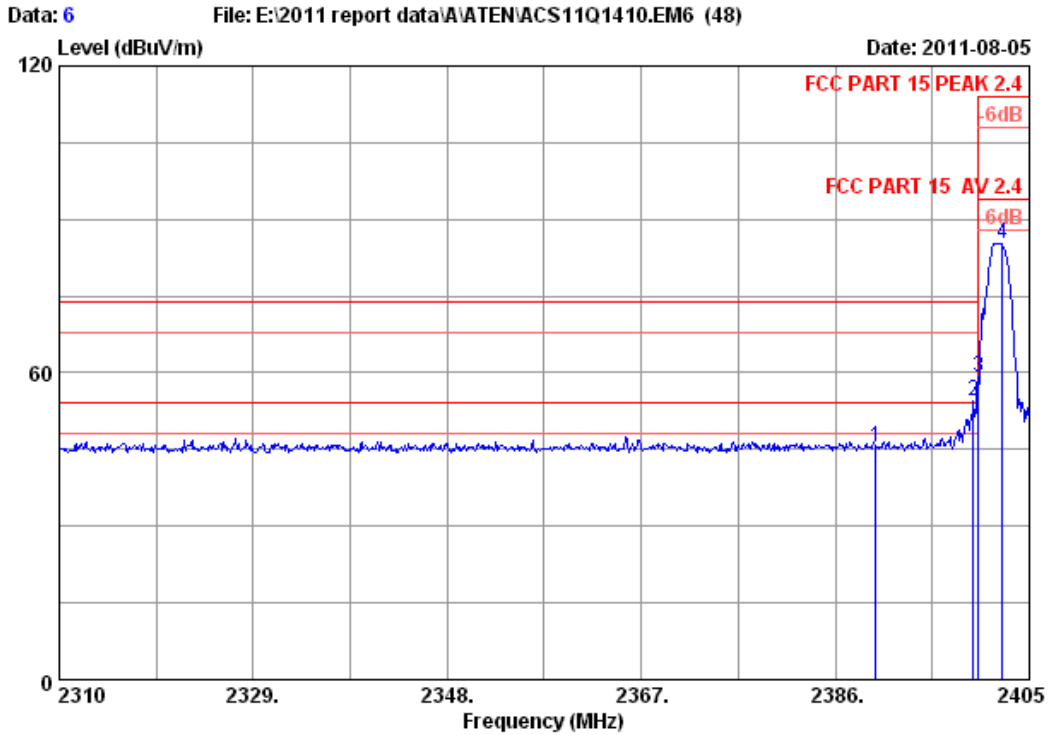


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23°C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2402MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.96	6.72	34.44	45.06	45.30	74.00	28.70	Peak
2	2399.490	27.96	6.75	34.44	54.18	54.45	74.00	19.55	Peak
3	2400.000	27.96	6.75	34.44	58.76	59.03	74.00	14.97	Peak
4	2402.340	27.96	6.75	34.44	84.97	85.24	114.00	28.76	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2390.000	45.30	28.73	16.57	94	Pass
2399.490	54.45	28.73	25.72	54	Pass
2400.000	59.03	28.73	30.3	54	Pass
2402.340	85.24	28.73	56.51	54	Pass

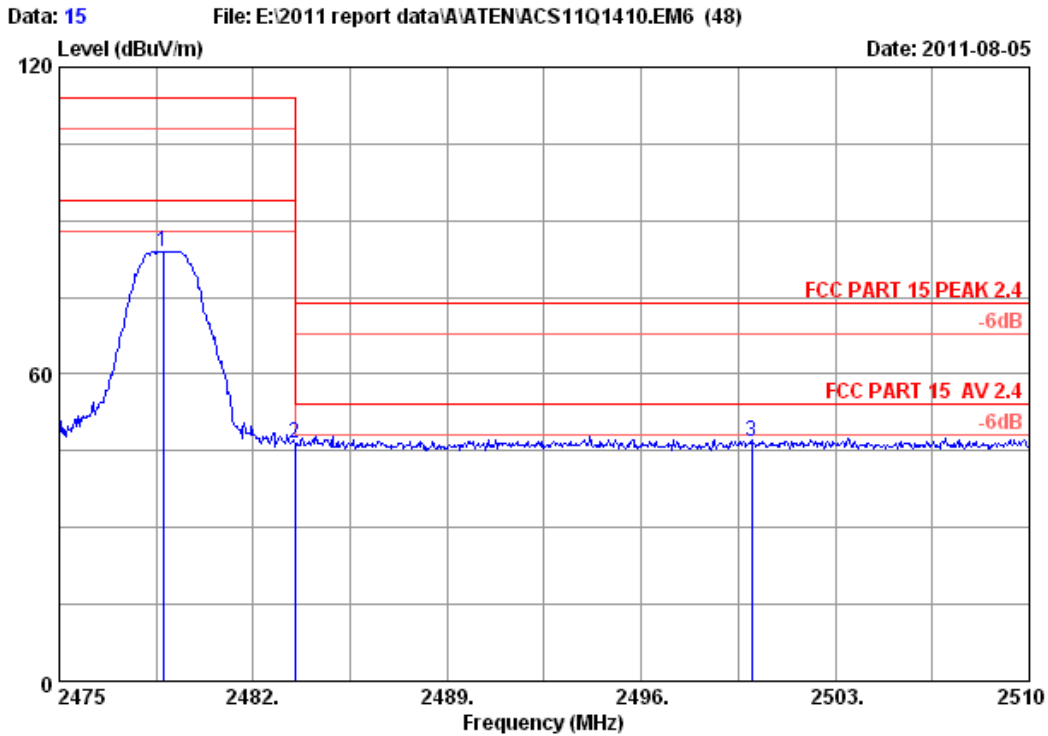


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23°C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2479MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2478.745	28.08	6.87	34.45	83.55	84.05	114.00	29.95	Peak
2	2483.500	28.08	6.90	34.45	45.87	46.40	74.00	27.60	Peak
3	2500.000	28.10	6.90	34.45	46.41	46.96	74.00	27.04	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2478.745	84.05	28.73	55.32	94	Pass
2483.500	45.87	28.73	17.14	54	Pass
2500.000	46.41	28.73	17.68	54	Pass

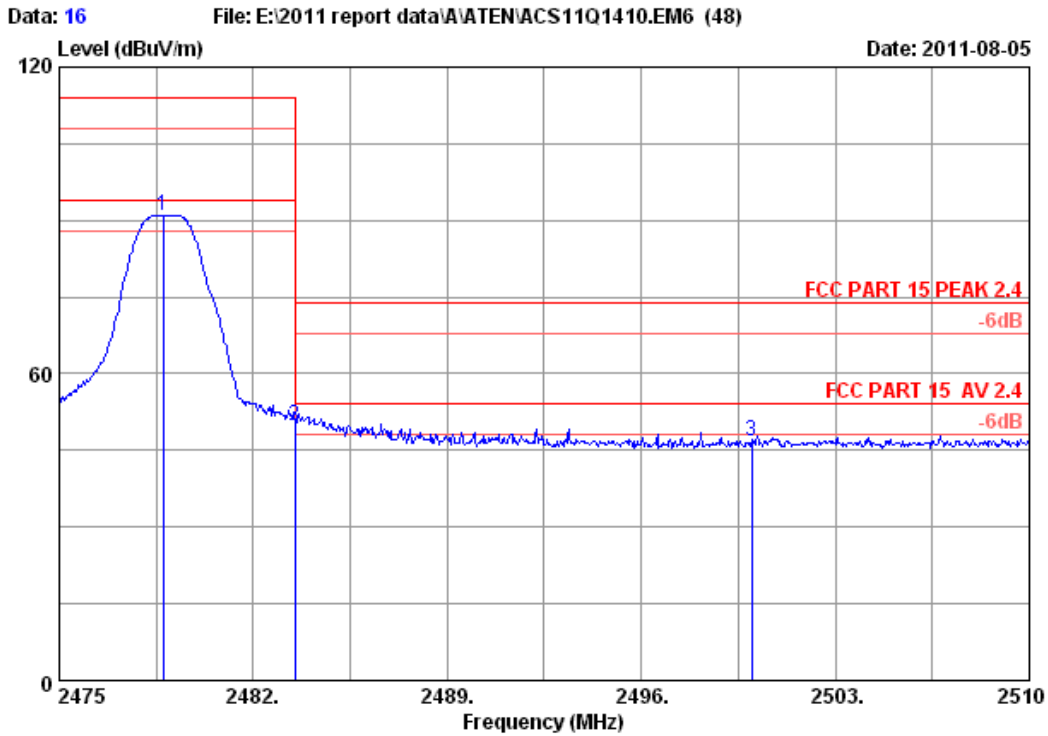

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2011 3115 4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 PEAK 2.4
 Env. / Ins. : 23°C/54% Engineer : Paul Tian
 EUT : Long Range 2.4GHz Wireless Mouse
 Power : DC 1.5V
 Test mode : Tx 2479MHz
 M/N : GKM552R(M)

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2478.745	28.08	6.87	34.45	90.44	90.94	114.00	23.06	Peak
2	2483.500	28.08	6.90	34.45	49.28	49.81	74.00	24.19	Peak
3	2500.000	28.10	6.90	34.45	46.16	46.71	74.00	27.29	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2478.745	90.94	28.73	62.21	94	Pass
2483.500	49.81	28.73	21.08	54	Pass
2500.000	46.71	28.73	17.98	54	Pass

7. ANTENNA REQUIREMENT

RESULT : **PASS**

Test Date : Aug.05, 2011

Test standard : FCC Part 15.203

Limit : the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 0dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply the provision

8. RADIO FRREQUENCY EXPOSURE COMPLIANCE

RESULT : **PASS**

Test standard : FCC KDB Publication 447498

Since maximum peak output power of the transmitter is $<60/f(\text{GHz})\text{mW}$,
i.e. $0.009438\text{mW} < 25(=60/2.4)\text{mW}$, hence the EUT is excluded from SAR evaluation according
to FCC KDB Publication 447498 D01:Mobile Portable RF Exposure

9. DEVIATION TO TEST SPECIFICATIONS

[NONE]