

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : USB Dongle

Model No. : BT-DG02A

FCC ID. : QLHCAG0603

Filing Type : Certification

Applicant : **EPOX COMPUTER CO., LTD.**

10F, No. 346, Sec. 2, Chung San Rd., Chung Ho City, Taipei Hsien, 235 Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test.....	2
1.4. Feature of Equipment under Test	2
2. Test Configuration of Equipment under Test	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Connection Diagram of Test System	6
3. Test Software	7
4. General Information of Test.....	8
4.1. Test Voltage	8
4.2. Standard for Methods of Measurement.....	8
4.3. Test in Compliance with	8
4.4. Frequency Range Investigated	8
4.5. Test Distance	8
5. Report of Measurements and Examinations	9
5.1. List of Measurements and Examinations	9
5.2. Hopping Channel Separation	10
5.3. Number of Hopping Frequency	11
5.4. Hopping Channel Bandwidth.....	12
5.5. Dwell Time of Each Frequency within a 30 Seconds Period.....	13
5.6. Output Power	14
5.7. 100KHz Bandwidth of Frequency Band Edges	15
5.8. Test of Conducted Emission	16
5.9. Test of Radiated Emission	20
6 Antenna Requirements	32
7 RF Exposure.....	錯誤! 尚未定義書籤。
8 EMI Suppression Component List	33
9 Antenna Factor & Cable Loss	34
10 List of Measuring Equipments Used	35
11 Uncertainty of Test Site	36

History of this test report

Original Report Issue Date: Sep. 25, 2003

No additional attachment.

Additional attachment were issued as following record:

Certificate No. : F353109

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : USB Dongle

Model No. : BT-DG02A

FCC ID. : QLHCAG0603

Filing Type : Certification

Applicant : **EPOX COMPUTER CO., LTD.**

10F, No. 346, Sec. 2, Chung San Rd., Chung Ho City,
Taipei Hsien, 235 Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Sep. 04, 2003 at **SPORTON International Inc. LAB.**



Alex Chen

Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

EPOX COMPUTER CO., LTD.

10F, No. 346, Sec. 2, Chung San Rd., Chung Ho City, Taipei Hsien, 235 Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment	: USB Dongle
Model No.	: BT-DG02A
FCC ID	: QLHCAG0603
Trade Name	: EPOX
Power Supply Type	: From System
AC Power Cord	: N/A

1.4. Feature of Equipment under Test

Product Feature & Specification	
1. Host/Radio Interface	FHSS
2. Type of Modulation	GFSK
3. Number of Channels	79
4. Frequency Band	2.4G~2.4835GHz (ISM)
5. Bandwidth of each channel	1MHz
6. Maximum Output Power to Antenna	10dBm
7. IF & L.O. frequency	IF: Zero; L.O.: 14MHz
1. Type of Antenna Connector (Ex: SMA, TNC, MCX, MMCX, UFC.....etc)	Undetachable
8. Antenna Type / Class and Gain	Chip antenna, 0~1.5dBi
9. Function Type	Transceiver
10. Power Rating (DC/AC, Voltage)	DC: 5V

Channel	Frequency	Channel	Frequency
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included COMPAQ PC, VIEWSONIC Monitor, LOGITECH PS/2 Keyboard, LOGITECH PS/2 Mouse, EPSON Printer, ACEEX Modem and EUT for EMI test.
- c. This device is an integration of an SIG qualified BlueTooth module. The used codes for modulating IF carrier is of course pseudo-random. The hopping sequence is determined by the address of the piconet master. Here is the hopping sequence indicated by channel number:
02, 17, 68, 55, 4, 77, 56, 27, 70, 80, 22, 33, 57, 34, 29, 79, 44, 50, 3, 71, 66, 36, 78, 20, 67, 30, 24, 11, 37, 69, 23, 7, 41 38, 63, 14, 31, 59, 40, 13, 6, 25, 65, 15, 61, 73, 58, 47, 19, 28, 54, 76, 74, 48, 52, 75, 5, 42, 64, 72, 62, 51, 60, 18, 45, 53, 16, 39, 46, 32, 49, 43, 8, 21, 9, 12, 10, 26, 35
- d. For 15.247(g), during data transmission, the carrier frequency is repeatedly switched on 79 hopping frequencies, any 2 hopping frequencies will not be available on the spectrum simultaneously. So, this device can be taken as true frequency hopping device.
- e. For 15.247(h), the hopping sequence is determined by the address of piconet master. Each piconet master will have its unique address at any moment, so re-use of the hopping sequence is completely not possible. Within the piconet, one master can be communicated with many slaves via the same hopping sequence, but at any moment only one (master or slave) can be "talk". It is determined by the master that who should be "listen" or "talk". Any slave who wants to "talk" has to send "inquiry" to master first. So, 2 slaves (or one slave one master) is not possible to be on "talk" mode simultaneously.
- f. The following test modes were pretested:
 - Mode 1: CH00 (2402MHz)
 - Mode 2: CH39 (2441MHz)
 - Mode 3: CH78 (2480MHz)
- g. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Description of Test System

Support Unit 1. – Personal Computer (COMPAQ)

FCC ID	: N/A
Model No.	: Evo D380mx
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0127
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (VIEWSONIC)

FCC ID	: N/A
Model No.	: VCDTS21553-3P
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0051
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. – PS/2 Keyboard (LOGITECH)

FCC ID	: N/A
Model No.	: Y-SJ17
Serial No.	: SP0054
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 4. – PS/2 Mouse (LOGITECH)

FCC ID	: DZL211029
Model No.	: M-S34
Serial No.	: SP0041
Data Cable	: Shielded, 1.7m


Support Unit 5. -- Printer (EPSON)

FCC ID	: N/A
Model No.	: STYLUS COLOR 680
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Shielded, 1.35m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 6. -- Modem (ACEEX)

FCC ID	: IFAXDM1414
Model No.	: DM1414
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0015
Data Cable	: Shielded, 360 degree via metal backshells, 1.15m

2.3. Connection Diagram of Test System

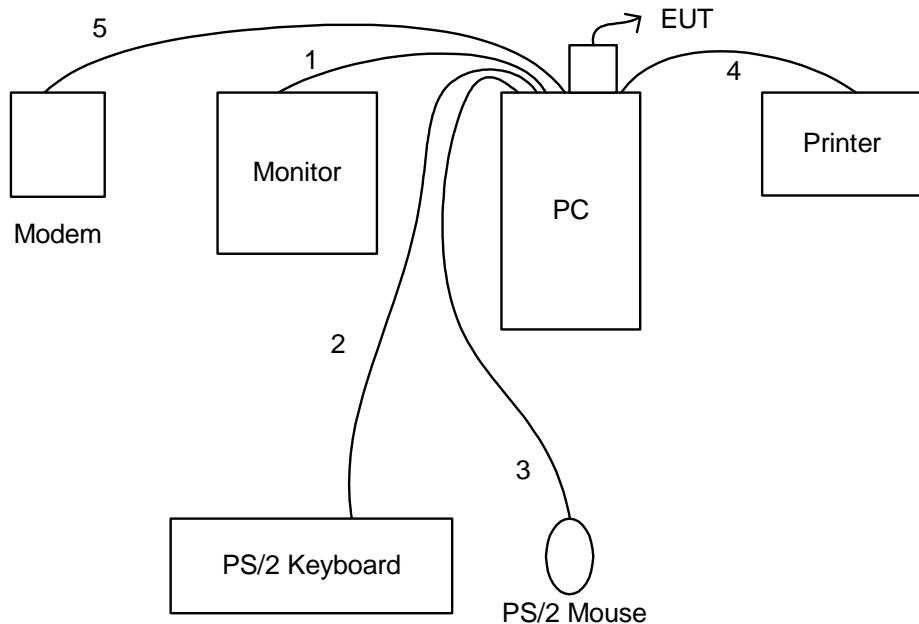

1. The I/O cable is connected from the PC to the support unit 2.
2. The I/O cable is connected from the PC to the support unit 3.
3. The I/O cable is connected from the PC to the support unit 4.
4. The I/O cable is connected from the PC to the support unit 5.
5. The I/O cable is connected from the PC to the support unit 6.

3. Test Software

An executive programs, EMCTEST.EXE under WIN XP, which generate a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends "H" messages to the monitor, and the monitor displays "H" patterns on the screen.
- d. The PC sends "H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends "H" messages to the modem.
- f. The PC sends "H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from c to f.

At the same time, "Bluetest.exe" was executed to keep transmitting signals at fixed frequency.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-2001

4.3. Test in Compliance with

ANSI C63.4-2001 for conducted power line test and radiated emission test
DA 00-705 for test of hopping channel separation
DA 00-705 for test of number of hopping frequency used
DA 00-705 for test of hopping channel bandwidth
DA 00-705 for test of dwell time of each frequency within a 30 second period
DA 00-705 for test of output power
DA 00-705 for test of 100khz bandwidth of frequency band edges

4.4. Frequency Range Investigated

- a. Conduction: from 150 KHz to 30 MHz
- b. Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.247(a)(1)(ii)	Hopping Channel Bandwidth	Pass
<u>15.247(a)(1)</u>	Hopping Channel Separation	Pass
<u>15.247(a)(1)(ii)</u>	Number of Hopping Frequency Used	Pass
<u>15.247(a)(1)(ii)</u>	Dwell Time of Each Frequency within a 30 Second Period	Pass
<u>15.247(b)</u>	Output Power	Pass
15.247(c)	100KHz Bandwidth of Frequency Band Edges	Pass
<u>15.107/15.207</u>	Conducted Emission	Pass
15.209	Radiated Emission	Pass
<u>15.203</u>	Antenna Requirement	Pass

5.2. Hopping Channel Separation


5.2.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

5.2.3. Test Setup Layout :

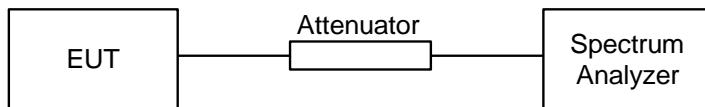

5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 26°C
- Relative Humidity: 64 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Hopping Channel Separation (KHz)	Limits (KHz)	Plot Ref. No.
00	2402	1000.0000	25	1
39	2441	1000.0000	25	2
78	2480	1000.0000	25	3

5.2.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition.

The EUT have its hopping function enabled.

5.3. Number of Hopping Frequency


5.3.1. Measuring Instruments :

As described in chapter 10 of this test report.

5.3.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.3.3. Test Setup Layout :

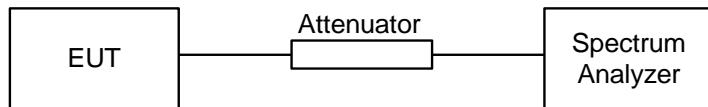

5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64 %
- Duty cycle of the equipment during the test X = 100%

Number of Hopping Frequency (Channel)	Limits (Channel)	Plot Ref. No.
79	75	1

5.3.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition.
The EUT have its hopping function enabled.

5.4. Hopping Channel Bandwidth


5.4.1 Measuring Instruments :

As described in chapter 10 of this test report.

5.4.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4.3 Test Setup Layout :

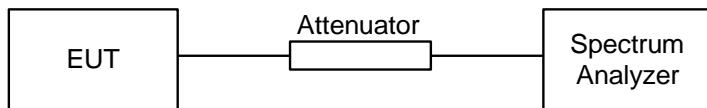

5.4.4 Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot
				Ref. No.
00	2402	0.2760	1.0	1
39	2441	0.2750	1.0	2
78	2480	0.2790	1.0	3

5.4.5 Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies respectively.

5.5 Dwell Time of Each Frequency within a 30 Seconds Period


5.5.1 Measuring Instruments :

As described in chapter 10 of this test report.

5.5.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. The calculate = $30 * (1600/79) * t$ (ie: t = the time duration of one single pulse)

5.5.3 Test Setup Layout :

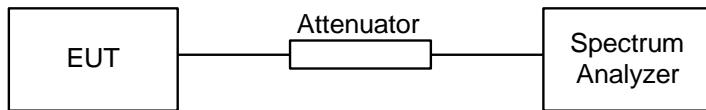

5.5.4 Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency	Dwell Time	Limits	Plot
	(MHz)	(s)	(s)	Ref. No.
00	2402	0.332962025	0.4	1
39	2441	0.332962025	0.4	2
78	2480	0.332962025	0.4	3

5.5.5 Test Configuration (EUT Operating Condition) :

Same as Section 5.2.5.

5.6 Output Power


5.6.1 Measuring Instruments :

As described in chapter 10 of this test report.

5.6.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 1MHz and VBW to 1MHz.

5.6.3 Test Setup Layout :

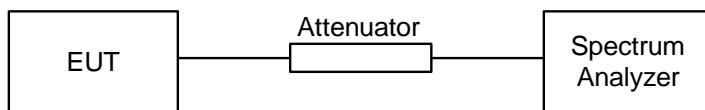

5.6.4 Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency	Measured Output Power	Measured Output Power	Limits
	(MHz)	(dBm)	(mWatt)	(Watt/dBm)
00	2402	10.00	10.0000000	1W/30 dBm
39	2441	9.92	9.81747943	1W/30 dBm
78	2480	9.42	8.749837752	1W/30 dBm

5.6.5 Test Configuration (EUT Operating Condition) :

Same as Section 5.4.5.

5.7 100KHz Bandwidth of Frequency Band Edges

5.7.1 Measuring Instruments :

As described in chapter 10 of this test report.

5.7.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low loss cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3 Test Result :

Test Result in lower band (Channel 00) :	PASS
Test Result in higher band(Channel 78) :	PASS

5.7.4 Note on Band edge Emission

The band edge emission plot on appendix B page B15. shows 56.87dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

Polarity	The emission of carrier power		The maximum field strength in restrict band		Margin	Detector	Result
	strength (dB μ V/m)	field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	(dB)			
H	105.20	48.33	74.00	-25.67	Peak	Pass	Pass
H	77.94	21.07	54.00	-32.93	Average	Pass	Pass
V	99.49	42.62	74.00	-3138	Peak	Pass	Pass
V	73.10	16.23	54.00	-37.77	Average	Pass	Pass

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

5.7.5 Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, and highest channel frequencies respectively.

5.8 Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.8.1 Major Measuring Instruments :

• Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.8.2 Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.8.3 Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 27°C
- Relative Humidity: 63.7 %
- Test Date: Sep. 04, 2003


The test was passed at the minimum margin that marked by a frame in the following data

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/008 LINE

Memo	TX CH00 2402MHz						
	Freq	Level	Over	Limit	Read	Probe	Cable
			Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB
1	0.170	36.29	-18.67	54.96	36.15	0.10	0.04 Average
2	0.170	40.15	-24.81	64.96	40.01	0.10	0.04 QP
3	0.197	39.10	-14.64	53.74	38.96	0.10	0.04 Average
4	0.197	40.66	-23.08	63.74	40.52	0.10	0.04 QP
5	0.277	12.60	-38.29	50.89	12.42	0.10	0.08 Average
6	0.277	25.98	-34.91	60.89	25.80	0.10	0.08 QP
7	1.405	25.33	-20.67	46.00	25.15	0.10	0.08 Average
8	1.405	29.39	-26.61	56.00	29.21	0.10	0.08 QP
9	11.870	25.65	-24.35	50.00	25.11	0.20	0.34 Average
10	11.870	30.34	-29.66	60.00	29.80	0.20	0.34 QP
11	15.630	29.65	-30.35	60.00	29.05	0.21	0.39 QP
12	15.630	24.69	-25.31	50.00	24.09	0.21	0.39 Average

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL

Memo	TX CH00 2402MHz						
	Freq	Level	Over	Limit	Read	Probe	Cable
			Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB
1	0.169	36.42	-18.58	55.00	36.28	0.10	0.04 Average
2	0.169	39.71	-25.29	65.00	39.57	0.10	0.04 QP
3	0.196	39.35	-14.42	53.77	39.21	0.10	0.04 Average
4	0.196	40.66	-23.11	63.77	40.52	0.10	0.04 QP
5	0.478	29.10	-17.28	46.38	28.89	0.10	0.11 Average
6	0.478	30.23	-26.15	56.38	30.02	0.10	0.11 QP
7	1.412	23.97	-22.03	46.00	23.79	0.10	0.08 Average
8	1.412	28.44	-27.56	56.00	28.26	0.10	0.08 QP
9	11.680	23.70	-26.30	50.00	23.12	0.24	0.34 Average
10	11.680	28.55	-31.45	60.00	27.97	0.24	0.34 QP
11	16.140	24.68	-25.32	50.00	23.98	0.30	0.40 Average
12	16.140	29.43	-30.57	60.00	28.73	0.30	0.40 QP



Test Engineer: _____

Jay Zhong

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 27°C
- Relative Humidity: 63.7 %
- Test Date: Sep. 04, 2003

The test was passed at the minimum margin that marked by a frame in the following data

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/006 LINE

Memo : TX CH39 2441MHz
 : F353109

	Freq	Over Level	Limit	Read Line	Probe Level	Cable Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.170	36.15	-18.82	54.97	36.01	0.10	0.04	Average
2	0.170	40.03	-24.94	64.97	39.89	0.10	0.04	QP
3	0.195	39.60	-14.20	53.80	39.46	0.10	0.04	Average
4	0.195	41.10	-22.70	63.80	40.96	0.10	0.04	QP
5	1.040	29.13	-16.87	46.00	28.97	0.10	0.06	Average
6	1.040	31.16	-24.84	56.00	31.00	0.10	0.06	QP
7	4.200	23.76	-22.24	46.00	23.49	0.11	0.16	Average
8	4.200	29.13	-26.87	56.00	28.86	0.11	0.16	QP
9	10.790	23.72	-26.28	50.00	23.20	0.20	0.32	Average
10	10.790	28.55	-31.45	60.00	28.03	0.20	0.32	QP
11	15.230	24.26	-25.74	50.00	23.68	0.20	0.38	Average
12	15.230	29.20	-30.80	60.00	28.62	0.20	0.38	QP

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/006 NEUTRAL

Memo : TX CH39 2441MHz
 : F353109

	Freq	Over Level	Limit	Read Line	Probe Level	Cable Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.197	38.90	-14.84	53.74	38.76	0.10	0.04	Average
2	0.197	40.86	-22.88	63.74	40.72	0.10	0.04	QP
3	0.475	28.19	-18.23	46.42	27.98	0.10	0.11	Average
4	0.475	29.44	-26.98	56.42	29.23	0.10	0.11	QP
5	1.040	28.45	-17.55	46.00	28.29	0.10	0.06	Average
6	1.040	31.30	-24.70	56.00	31.14	0.10	0.06	QP
7	4.140	23.58	-22.42	46.00	23.22	0.20	0.16	Average
8	4.140	28.33	-27.67	56.00	27.97	0.20	0.16	QP
9	12.450	23.41	-26.59	50.00	22.81	0.25	0.35	Average
10	12.450	28.41	-31.59	60.00	27.81	0.25	0.35	QP
11	16.840	24.14	-25.86	50.00	23.44	0.30	0.40	Average
12	16.840	28.92	-31.08	60.00	28.22	0.30	0.40	QP

Jay

Test Engineer: _____

Jay Zhong

Test Mode: Mode 3

- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 27°C
- Relative Humidity: 63.7 %
- Test Date: Sep. 04, 2003

The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY

Condition : CISPR CLASS-B 2003 2001/008 LINE

Memo : TX CH76 2480MHz
: F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable		
						MHz	dBuV	dB
1	0.172	35.85	-19.01	54.86	35.71	0.10	0.04	Average
2	0.172	40.02	-24.84	64.86	39.88	0.10	0.04	QP
3	0.195	39.74	-14.08	53.82	39.60	0.10	0.04	Average
4	0.195	41.34	-22.48	63.82	41.20	0.10	0.04	QP
5	0.283	14.89	-35.84	50.73	14.71	0.10	0.08	Average
6	0.283	27.41	-33.32	60.73	27.23	0.10	0.08	QP
7	4.200	23.68	-22.32	46.00	23.41	0.11	0.16	Average
8	4.200	28.54	-27.46	56.00	28.27	0.11	0.16	QP
9	11.260	24.66	-25.34	50.00	24.13	0.20	0.33	Average
10	11.260	29.62	-30.38	60.00	29.09	0.20	0.33	QP
11	15.390	29.40	-30.60	60.00	28.80	0.21	0.39	QP
12	15.390	24.42	-25.58	50.00	23.02	0.21	0.39	Average

Site : C001-HY

Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL

Memo : TX CH76 2480MHz
: F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable		
						MHz	dBuV	dB
1	0.195	39.97	-13.85	53.82	39.83	0.10	0.04	Average
2	0.195	41.30	-22.52	63.82	41.16	0.10	0.04	QP
3	0.479	29.56	-26.00	56.36	29.35	0.10	0.11	QP
4	0.479	27.27	-19.09	46.36	27.06	0.10	0.11	Average
5	1.040	28.53	-17.47	46.00	28.37	0.10	0.06	Average
6	1.040	31.36	-24.64	56.00	31.20	0.10	0.06	QP
7	3.807	27.10	-28.90	56.00	26.76	0.19	0.15	QP
8	3.807	22.26	-23.74	46.00	21.92	0.19	0.15	Average
9	11.810	25.18	-24.82	50.00	24.60	0.24	0.34	Average
10	11.810	29.97	-30.03	60.00	29.39	0.24	0.34	QP
11	15.150	24.21	-25.79	50.00	23.53	0.30	0.38	Average
12	15.150	29.35	-30.65	60.00	28.67	0.30	0.38	QP

Jay

Test Engineer: _____

Jay Zhong

5.9 Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 5.9.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.9.1 Major Measuring Instruments

- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5 GHz


- Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz

- Spectrum analyzer (R&S FSP40)
 - Attenuation 10 dB
 - Start Frequency 1 GHz
 - Stop Frequency 25 GHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 40 GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K – 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

5.9.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

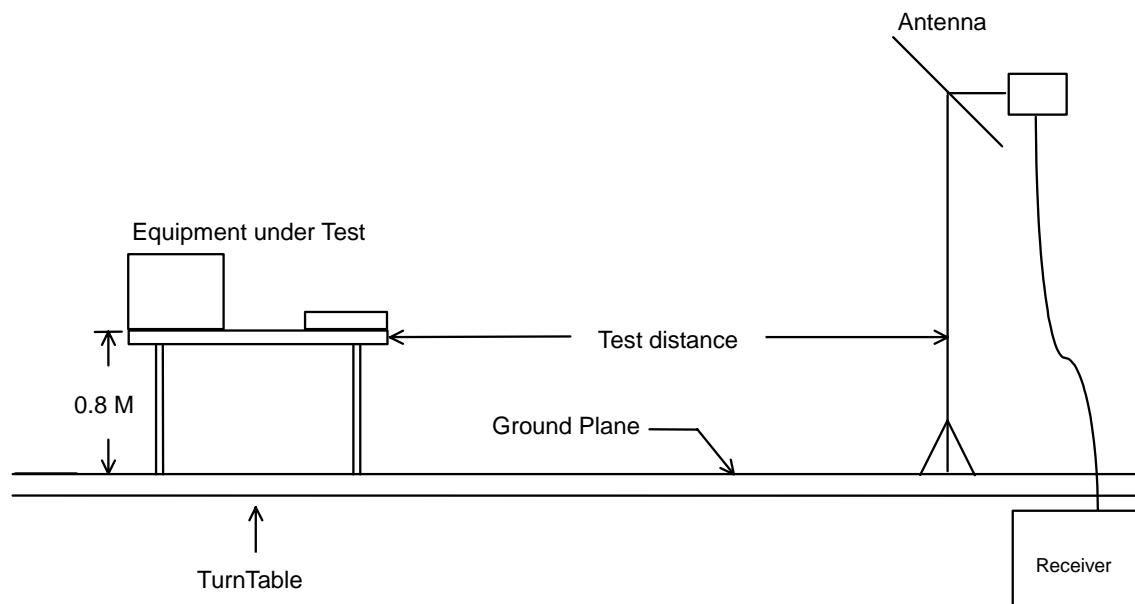5.9.3 Typical Test Setup Layout of Radiated Emission

5.9.4 Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 64 %
- Test Date: Aug. 26, 2003
- Emission level (dB_{uV/m}) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : USB Dongle

MEMO : TX CH00 2402MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
									Pos	Pos
									cm	deg
	MHz	dB _{uV/m}		dB	dB _{uV/m}		dB			
1	197.940	35.23	-8.27	43.50	52.27	7.29	2.20	26.61 Peak	---	---
2	204.420	36.95	-6.55	43.50	53.55	7.68	2.32	26.60 Peak	---	---
3	210.090	35.62	-7.88	43.50	51.64	8.22	2.36	26.60 Peak	---	---
1	346.900	31.89	-14.11	46.00	42.42	12.91	3.44	26.88 Peak	---	---
2	671.000	32.65	-13.35	46.00	38.17	17.80	4.68	28.00 Peak	---	---
3	719.300	32.09	-13.91	46.00	37.12	18.15	4.82	28.00 Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB Dongle

MEMO : TX CH00 2402MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
									Pos	Pos
									cm	deg
	MHz	dB _{uV/m}		dB	dB _{uV/m}		dB			
1	42.690	33.56	-6.44	40.00	49.83	9.63	1.20	27.10 Peak	---	---
2	68.610	29.20	-10.80	40.00	50.33	4.50	1.43	27.06 Peak	---	---
3	179.850	30.32	-13.18	43.50	47.29	7.59	2.12	26.60 Peak	---	---
1	436.500	34.35	-11.65	46.00	43.05	15.14	3.54	27.30 Peak	---	---
2	671.000	32.04	-13.96	46.00	37.56	17.80	4.68	28.00 Peak	---	---
3	816.600	30.27	-15.73	46.00	34.25	18.89	5.10	27.97 Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : USB Dongle

MEMO : TX CH00 2402MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg	cm	deg
1	2132.000	52.99	-21.01	74.00	60.44	27.68	5.86	40.99 Peak	---	---
2	2132.000	41.74	-12.26	54.00	49.19	27.68	5.86	40.99 Average	---	---
3	2164.000	51.29	-22.71	74.00	50.66	27.74	5.90	41.01 Peak	---	---
4	2164.000	40.01	-13.99	54.00	47.38	27.74	5.90	41.01 Average	---	---
5	2180.000	53.19	-20.81	74.00	60.51	27.77	5.92	41.01 Peak	---	---
6	2180.000	42.15	-11.85	54.00	49.47	27.77	5.92	41.01 Average	---	---
7	2212.000	51.82	-22.18	74.00	59.05	27.84	5.96	41.03 Peak	---	---
8	2212.000	39.99	-14.01	54.00	47.22	27.84	5.96	41.03 Average	---	---
11	2628.000	51.76	-22.24	74.00	57.55	28.84	6.57	41.20 Peak	---	---
12	2628.000	38.95	-15.05	54.00	44.74	28.84	6.57	41.20 Average	---	---
1	3926.000	51.35	-22.65	74.00	51.21	32.43	9.18	41.47 Peak	---	---
2	3926.000	50.57	-3.43	54.00	50.43	32.43	9.18	41.47 Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : USB Dongle

MEMO : TX CH00 2402MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	deg	cm	deg
1	2132.000	50.68	-23.32	74.00	58.13	27.68	5.86	40.99 Peak	---	---
2	2132.000	39.49	-14.51	54.00	46.94	27.68	5.86	40.99 Average	---	---
3	2180.000	50.34	-23.66	74.00	57.66	27.77	5.92	41.01 Peak	---	---
4	2180.000	38.42	-15.58	54.00	45.74	27.77	5.92	41.01 Average	---	---
5	2212.000	50.42	-23.58	74.00	57.65	27.84	5.96	41.03 Peak	---	---
6	2212.000	39.51	-14.49	54.00	46.74	27.84	5.96	41.03 Average	---	---
7	2244.000	46.78	-27.22	74.00	53.93	27.90	6.00	41.05 Peak	---	---
8	2244.000	36.36	-17.64	54.00	43.51	27.90	6.00	41.05 Average	---	---
11	2628.000	47.16	-26.84	74.00	52.95	28.84	6.57	41.20 Peak	---	---
12	2628.000	34.92	-19.08	54.00	40.71	28.84	6.57	41.20 Average	---	---
1	3980.000	51.31	-22.69	74.00	50.90	32.59	9.32	41.50 Peak	---	---
2	3980.000	50.85	-3.15	54.00	50.44	32.59	9.32	41.50 Average	100	105

➤ For 5GHz ~ 25GHz

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss	Limits	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
2404.000	H	28.23	6.21	70.89	105.33	184714.08	-	Peak
2404.000	H	28.23	6.21	42.41	76.85	6958.25	-	A.V.
2404.000	V	28.23	6.21	67.94	102.38	131522.48	-	Peak
2404.000	V	28.23	6.21	40.75	75.19	5747.78	-	A.V.
4804.000	V/H				-			Peak, A.V.
7206.000	V/H				-			Peak, A.V.
9608.000	V/H				-			Peak, A.V.
12010.000	V/H				-			Peak, A.V.
14412.000	V/H				-			Peak, A.V.
16814.000	V/H				-			Peak, A.V.
19216.000	V/H				-			Peak, A.V.
21618.000	V/H				-			Peak, A.V.
24020.000	V/H				-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer:

Steve

Steve Chen

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 64 %
- Test Date: Aug. 26, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : USB Dongle

MEMO : TX CH39 2441MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Preamp		Ant Remark	Table Pos	Table Pos
						dB	dBuV			
MHz	dBuV/m		dB	dBuV/m		dB	dB		cm	deg
1	197.940	36.42	-7.08	43.50	53.46	7.29	2.28	26.61 Peak	---	---
2	204.420	36.87	-6.63	43.50	53.47	7.68	2.32	26.60 Peak	---	---
3	210.090	35.66	-7.04	43.50	51.68	8.22	2.36	26.60 Peak	---	---
1	346.900	31.76	-14.24	46.00	42.29	12.91	3.44	26.88 Peak	---	---
2	436.500	32.44	-13.56	46.00	41.14	15.14	3.54	27.38 Peak	---	---
3	671.000	32.85	-13.15	46.00	38.37	17.80	4.68	28.00 Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB Dongle

MEMO : TX CH39 2441MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Preamp		Ant Remark	Table Pos	Table Pos
						dB	dBuV			
MHz	dBuV/m		dB	dBuV/m		dB	dB		cm	deg
1	37.290	32.48	-7.52	40.00	46.55	11.96	1.07	27.10 Peak	---	---
2	179.850	30.37	-13.13	43.50	47.34	7.59	2.12	26.68 Peak	---	---
3	197.940	29.96	-13.54	43.50	47.00	7.29	2.28	26.61 Peak	---	---
1	436.500	32.79	-13.21	46.00	41.49	15.14	3.54	27.38 Peak	---	---
2	671.000	32.33	-13.67	46.00	37.85	17.80	4.68	28.00 Peak	---	---
3	811.000	30.96	-15.04	46.00	34.99	18.86	5.09	27.98 Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : USB Dongle

MEMO : TX CH39 2441MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Preamp		Ant Pos	Table Pos
						dB	dB		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	2134.000	52.92	-21.08	74.00	60.37	27.68	5.86	40.99	Peak
2	2134.000	37.79	-16.21	54.00	45.24	27.68	5.86	40.99	Average
3	2166.000	54.62	-19.38	74.00	61.99	27.74	5.90	41.01	Peak
4	2166.000	42.30	-11.70	54.00	49.67	27.74	5.90	41.01	Average
5	2198.000	50.92	-23.08	74.00	58.20	27.81	5.94	41.03	Peak
6	2198.000	38.84	-15.16	54.00	46.12	27.81	5.94	41.03	Average
7	2214.000	54.58	-19.42	74.00	61.01	27.84	5.96	41.03	Peak
8	2214.000	40.34	-13.66	54.00	47.57	27.84	5.96	41.03	Average
9	2246.000	52.99	-21.01	74.00	60.12	27.91	6.01	41.05	Peak
10	2246.000	39.04	-14.16	54.00	46.97	27.91	6.01	41.05	Average
1	3948.000	51.39	-22.61	74.00	51.13	32.50	9.24	41.48	Peak
2	3948.000	50.88	-3.12	54.00	50.62	32.50	9.24	41.48	Average
								100	105

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : USB Dongle

MEMO : TX CH39 2441MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Preamp		Ant Pos	Table Pos
						dB	dB		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	2134.000	52.64	-21.36	74.00	60.09	27.68	5.86	40.99	Peak
2	2134.000	39.48	-14.52	54.00	46.93	27.68	5.86	40.99	Average
3	2166.000	52.22	-21.78	74.00	59.59	27.74	5.90	41.01	Peak
4	2166.000	41.24	-12.76	54.00	48.61	27.74	5.90	41.01	Average
5	2182.000	49.90	-24.10	74.00	57.22	27.78	5.92	41.02	Peak
6	2182.000	37.01	-16.99	54.00	44.33	27.78	5.92	41.02	Average
7	2214.000	51.59	-22.41	74.00	58.82	27.84	5.96	41.03	Peak
8	2214.000	41.09	-12.91	54.00	48.32	27.84	5.96	41.03	Average
9	2246.000	52.62	-21.88	74.00	59.75	27.91	6.01	41.05	Peak
10	2246.000	42.01	-11.99	54.00	49.14	27.91	6.01	41.05	Average
1	3980.000	51.14	-22.86	74.00	50.73	32.59	9.32	41.50	Peak
2	3980.000	50.65	-3.35	54.00	50.24	32.59	9.32	41.50	Average

➤ For 5GHz ~ 25GHz

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss	Limits	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
2444.000	H	28.31	6.27	70.37	104.95	176807.22	-	Peak
2444.000	H	28.31	6.27	42.88	77.46	7464.49	-	A.V.
2438.000	V	28.30	6.26	65.99	100.55	106536.89	-	Peak
2438.000	V	28.30	6.26	39.73	74.29	5182.03	-	A.V.
4882.000	V/H				-			Peak, A.V.
7323.000	V/H				-			Peak, A.V.
9764.000	V/H				-			Peak, A.V.
12205.000	V/H				-			Peak, A.V.
14646.000	V/H				-			Peak, A.V.
17087.000	V/H				-			Peak, A.V.
19528.000	V/H				-			Peak, A.V.
21969.000	V/H				-			Peak, A.V.
24410.000	V/H				-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer:

Steve

Steve Chen

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 64 %
- Test Date: Aug. 26, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : USB Dongle

MEMO : TX CH78 2480MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Preamp			Ant Pos	Table Pos
						dB	dBuV/m	dB		
1	197.940	36.42	-7.08	43.50	53.46	7.29	2.28	26.61	Peak	---
2	204.420	36.09	-6.61	43.50	53.49	7.60	2.32	26.60	Peak	---
3	210.090	35.58	-7.92	43.50	51.60	8.22	2.36	26.60	Peak	---
1	346.900	31.38	-14.62	46.00	41.91	12.91	3.44	26.88	Peak	---
2	436.500	30.63	-15.37	46.00	39.33	15.14	3.54	27.38	Peak	---
3	671.000	33.25	-12.75	46.00	38.77	17.80	4.68	28.00	Peak	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB Dongle

MEMO : TX CH78 2480MHz
 : F353109

Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Preamp			Ant Pos	Table Pos
						dB	dBuV/m	dB		
1	42.690	33.67	-6.33	40.00	49.94	9.63	1.20	27.10	Peak	---
2	174.180	30.03	-13.47	43.50	47.10	7.51	2.12	26.70	Peak	---
3	179.850	30.39	-13.11	43.50	47.36	7.59	2.12	26.68	Peak	---
1	436.500	30.38	-15.62	46.00	39.08	15.14	3.54	27.38	Peak	---
2	671.000	32.26	-13.74	46.00	37.78	17.80	4.68	28.00	Peak	---
3	816.600	30.57	-15.43	46.00	34.55	18.09	5.10	27.97	Peak	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : USB Dongle

MEMO : TX CH78 2480MHz
 : F353109

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	2174.000	50.49	-23.51	74.00	57.83	27.76	5.91	41.01	Peak	---
2	2174.000	38.31	-15.69	54.00	45.65	27.76	5.91	41.01	Average	---
3	2206.000	55.08	-18.92	74.00	62.33	27.83	5.95	41.03	Peak	---
4	2206.000	41.39	-12.61	54.00	48.64	27.83	5.95	41.03	Average	---
5	2222.000	50.76	-23.24	74.00	57.97	27.86	5.97	41.04	Peak	---
6	2222.000	36.54	-17.46	54.00	43.75	27.86	5.97	41.04	Average	---
7	2254.000	53.09	-20.91	74.00	60.21	27.92	6.02	41.06	Peak	---
8	2254.000	39.01	-14.19	54.00	46.93	27.92	6.02	41.06	Average	---
9	2286.000	52.36	-21.64	74.00	59.39	27.99	6.06	41.08	Peak	---
10	2286.000	40.78	-13.22	54.00	47.81	27.99	6.06	41.08	Average	---
1	3980.000	51.33	-22.67	74.00	50.92	32.59	9.32	41.50	Peak	---
2	3980.000	50.78	-3.22	54.00	50.37	32.59	9.32	41.50	Average	100
										102

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : USB Dongle

MEMO : TX CH78 2480MHz
 : F353109

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	2174.000	48.33	-25.67	74.00	55.67	27.76	5.91	41.01	Peak	---
2	2174.000	36.35	-17.65	54.00	43.69	27.76	5.91	41.01	Average	---
3	2206.000	52.22	-21.78	74.00	59.47	27.83	5.95	41.03	Peak	---
4	2206.000	41.15	-12.85	54.00	48.40	27.83	5.95	41.03	Average	---
5	2238.000	50.21	-23.79	74.00	57.38	27.89	5.99	41.05	Peak	---
6	2238.000	38.20	-15.80	54.00	45.37	27.89	5.99	41.05	Average	---
7	2254.000	51.27	-22.73	74.00	58.39	27.92	6.02	41.06	Peak	---
8	2254.000	40.70	-13.30	54.00	47.82	27.92	6.02	41.06	Average	---
9	2286.000	49.02	-24.98	74.00	56.05	27.99	6.06	41.08	Peak	---
10	2286.000	39.58	-14.42	54.00	46.61	27.99	6.06	41.08	Average	---
1	3980.000	51.09	-22.91	74.00	50.68	32.59	9.32	41.50	Peak	---
2	3980.000	50.76	-3.24	54.00	50.35	32.59	9.32	41.50	Average	---

➤ For 5GHz ~ 25GHz

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss	Limits	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
2478.000	H	28.38	6.31	70.51	105.20	181970.09	-	Peak
2478.000	H	28.38	6.31	43.25	77.94	7888.60	-	A.V.
2478.000	V	28.38	6.31	64.80	99.49	94297.46	-	Peak
2478.000	V	28.38	6.31	38.41	73.10	4518.56	-	A.V.
4960.000	V/H				-			Peak, A.V.
7440.000	V/H				-			Peak, A.V.
9920.000	V/H				-			Peak, A.V.
12400.000	V/H				-			Peak, A.V.
14880.000	V/H				-			Peak, A.V.
17360.000	V/H				-			Peak, A.V.
19840.000	V/H				-			Peak, A.V.
22320.000	V/H				-			Peak, A.V.
24800.000	V/H				-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: Steve
Steve Chen

6 Antenna Requirements

The EUT use a Chip antenna. It is considered meet antenna requirement of FCC.

6.4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.4.2 Antenna Connected Construction

The maximum Gain antenna used in this product is Chip antenna, no antenna connector.

7 EMI Suppression Component List

No EMI suppression components.

8 Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.30	3.89
35	13.63	1.04	2000	31.10	5.41
40	11.11	1.09	3000	29.60	6.92
45	10.59	1.24	4000	30.80	8.24
50	6.47	1.43	5000	34.20	9.22
55	5.83	1.39	6000	33.30	10.25
60	5.18	1.59	7000	37.80	11.61
65	4.81	1.41	8000	39.40	11.78
70	4.43	1.43	9000	38.40	12.59
75	5.10	1.55	10000	38.90	13.84
80	5.91	1.56	11000	41.10	14.64
85	7.33	1.62	12000	42.70	14.12
90	8.74	1.41	13000	43.90	16.01
95	9.05	1.81	14000	43.70	13.76
100	9.36	1.68	15000	43.40	14.30
110	9.65	1.73	16000	40.90	15.16
120	9.97	1.79	17000	44.40	15.88
130	10.51	1.93	18000	47.10	16.09
140	10.32	2.06	19000	37.60	16.98
150	9.42	2.09	20000	37.30	16.21
160	8.09	2.12	21000	37.00	20.13
170	7.43	2.12	22000	38.00	19.24
180	7.60	2.12	23000	38.70	19.64
190	7.43	2.21	24000	38.60	20.54
200	7.26	2.29	25000	38.90	20.14
220	9.11	2.42	14000	43.70	13.76
240	10.88	2.54	15000	43.40	14.30
260	11.75	2.66	16000	40.90	15.16
280	11.55	2.76	17000	44.40	15.88
300	11.36	2.85	18000	47.10	16.09
320	12.03	3.10	19000	37.60	16.98
340	12.69	3.36	20000	37.30	16.21
360	13.33	3.49	21000	37.00	20.13
380	14.00	3.50	22000	38.00	19.24
400	14.63	3.51	23000	38.70	19.64
450	15.33	3.55	24000	38.60	20.54
500	16.03	3.81	25000	38.90	20.14
550	16.65	4.05			
600	17.29	4.23			
650	17.64	4.63			
700	18.00	4.74			
750	18.39	4.95			
800	18.79	5.06			
850	19.10	5.18			
900	19.42	5.40			
950	19.58	5.91			
1000	19.75	5.58			

9 List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM009	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 07, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz –1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted

Calibration Interval of instruments listed above is one year.

10 Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch		
Receiver VSWR Γ1=0.09		
Antenna VSWR Γ2=0.67		
Uncertainty=20log(1-Γ1*Γ2)	U-shaped	±0.54
combined standard uncertainty Ue(y)	normal	±2.7
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.4

U= $\{(1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2\}=2.2$ for 10m test distance

U= $\{(1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2\}=2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch		
Receiver VSWR Γ1=0.09		
LISN VSWR Γ2=0.33		
Uncertainty=20log(1-Γ1*Γ2)	U-shaped	0.2
combined standard uncertainty Ue(y)	normal	±1.66
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±3.32

U= $\{(0.3/2)^2+(2^2+1.5^2+0.2^2)/3+(0.2)^2/2\}=1.66$