



Plot 7-355. Lower Band Edge Plot (Band 2 - 10.0MHz QPSK)

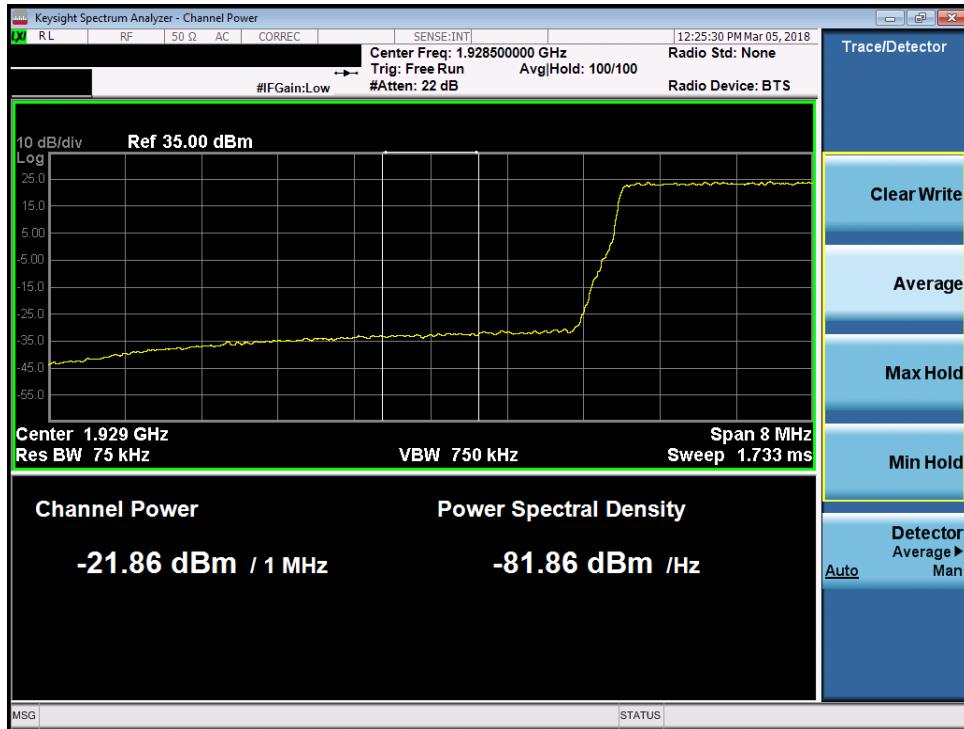


### Plot 7-356. Lower Extended Band Edge Plot (Band 2 - 10.0MHz QPSK)

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 201 of 264

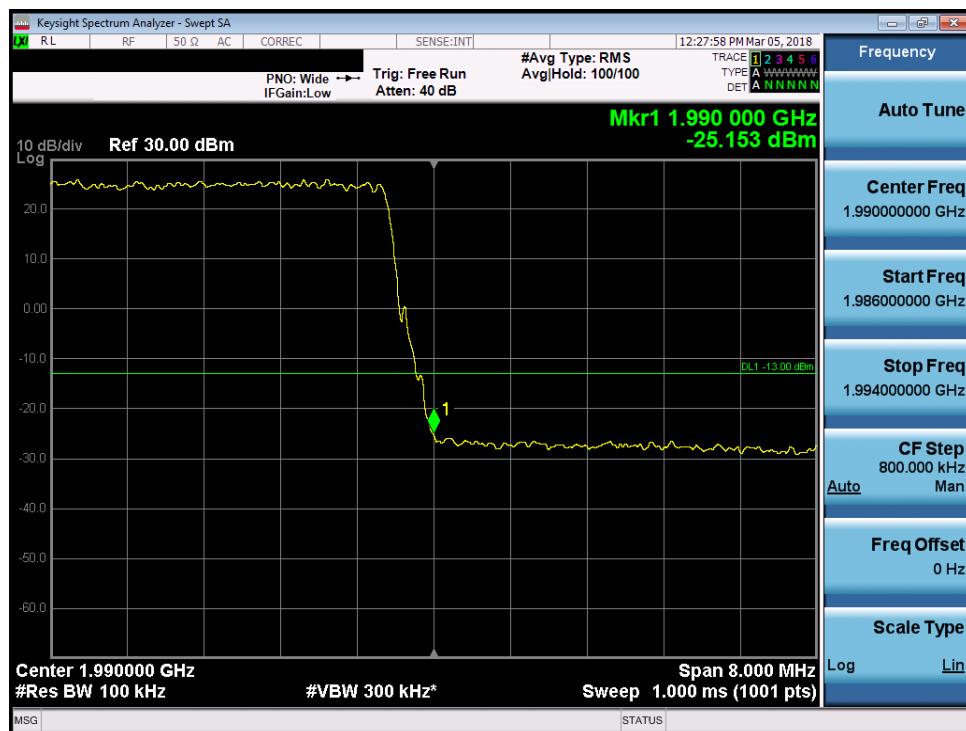


Plot 7-357. Upper Band Edge Plot (Band 2 - 10.0MHz QPSK)

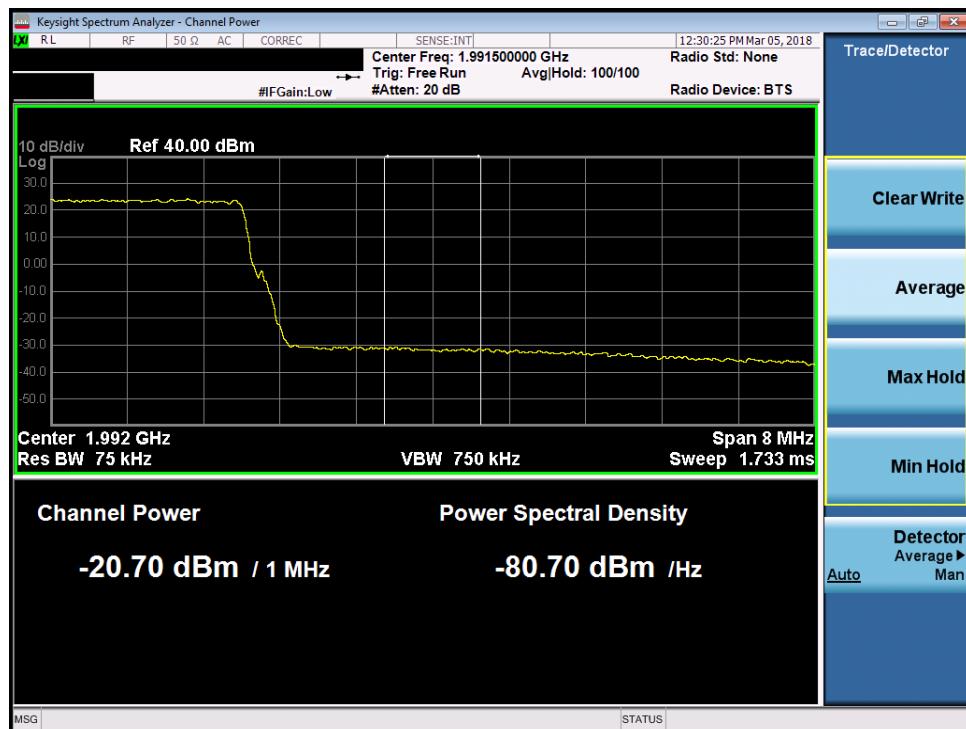


Plot 7-358. Upper Extended Band Edge Plot (Band 2 - 10.0MHz QPSK)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 202 of 264

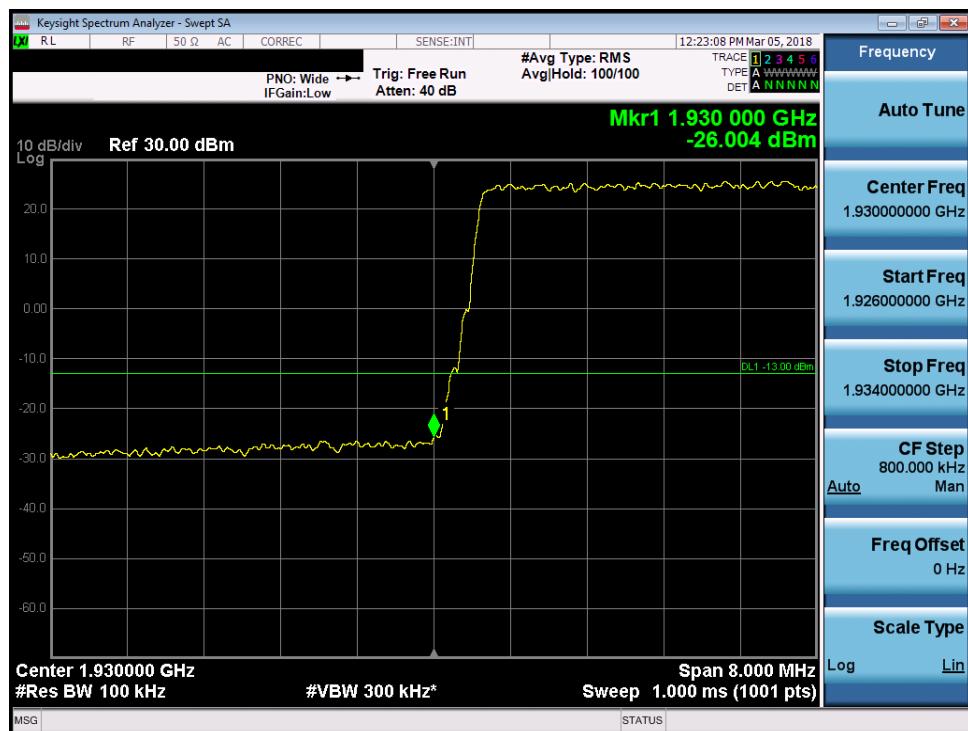


### Plot 7-359. Lower Band Edge Plot (Band 2 - 10.0MHz 16-QAM)

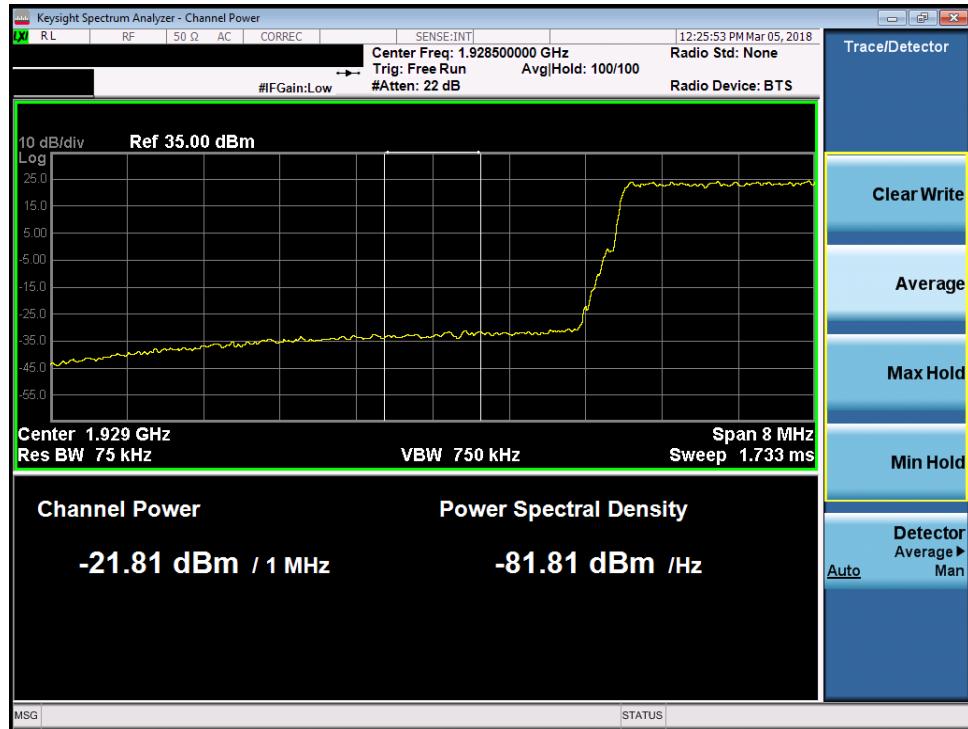


Plot 7-360. Lower Extended Band Edge Plot (Band 2 - 10.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 203 of 264

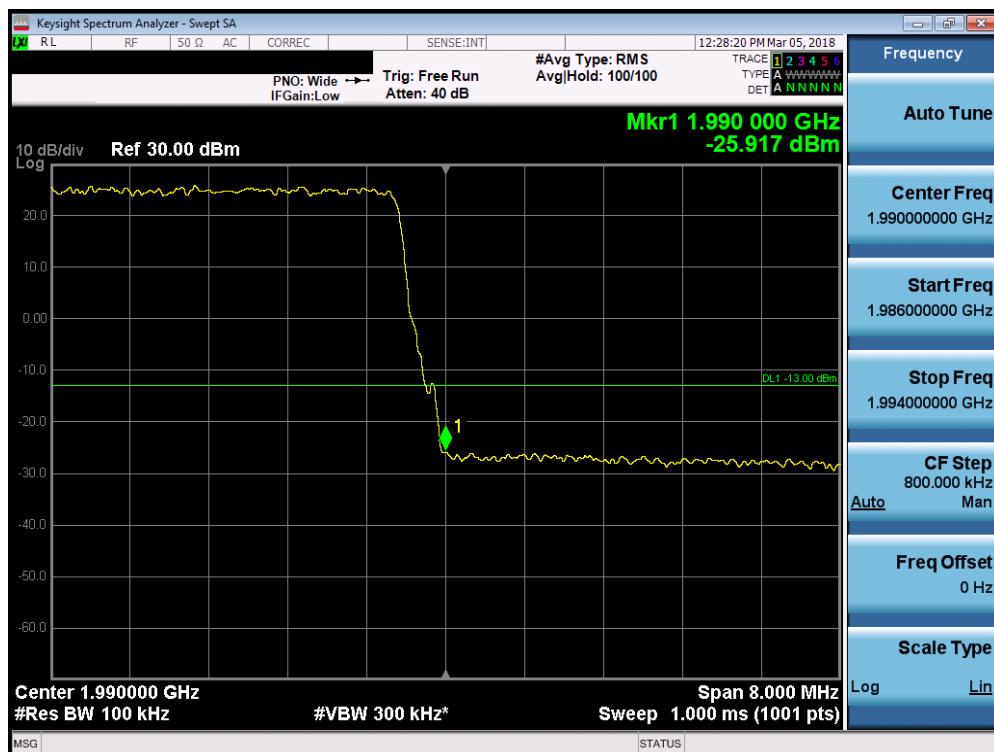


Plot 7-361. Upper Band Edge Plot (Band 2 - 10.0MHz 16-QAM)

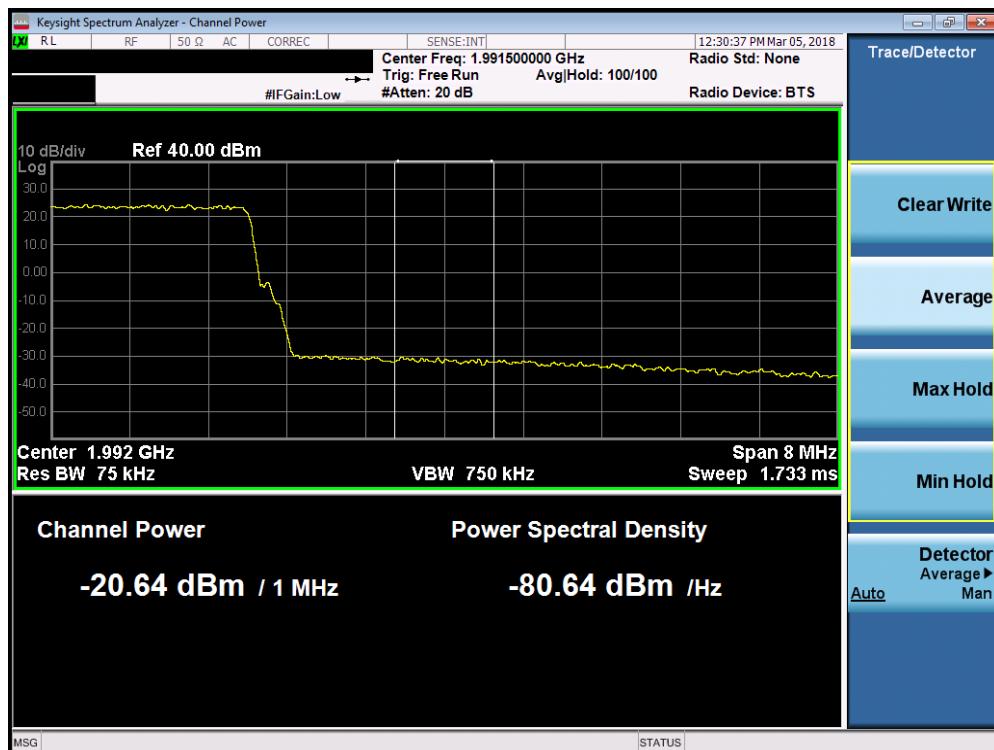


Plot 7-362. Upper Extended Band Edge Plot (Band 2 - 10.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 204 of 264

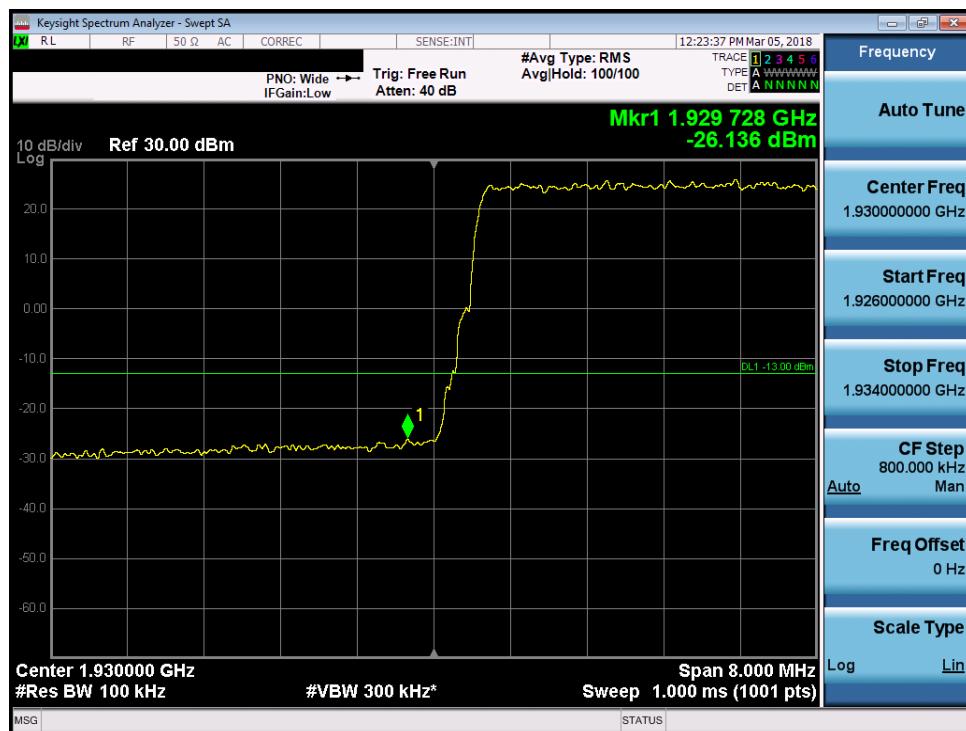


Plot 7-363. Lower Band Edge Plot (Band 2 - 10.0MHz 64-QAM)

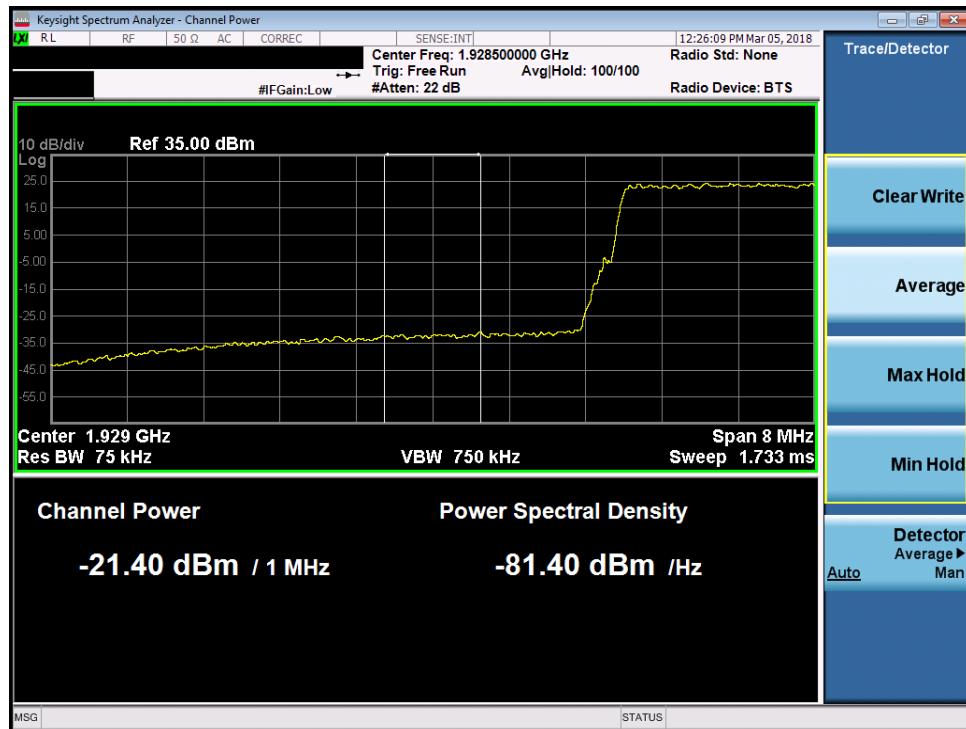


Plot 7-364. Lower Extended Band Edge Plot (Band 2 - 10.0MHz 64-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 205 of 264

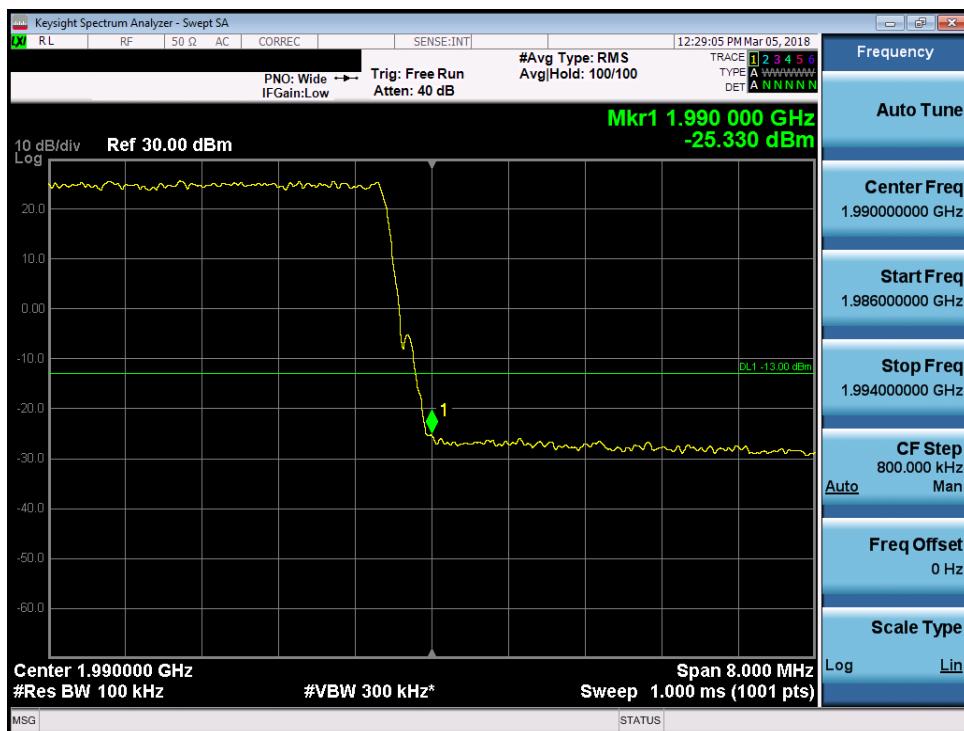


Plot 7-365. Upper Band Edge Plot (Band 2 - 10.0MHz 64-QAM)

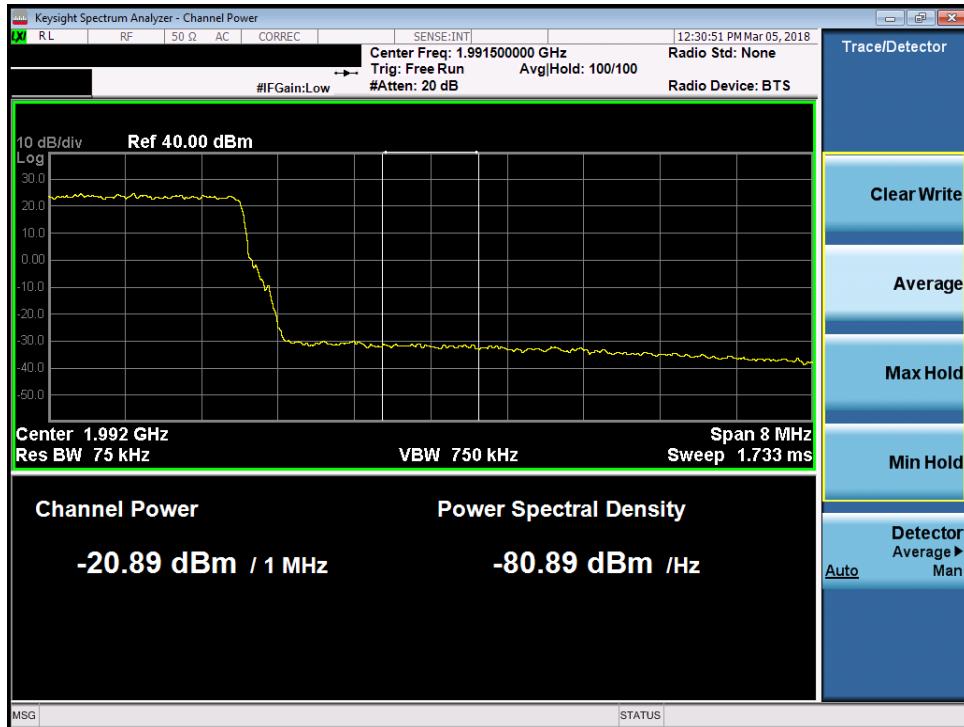


**Plot 7-366. Upper Extended Band Edge Plot (Band 2 - 10.0MHz 64-QAM)**

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 206 of 264

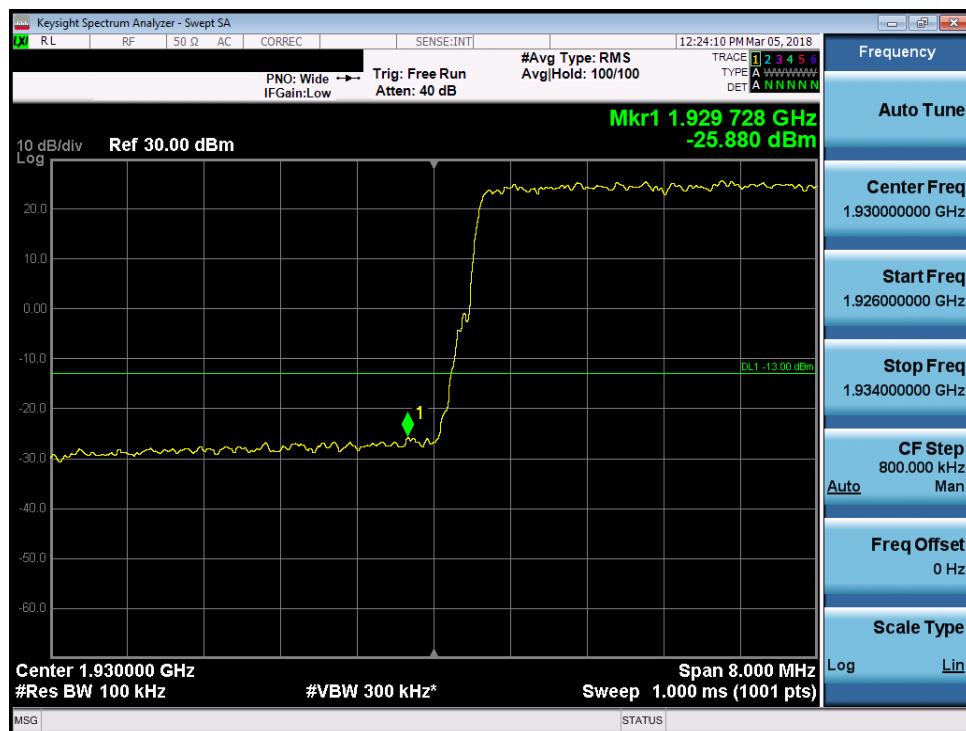


Plot 7-367. Lower Band Edge Plot (Band 2 - 10.0MHz 256-QAM)

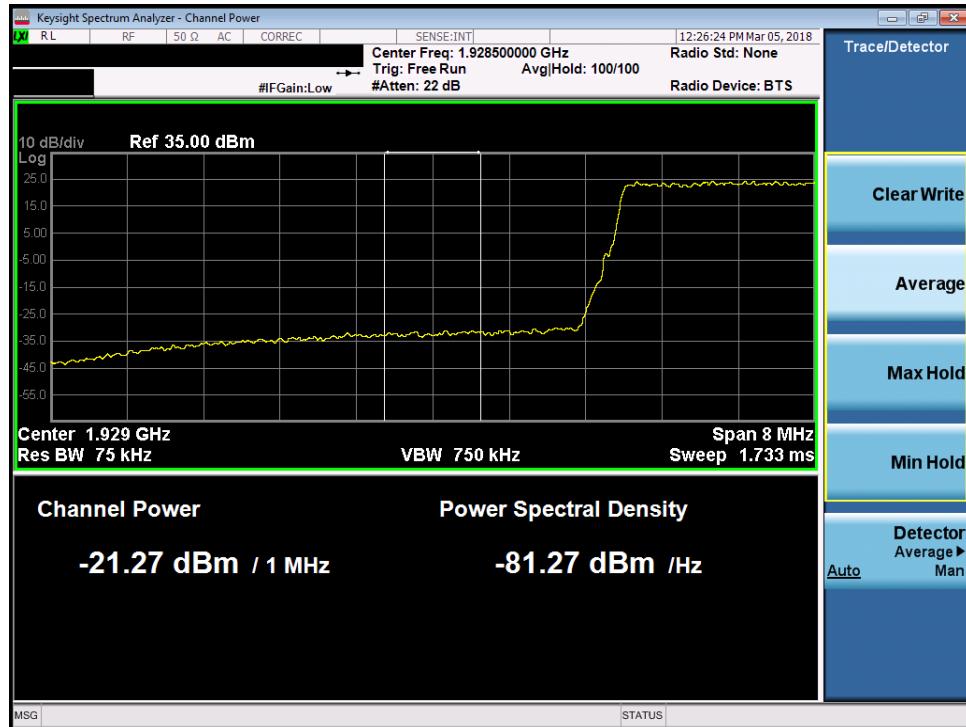


Plot 7-368. Lower Extended Band Edge Plot (Band 2 - 10.0MHz 256-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 207 of 264

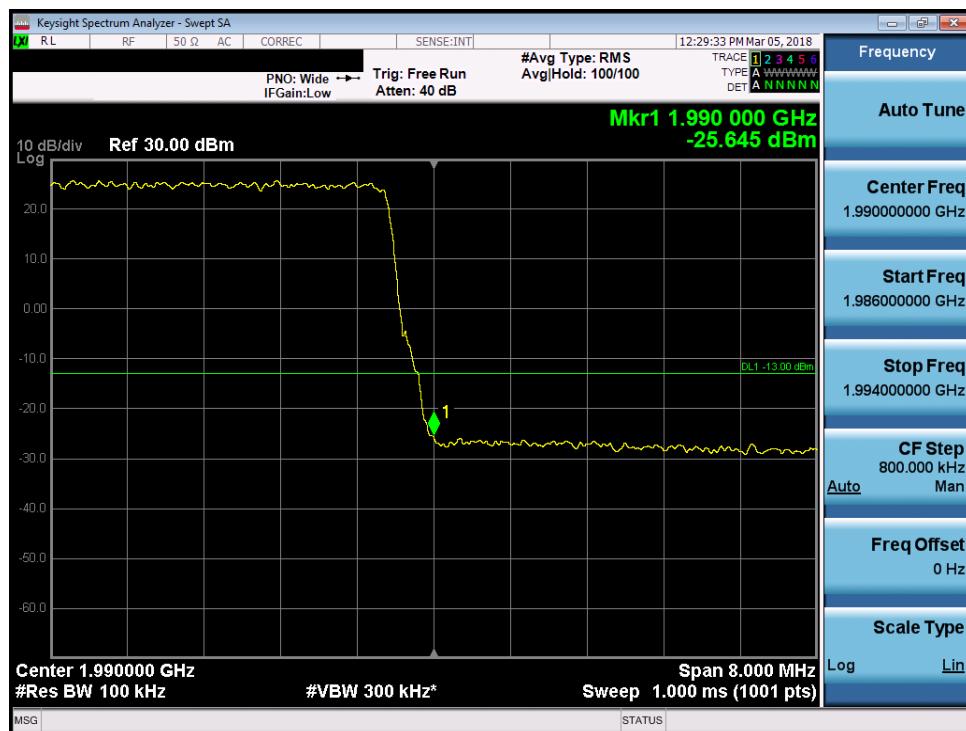


Plot 7-369. Upper Band Edge Plot (Band 2 - 10.0MHz 256-QAM)

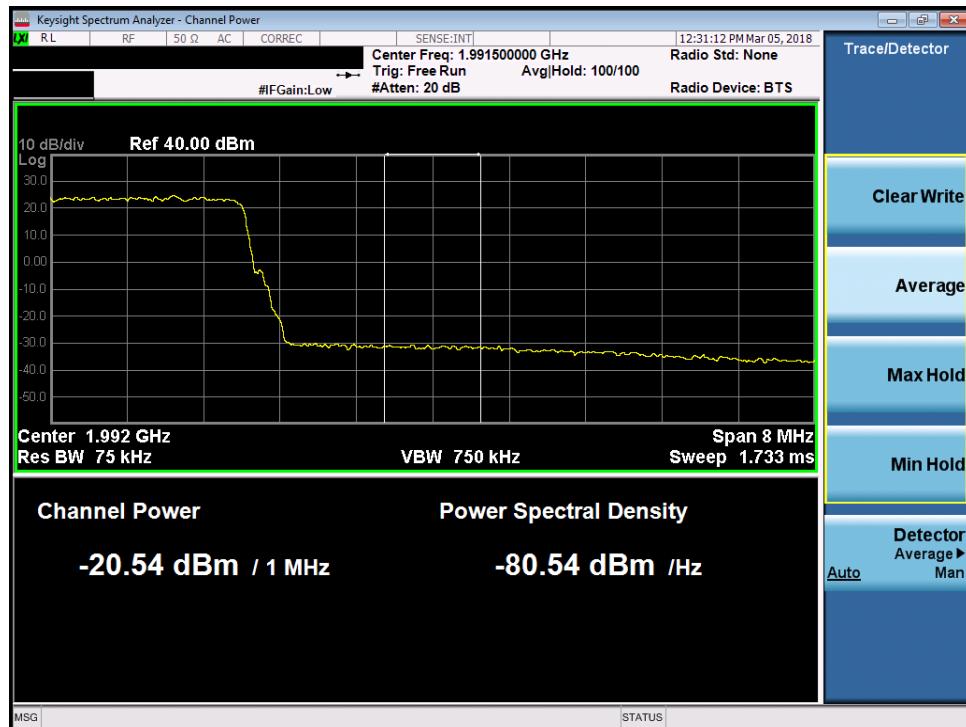


Plot 7-370. Upper Extended Band Edge Plot (Band 2 - 10.0MHz 256-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 208 of 264

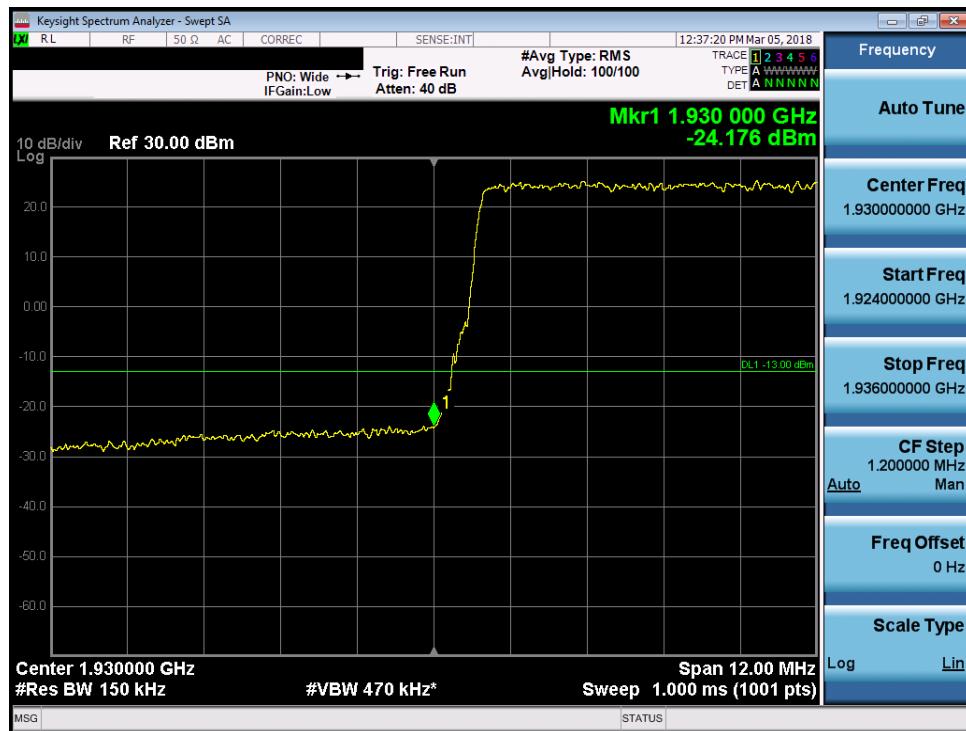


Plot 7-371. Lower Band Edge Plot (Band 2 - 15.0MHz QPSK)

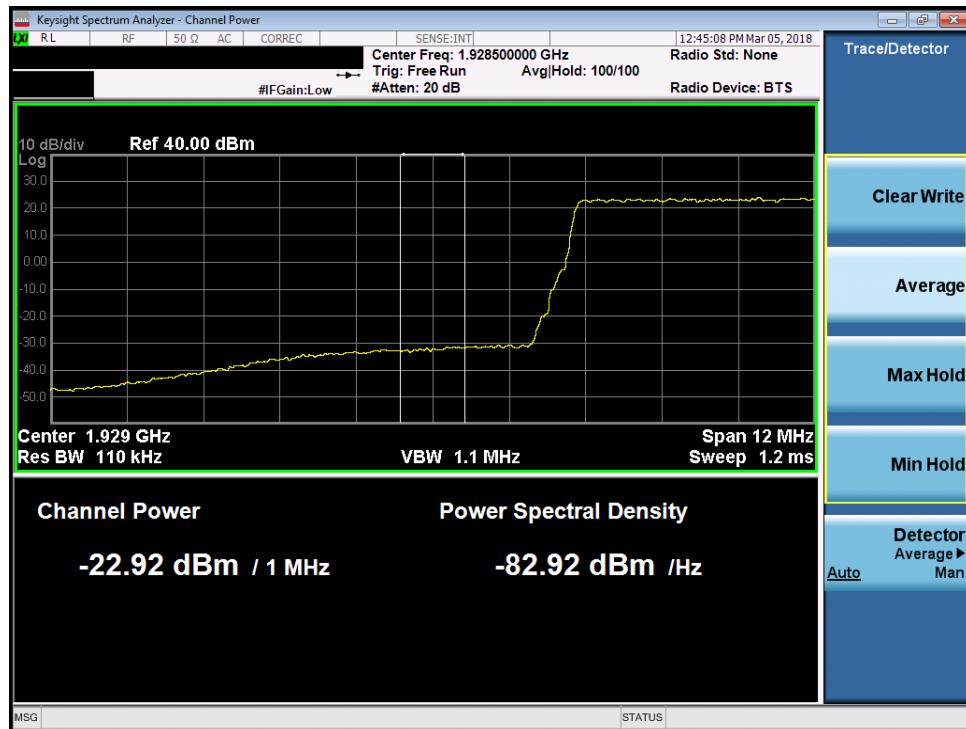


Plot 7-372. Lower Extended Band Edge Plot (Band 2 - 15.0MHz QPSK)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 209 of 264

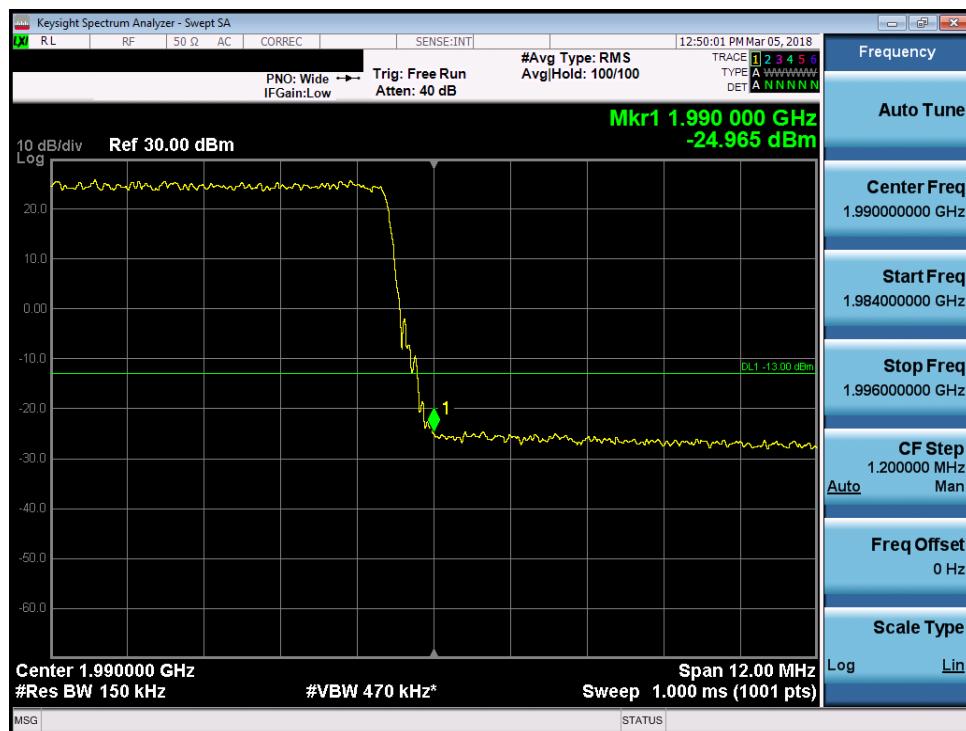


Plot 7-373. Upper Band Edge Plot (Band 2 - 15.0MHz QPSK)

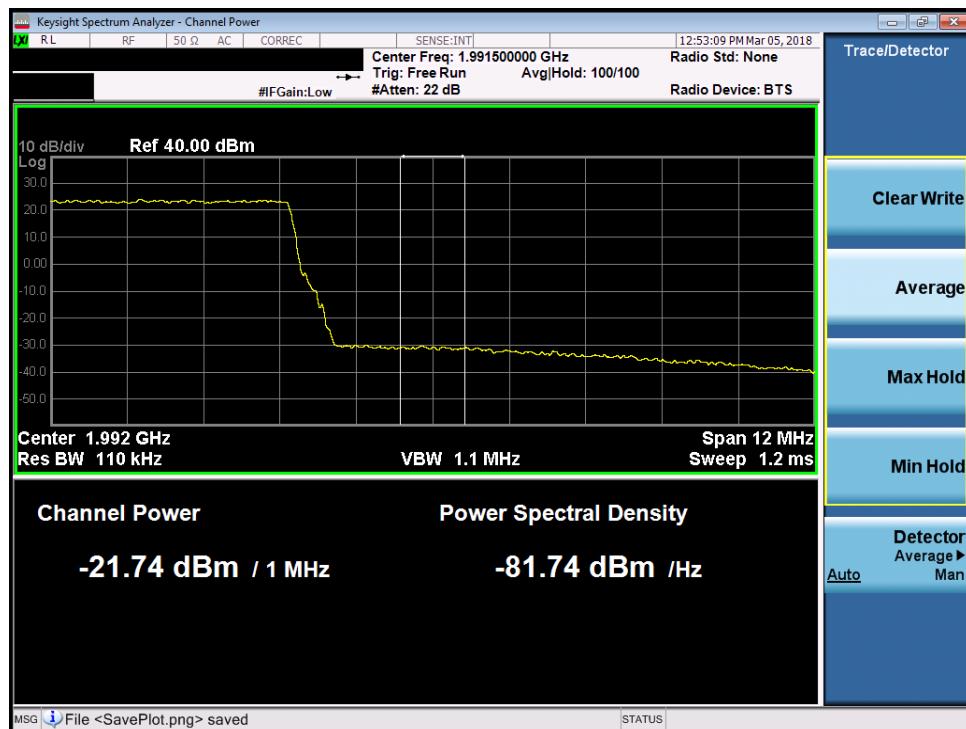


Plot 7-374. Upper Extended Band Edge Plot (Band 2 - 15.0MHz QPSK)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 210 of 264

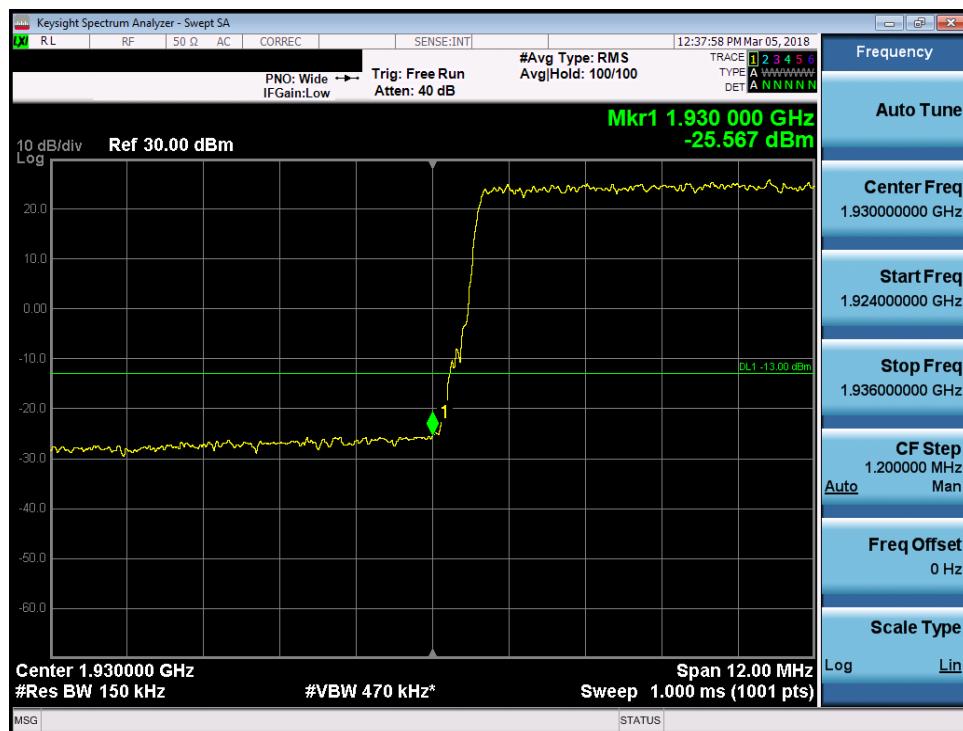

Plot 7-375. Lower Band Edge Plot (Band 2 - 15.0MHz 16-QAM)

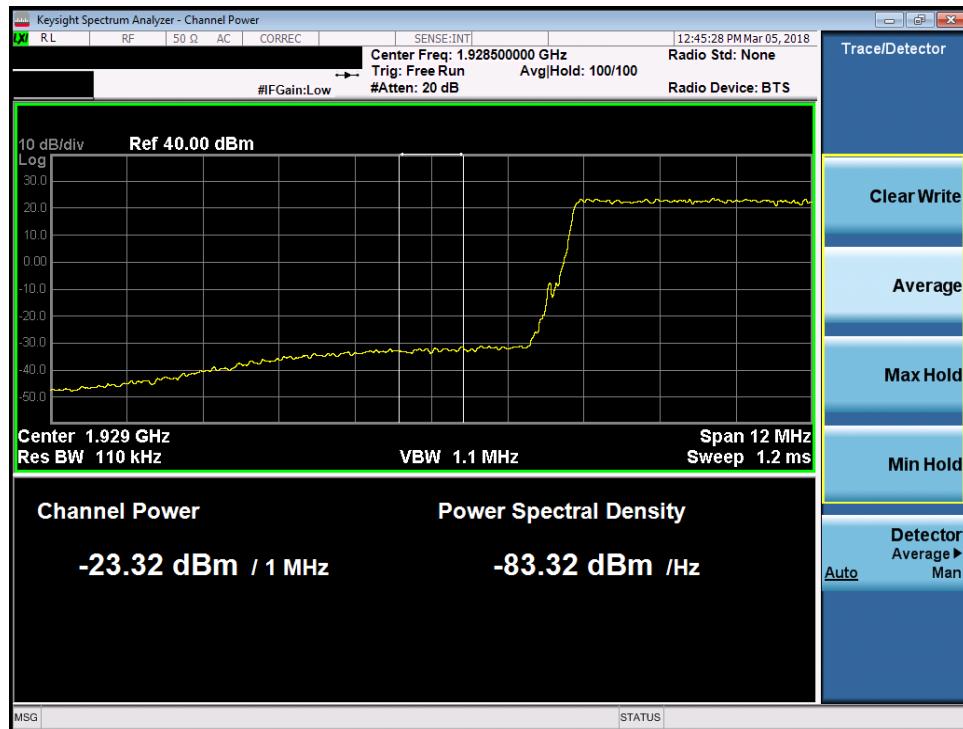


Plot 7-376. Lower Extended Band Edge Plot (Band 2 - 15.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 211 of 264




Plot 7-377. Upper Band Edge Plot (Band 2 - 15.0MHz 16-QAM)

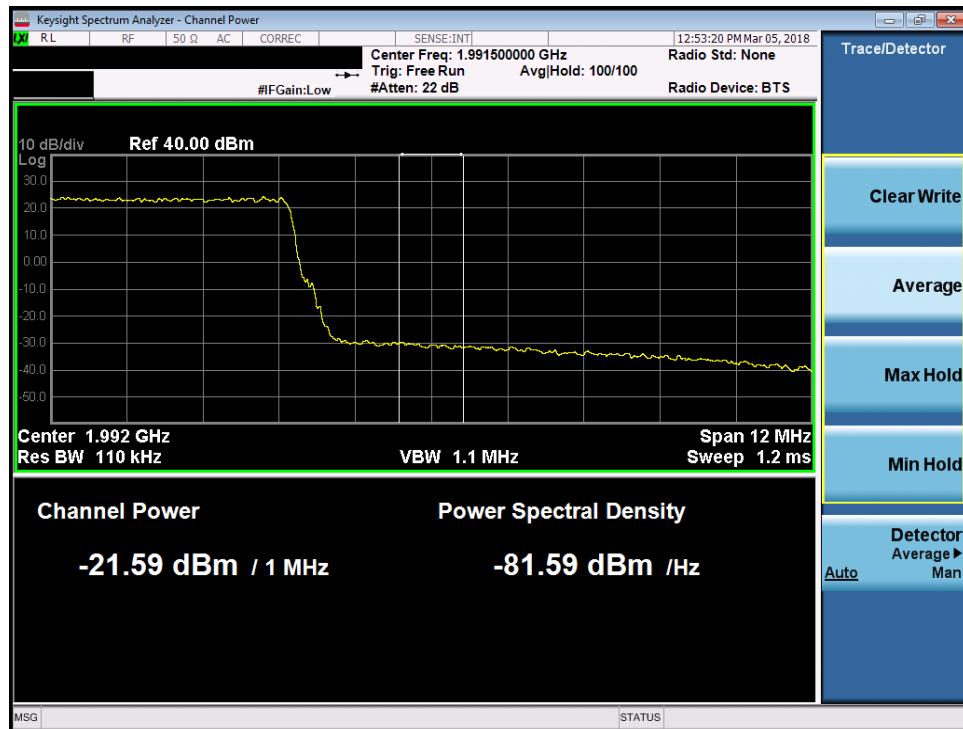


Plot 7-378. Upper Extended Band Edge Plot (Band 2 - 15.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 212 of 264

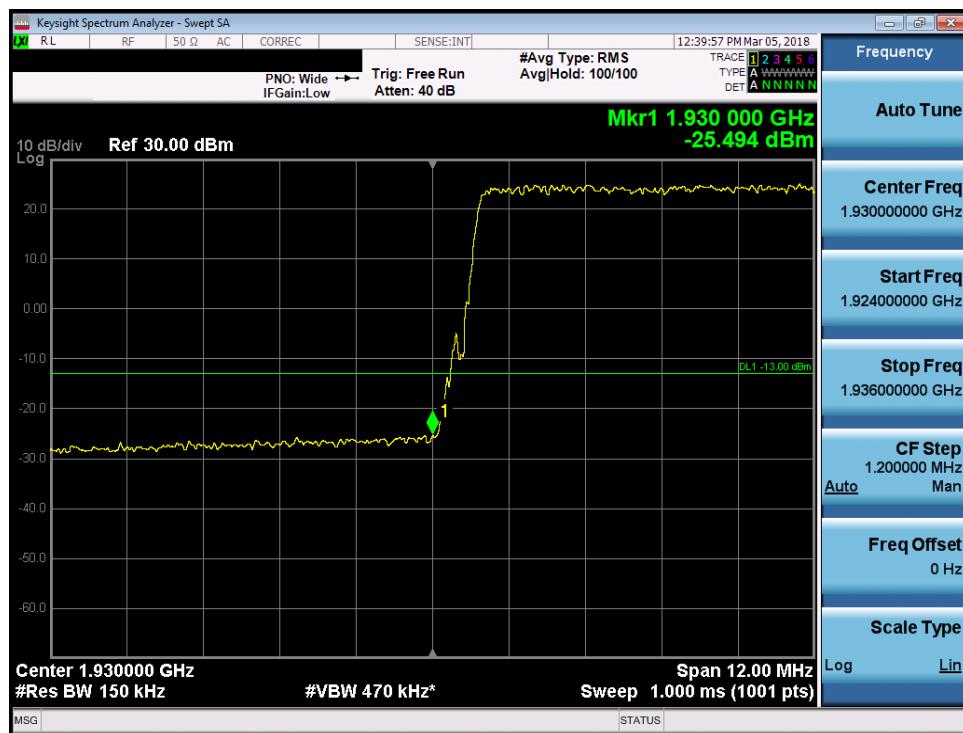


Plot 7-379. Lower Band Edge Plot (Band 2 - 15.0MHz 64-QAM)

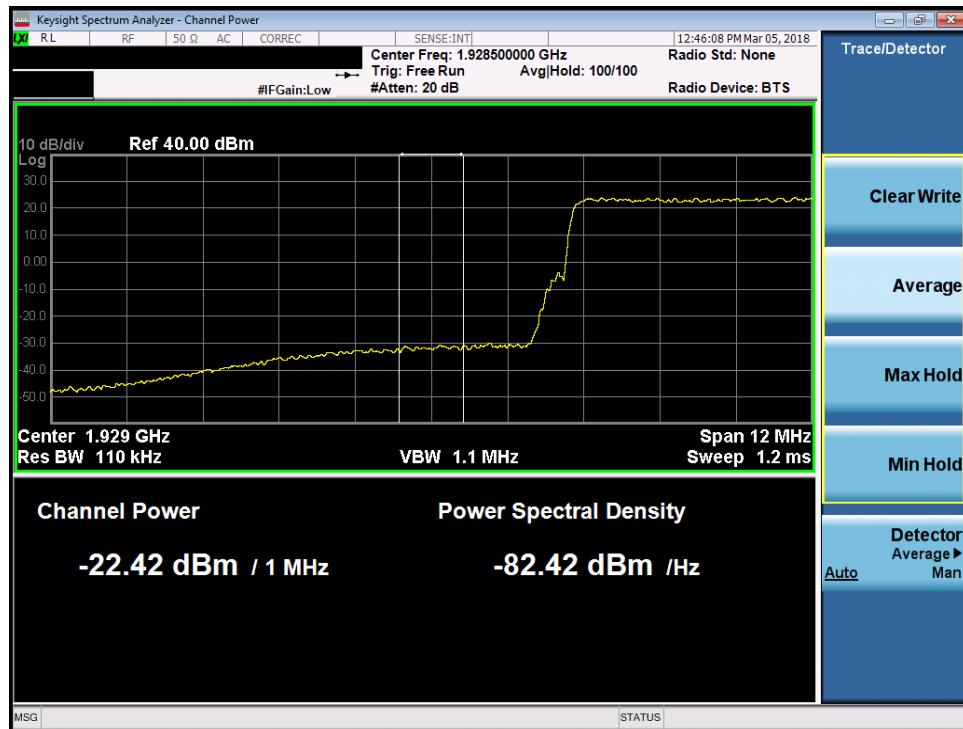


Plot 7-380. Lower Extended Band Edge Plot (Band 2 - 15.0MHz 64-QAM)

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 213 of 264

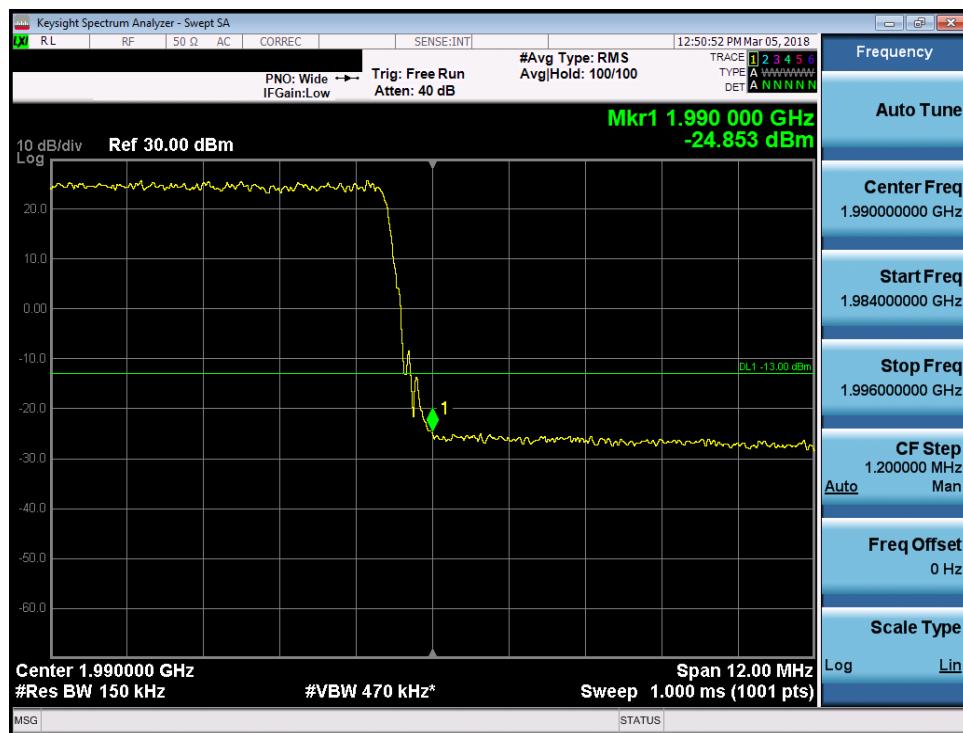


Plot 7-381. Upper Band Edge Plot (Band 2 - 15.0MHz 64-QAM)

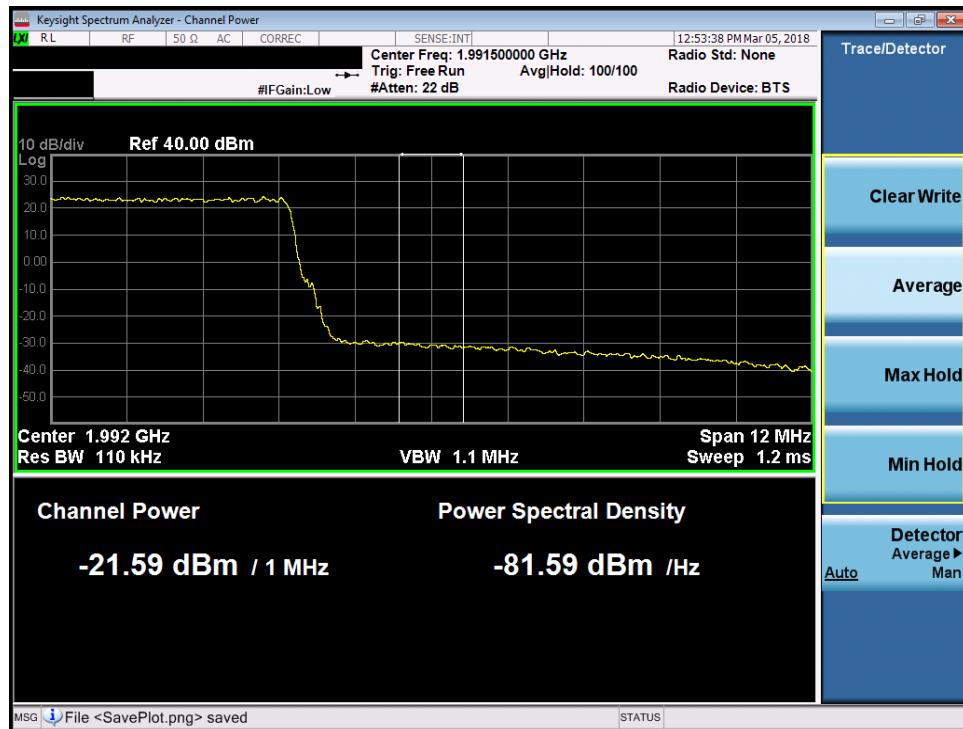


Plot 7-382. Upper Extended Band Edge Plot (Band 2 - 15.0MHz 64-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 214 of 264

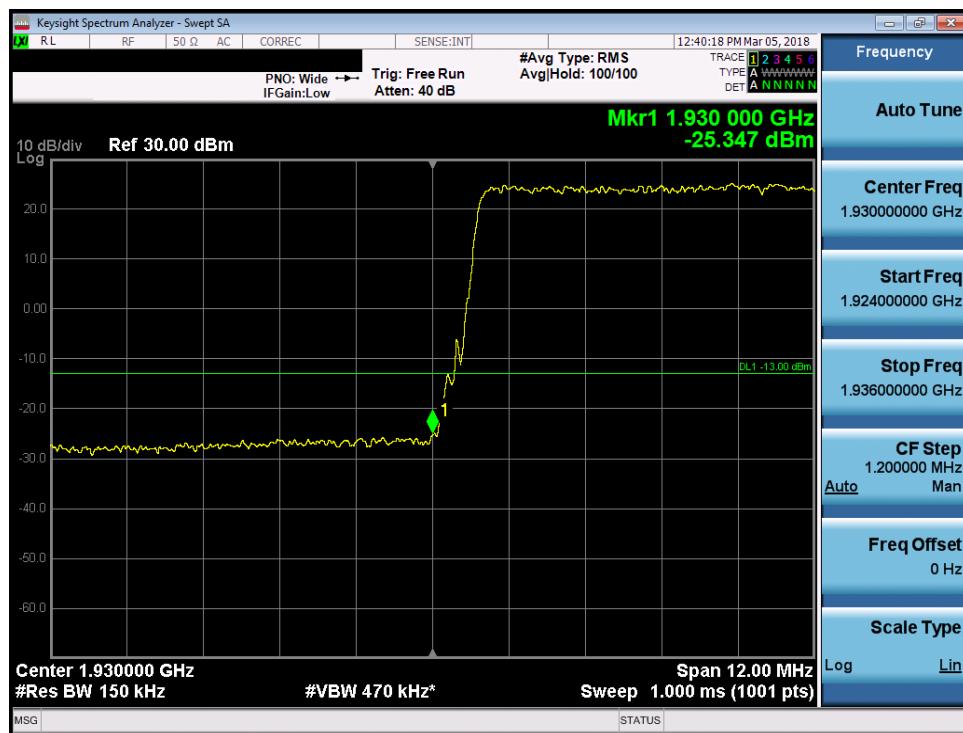


Plot 7-383. Lower Band Edge Plot (Band 2 - 15.0MHz 256-QAM)

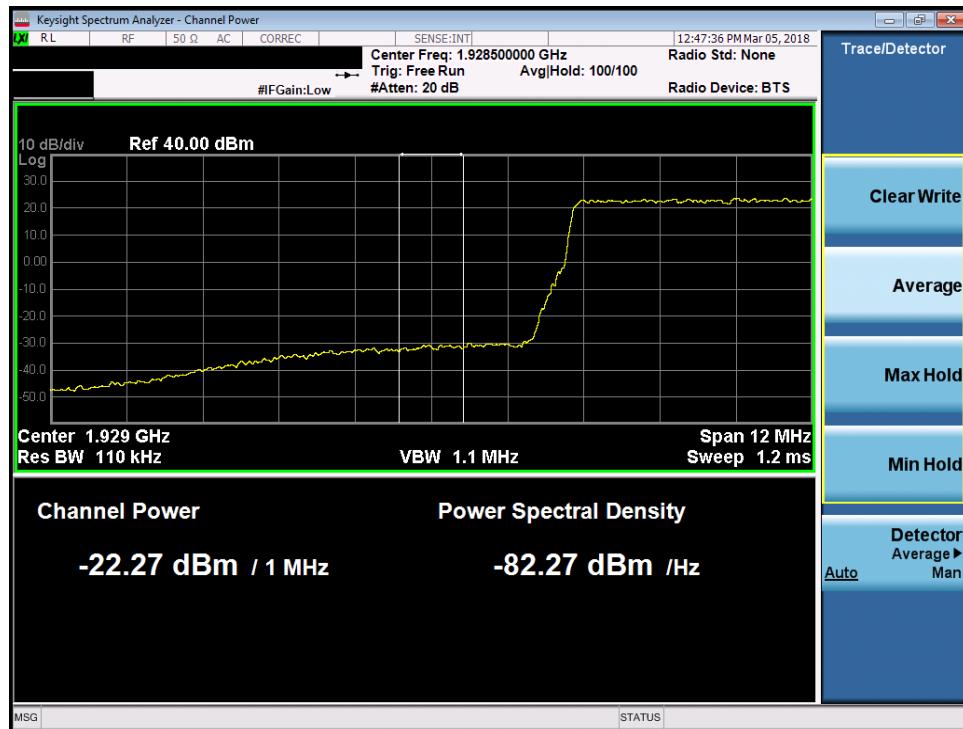


Plot 7-384. Lower Extended Band Edge Plot (Band 2 - 15.0MHz 256-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 215 of 264

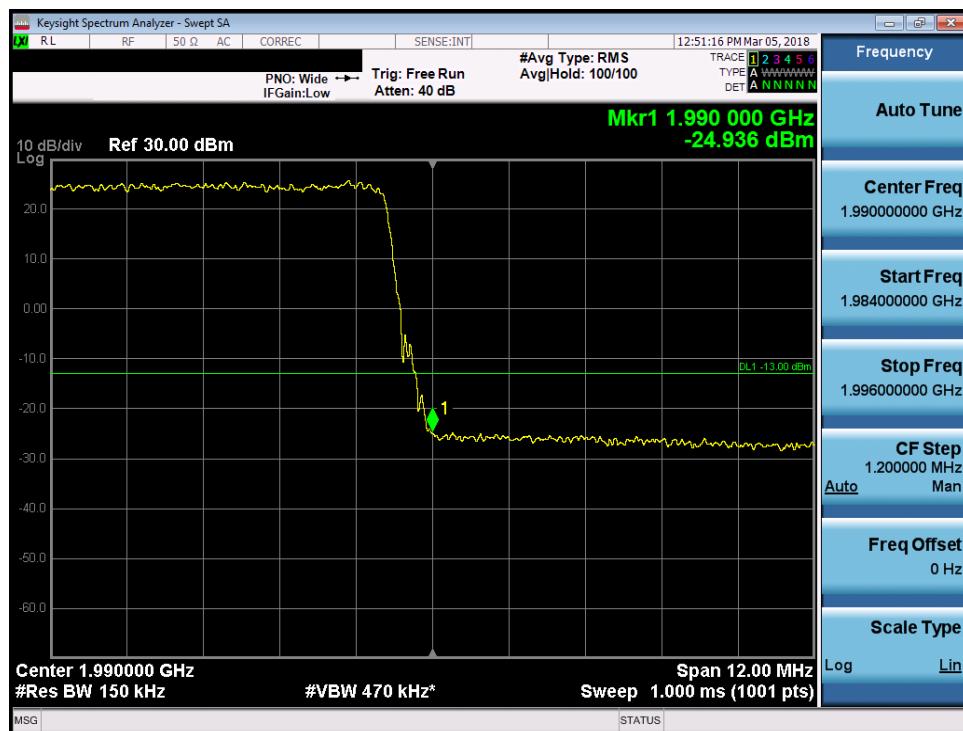


Plot 7-385. Upper Band Edge Plot (Band 2 - 15.0MHz 256-QAM)

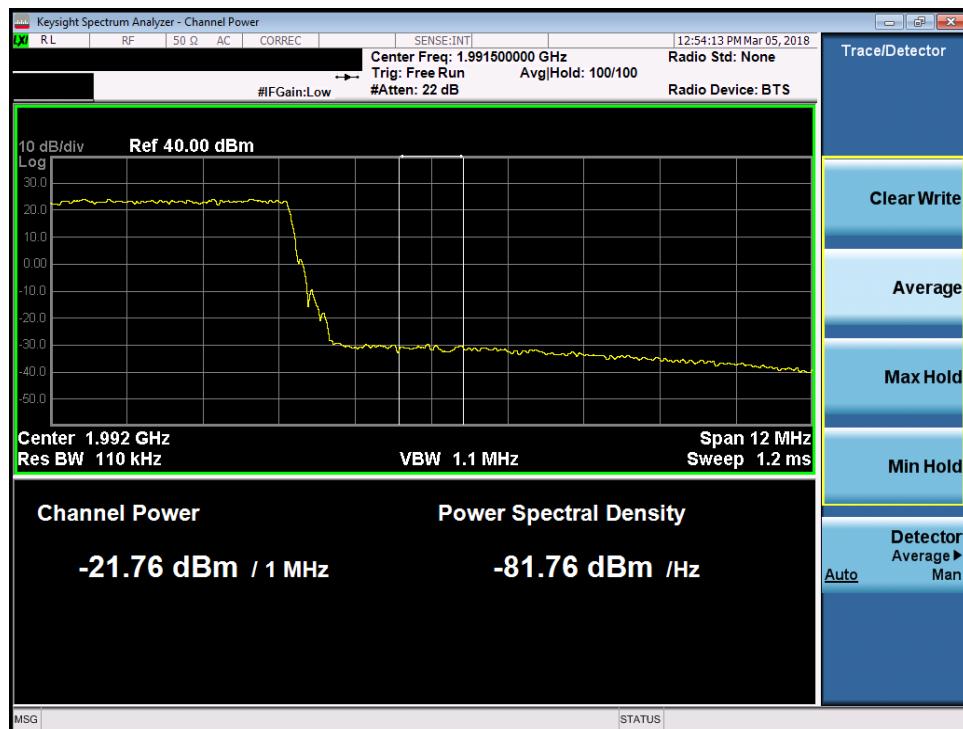


Plot 7-386. Upper Extended Band Edge Plot (Band 2 - 15.0MHz 256-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 216 of 264

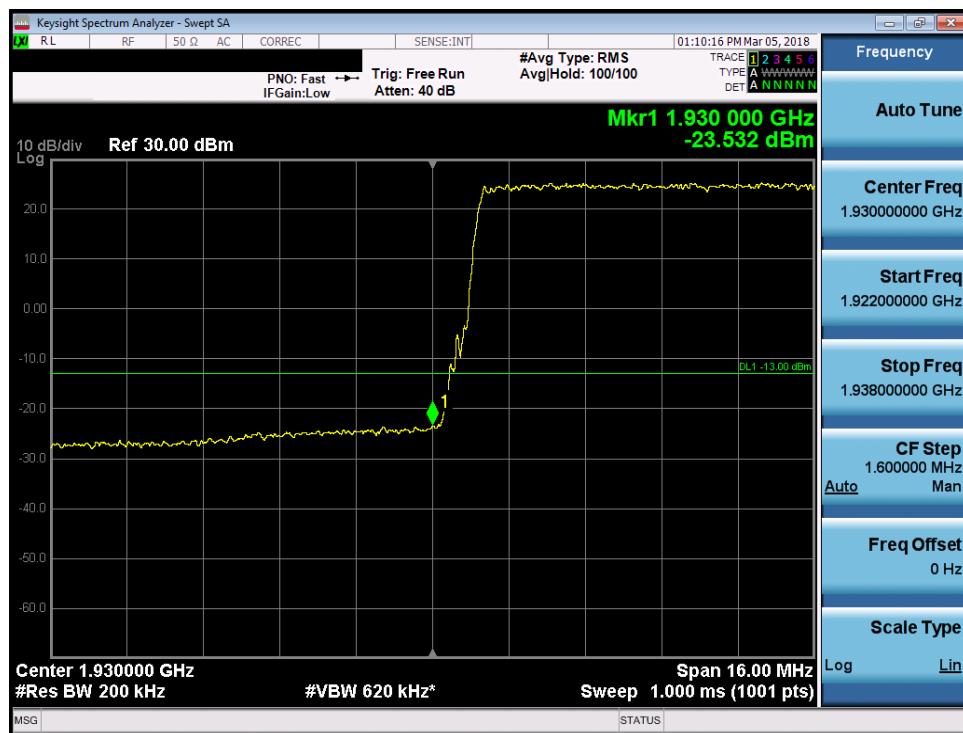


Plot 7-387. Lower Band Edge Plot (Band 2 - 20.0MHz QPSK)

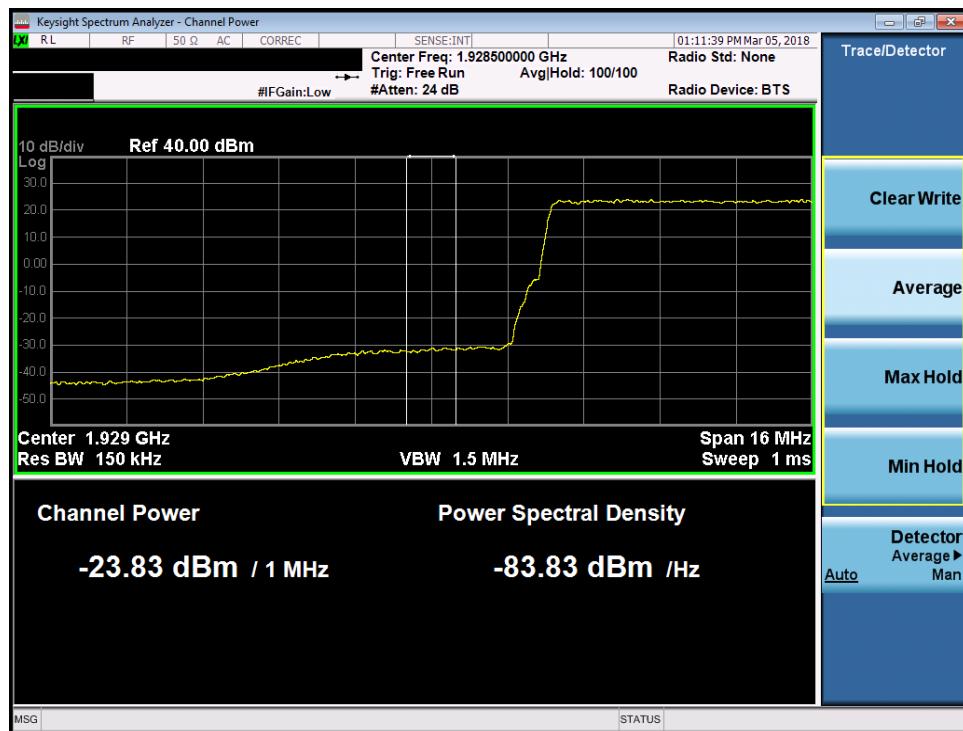


Plot 7-388. Lower Extended Band Edge Plot (Band 2 - 20.0MHz QPSK)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 217 of 264

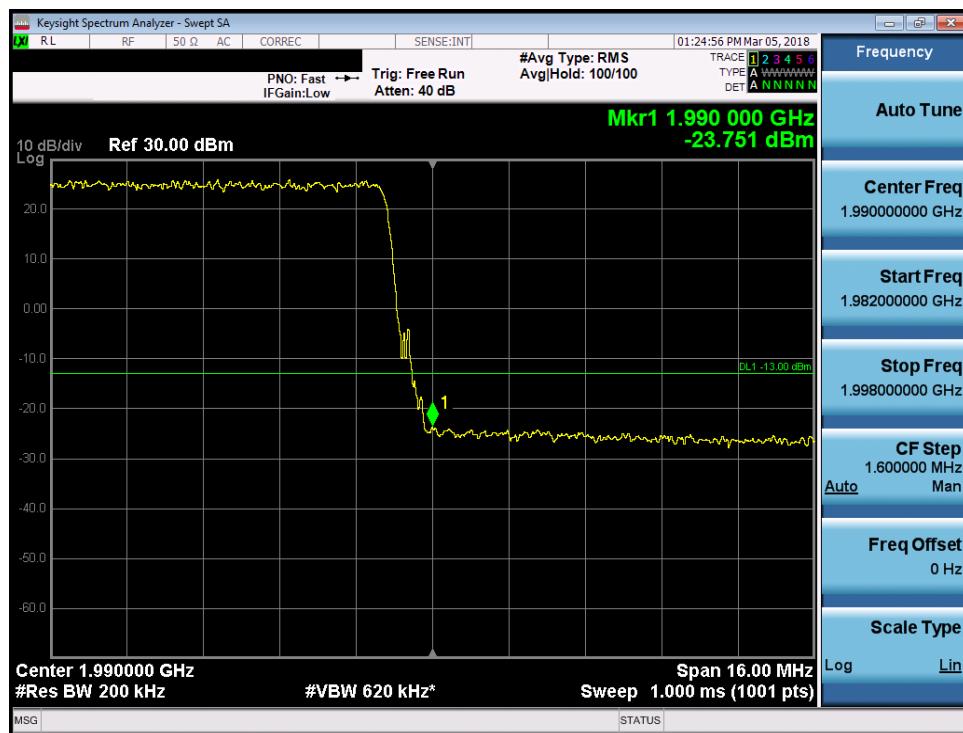


Plot 7-389. Upper Band Edge Plot (Band 2 - 20.0MHz QPSK)

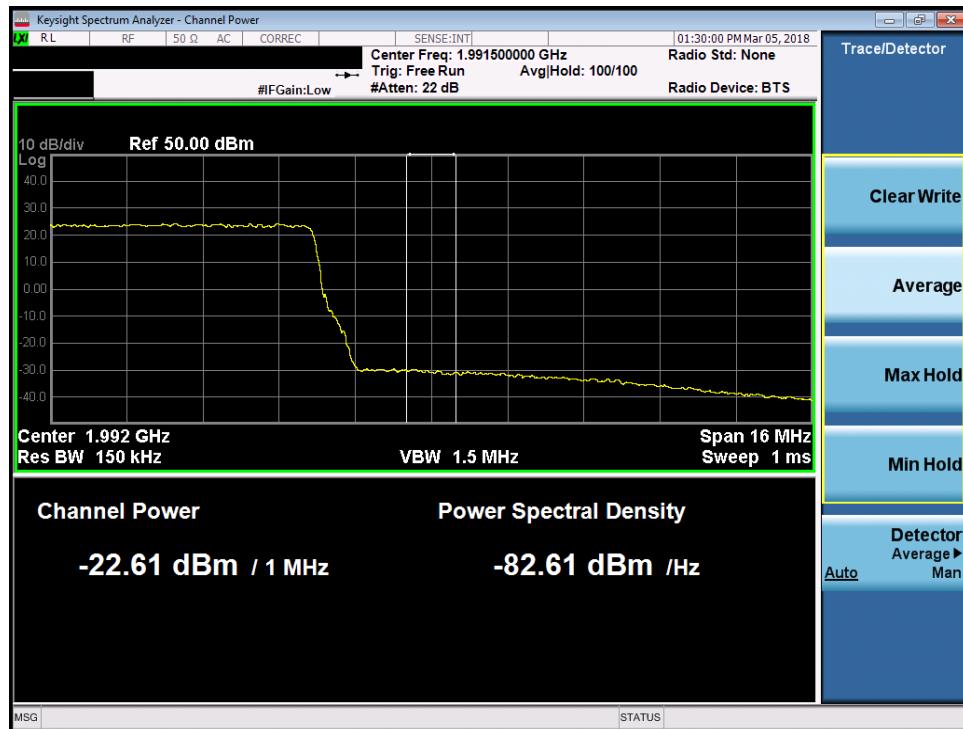


Plot 7-390. Upper Extended Band Edge Plot (Band 2 - 20.0MHz QPSK)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 218 of 264

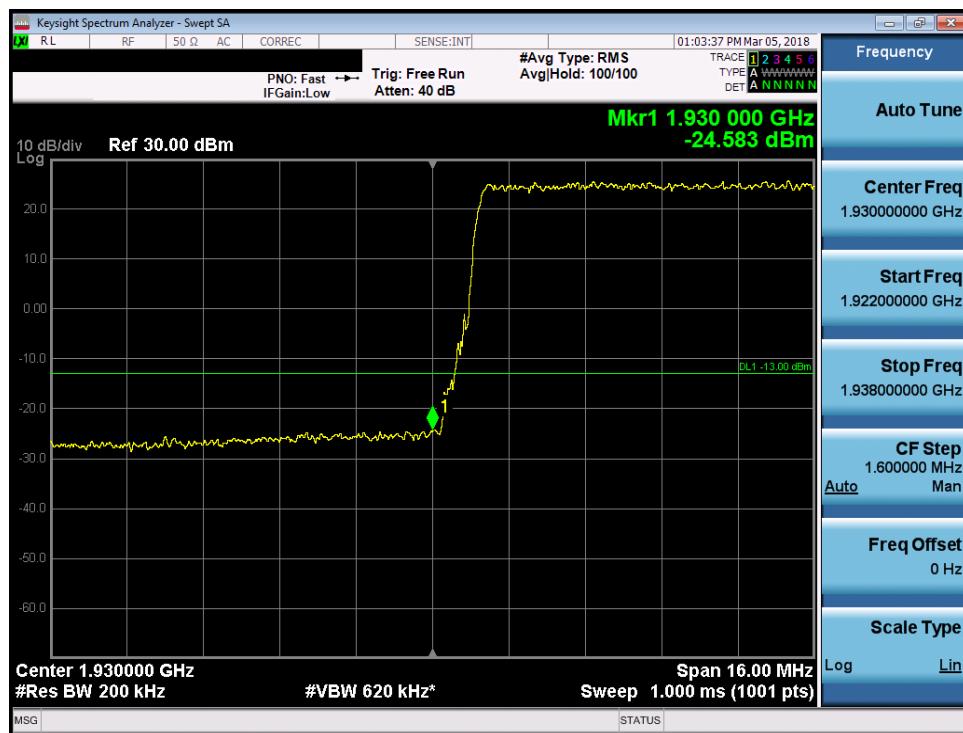


Plot 7-391. Lower Band Edge Plot (Band 2 - 20.0MHz 16-QAM)

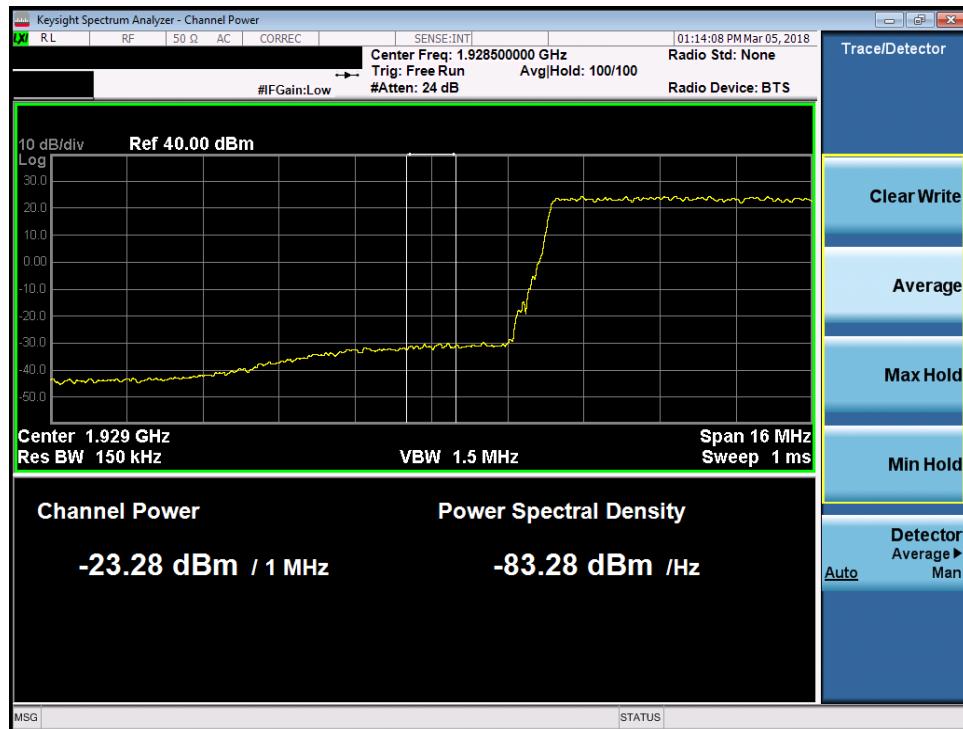


Plot 7-392. Lower Extended Band Edge Plot (Band 2 - 20.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 219 of 264

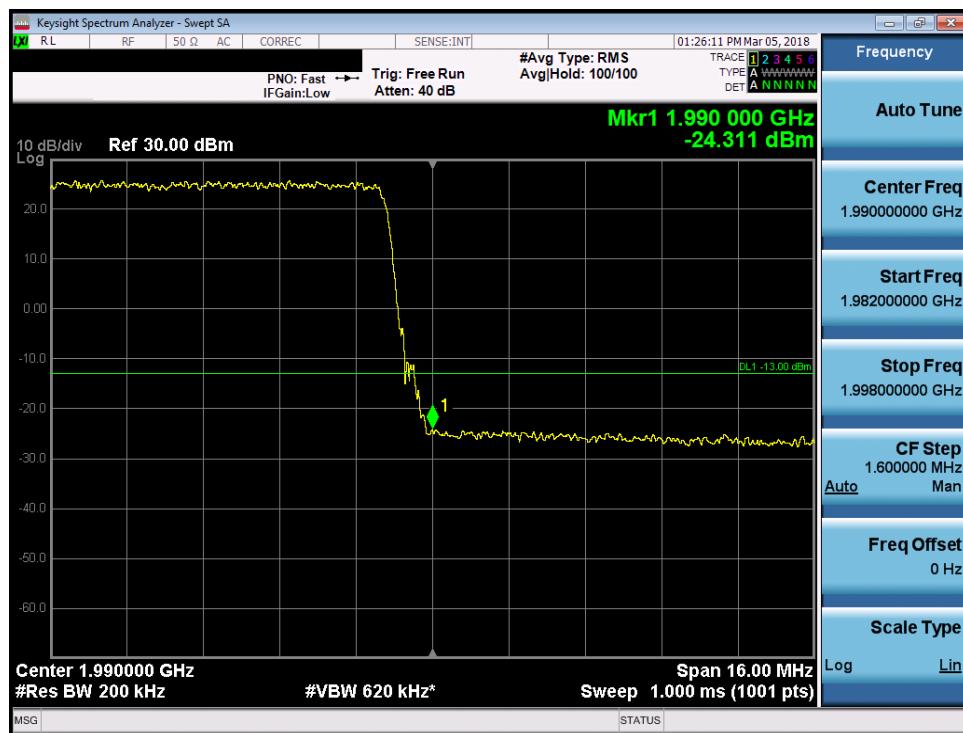


Plot 7-393. Upper Band Edge Plot (Band 2 - 20.0MHz 16-QAM)

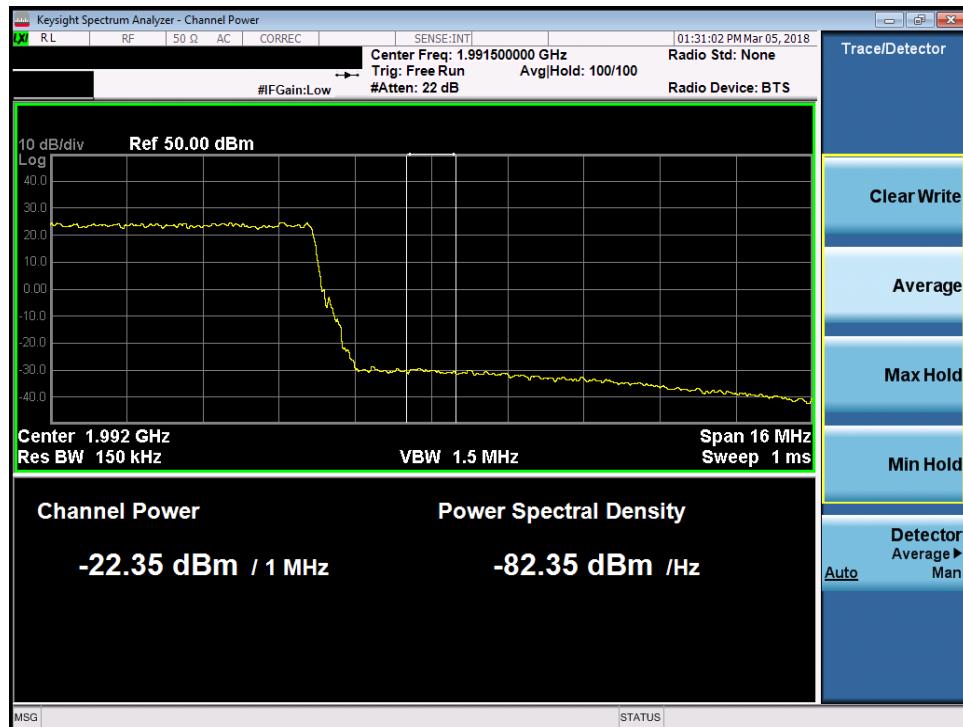


Plot 7-394. Upper Extended Band Edge Plot (Band 2 - 20.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 220 of 264

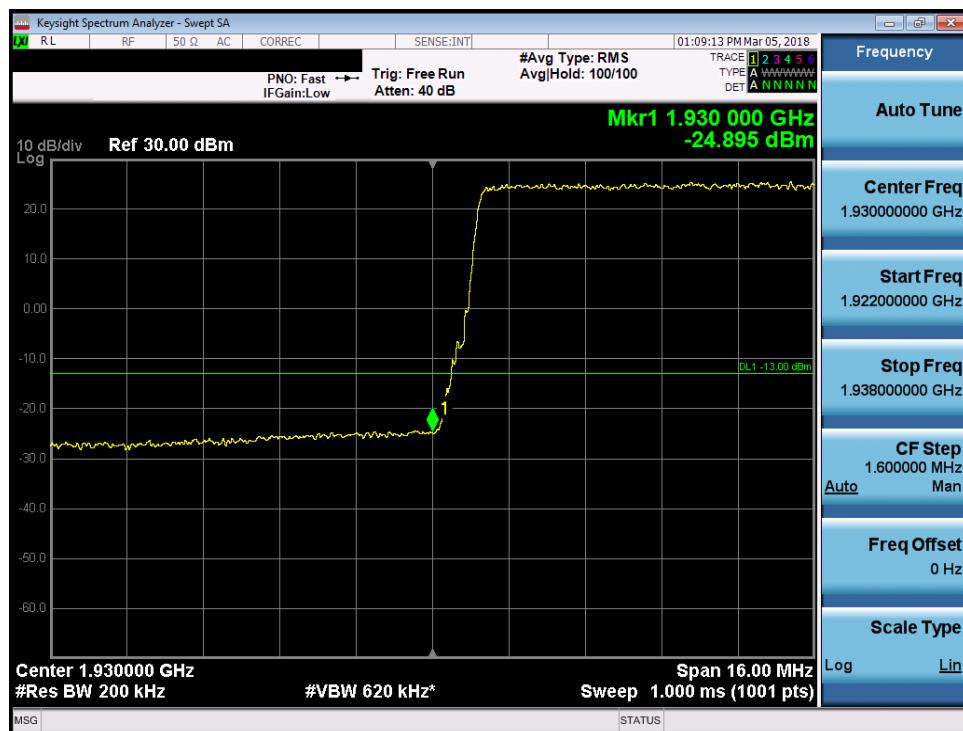


Plot 7-395. Lower Band Edge Plot (Band 2 - 20.0MHz 64-QAM)

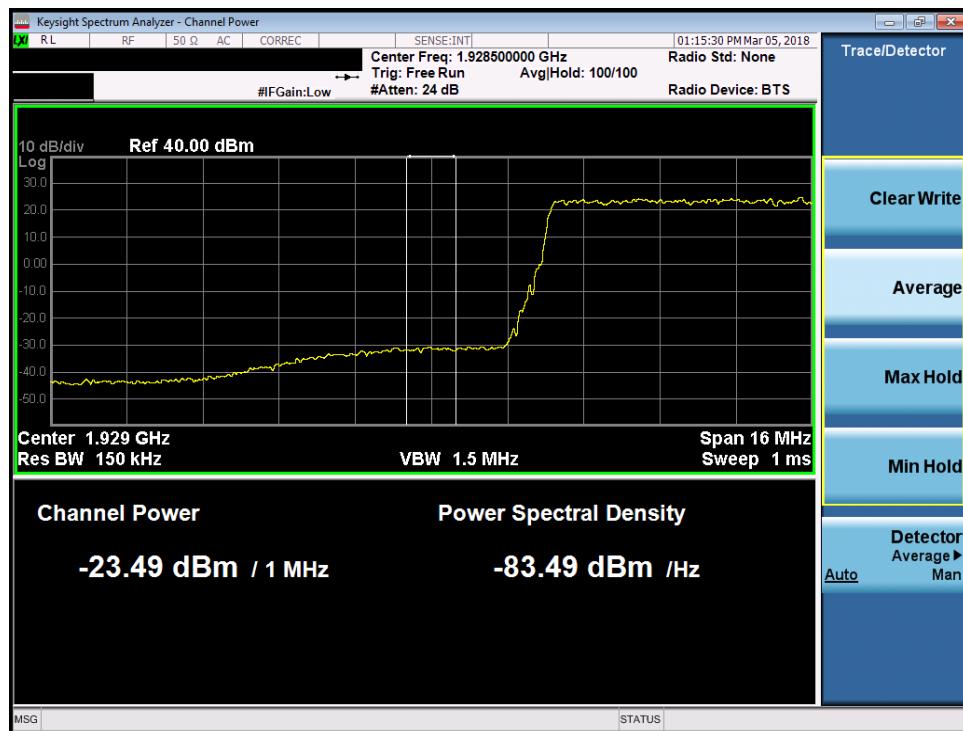


Plot 7-396. Lower Extended Band Edge Plot (Band 2 - 20.0MHz 64-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 221 of 264

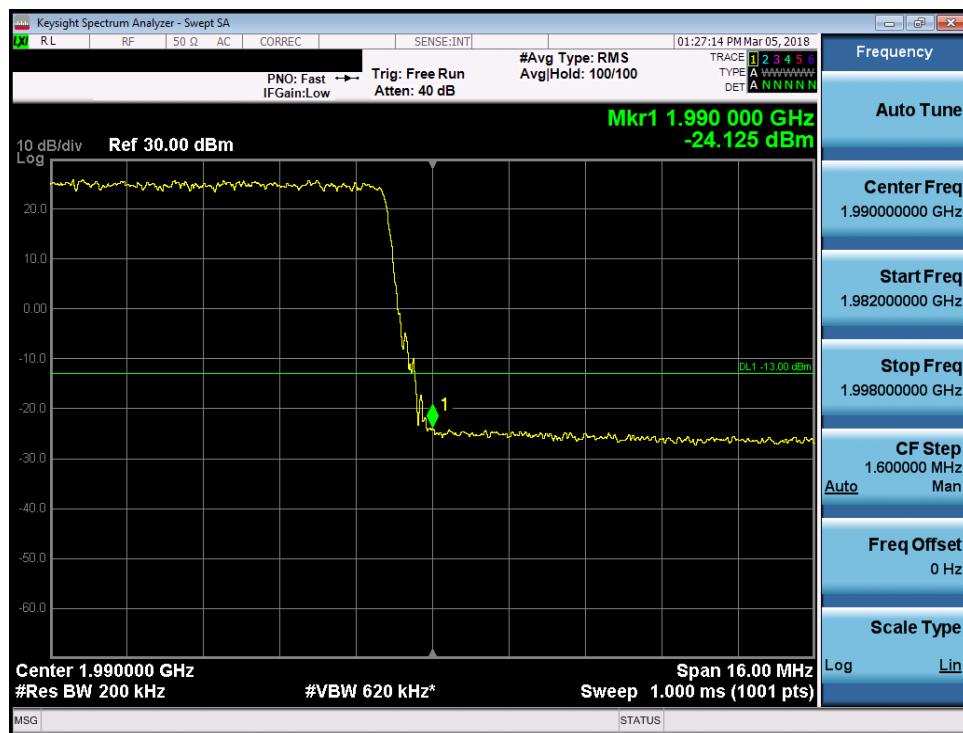


Plot 7-397. Upper Band Edge Plot (Band 2 - 20.0MHz 64-QAM)

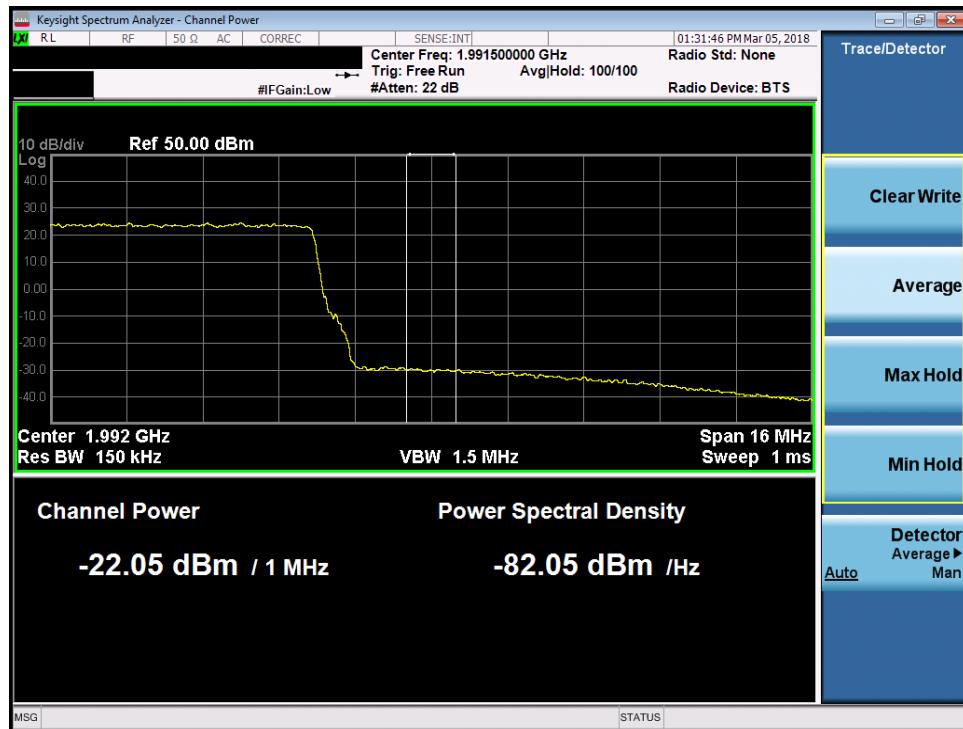


Plot 7-398. Upper Extended Band Edge Plot (Band 2 - 20.0MHz 64-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 222 of 264

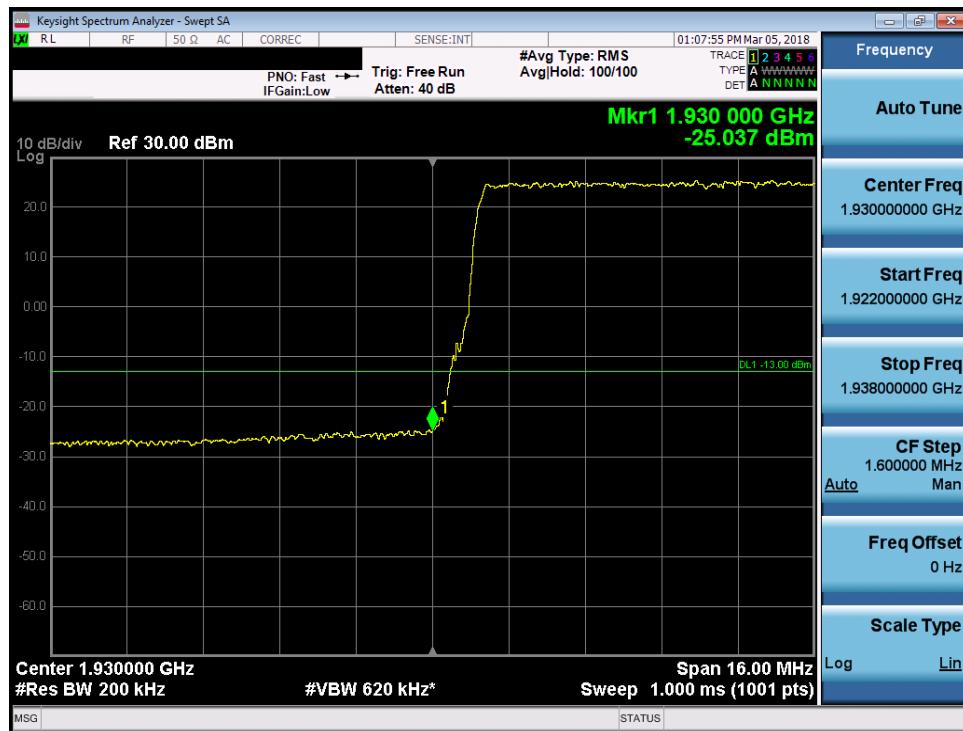

Plot 7-399. Lower Band Edge Plot (Band 2 - 20.0MHz 256-QAM)

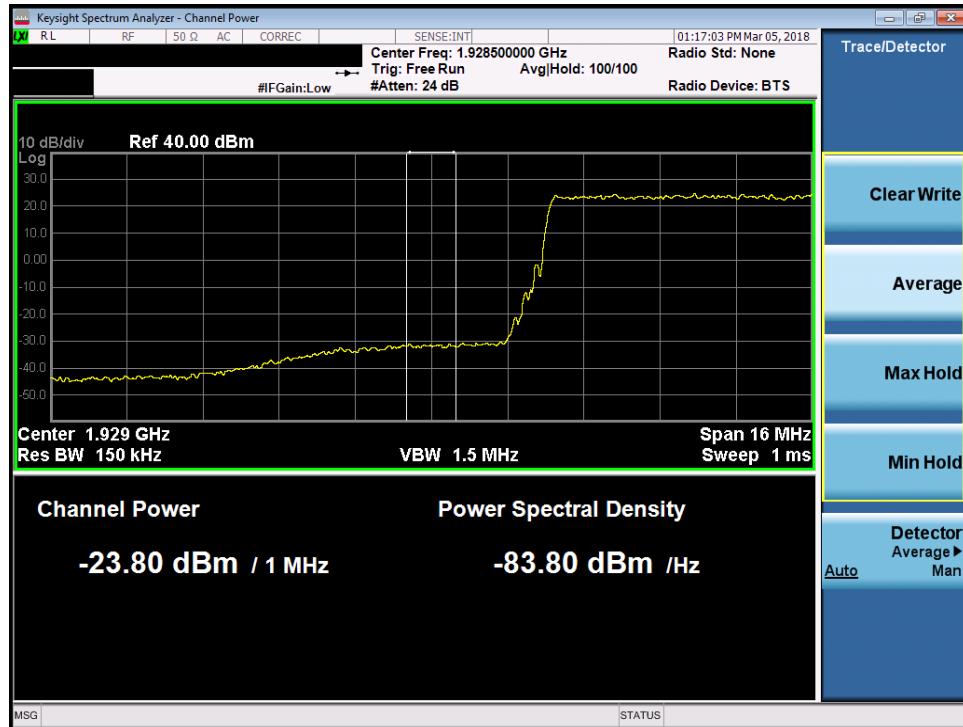


Plot 7-400. Lower Extended Band Edge Plot (Band 2 - 20.0MHz 256-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018		EUT Type: Remote Radio Head	Page 223 of 264	



Plot 7-401. Upper Band Edge Plot (Band 2 - 20.0MHz 256-QAM)

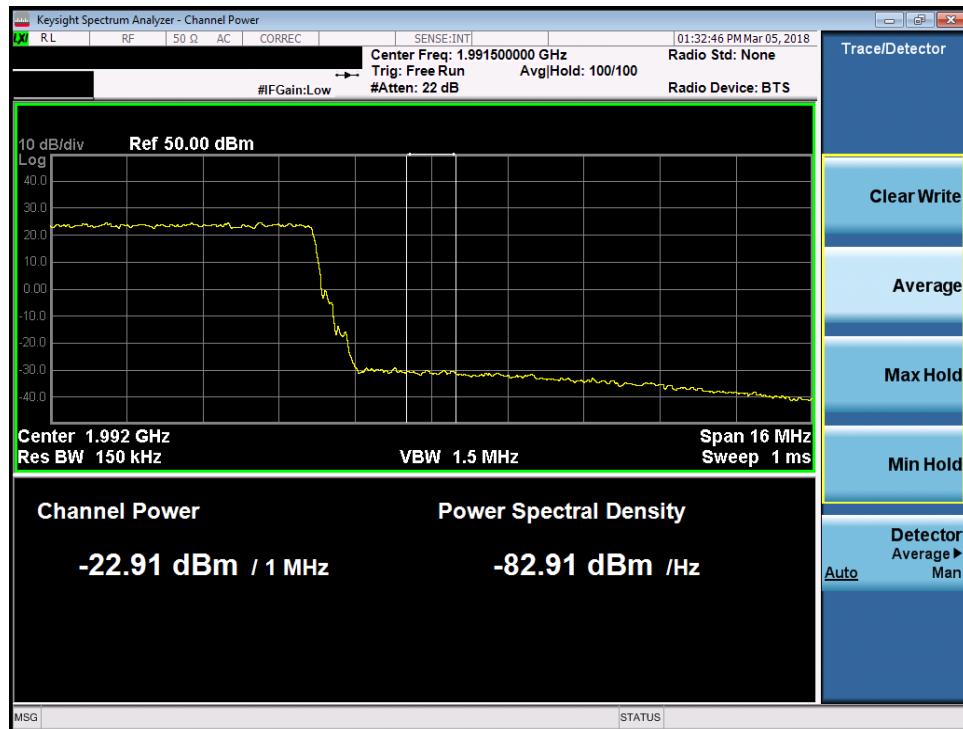

Plot 7-402. Upper Extended Band Edge Plot (Band 2 - 20.0MHz 256-QAM)

FCC ID: QLJ4GRFN-002	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 224 of 264

## Band 2 – MIMO Conducted Band Edge Measurement

Channel Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Band Edge	Ant 1 Cond. Band Edge [dBm]	Ant 2 Cond. Band Edge [dBm]	MIMO Cond. Band Edge [dBm]	MIMO Cond. Band Edge Limit [dBm]	Cond. Band Edge Margin [dB]
1930.70	1.4	QPSK	Lower	-23.82	-22.96	-20.36	-13	-7.36
1930.70	1.4	QPSK	Lower Extended	-20.88	-21.92	-18.36	-13	-5.36
1989.30	1.4	QPSK	Upper	-19.07	-22.77	-17.52	-13	-4.52
1989.30	1.4	QPSK	Upper Extended	-17.61	-17.88	-14.73	-13	-1.73
1930.70	1.4	16-QAM	Lower	-22.93	-22.61	-19.75	-13	-6.75
1930.70	1.4	16-QAM	Lower Extended	-20.91	-22.62	-18.67	-13	-5.67
1989.30	1.4	16-QAM	Upper	-18.67	-22.38	-17.13	-13	-4.13
1989.30	1.4	16-QAM	Upper Extended	-17.59	-17.73	-14.65	-13	-1.65
1930.70	1.4	64-QAM	Lower	-23.29	-22.50	-19.87	-13	-6.87
1930.70	1.4	64-QAM	Lower Extended	-21.25	-21.50	-18.36	-13	-5.36
1989.30	1.4	64-QAM	Upper	-18.04	-22.08	-16.59	-13	-3.59
1989.30	1.4	64-QAM	Upper Extended	-17.44	-17.62	-14.52	-13	-1.52
1930.70	1.4	256-QAM	Lower	-22.43	-23.93	-20.10	-13	-7.10
1930.70	1.4	256-QAM	Lower Extended	-21.11	-21.74	-18.40	-13	-5.40
1989.30	1.4	256-QAM	Upper	-19.30	-22.80	-17.69	-13	-4.69
1989.30	1.4	256-QAM	Upper Extended	-17.31	-17.57	-14.43	-13	-1.43
1931.50	3	QPSK	Lower	-20.77	-20.82	-17.79	-13	-4.79
1931.50	3	QPSK	Lower Extended	-21.32	-20.54	-17.90	-13	-4.90
1988.50	3	QPSK	Upper	-20.14	-19.84	-16.97	-13	-3.97
1988.50	3	QPSK	Upper Extended	-18.85	-18.21	-15.51	-13	-2.51
1931.50	3	16-QAM	Lower	-20.64	-20.33	-17.47	-13	-4.47
1931.50	3	16-QAM	Lower Extended	-21.88	-20.73	-18.26	-13	-5.26
1988.50	3	16-QAM	Upper	-20.02	-20.51	-17.25	-13	-4.25
1988.50	3	16-QAM	Upper Extended	-18.83	-17.90	-15.33	-13	-2.33
1931.50	3	64-QAM	Lower	-21.90	-20.54	-18.15	-13	-5.15
1931.50	3	64-QAM	Lower Extended	-20.28	-20.13	-17.19	-13	-4.19
1988.50	3	64-QAM	Upper	-20.02	-20.24	-17.12	-13	-4.12
1988.50	3	64-QAM	Upper Extended	-18.39	-18.50	-15.43	-13	-2.43
1931.50	3	256-QAM	Lower	-20.28	-20.38	-17.32	-13	-4.32
1931.50	3	256-QAM	Lower Extended	-20.43	-20.55	-17.48	-13	-4.48
1988.50	3	256-QAM	Upper	-21.45	-20.25	-17.80	-13	-4.80
1988.50	3	256-QAM	Upper Extended	-18.66	-17.96	-15.29	-13	-2.29
1932.50	5	QPSK	Lower	-25.27	-25.66	-22.45	-13	-9.45
1932.50	5	QPSK	Lower Extended	-21.01	-20.67	-17.83	-13	-4.83
1987.50	5	QPSK	Upper	-25.10	-25.84	-22.45	-13	-9.45
1987.50	5	QPSK	Upper Extended	-19.87	-19.42	-16.63	-13	-3.63
1932.50	5	16-QAM	Lower	-26.37	-25.05	-22.65	-13	-9.65
1932.50	5	16-QAM	Lower Extended	-20.97	-20.44	-17.69	-13	-4.69
1987.50	5	16-QAM	Upper	-25.97	-24.43	-22.12	-13	-9.12
1987.50	5	16-QAM	Upper Extended	-20.14	-19.49	-16.79	-13	-3.79
1932.50	5	64-QAM	Lower	-25.10	-25.70	-22.38	-13	-9.38
1932.50	5	64-QAM	Lower Extended	-20.59	-21.02	-17.79	-13	-4.79
1987.50	5	64-QAM	Upper	-24.79	-25.00	-21.89	-13	-8.89
1987.50	5	64-QAM	Upper Extended	-19.98	-19.07	-16.49	-13	-3.49
1932.50	5	256-QAM	Lower	-25.48	-24.80	-22.11	-13	-9.11
1932.50	5	256-QAM	Lower Extended	-21.10	-20.15	-17.59	-13	-4.59
1987.50	5	256-QAM	Upper	-24.89	-25.00	-21.94	-13	-8.94
1987.50	5	256-QAM	Upper Extended	-20.08	-19.35	-16.69	-13	-3.69

Channel Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Band Edge	Ant 1 Cond. Band Edge [dBm]	Ant 2 Cond. Band Edge [dBm]	MIMO Cond. Band Edge [dBm]	MIMO Cond. Band Edge Limit [dBm]	Cond. Band Edge Margin [dB]
1935.00	10	QPSK	Lower	-27.52	-26.83	-24.15	-13	-11.15
1935.00	10	QPSK	Lower Extended	-22.60	-21.86	-19.20	-13	-6.20
1985.00	10	QPSK	Upper	-26.54	-25.15	-22.78	-13	-9.78
1985.00	10	QPSK	Upper Extended	-21.13	-20.70	-17.90	-13	-4.90
1935.00	10	16-QAM	Lower	-27.40	-26.00	-23.63	-13	-10.63
1935.00	10	16-QAM	Lower Extended	-22.08	-21.81	-18.93	-13	-5.93
1985.00	10	16-QAM	Upper	-26.65	-25.92	-23.26	-13	-10.26
1985.00	10	16-QAM	Upper Extended	-21.30	-20.64	-17.95	-13	-4.95
1935.00	10	64-QAM	Lower	-27.34	-26.14	-23.69	-13	-10.69
1935.00	10	64-QAM	Lower Extended	-22.29	-21.40	-18.81	-13	-5.81
1985.00	10	64-QAM	Upper	-26.07	-25.33	-22.68	-13	-9.68
1985.00	10	64-QAM	Upper Extended	-21.12	-20.89	-17.99	-13	-4.99
1935.00	10	256-QAM	Lower	-26.51	-25.88	-23.17	-13	-10.17
1935.00	10	256-QAM	Lower Extended	-22.70	-21.27	-18.92	-13	-5.92
1985.00	10	256-QAM	Upper	-26.17	-25.65	-22.89	-13	-9.89
1985.00	10	256-QAM	Upper Extended	-21.18	-20.54	-17.84	-13	-4.84
1937.50	15	QPSK	Lower	-26.25	-24.18	-22.08	-13	-9.08
1937.50	15	QPSK	Lower Extended	-24.51	-22.92	-20.63	-13	-7.63
1985.00	15	QPSK	Upper	-25.44	-24.97	-22.18	-13	-9.18
1985.00	15	QPSK	Upper Extended	-23.04	-21.74	-19.33	-13	-6.33
1937.50	15	16-QAM	Lower	-25.39	-25.57	-22.47	-13	-9.47
1937.50	15	16-QAM	Lower Extended	-23.92	-23.32	-20.60	-13	-7.60
1985.00	15	16-QAM	Upper	-24.73	-24.70	-21.71	-13	-8.71
1985.00	15	16-QAM	Upper Extended	-22.55	-21.59	-19.03	-13	-6.03
1937.50	15	64-QAM	Lower	-25.34	-25.49	-22.40	-13	-9.40
1937.50	15	64-QAM	Lower Extended	-23.13	-22.42	-19.75	-13	-6.75
1985.00	15	64-QAM	Upper	-24.79	-24.85	-21.81	-13	-8.81
1985.00	15	64-QAM	Upper Extended	-21.61	-21.59	-18.59	-13	-5.59
1937.50	15	256-QAM	Lower	-26.42	-25.35	-22.84	-13	-9.84
1937.50	15	256-QAM	Lower Extended	-23.56	-22.27	-19.86	-13	-6.86
1985.00	15	256-QAM	Upper	-25.79	-24.94	-22.33	-13	-9.33
1985.00	15	256-QAM	Upper Extended	-22.96	-21.76	-19.31	-13	-6.31
1940.00	20	QPSK	Lower	-24.85	-23.53	-21.13	-13	-8.13
1940.00	20	QPSK	Lower Extended	-23.05	-23.83	-20.41	-13	-7.41
1980.00	20	QPSK	Upper	-24.65	-23.75	-21.17	-13	-8.17
1980.00	20	QPSK	Upper Extended	-23.19	-22.61	-19.88	-13	-6.88
1940.00	20	16-QAM	Lower	-25.07	-24.58	-21.81	-13	-8.81
1940.00	20	16-QAM	Lower Extended	-23.62	-23.28	-20.44	-13	-7.44
1980.00	20	16-QAM	Upper	-25.31	-24.31	-21.77	-13	-8.77
1980.00	20	16-QAM	Upper Extended	-22.99	-22.35	-19.65	-13	-6.65
1940.00	20	64-QAM	Lower	-24.70	-24.90	-21.79	-13	-8.79
1940.00	20	64-QAM	Lower Extended	-23.38	-23.49	-20.42	-13	-7.42
1980.00	20	64-QAM	Upper	-24.80	-24.13	-21.44	-13	-8.44
1980.00	20	64-QAM	Upper Extended	-22.75	-22.05	-19.38	-13	-6.38
1940.00	20	256-QAM	Lower	-25.12	-25.04	-22.07	-13	-9.07
1940.00	20	256-QAM	Lower Extended	-23.29	-23.80	-20.53	-13	-7.53
1980.00	20	256-QAM	Upper	-24.80	-23.88	-21.31	-13	-8.31
1980.00	20	256-QAM	Upper Extended	-22.67	-22.91	-19.78	-13	-6.78

Table 7-2. Conducted Band Edge Measurements

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 225 of 264
© 2018 PCTEST Engineering Laboratory, Inc.				V 7.4 1/16/2018

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

**Note:**

Per ANSI C63.26-2015 Section 6.4.3.1 and KDB 662911 v02r01 Section E1), the conducted emissions at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Lower band edge was investigated at 1930MHz, lower extended band edge at 1928.5MHz, upper band edge at 1990MHz, and upper extended band edge at 1991.5MHz.

**Sample MIMO Calculation:**

At 1930.7MHz in QPSK modulation, the average conducted emission was measured to be -23.82 dBm for Antenna-1 and -22.96 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(-23.82 \text{ dBm} + -22.96 \text{ dBm}) = (0.00415 \text{ mW} + 0.00506 \text{ mW}) = 0.00921 \text{ mW} = -20.36 \text{ dBm}$$

FCC ID: QLJ4GRFN-002	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 226 of 264

## 7.6 Peak-Average Ratio

§24.232(d)

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 D01 v03 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

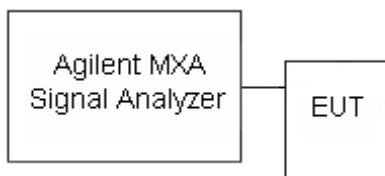


**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: QLJ4GRFN-002	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 227 of 264

## Band 2 – Antenna 1

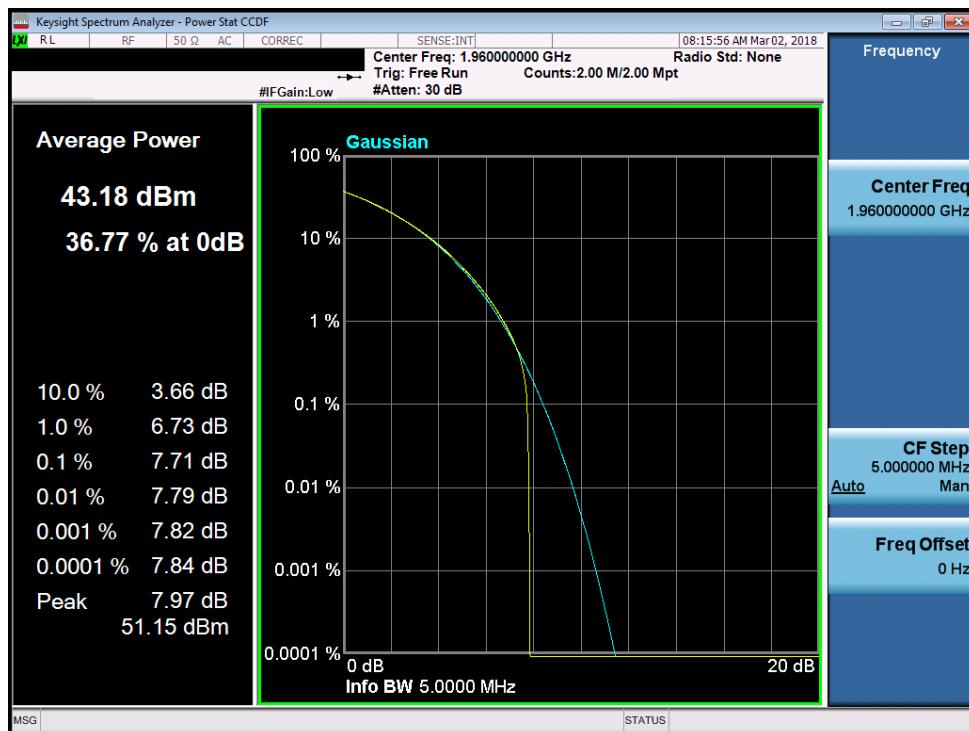


Plot 7-403. PAR Plot (Band 2 - 1.4MHz QPSK)

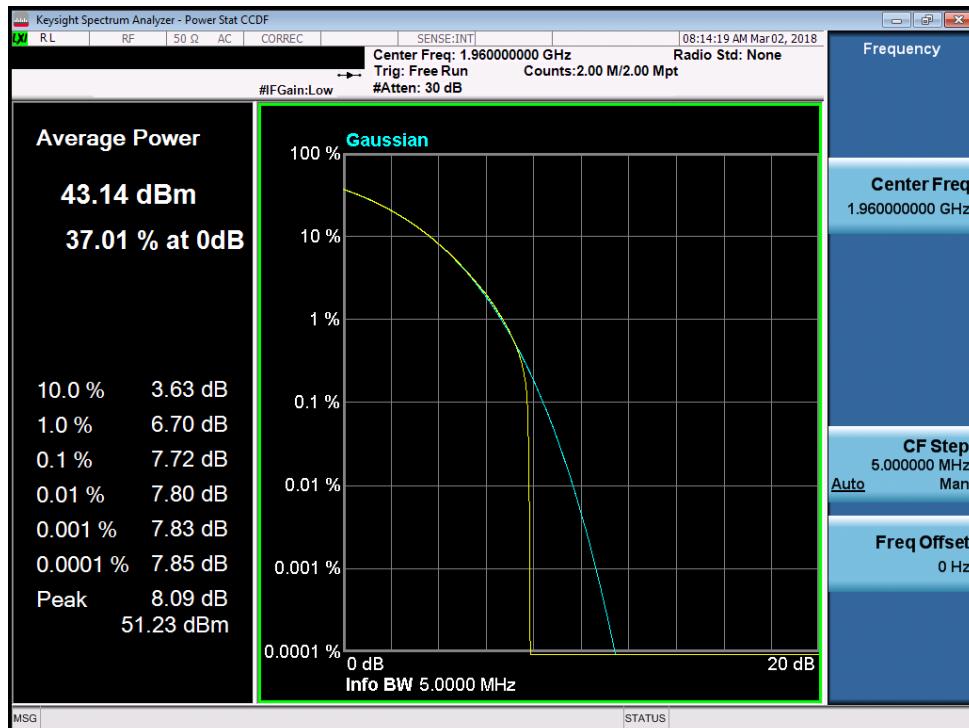


Plot 7-404. PAR Plot (Band 2 - 1.4MHz 16-QAM)

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 228 of 264

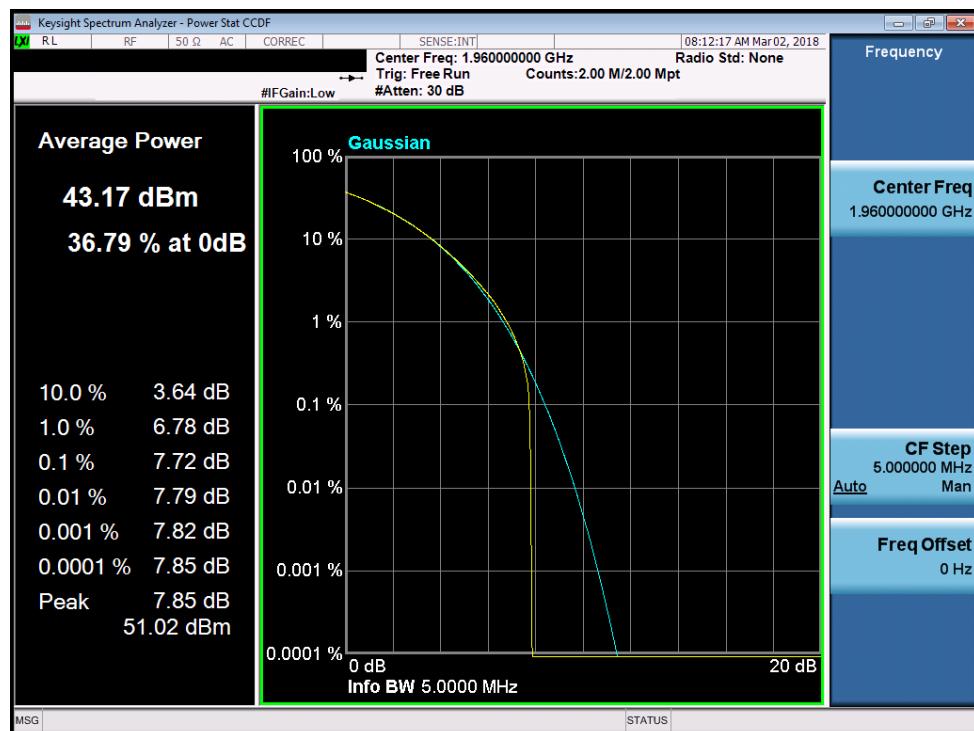


**Plot 7-405. PAR Plot (Band 2 - 1.4MHz 64-QAM)**

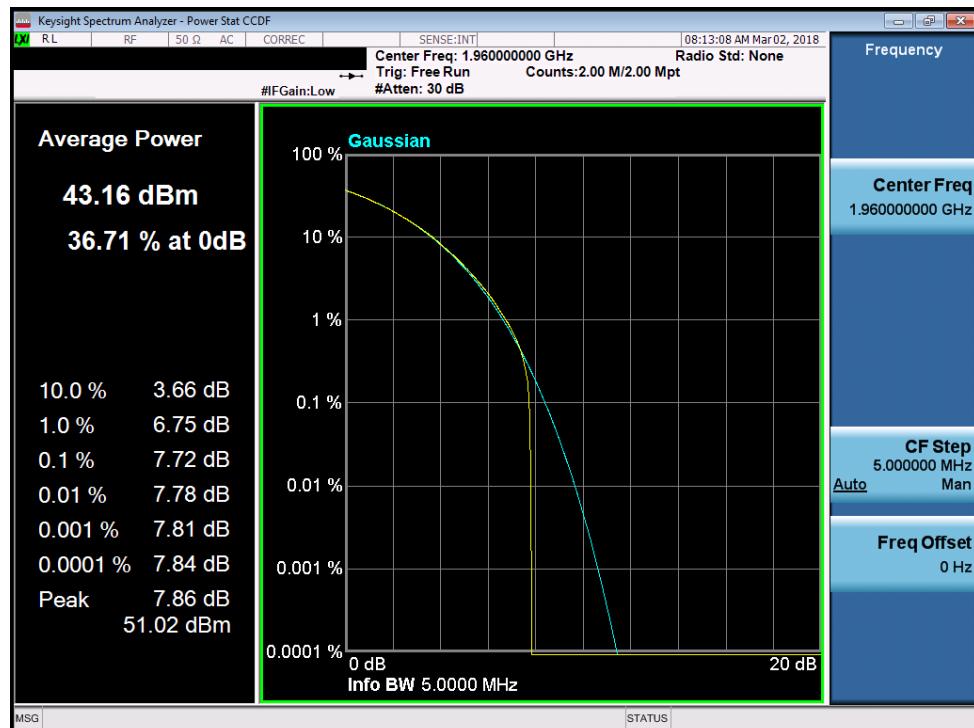


**Plot 7-406. PAR Plot (Band 2 - 1.4MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Tecore networks</b>	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 229 of 264

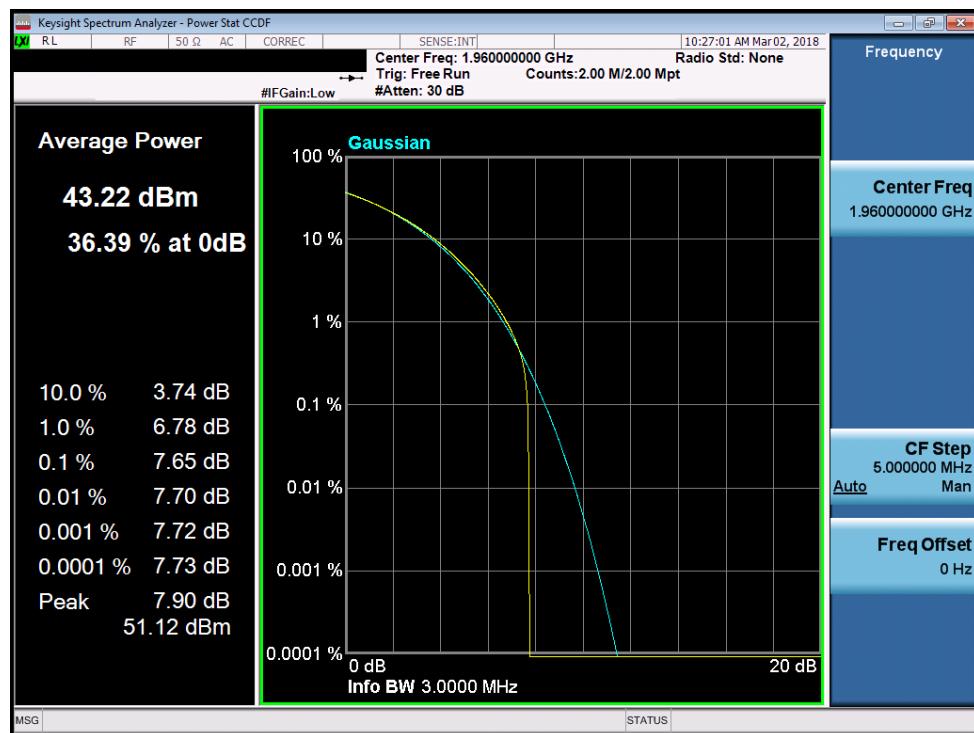


Plot 7-407. PAR Plot (Band 2 - 3.0MHz QPSK)

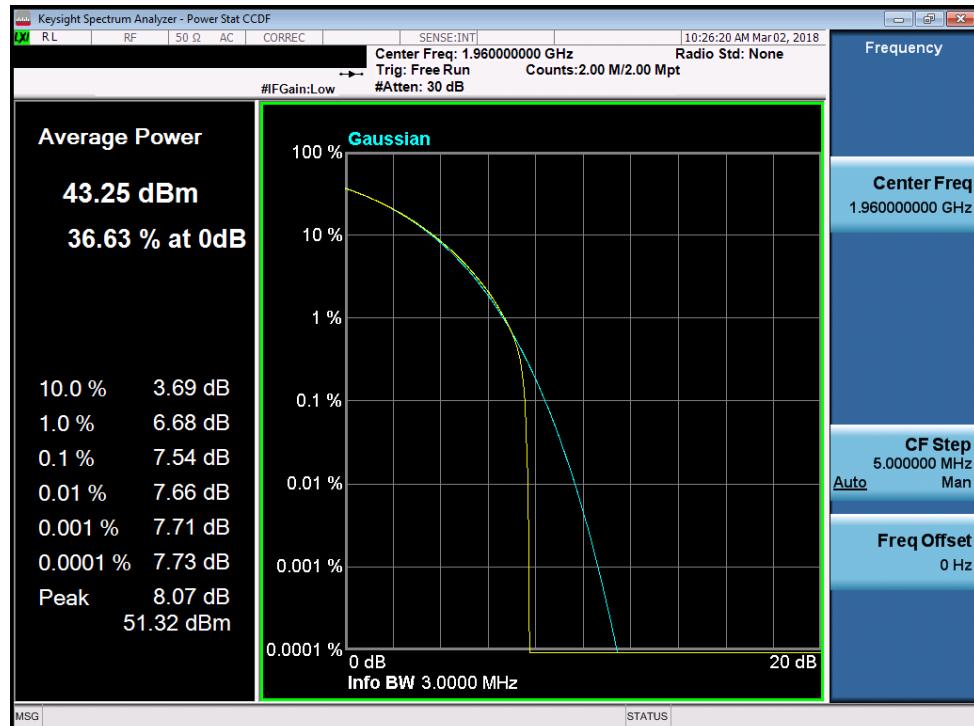


Plot 7-408. PAR Plot (Band 2 - 3.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 230 of 264

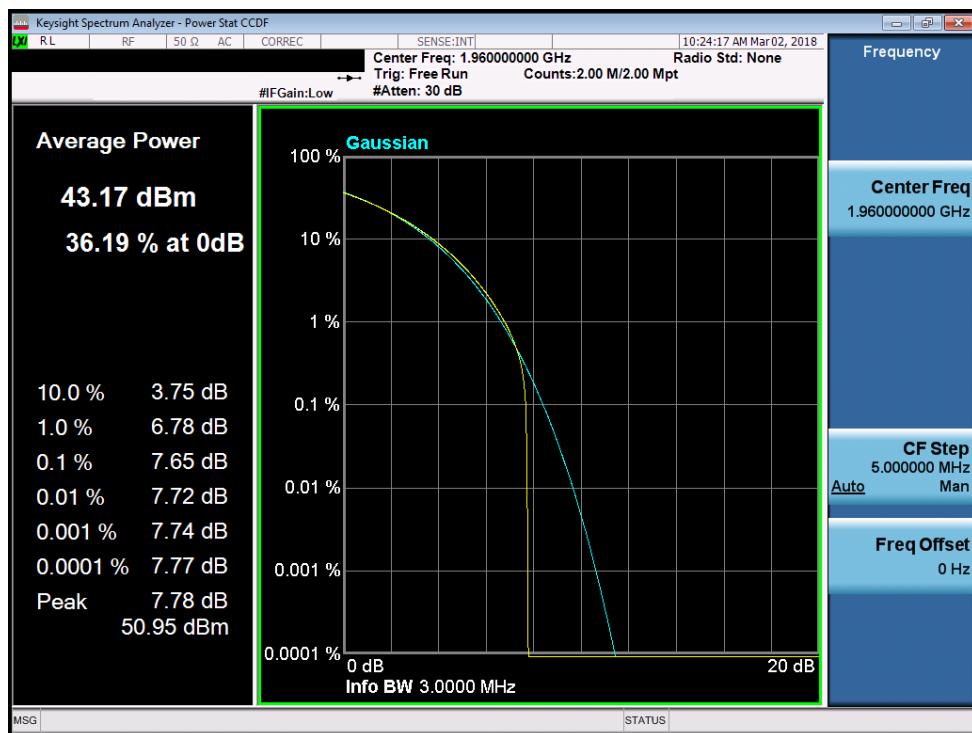


**Plot 7-409. PAR Plot (Band 2 - 3.0MHz 64-QAM)**

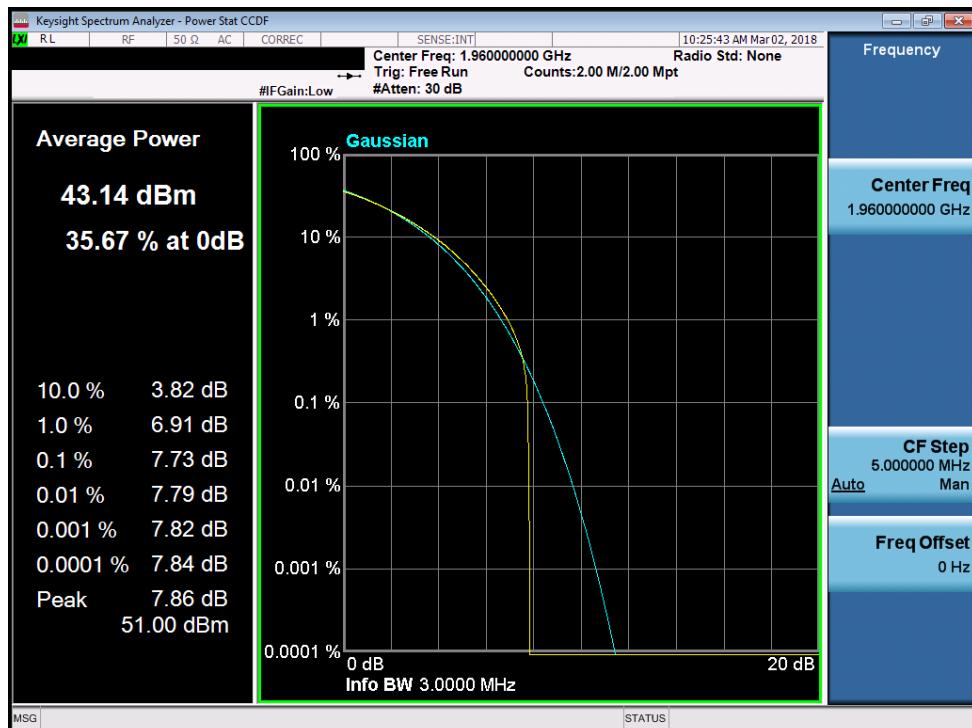


**Plot 7-410. PAR Plot (Band 2 - 3.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 231 of 264

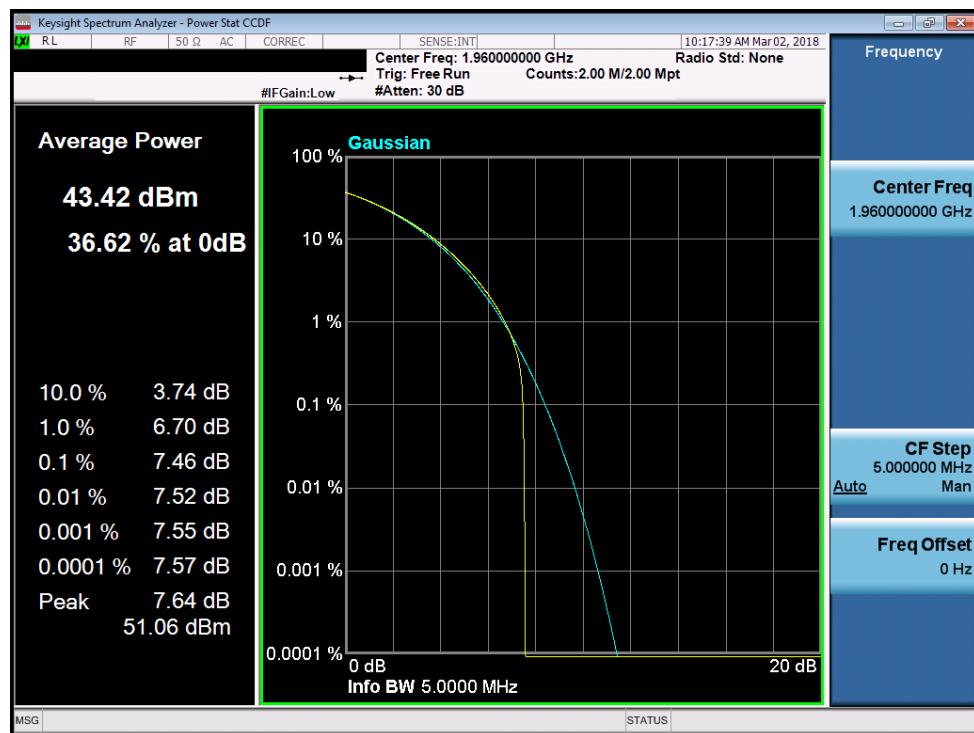


**Plot 7-411. PAR Plot (Band 2 - 5.0MHz QPSK)**

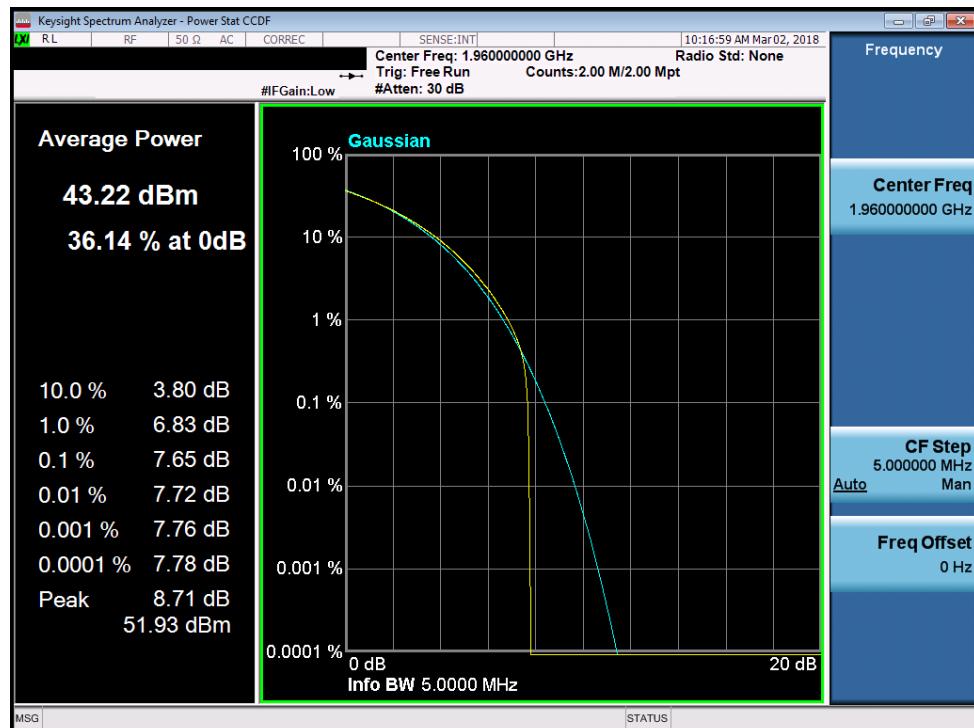


**Plot 7-412. PAR Plot (Band 2 - 5.0MHz 16-QAM)**

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 232 of 264

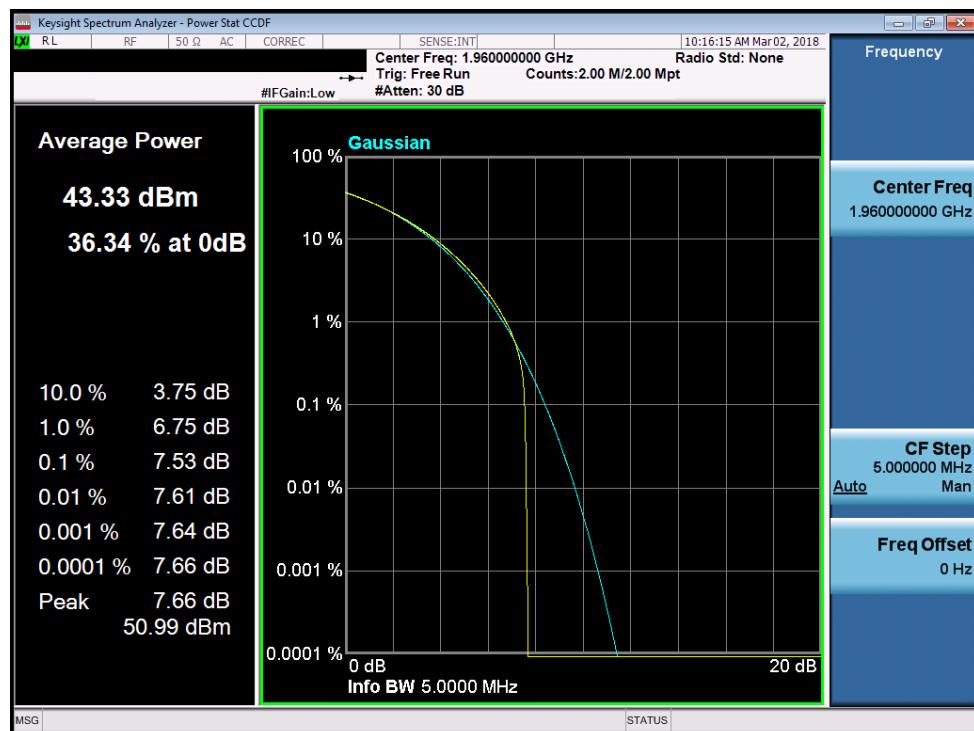


**Plot 7-413. PAR Plot (Band 2 - 5.0MHz 64-QAM)**

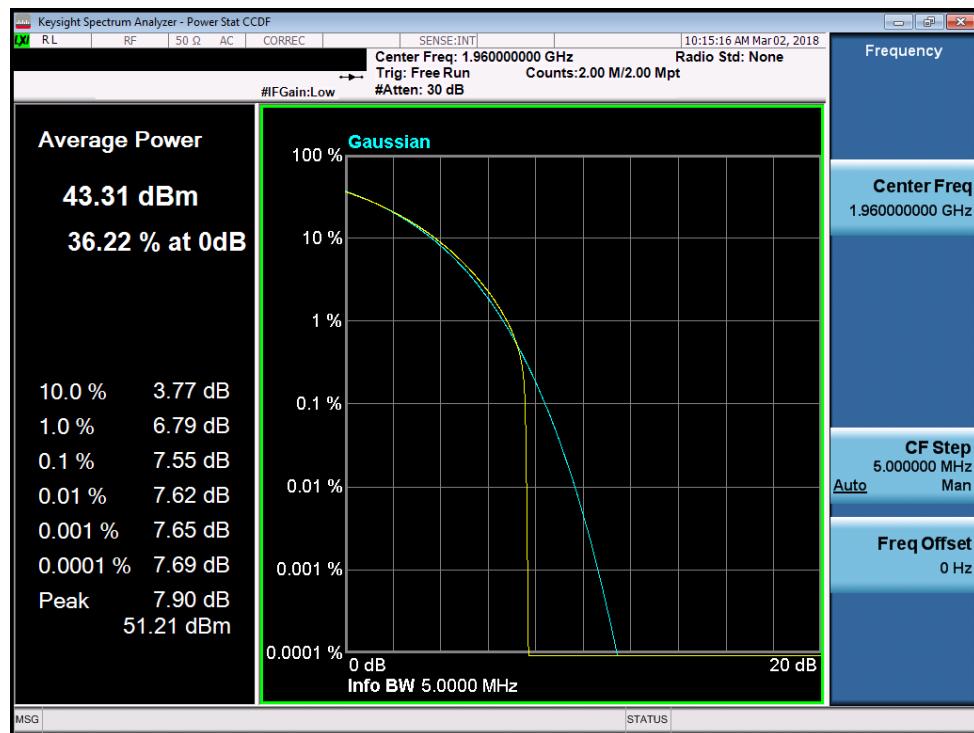


**Plot 7-414. PAR Plot (Band 2 - 5.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 233 of 264

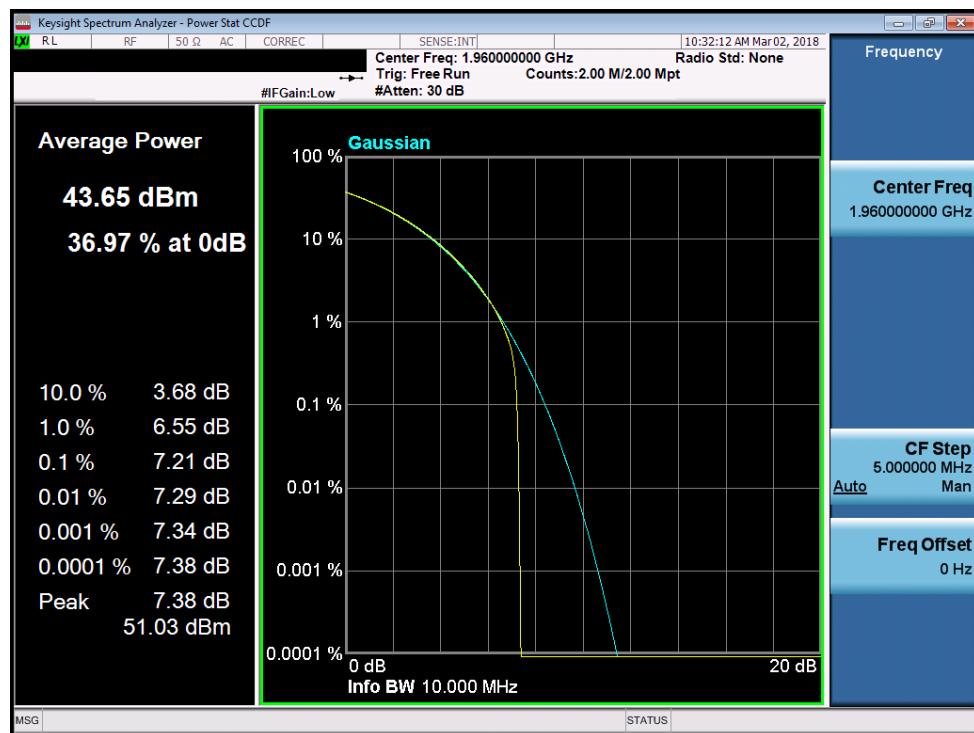


Plot 7-415. PAR Plot (Band 2 - 10.0MHz QPSK)

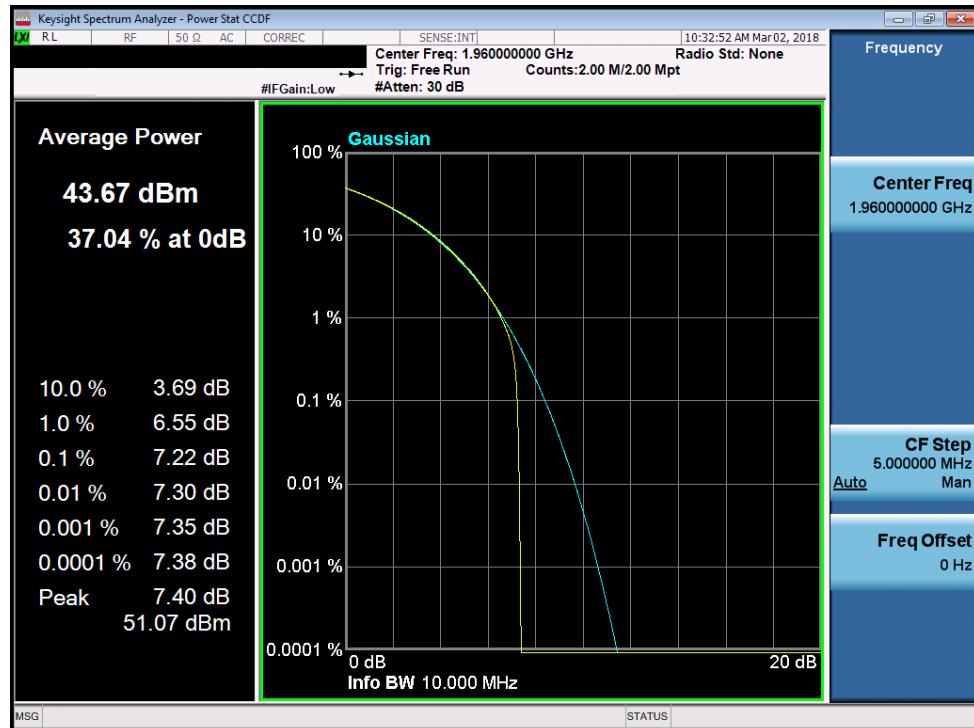


Plot 7-416. PAR Plot (Band 2 - 10.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 234 of 264

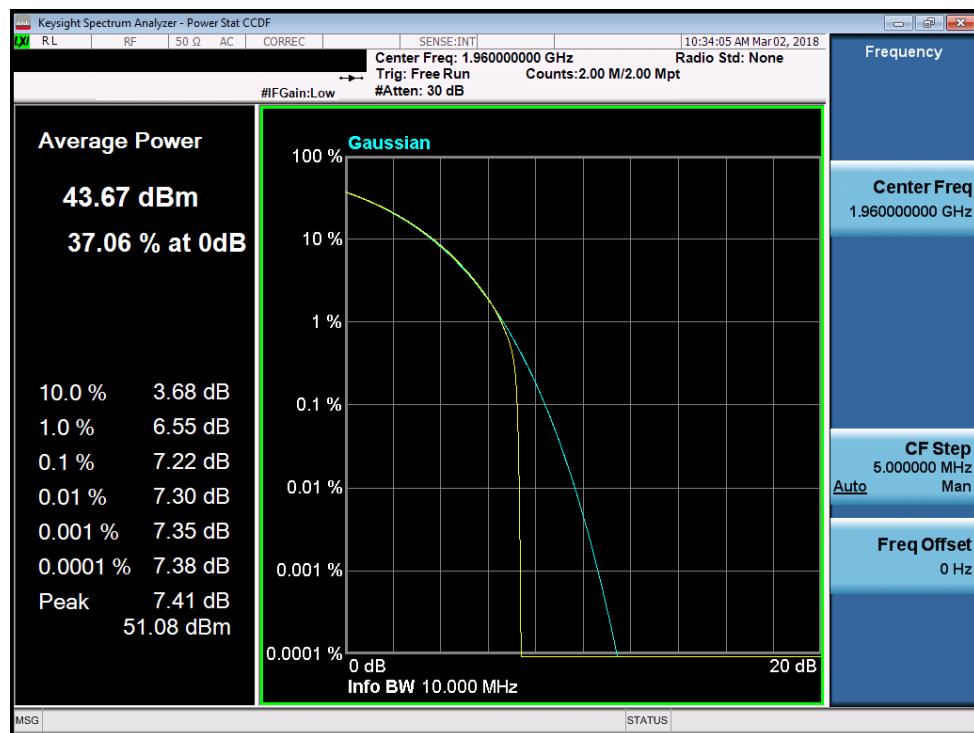


**Plot 7-417. PAR Plot (Band 2 - 10.0MHz 64-QAM)**

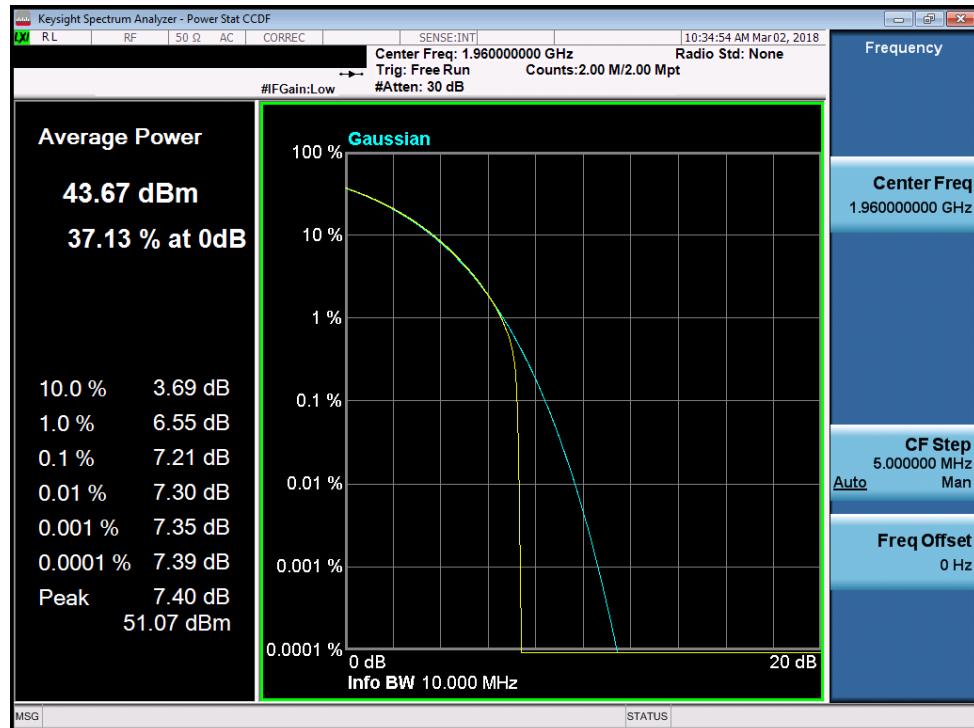


**Plot 7-418. PAR Plot (Band 2 - 10.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 235 of 264

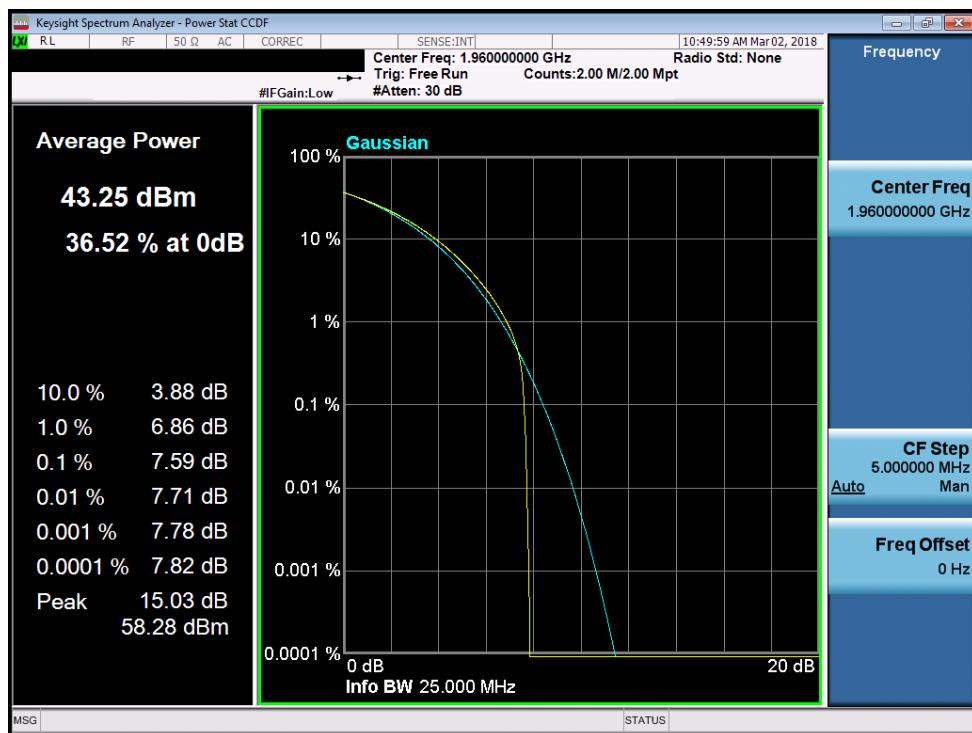


Plot 7-419. PAR Plot (Band 2 - 15.0MHz QPSK)

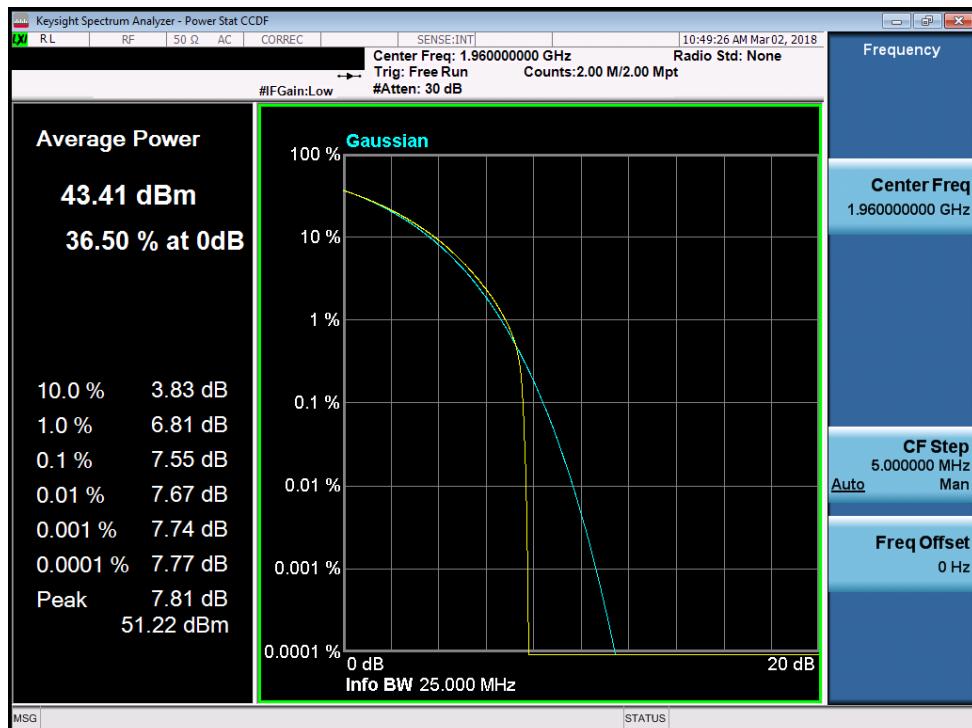


Plot 7-420. PAR Plot (Band 2 - 15.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 236 of 264

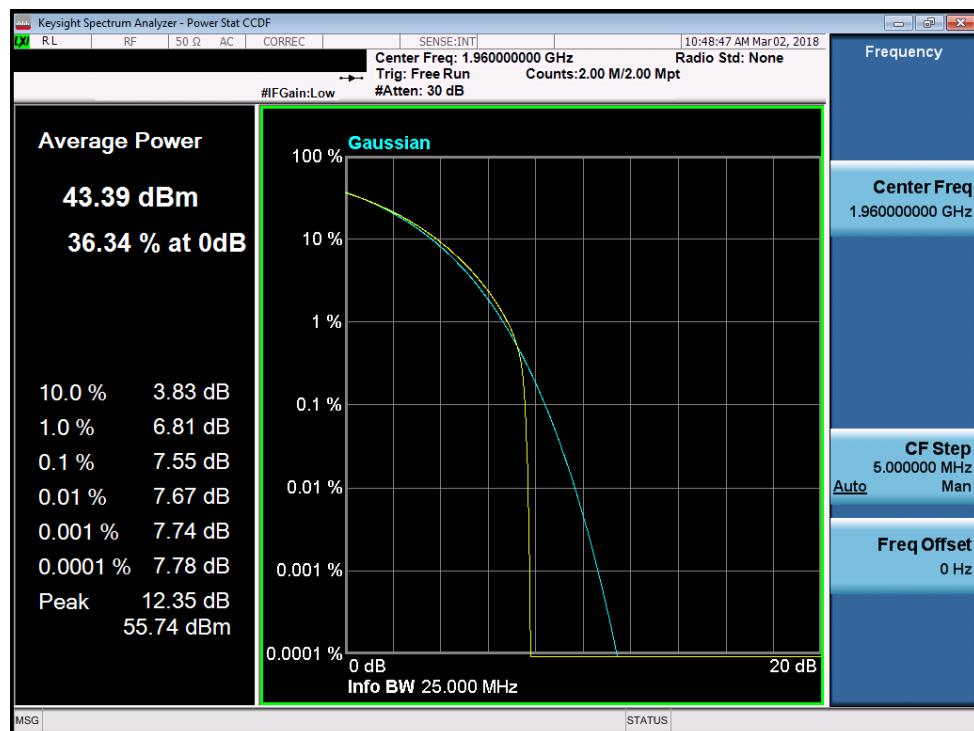


**Plot 7-421. PAR Plot (Band 2 - 15.0MHz 64-QAM)**

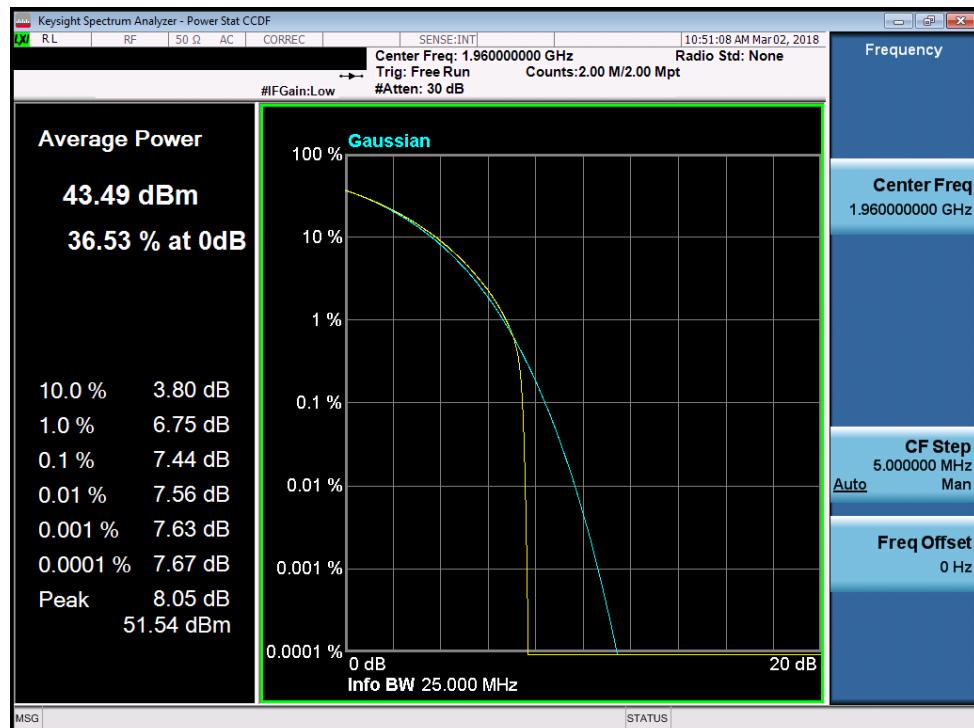


**Plot 7-422. PAR Plot (Band 2 - 15.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 237 of 264

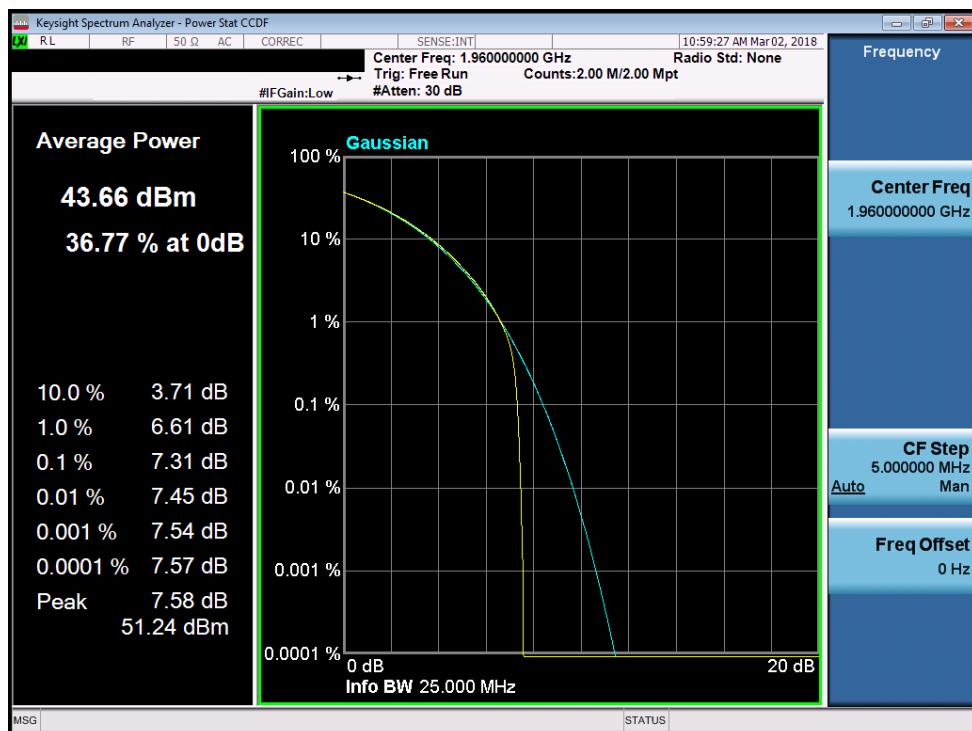


Plot 7-423. PAR Plot (Band 2 - 20.0MHz QPSK)

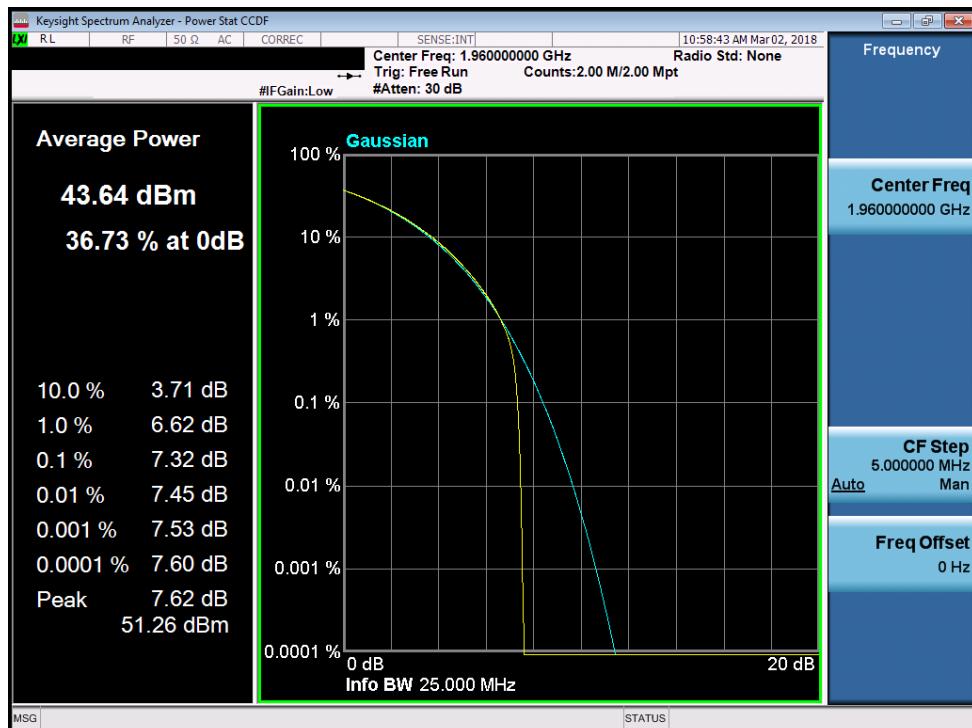


Plot 7-424. PAR Plot (Band 2 - 20.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 238 of 264	

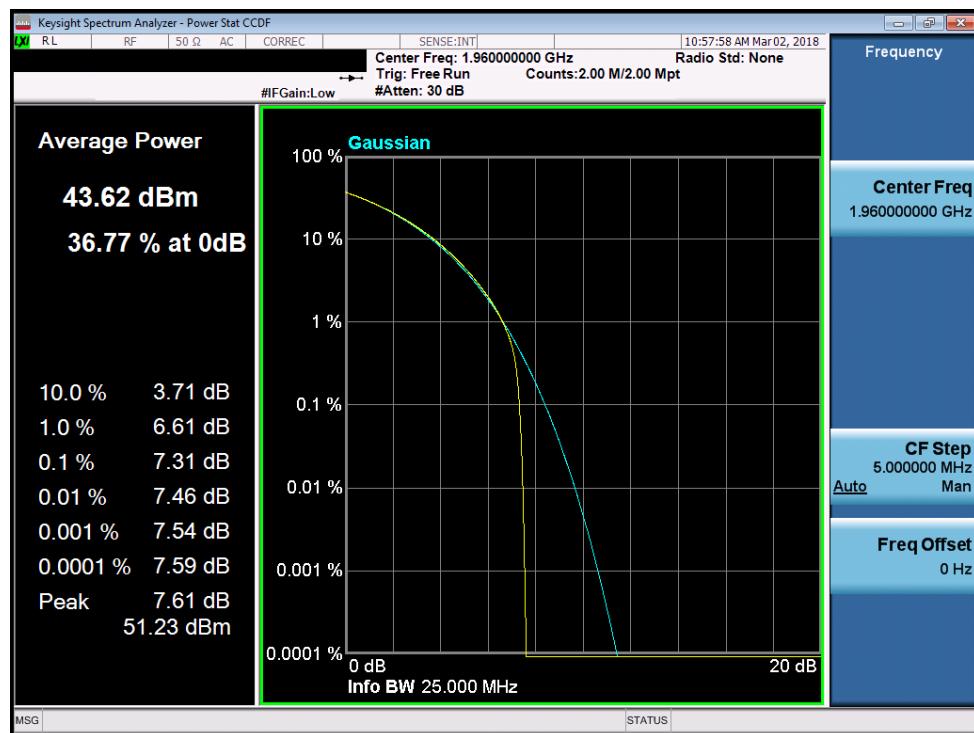


**Plot 7-425. PAR Plot (Band 2 - 20.0MHz 64-QAM)**

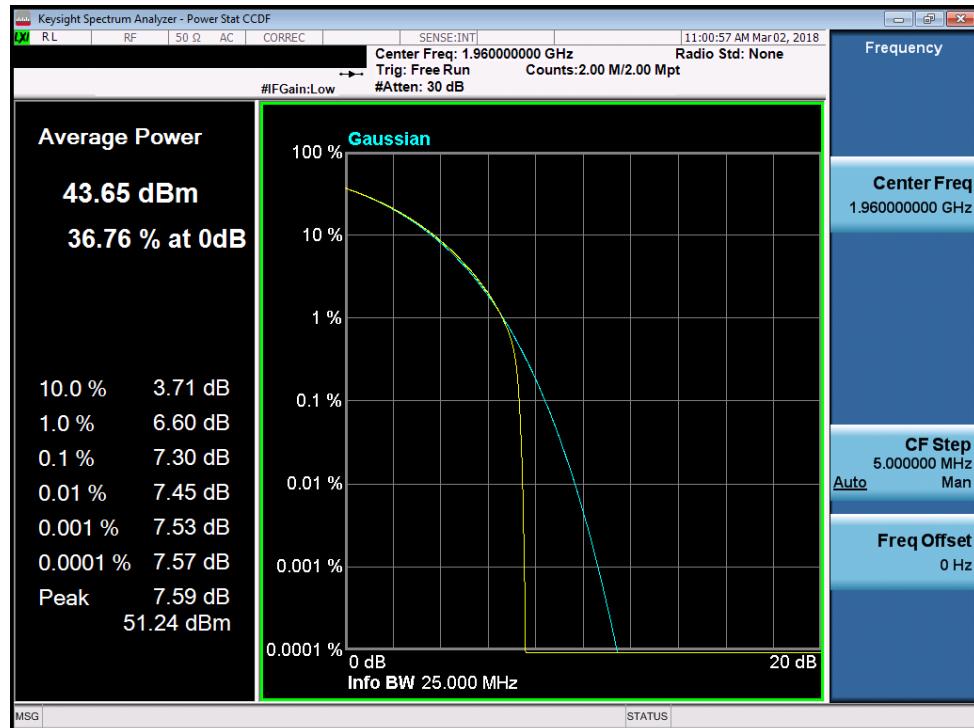


**Plot 7-426. PAR Plot (Band 2 - 20.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 239 of 264

## Band 2 – Antenna 2

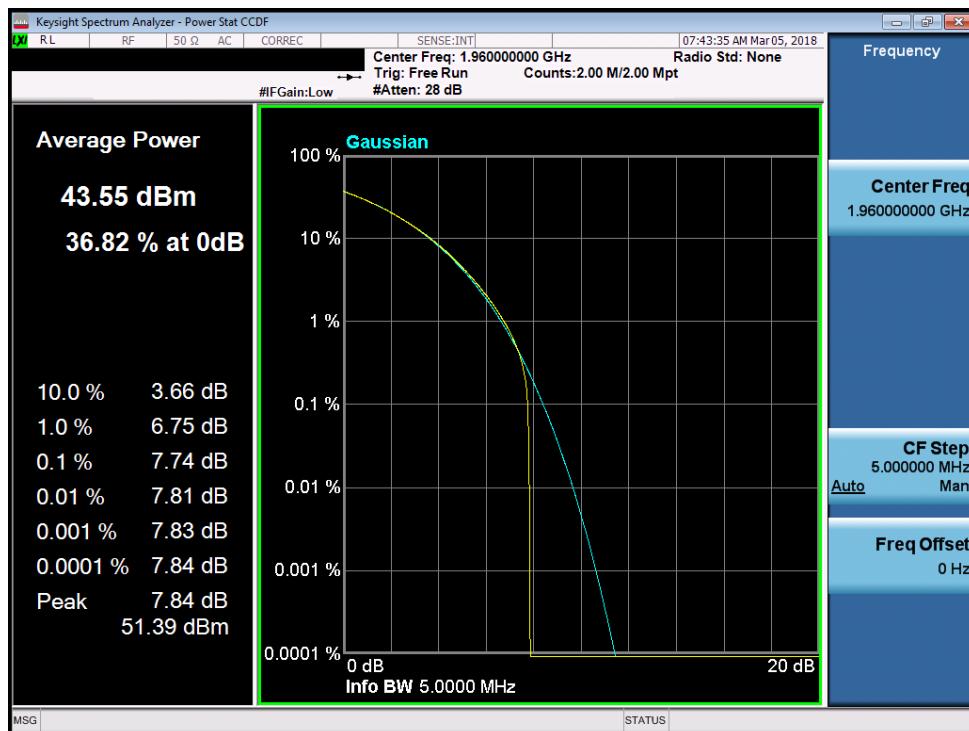


Plot 7-427. PAR Plot (Band 2 - 1.4MHz QPSK)

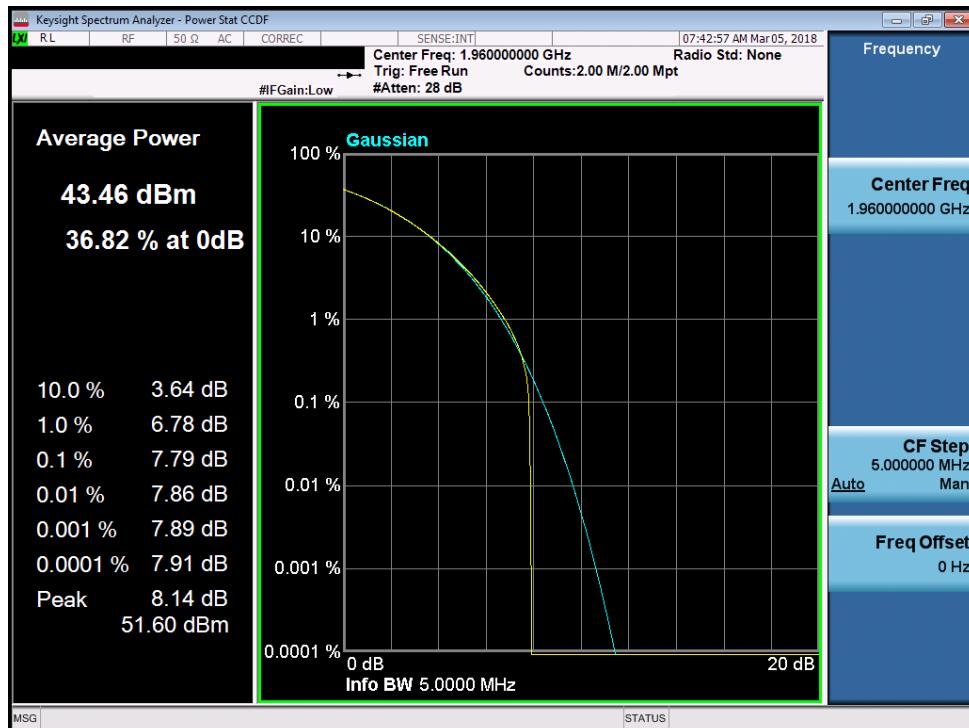


Plot 7-428. PAR Plot (Band 2 - 1.4MHz 16-QAM)

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 240 of 264

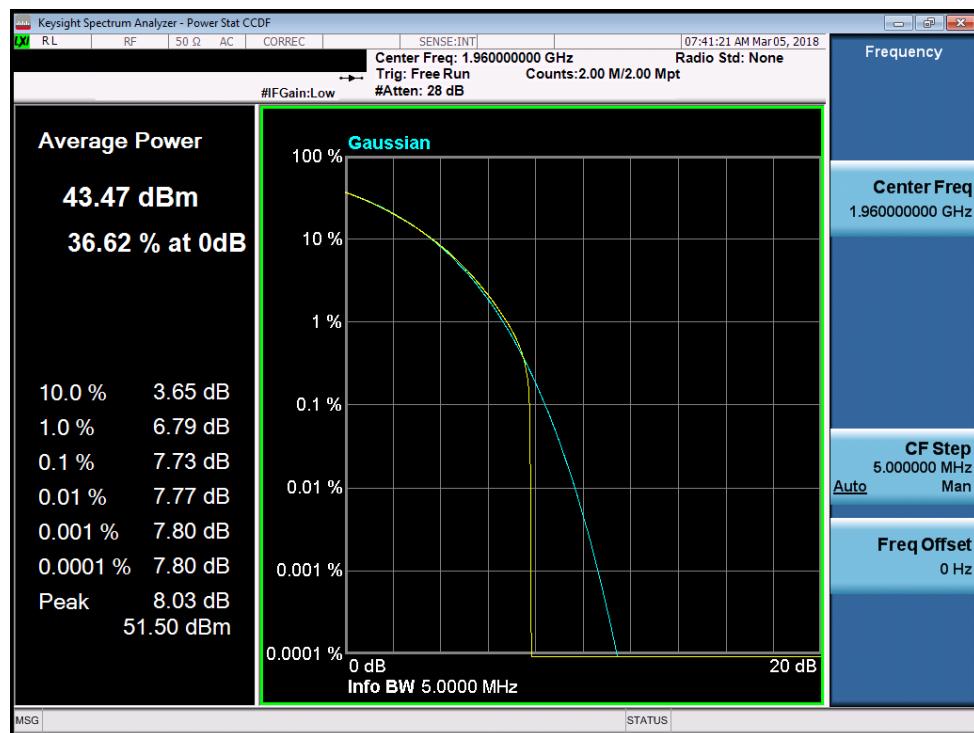


**Plot 7-429. PAR Plot (Band 2 - 1.4MHz 64-QAM)**

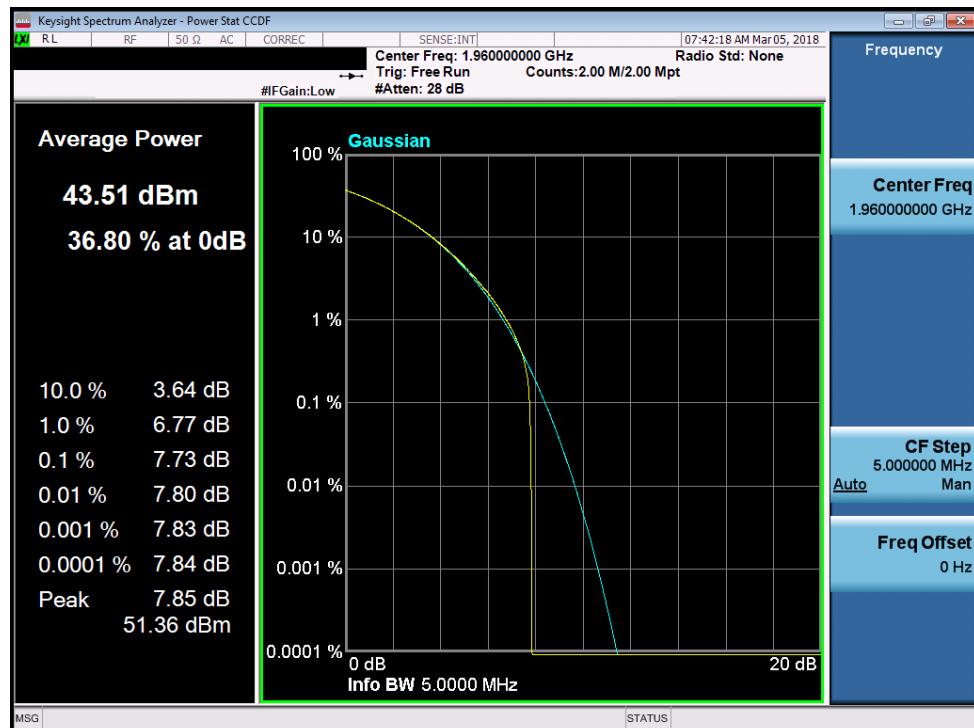


**Plot 7-430. PAR Plot (Band 2 - 1.4MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 241 of 264

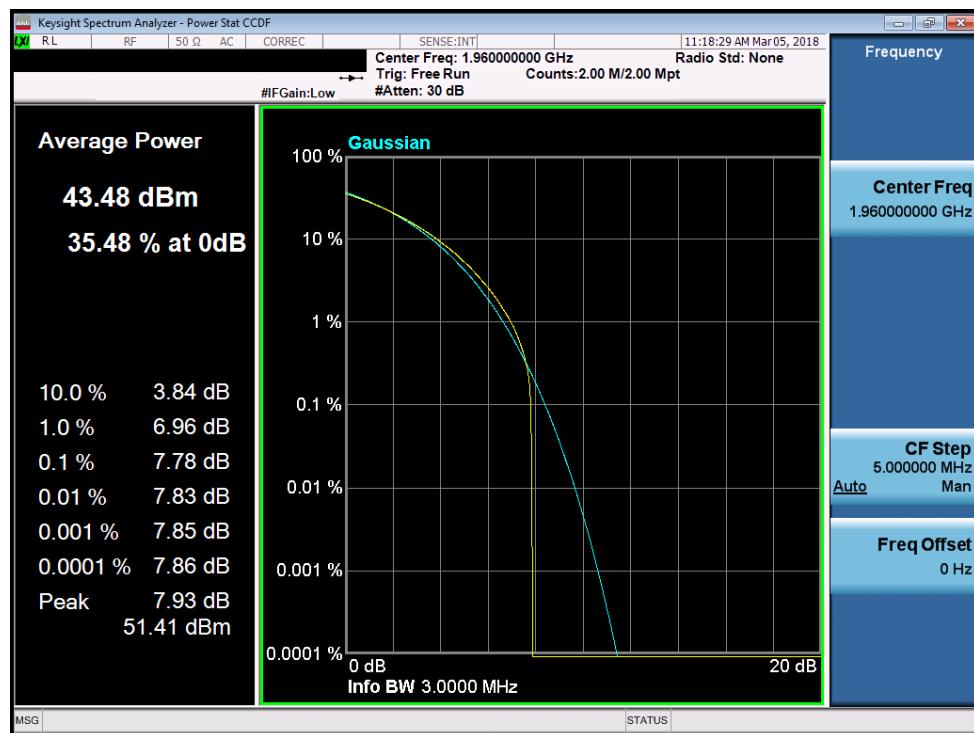


**Plot 7-431. PAR Plot (Band 2 - 3.0MHz QPSK)**

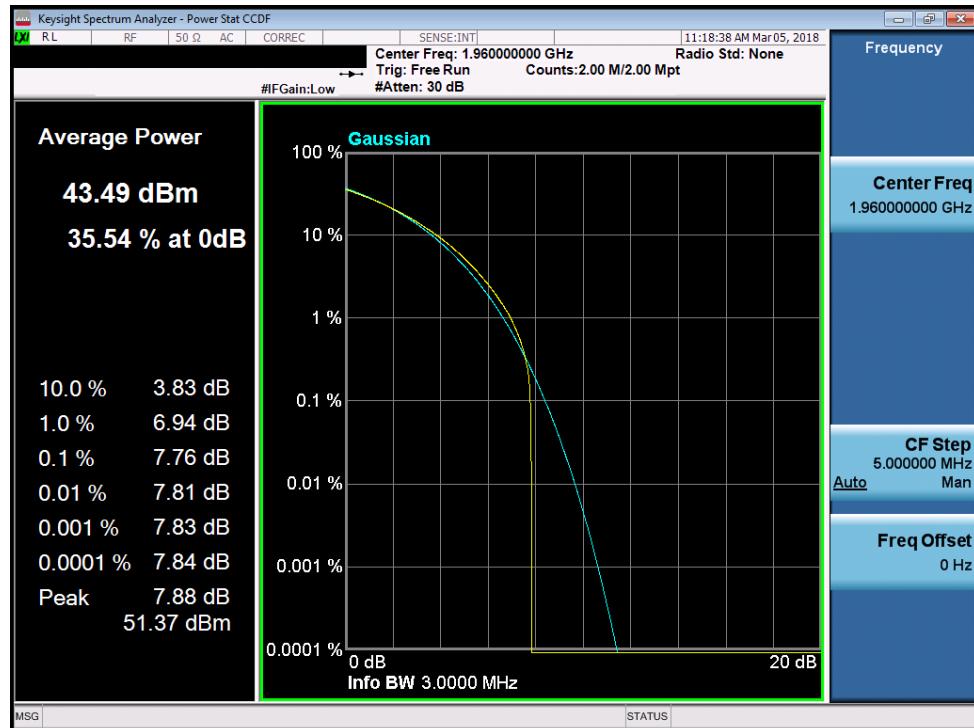


**Plot 7-432. PAR Plot (Band 2 - 3.0MHz 16-QAM)**

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 242 of 264

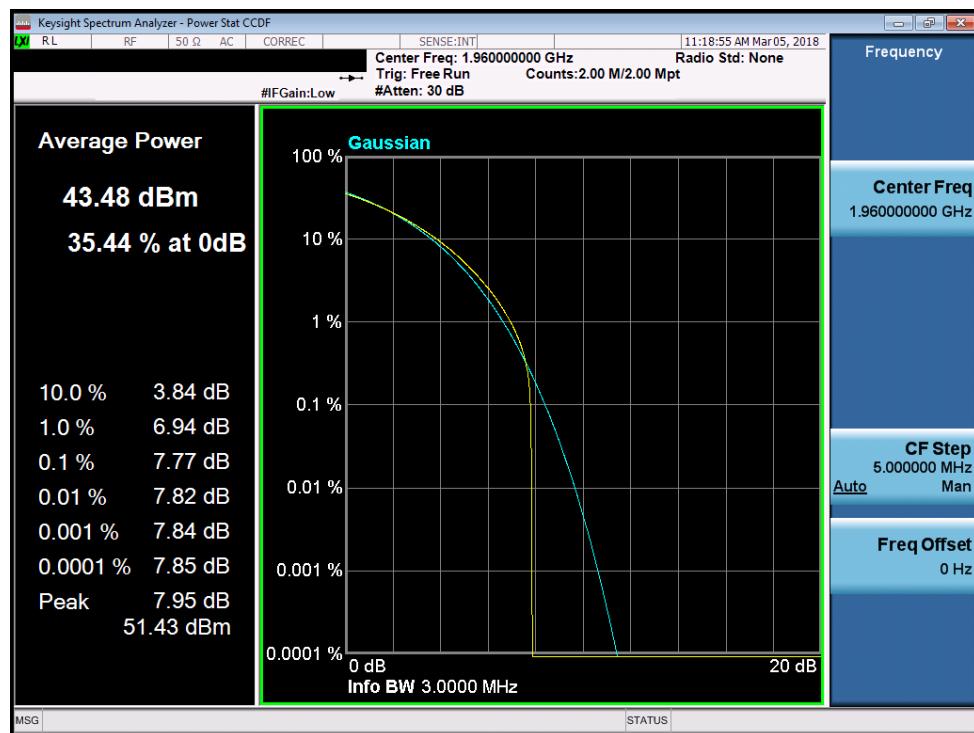


**Plot 7-433. PAR Plot (Band 2 - 3.0MHz 64-QAM)**

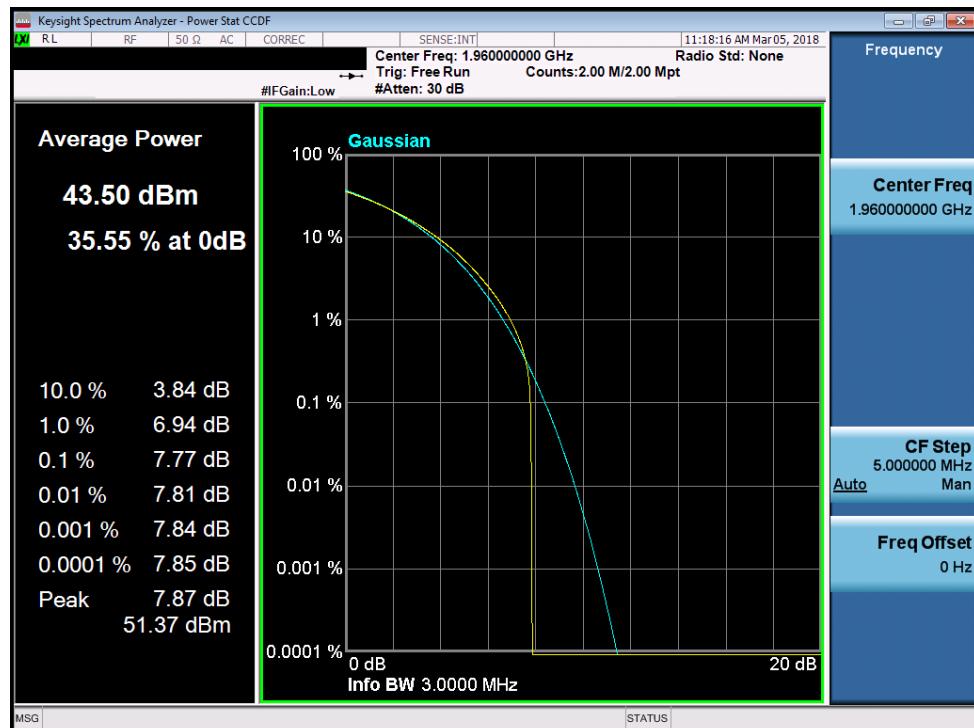


**Plot 7-434. PAR Plot (Band 2 - 3.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 243 of 264

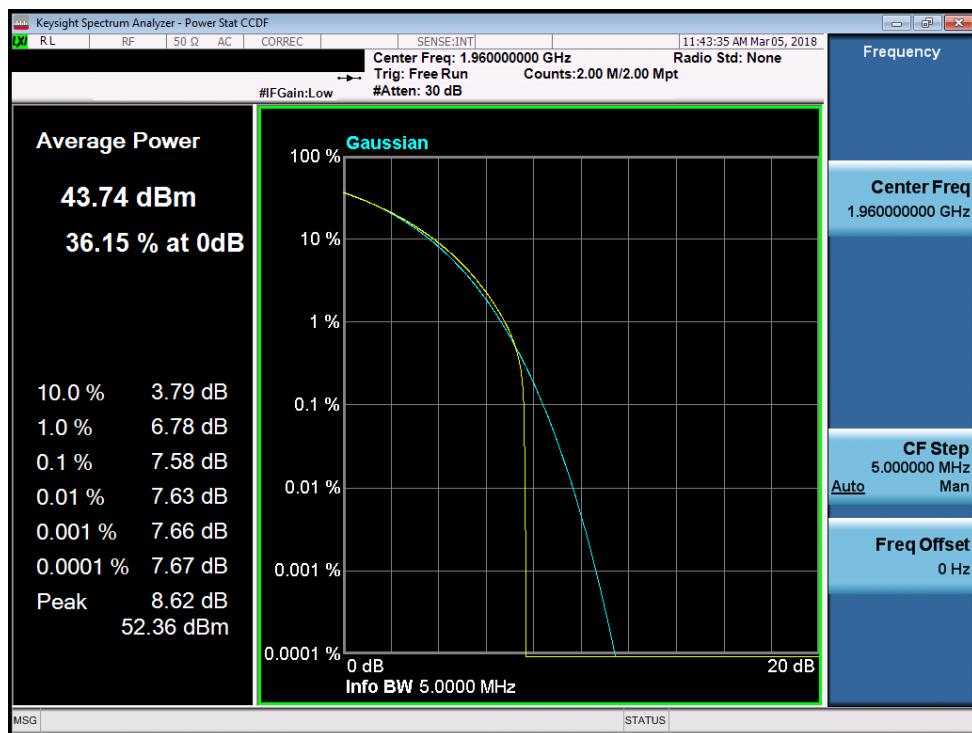


Plot 7-435. PAR Plot (Band 2 - 5.0MHz QPSK)

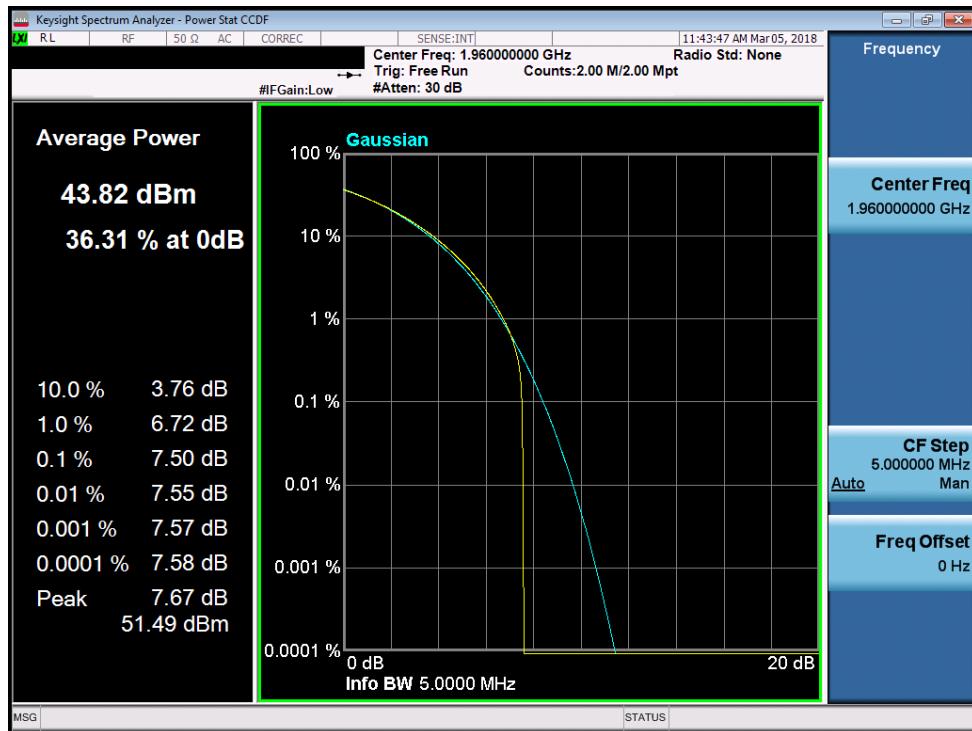


Plot 7-436. PAR Plot (Band 2 - 5.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 244 of 264

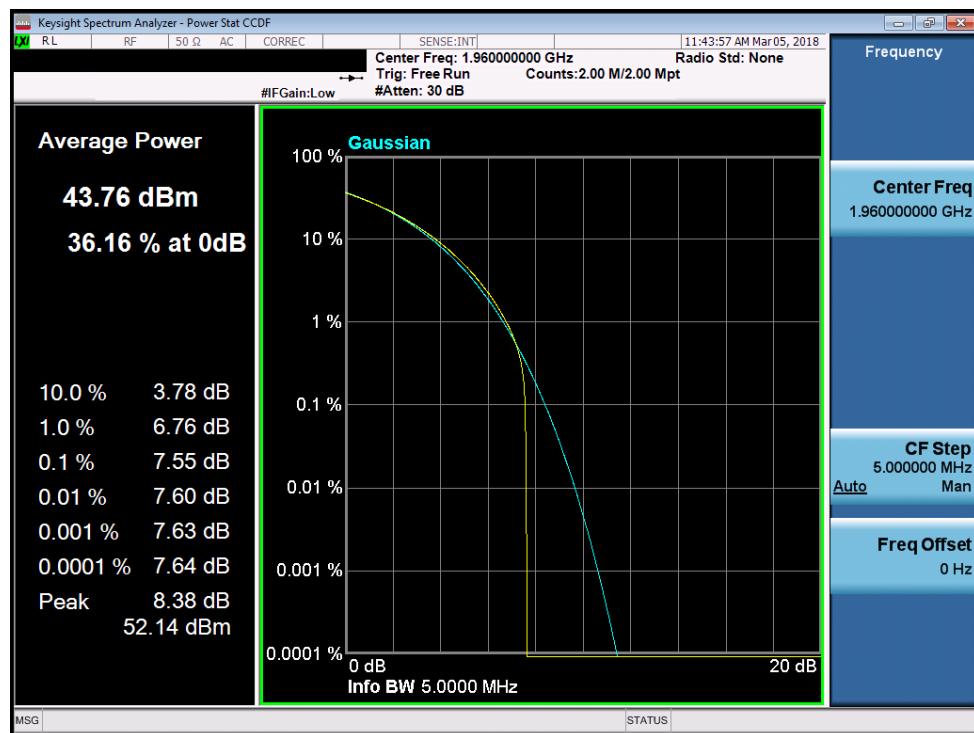


**Plot 7-437. PAR Plot (Band 2 - 5.0MHz 64-QAM)**

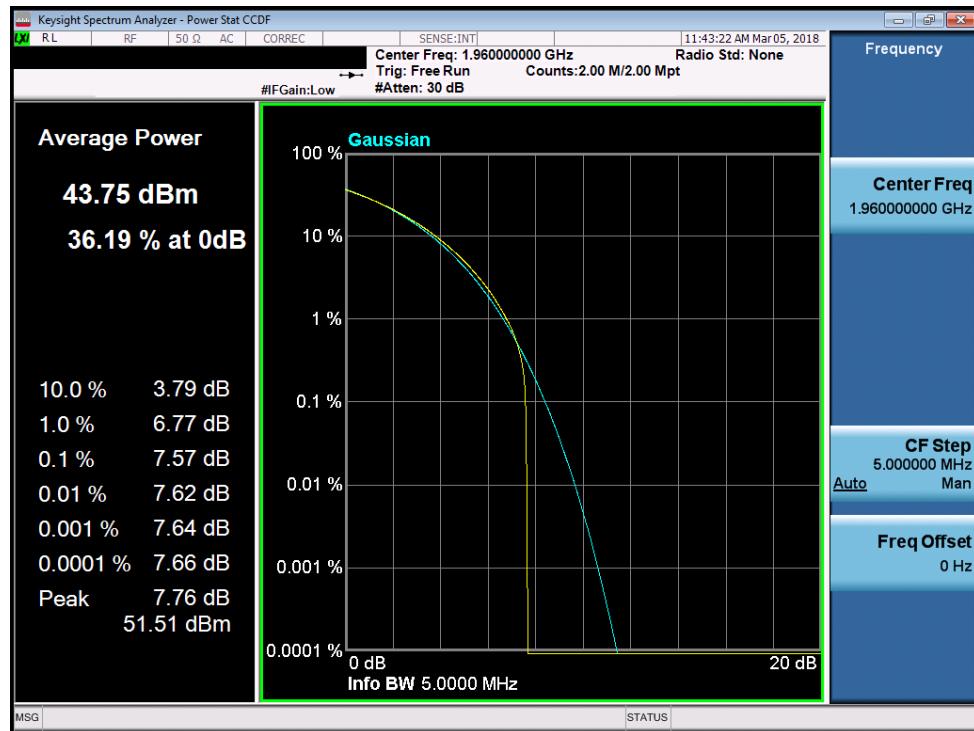


**Plot 7-438. PAR Plot (Band 2 - 5.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Tecore networks</b>	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 245 of 264

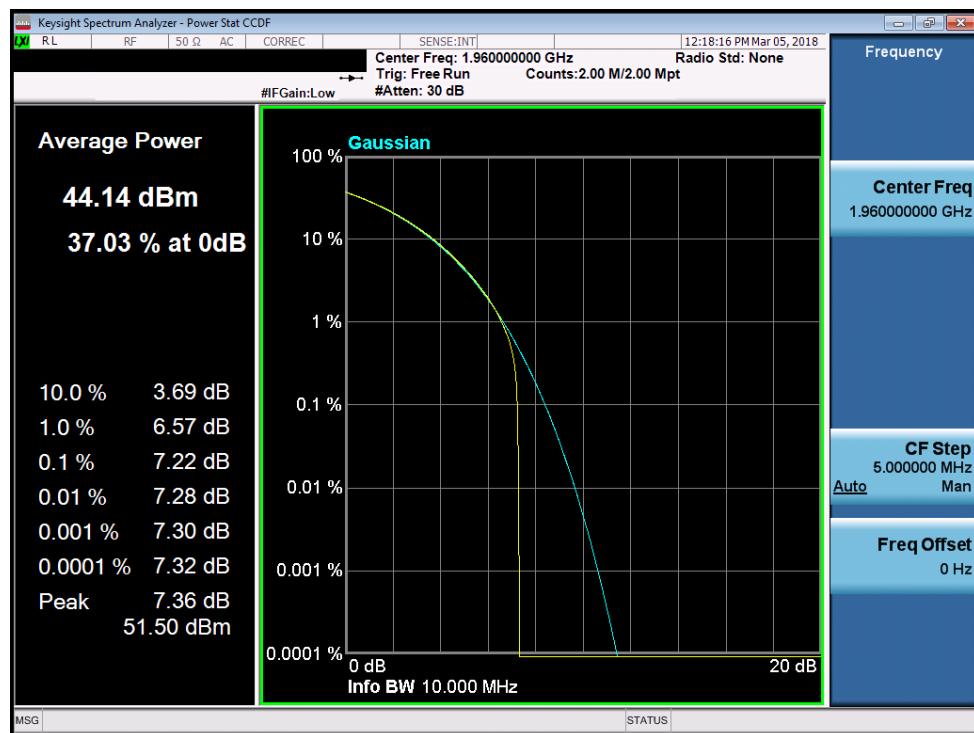


Plot 7-439. PAR Plot (Band 2 - 10.0MHz QPSK)

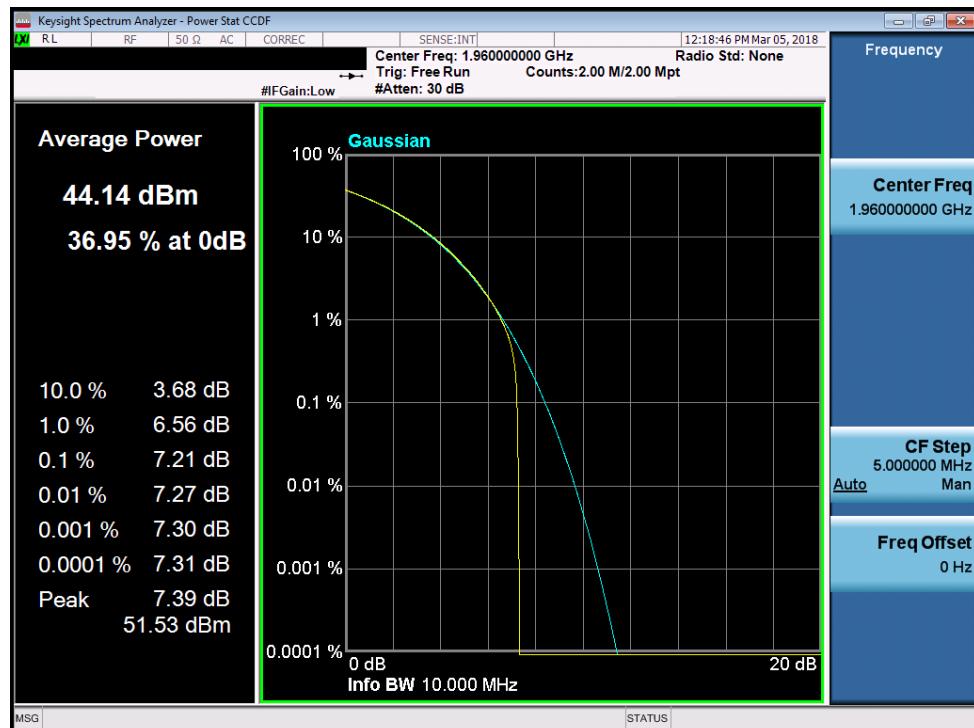


Plot 7-440. PAR Plot (Band 2 - 10.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 246 of 264

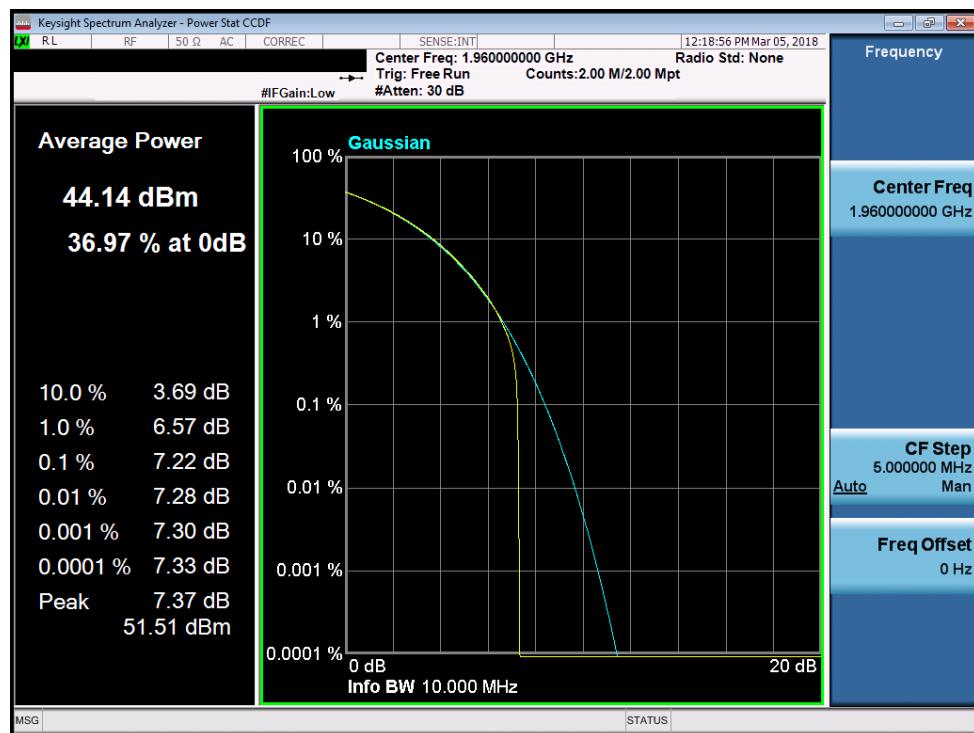


**Plot 7-441. PAR Plot (Band 2 - 10.0MHz 64-QAM)**

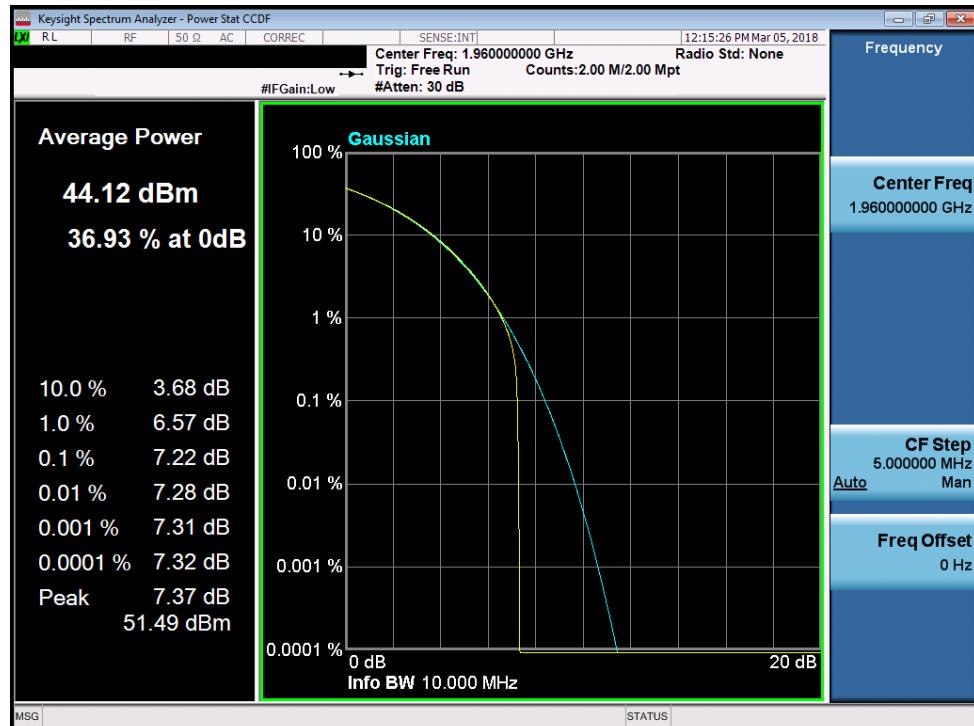


**Plot 7-442. PAR Plot (Band 2 - 10.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 247 of 264

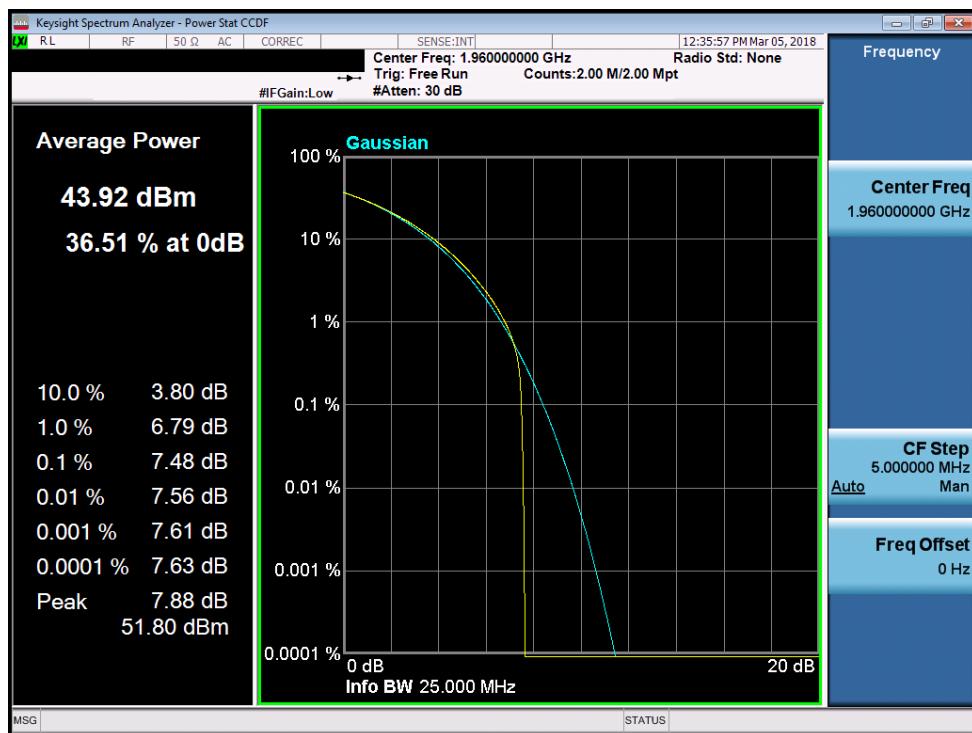


**Plot 7-443. PAR Plot (Band 2 - 15.0MHz QPSK)**

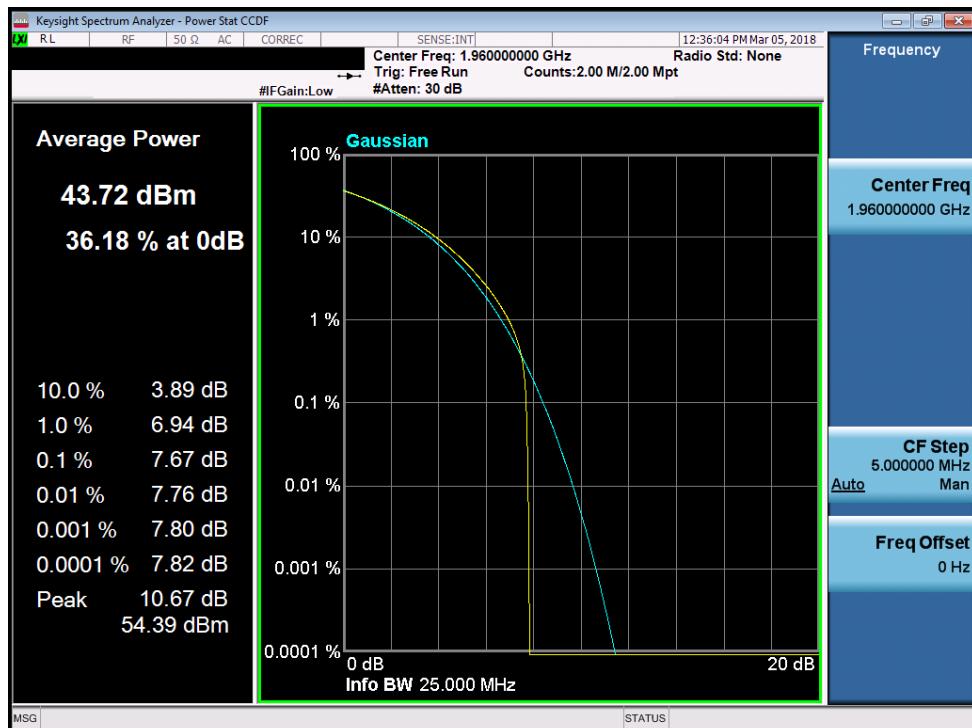


**Plot 7-444. PAR Plot (Band 2 - 15.0MHz 16-QAM)**

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Tecore networks</b>	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018		EUT Type: Remote Radio Head	Page 248 of 264	

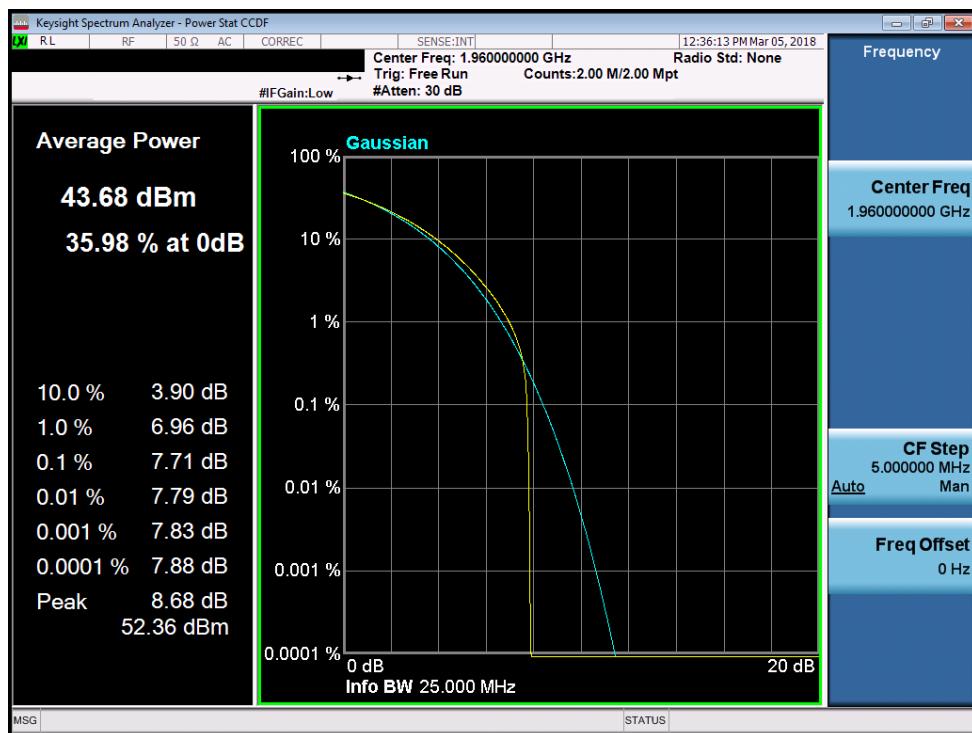


**Plot 7-445. PAR Plot (Band 2 - 15.0MHz 64-QAM)**

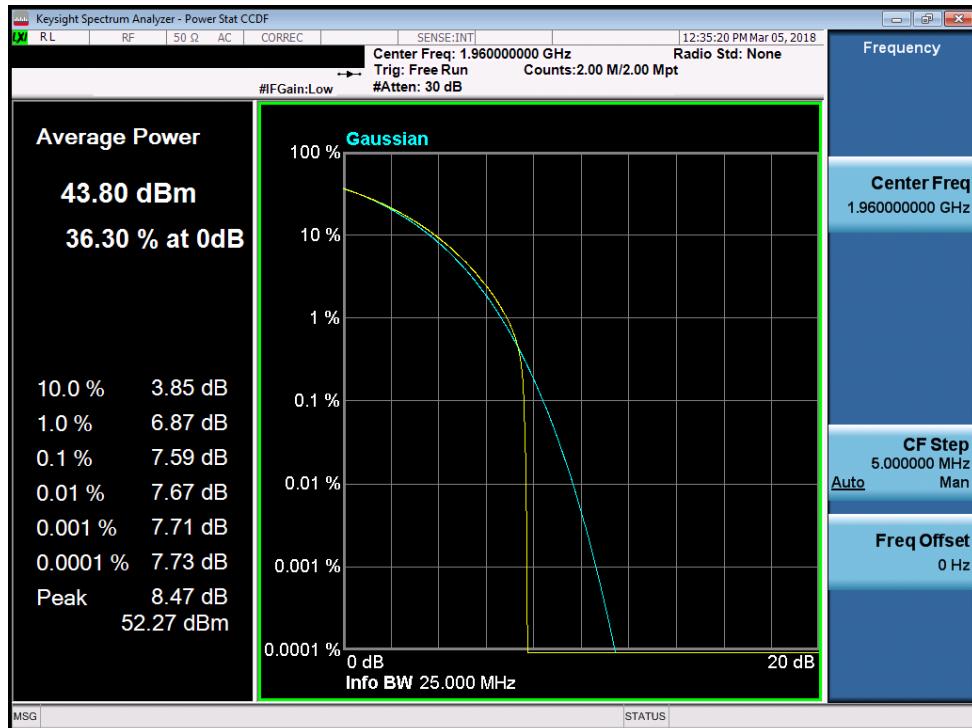


**Plot 7-446. PAR Plot (Band 2 - 15.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 249 of 264

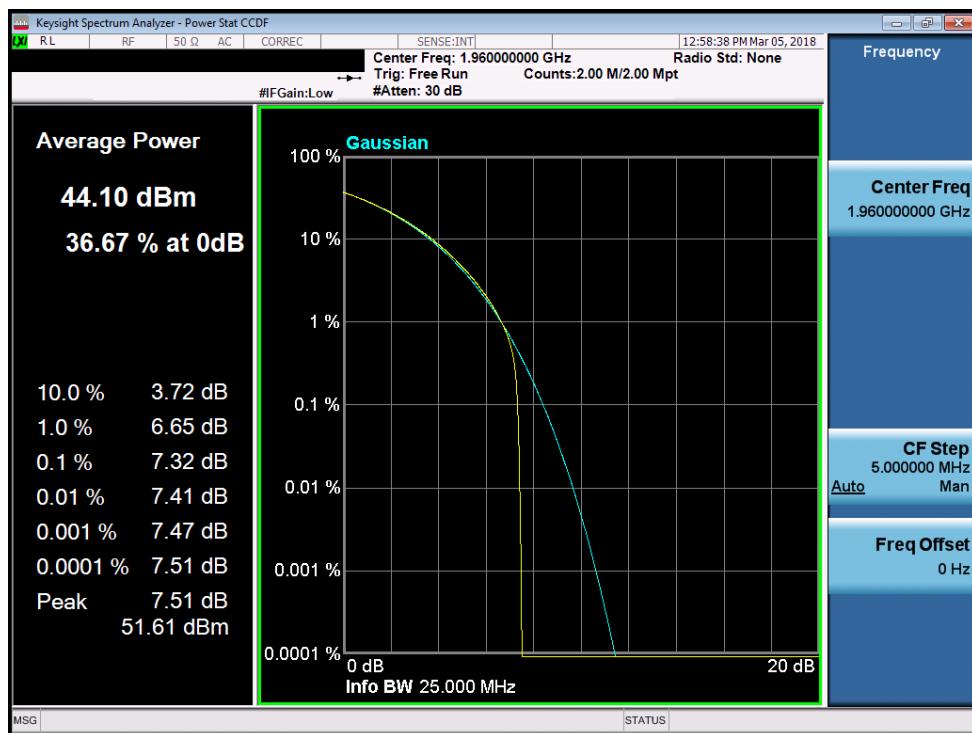


Plot 7-447. PAR Plot (Band 2 - 20.0MHz QPSK)

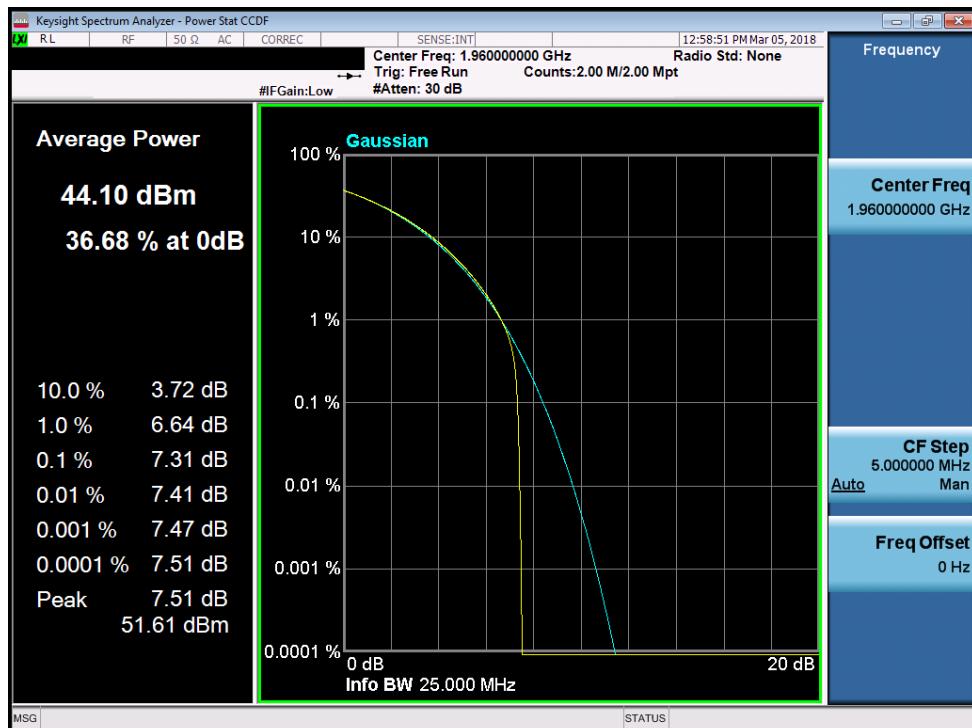


Plot 7-448. PAR Plot (Band 2 - 20.0MHz 16-QAM)

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		<b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 250 of 264	

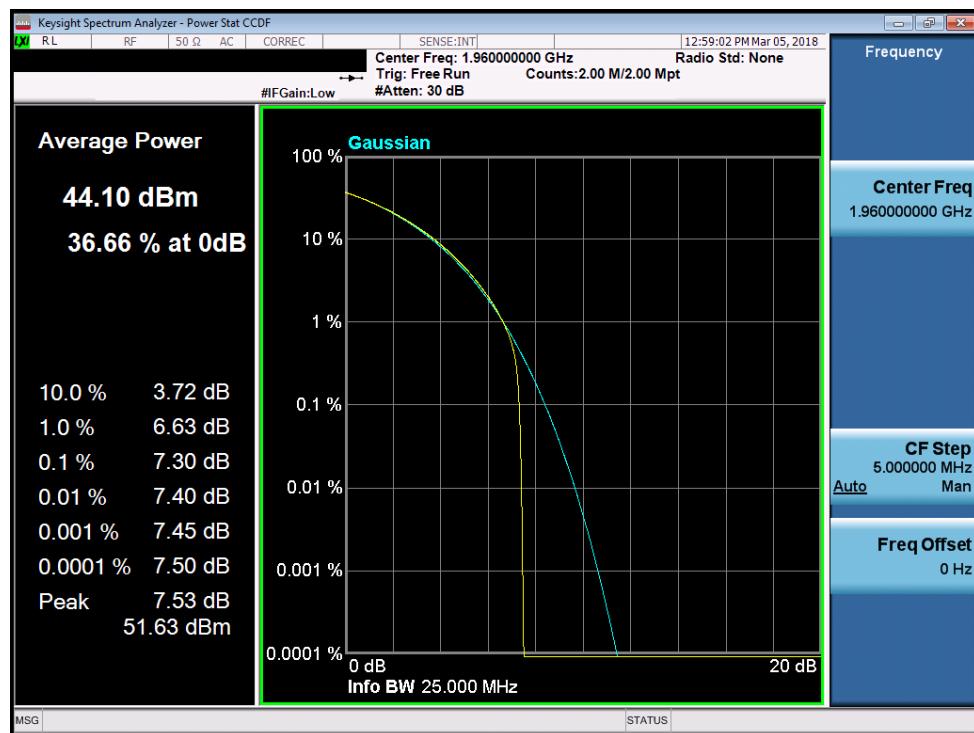

**Plot 7-449. PAR Plot (Band 2 - 20.0MHz 64-QAM)**

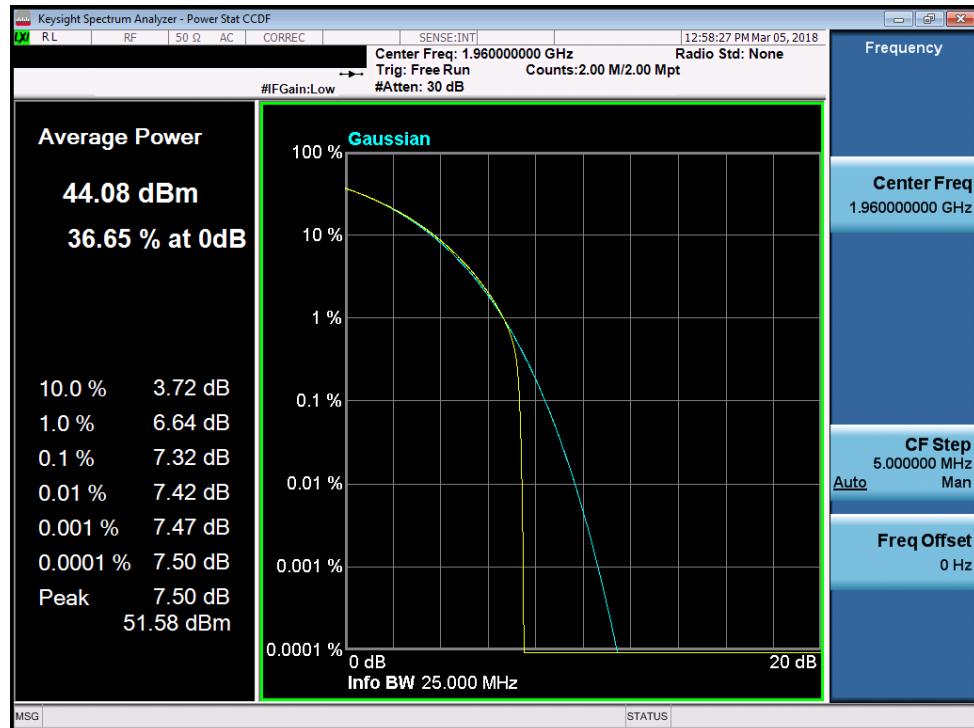

**Plot 7-450. PAR Plot (Band 2 - 20.0MHz 256-QAM)**

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 251 of 264

## 7.7 Radiated Spurious Emissions Measurements – Above 1GHz

§2.1053, §24.238(a)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the antenna output ports terminated in 50ohms while the EUT is transmitting at maximum power. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

### Test Procedures Used

KDB 971168 D01 v03 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 1MHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Max Hold
7. The trace was allowed to stabilize

FCC ID: QLJ4GRFN-002	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	 Tecore networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 252 of 264

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

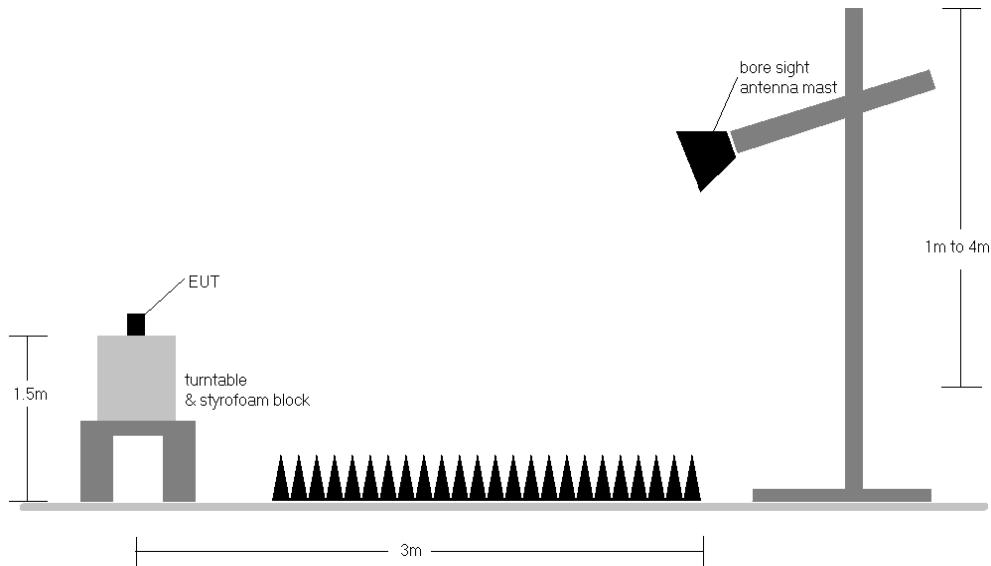


**Figure 7-5. Radiated Test Setup > 1GHz**

## Test Notes


- 1) The EUT was tested all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested while powered by a -48VDC power supply.
- 3) The EUT was tested while transmitting from both antenna ports simultaneously with both ports terminated in 50ohms.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: QLJ4GRFN-002	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 253 of 264

Band 2

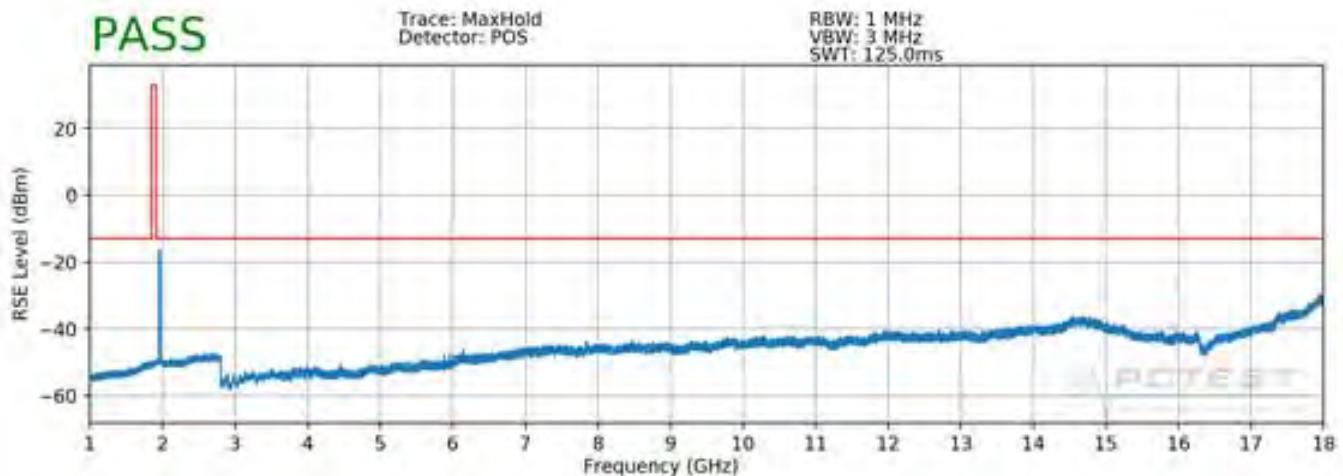

Plot 7-451. Radiated Spurious Plot 1-18GHz (Band 2 – Mid Channel - 5.0MHz QPSK, Ant. Pol. H)

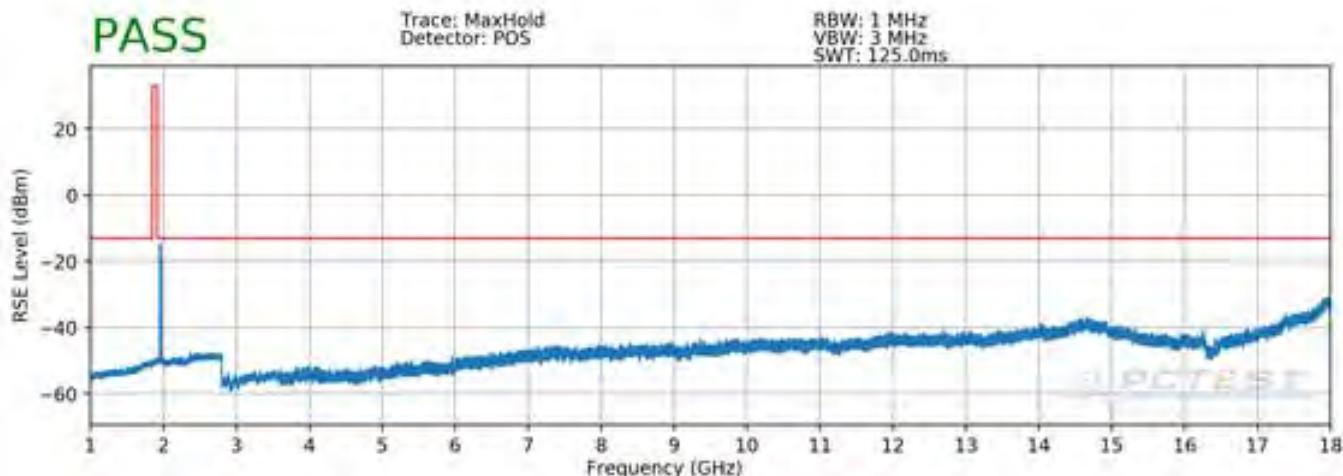


Plot 7-452. Radiated Spurious Plot 1-18GHz (Band 2 – Mid Channel - 5.0MHz QPSK, Ant. Pol. V)

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 254 of 264

© 2018 PCTEST Engineering Laboratory, Inc.

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

V 7.4 1/16/2018

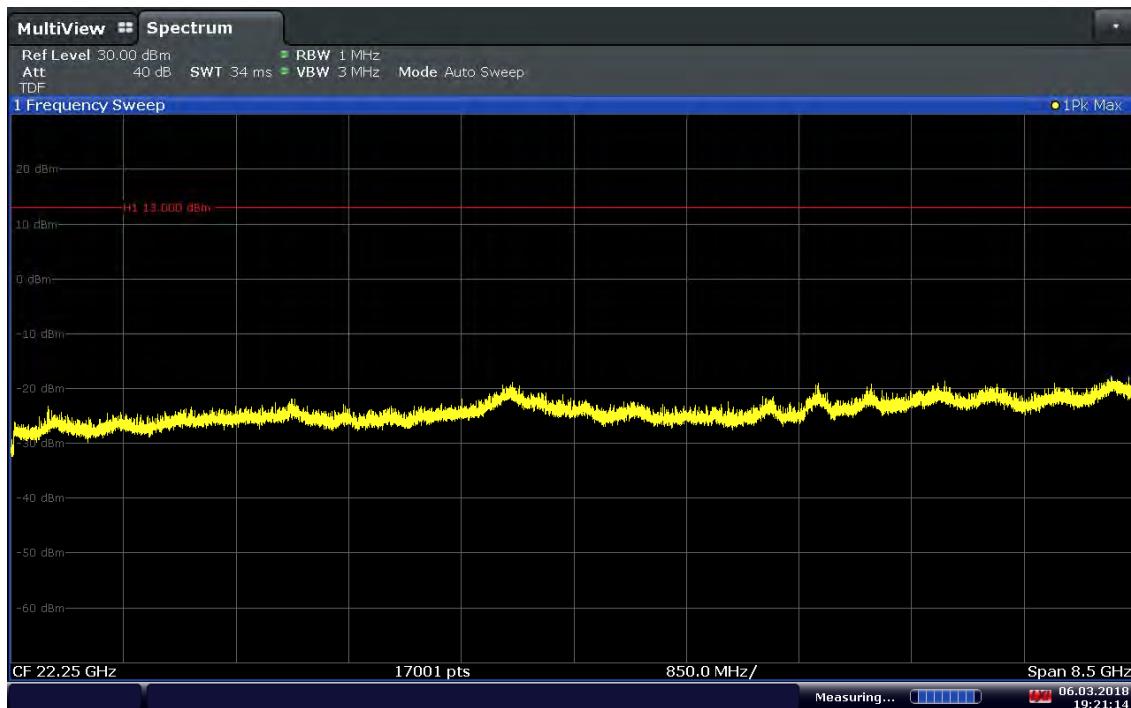

**Plot 7-453. Radiated Spurious Plot above 18GHz (Band 2 – Mid Channel - 5.0MHz QPSK, Ant. Pol. H)**



**Plot 7-454. Radiated Spurious Plot above 18GHz (Band 2 – Mid Channel - 5.0MHz QPSK, Ant. Pol. V)**

FCC ID: QLJ4GRFN-002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Tecore networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 255 of 264

OPERATING FREQUENCY: 1940.00 MHz  
 CHANNEL: 700  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3880.00	H	-	-	-69.57	9.18	-60.39	-47.4
5820.00	H	250	108	-65.05	13.34	-51.71	-38.7
7760.00	H	250	190	-54.36	10.39	-43.97	-31.0
9700.00	H	-	-	-56.86	8.06	-48.79	-35.8

**Table 7-3. Radiated Spurious Data (Band 2 – Low Channel)**

OPERATING FREQUENCY: 1960.00 MHz  
 CHANNEL: 900  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3920.00	H	-	-	-69.22	9.06	-60.16	-47.2
5880.00	H	250	122	-63.97	13.19	-50.78	-37.8
7840.00	H	250	193	-56.17	10.29	-45.88	-32.9
9800.00	H	-	-	-56.69	8.15	-48.55	-35.5

**Table 7-4. Radiated Spurious Data (Band 2 – Mid Channel)**

FCC ID: QLJ4GRFN-002	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	 <b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 256 of 264

OPERATING FREQUENCY: 1980.00 MHz  
 CHANNEL: 1100  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3960.00	H	-	-	-69.19	9.00	-60.18	-47.2
5940.00	H	167	152	-60.90	13.09	-47.82	-34.8
7920.00	H	107	200	-46.55	10.49	-36.06	-23.1
9900.00	H	-	-	-56.06	7.94	-48.13	-35.1

**Table 7-5. Radiated Spurious Data (Band 2 – High Channel)**

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 257 of 264

## 7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§2.1053, §24.238(a)

### Test Overview

Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

### Test Settings


#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: QLJ4GRFN-002	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	 <b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 258 of 264

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

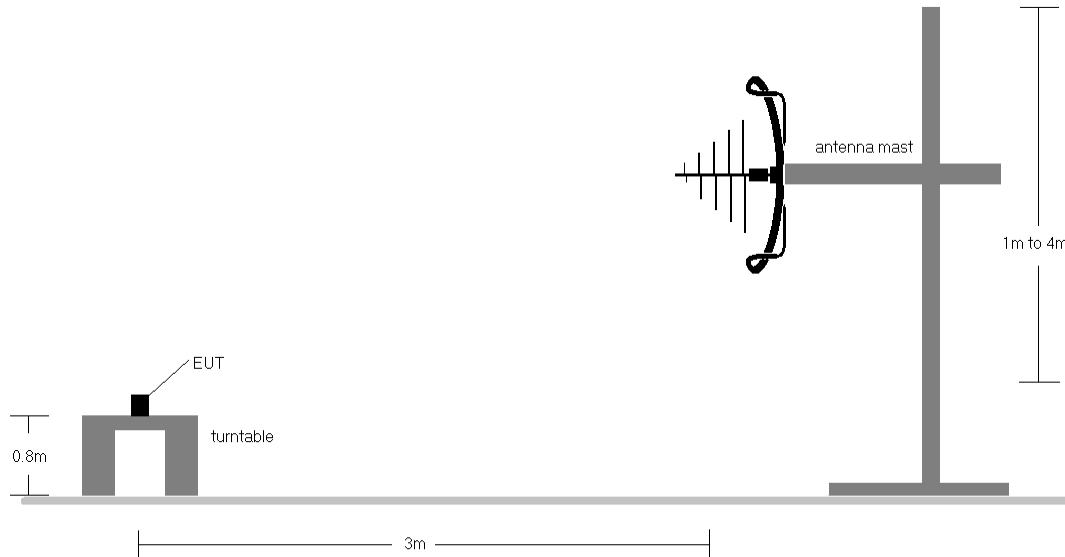


**Figure 7-6. Radiated Test Setup < 1GHz**


## Test Notes

- 1) The EUT was tested all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested while powered by a -48VDC power supply.
- 3) Emissions were measured at a 3m test distance.
- 4) The spectrum is measured from 30MHz to 1GHz. The worst-case emissions are reported.
- 5) The pre-scan plots below are performed using Max Hold traces but final measurements were made using Trace Averaging.

FCC ID: QLJ4GRFN-002	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Tecore</b> networks	Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 259 of 264

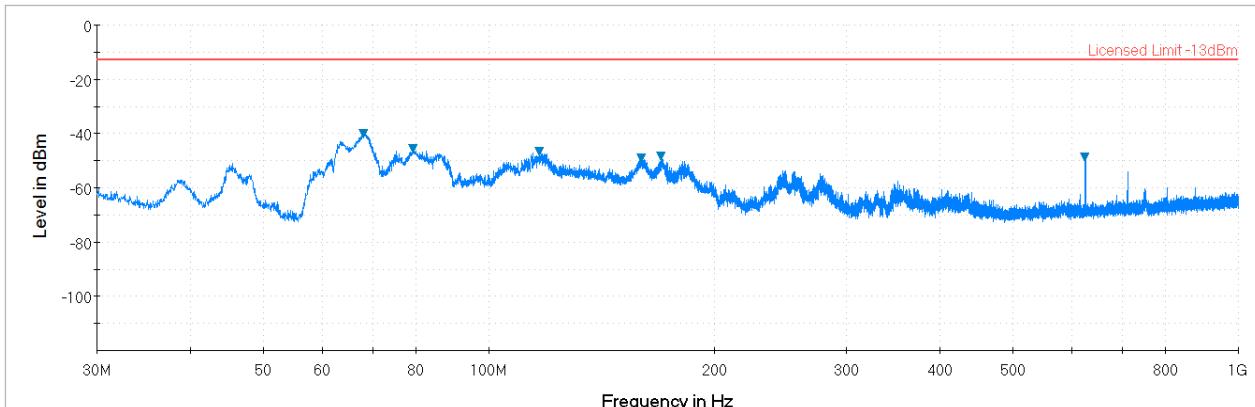

**Plot 7-455. Radiated Spurious Plot Below 1GHz (Band 2 – Mid Channel - 1.4MHz QPSK, Ant. Pol. H)**

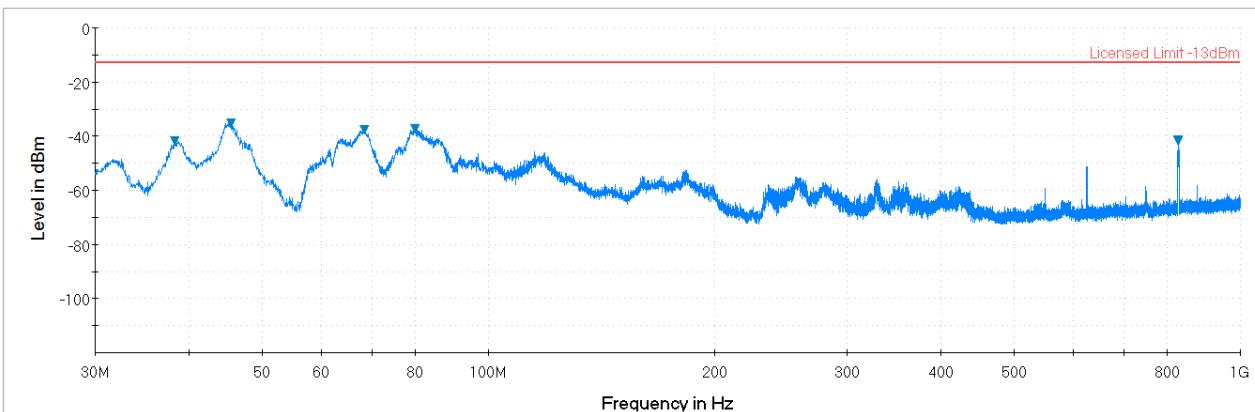

**Plot 7-456. Radiated Spurious Plot Below 1GHz (Band 2 – Mid Channel - 1.4MHz QPSK, Ant. Pol. V)**

OPERATING FREQUENCY: 1960.00 MHz  
 CHANNEL: 900  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
68.55	V	110	150	-37.46	-7.43	-44.89	-31.9
79.42	H	110	184	-44.39	-5.81	-50.20	-37.2
116.96	H	110	280	-40.88	-7.94	-48.82	-35.8
160.42	H	110	210	-46.88	-4.76	-51.64	-38.6
170.21	V	100	153	-47.32	-3.54	-50.86	-37.9
625.05	H	110	287	-51.44	0.34	-51.10	-38.1

**Plot 7-457. Radiated Spurious Data Below 1GHz**

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 260 of 264

## 7.9 Frequency Stability / Temperature Variation

[\\$2.1055, \\$24.235](#)

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the supply voltage. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI C63.26-2015 Section 5.6

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 261 of 264

© 2018 PCTEST Engineering Laboratory, Inc.

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

V 7.4 1/16/2018

## Band 2 Frequency Stability Measurements

[\\$2.1055](#), [\\$24.235](#)

OPERATING FREQUENCY: 1,960,000,000 Hz

CHANNEL: 900

REFERENCE VOLTAGE: -48.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	-48.00	+ 20 (Ref)	1,959,999,230	-770	-0.0000393
100 %		- 30	1,959,998,240	-1,760	-0.0000898
100 %		- 20	1,960,001,290	1,290	0.0000658
100 %		- 10	1,960,000,690	690	0.0000352
100 %		0	1,959,998,820	-1,180	-0.0000602
100 %		+ 10	1,959,998,860	-1,140	-0.0000582
100 %		+ 20	1,960,001,240	1,240	0.0000633
100 %		+ 30	1,959,998,340	-1,660	-0.0000847
100 %		+ 40	1,960,000,440	440	0.0000224
100 %		+ 50	1,960,000,310	310	0.0000158
85 %		+ 20	1,960,000,069	69	0.0000035
115 %		+ 20	1,960,000,247	247	0.0000126

Table 7-6. Frequency Stability Data (Band 2)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore, the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: QLJ4GRFN-002		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head		Page 262 of 264

## Band 2 Frequency Stability Measurements

[\\$2.1055](#), [\\$24.235](#)

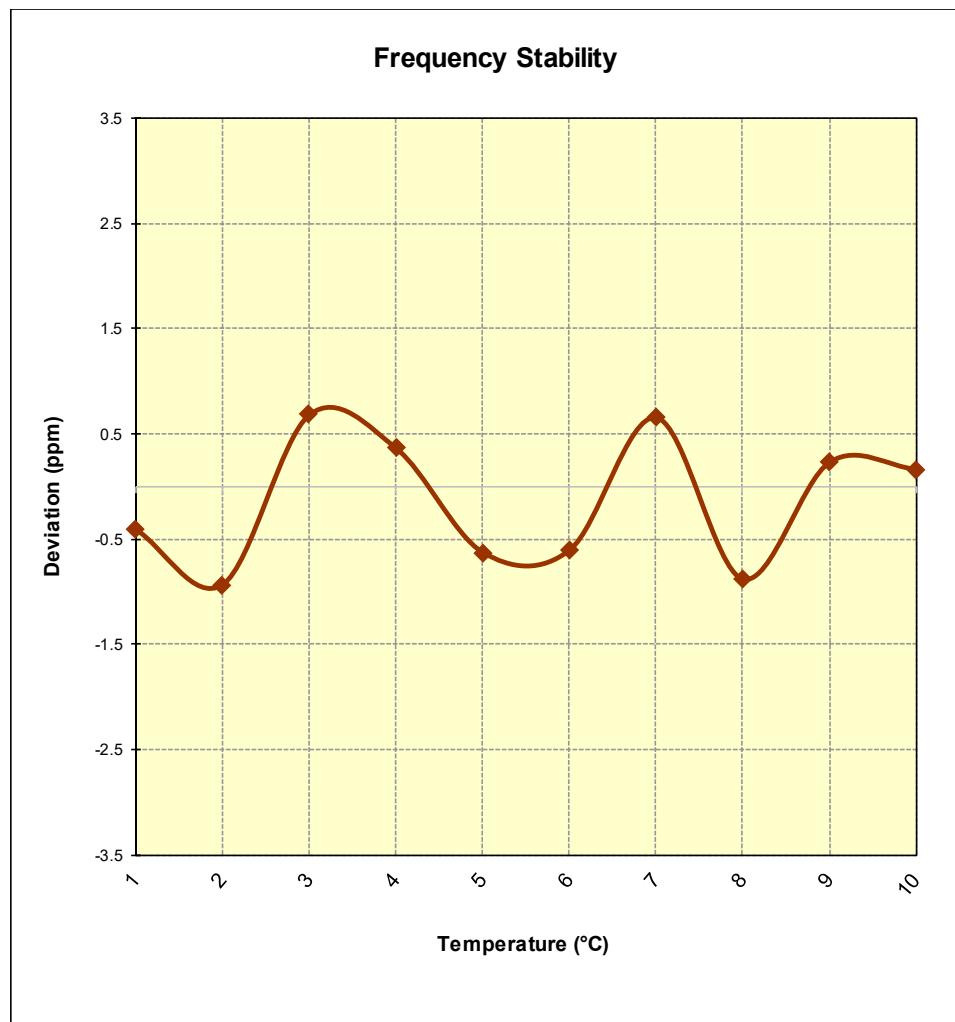


Figure 7-7. Frequency Stability Graph (Band 2)

FCC ID: QLJ4GRFN-002	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 263 of 264

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Tecore Networks Remote Radio Head** FCC ID: **QLJ4GRFN-002** complies with all the requirements of Part 24 of the FCC Rules for LTE operation only.

FCC ID: QLJ4GRFN-002	 <b>MEASUREMENT REPORT</b> (CERTIFICATION)		 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1801290011-03-R1.QLJ	Test Dates: 3/2-3/5/2018	EUT Type: Remote Radio Head	Page 264 of 264