

PART 27 MEASUREMENT REPORT

Applicant Name:
 Tecore Networks
 7030 Hi Tech Drive
 Hanover, MD 21076
 USA

Date of Testing:
 03/06 – 04/13/2022
Test Report Issue Date:
 05/12/2022
Test Site/Location:
 Element Lab., Columbia, MD, USA
Test Report Serial No.:
 1M2203150034-01-R1.QLJ

| | |
|------------------------|------------------------|
| FCC ID: | QLJMRU-19212326 |
| Applicant Name: | Tecore Networks |

Application Type: Class II Permissive Change
Model: MRU-20W19212326
EUT Type: Mid Band mRU
FCC Classification: PCS Licensed Transmitter (PCB)
FCC Rule Part: 27
Test Procedure(s): ANSI C63.26-2015, KDB 648474 D03 v01r04
Original Grant Date: 11/11/2021
Class II Permissive Change: See FCC Change Document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

his revised Test Report (S/N: 1M2203150034-01-R1.QLJ) supersedes and replaces the previously issued test report (S/N: 1M2203150034-01.QLJ) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President





| | | | |
|--|---|---|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 1 of 44 |

TABLE OF CONTENTS


| | | |
|-----|--|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope | 4 |
| 1.2 | Element Test Location..... | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION..... | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Test Configuration | 5 |
| 2.4 | EMI Suppression Device(s)/Modifications | 5 |
| 3.0 | DESCRIPTION OF TESTS | 6 |
| 3.1 | Evaluation Procedure | 6 |
| 3.2 | Radiated Power and Radiated Spurious Emissions | 6 |
| 4.0 | MEASUREMENT UNCERTAINTY | 7 |
| 5.0 | TEST EQUIPMENT CALIBRATION DATA | 8 |
| 6.0 | SAMPLE CALCULATIONS | 9 |
| 7.0 | TEST RESULTS | 10 |
| 7.1 | Summary | 10 |
| 7.2 | Transmitter Conducted Output Power / Equivalent Isotropic Radiated Power (LTE Band 30) | 11 |
| 7.3 | Occupied Bandwidth | 18 |
| 7.4 | Spurious and Harmonic Emissions at Antenna Terminal | 21 |
| 7.5 | Band Edge Emissions at Antenna Terminal..... | 24 |
| 7.6 | Peak-Average Ratio | 34 |
| 7.7 | Radiated Spurious Emissions Measurements..... | 37 |
| 7.8 | Frequency Stability / Temperature Variation | 42 |
| 8.0 | CONCLUSION..... | 44 |

| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 2 of 44 |

PART 27 MEASUREMENT REPORT

| Mode | Bandwidth | Modulation | Tx Frequency Range [MHz] | Conducted Power | | Emission Designator |
|-------------|-----------|------------|--------------------------|-----------------|------------------|---------------------|
| | | | | Max. Power [W] | Max. Power [dBm] | |
| LTE Band 30 | 10 MHz | QPSK | 2355.0 | 21.727 | 43.37 | 8M99G7D |
| | | QAM | 2355.0 | 21.478 | 43.32 | 9M05W7D |
| | 5 MHz | QPSK | 2352.5 - 2357.5 | 21.478 | 43.32 | 4M51G7D |
| | | QAM | 2352.5 - 2357.5 | 21.677 | 43.36 | 4M51W7D |

EUT Overview

| | | | |
|---|---|---|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 3 of 44 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


1.2 Element Test Location

These measurement tests were conducted at the Element Laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.


| | | | | |
|---|---|---------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 4 of 44 | |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Tecore Mid Band mRU FCC ID: QLJMRU-19212326**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27. The EUT generates LTE signal using QPSK, 16-QAM, 64-QAM, and 256-QAM modulations. The EUT can transmit three different LTE mid band signals at the same time with its single antenna port. The signal output level is set to 20W output per band for a total of 60W output from the antenna port and it is fed via a low loss cable to the input of a spectrum analyzer or a 50Ω load, depending on the type of testing performed. EUT was set up to operate as shown below with a 120 VAC power source. Server equipment was used to control the RF functions of the EUT.

Test Device Serial No.: 20270009, 20270007, 20270005
Software Revision: mRU 8.0
Firmware: MRAN_015

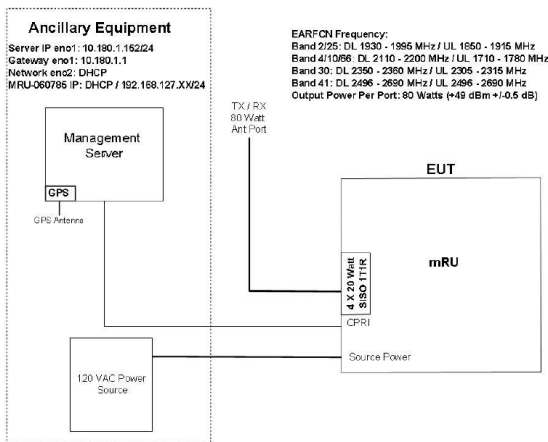

2.2 Device Capabilities

This device contains the following capabilities:


Multi-Band LTE

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

| | | | |
|---|---|---|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 5 of 44 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:


$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.


Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

| | | | | |
|---|---|---------------------------|---|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | | Page 6 of 44 |

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | |
|---|---|---|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 7 of 44 |

5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|---------|-----------------------------------|------------|--------------|------------|---------------|
| ETS-Lindgren | 3164-10 | Quad Ridge Horn 400MHz - 10000MHz | 5/10/2021 | Biennial | 5/10/2023 | 166283 |
| EMCO | 3115 | Horn Antenna (1-18GHz) | 6/18/2020 | Biennial | 6/18/2022 | 9704-5182 |
| N/A | AP2-001 | EMC Cable and Switch System | 1/4/2022 | Annual | 1/4/2023 | AP2-001 |
| N/A | AP2-002 | EMC Cable and Switch System | 1/4/2022 | Annual | 1/4/2023 | AP2-002 |
| N/A | ETS-001 | EMC Cable and Switch System | 12/9/2021 | Annual | 12/9/2022 | ETS-001 |
| N/A | ETS-002 | EMC Cable and Switch System | 12/10/2021 | Annual | 12/10/2022 | ETS-002 |
| N/A | LTx1 | Licensed Transmitter Cable Set | 12/19/2021 | Annual | 12/19/2022 | LTx1 |
| N/A | LTx2 | Licensed Transmitter Cable Set | 12/19/2021 | Annual | 12/19/2022 | LTx2 |
| Keysight Technologies | N9030A | PXA Signal Analyzer (44GHz) | 2/14/2022 | Annual | 2/14/2023 | MY52350166 |
| Rohde & Schwarz | ESW44 | EMI Test Receiver 2Hz to 44 GHz | 1/21/2021 | Annual | 3/21/2022 | 101716 |
| Sunol Sciences | JB5 | Bi-Log Antenna (30M-5GHz) | 7/27/2020 | Biennial | 7/27/2022 | A051107 |
| Espec | SH-241 | Temperature Chamber | 7/2/2020 | Biennial | 7/2/2022 | 92014051 |

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | | |
|---|---|---------------------------|---|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 8 of 44 | |

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated


7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

| | | | |
|---|---|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 9 of 44 |

7.0 TEST RESULTS

7.1 Summary


Company Name: Tecore Networks
 FCC ID: QLJMRU-19212326
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE

| Test Condition | Test Description | FCC Part Section(s) | Test Limit | Test Result | Reference |
|------------------|--|----------------------------|--|-------------|-------------------|
| CONDUCTED | Transmitter Conducted Output Power / Equivalent Isotropic Radiated Power (LTE Band 30) | 2.1046, 27.50 (a)(1)(i)(A) | $\leq 2000\text{W}/5\text{MHz}$ and $\leq 400\text{W}/1\text{MHz}$ | PASS | Section 7.2 |
| | Occupied Bandwidth | 2.1049(h) | N/A | PASS | Section 7.3 |
| | Conducted Band Edge / Spurious Emissions (LTE Band 30) | 2.1051, 27.53(a)(1) | Undesirable emissions must meet the limits detailed in 27.53(a)(1) | PASS | Sections 7.4, 7.5 |
| | Peak-to-Average Ratio (LTE Band 30) | 27.50(a)(1)(i)(B) | 13dB | PASS | Section 7.6 |
| | Frequency Stability | 2.1055, 27.54 | Fundamental emissions stay within authorized frequency block | PASS | Section 7.8 |
| RADIATED | Radiated Spurious Emissions (LTE Band 30) | 2.1053, 27.53(a)(1) | $\geq 75 + 10 \log (P)$ | PASS | Section 7.7 |

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool Ver. 1.1.
- 5) For the Radiated Emissions test, the EUT was tested for case radiated spurious emissions with the antenna port terminated in 50 ohms while the EUT was set to transmit from antenna port (1 x 20W) at maximum power.

| | | | |
|---|---|---|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 10 of 44 |

7.2 Transmitter Conducted Output Power / Equivalent Isotropic Radiated Power (LTE Band 30)

Test Overview

The EUT was set to transmit in all four available modulations of LTE mode at the maximum output power of 20W for all bands through a management server. The output terminal of the EUT was connected through a calibrated cable and 30 dB of external attenuation to a signal analyzer. The signal analyzers' "Channel Power" function was used to measure the conducted output powers in accordance with the guidance of KDB 971168 D01 v03r01.

For Band 30, the maximum allowed EIRP is 2000W/5MHz and also 400W/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.4

Test Settings

1. Span = 2 - 3 times the OBW
2. RBW = 1 MHz
3. VBW \geq 3 MHz
4. No. of sweep points \geq 2 x span / RBW
5. Sweep time = auto-couple
6. Detector = RMS
7. Trace mode = trace averaging (RMS) over 100 sweeps
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





Figure 7-1. Test Instrument & Measurement Setup

Test Notes

A full bandwidth channel measurement is used to address the 2,000W/5MHz requirement.

| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 11 of 44 |

LTE Band 30 – 2000W/5MHz Compliance


| Bandwidth | Modulation | Frequency [MHz] | RB Size/Offset | Conducted Power [dBm] | Ant Gain [dBi] | EIRP [dBm] | EIRP [Watts] | EIRP Limit [dBm/5MHz] | Margin [dB] |
|-----------|------------|-----------------|----------------|-----------------------|----------------|------------|--------------|-----------------------|-------------|
| 10 MHz | QPSK | 2355.0 | 50 / 0 | 43.37 | 15.00 | 58.37 | 687.07 | 63.01 | -4.64 |
| | 16-QAM | 2355.0 | 50 / 0 | 43.32 | 15.00 | 58.32 | 679.57 | 63.01 | -4.69 |
| | 64-QAM | 2355.0 | 50 / 0 | 43.28 | 15.00 | 58.28 | 672.22 | 63.01 | -4.73 |
| | 256-QAM | 2355.0 | 50 / 0 | 43.32 | 15.00 | 58.32 | 678.65 | 63.01 | -4.69 |
| 5 MHz | QPSK | 2352.5 | 25 / 0 | 43.31 | 15.00 | 58.31 | 677.80 | 63.01 | -4.70 |
| | | 2355.0 | 25 / 0 | 43.00 | 15.00 | 58.00 | 630.87 | 63.01 | -5.01 |
| | | 2357.5 | 25 / 0 | 43.32 | 15.00 | 58.32 | 679.20 | 63.01 | -4.69 |
| | 16-QAM | 2357.5 | 25 / 0 | 43.27 | 15.00 | 58.27 | 671.43 | 63.01 | -4.74 |
| | 64-QAM | 2357.5 | 25 / 0 | 43.36 | 15.00 | 58.36 | 684.89 | 63.01 | -4.65 |
| | 256-QAM | 2357.5 | 25 / 0 | 43.24 | 15.00 | 58.24 | 667.38 | 63.01 | -4.77 |

Table 7-2. Conducted Output Power / Equivalent Isotropic Radiated Power (LTE Band 30) – 2000W/5MHz Limit


LTE Band 30 – 400W/1MHz Compliance

| Bandwidth | Modulation | Frequency [MHz] | RB Size/Offset | Conducted Power [dBm/MHz] | Ant Gain [dBi] | EIRP [dBm/MHz] | EIRP [Watts/MHz] | EIRP Limit [dBm/MHz] | Margin [dB] |
|-----------|------------|-----------------|----------------|---------------------------|----------------|----------------|------------------|----------------------|-------------|
| 10 MHz | QPSK | 2355.0 | 50/0 | 35.20 | 15.00 | 50.20 | 104.71 | 56.02 | -5.82 |
| | 16-QAM | 2355.0 | 50/0 | 35.67 | 15.00 | 50.67 | 116.65 | 56.02 | -5.35 |
| | 64-QAM | 2355.0 | 50/0 | 35.87 | 15.00 | 50.87 | 122.18 | 56.02 | -5.15 |
| | 256-QAM | 2355.0 | 50/0 | 35.24 | 15.00 | 50.24 | 105.73 | 56.02 | -5.78 |
| 5 MHz | QPSK | 2352.5 | 25/0 | 38.31 | 15.00 | 53.31 | 214.24 | 56.02 | -2.71 |
| | | 2355.0 | 25/0 | 38.37 | 15.00 | 53.37 | 217.32 | 56.02 | -2.65 |
| | | 2357.5 | 25/0 | 38.25 | 15.00 | 53.25 | 211.35 | 56.02 | -2.77 |
| | 16-QAM | 2355.0 | 25/0 | 38.59 | 15.00 | 53.59 | 228.72 | 56.02 | -2.43 |
| | 64-QAM | 2355.0 | 25/0 | 38.72 | 15.00 | 53.72 | 235.50 | 56.02 | -2.30 |
| | 256-QAM | 2357.5 | 25/0 | 38.34 | 15.00 | 53.34 | 215.92 | 56.02 | -2.68 |


Table 7-3. Conducted Output Power / Equivalent Isotropic Radiated Power (LTE Band 30) – 400W/MHz Limit

| | | | |
|---|---|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 12 of 44 |

LTE Band 30 – 400W/1MHz Compliance

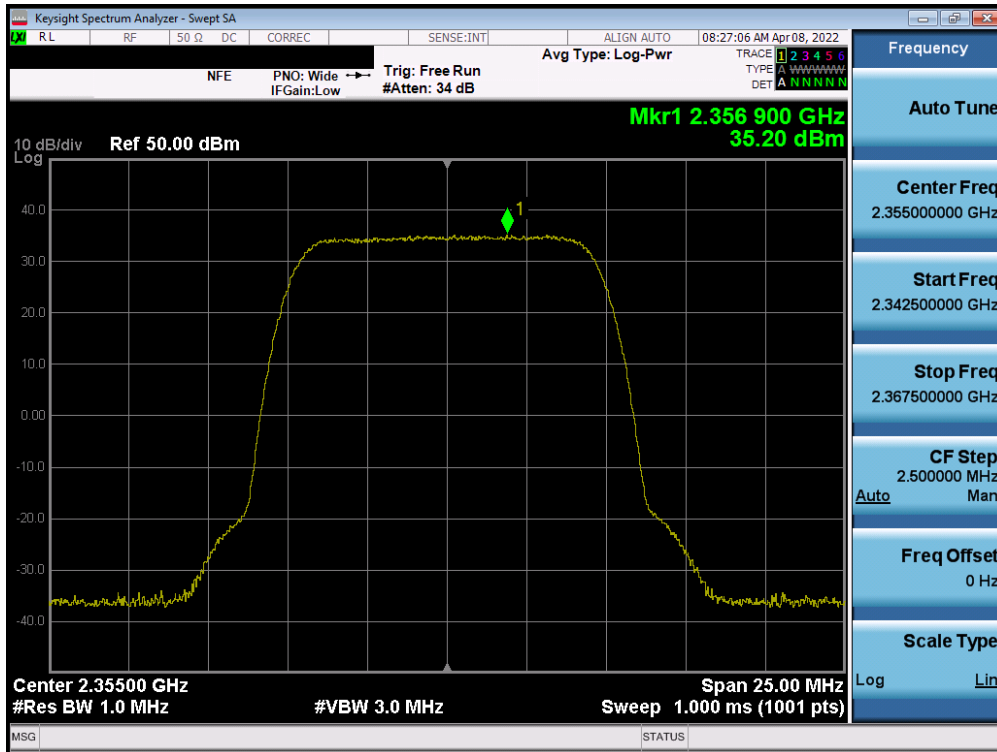


Plot 7-1. Power Spectral Density Plot (LTE Band 30 - 10MHz QPSK, Mid Channel)

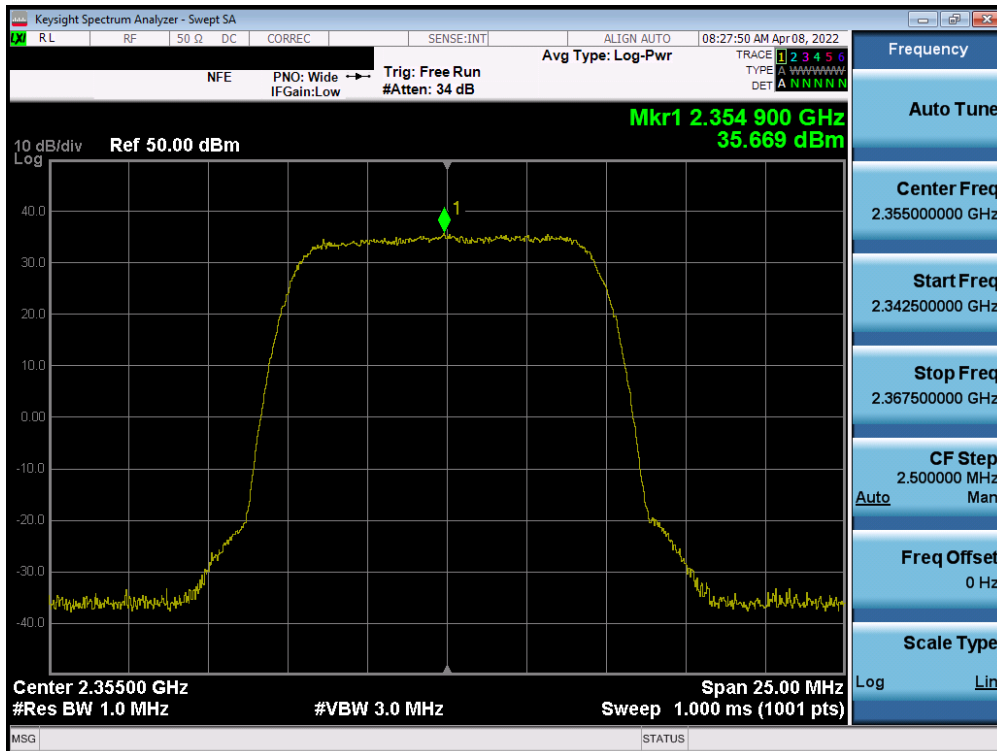


Plot 7-2. Power Spectral Density Plot (LTE Band 30 - 10MHz 16-QAM, Mid Channel)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 13 of 44 |

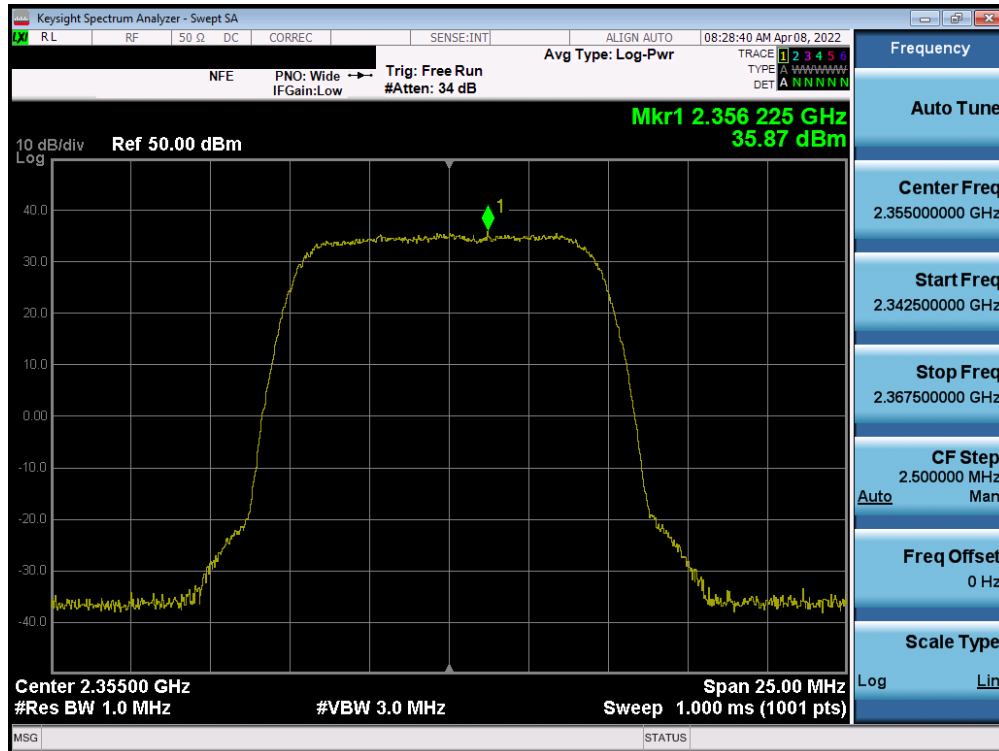


Plot 7-3. Power Spectral Density Plot (LTE Band 30 - 10MHz 64-QAM, Mid Channel)

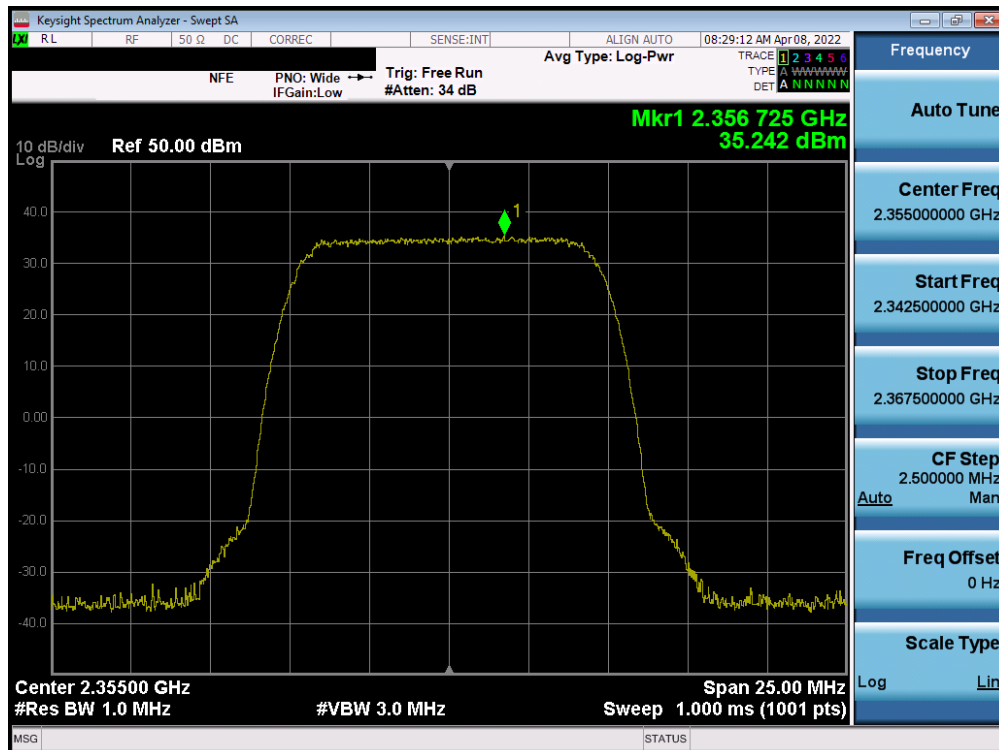


Plot 7-4. Power Spectral Density Plot (LTE Band 30 - 10MHz 256-QAM, Mid Channel)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 14 of 44 |

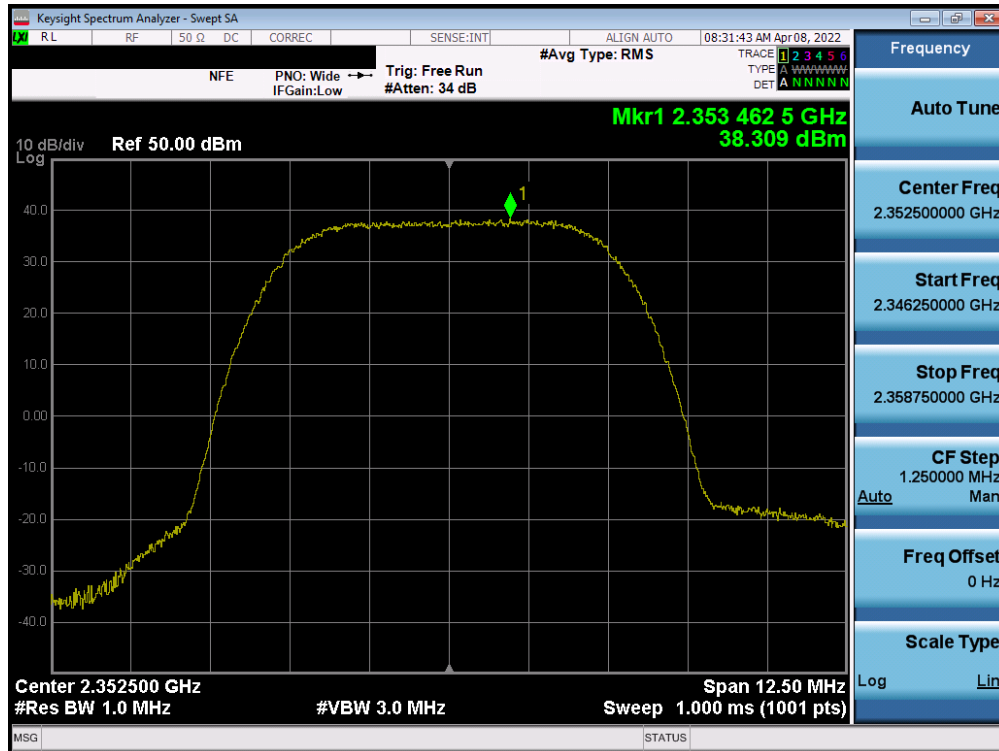


Plot 7-5. Power Spectral Density Plot (LTE Band 30 - 5MHz QPSK, Low Channel)

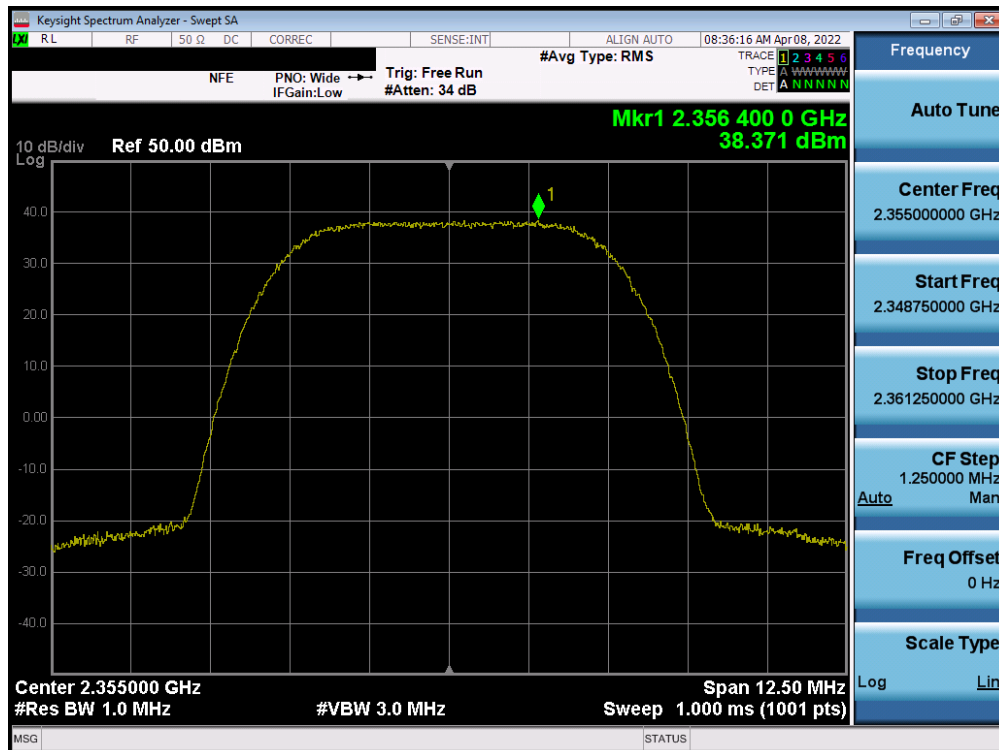


Plot 7-6. Power Spectral Density Plot (LTE Band 30 - 5MHz QPSK, Mid Channel)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 15 of 44 |

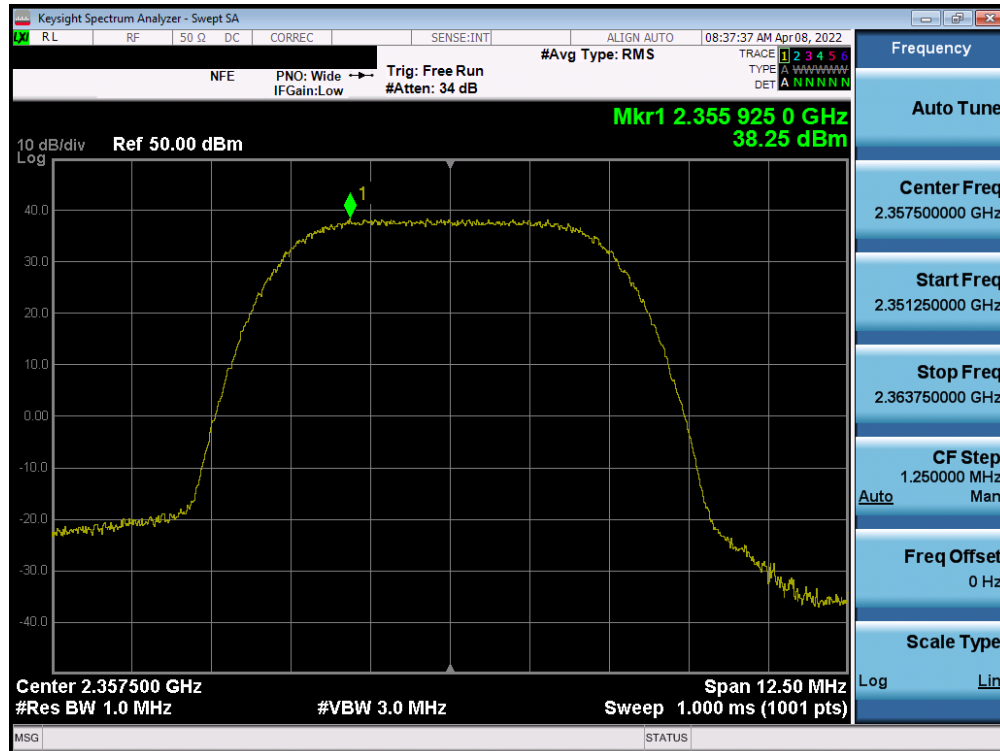


Plot 7-7. Power Spectral Density Plot (LTE Band 30 - 5MHz QPSK, High Channel)

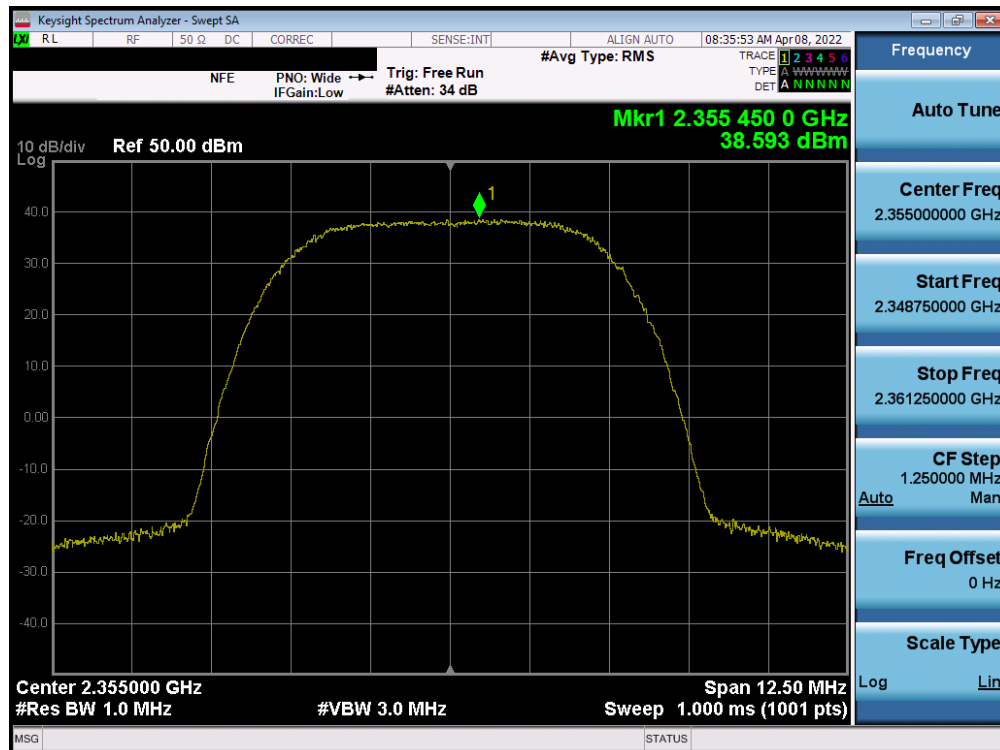


Plot 7-8. Power Spectral Density Plot (LTE Band 30 - 5MHz 16-QAM, Mid Channel)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 16 of 44 |

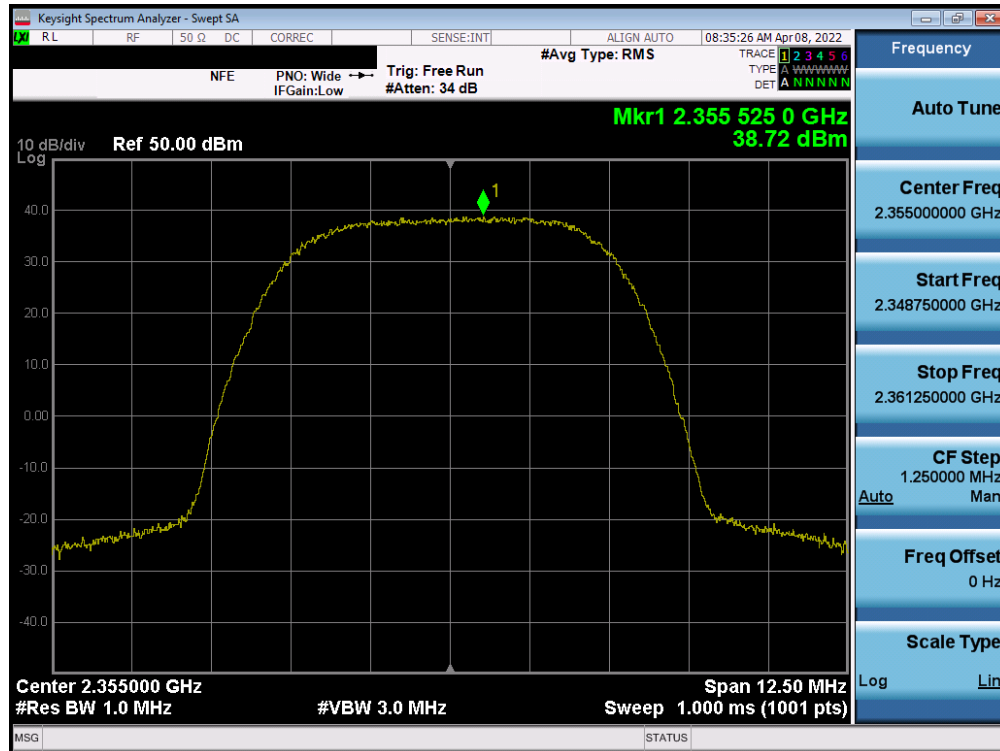

Plot 7-9. Power Spectral Density Plot (LTE Band 30 - 5MHz 64-QAM, Mid Channel)

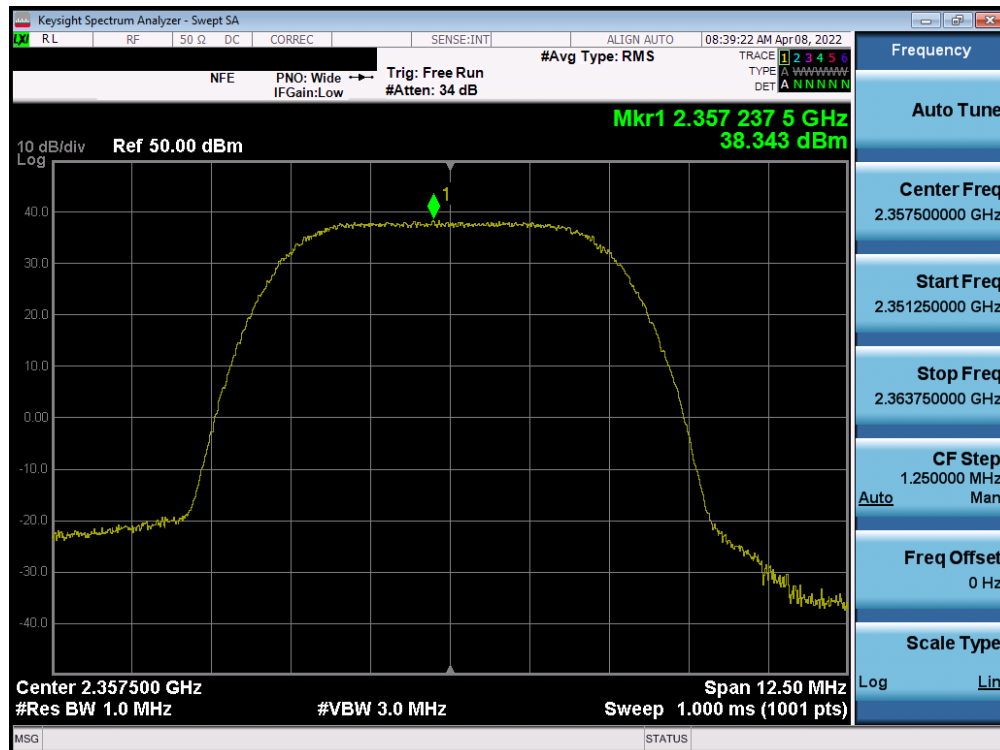

Plot 7-10. Power Spectral Density Plot (LTE Band 30 - 5MHz 256-QAM, High Channel)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 17 of 44 |

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





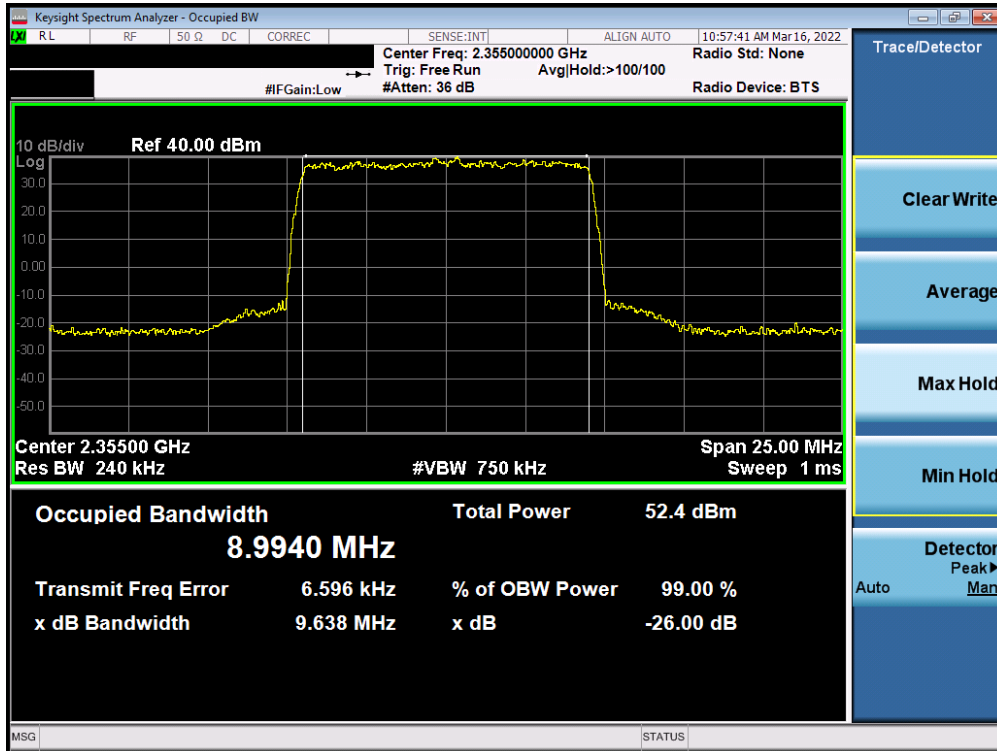
Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 18 of 44 |

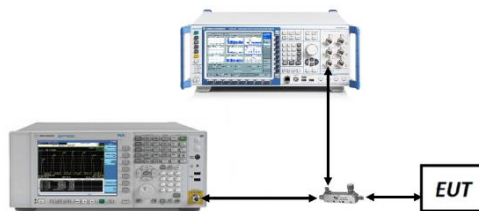LTE Band 30




Plot 7-11. Occupied Bandwidth Plot (LTE Band 30 - 10MHz QPSK - Full RB Configuration)

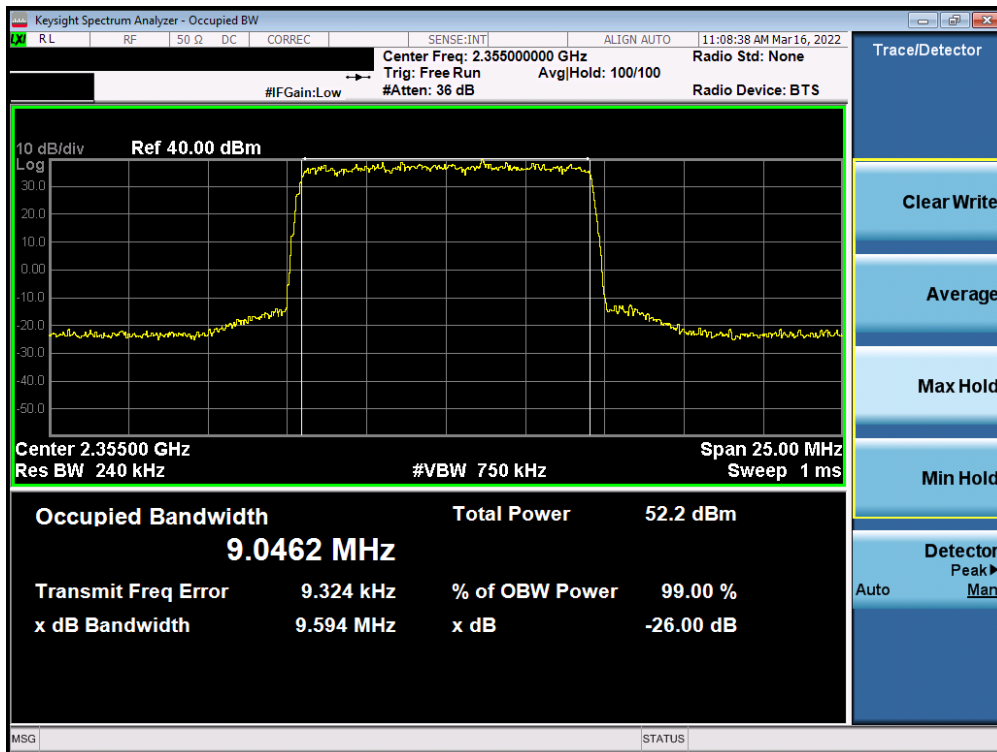


Plot 7-12. Occupied Bandwidth Plot (LTE Band 30 - 10MHz 16-QAM - Full RB Configuration)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 19 of 44 |

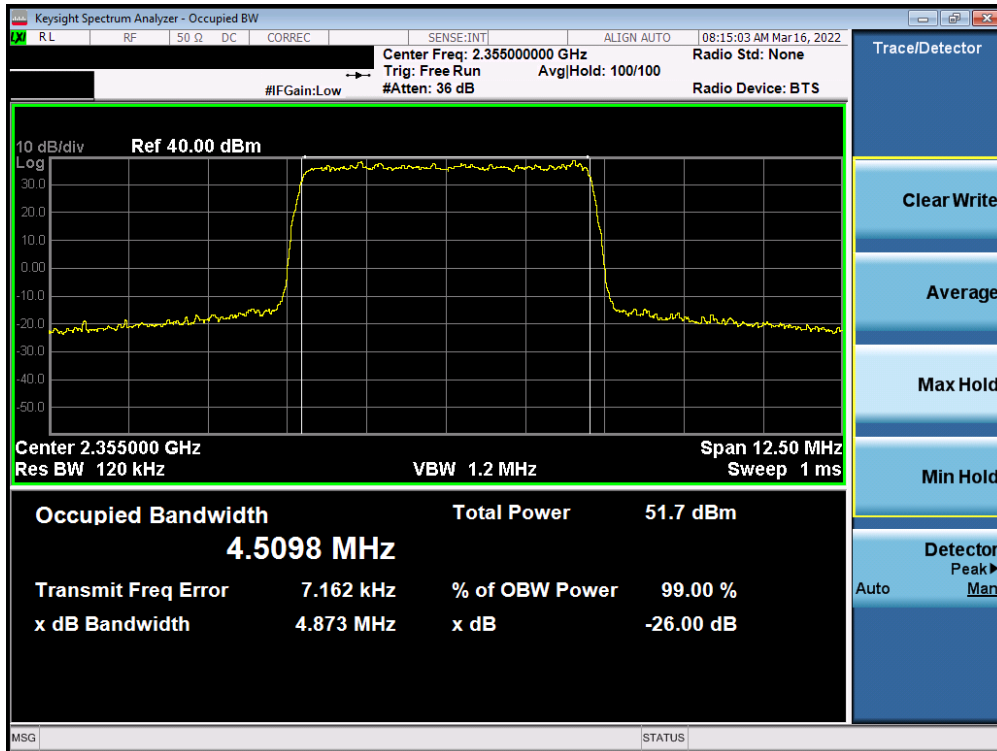

Plot 7-13. Occupied Bandwidth Plot (LTE Band 30 - 5MHz QPSK - Full RB Configuration)

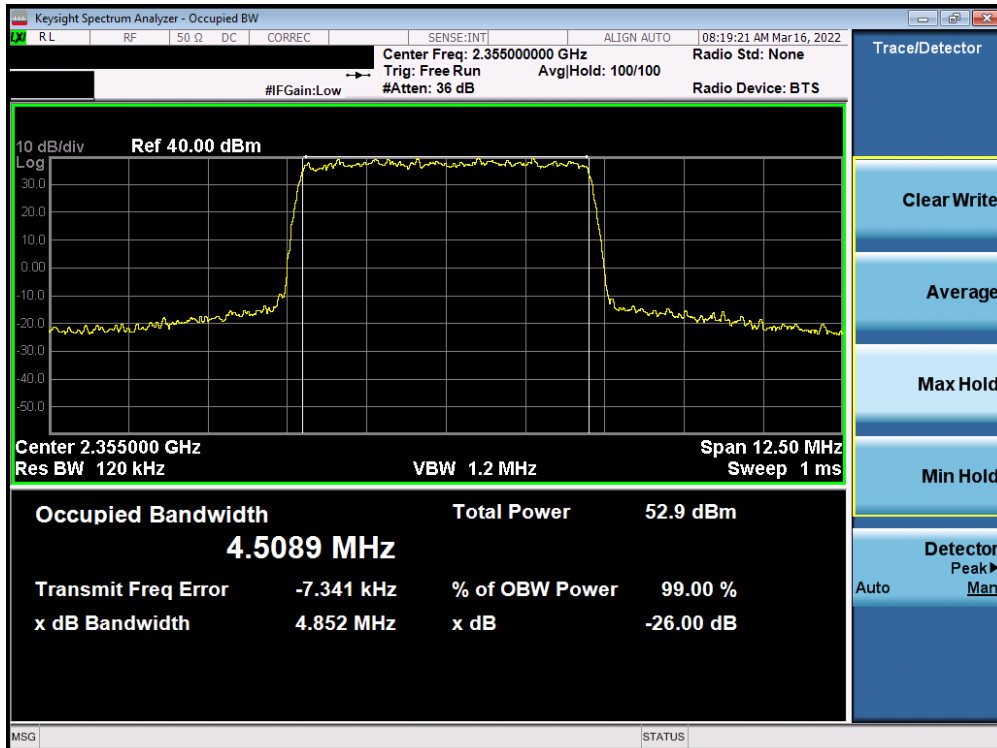

Plot 7-14. Occupied Bandwidth Plot (LTE Band 30 - 5MHz 16-QAM - Full RB Configuration)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMURU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 20 of 44 |

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For Band 30, the minimum permissible attenuation level of any spurious emission is -45dBm.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 27GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





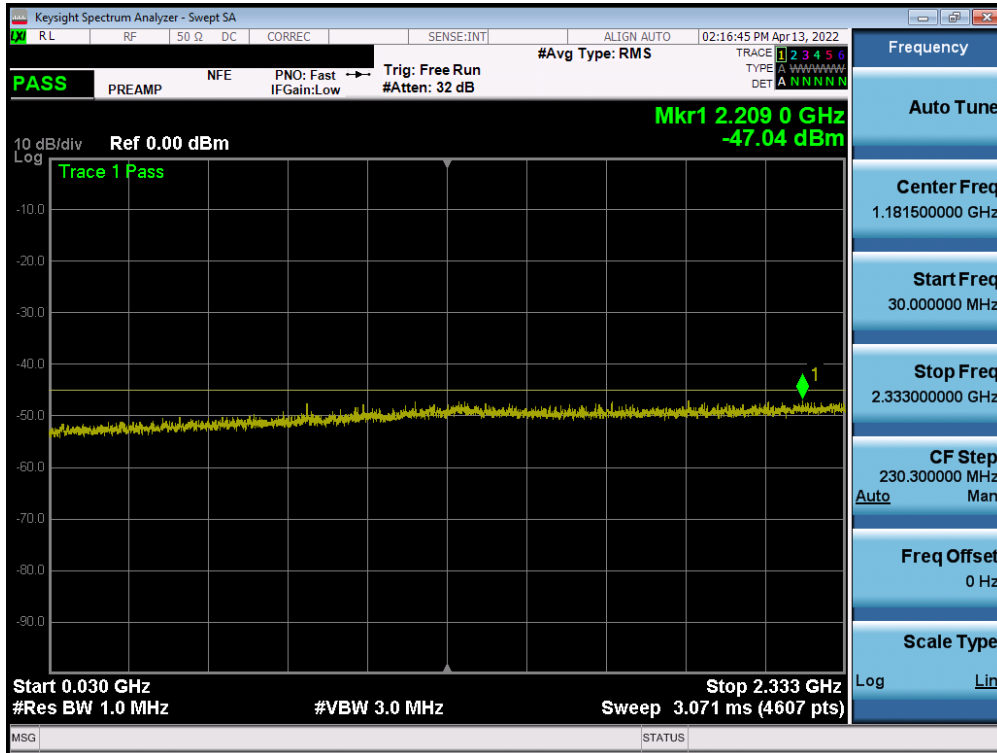
Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Per Part 27, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 21 of 44 |

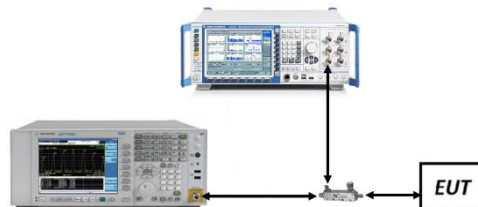LTE Band 30




Plot 7-15. Conducted Spurious Plot (LTE Band 30 - 10MHz QPSK - Mid Channel)

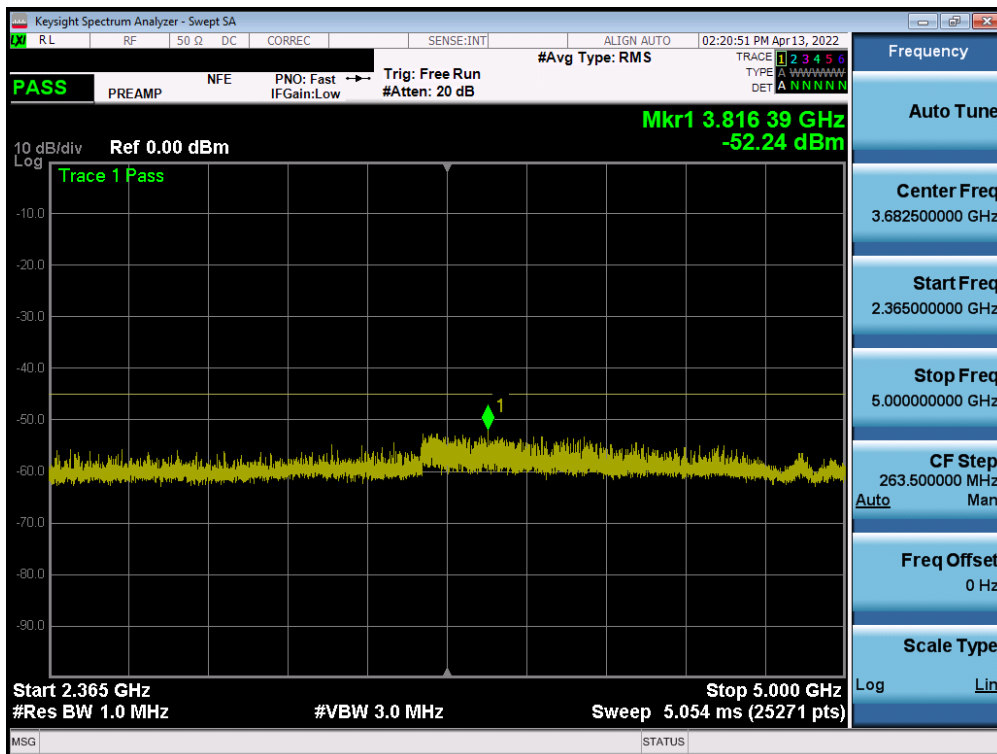

Plot 7-16. Conducted Spurious Plot (LTE Band 30 - 10MHz QPSK - Mid Channel)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 22 of 44 |

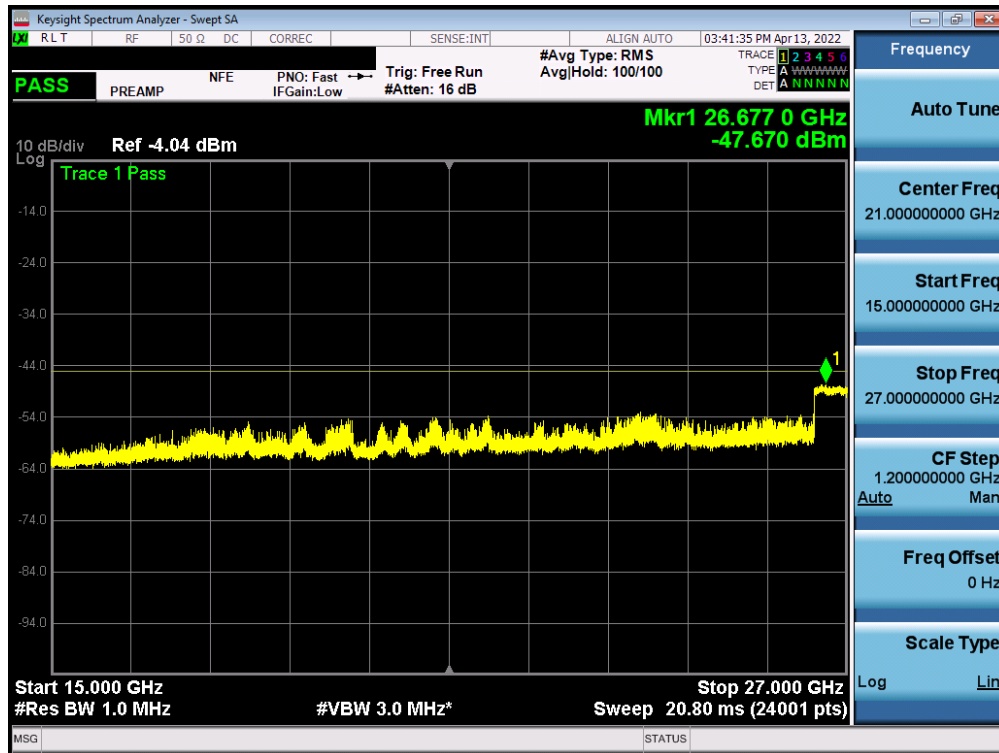

Plot 7-17. Conducted Spurious Plot (LTE Band 30 - 10MHz QPSK - Mid Channel)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 23 of 44 |

7.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level for Band 30 is as noted in the Test Notes on the following page.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

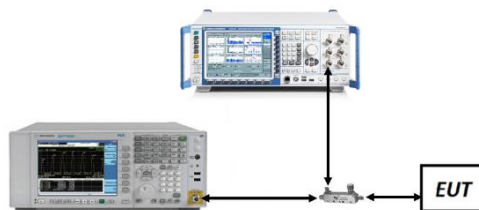



Figure 7-4. Test Instrument & Measurement Setup


| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 24 of 44 |

Test Notes


- Per 27.53(a)(1) for Band 30 base station operation, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in dBm, by the following amounts:

| Frequency Range (MHz) | Limit (dBm) |
|------------------------------|--------------------|
| < 2288 | -45 |
| 2285 – 2287.5 | -42 |
| 2287.5 – 2300 | -40 |
| 2300 – 2320 | -13 |
| 2320 – 2345 | -45 |
| 2345 – 2362.5 | -13 |
| 2362.5 – 2365 | -25 |
| 2365 – 2367.5 | -40 |
| 2367.5 – 2370 | -42 |
| > 2370 | -45 |


- For all measurement cases, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 25 of 44 |

LTE Band 30

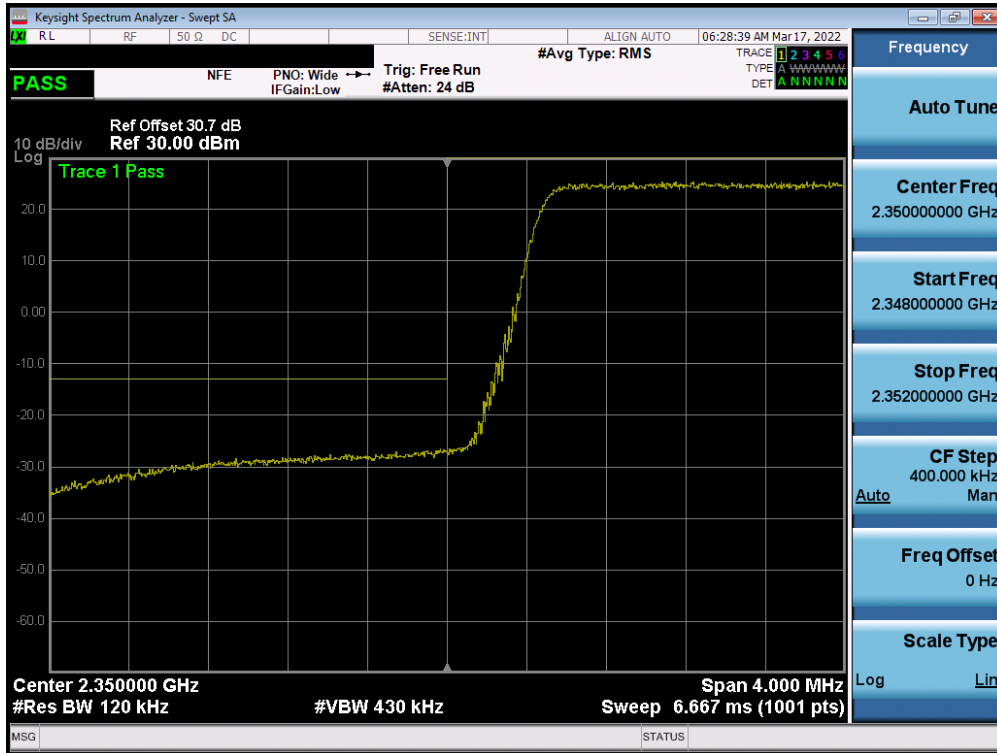


Plot 7-18. Lower Band Edge Plot (LTE Band 30 - 10MHz QPSK – Full RB Configuration)

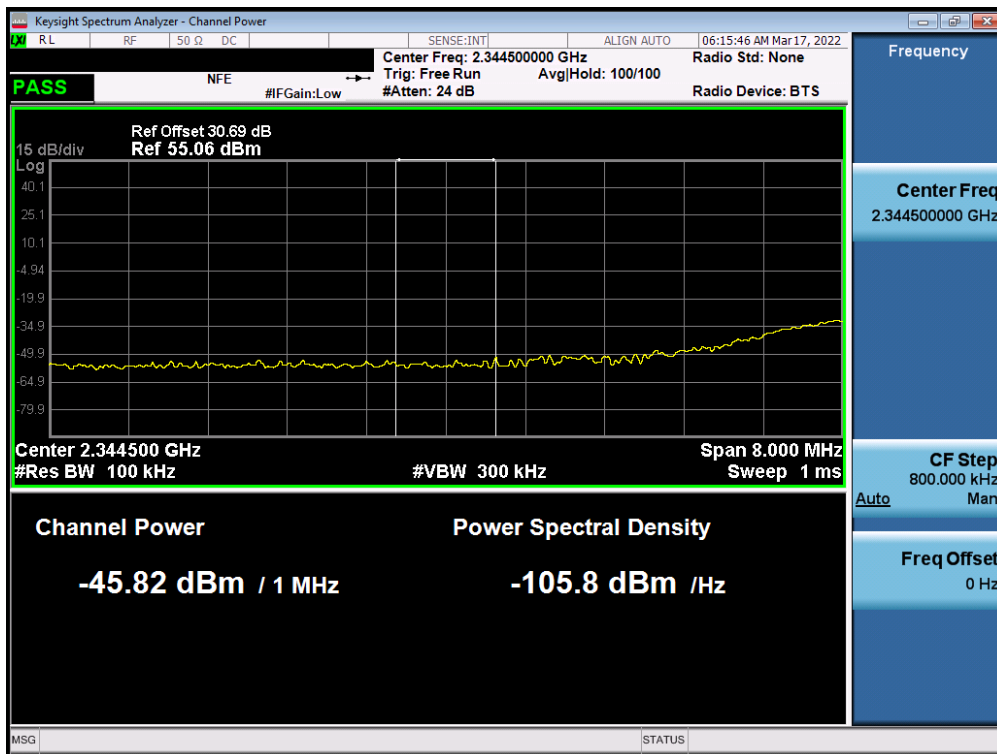


Plot 7-19. Lower Extended Band Edge – [10MHz BW] – 2344 – 2345MHz Channel Integration

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMURU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 26 of 44 |

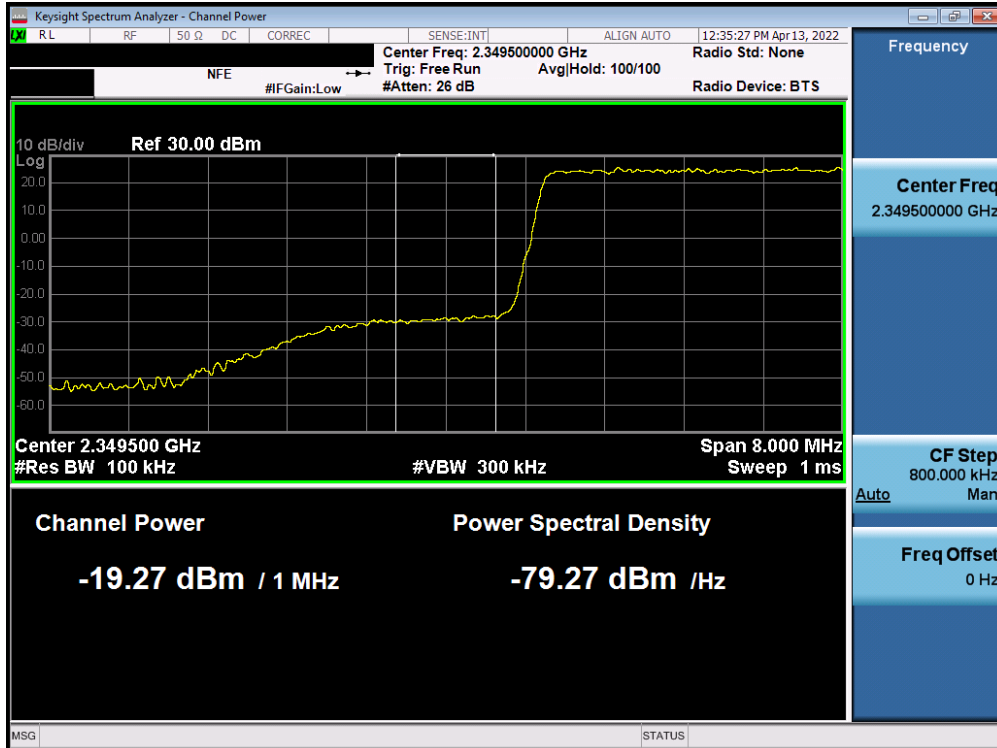


Plot 7-20. Lower Extended Band Edge – [10MHz BW] – 2349 – 2350MHz Channel Integration

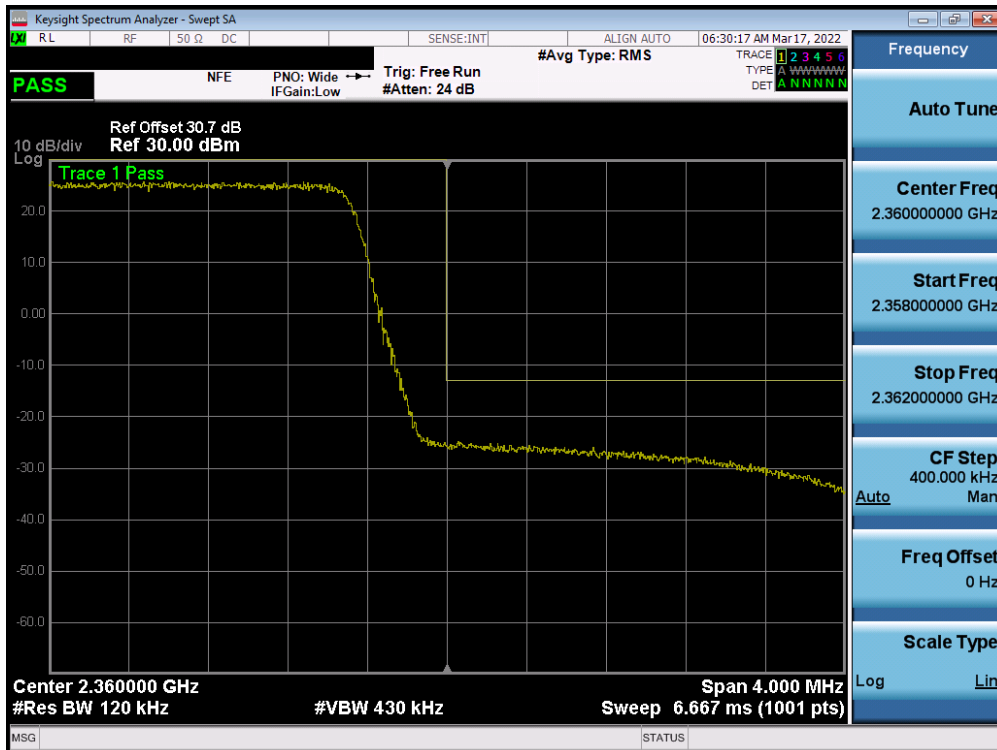


Plot 7-21. Upper Band Edge Plot (LTE Band 30 - 10MHz QPSK – Full RB Configuration)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 27 of 44 |

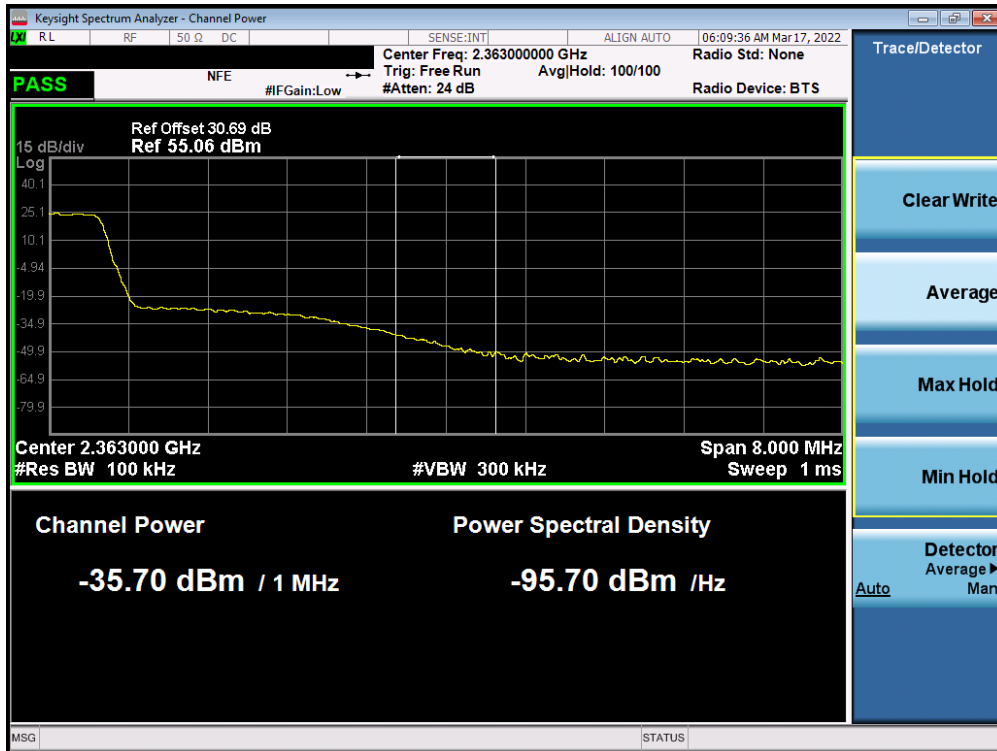


Plot 7-22. Upper Extended Band Edge – [10MHz BW] – 2362.5 – 2363.5MHz Channel Integration

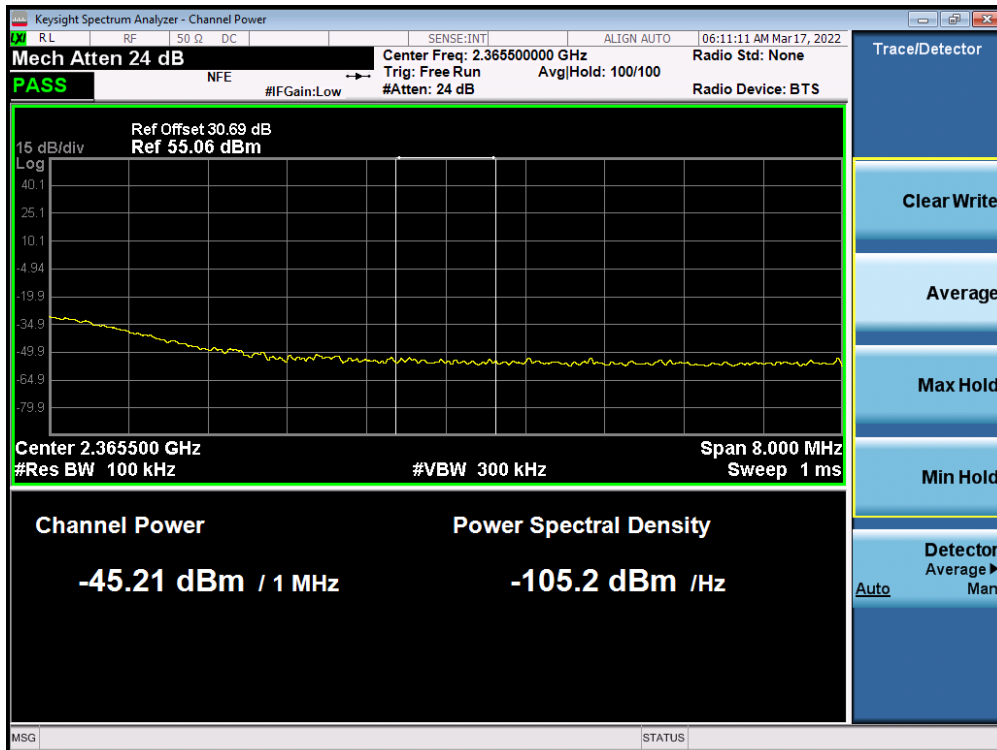


Plot 7-23. Upper Extended Band Edge – [10MHz BW] – 2365 – 2366MHz Channel Integration

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 28 of 44 |

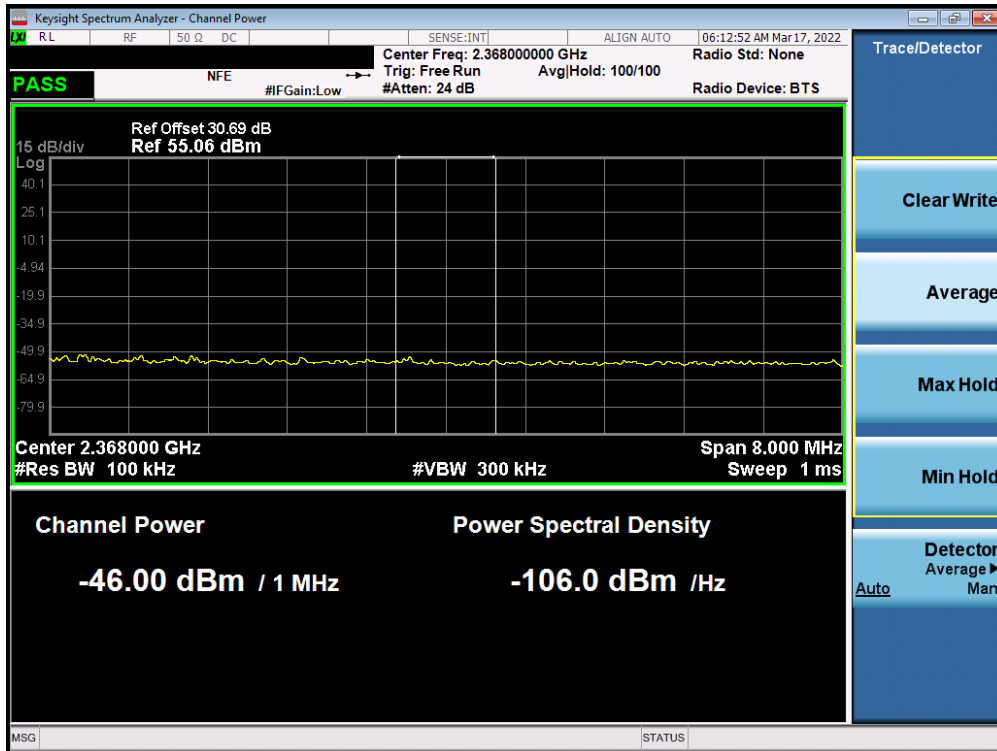

Plot 7-24. Upper Extended Band Edge – [10MHz BW] – 2367.5 – 2368.5MHz Channel Integration

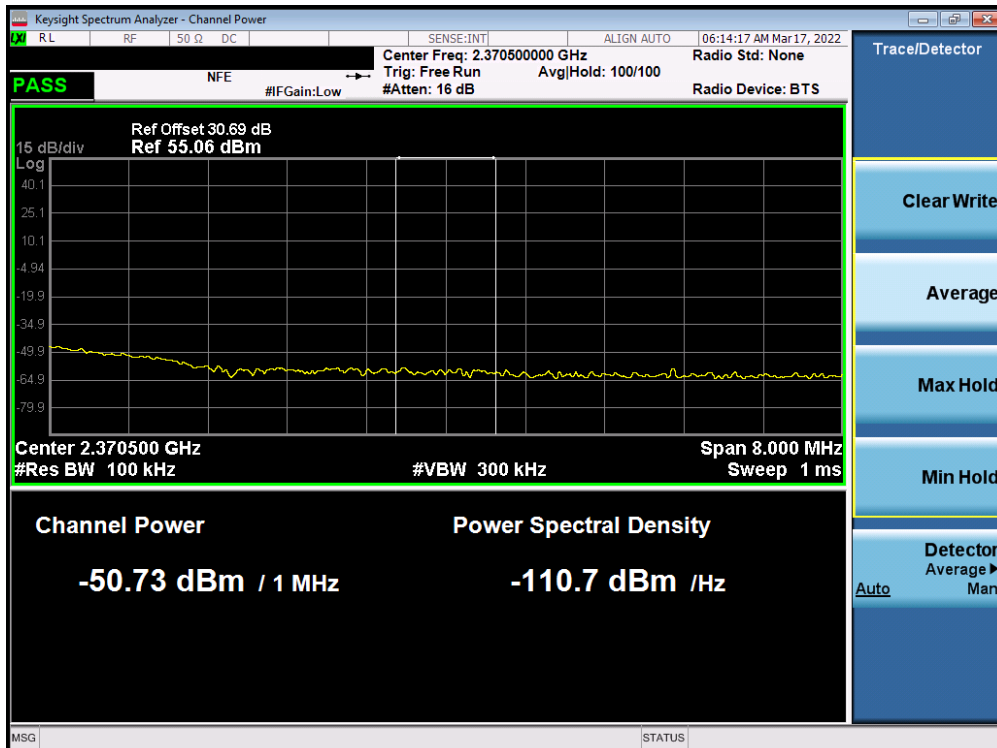


Plot 7-25. Upper Extended Band Edge – [10MHz BW] – 2370.0 – 2371.0 MHz Channel Integration

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 29 of 44 |




Plot 7-26. Lower Band Edge Plot (LTE Band 30 - 5MHz QPSK – Full RB Configuration)

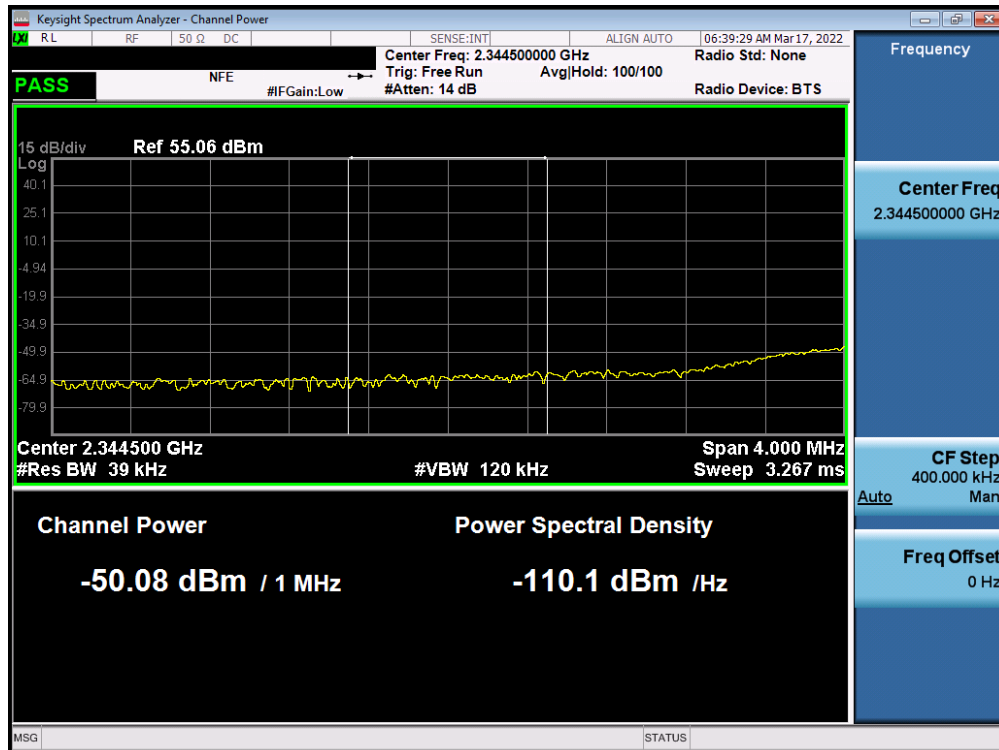


Plot 7-27. Lower Extended Band Edge – [5MHz BW] – 2344 – 2345MHz Channel Integration

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 30 of 44 |

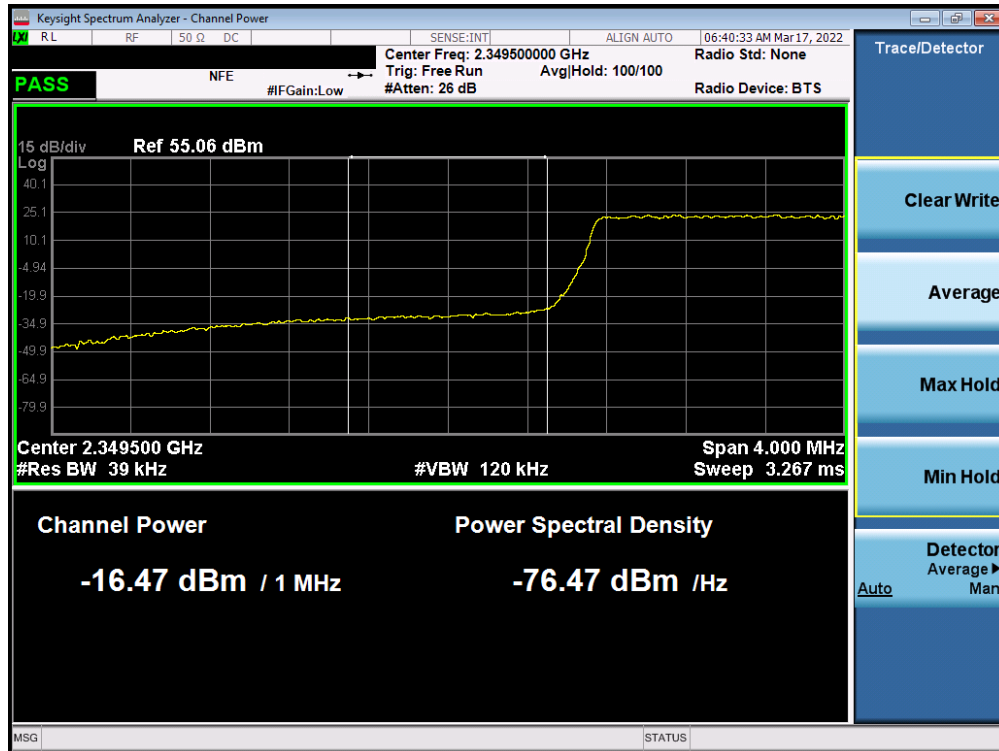


Plot 7-28. Lower Extended Band Edge – [5MHz BW] – 2349 – 2350MHz Channel Integration

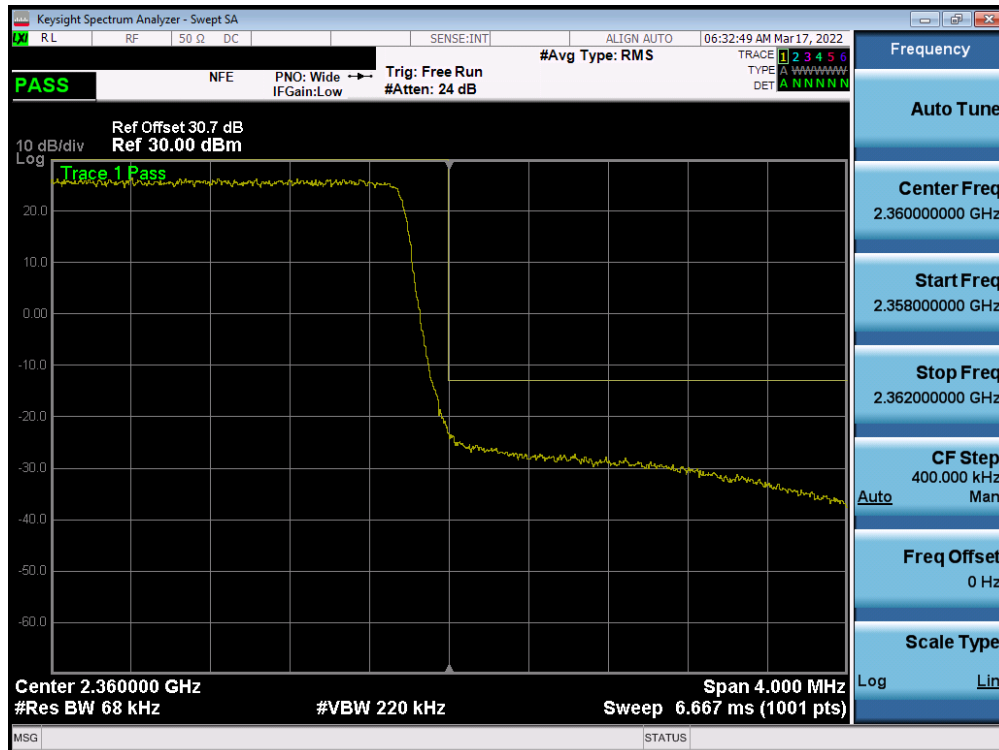


Plot 7-29. Upper Band Edge Plot (LTE Band 30 - 5MHz QPSK – Full RB Configuration)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 31 of 44 |

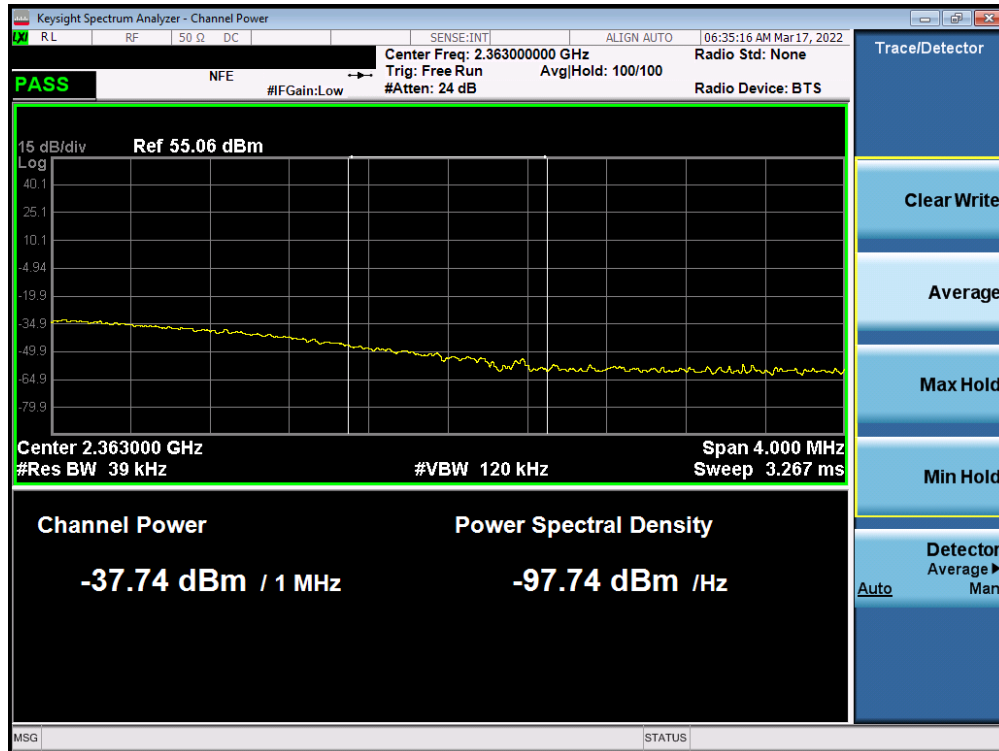


Plot 7-30. Upper Extended Band Edge – [5MHz BW] – 2362.5 – 2363.5MHz Channel Integration

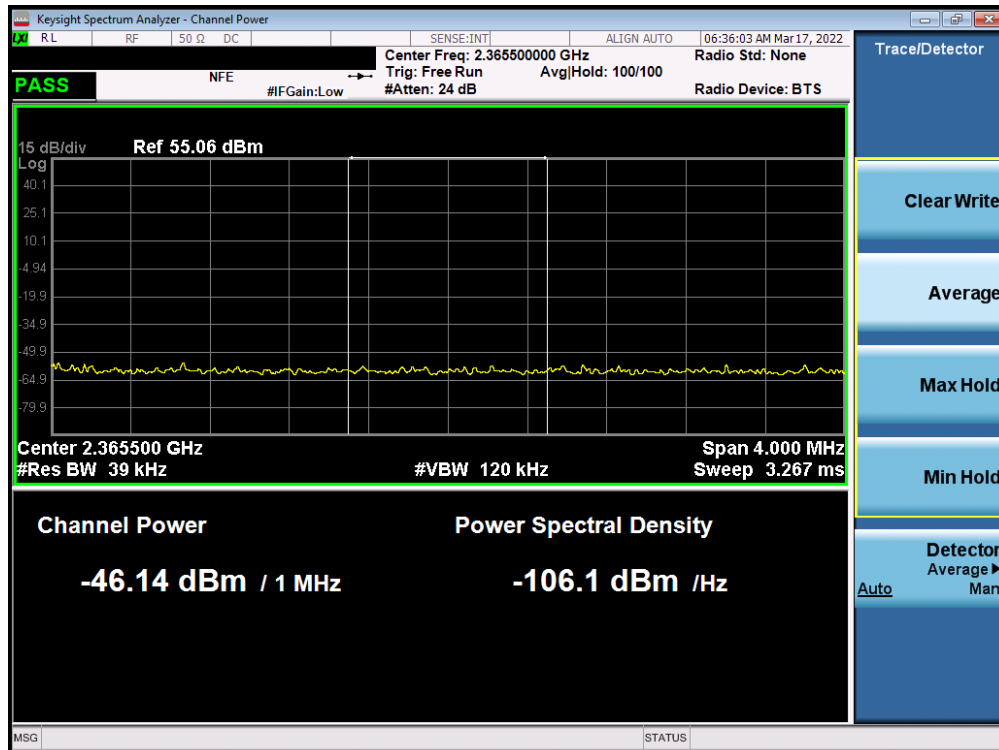


Plot 7-31. Upper Extended Band Edge – [5MHz BW] – 2365 – 2366MHz Channel Integration

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 32 of 44 |

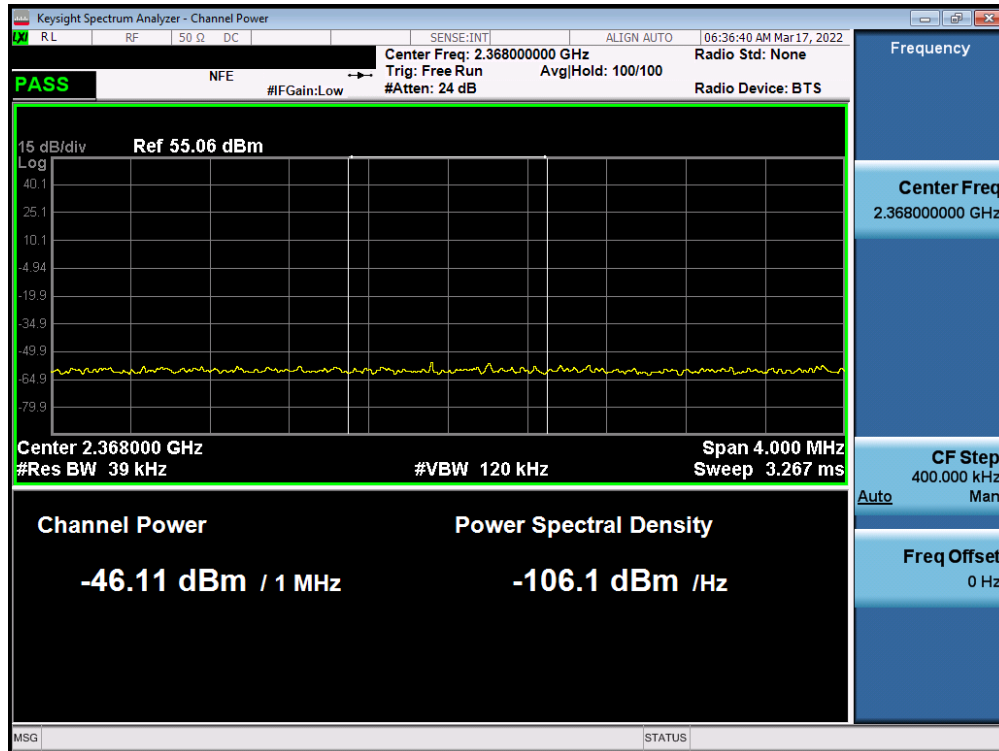

Plot 7-32. Upper Extended Band Edge – [5MHz BW] – 2367.5 – 2368.5MHz Channel Integration

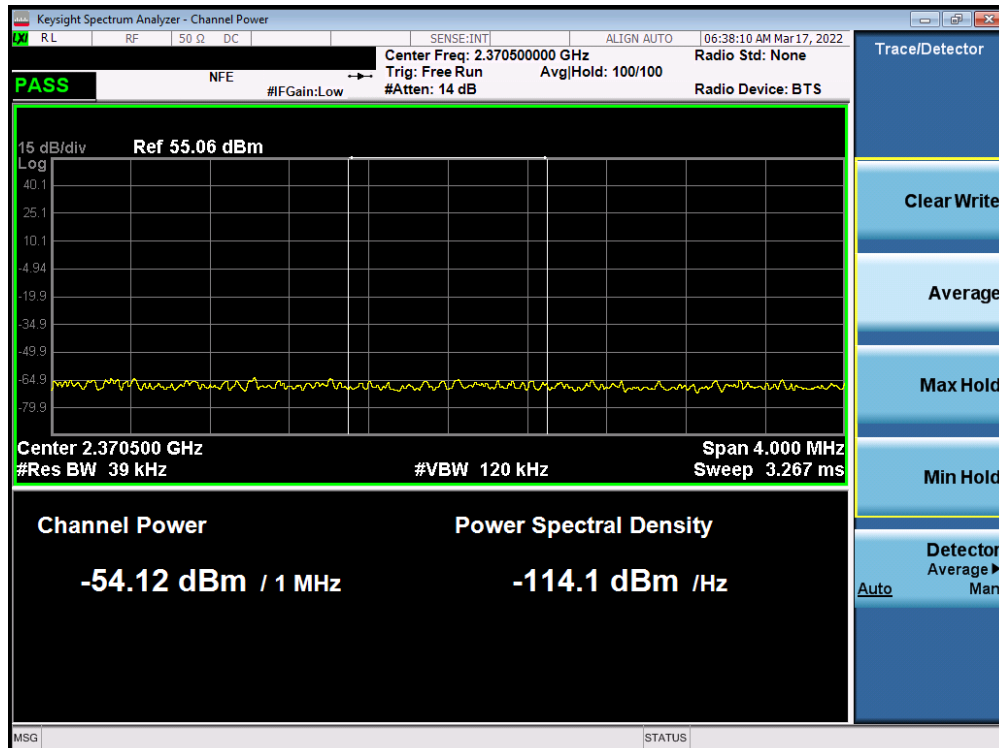

Plot 7-33. Upper Extended Band Edge – [5MHz BW] – 2370.0 – 2371.0 MHz Channel Integration

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 33 of 44 |

7.6 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





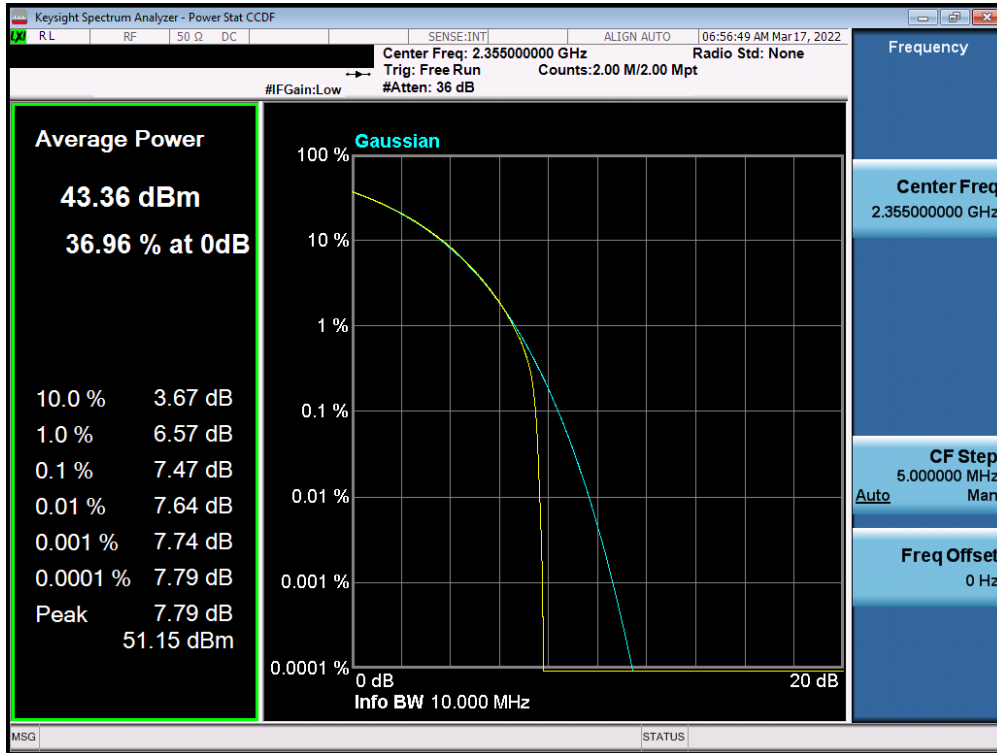
Figure 7-5. Test Instrument & Measurement Setup

Test Notes


None.

| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 34 of 44 |

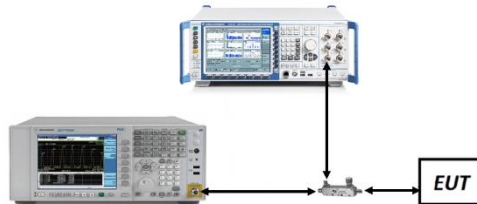Band 30




Plot 7-34. PAR Plot (Band 30 - 10.0MHz QPSK - Full RB Configuration)

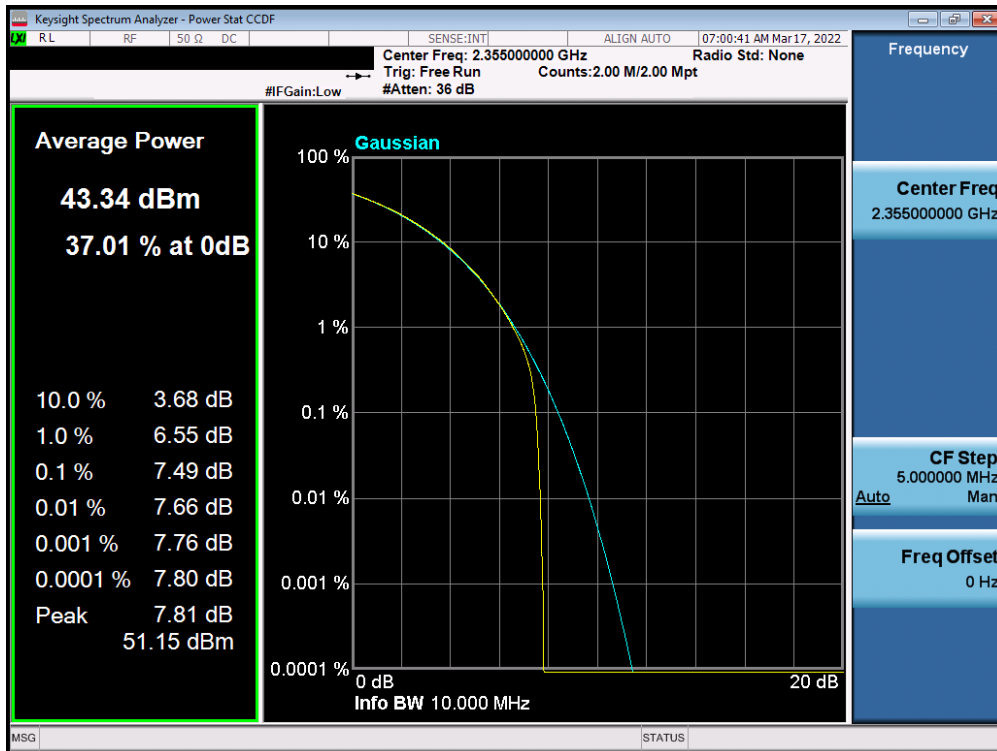


Plot 7-35. PAR Plot (Band 30 - 10.0MHz 256-QAM - Full RB Configuration)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 35 of 44 |

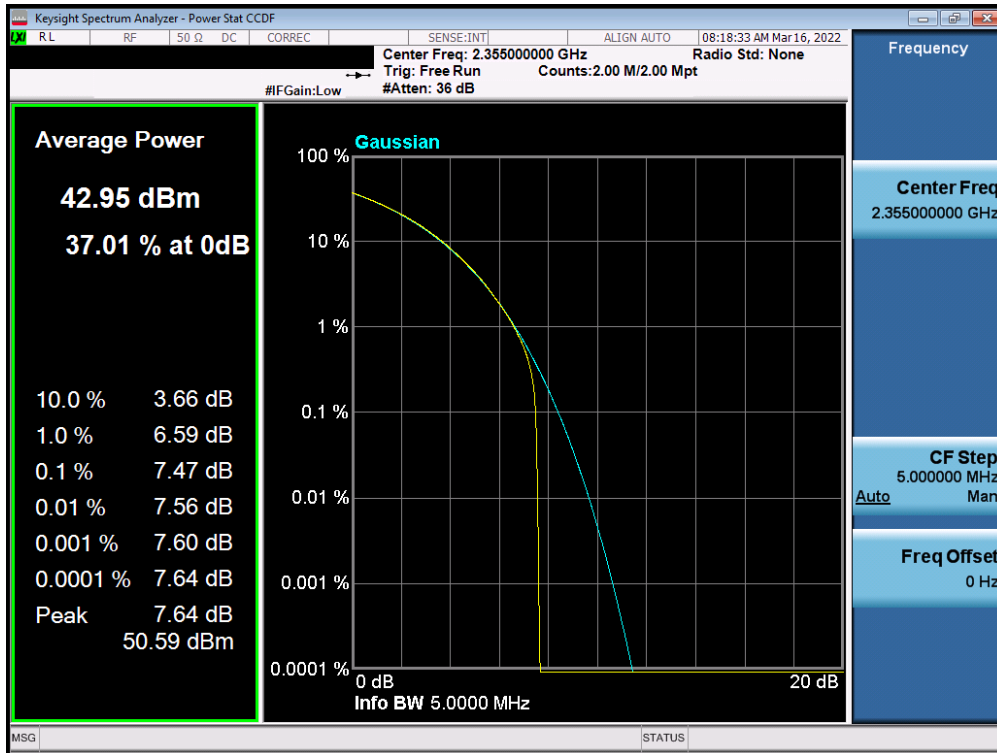

Plot 7-36. PAR Plot (Band 30 - 5.0MHz QPSK - Full RB Configuration)

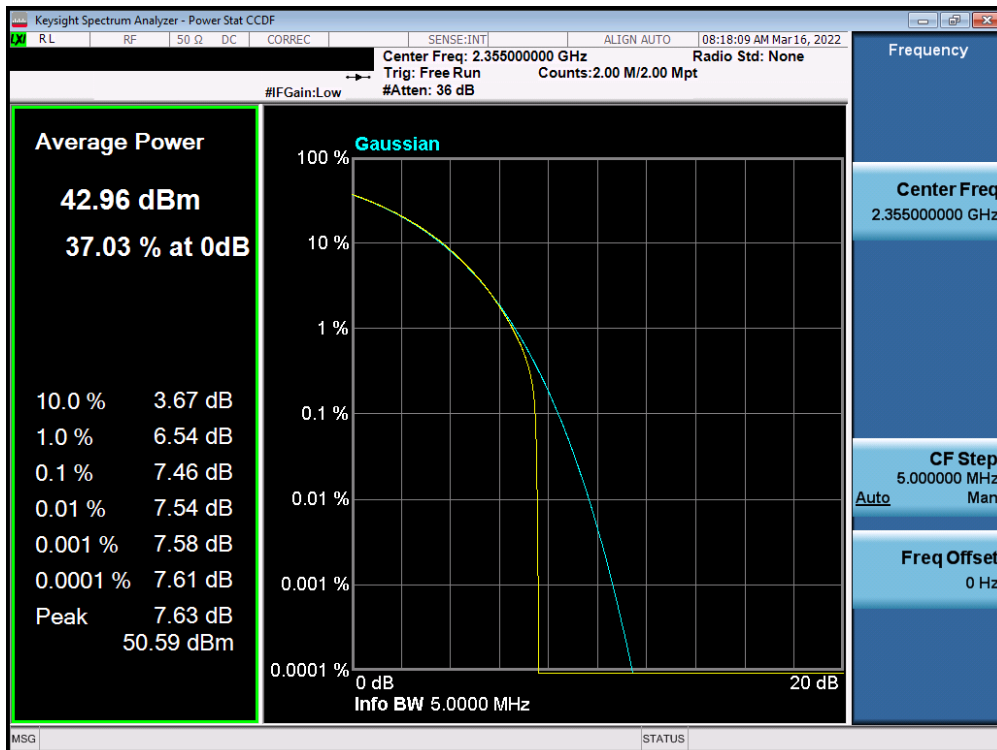

Plot 7-37. PAR Plot (Band 30 - 5.0MHz 256-QAM - Full RB Configuration)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 - 04/13/2022 | EUT Type: Mid Band mRU | Page 36 of 44 |

7.7 Radiated Spurious Emissions Measurements

Test Overview


Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

| | | | |
|---|--|---------------------------|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  PART 27 MEASUREMENT REPORT Class II Permissive Change | | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 37 of 44 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

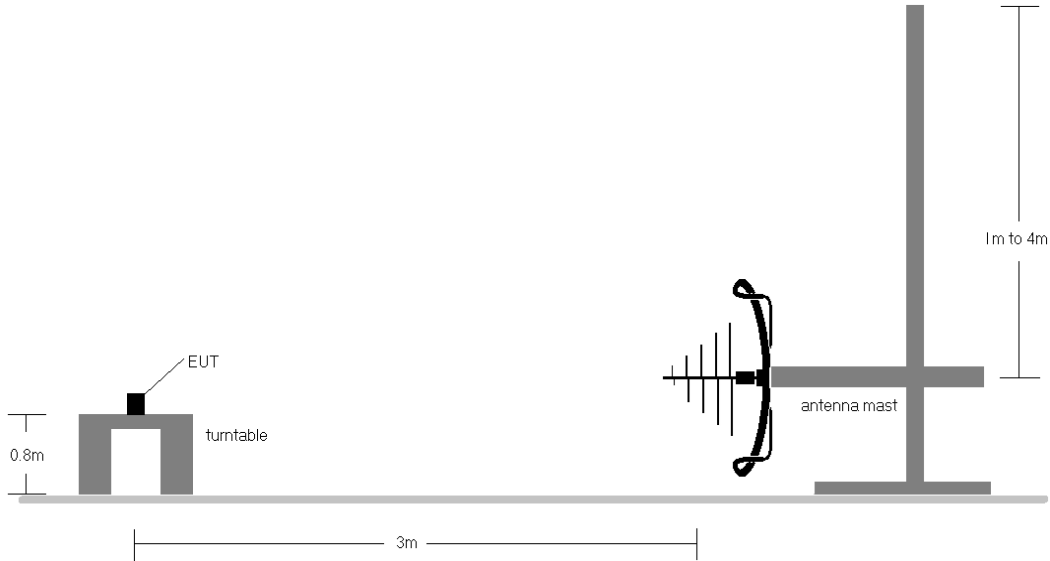


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

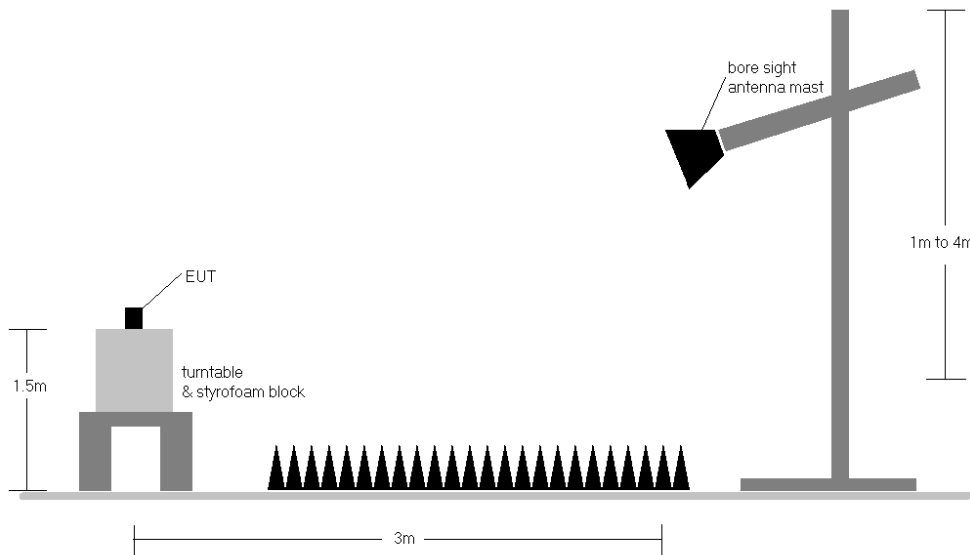




Figure 7-7. Test Instrument & Measurement Setup >1 GHz


| | | | |
|--|---|--|--|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 38 of 44 |

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with a 120VAC supply.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 7) Radiated Emissions were also investigated for the case of all supported bands transmitting simultaneously. Data is included in the section below.

| | | | |
|--|--|----------------------------------|--|
| FCC ID: QLJMRU-19212326 |  PART 27 MEASUREMENT REPORT Class II Permissive Change | | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 39 of 44 |

LTE Band 30

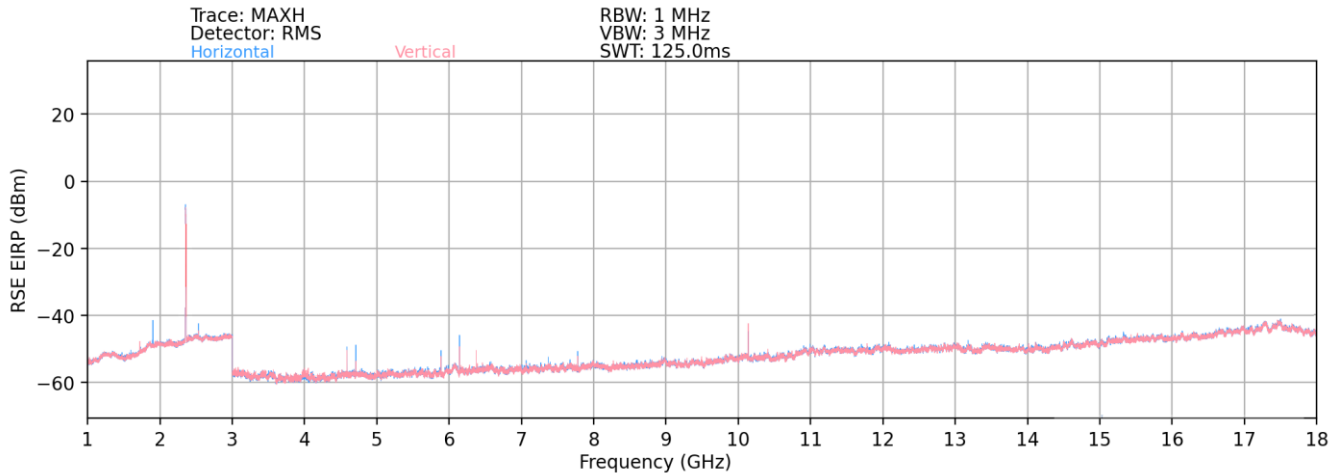

Plot 7-38. Radiated Spurious Plot (LTE Band 30)

| | |
|------------------------|---------------|
| Bandwidth (MHz): | 10 |
| Frequency (MHz): | 2355.0 |
| Detector / Trace Mode: | RMS / Average |
| RBW / VBW: | 1MHz / 3MHz |


| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 4710.00 | H | 112 | 200 | -72.50 | 9.11 | 43.61 | -51.65 | -45.00 | -6.65 |
| 7065.00 | H | 103 | 179 | -72.32 | 15.06 | 49.74 | -45.52 | -45.00 | -0.52 |
| 9420.00 | H | - | - | -83.48 | 19.15 | 42.67 | -52.59 | -45.00 | -7.59 |
| 11775.00 | H | - | - | -84.55 | 22.98 | 45.43 | -49.83 | -45.00 | -4.83 |
| 14130.00 | H | - | - | -85.65 | 25.86 | 47.21 | -48.05 | -45.00 | -3.05 |
| 16485.00 | H | - | - | -87.93 | 30.44 | 49.51 | -45.75 | -45.00 | -0.75 |

Table 7-4. Radiated Spurious Data (LTE Band 30)

| | | | |
|---|-----------------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 40 of 44 |



LTE Band 66/10/4, Band 25/2, Band 41, Band 30

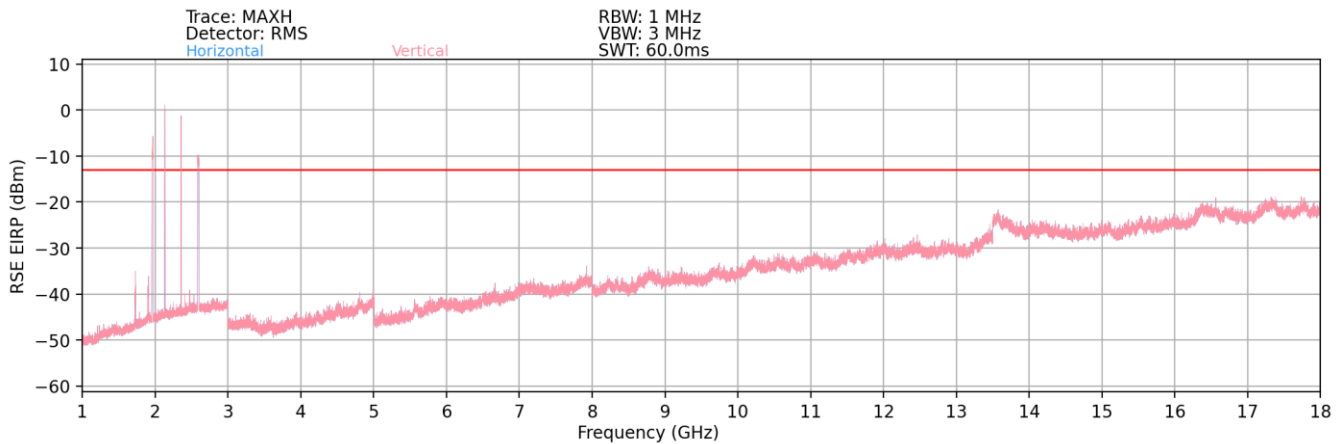

Plot 7-39. Radiated Spurious Plot (LTE Band 66/10/4 – 25/2 – 41 – 30)

| | |
|------------------------|------------------------------------|
| Bandwidth (MHz): | 20 - 20 - 10 - 20 |
| Bands: | LTE Bands 66/10/4 - 25/2 - 41 - 30 |
| Frequency (MHz): | 1960 - 2132.5 - 2355 - 2593 |
| Detector / Trace Mode: | RMS / Average |
| RBW / VBW: | 1MHz / 3MHz |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 1163.00 | V | 244 | 121 | -65.00 | 5.14 | 47.14 | -48.12 | -13.00 | -35.12 |
| 1100.30 | V | 266 | 111 | -67.01 | 5.53 | 45.52 | -49.74 | -13.00 | -36.74 |
| 2017.00 | V | - | - | -71.11 | 11.04 | 46.93 | -48.32 | -13.00 | -35.32 |
| 2305.00 | V | - | - | -68.54 | 11.78 | 50.24 | -45.02 | -13.00 | -32.02 |
| 2420.50 | V | - | - | -71.11 | 12.07 | 47.96 | -47.30 | -13.00 | -34.30 |
| 3754.00 | V | 111 | 201 | -70.29 | 14.80 | 51.51 | -43.75 | -13.00 | -30.75 |
| 4627.00 | V | 173 | 151 | -70.72 | 15.89 | 52.17 | -52.63 | -13.00 | -39.63 |
| 5074.00 | V | 121 | 203 | -73.33 | 16.71 | 50.38 | -54.42 | -13.00 | -41.42 |
| 6144.00 | V | 284 | 146 | -69.82 | 18.84 | 56.02 | -39.24 | -13.00 | -26.24 |
| 7779.00 | V | - | - | -73.01 | 22.83 | 56.82 | -38.44 | -13.00 | -25.44 |
| 8987.00 | V | - | - | -73.47 | 24.12 | 57.65 | -37.61 | -13.00 | -24.61 |

Table 7-5. Radiated Spurious Data (LTE Multi-Band – Mid Channel)

| | | | | |
|--|--|----------------------------------|--|--|
| FCC ID: QLJMRU-19212326 | | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | | Page 41 of 44 |

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings


1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


Test Notes

None


| | | | | |
|---|---|---------------------------|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 42 of 44 | |

| LTE Band 30 | | | | | |
|---------------------------|-------------|---------------|----------------|-----------------|---------------|
| Operating Frequency (Hz): | | 2,355,000,000 | | | |
| Ref. Voltage (VDC): | | 120.00 | | | |
| Voltage (%) | Power (VDC) | Temp (°C) | Frequency (Hz) | Freq. Dev. (Hz) | Deviation (%) |
| 100 % | 120.00 | - 30 | 235,511,222 | 210 | 0.0000892 |
| | | - 20 | 235,511,192 | 180 | 0.0000764 |
| | | - 10 | 235,511,362 | 350 | 0.0001486 |
| | | 0 | 235,511,462 | 450 | 0.0001911 |
| | | + 10 | 235,511,124 | 112 | 0.0000476 |
| | | + 20 (Ref) | 235,511,012 | 0 | 0.0000000 |
| | | + 30 | 235,510,998 | -14 | -0.0000059 |
| | | + 40 | 235,510,758 | -254 | -0.0001079 |
| 85 % | 102.00 | + 20 | 235,510,658 | -354 | -0.0001503 |
| 115 % | 138.00 | + 20 | 235,511,248 | 236 | 0.0001002 |

Table 7-6. LTE Band 30 Frequency Stability Data

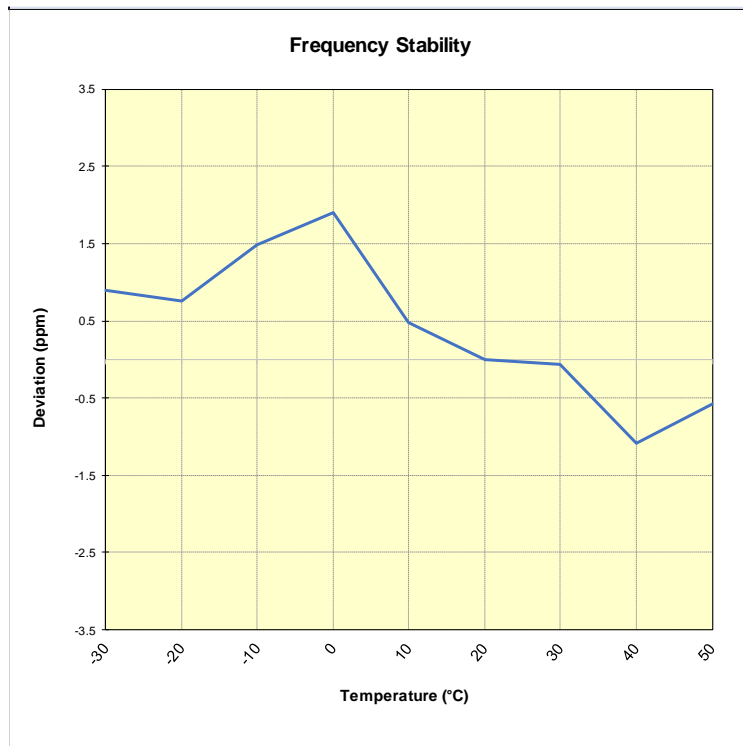


Plot 7-40. LTE Band 30 Frequency Stability Chart

| | | | |
|---|---|--|-----------------------------------|
| FCC ID: QLJMRU-19212326 |  | PART 27 MEASUREMENT REPORT Class II Permissive Change | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 43 of 44 |

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Tecore Mid Band mRU FCC ID: QLJMRU-19212326** complies with all the requirements of Part 27 of the FCC rules.

| | | | |
|--|--|----------------------------------|--|
| FCC ID: QLJMRU-19212326 |  PART 27 MEASUREMENT REPORT Class II Permissive Change | | Approved by: Technical Manager |
| Test Report S/N: 1M2203150034-01.QLJ | Test Dates: 03/06 – 04/13/2022 | EUT Type: Mid Band mRU | Page 44 of 44 |