

FCC REPORT (Bluetooth)

Applicant: Xingtel Xiamen Group Co., Ltd.

Address of Applicant: Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 361006, PR China

Equipment Under Test (EUT)

Product Name: Bluetooth Speaker

Model No.: speeCup

Trade mark: iCreation

FCC ID: QMHSPPECUP

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 13 Jun., 2013

Date of Test: 14 Jun., to 06 Jul., 2013

Date of report issued: 08 Jul., 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	08 Jul., 2013	<i>Original</i>

Prepared by:

Date:

08 Jul., 2013

Wu Lin
Report Clerk

Reviewed by:

Date:

08 Jul., 2013

Wimer Zhang
Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 LABORATORY FACILITY.....	7
5.6 LABORATORY LOCATION	7
5.7 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT:	9
6.2 CONDUCTED EMISSIONS	10
6.3 CONDUCTED OUTPUT POWER.....	13
6.4 20dB OCCUPY BANDWIDTH.....	19
6.5 CARRIER FREQUENCIES SEPARATION.....	25
6.6 HOPPING CHANNEL NUMBER	32
6.7 DWELL TIME.....	35
6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	41
6.9 BAND EDGE.....	42
6.9.1 <i>Conducted Emission Method</i>	42
6.9.2 <i>Radiated Emission Method</i>	46
6.10 SPURIOUS EMISSION	59
6.10.1 <i>Conducted Emission Method</i>	59
6.10.2 <i>Radiated Emission Method</i>	65
7 TEST SETUP PHOTO	72
8 EUT CONSTRUCTIONAL DETAILS.....	74

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Xingtai Xiamen Group Co., Ltd.
Address of Applicant:	Xingtai Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 361006, PR China
Manufacturer:	iCreation Inc.
Address of Manufacturer:	Unit 202, 3621 Hwy 7 East Markham Ontario L3R 0G6 Canada
Factory:	Xingtai Xiamen Group Co., Ltd.
Address of Factory:	Xingtai Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 361006, PR China

5.2 General Description of E.U.T.

Product Name:	Bluetooth Speaker
Model No.:	speeCup
Trade mark:	iCreation
Operation Frequency:	2402MHz~2480MHz
Transfer rate:	1/2/3 Mbits/s
Number of channel:	79
Modulation type:	GFSK, π/4-DQPSK, 8DPSK
Modulation technology:	FHSS
Antenna Type:	Internal Antenna
Antenna gain:	0dBi
Power supply:	Rechargeable Li-ion Battery DC3.7V

Operation Frequency each of channel for GFSK, π/4-DQPSK, 8DPSK							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark: Channel 0, 39 &78 selected for GFSK, π/4-DQPSK and 8DPSK.

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with worst case data rate.
Remark	GFSK (1 Mbps) is the worst case mode.
The sample was placed 0.8m above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working with a fresh battery, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	Laptop	Inspiron M4010	B1LMVP1	N/A
DELL	PC	OPTIPLEX745	N/A	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,

Bao'an District, Shenzhen, Guangdong, China

Tel: 0755-23118282

Fax: 0755-23116366


5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2013	June 08 2014
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	May 25 2013	May 24 2014
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 25 2013	May 24 2014
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2013	Mar. 31 2014
6	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2013	Mar. 31 2014
7	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2013	Mar. 31 2014
8	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2013	Mar. 31 2014
9	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2013	Mar. 31 2014
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2013	Mar. 31 2014
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2013	June 08 2014
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2013	Mar. 31 2014
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2013	Mar. 29 2014
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 25 2013	May. 24 2014
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2013	Mar. 31 2014
18	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 12 2012	Aug. 11 2013
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	May. 25 2013	May. 24 2014
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	May. 25 2013	May. 24 2014

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2013	June 08 2014
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2013	May 24 2014
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2013	Mar. 31 2014
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2013	Mar. 31 2014
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement:

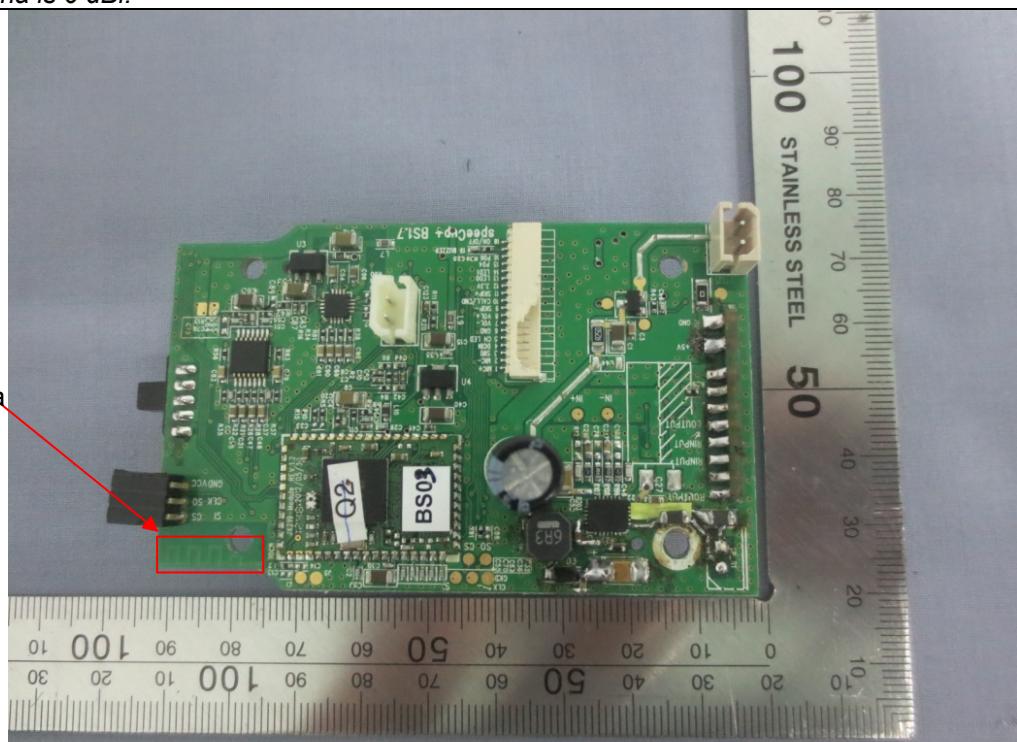Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
15.247(c) (1)(i) requirement:	<p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>
E.U.T Antenna:	<p>The Bluetooth antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is 0 dBi.</p>
	

6.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4:2003		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

* Decreases with the logarithm of the frequency.

Test setup:	<p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>
-------------	--

Test procedure:

- The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
- The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
- Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Test Instruments:

Refer to section 5.7 for details

Test mode:


Bluetooth (Continuous transmitting) mode

Test results:

Pass

Measurement Data


Line:

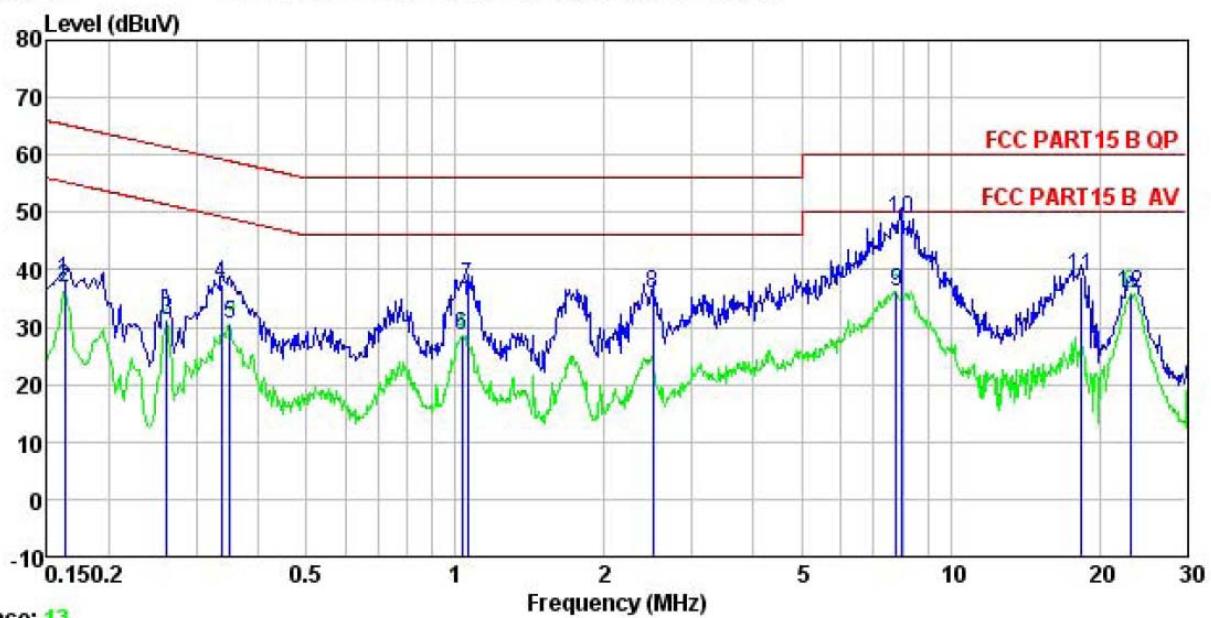

Site : CCIS Conducted test Site
 Condition : FCC PART15 B QP LISN LINE
 Job. no : 169RF
 EUT : Bluetooth Speaker
 Model : speeCup
 Test Mode : BT TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Huni:56% Atmos:101KPa
 Test Engineer: Winner
 Remark :

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Factor			
1	0.162	27.16	10.24	0.78	38.18	65.34 -27.16 QP
2	0.162	25.70	10.24	0.78	36.72	55.34 -18.62 Average
3	0.262	20.21	10.24	0.75	31.20	51.38 -20.18 Average
4	0.337	26.35	10.27	0.73	37.35	59.27 -21.92 QP
5	0.350	19.61	10.27	0.73	30.61	48.96 -18.35 Average
6	1.032	17.46	10.21	0.87	28.54	46.00 -17.46 Average
7	1.060	25.93	10.22	0.88	37.03	56.00 -18.97 QP
8	2.500	24.72	10.28	0.94	35.94	56.00 -20.06 QP
9	7.769	25.10	10.26	0.84	36.20	50.00 -13.80 Average
10	7.977	37.62	10.26	0.85	48.73	60.00 -11.27 QP
11	18.328	27.74	10.30	0.92	38.96	60.00 -21.04 QP
12	23.018	24.45	10.46	0.89	35.80	50.00 -14.20 Average

Neutral:

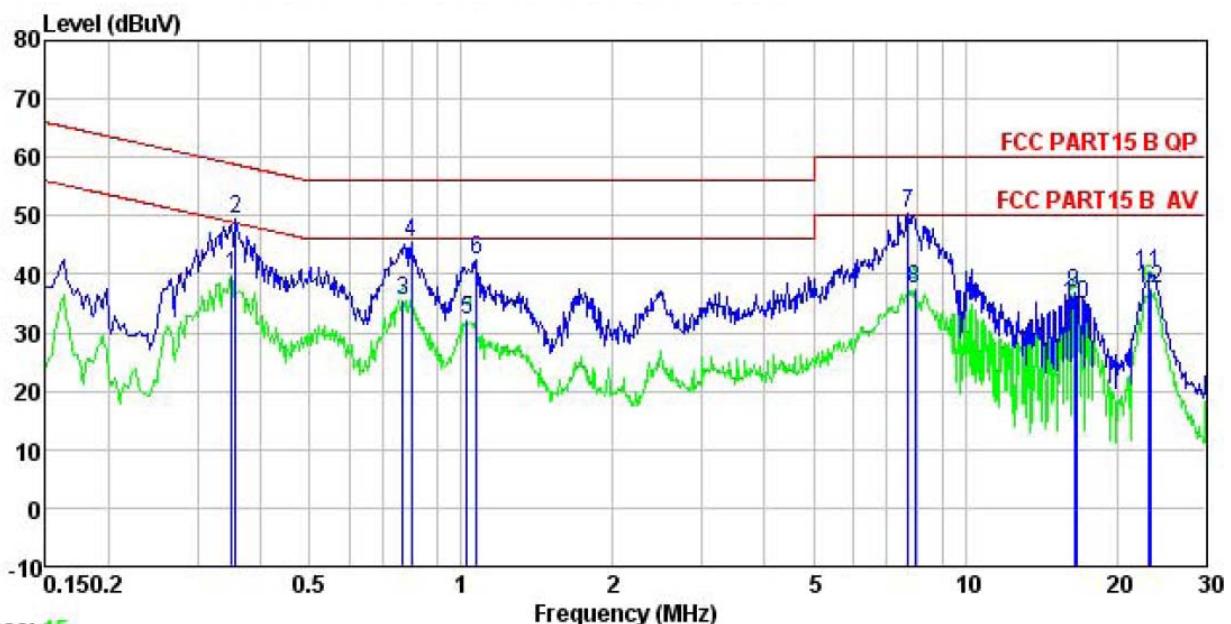


Site : CCIS Conducted test Site
 Condition : FCC PART15 B QP LISN NEUTRAL
 Job. no : 169RF
 EUT : Bluetooth Speaker
 Model : speeCup
 Test Mode : BT TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Huni:56% Atmos:101KPa
 Test Engineer: Winner
 Remark :

Freq	Read	LISN	Cable	Limit	Over	Remark
	Level	Factor	Loss			
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.350	28.99	10.25	0.73	39.97	48.96 -8.99 Average
2	0.358	38.42	10.25	0.73	49.40	58.78 -9.38 QP
3	0.767	24.51	10.17	0.79	35.47	46.00 -10.53 Average
4	0.796	34.42	10.17	0.81	45.40	56.00 -10.60 QP
5	1.027	21.10	10.20	0.87	32.17	46.00 -13.83 Average
6	1.071	31.36	10.21	0.88	42.45	56.00 -13.55 QP
7	7.687	39.41	10.25	0.84	50.50	60.00 -9.50 QP
8	7.935	26.23	10.25	0.85	37.33	50.00 -12.67 Average
9	16.486	25.50	10.26	0.91	36.67	60.00 -23.33 QP
10	16.573	23.72	10.27	0.91	34.90	50.00 -15.10 Average
11	23.140	28.73	10.48	0.89	40.10	60.00 -19.90 QP
12	23.263	26.06	10.48	0.89	37.43	50.00 -12.57 Average

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level =Receiver Read level + LISN Factor + Cable Loss

6.3 Conducted Output Power

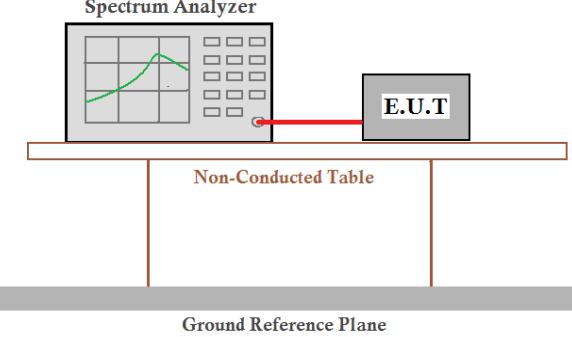
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤ 1 MHz) RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz and < 3MHz)
Limit:	125 mW(21 dBm)
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.53	21.00	Pass
Middle	3.00	21.00	Pass
Highest	3.86	21.00	Pass
$\pi/4$ -DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.18	21.00	Pass
Middle	2.79	21.00	Pass
Highest	3.52	21.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.30	21.00	Pass
Middle	2.85	21.00	Pass
Highest	3.58	21.00	Pass


Test plot as follows:

Modulation mode:	GFSK
------------------	------

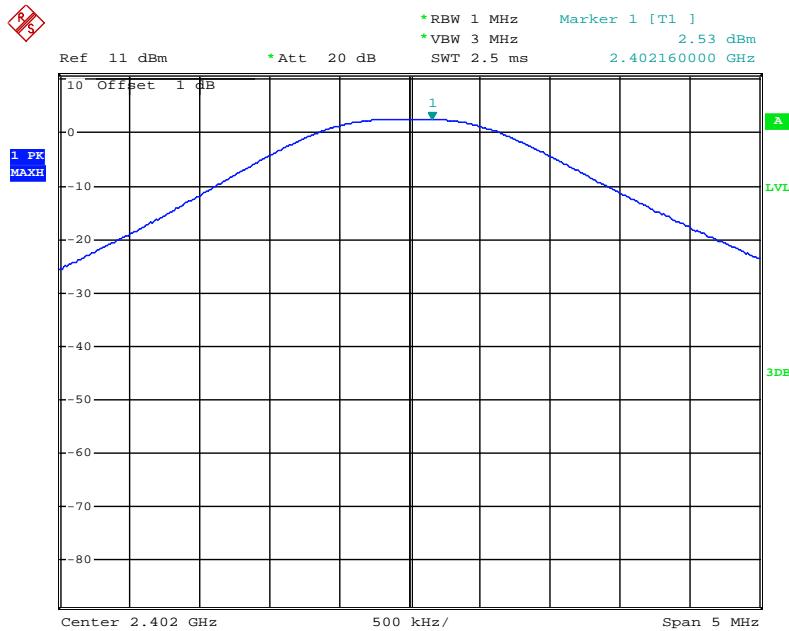


Date: 14.JUN.2013 14:07:24

Lowest channel

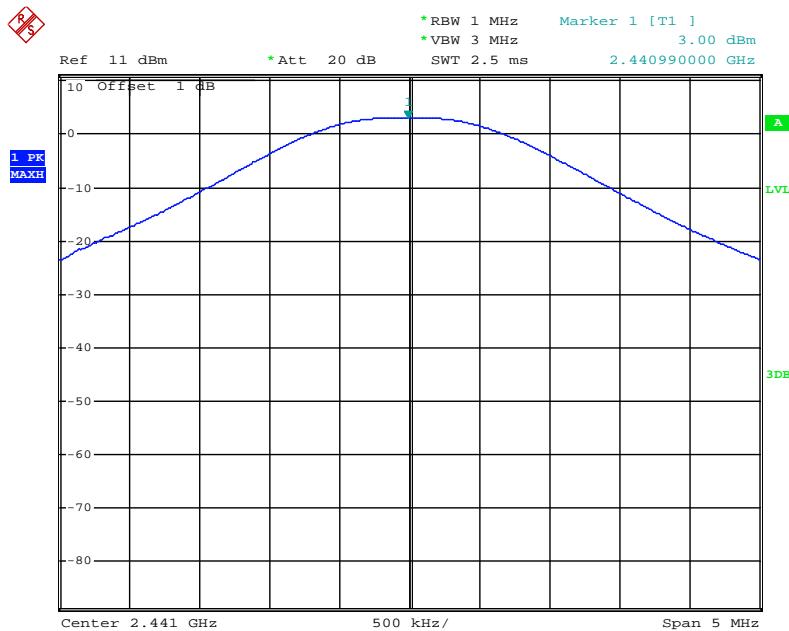

Date: 14.JUN.2013 14:08:21


Middle channel

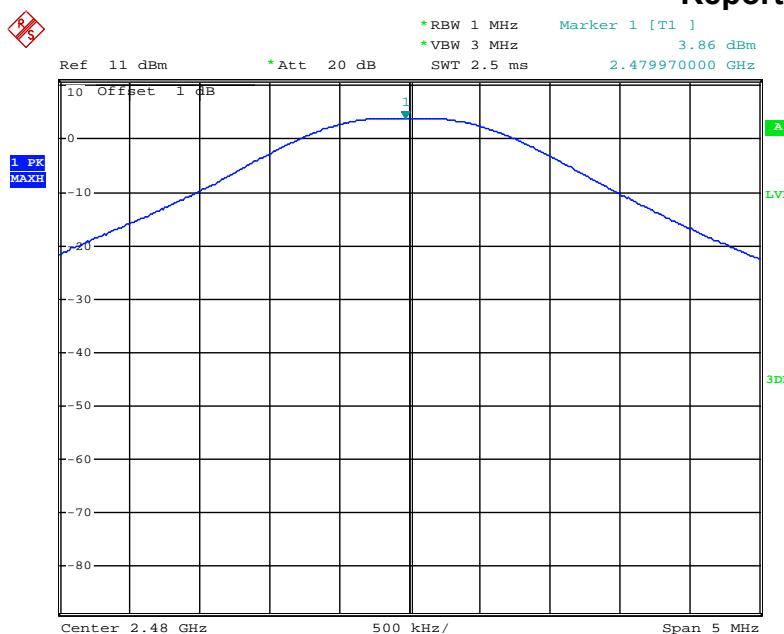

Date: 14.JUN.2013 14:09:32


Highest channel

Modulation mode:	$\pi/4$ -DQPSK
------------------	----------------

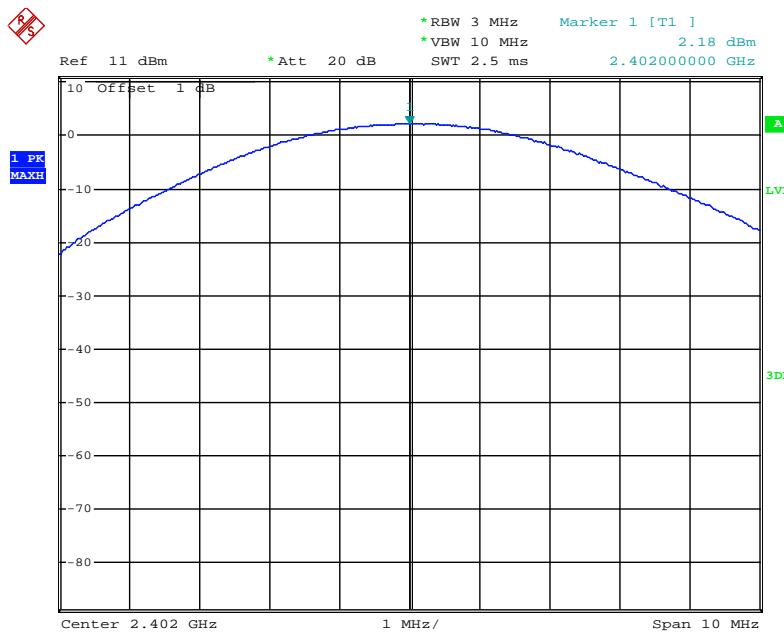


Date: 14.JUN.2013 14:12:52

Lowest channel

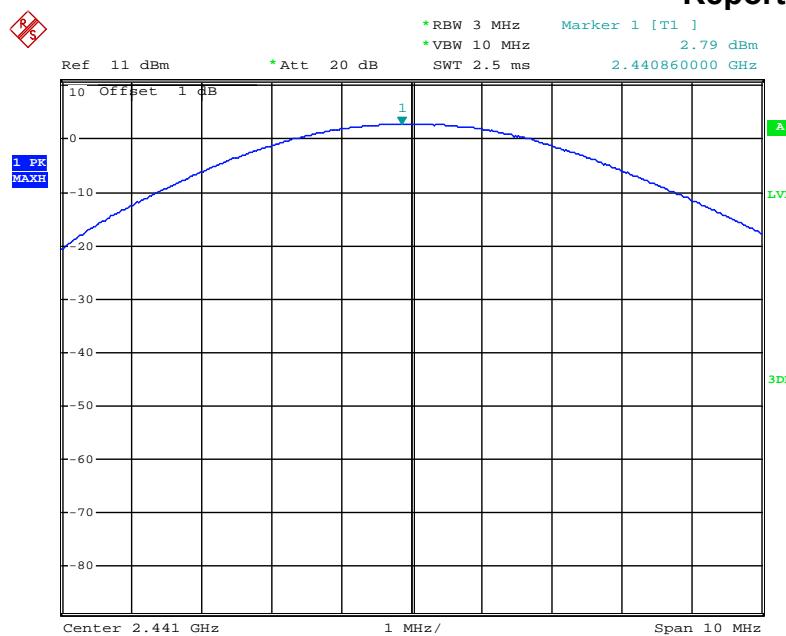

Date: 14.JUN.2013 14:12:15

Middle channel

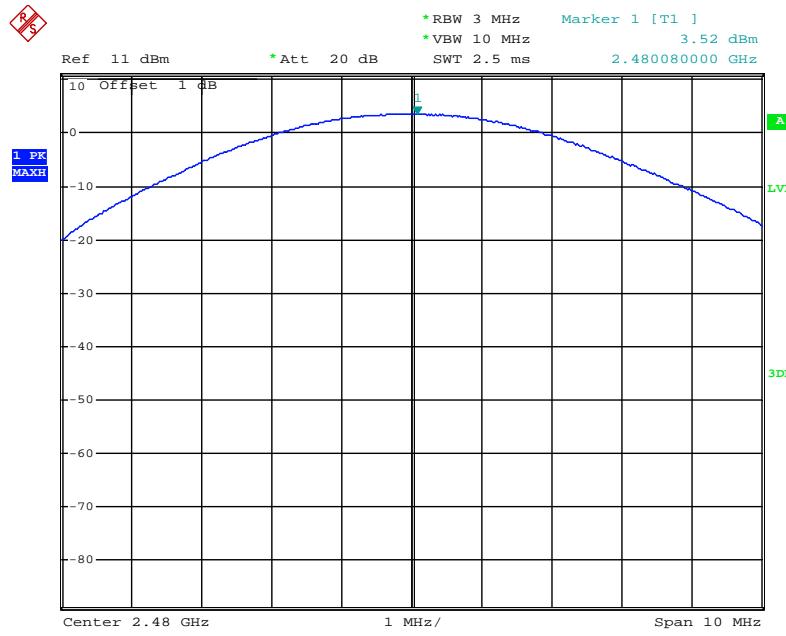


Date: 14.JUN.2013 14:11:18

Highest channel


Modulation mode:

8DPSK

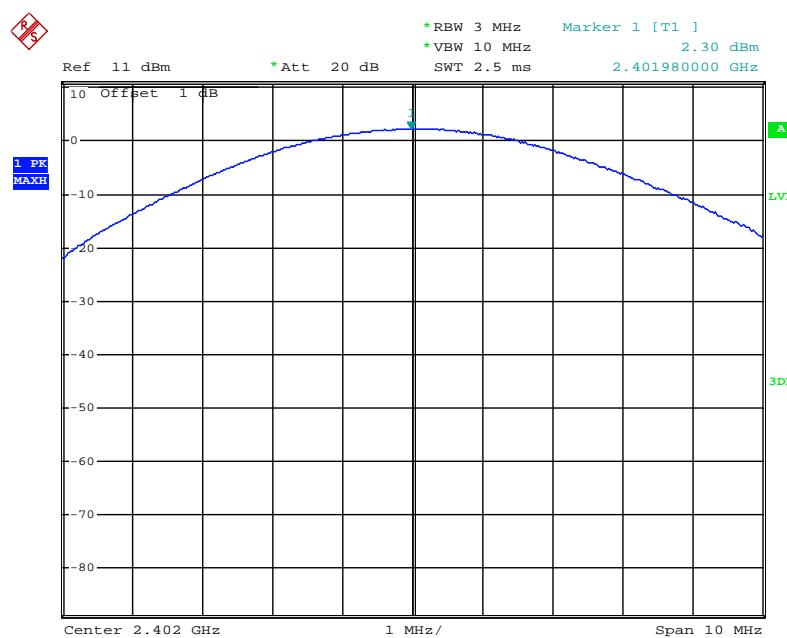


Date: 14.JUN.2013 14:13:25

Lowest channel

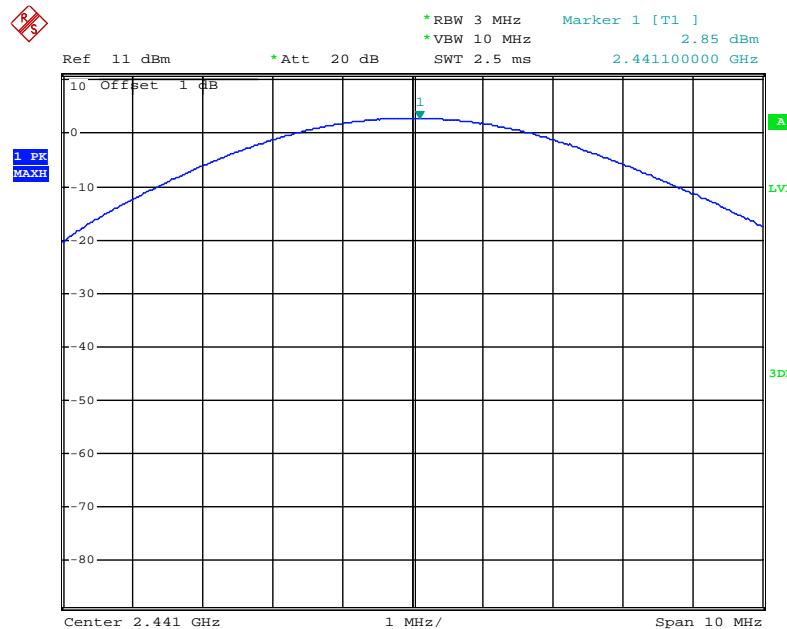

Date: 14.JUN.2013 14:14:24


Middle channel

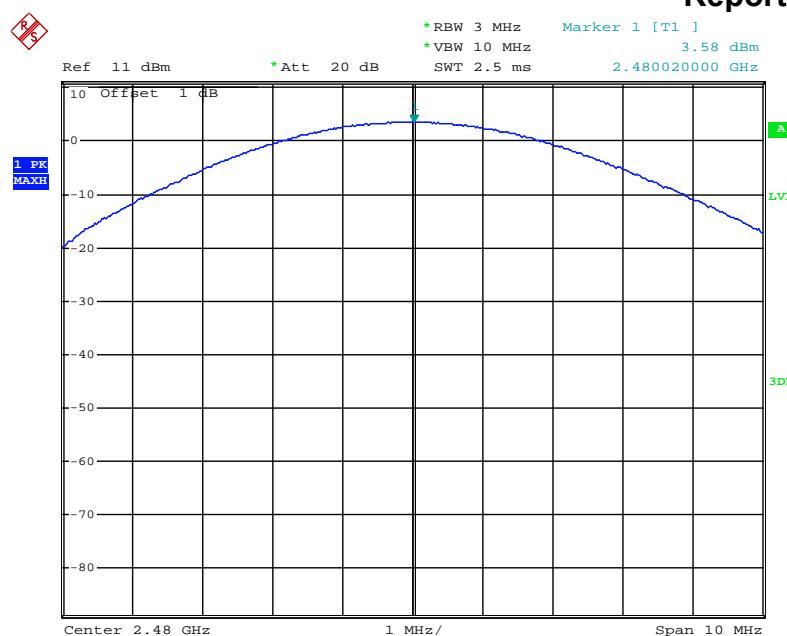

Date: 14.JUN.2013 14:15:00

Highest channel

6.4 20dB Occupy Bandwidth

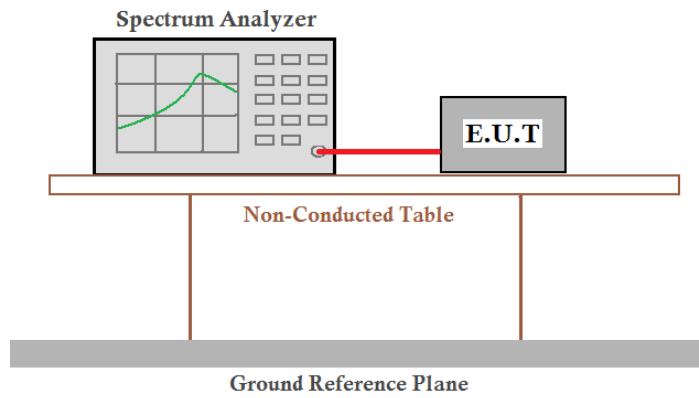Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=30 kHz, VBW=100 kHz, detector=Peak
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ -DQPSK	8DPSK
Lowest	864	1308	1268
Middle	864	1316	1300
Highest	900	1308	1296

Test plot as follows:


Modulation mode:

GFSK

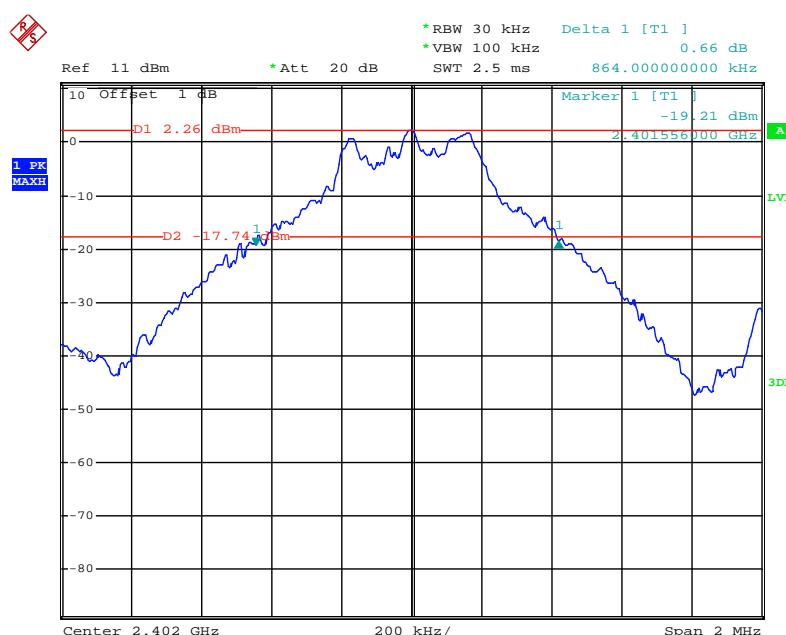

Date: 14.JUN.2013 14:19:44

Lowest channel

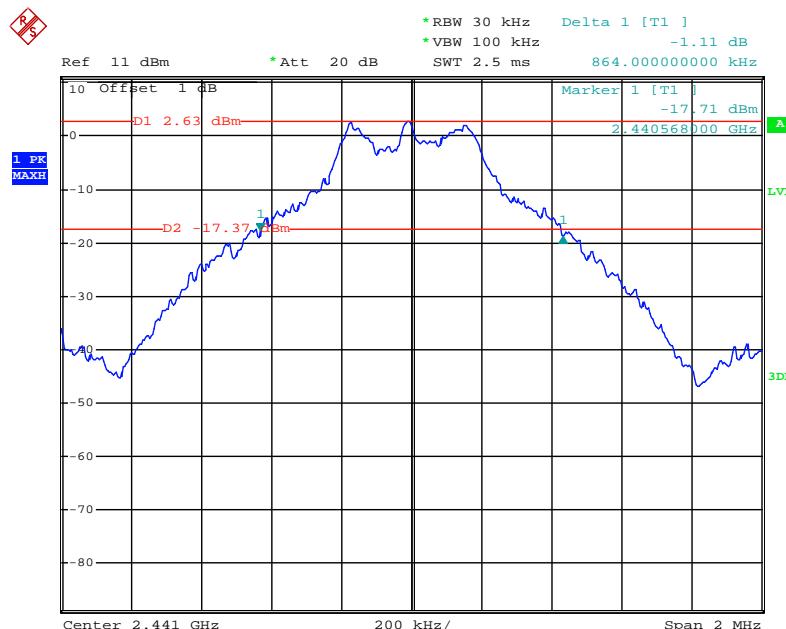

Date: 14.JUN.2013 14:22:13


Middle channel

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China

Project No.: CCIS130600169RF

Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366


Page 20 of 85

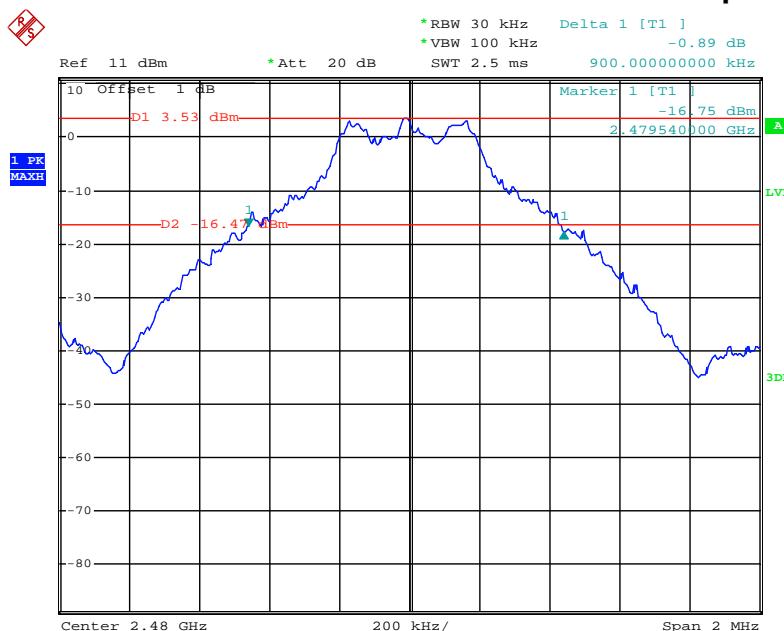

Date: 14.JUN.2013 14:27:11


Highest channel

Modulation mode:	$\pi/4$ -DQPSK
------------------	----------------

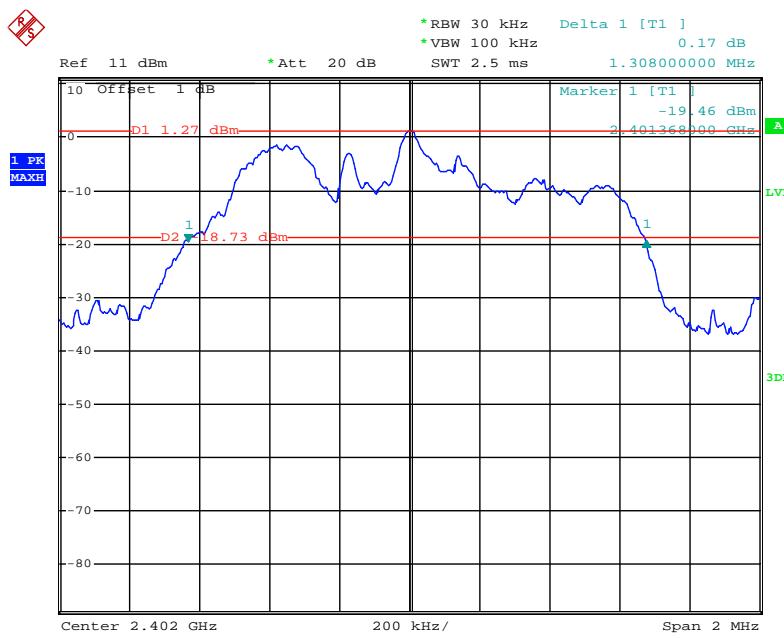


Date: 14.JUN.2013 14:29:49

Lowest channel

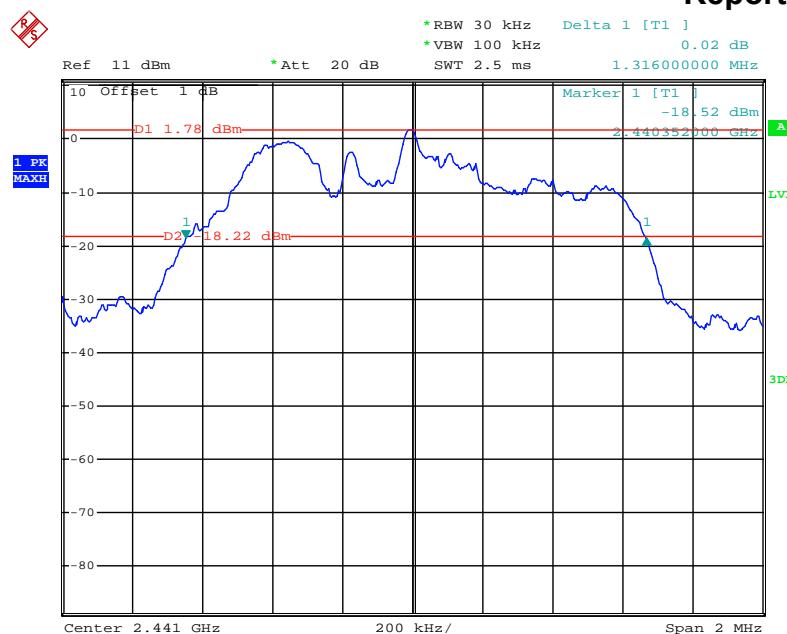

Date: 14.JUN.2013 14:34:00

Middle channel

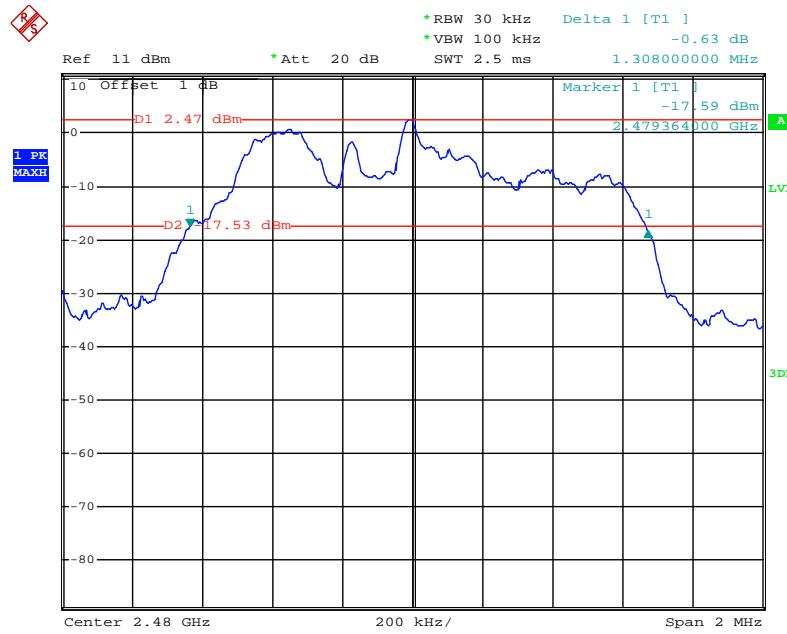


Date: 14.JUN.2013 14:36:45

Highest channel


Modulation mode:

8DPSK

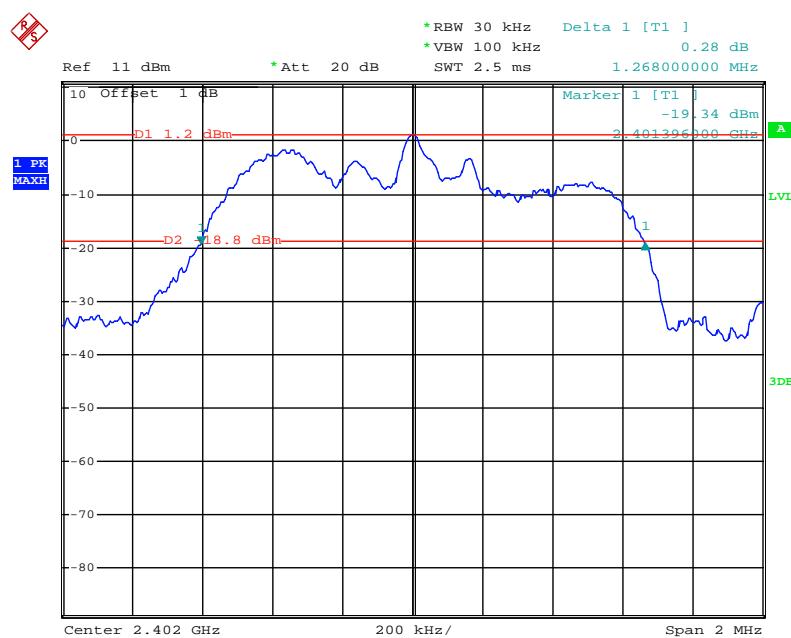


Date: 14.JUN.2013 14:39:25

Lowest channel

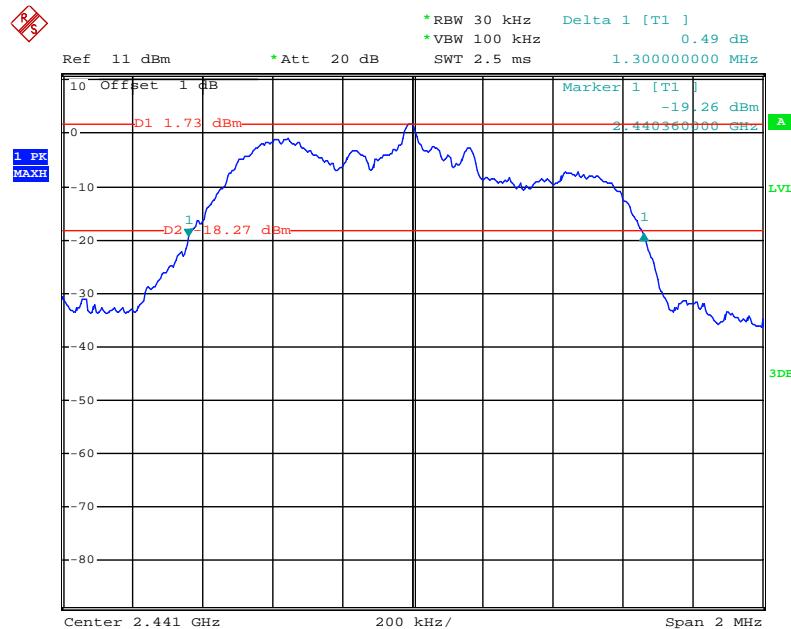

Date: 14.JUN.2013 14:42:53


Middle channel

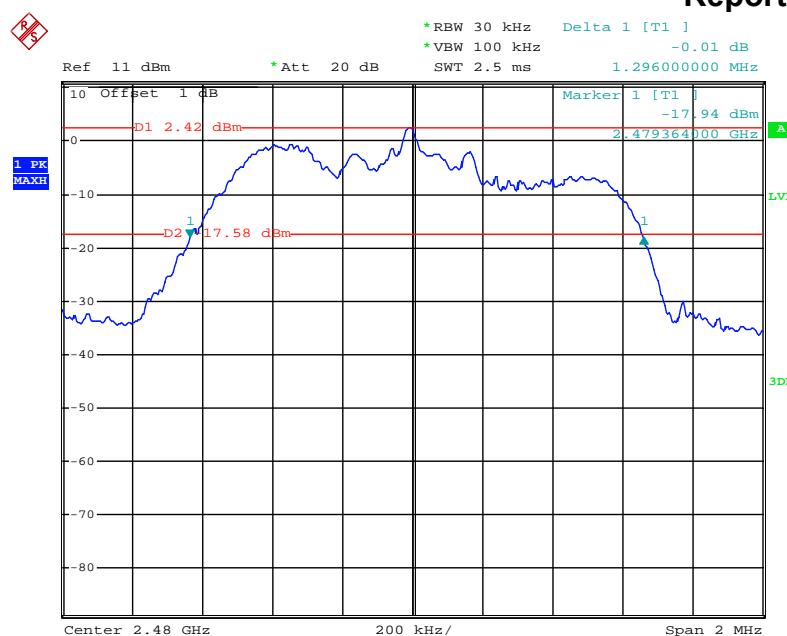

Date: 14.JUN.2013 14:45:16

Highest channel

6.5 Carrier Frequencies Separation

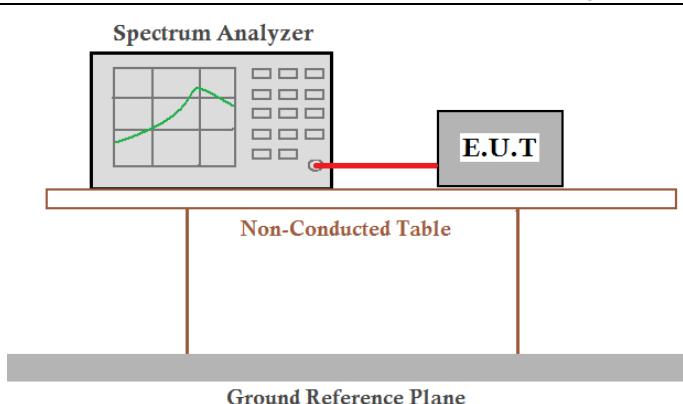Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1004	600.00	Pass
Middle	1004	600.00	Pass
Highest	1004	600.00	Pass
$\pi/4$ -DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1004	877.33	Pass
Middle	1004	877.33	Pass
Highest	1004	877.33	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1008	866.67	Pass
Middle	1008	866.67	Pass
Highest	1008	866.67	Pass


Note: According to section 6.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	900	600.00
$\pi/4$ -DQPSK	1316	877.33
8DPSK	1300	866.67

Test plot as follows:


Modulation mode:

GFSK

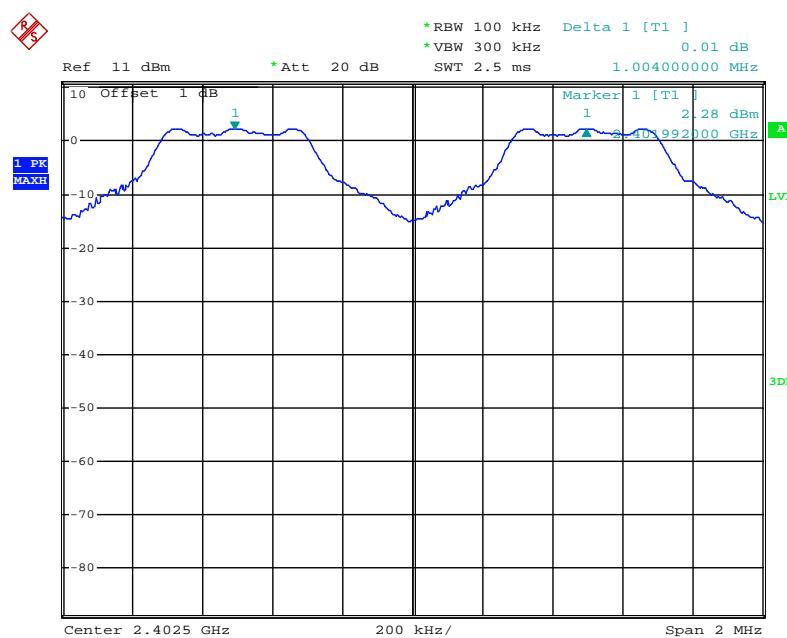


Date: 14.JUN.2013 14:51:45

Lowest channel

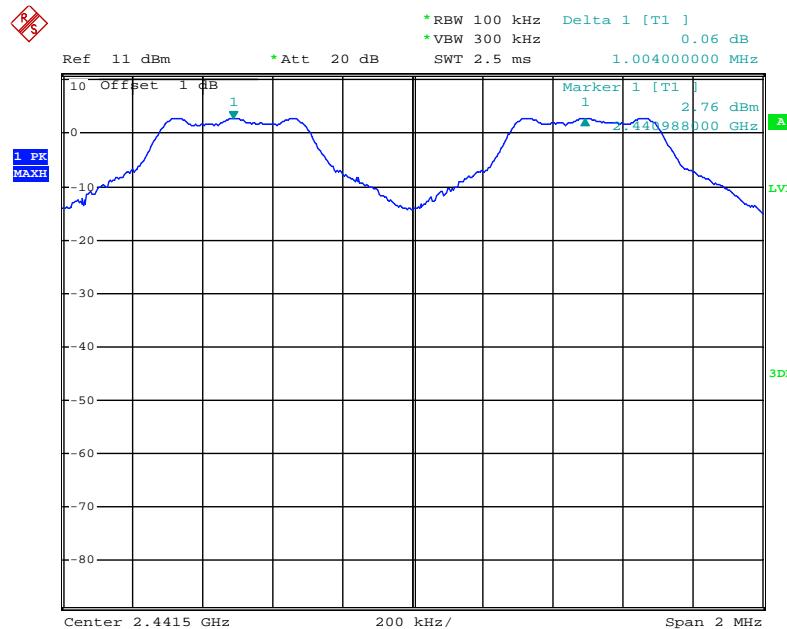

Date: 14.JUN.2013 14:54:36


Middle channel

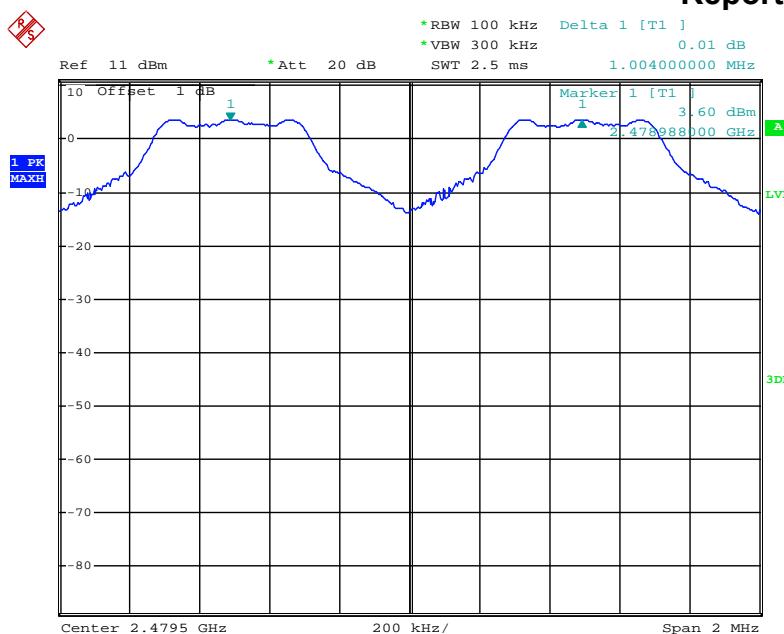

Date: 14.JUN.2013 14:56:58


Highest channel

Modulation mode:	$\pi/4$ -DQPSK
------------------	----------------

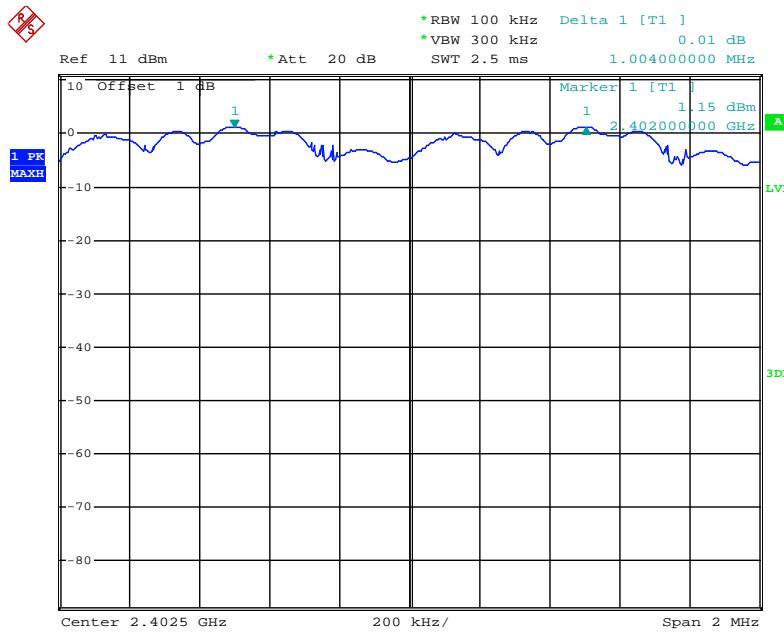


Date: 14.JUN.2013 15:01:12

Lowest channel

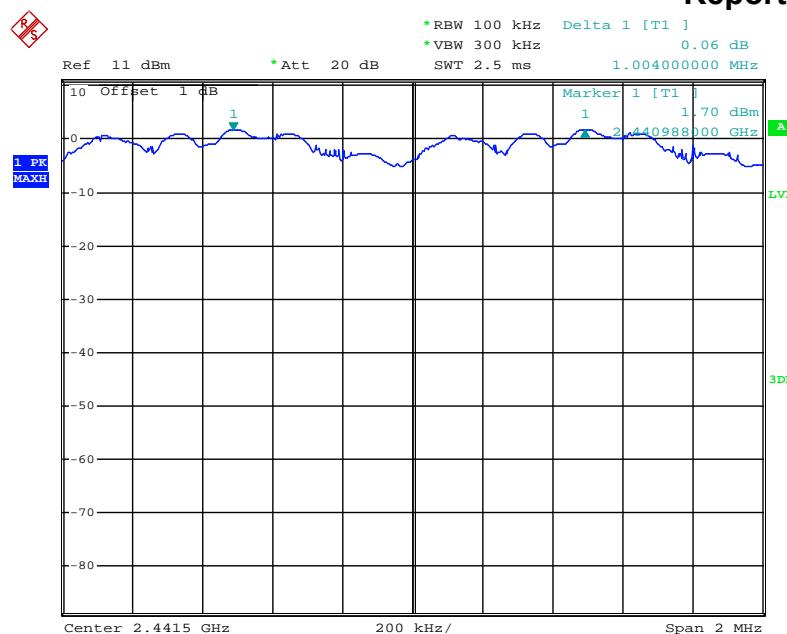

Date: 14.JUN.2013 15:04:19

Middle channel

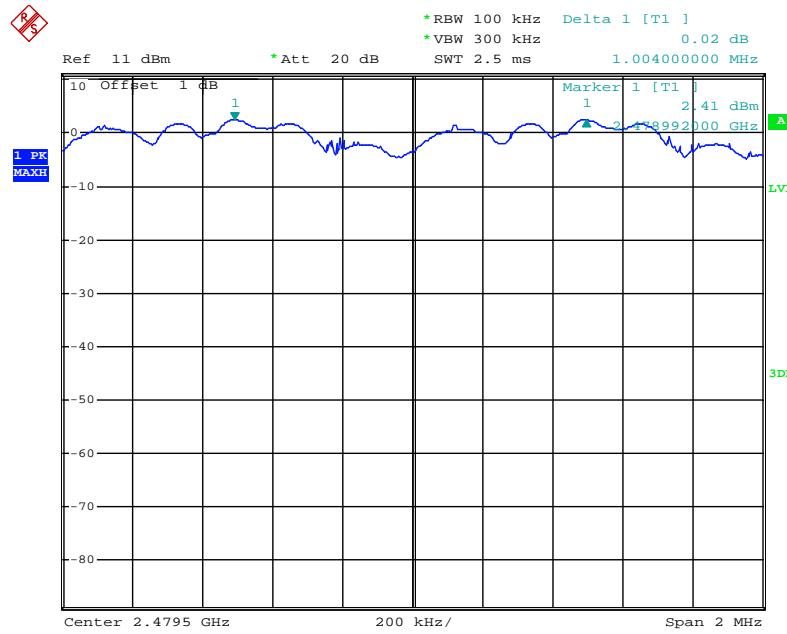


Date: 14.JUN.2013 15:07:52

Highest channel


Modulation mode:

8DPSK

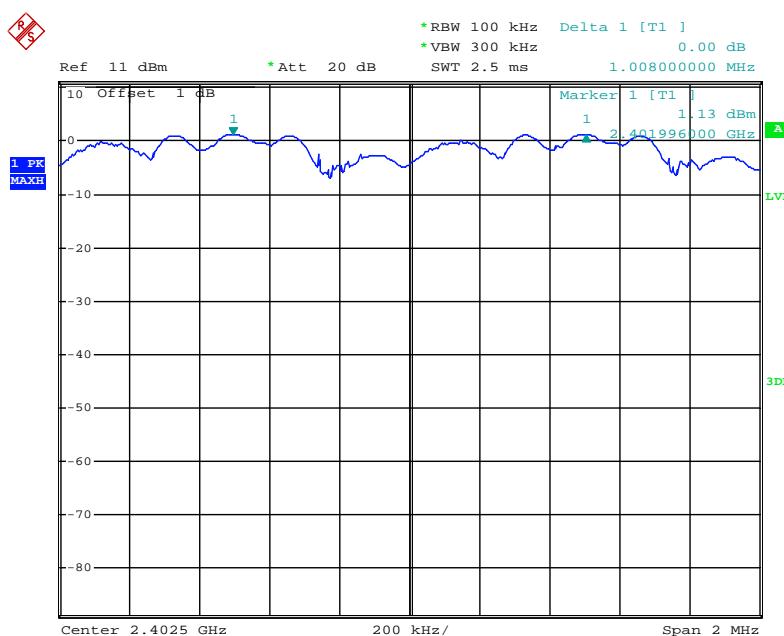


Date: 14.JUN.2013 15:09:49

Lowest channel

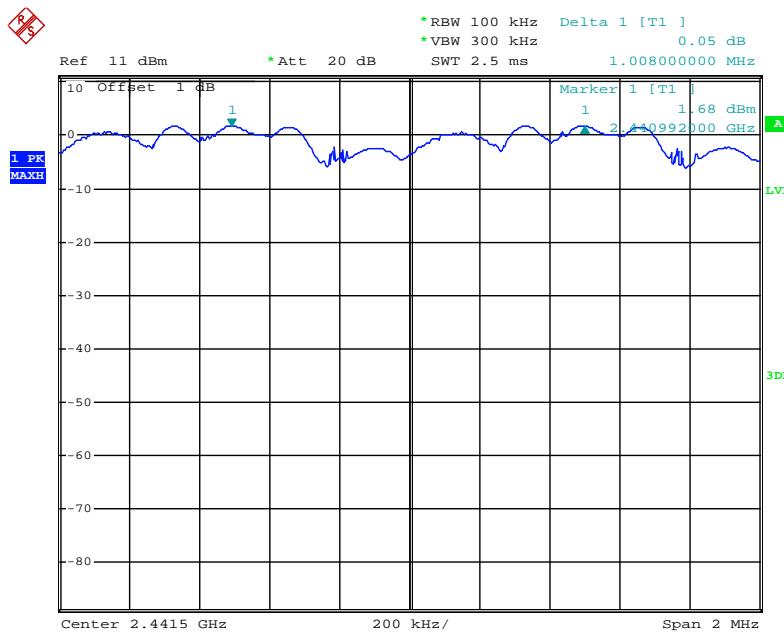

Date: 14.JUN.2013 15:11:38


Middle channel

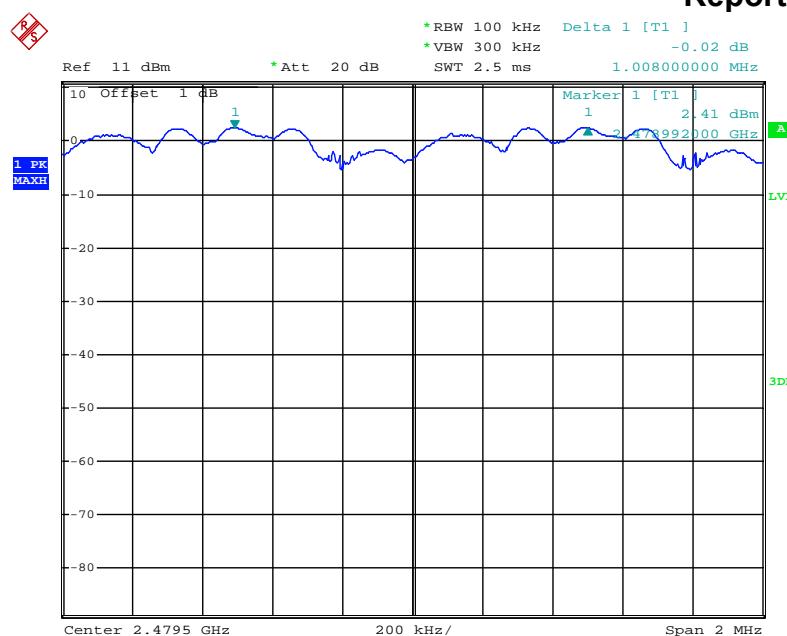

Date: 14.JUN.2013 15:13:42

Highest channel


6.6 Hopping Channel Number

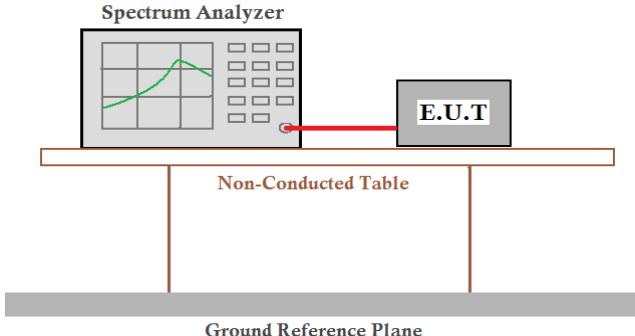Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data:


Mode	Hopping channel numbers	Limit	Result
GFSK, π/4-DQPSK, 8DPSK	79	15	Pass

GFSK

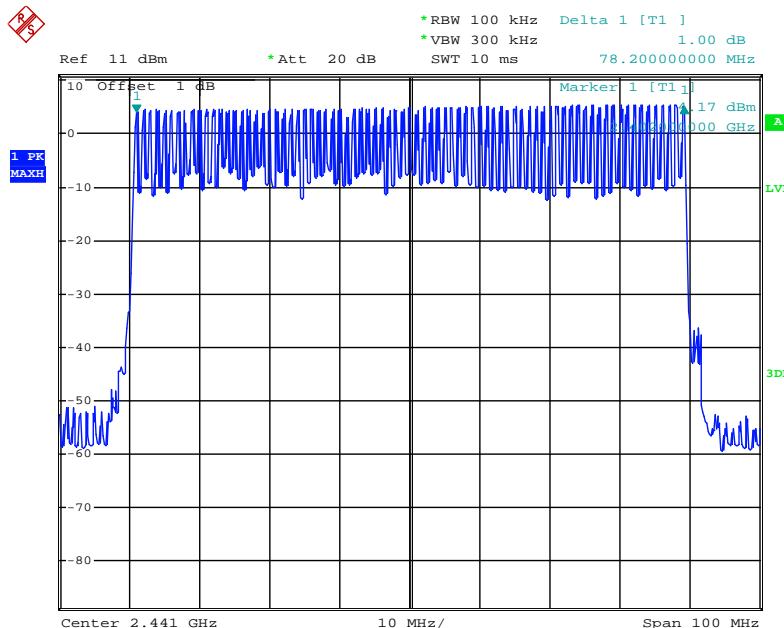


Date: 14.JUN.2013 15:27:48

$\pi/4$ -DQPSK

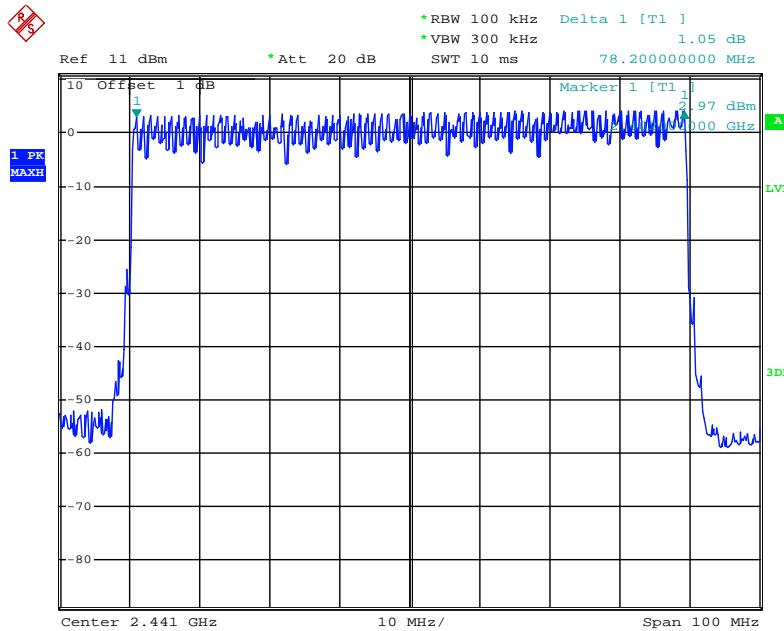


Date: 14.JUN.2013 15:34:41

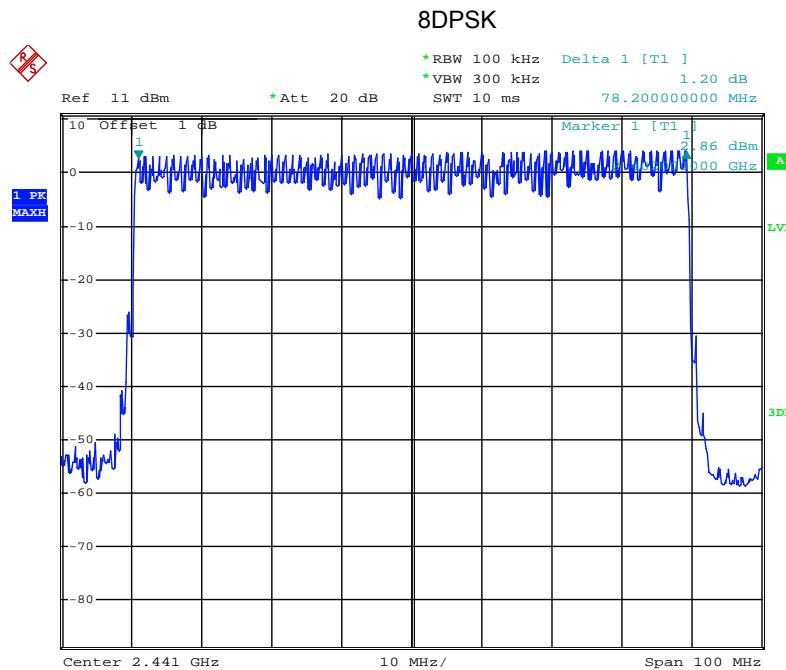

Date: 14.JUN.2013 15:37:30

6.7 Dwell Time

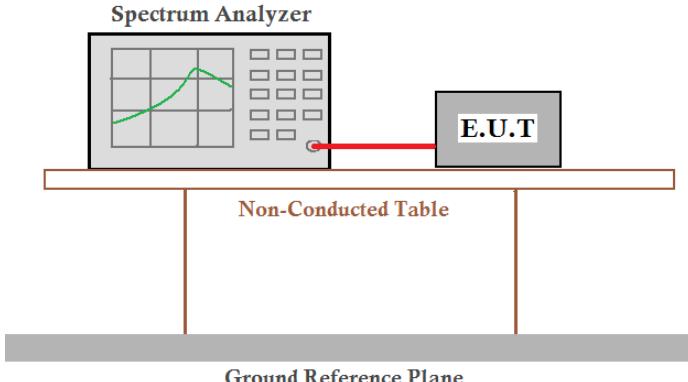Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data (Worse case)

Mode	Packet	Dwell time (second)	Limit (second)	Result
GFSK	DH1	0.17344	0.4	Pass
	DH3	0.28704		
	DH5	0.32939		
$\pi/4$ -DQPSK	2-DH1	0.17920	0.4	Pass
	2-DH3	0.29088		
	2-DH5	0.32768		
8DPSK	3-DH1	0.17856	0.4	Pass
	3-DH3	0.29184		
	3-DH5	0.32853		

For GFSK, $\pi/4$ -DQPSK and 8DPSK:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

$$\text{DH1 time slot} = 0.542 * (1600 / (2 * 79)) * 31.6 = 173.44 \text{ ms}$$

$$\text{DH3 time slot} = 1.794 * (1600 / (4 * 79)) * 31.6 = 287.04 \text{ ms}$$

$$\text{DH5 time slot} = 3.088 * (1600 / (6 * 79)) * 31.6 = 329.39 \text{ ms}$$

$$\text{2-DH1 time slot} = 0.560 * (1600 / (2 * 79)) * 31.6 = 179.20 \text{ ms}$$

$$\text{2-DH3 time slot} = 1.818 * (1600 / (4 * 79)) * 31.6 = 290.88 \text{ ms}$$

$$\text{2-DH5 time slot} = 3.072 * (1600 / (6 * 79)) * 31.6 = 327.68 \text{ ms}$$


$$\text{3-DH1 time slot} = 0.558 * (1600 / (2 * 79)) * 31.6 = 178.56 \text{ ms}$$

$$\text{3-DH3 time slot} = 1.824 * (1600 / (4 * 79)) * 31.6 = 291.84 \text{ ms}$$

$$\text{3-DH5 time slot} = 3.080 * (1600 / (6 * 79)) * 31.6 = 328.53 \text{ ms}$$


Test plot as follows:

Modulation mode:	GFSK
------------------	------

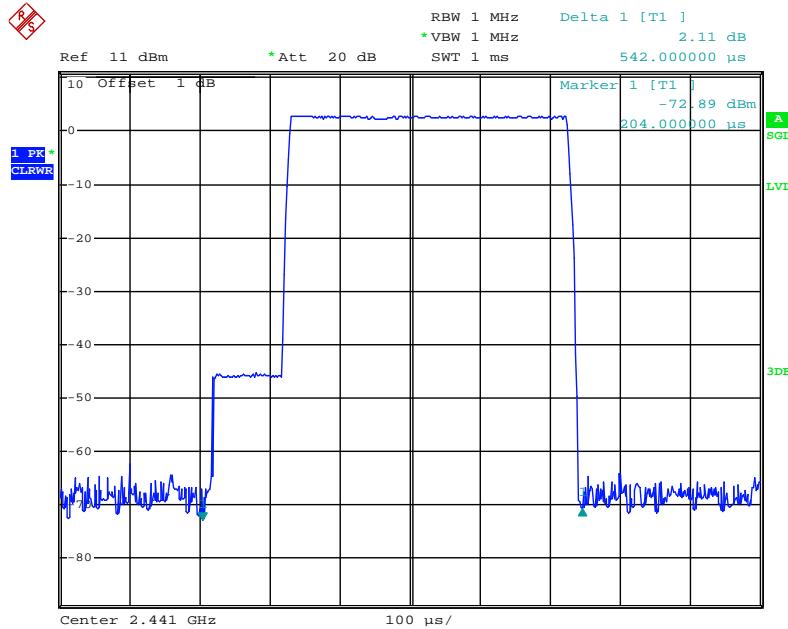

Date: 14.JUN.2013 15:40:26

DH1

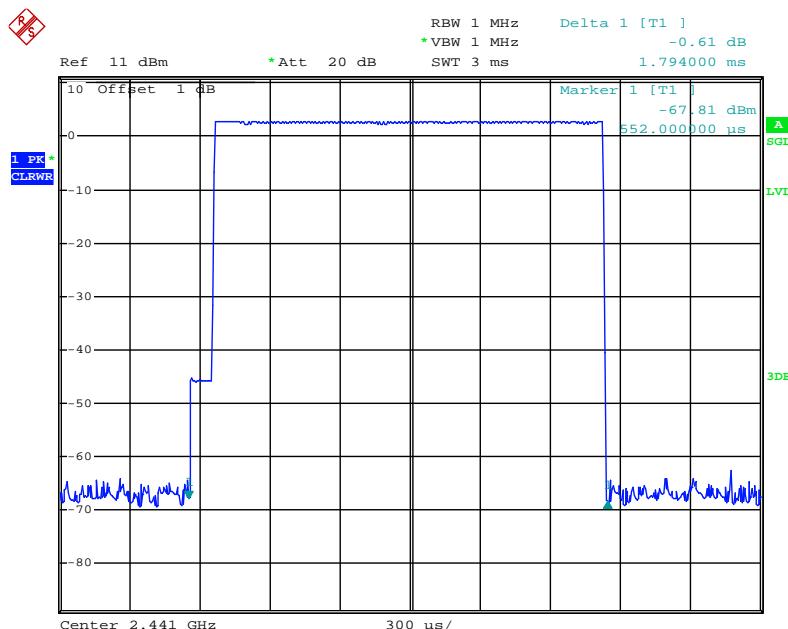

Date: 14.JUN.2013 15:42:08


DH3

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China

Project No.: CCIS130600169RF

Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366


Page 36 of 85

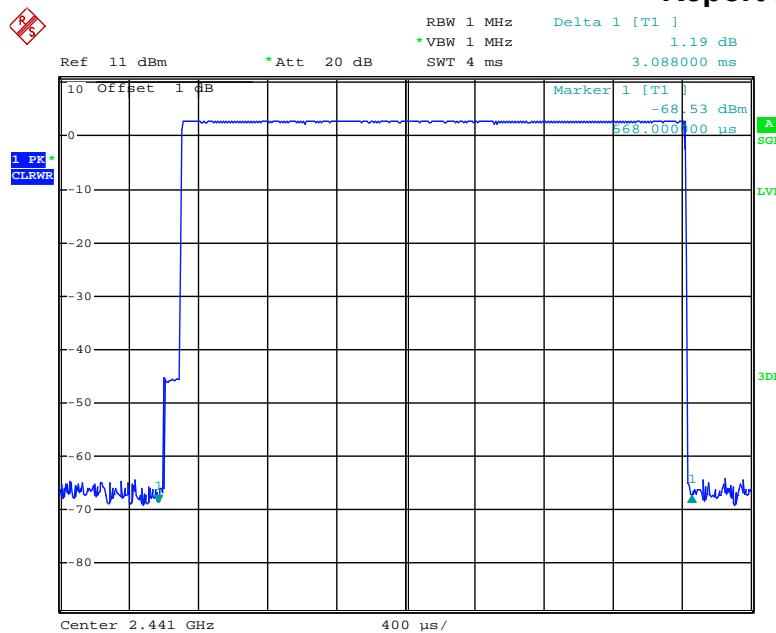

Date: 14.JUN.2013 15:43:30


DH5

Modulation mode:	$\pi/4$ -DQPSK
------------------	----------------

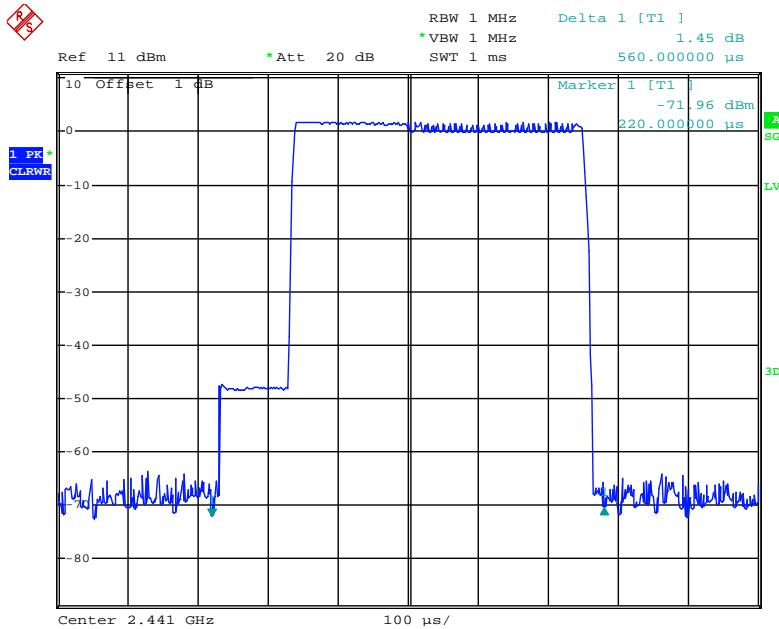


Date: 14.JUN.2013 15:44:43

2-DH1

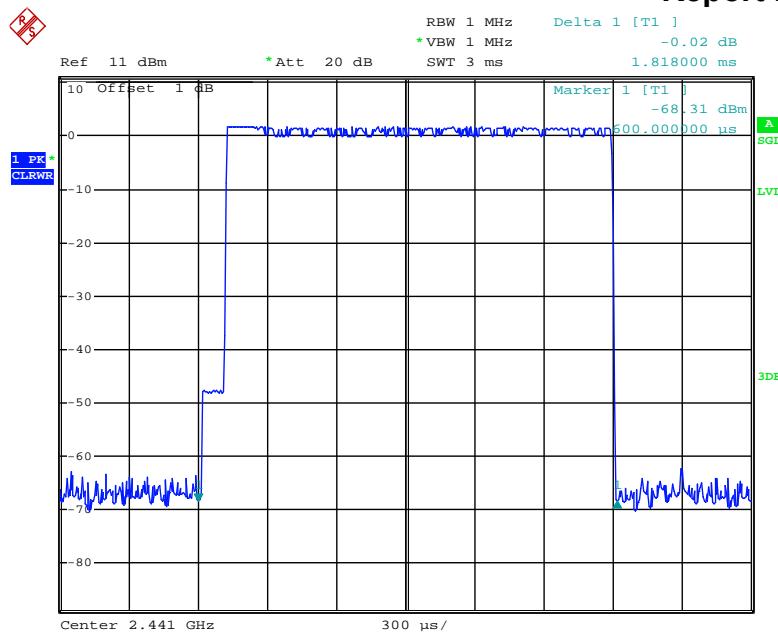

Date: 14.JUN.2013 15:48:28

2-DH3

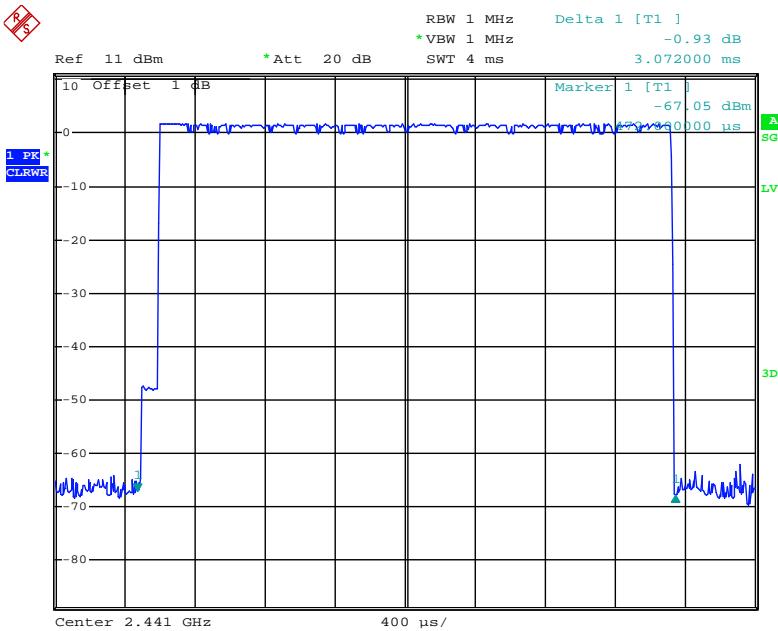


Date: 14.JUN.2013 15:50:04

2-DH5


Modulation mode:

8DPSK

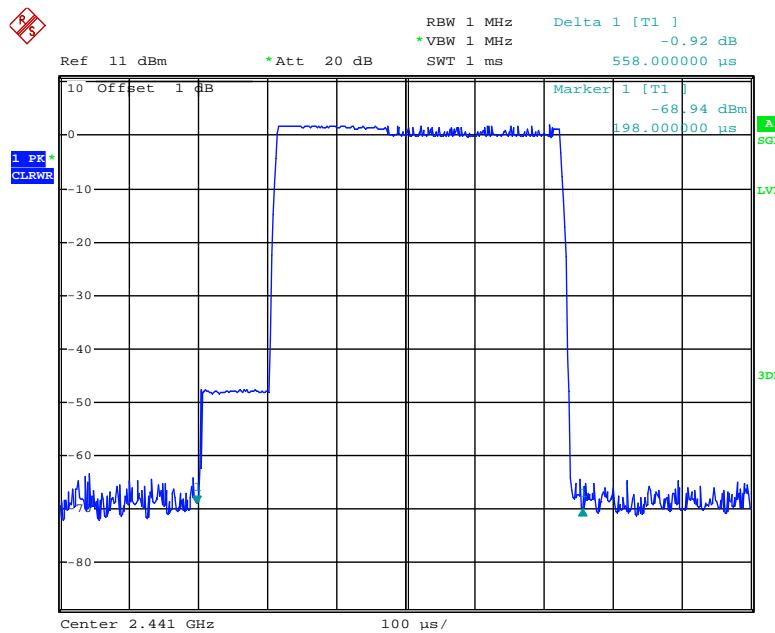

Date: 14.JUN.2013 15:51:19

3-DH1

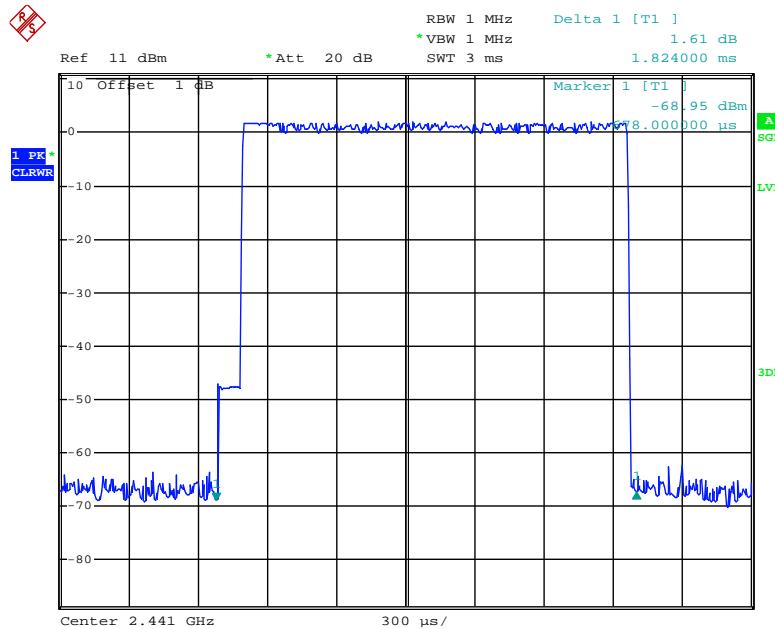

Date: 14.JUN.2013 15:52:20


3-DH3

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China

Project No.: CCIS130600169RF

Telephone: +86 (0) 755 23118282 Fax: +86 (0) 755 23116366


Page 39 of 85

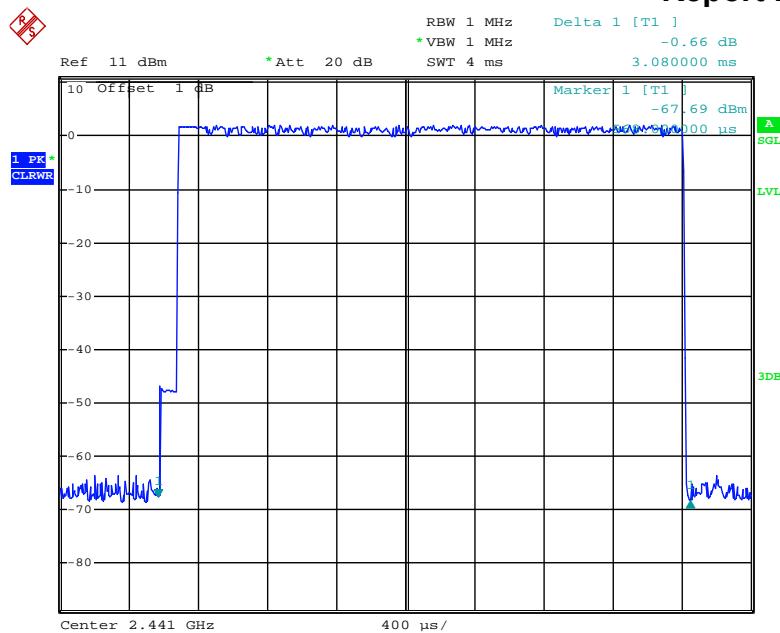

Date: 14.JUN.2013 15:53:29


3-DH5

6.8 Pseudorandom Frequency Hopping Sequence

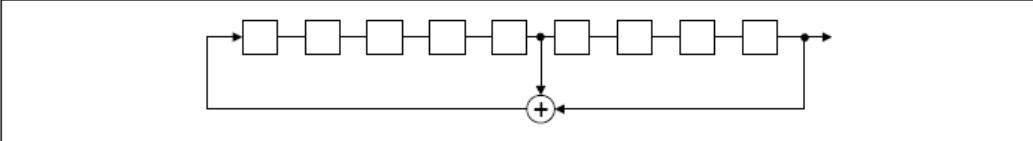Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
EUT Pseudorandom Frequency Hopping Sequence																							
	<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> Number of shift register stages: 9 Length of pseudo-random sequence: $2^9 - 1 = 511$ bits Longest sequence of zeros: 8 (non-inverted signal)  <p>Linear Feedback Shift Register for Generation of the PRBS sequence</p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1"> <tr> <td>0</td><td>2</td><td>4</td><td>6</td><td>62</td><td>64</td><td>78</td><td>1</td><td>73</td><td>75</td><td>77</td> </tr> <tr> <td> </td><td> </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	0	2	4	6	62	64	78	1	73	75	77											
0	2	4	6	62	64	78	1	73	75	77													


6.9 Band Edge

6.9.1 Conducted Emission Method

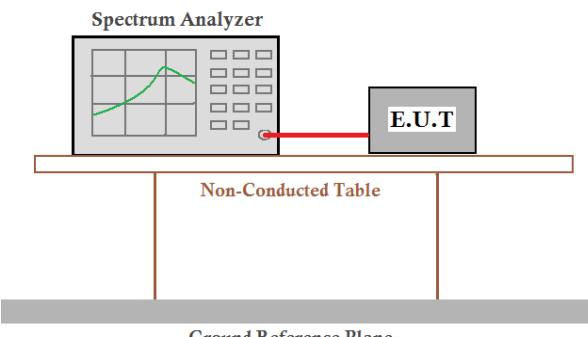Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode and hopping mode
Test results:	Pass


Test plot as follows:

Modulation: GFSK	Test channel: Lowest channel
------------------	------------------------------

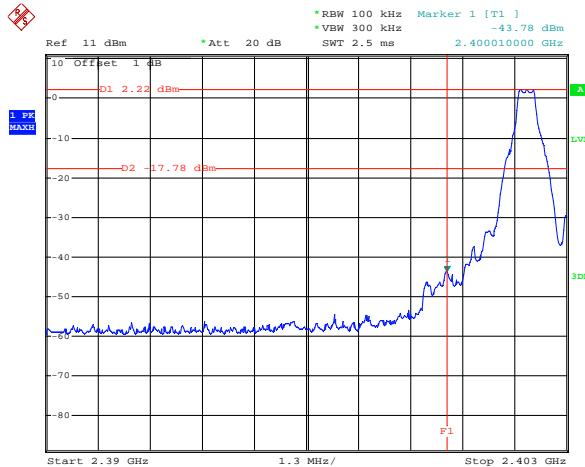

Date: 14.JUN.2013 17:03:18


No-hopping mode

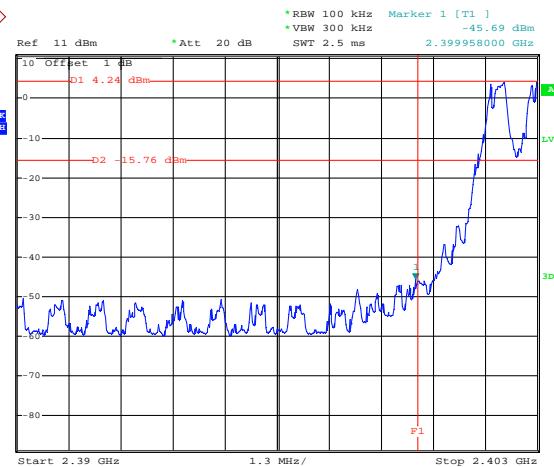

Date: 14.JUN.2013 17:04:50


Hopping mode

Modulation: GFSK	Test channel: Highest channel
------------------	-------------------------------

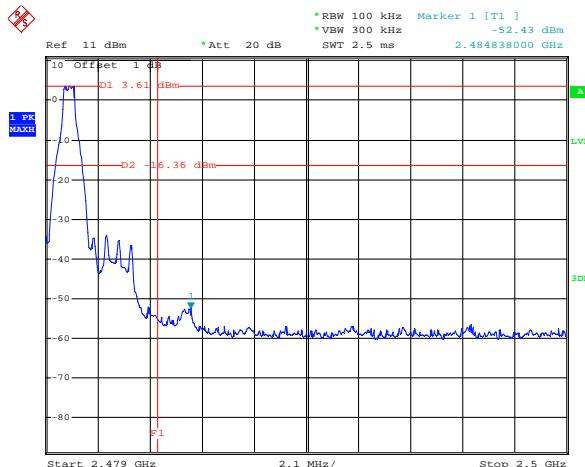

Date: 14.JUN.2013 17:15:24



No-hopping mode

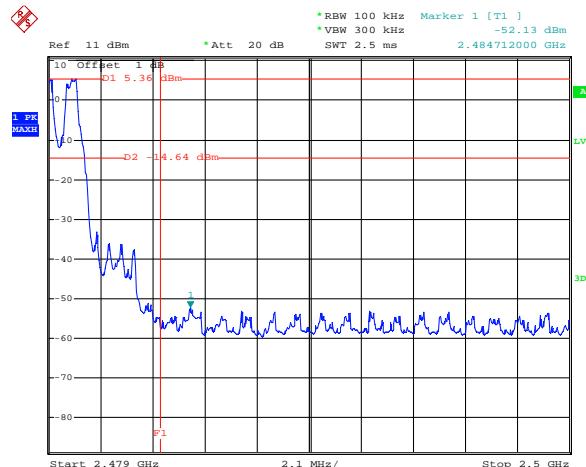

Date: 14.JUN.2013 17:18:44

Hopping mode

Modulation: $\pi/4$ -DQPSK	Test channel: Lowest channel
----------------------------	------------------------------

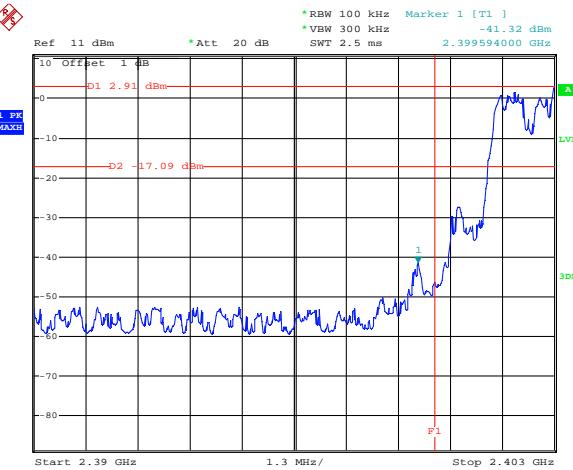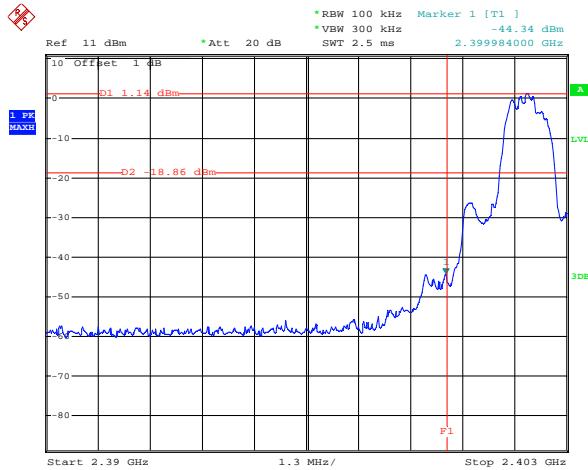


Date: 14.JUN.2013 17:06:21

No-hopping mode

Date: 14.JUN.2013 17:08:00

Hopping mode

Modulation: $\pi/4$ -DQPSK	Test channel: Highest channel
----------------------------	-------------------------------

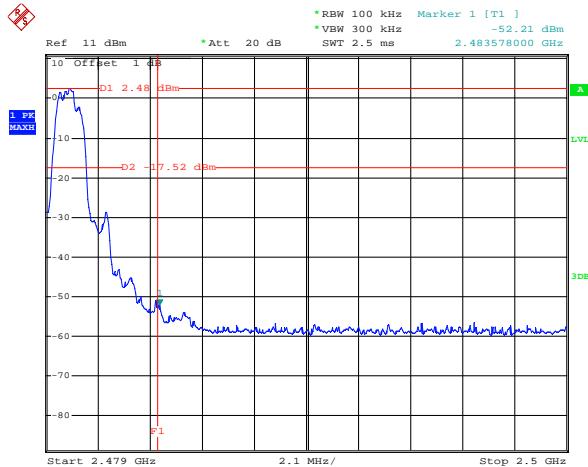


Date: 14.JUN.2013 17:20:52

No-hopping mode

Date: 14.JUN.2013 17:24:07

Hopping mode

Modulation: 8DPSK	Test channel: Lowest channel
-------------------	------------------------------

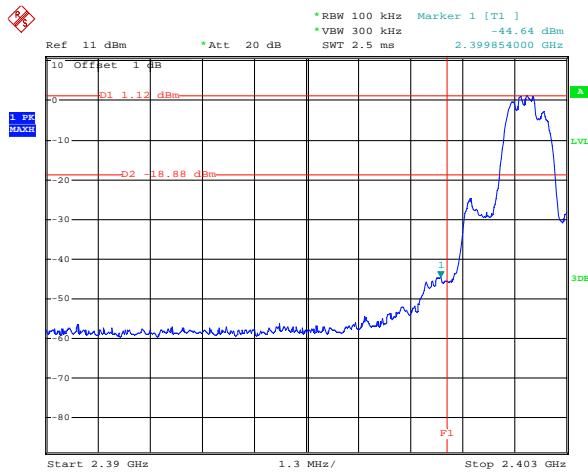

Date: 14.JUN.2013 17:10:30


No-hopping mode



Date: 14.JUN.2013 17:13:37


Hopping mode

Modulation: 8DPSK	Test channel: Highest channel
-------------------	-------------------------------

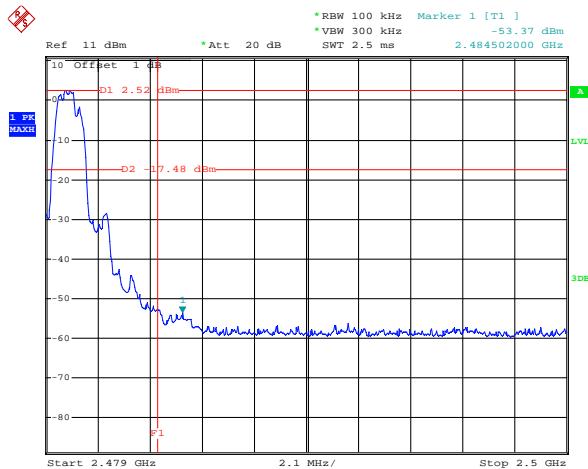

Date: 14.JUN.2013 17:27:36

No-hopping mode

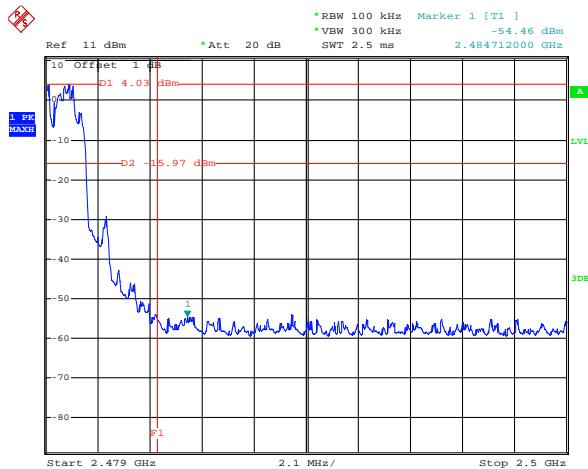

Date: 14.JUN.2013 17:32:03

Hopping mode

6.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.4: 2003								
Test Frequency Range:	2.3GHz to 2.5GHz								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
	Above 1GHz	Peak	1MHz	10Hz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
	Above 1GHz	74.00		Peak Value					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								
Test Instruments:	Refer to section 5.7 for details								
Test mode:	Non-hopping mode								
Test results:	Passed								


Remark:

- During the test, pre-scan the GFSK, π/4-DQPSK, 8DPSK, and all data were shown in report.
- Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

GFSK mode

Test channel: Lowest


Horizontal:

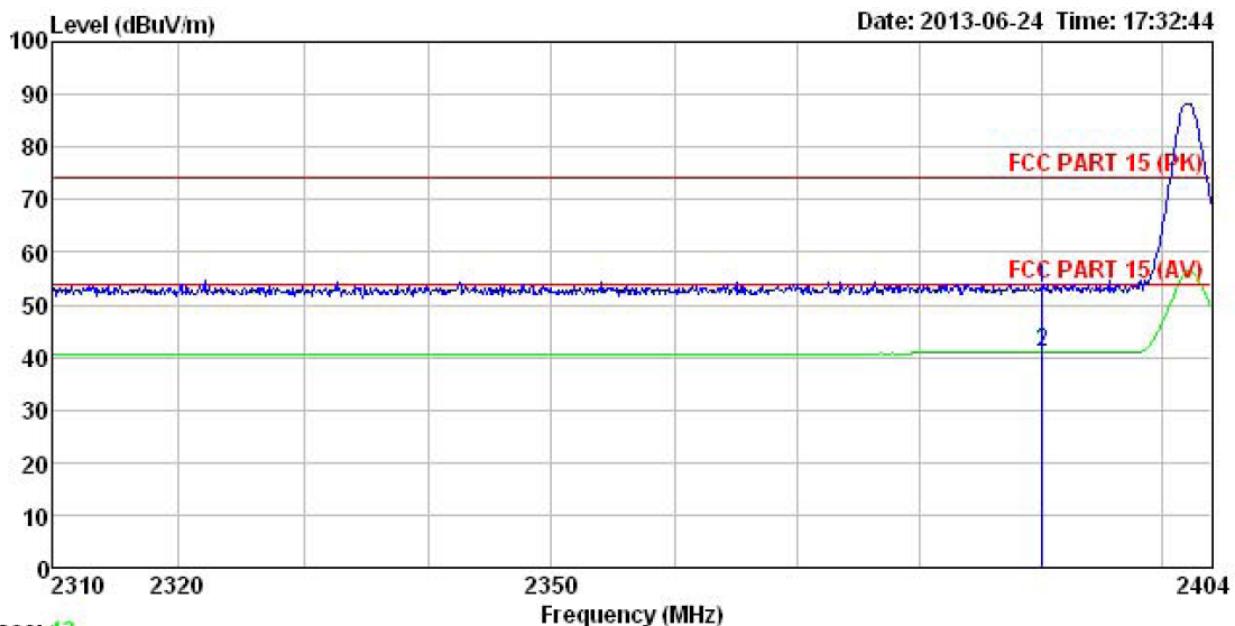

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT TX (DH1 Low channel) mode
Power Rating : DC 3.7W
Environment : Temp:25.5°C Huni:55%
Test Engineer: Winner
Remark :

	ReadAntenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2390.000	19.76	27.58	5.67	0.00	53.01
2	2390.000	7.58	27.58	5.67	0.00	40.83
					74.00	-20.99 Peak
					54.00	-13.17 Average

Vertical:

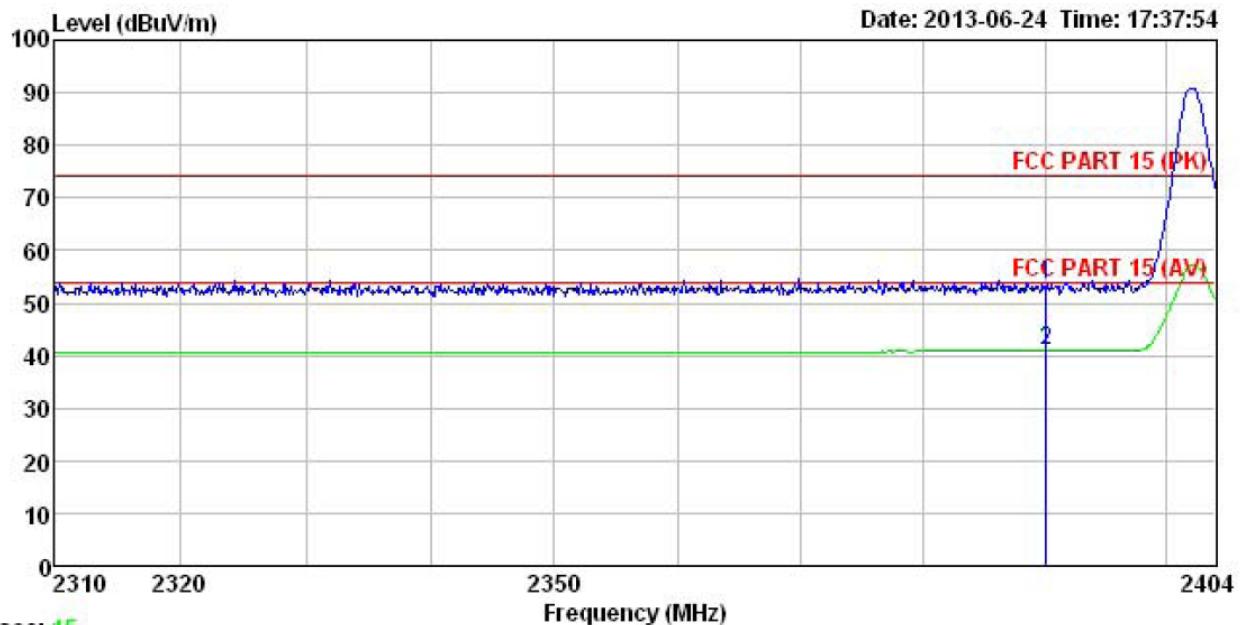


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT TX (DH1 Low channel) mode
Power Rating : DC 3.7V
Environment : Temp:25.5°C Huni:55%
Test Engineer: Winner
Remark :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.41	27.58	5.67	0.00	53.66	74.00 -20.34 Peak
2	2390.000	7.60	27.58	5.67	0.00	40.85	54.00 -13.15 Average

Test channel: Highest


Horizontal:

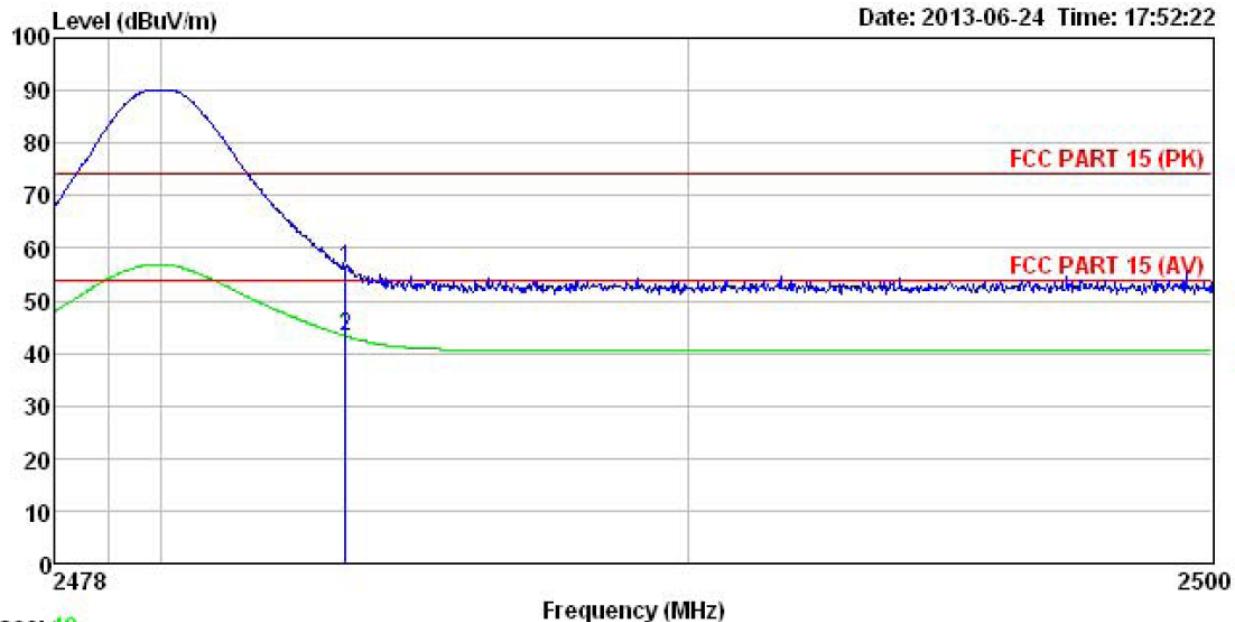

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT TX (DH1 High channel) mode
Power Rating : DC 3.7V
Environment : Temp:25.5°C Humi:55%
Test Engineer: Winner
Remark :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Line	Remark
	MHz	dB _{UV}	dB/m	dB	dB	dB _{UV} /m	dB _{UV} /m
1	2483.500	22.96	27.52	5.70	0.00	56.18	74.00 -17.82 Peak
2	2483.500	10.06	27.52	5.70	0.00	43.28	54.00 -10.72 Average


Vertical:

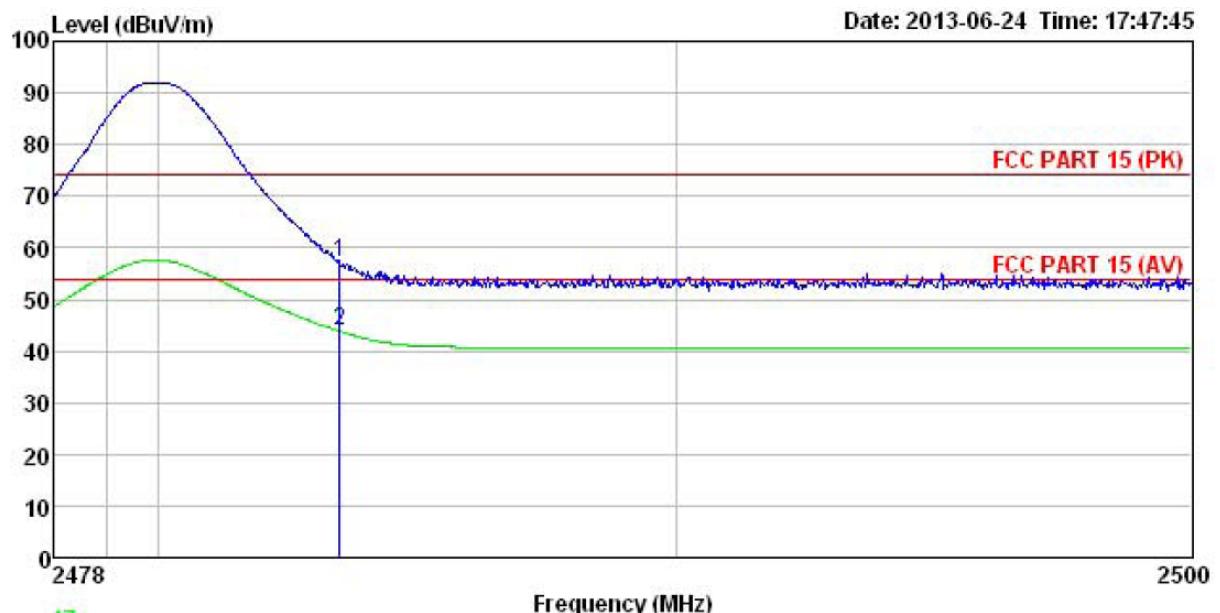

$\pi/4$ -DQPSK mode

Test channel: Lowest

Horizontal:

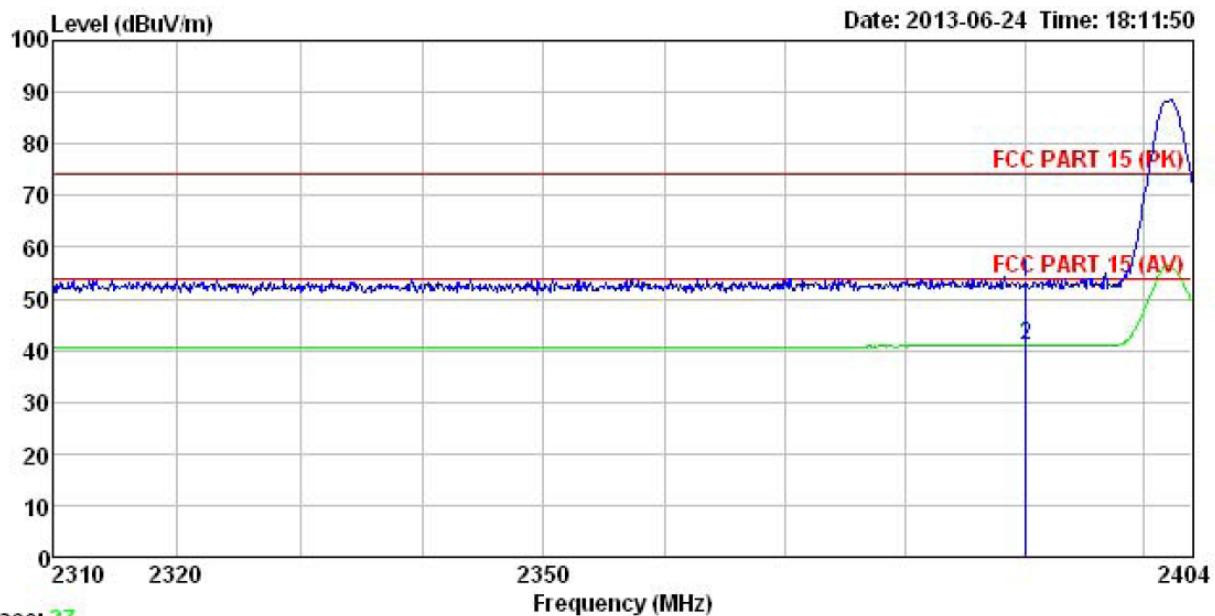


Trace: 27

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job No. : 169RF
 EUT : Bluetooth Speaker
 Model : speeCup
 Test mode : BT TX (2DH1 Low channel) mode
 Power Rating : DC 3.7V
 Environment : Temp:25.5°C Huni:55%
 Test Engineer: Winner
 Remark :

	ReadAntenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.000	19.85	27.58	5.67	0.00	53.10	74.00	-20.90 Peak
2 2390.000	7.58	27.58	5.67	0.00	40.83	54.00	-13.17 Average


Vertical:

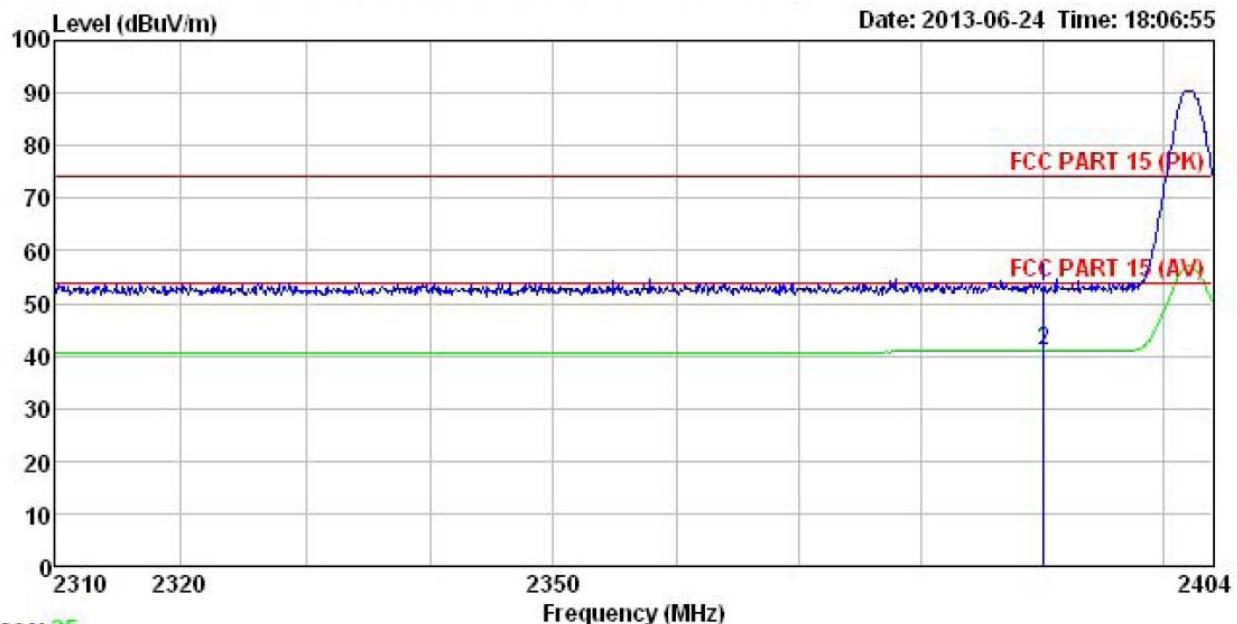

Site	:	3m chamber				
Condition	:	FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL				
Job No.	:	169RF				
EUT	:	Bluetooth Speaker				
Model	:	speeCup				
Test mode	:	BT TX (2DH1 Low channel) mode				
Power Rating	:	DC 3.7V				
Environment	:	Temp:25.5°C Humi:55%				
Test Engineer	:	Winner				
Remark	:					
	ReadAntenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.03	27.58	5.67	0.00	53.28 74.00 -20.72 Peak
2	2390.000	7.63	27.58	5.67	0.00	40.88 54.00 -13.12 Average

Test channel: Highest


Horizontal:

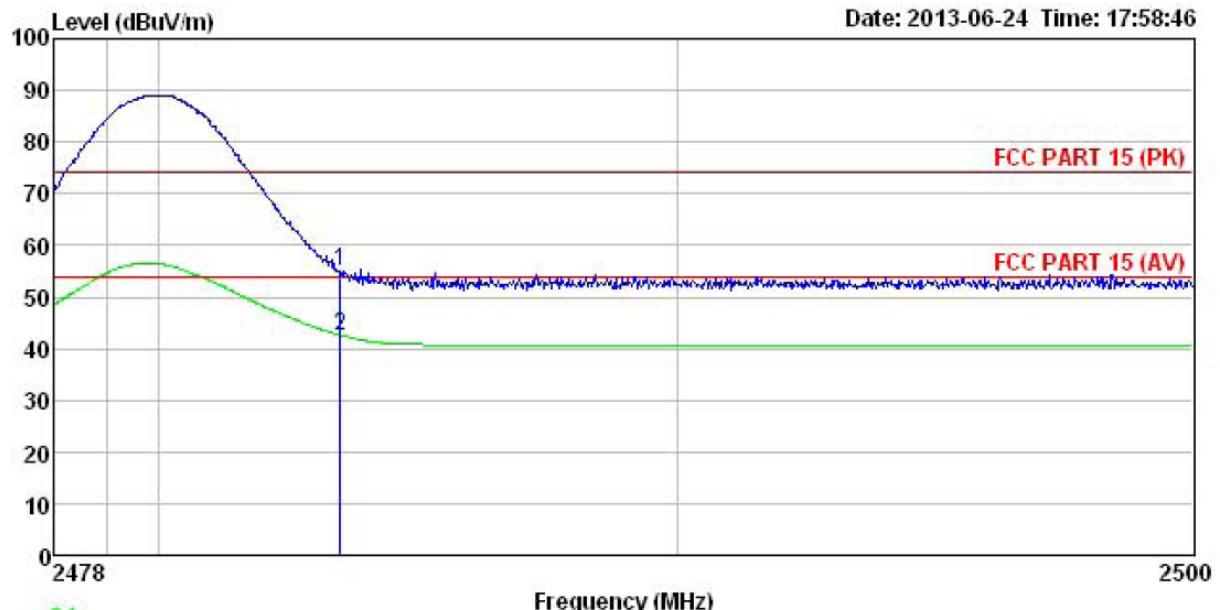

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job No. : 169RF
 EUT : Bluetooth Speaker
 Model : speeCup
 Test mode : BT TX (2DH1 High channel) mode
 Power Rating : DC 3.7V
 Environment : Temp:25.5°C Huni:55%
 Test Engineer: Winner
 Remark :

	Read	Antenna	Cable	Preamp	Limit	Over		
	Freq	Level	Factor	Loss	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	21.93	27.52	5.70	0.00	55.15	74.00	-18.85 Peak
2	2483.500	9.38	27.52	5.70	0.00	42.60	54.00	-11.40 Average

Vertical:

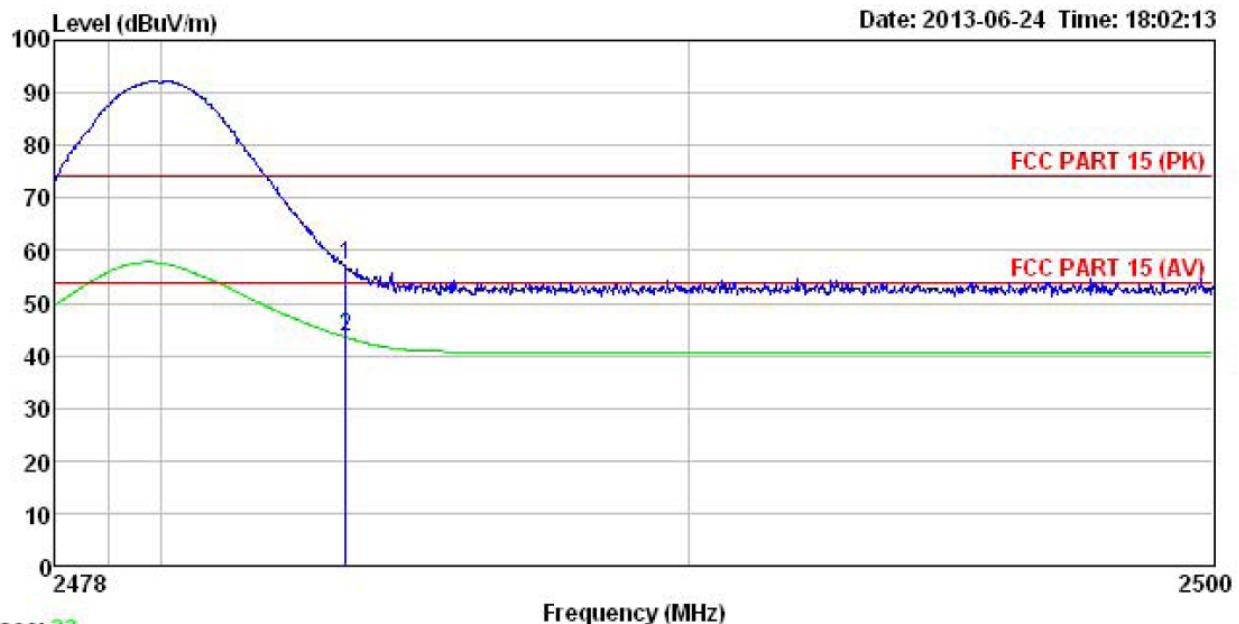


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT TX (2DH1 High channel) mode
Power Rating : DC 3.7V
Environment : Temp:25.5°C Huni:55%
Test Engineer: Winner
Remark :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Line	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2483.500	23.94	27.52	5.70	0.00	57.16	74.00 -16.84 Peak
2	2483.500	10.25	27.52	5.70	0.00	43.47	54.00 -10.53 Average

8DPSK mode

Test channel: Lowest


Horizontal:

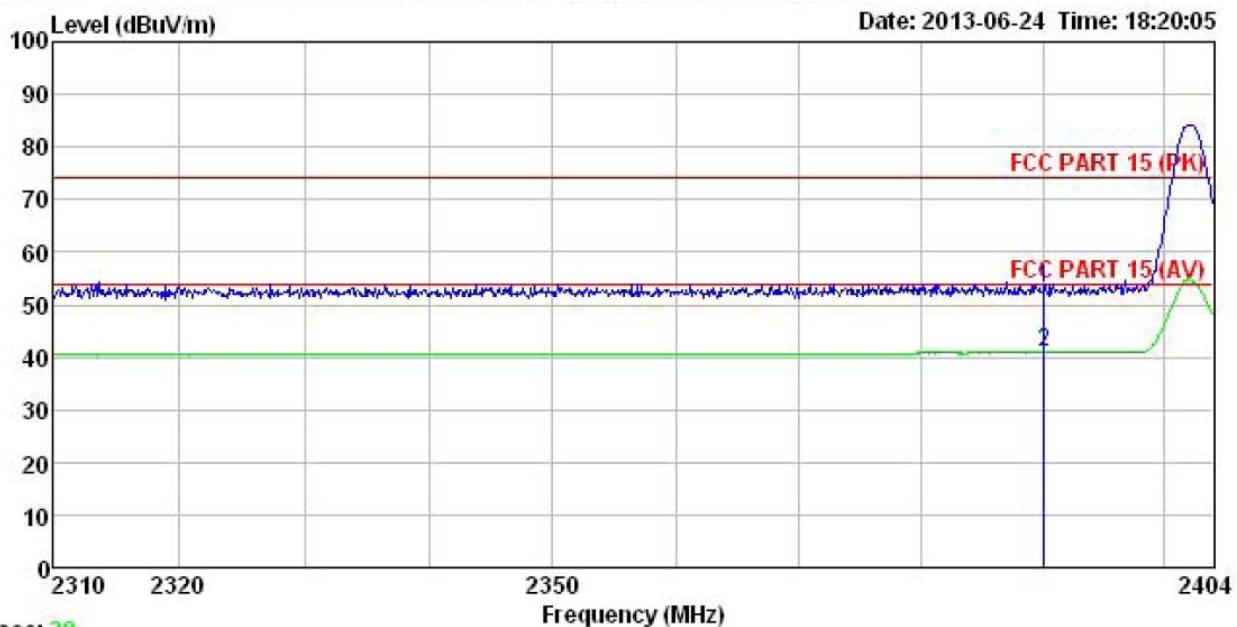

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT TX (3DH1 Low channel) mode
Power Rating : DC 3.7V
Environment : Temp:25.5°C Humi:55%
Test Engineer: Winner
Remark :

	Read	Antenna	Cable	Preamp	Limit	Over	
	Freq	Level	Factor	Loss	Level	Line	Limit
	MHz	dB _{UV}	dB/m	dB	dB	dB _{UV} /m	dB _{UV} /m
1	2390.000	19.98	27.58	5.67	0.00	53.23	74.00 -20.77 Peak
2	2390.000	7.55	27.58	5.67	0.00	40.80	54.00 -13.20 Average

Vertical:

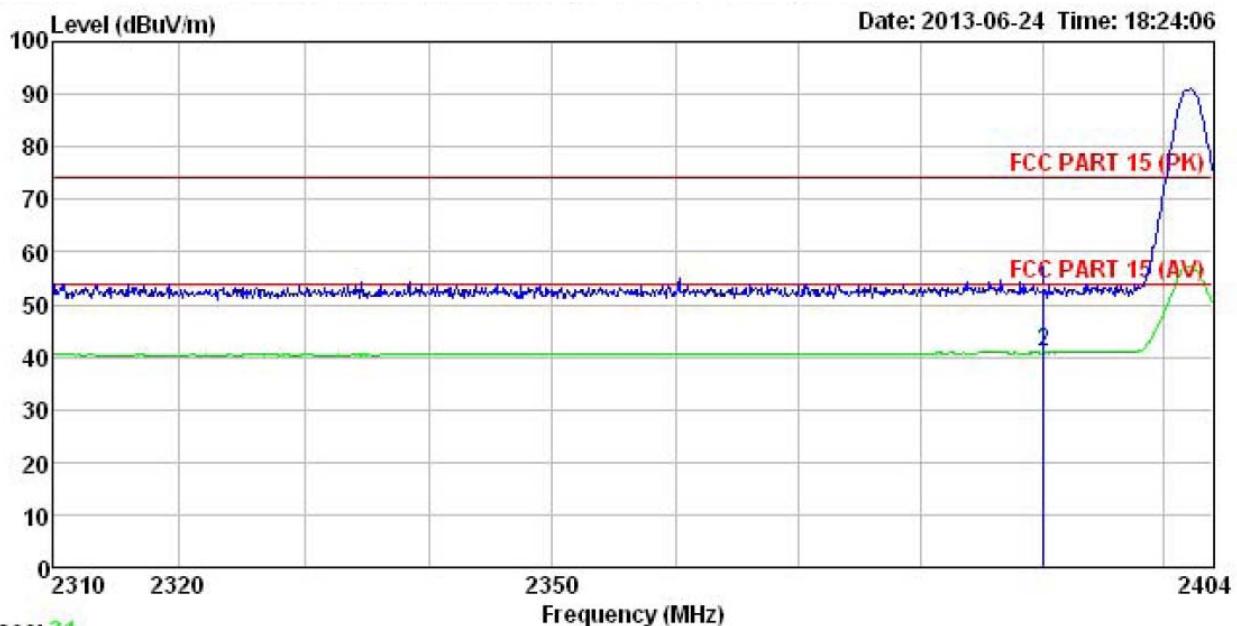


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT TX (3DH1 Low channel) mode
Power Rating : DC 3.7V
Environment : Temp:25.5°C Huni:55%
Test Engineer: Winner
Remark :


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.000	19.46	27.58	5.67	0.00	52.71	74.00	-21.29 Peak
2 2390.000	7.53	27.58	5.67	0.00	40.78	54.00	-13.22 Average

Test channel: Highest

Horizontal:

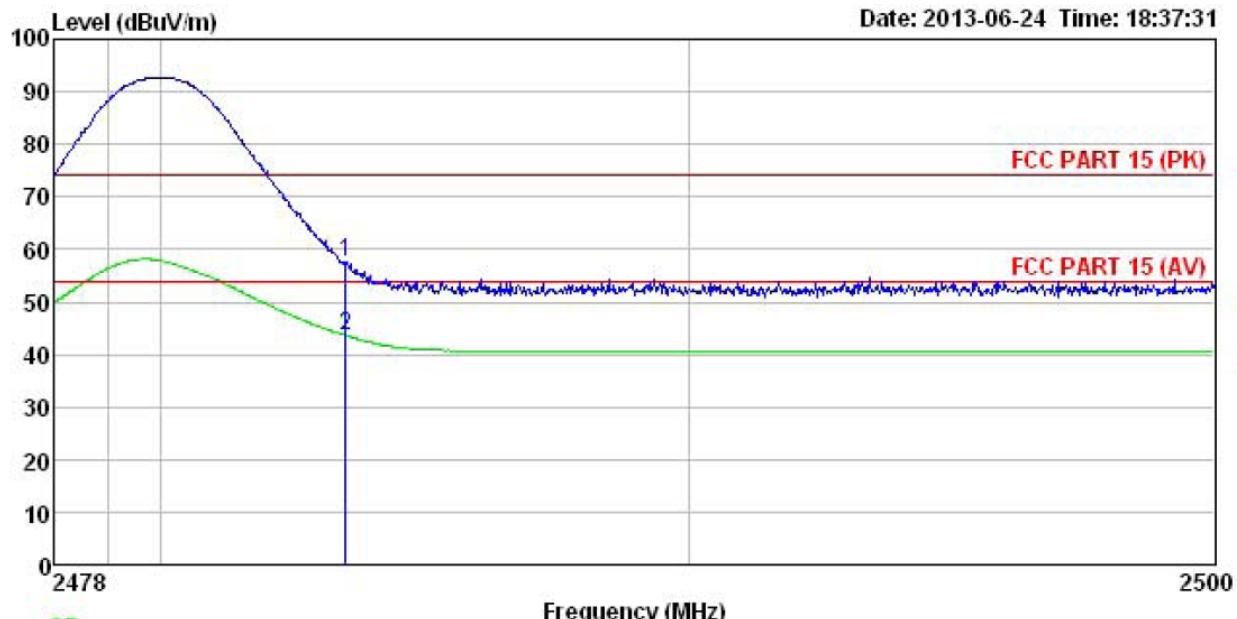

Vertical:

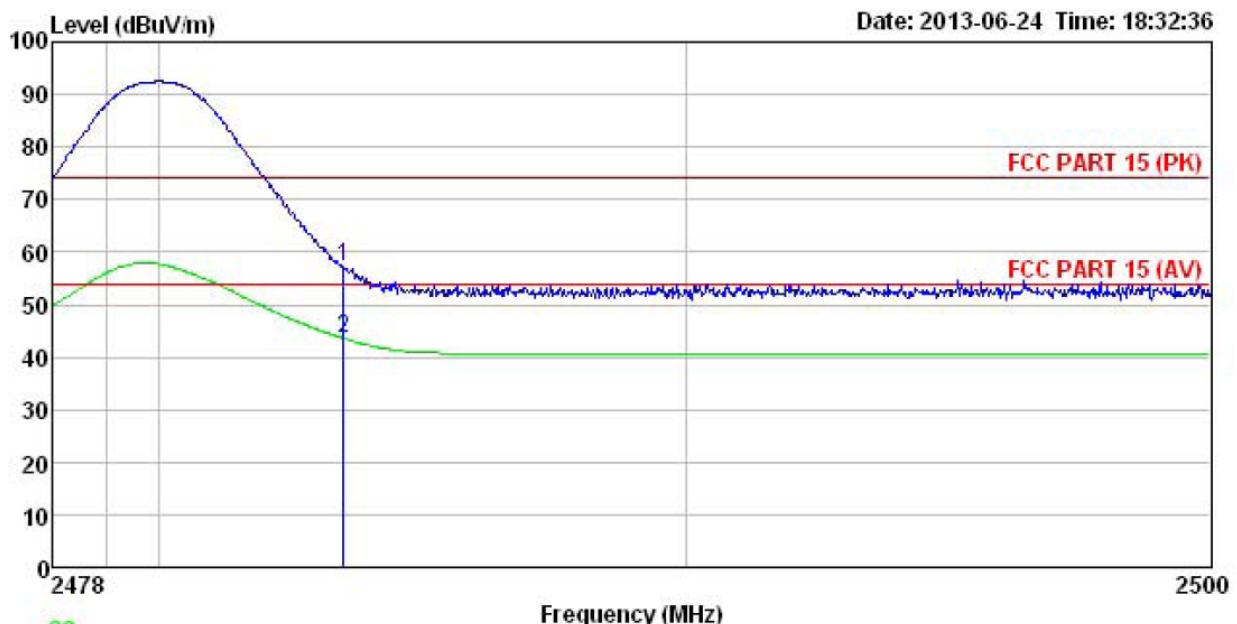


Trace: 33

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT TX (3DH1 High channel) mode
Power Rating : DC 3.7V
Environment : Temp:25.5°C Huni:55%
Test Engineer: Wimmer
Remark :


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2483.500	24.03	27.52	5.70	0.00	57.25	74.00 -16.75 Peak
2	2483.500	10.32	27.52	5.70	0.00	43.54	54.00 -10.46 Average

6.10 Spurious Emission

6.10.1 Conducted Emission Method

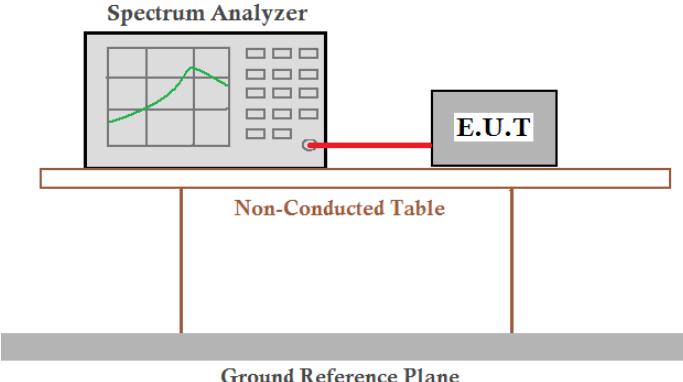Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


GFSK	Lowest channel
------	----------------

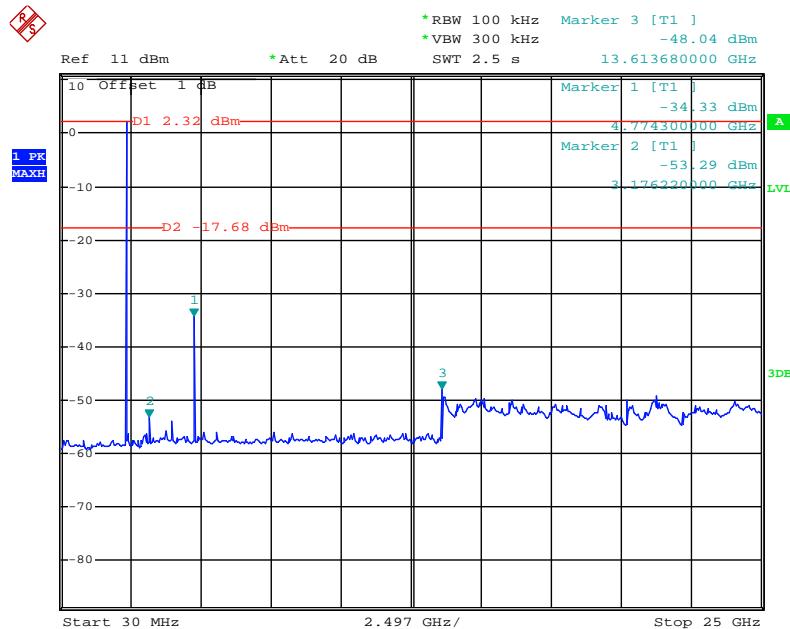

Date: 14.JUN.2013 16:31:44

30MHz~25GHz


GFSK	Middle channel
------	----------------

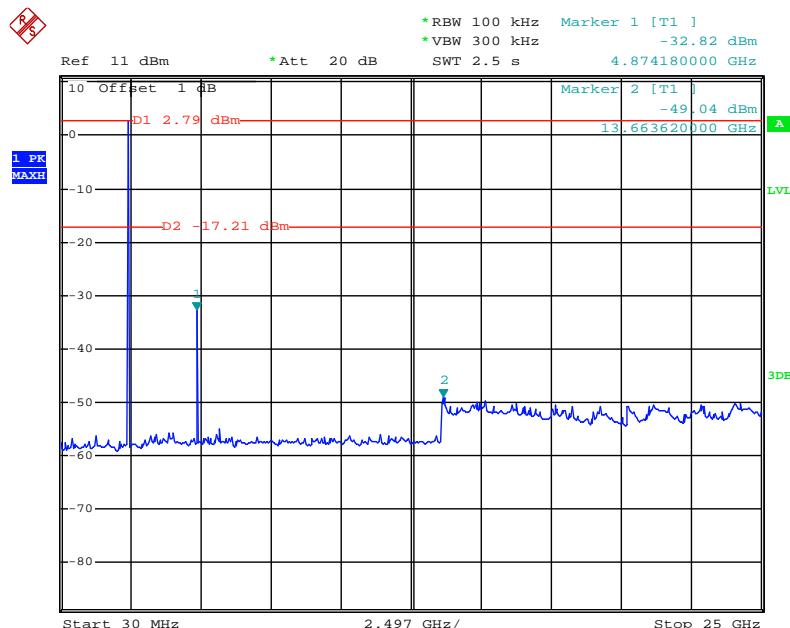

Date: 14.JUN.2013 16:35:49

30MHz~25GHz


GFSK	Highest channel
------	-----------------

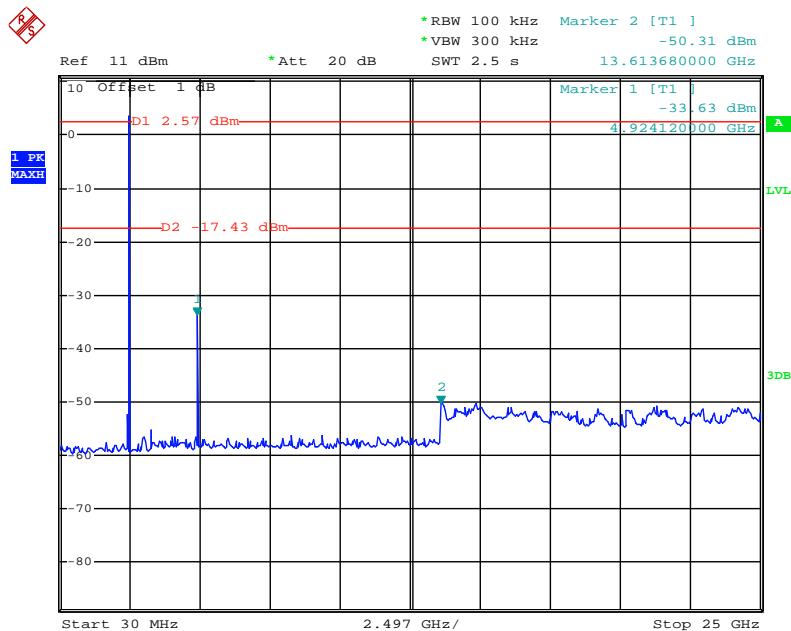

Date: 14.JUN.2013 16:39:07

30MHz~25GHz


π/4-DQPSK	Lowest channel
-----------	----------------

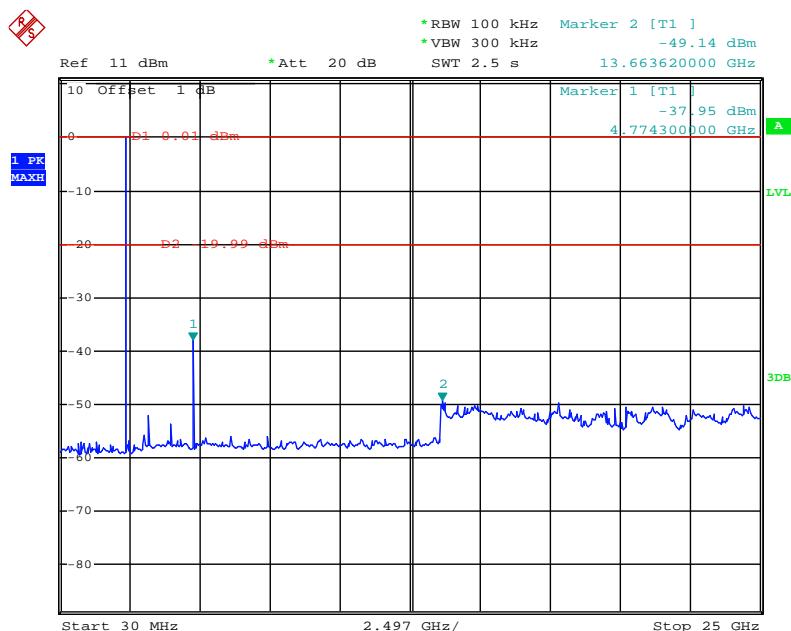

Date: 14.JUN.2013 16:41:53

30MHz~25GHz


π/4-DQPSK	Middle channel
-----------	----------------

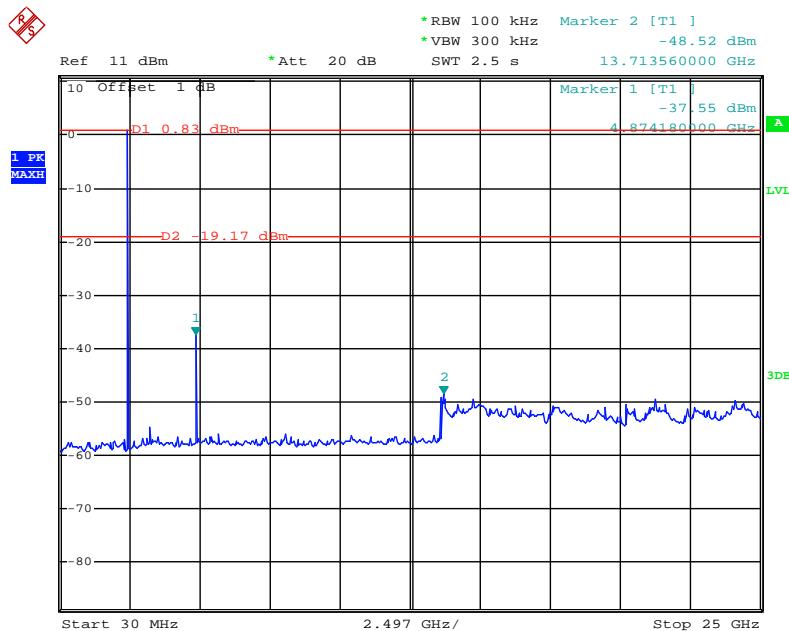

Date: 14.JUN.2013 16:44:36

30MHz~25GHz


π/4-DQPSK	Highest channel
-----------	-----------------

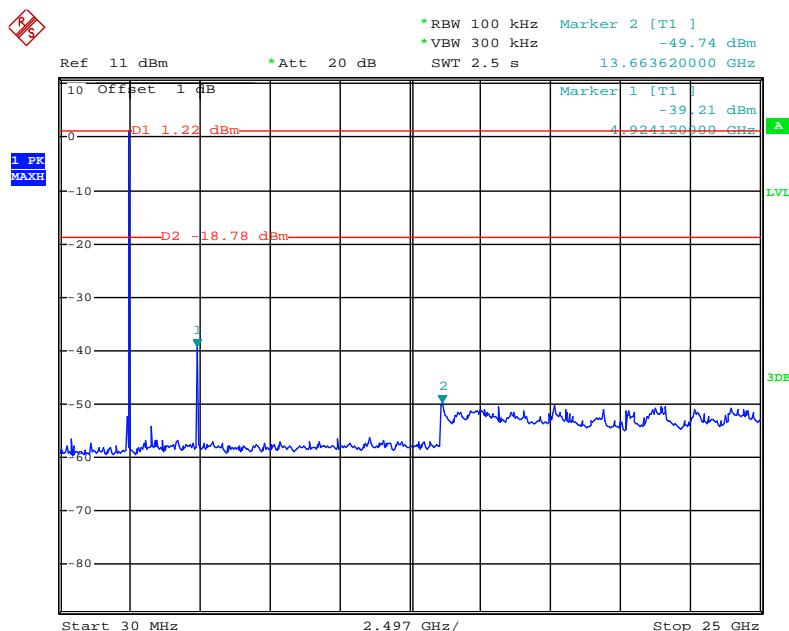

Date: 14.JUN.2013 16:45:41

30MHz~25GHz


8DPSK	Lowest channel
-------	----------------

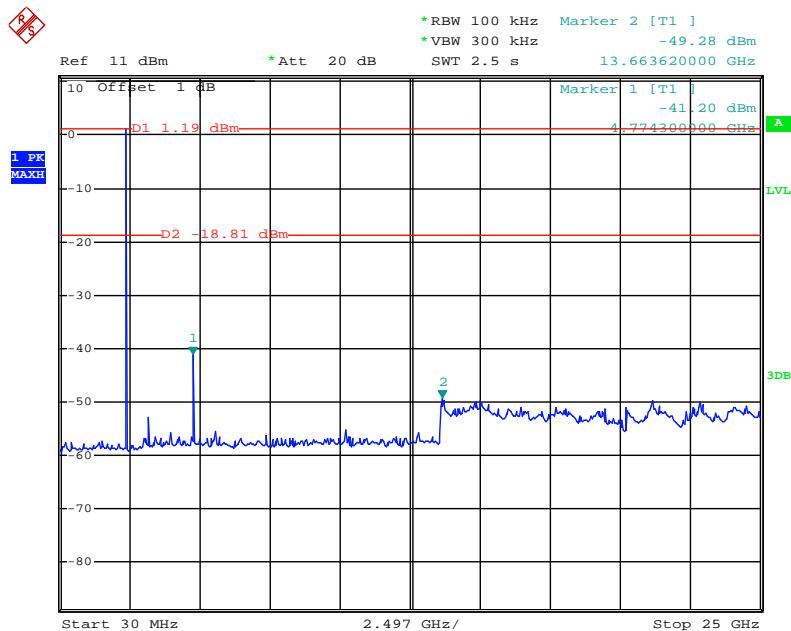

Date: 14.JUN.2013 16:48:16

30MHz~25GHz

8DPSK	Middle channel
-------	----------------

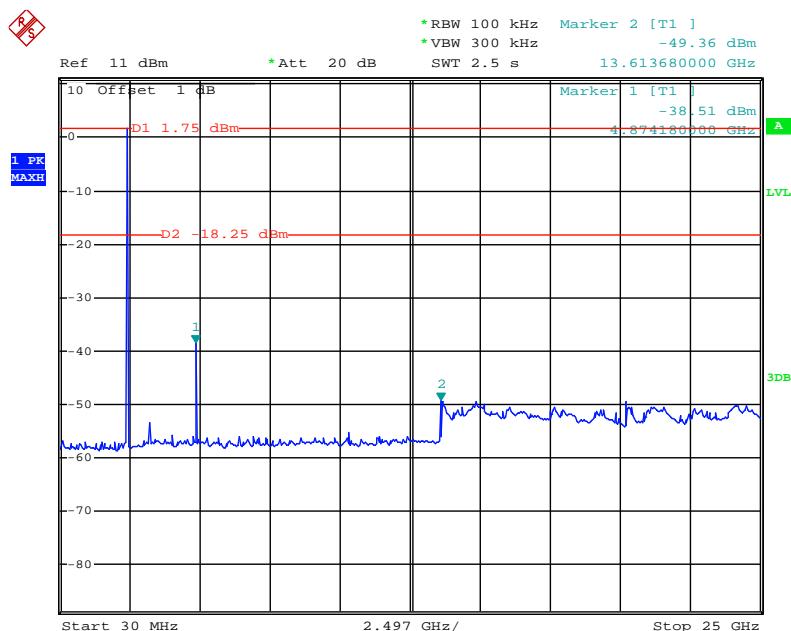


Date: 14.JUN.2013 16:57:29

30MHz~25GHz

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China

Project No.: CCIS130600169RF



8DPSK	Highest channel
-------	-----------------

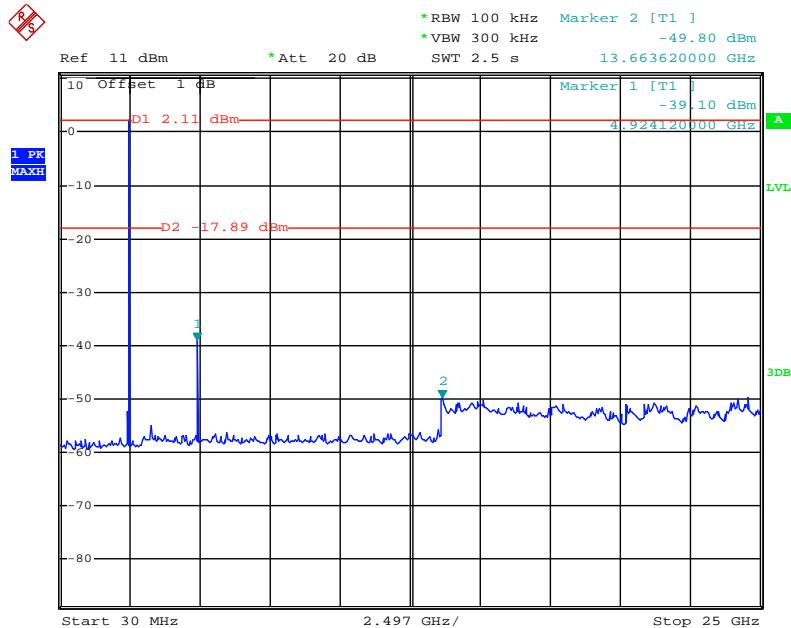

Date: 14.JUN.2013 17:00:29

30MHz~25GHz

6.10.2 Radiated Emission Method

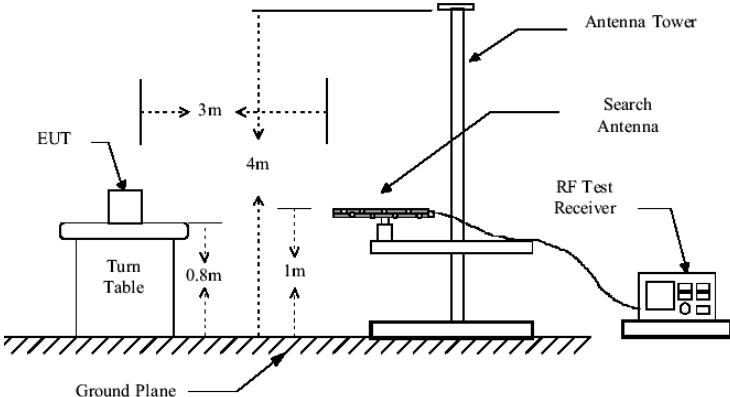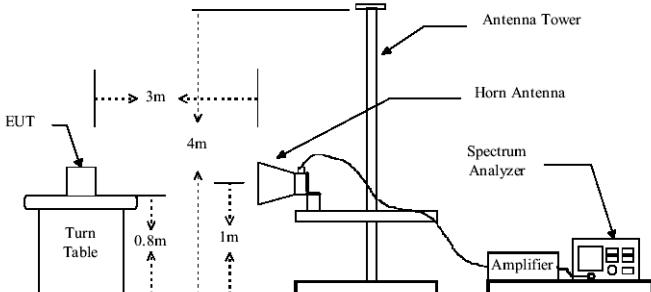Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	9 kHz to 25 GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test setup:	Below 1GHz  Above 1GHz 				

Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8DPSK modulation, and found the GFSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
3. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.

Measurement data:

Below 1GHz


Vertical:

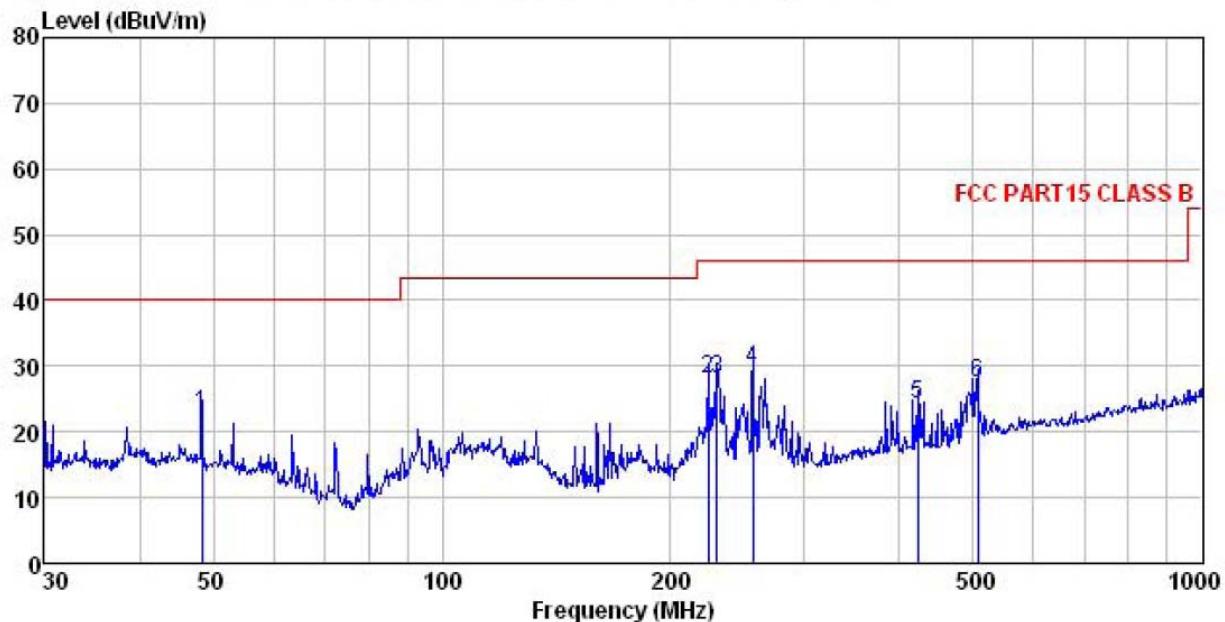

Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
Job No. : 169RF
EUT : Bluetooth Speaker
Model : speeCup
Test mode : BT mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Humi:55%
Test Engineer: Winner
Remark :

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	48.332	36.23	13.35	1.27	28.14	22.71	40.00 -17.29 QP
2	223.733	43.62	11.36	2.84	29.71	28.11	46.00 -17.89 QP
3	230.099	43.33	11.62	2.83	29.68	28.10	46.00 -17.90 QP
4	256.521	44.25	12.06	2.83	29.58	29.56	46.00 -16.44 QP
5	422.058	35.90	15.48	3.13	30.17	24.34	46.00 -21.66 QP
6	506.479	37.70	16.74	3.65	30.52	27.57	46.00 -18.43 QP

Horizontal:

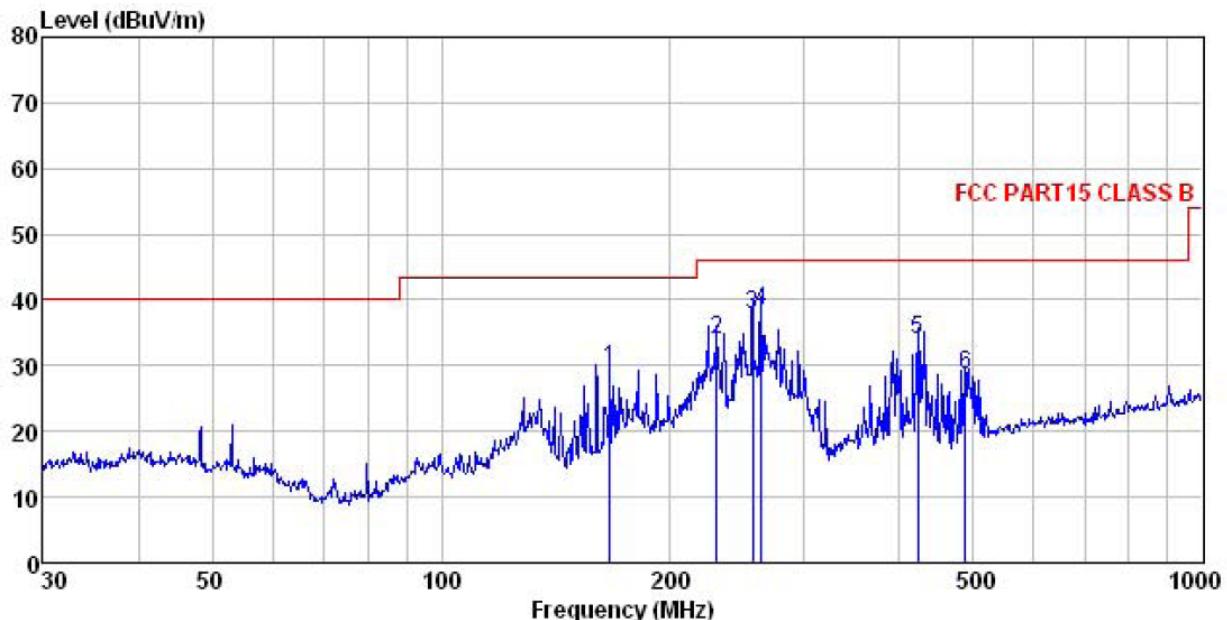

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 169RF
 EUT : Bluetooth Speaker
 Model : speeCup
 Test mode : BT mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Huni:55%
 Test Engineer: Winner
 Remark :

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	166.651	47.13	8.87	2.64	29.17	29.47	43.50	-14.03 QP
2	230.099	49.28	11.62	2.83	29.68	34.05	46.00	-11.95 QP
3	256.521	52.40	12.06	2.83	29.58	37.71	46.00	-8.29 QP
4	262.896	52.86	12.17	2.84	29.56	38.31	46.00	-7.69 QP
5	422.058	45.38	15.48	3.13	30.17	33.82	46.00	-12.18 QP
6	487.315	39.35	16.26	3.51	30.52	28.60	46.00	-17.40 QP

Above 1GHz:

Test channel:	Lowest	Level:	Peak
---------------	--------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	53.22	31.53	8.90	40.24	53.41	74.00	-20.59	Vertical
7206.00	48.97	36.47	10.59	41.24	54.79	74.00	-19.21	Vertical
9608.00	46.84	38.10	13.16	41.40	56.70	74.00	-17.30	Vertical
4804.00	52.99	31.53	8.90	40.24	53.18	74.00	-20.82	Horizontal
7206.00	49.01	36.47	10.59	41.24	54.83	74.00	-19.17	Horizontal
9608.00	46.89	38.10	13.16	41.40	56.75	74.00	-17.25	Horizontal

Test channel:	Lowest	Level:	Average
---------------	--------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	33.98	31.53	8.90	40.24	34.17	54.00	-19.83	Vertical
7206.00	30.12	36.47	10.59	41.24	35.94	54.00	-18.06	Vertical
9608.00	26.75	38.10	13.16	41.40	36.61	54.00	-17.39	Vertical
4804.00	34.41	31.53	8.90	40.24	34.60	54.00	-19.40	Horizontal
7206.00	29.91	36.47	10.59	41.24	35.73	54.00	-18.27	Horizontal
9608.00	26.82	38.10	13.16	41.40	36.68	54.00	-17.32	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle	Level:	Peak
---------------	--------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	53.64	31.58	8.98	40.15	54.05	74.00	-19.95	Vertical
7323.00	49.24	36.47	10.69	41.15	55.25	74.00	-18.75	Vertical
9764.00	46.02	38.45	13.37	41.71	56.13	74.00	-17.87	Vertical
4882.00	53.61	31.58	8.98	40.15	54.02	74.00	-19.98	Horizontal
7323.00	49.87	36.47	10.69	41.15	55.88	74.00	-18.12	Horizontal
9764.00	46.05	38.45	13.37	41.71	56.16	74.00	-17.84	Horizontal

Test channel:	Middle	Level:	Average
---------------	--------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	34.13	31.58	8.98	40.15	34.54	54.00	-19.46	Vertical
7323.00	29.46	36.47	10.69	41.15	35.47	54.00	-18.53	Vertical
9764.00	26.77	38.45	13.37	41.71	36.88	54.00	-17.12	Vertical
4882.00	33.94	31.58	8.98	40.15	34.35	54.00	-19.65	Horizontal
7323.00	29.84	36.47	10.69	41.15	35.85	54.00	-18.15	Horizontal
9764.00	26.72	38.45	13.37	41.71	36.83	54.00	-17.17	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest	Level:	Peak
---------------	---------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	53.33	31.69	9.08	40.03	54.07	74.00	-19.93	Vertical
7440.00	48.95	36.60	10.80	41.05	55.30	74.00	-18.70	Vertical
9920.00	46.55	38.66	13.55	41.99	56.77	74.00	-17.23	Vertical
4960.00	53.42	31.69	9.08	40.03	54.16	74.00	-19.84	Horizontal
7440.00	49.15	36.60	10.80	41.05	55.50	74.00	-18.50	Horizontal
9920.00	46.33	38.66	13.55	41.99	56.55	74.00	-17.45	Horizontal

Test channel:	Highest	Level:	Average
---------------	---------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	33.59	31.69	9.08	40.03	34.33	54.00	-19.67	Vertical
7440.00	29.48	36.60	10.80	41.05	35.83	54.00	-18.17	Vertical
9920.00	26.31	38.66	13.55	41.99	36.53	54.00	-17.47	Vertical
4960.00	33.85	31.69	9.08	40.03	34.59	54.00	-19.41	Horizontal
7440.00	29.56	36.60	10.80	41.05	35.91	54.00	-18.09	Horizontal
9920.00	26.64	38.66	13.55	41.99	36.86	54.00	-17.14	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.