

Test Setup photos for RX-114 SAR Compliance Test Report

Test report no.:	SAR_Photo_RX-114_06	Date of report:	2013-11-22
Template version:	18.0	Number of pages:	11
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220 TCC Nokia San Diego Laboratory	Client:	Nokia Corporation 16620 West Bernardo Drive SAN DIEGO CA. 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
Responsible test engineer:	Juha-Matti Varjonen	Product contact person:	Jamie Lee
Measurements made by:	N. Koskinen, T. Miettinen, O. Moisio, J. Moussa, M. Laaksonen, A. Viitanen, J. Gomez, A. Belden, R. Ventura, G. Abadilla, J. Tuomela		
Tested device:	RX-114		
FCC ID:	QMNA	IC:	661X-A
Supplement reports:	FCC_RX-114_05		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique FCC PUBLISHED RF EXPOSURE KDB PROCEDURES		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF SAR TEST REPORT	3
1.1 TEST DETAILS.....	3
1.2 PICTURE OF THE DEVICE.....	4
2. TEST POSITIONS	7
2.1 BODY CONFIGURATION	7

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2013-08-22 to 2013-10-14
SN, HW and SW numbers of tested device	SN: 004402/47/351342/6, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 17633 SN: 004402/47/351393/9, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 17634 SN: 004402/47/351347/5, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 17636 SN: 004402/47/351408/5, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 17635 SN: 004402/47/351363/2, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 17622 SN: 004402/47/351375/6, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 17621 SN: 004402/47/351376/4, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 31338 SN: 004402/47/351070/3, HW: 0108, SW: B10_9447_1030_1328_v0.1.12a, DUT: 31337
Batteries used in testing	-
Headsets used in testing	-
Other accessories used in testing	SU-42 Smart cover; DUT: 17809, 17808
State of sample	Prototype unit
Notes	-

1.2 Picture of the Device




SU-42 Smart cover laptop mode (front, back)



SU-42 Smart cover laptop mode (left, right)



SU-42 Smart cover tablet mode (front, back)



SU-42 Smart cover tablet mode (left, right)



SU-42 Smart cover tablet mode (top)



SU-42 Smart cover folded (front, back)



SU-42 Smart cover folded (left, right)



SU-42 Smart cover folded (top, bottom)

2. TEST POSITIONS

2.1 Body Configuration

The device was placed in the Nokia holder using the Nokia spacer and, in sequence, the back, top, bottom and left edges were positioned 0.0mm, 21.0mm or 22.0 mm away from the flat phantom. Separation distance is indicated in the photo. The spacer was removed before the start of the measurements.



Photo of the device positioned for back facing phantom (for cellular bands measurements).
The spacer was removed before the start of the measurements.



Photo of the device with SU-42 Smart cover (tablet mode) positioned for back facing phantom (for cellular bands measurements).

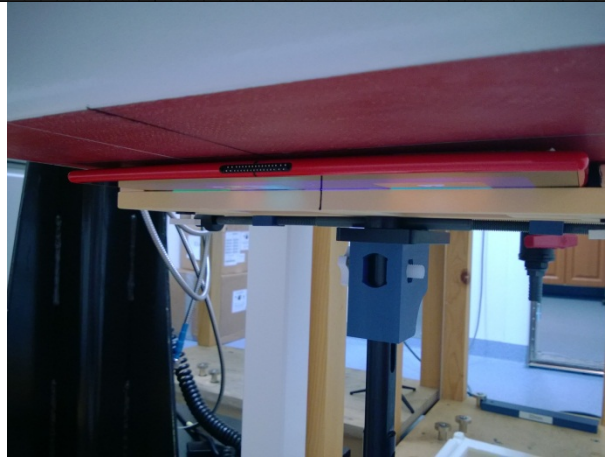


Photo of the device positioned for back facing phantom (for WLAN measurements).



Photo of the device positioned for top edge facing phantom.



Photo of the device positioned for bottom edge facing phantom.



Photo of the device with SU-42 Smart cover (laptop mode) positioned for bottom edge facing phantom.



Photo of the device positioned for left edge facing phantom.
The spacer was removed before the start of the measurements.



Photo of the device with SU-42 Smart cover (tablet mode) positioned for left edge facing phantom.
The spacer was removed before the start of the measurements.