



PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 21045 • U.S.A.
TEL (410) 290-6652 • FAX (410) 290-6654
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 24 Certification

NOKIA MOBILE PHONES INC.

12278 Scripps Summit Drive
San Diego, CA 92131

Attn: Dan Laramie, Senior EMC Engineer

Dates of Tests: January 15-16, 2003
Test Report S/N: 24.230113011.QMN
Test Site: PCTEST Lab, Columbia MD

FCC ID

QMNRH-3P

APPLICANT

NOKIA MOBILE PHONES INC.

Classification: Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s): §24(E), §2
EUT Type: Single-Mode PCS Phone
Model: 2270
Tx Frequency Range: 1851.25MHz – 1908.75MHz (PCS CDMA)
Rx Frequency Range: 1931.25MHz – 1988.75MHz (PCS CDMA)
Max. RF Output Power: 0.320W EIRP PCS CDMA (25.051 dBm)
Emission Designator(s): 1M25F9W (CDMA)
Test Device Serial No.: Identical Prototype

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Alfred Cirwithian
Vice President Engineering



PCTEST™ PT. 24 REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION	NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 1 of 16

TABLE OF CONTENTS

1.1 SCOPE	3
2.1 INTRODUCTION	4
3.1 DESCRIPTION OF TESTS	5-6
4.1 EQUIVALENT ISOTROPIC RADIATED POWER	7
5.1 RADIATED MEASUREMENTS	8-10
6.1 FREQUENCY STABILITY	11-12
7.1 PLOTS OF EMISSIONS	13
8.1 LIST OF TEST EQUIPMENT	14
9.1 SAMPLE CALCULATIONS	15
10.1 CONCLUSION	16

ATTACHMENT A: TEST PLOTS

ATTACHMENT B: FCC ID LABEL / LOCATION



ATTACHMENT C: TEST SETUP PHOTOGRAPHS

ATTACHMENT D: EXTERNAL PHOTOGRAPHS

ATTACHMENT E: INTERNAL PHOTOGRAPHS

PCTEST™ PT. 24 REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION	NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 2 of 16

MEASUREMENT REPORT

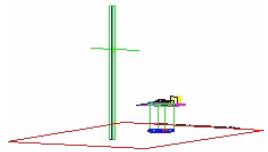

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant Name:	NOKIA MOBILE PHONES INC.
Address:	12278 Scripps Summit Drive San Diego, CA 92131
Attention:	Dan Laramie, Senior EMC Engineer

- FCC ID: QMNRH-3P
- Quantity: Quantity production is planned
- Emission Designators: 1M25F9W (CDMA)
- Tx Freq. Range: 1851.25 – 1908.75 MHz (PCS CDMA)
- Rx Freq. Range: 1931.25 – 1988.75 MHz (PCS CDMA)
- Max. Power Rating: 0.320W EIRP PCS CDMA (25.051 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Single-Mode PCS Phone
- Modulation(s): CDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5 ppm)
- FCC Rule Part(s): § 24(E)
- Dates of Tests: January 15-16, 2003
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 22/24.230113011.QMN

PCTEST™ PT. 24 REPORT	FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P

2.1 INTRODUCTION

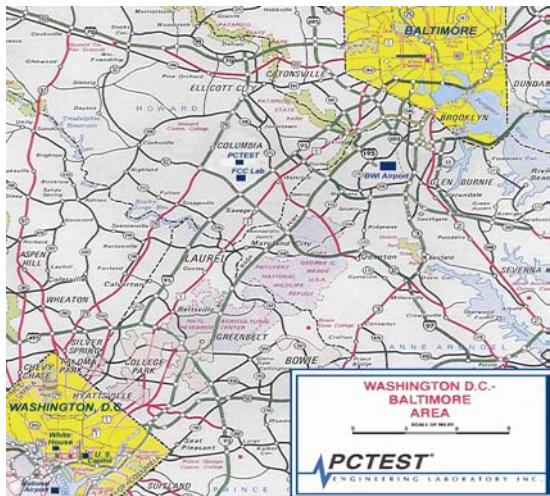


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are $39^{\circ} 11'15''$ N latitude and $76^{\circ} 49'38''$ W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

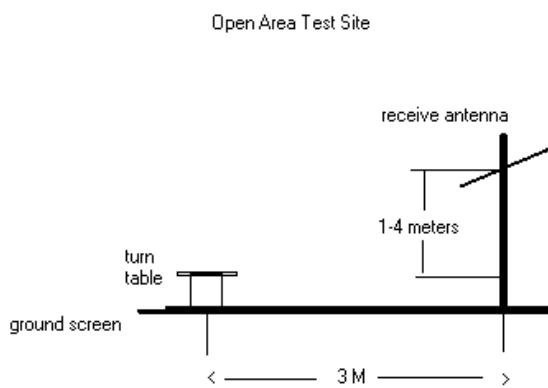


Figure 2. Diagram of 3-meter outdoor test range

Measurement Procedure

The radiated and spurious measurements were made outdoors at a 3-meter test range (see Figure 2). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

PCTEST™ PT. 24 REPORT	FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P

3.1 DESCRIPTION OF TESTS

3.2 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 - 1865	1930 - 1945
B	1870 - 1885	1950 - 1965
C	1895 - 1910	1975 - 1990
D	1865 - 1870	1945 - 1950
E	1885 - 1890	1965 - 1970
F	1890 - 1895	1970 - 1975

Table 1. Broadband PCS Service Frequency Blocks.

3.3 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST™ PT. 24 REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION	NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRRH-3P	Page 5 of 16

4.0 Frequency Stability/Temperature Variation.

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025 (±2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at 30°C (usually 14-16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at 30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE: The EUT is tested down to the battery endpoint.

PCTEST™ PT. 24 REPORT	FCC CERTIFICATION		NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 6 of 16

4.1 Test Data

4.2 Equivalent Isotropic Radiated Power (E.I.R.P.)

Radiated measurements at 3 meters

Supply Voltage: 3.7 VDC

Modulation: PCS CDMA

FREQ. (MHz)	REF. LEVEL (dBm)	POL (H/V)	Azimuth (o angle)	EIRP (dBm)	EIRP (W)	Battery
1851.25	-18.300	V	60	24.871	0.307	Standard
1880.00	-18.200	V	60	25.051	0.320	Standard
1908.75	-18.400	V	60	25.021	0.318	Standard

Note: Standard batteries are the only options for this phone

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

PCTEST™ PT. 24 REPORT		FCC CERTIFICATION		NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN		Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 7 of 16

5.1 Test Data

5.2 PCS CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 0025 (Low)
 MEASURED OUTPUT POWER: 25.051 dBm = 0.320 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.05 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-49.53	8.70	-40.83	V	65.9
5553.75	-65.33	9.70	-55.63	V	80.7
7405.00	-71.43	9.90	-61.53	V	86.6

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST™ PT. 24 REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION	NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 8 of 16

5.1 Test Data (Continued)

5.3 PCS CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 0600 (Mid)
 MEASURED OUTPUT POWER: 25.051 dBm = 0.320 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.05 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-49.73	8.70	-41.03	V	66.1
5640.00	-65.83	9.70	-56.13	V	81.2
7520.00	-70.33	9.90	-60.43	V	85.5

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST™ PT. 24 REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION	NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 9 of 16

5.1 Test Data (Continued)

5.4 PCS CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175 (High)
 MEASURED OUTPUT POWER: 25.051 dBm = 0.320 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.05 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-48.93	8.70	-40.23	V	65.3
5726.25	-66.13	9.70	-56.43	V	81.5
7635.00	-71.13	9.90	-61.23	V	86.3

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST™ PT. 24 REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION	NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 10 of 16

6.1 Test Data

6.2 FREQUENCY STABILITY (PCS CDMA)

OPERATING FREQUENCY: 1,880,000,002 Hz

CHANNEL: 600

REFERENCE VOLTAGE: 3.7 VAC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,880,000,002	0.000000
100 %		- 30	1,879,999,795	0.000011
100 %		- 20	1,879,999,833	0.000009
100 %		- 10	1,879,999,889	0.000006
100 %		0	1,879,999,946	0.000003
100 %		+ 10	1,879,999,908	0.000005
100 %		+ 20	1,880,000,002	0.000000
100 %		+ 25	1,879,999,927	0.000004
100 %		+ 30	1,879,999,852	0.000008
100 %		+ 40	1,880,000,096	-0.000005
100 %		+ 50	1,880,000,171	-0.000009
100 %		+ 60	1,880,000,190	-0.000010
85 %	3.17	+ 20	1,880,000,002	0.000000
115 %	4.26	+ 20	1,880,000,002	0.000000
BATT. ENDPOINT	2.94	+ 20	1,880,000,002	0.000000

PCTEST™ PT. 24 REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION	NOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRRH-3P	Page 11 of 16

6.1 Test Data (Continued)

6.3 FREQUENCY STABILITY (PCS CDMA)

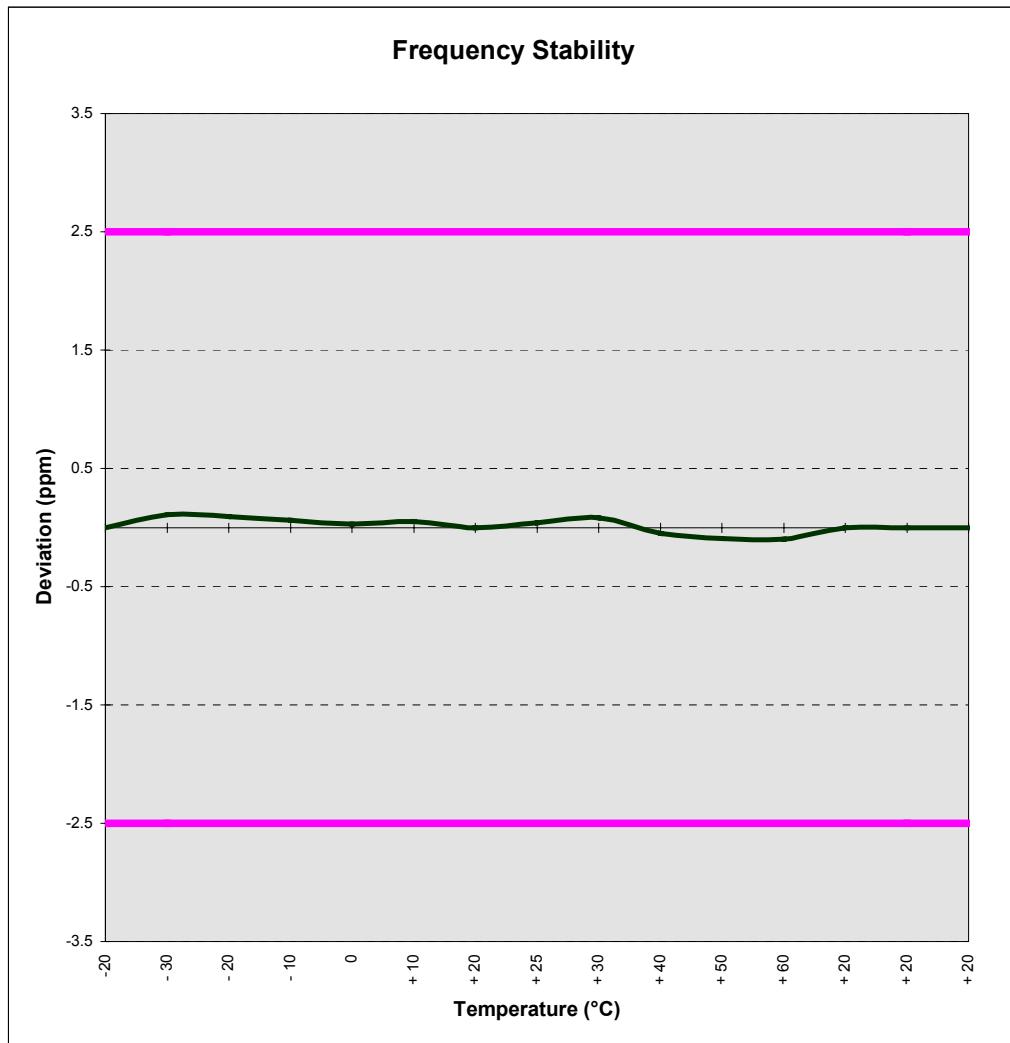

PCTEST™ PT. 24 REPORT	PCTEST [®] Engineering Laboratory, Inc.	FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 12 of 16

7.1 PLOT(S) OF EMISSIONS

(SEE ATTACHMENT A)

PCTEST™ PT. 24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN		Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P

8.1 TEST EQUIPMENT

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	08/15/03	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/03	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (100Hz-18GHz)	08/10/03	3144A02458
Signal Generator*	HP 8640B (500Hz-1GHz)	06/03/03	2232A19558
Signal Generator*	HP 8640B (500Hz-1GHz)	06/03/03	1851A09816
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/03	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/03	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/03	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/03	0608-03241
Quasi-Peak Adapter	HP 85650A	08/15/03	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI OP Adapter	03/11/03	0194-04082
Gigatronics Universal Power Meter	8657A		1835256
Gigatronics Power Sensor	80701A (0.05-18GHz)		1833460
Signal Generator	HP 8648D (9kHz-4GHz)		3613A00315
Amplifier Research	5S1G4 (5W, 800MHz-4.2GHz)		22322
Network Analyzer	HP 8753E (30kHz-3GHz)		JP38020182
Audio Analyzer	HP 8903B		3011A09025
Modulation Analyzer	HP 8901A		2432A03467
Power Meter	HP 437B		3125U24437
Power Sensor	HP 8482H (30μW-3W)		2237A02084
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design 1295, 1332, 0355		
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set)		
Ailtech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (6)	3816/2		1079
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Ailtech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8594A		3051A00187
Spectrum Analyzer (2)	HP 8591A		3034A01395, 3108A02053
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

* Calibration traceable to the National Institute of Standards and Technology (NIST).

PCTEST™ PT. 24 REPORT	PCTEST® Engineering Laboratory, Inc.	FCC CERTIFICATION	NOOKIA	Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P	Page 14 of 16

9.1 SAMPLE CALCULATIONS

A. Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

B. Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)


The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was $25.501 \text{ dBm} - (-24.80) = 50.3 \text{ dBc}$

PCTEST™ PT. 24 REPORT	FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN	Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P


10.1 CONCLUSION

The data collected shows that the **NOKIA Single-Mode PCS Phone FCC ID: QMNRH-3P** complies with all the requirements of Parts 2 and 24 of the FCC rules.

PCTEST™ PT. 24 REPORT		FCC CERTIFICATION		Reviewed By: Quality Manager
Test Report S/N: 24.230113011.QMN		Test Dates: Jan. 15-16, 2003	Phone Type: Single-Mode PCS	FCC ID: QMNRH-3P

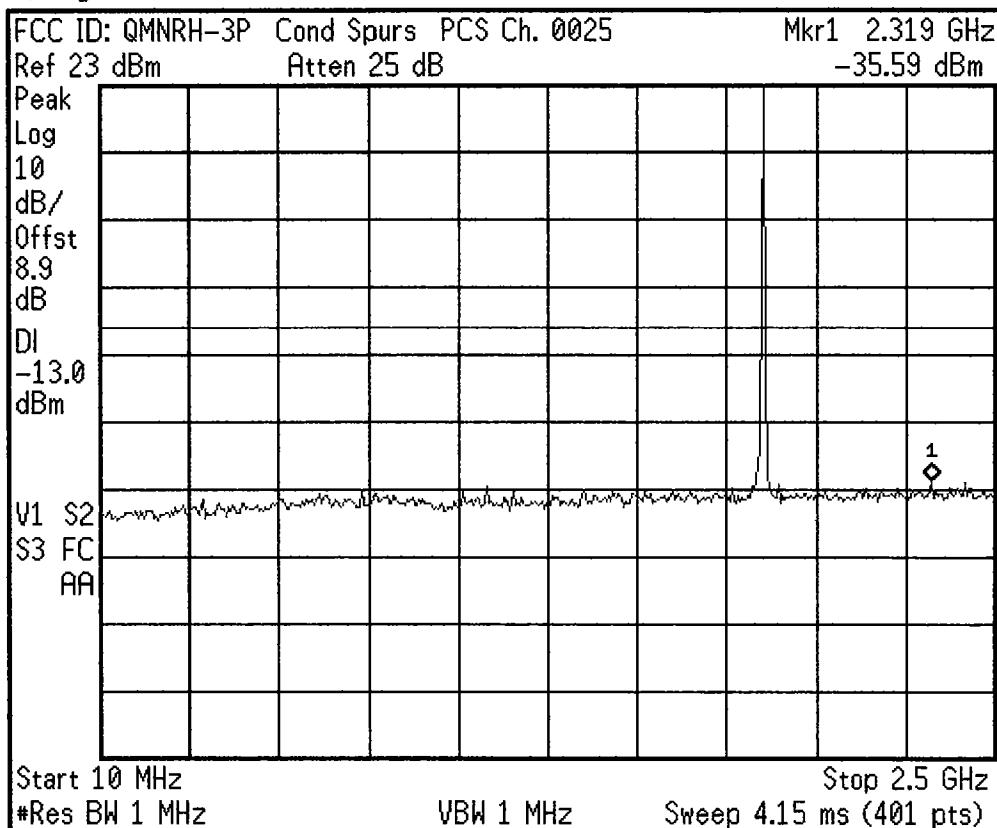*** Agilent**

Freq/Channel
Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.500000000 GHz
CF Step 249.0000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off
Scale Type Log Lin

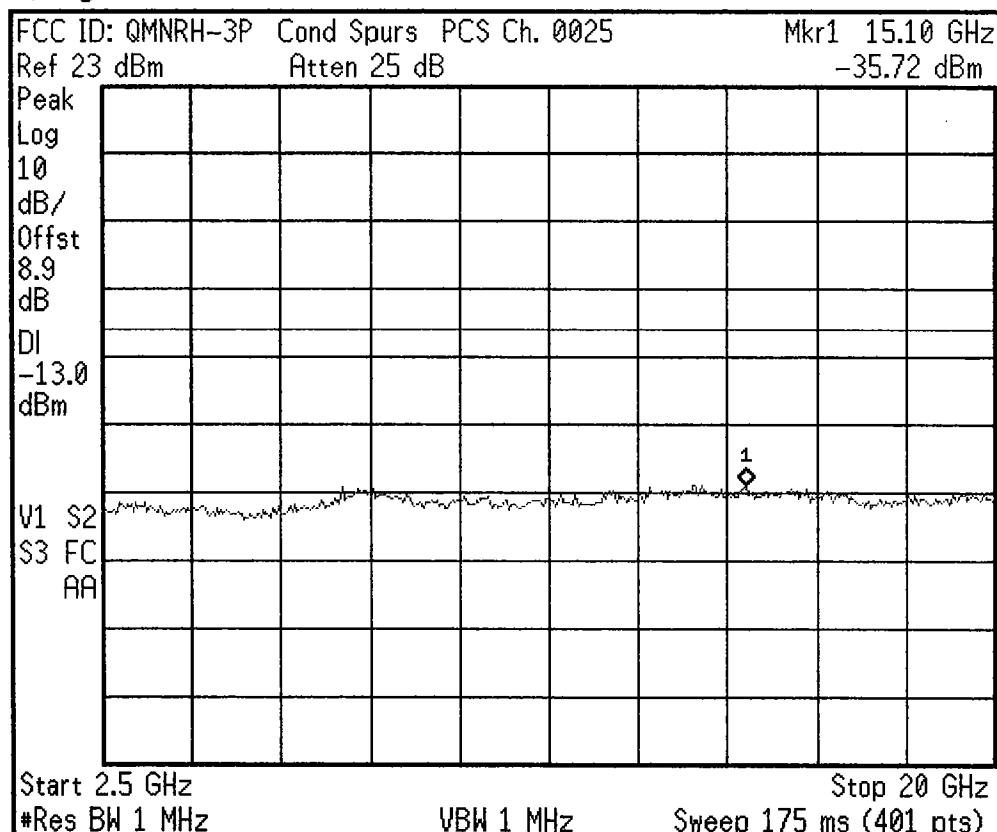*** Agilent**

Freq/Channel
Center Freq 11.2500000 GHz
Start Freq 2.500000000 GHz
Stop Freq 20.0000000 GHz
CF Step 1.750000000 GHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off
Scale Type Log Lin

Agilent

Freq/Channel

Center Freq
1.25500000 GHz

Start Freq

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track

Scale Type

Agilent

The figure is a spectrum analysis plot. The top header contains the following information: FCC ID: QMNRH-3P, Cond Spurs PCS Ch. 0600, Mkr1 13.88 GHz, Ref 23.1 dBm, Atten 25 dB, and -35.62 dBm. The left side of the plot has a vertical stack of parameters: Peak, Log, 10, dB/, Offst, 8.9, dB, DI, -13.0, dBm, V1, S2, S3, FC, and AA. The plot area shows a horizontal grid. A single, sharp peak is marked with a diamond symbol and the number '1' above it. The x-axis at the bottom is labeled 'Start 2.5 GHz' and 'Stop 20 GHz'. The bottom center is labeled 'VBW 1 MHz'. The bottom right is labeled 'Sweep 175 ms (401 pts)'.

Freq/Channel

Center Freq

Start Freq


Stop Freq

CF Step
1.75000000 GHz
Auto Man


Freq Offset

Signal Track

Scale Type

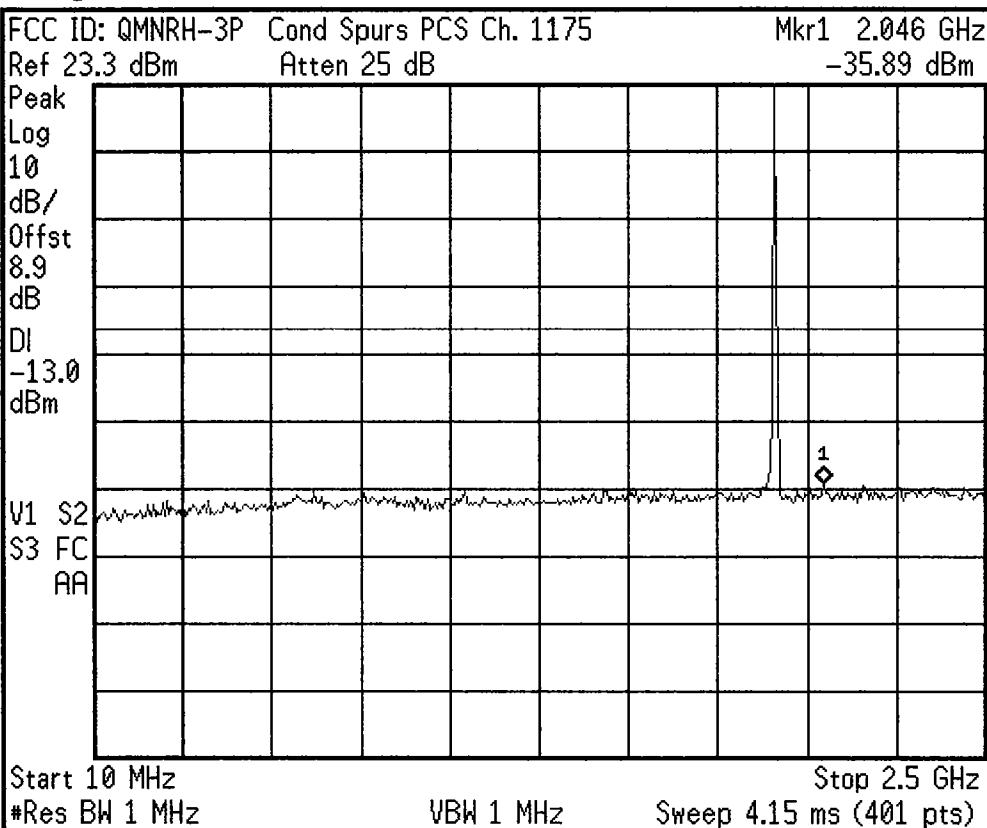Agilent


Freq/Channel
Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off
Scale Type Log Lin

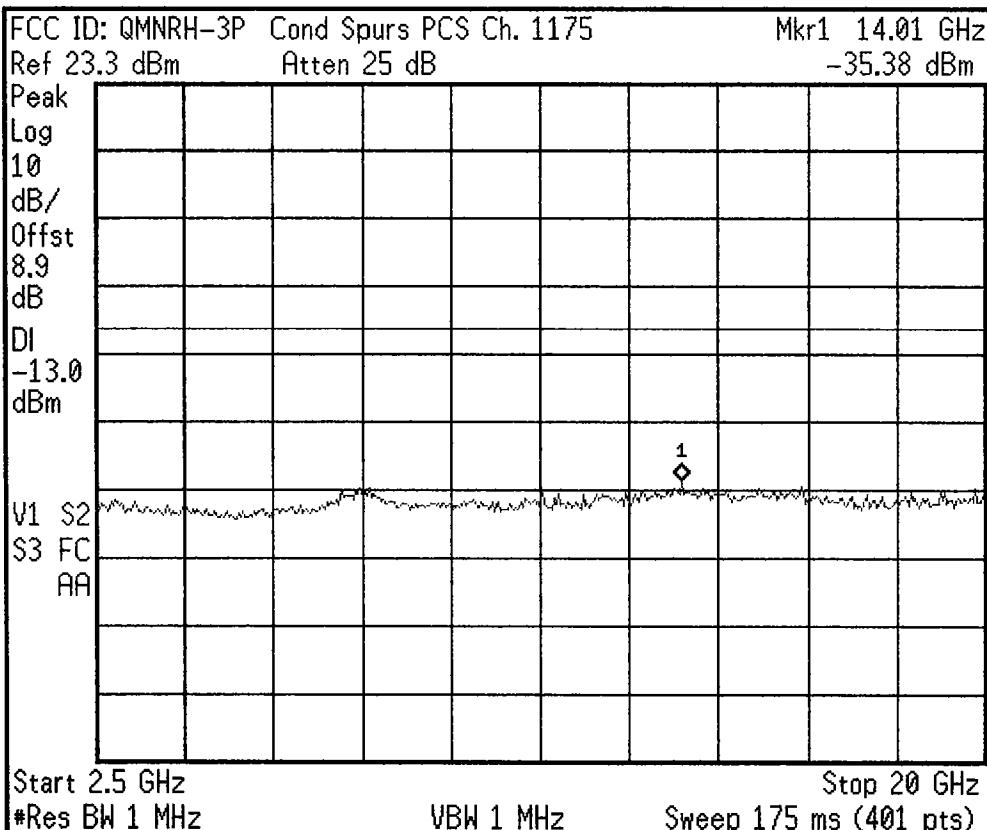Agilent

Freq/Channel
Center Freq 11.2500000 GHz
Start Freq 2.50000000 GHz
Stop Freq 20.0000000 GHz
CF Step 1.75000000 GHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off
Scale Type Log Lin

* Agilent

FCC ID: QMNRH-3P Power Out PCS Ch. 0025
Ref 23 dBm Atten 25 dB

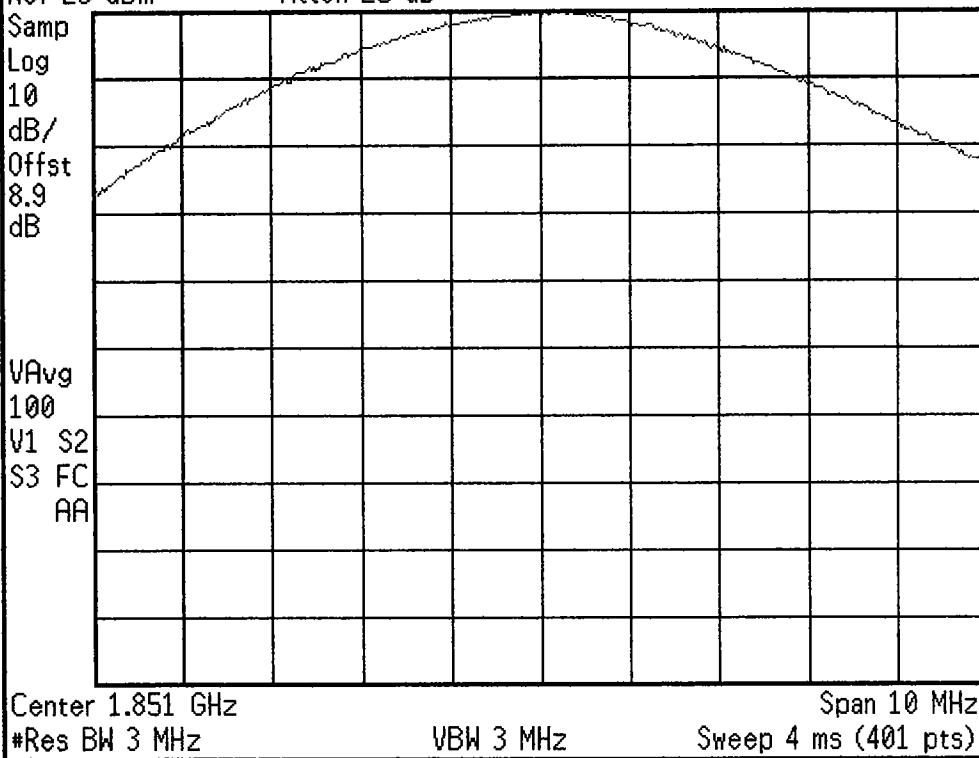

Freq/Channel

Center Freq
1.85125000 GHz

Start Freq
1.84625000 GHz

Stop Freq
1.85625000 GHz

CF Step
1.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

* Agilent

FCC ID: QMNRH-3P Power Out PCS Ch. 0600
Ref 23.1 dBm Atten 25 dB

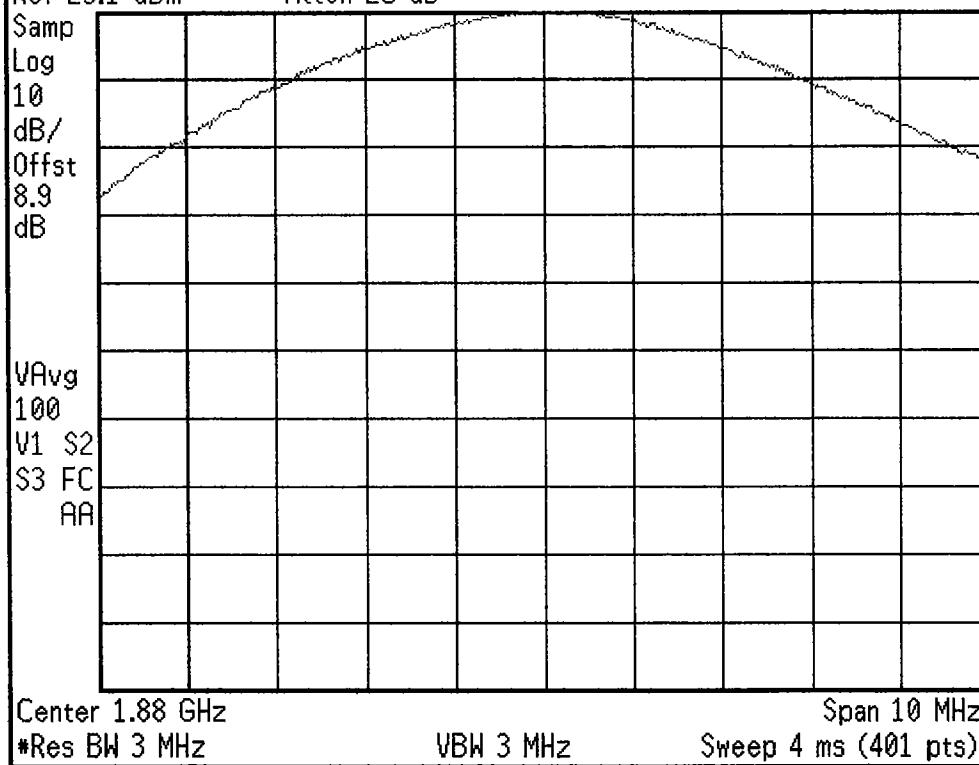

Freq/Channel

Center Freq
1.88000000 GHz

Start Freq
1.87500000 GHz

Stop Freq
1.88500000 GHz

CF Step
1.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

Agilent

FCC ID: QMNRH-3P Power Out PCS Ch. 0600
Ref 23.1 dBm Atten 25 dB

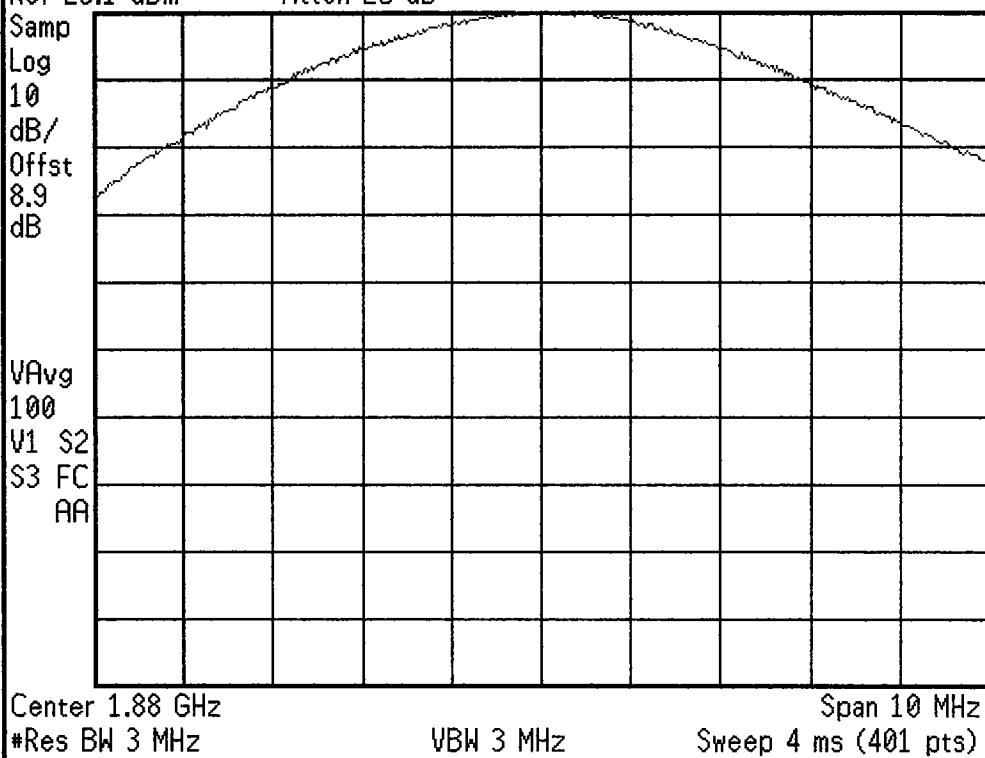

Freq/Channel

Center Freq 1.88000000 GHz

Start Freq 1.87500000 GHz

Stop Freq 1.88500000 GHz

CF Step 1.00000000 MHz
Auto Man


Freq Offset 0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

Agilent

FCC ID: QMNRH-3P Power Out PCS Ch. 1175
Ref 23.3 dBm Atten 25 dB

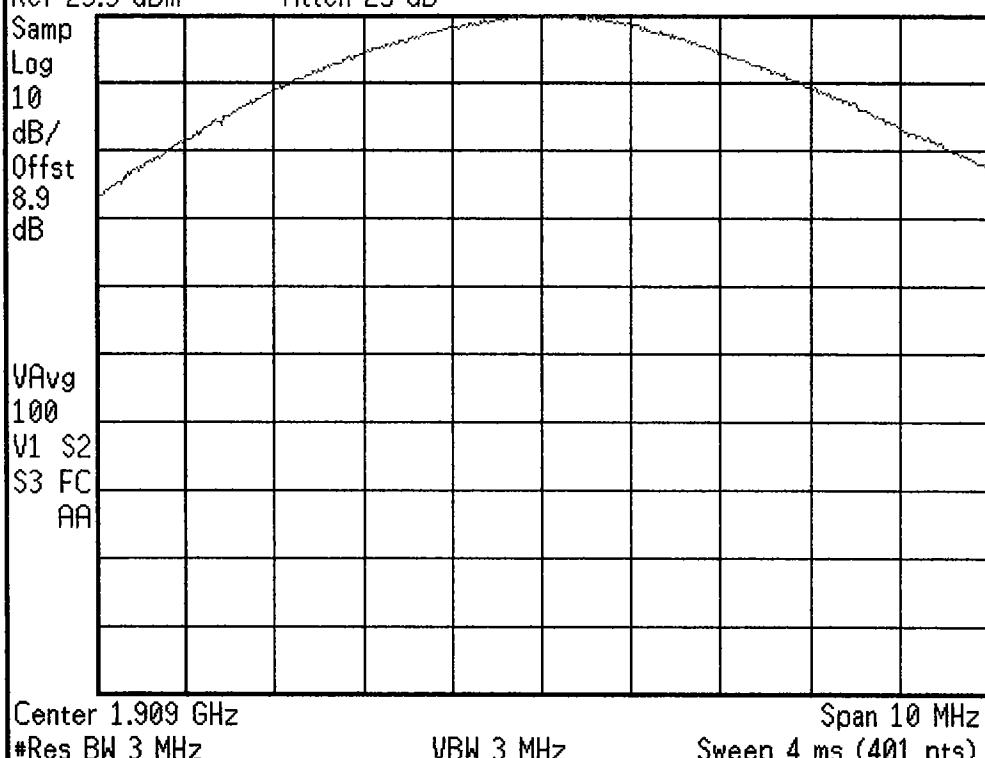

Freq/Channel

Center Freq 1.90875000 GHz

Start Freq 1.90375000 GHz

Stop Freq 1.91375000 GHz


CF Step 1.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz


Signal Track
On Off

Scale Type
Log Lin


Agilent

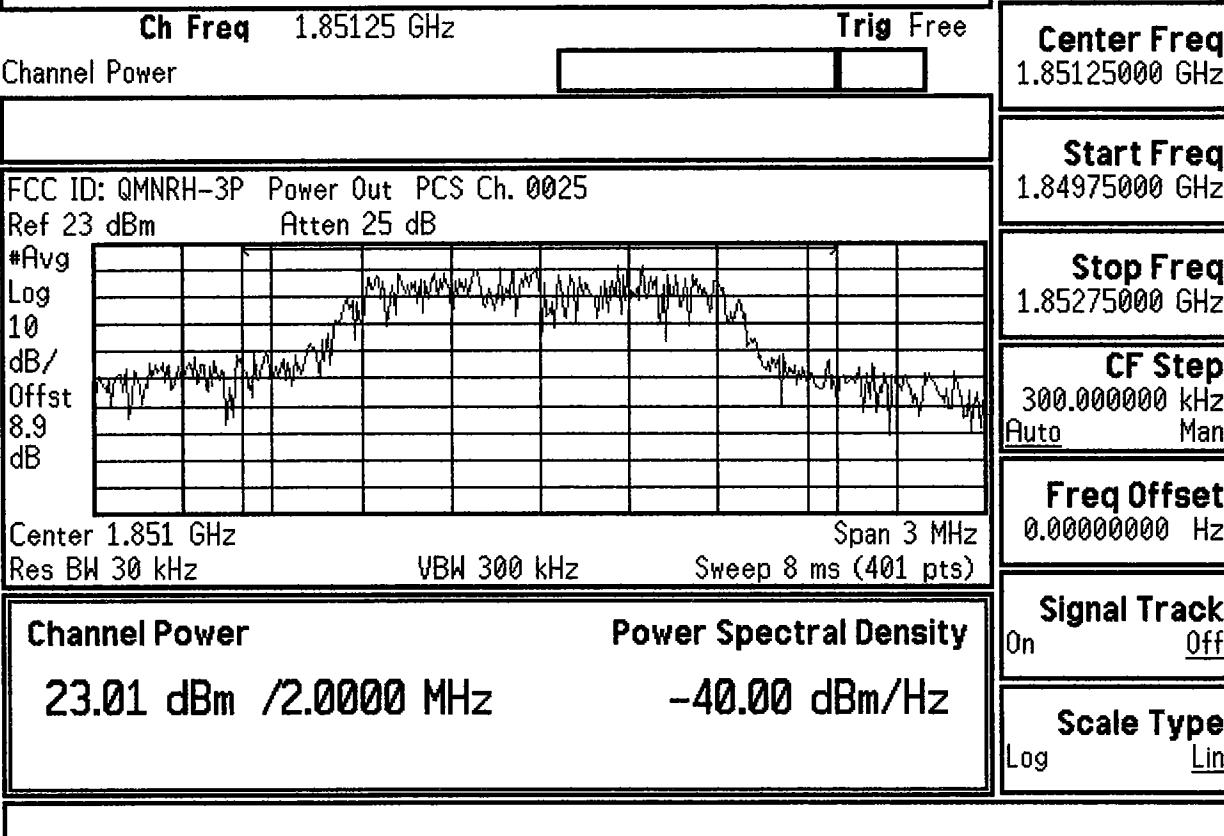

Agilent

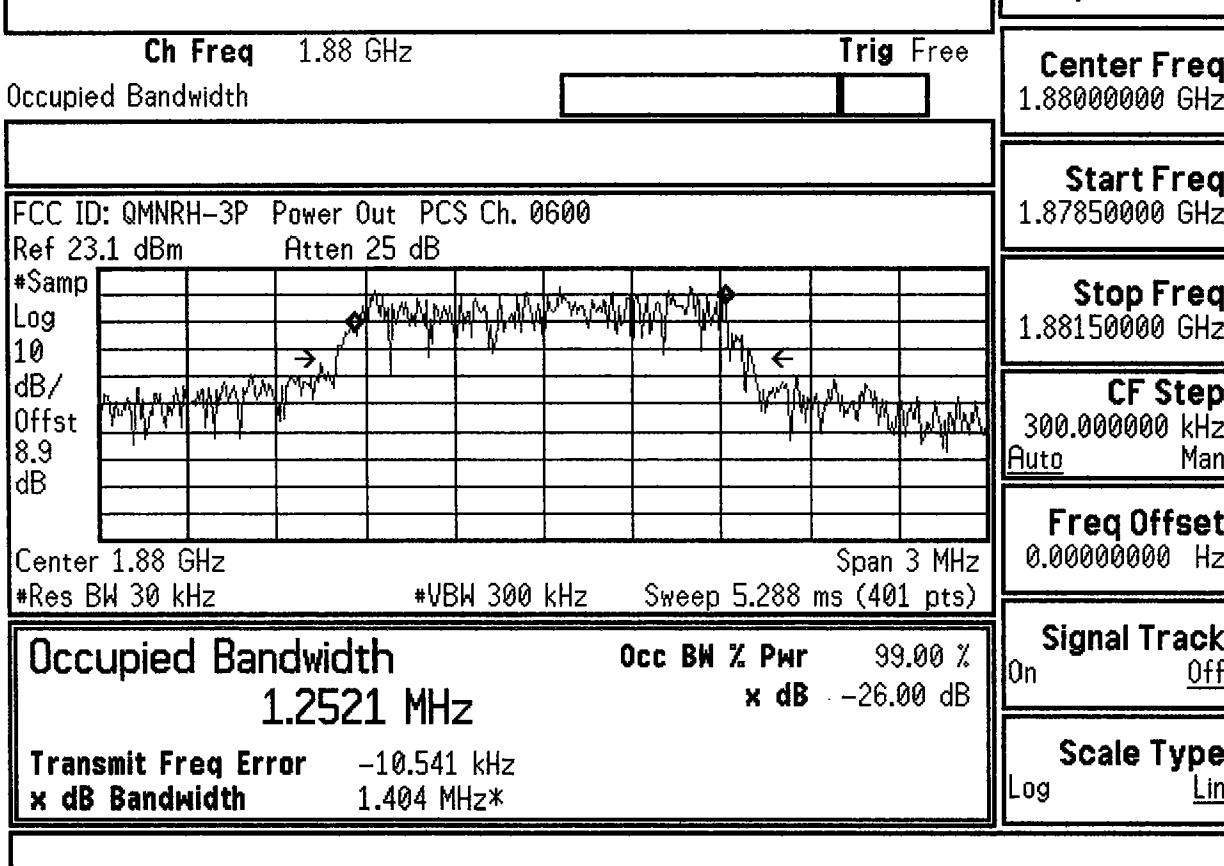


Agilent

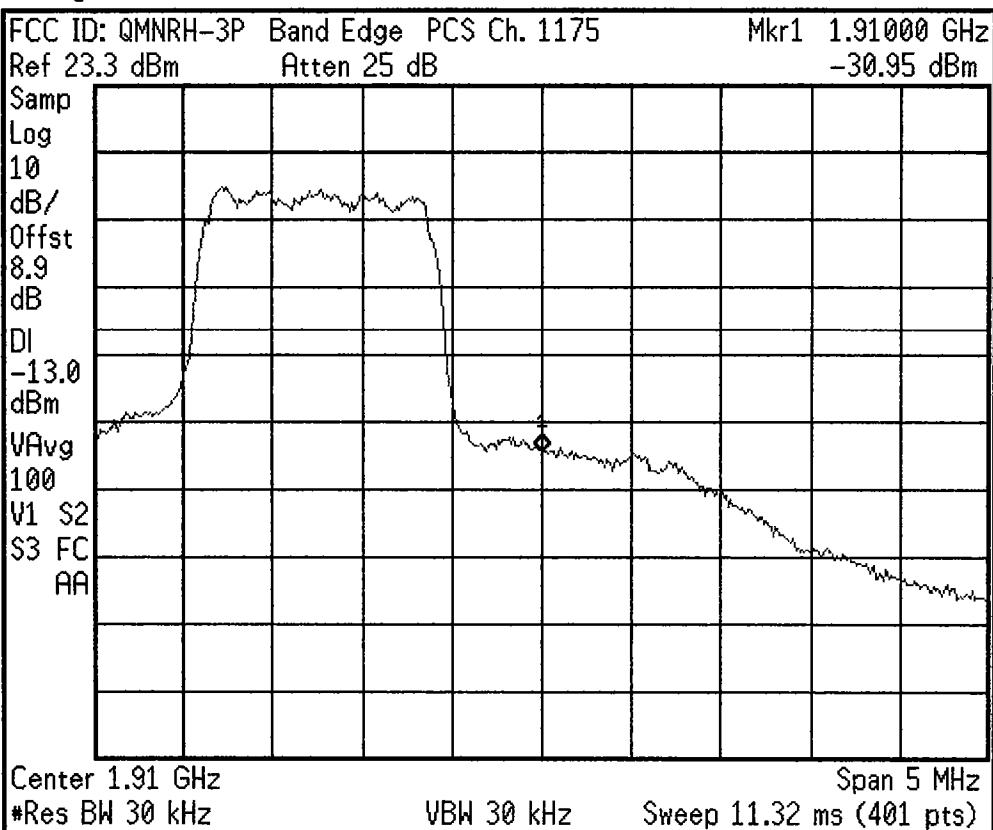


Freq/Channel
Center Freq 1.91000000 GHz
Start Freq 1.90750000 GHz
Stop Freq 1.91250000 GHz
CF Step 500.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off
Scale Type Log Lin

Agilent

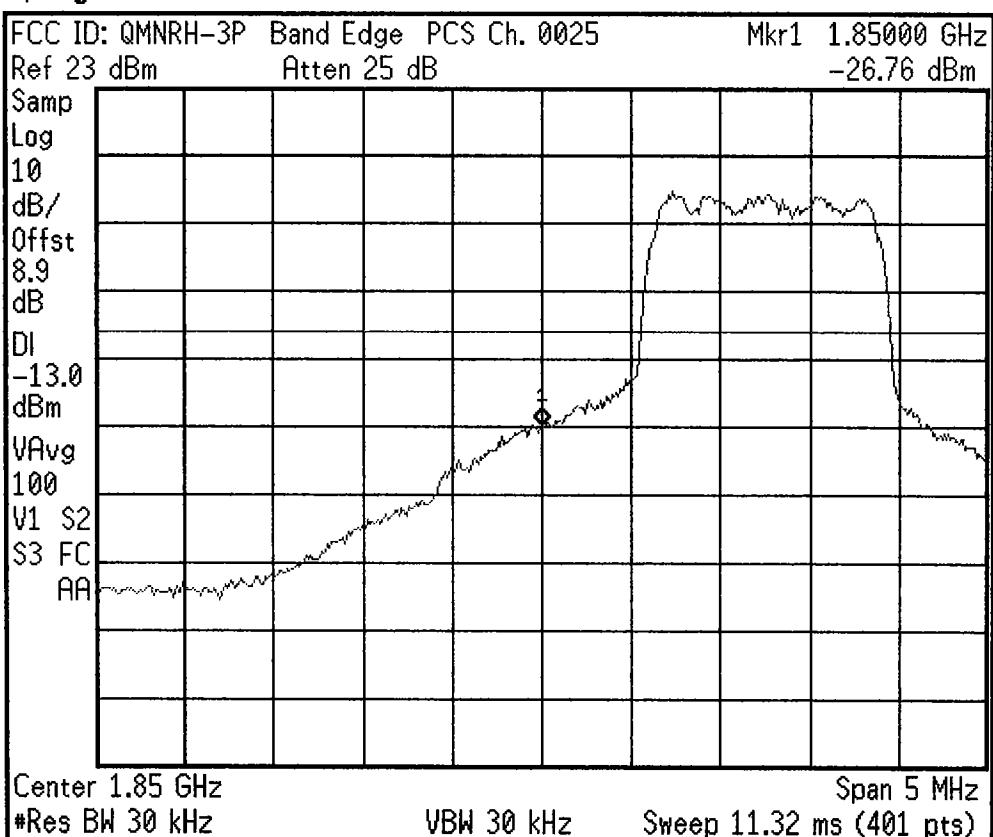

Freq/Channel
Center Freq 1.85000000 GHz
Start Freq 1.84750000 GHz
Stop Freq 1.85250000 GHz
CF Step 500.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off
Scale Type Log Lin

Agilent

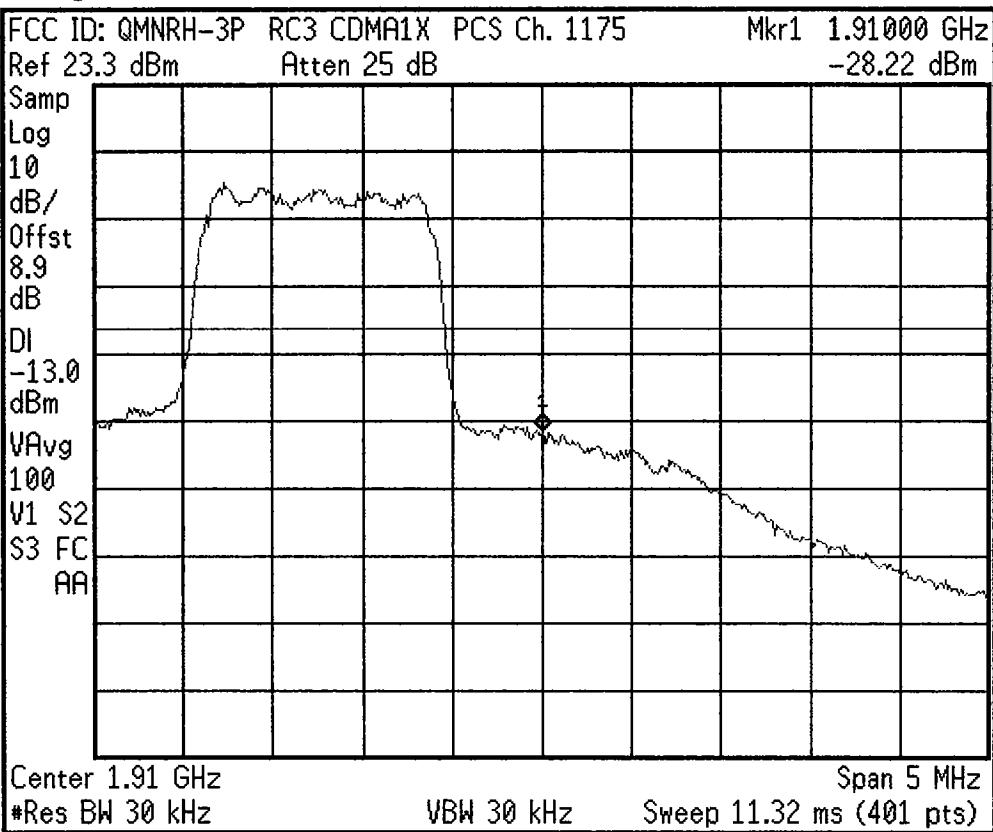

Freq/Channel

Center Freq
1.91000000 GHz

Start Freq
1.90750000 GHz

Stop Freq
1.91250000 GHz


CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

Agilent

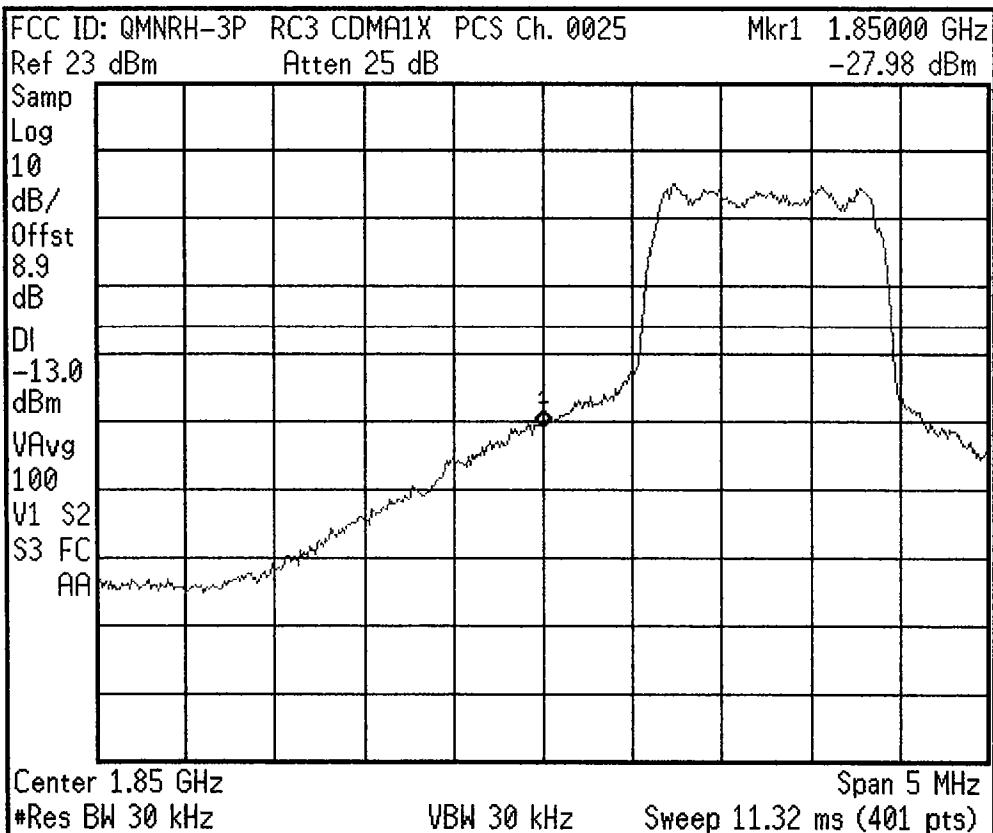

Freq/Channel

Center Freq
1.85000000 GHz

Start Freq
1.84750000 GHz



Stop Freq
1.85250000 GHz

CF Step
500.000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

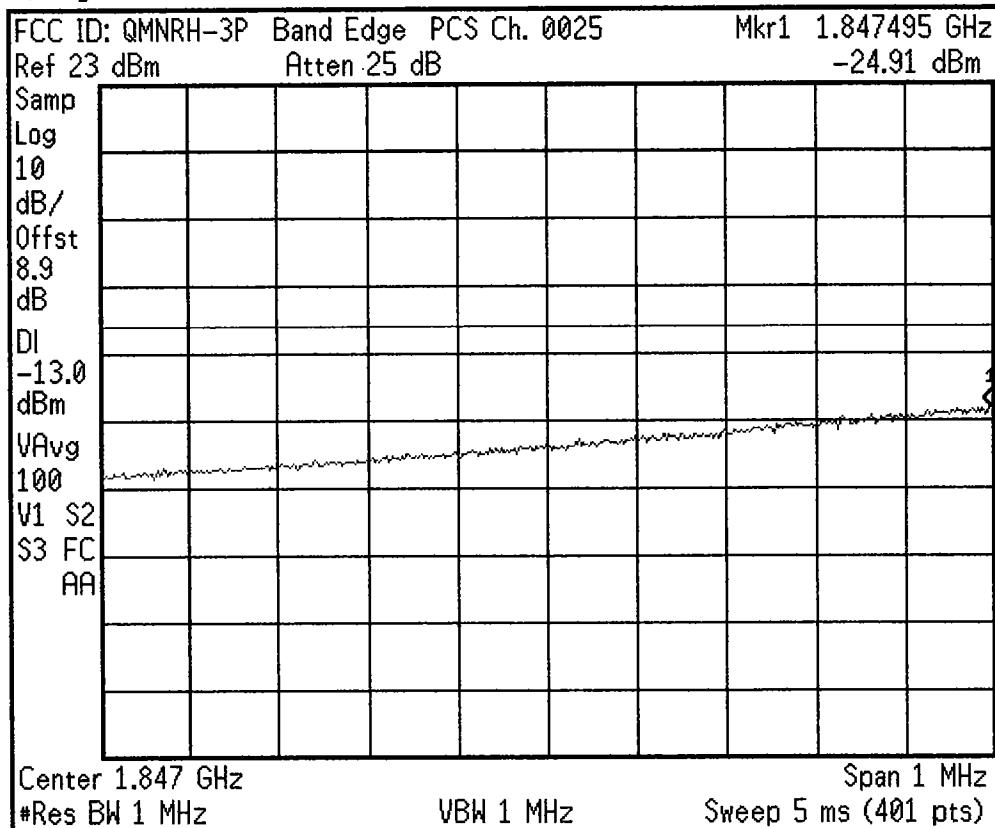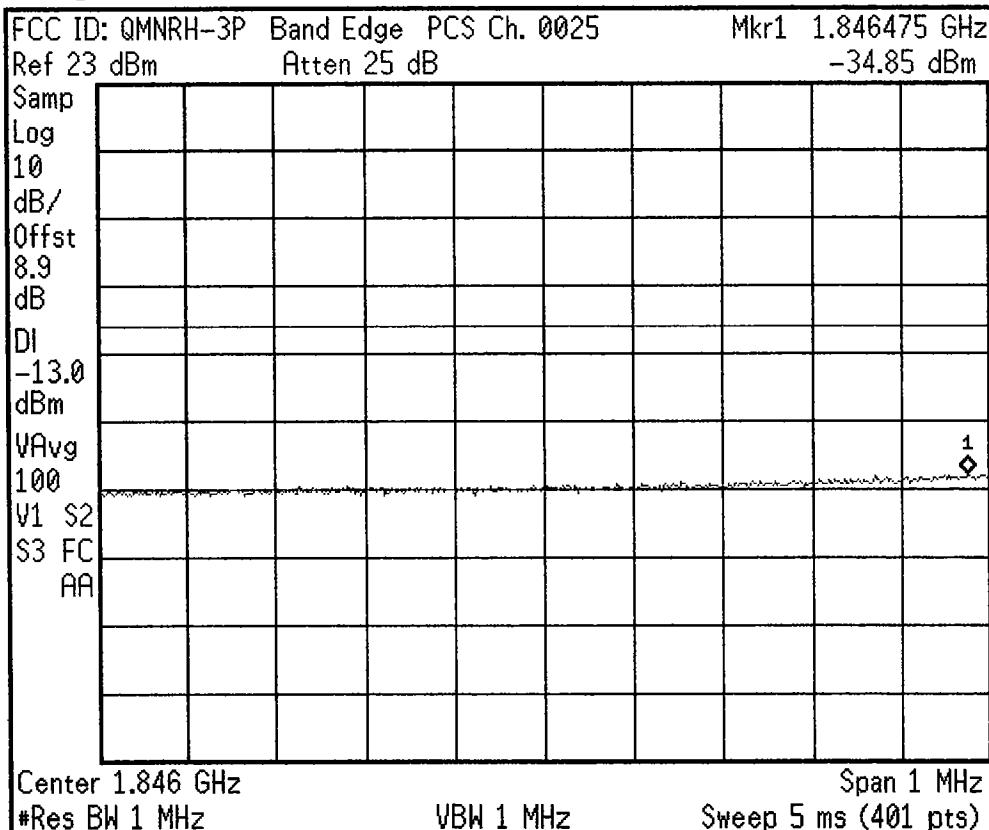*** Agilent****Freq/Channel****Center Freq**
1.84700000 GHz**Start Freq**
1.84650000 GHz**Stop Freq**
1.84750000 GHz**CF Step**
100.000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Scale Type**
Log Lin*** Agilent****Freq/Channel****Center Freq**
1.84600000 GHz**Start Freq**
1.84550000 GHz**Stop Freq**
1.84650000 GHz**CF Step**
100.000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off**Scale Type**
Log Lin

* Agilent

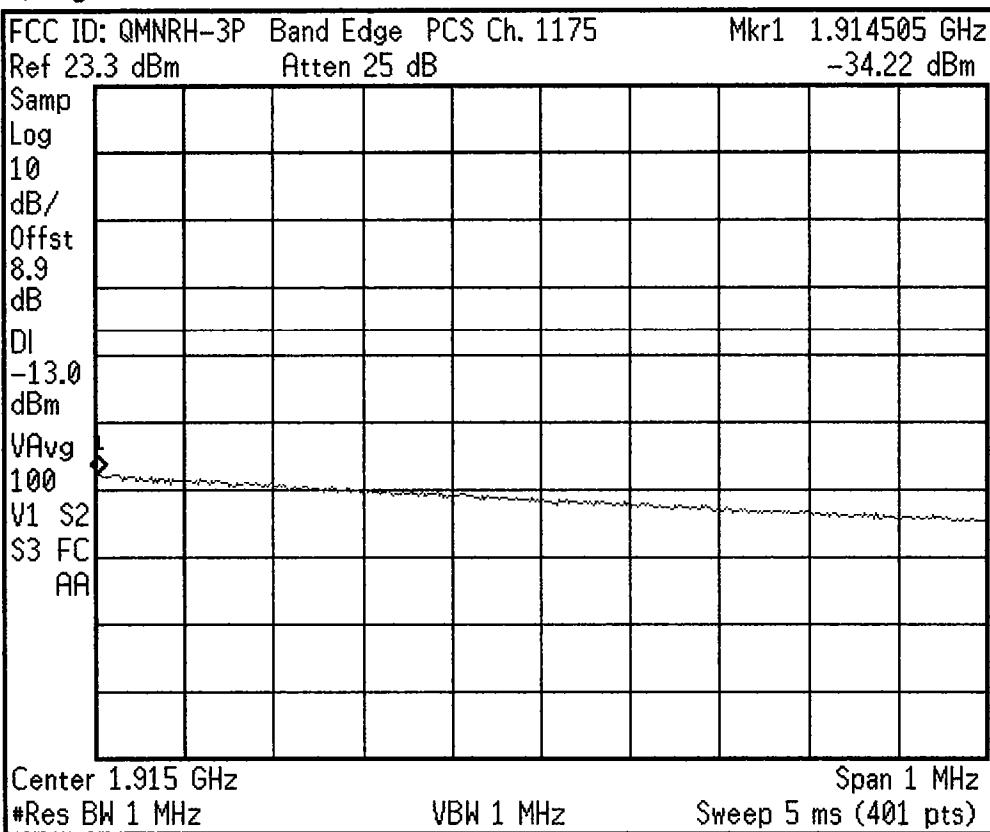

Freq/Channel

Center Freq
1.91500000 GHz

Start Freq
1.91450000 GHz

Stop Freq
1.91550000 GHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

* Agilent

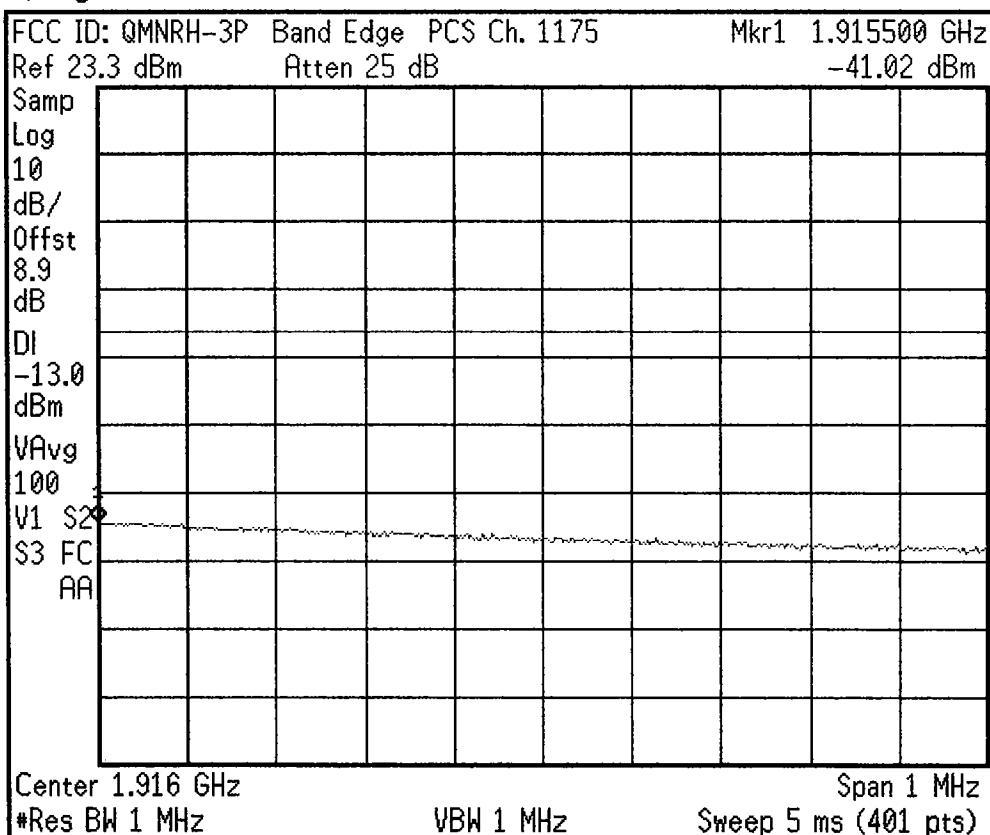

Freq/Channel

Center Freq
1.91600000 GHz

Start Freq
1.91550000 GHz

Stop Freq
1.91650000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin