



SAR Compliance Test Report

Test report no.:	WR1079.001_V1	Date of report:	2006-06-12
Template version:	5	Number of pages:	85
Testing laboratory:	TCC San Diego 12278 Scripps Summit Drive San Diego, CA 92131, USA Tel. +1 858 831 5000 Fax +1 858 831 6500	Client:	Nokia Mobile Phones, Inc. 12278 Scripps Summit Drive San Diego, CA 92131, USA Tel. +1 858 831 5000 Fax +1 858 831 6500
Responsible test engineer:	Julian Kim	Product contact person:	Raymond Ho
Measurements made by:	Julian Kim		
Tested device:	RM-154		
FCC ID:	QMNRM-154	IC:	661X-RM154
Supplement reports:	-		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC San Diego.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures: 2006-06-12

For the contents:

Nerina Walton
Lab Manager

Julian Kim
Senior Certification Engineer



CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration	3
1.2.3 Maximum Drift	4
1.2.4 Measurement Uncertainty	4
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 PICTURE OF THE DEVICE.....	5
2.2 DESCRIPTION OF THE ANTENNA	5
3. TEST CONDITIONS	6
3.1 TEMPERATURE AND HUMIDITY	6
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER.....	6
4. DESCRIPTION OF THE TEST EQUIPMENT	7
4.1 MEASUREMENT SYSTEM AND COMPONENTS	7
4.1.1 Isotropic E-field Probe Type ET3DV6	8
4.2 PHANTOMS	8
4.3 TISSUE SIMULANTS	9
4.3.1 Tissue Simulant Recipes	9
4.3.2 System Checking	10
4.3.3 Tissue Simulants used in the Measurements.....	11
5. DESCRIPTION OF THE TEST PROCEDURE	12
5.1 DEVICE HOLDER.....	12
5.2 TEST POSITIONS.....	12
5.2.1 Against Phantom Head.....	12
5.2.2 Body Worn Configuration	13
5.3 SCAN PROCEDURES.....	14
5.4 SAR AVERAGING METHODS.....	14
6. MEASUREMENT UNCERTAINTY	15
7. RESULTS	16
APPENDIX A: SYSTEM CHECKING SCANS.....	20
APPENDIX B: MEASUREMENT SCANS.....	32
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	76
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	79

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2006-05-16 to 2006-06-01
SN, HW and SW numbers of tested device	SN: 026/01193621 (black covers - normal) SN: 026/01194102 (blue covers - paint with max 28% metal content) HW: 2000 SW: BL100b05.nep
Batteries used in testing	BL-6C
Headsets used in testing	HS-9 and HS-6
Other accessories used in testing	-
State of sample	Prototype Unit
Notes	-

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f (MHz)	Conducted power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
AMPS 800	384 / 836.52	24.8 dBm	Right Cheek	0.80 W/kg	0.90 W/kg	1.6 W/kg	PASSED
CDMA 800	384 / 836.52	25.0 dBm	Left Cheek	0.85 W/kg	0.95 W/kg	1.6 W/kg	PASSED
CDMA 1900	25 / 1851.25	23.7 dBm	Left Tilt	1.01 W/kg	1.13 W/kg	1.6 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f (MHz)	Conducted power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
AMPS 800	991 / 824.04	24.7 dBm	2.2 cm	0.65 W/kg	0.73 W/kg	1.6 W/kg	PASSED
CDMA 800	1013 / 824.70	25.0 dBm	2.2 cm	0.71 W/kg	0.80 W/kg	1.6 W/kg	PASSED
CDMA 1900	600 / 1880.00	23.7 dBm	2.2 cm	0.49 W/kg	0.55 W/kg	1.6 W/kg	PASSED

*SAR values are scaled up by 12% to cover measurement drift.

1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.11 dB

1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%
--------------------------------	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / Uncontrolled

Modes and Bands of Operation	AMPS 800	CDMA 800 / 1900	BT
Modulation Mode	FM	QPSK	GFSK
Duty Cycle	1	1	
Transmitter Frequency Range (MHz)	824 – 849	824 – 849 1850 - 1910	2402-2480

2.1 Picture of the Device



2.2 Description of the Antenna

The device has an internal patch antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.6 to 21.8
Ambient humidity (RH %):	30 to 59

3.2 Test Signal, Frequencies, and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.



4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY 4 software, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE V1	604	12 months	2006-12
E-field Probe ET3DV6	1792	12 months	2007-02
Dipole Validation Kit, D835V2	478	24 months	2006-10
Dipole Validation Kit, D1900V2	534	24 months	2006-10
DASY Software	Version 4.6	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	Agilent E4436B	US 39260114	24 months	2006-05
Signal Generator	Agilent E4432B	US 40052231	24 months	2008-05
Amplifier	Milmega AS0825-20L	1009777	-	-
Power Meter	Agilent E4417A	GB41290918	12 months	2006-10
Power Sensor	Agilent E9327A	US 40440897	12 months	2007-03
Power Sensor	Agilent E9327A	US 40440896	12 months	2007-03
Call Tester	Agilent 8960/E5515C	US 40440119	24 months	2007-12
Vector Network Analyzer	Agilent 8753ES	MY40002861	12 months	2006-06
Dielectric Probe Kit	Agilent 85070D	US 01440165	-	-



4.1.1 Isotropic E-field Probe Type ET3DV6

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checking and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the simulating liquids are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipes were used for Head and Body tissue simulants:

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	39.74	55.97
HEC	0.25	1.21
Sugar	58.31	41.76
Preservative	0.15	0.27
Salt	1.55	0.79

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.34	41.8	0.89	
	$\pm 10\%$ window	2.11 – 2.57			
	2006-05-16	2.35	40.2	0.89	21.6
	2006-05-17	2.39	40.1	0.89	21.5
	2006-05-18	2.36	40.1	0.89	21.4
	2006-05-19	2.32	39.8	0.89	21.5
	2006-05-26	2.33	40.1	0.89	21.5
1900	Reference result	9.91	39.4	1.44	
	$\pm 10\%$ window	8.92 – 10.90			
	2006-05-22	10.6	38.4	1.44	21.7
	2006-05-23	10.7	38.5	1.44	21.6
	2006-05-25	10.6	38.5	1.44	21.7

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.44	54.3	1.00	
	$\pm 10\%$ window	2.20 – 2.68			
	2006-05-31	2.39	53.0	0.97	20.6
	2006-06-01	2.45	53.0	0.97	20.7
1900	Reference result	9.85	51.3	1.59	
	$\pm 10\%$ window	8.87 – 10.83			
	2006-05-30	10.5	51.5	1.56	21.8

Plots of the system checking scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836.5	Recommended value	41.5	0.90	
	$\pm 5\%$ window	39.4 – 43.6	0.86 – 0.95	
	2006-05-16	40.1	0.89	21.6
	2006-05-17	40.0	0.89	21.5
	2006-05-18	40.1	0.89	21.4
	2006-05-19	39.8	0.89	21.5
	2006-05-26	40.1	0.89	21.5
1880	Recommended value	40.0	1.40	
	$\pm 5\%$ window	38.0 – 42.0	1.33 – 1.47	
	2006-05-22	38.5	1.42	21.7
	2006-05-23	38.7	1.42	21.6
	2006-05-25	38.6	1.42	21.7

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
836.5	Recommended value	55.2	0.97	
	$\pm 5\%$ window	52.4 – 58.0	0.92 – 1.02	
	2006-05-31	53.0	0.97	20.6
	2006-06-01	53.0	0.97	20.7
1880	Recommended value	53.3	1.52	
	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	2006-05-30	51.6	1.54	21.8

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".



Photo of the device in "cheek" position



Photo of the device in "tilt" position

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gives higher results.



Photo of the device positioned for Body SAR measurement. The spacer was removed for the tests.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	G_i	$G_i \cdot U_i$ (%)	V_i
Measurement System							
Probe Calibration	E2.1	±5.9	N	1	1	±5.9	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	√3	1	±0.6	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±0.0	R	√3	1	±0.0	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±12.9	116
Coverage Factor for 95%			k=2				
Expanded Uncertainty						±25.8	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

AMPS800 Head SAR Results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 991 824.04 MHz	Ch 384 836.52 MHz	Ch 799 848.97 MHz
AMPS	Power		24.7 dBm	24.8 dBm	24.7 dBm
Black covers	Left	Cheek	0.73	0.78	0.69
		Tilt	-	0.63	-
	Right	Cheek	0.71	0.78	0.66
		Tilt	-	0.53	-
Black covers	Right Cheek, BT active		-	0.78	-
AMPS	Power		24.7 dBm	24.8 dBm	24.7 dBm
Blue covers	Right Cheek, BT active		-	0.80	-

CDMA800 Head SAR Results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 1013 824.70 MHz	Ch 384 836.52 MHz	Ch 777 848.31 MHz
CDMA	Power		24.9 dBm	24.9 dBm	24.9 dBm
Black covers	Left	Cheek	0.80	0.83	0.76
		Tilt	-	0.67	-
	Right	Cheek	0.76	0.81	0.73
		Tilt	-	0.53	-
Black covers	Left Cheek, BT active		-	0.84	-
CDMA	Power		25.0 dBm	25.0 dBm	24.8 dBm
Blue covers	Left Cheek, BT active		-	0.85	-



CDMA1900 Head SAR Results

Option used	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 25 1851.25 MHz	Ch 600 1880.00 MHz	Ch 1175 1908.75 MHz
CDMA	Power		23.7 dBm	23.7 dBm	23.6 dBm
Black covers	Left	Cheek	-	0.76	-
		Tilt	0.94	0.91	0.74
	Right	Cheek	-	0.46	-
		Tilt	-	0.74	-
Black covers	Left Tilt, BT active		1.01	-	-
CDMA	Power		23.7 dBm	23.7 dBm	23.7 dBm
Blue covers	Left Tilt, BT active		0.91	-	-

The measured Body SAR values for the test device are tabulated below:

AMPS800 Body SAR Results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 991 824.04 MHz	Ch 384 836.52 MHz	Ch 799 848.97 MHz
AMPS	Power	24.7 dBm	24.8 dBm	24.7 dBm
Black covers	No headset	0.64	0.63	0.57
	Headset HS-9	-	0.50	-
	Headset HS-6	-	0.46	-
Black covers	No headset, BT active	0.65	-	-
AMPS	Power	24.7 dBm	24.8 dBm	24.7 dBm
Blue covers	No headset, BT active	0.64	-	-

CDMA800 Body SAR Results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 1013 824.70 MHz	Ch 384 836.52 MHz	Ch 777 848.31 MHz
CDMA	Power	24.9 dBm	24.9 dBm	24.9 dBm
Black covers	No headset	0.70	-	-
	Headset HS-9	-	0.53	-
	Headset HS-6	-	0.46	-
Black covers	No headset, BT active	0.70	-	-
CDMA	Power	25.0 dBm	25.0 dBm	24.8 dBm
Blue covers	No headset, BT active	0.71	-	-

CDMA1900 Body SAR Results

Option used	Test configuration	SAR, averaged over 1g (W/kg)		
		Ch 25 1851.25 MHz	Ch 600 1880.00 MHz	Ch 1175 1908.75 MHz
CDMA	Power	23.7 dBm	23.7 dBm	23.6 dBm
Black covers	No headset	0.46	0.47	0.42
	Headset HS-9	-	0.44	-
	Headset HS-6	-	0.42	-
Black covers	No headset, BT active	-	0.48	-
CDMA	Power	23.7 dBm	23.7 dBm	23.7 dBm
Blue covers	No headset, BT active	-	0.49	-

Plots of the Measurement scans are given in Appendix B.



APPENDIX A: SYSTEM CHECKING SCANS

Date: 2006-05-16; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 478; Head System Check

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.892 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.6°C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

835MHz system check/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.53 mW/g


835MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.1 V/m ; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.35 mW/g ; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.53 mW/g

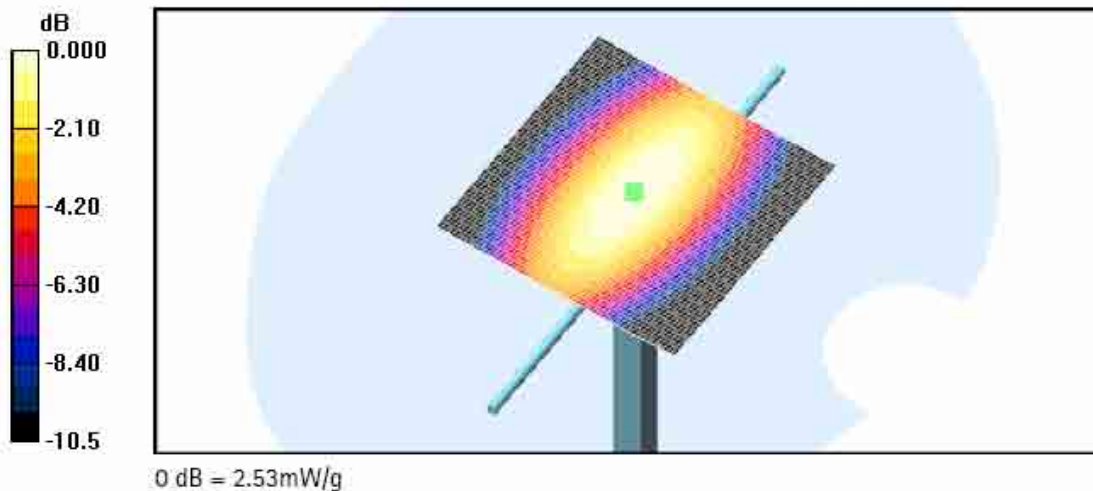

Date: 2006-05-17; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 478; Head System Check

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.886 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.5°C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

835MHz system check/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.58 mW/g


835MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.3 V/m ; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 3.70 W/kg

SAR(1 g) = 2.39 mW/g ; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.60 mW/g

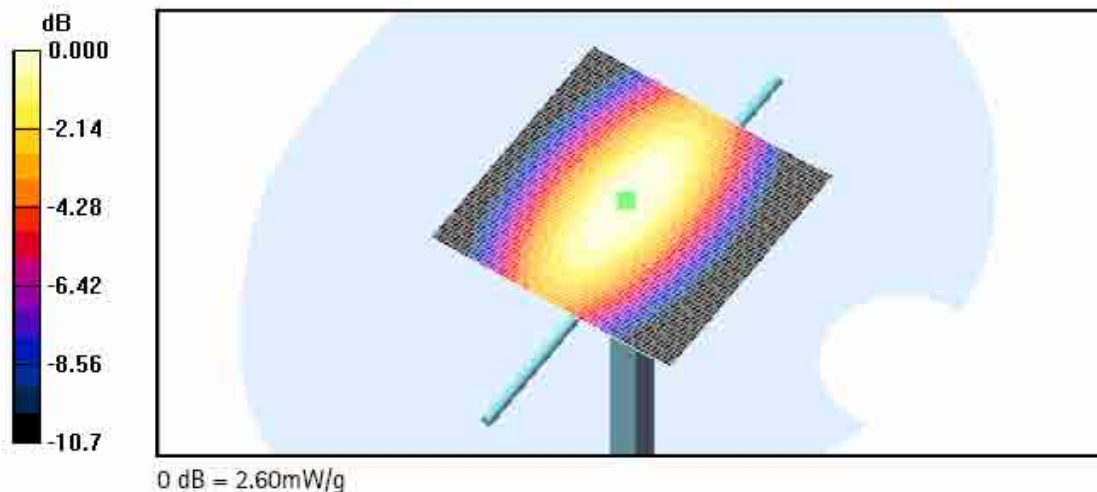

Date: 2006-05-18; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 478; Head System Check

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.4°C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

835MHz system check/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.55 mW/g


835MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.8 V/m ; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.36 mW/g ; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.54 mW/g

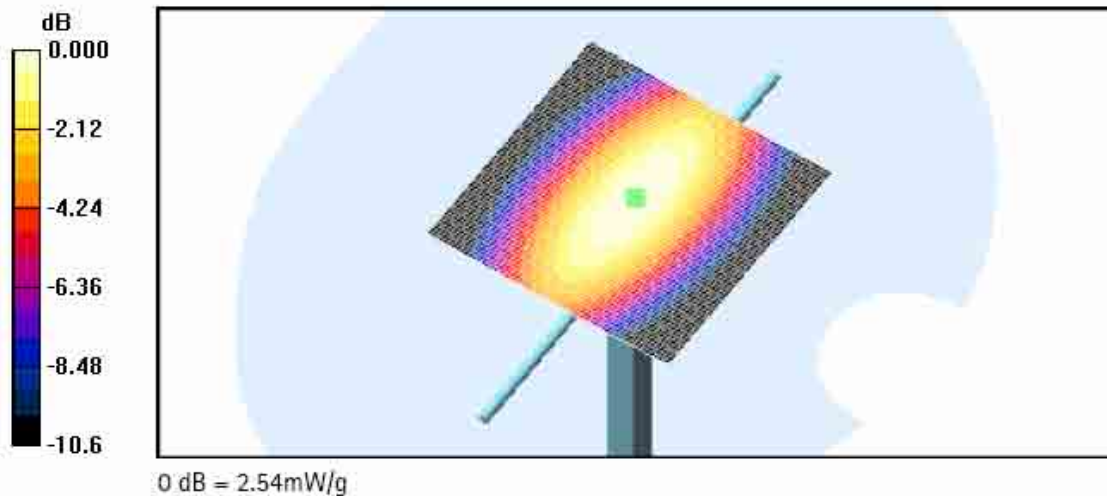

Date: 2006-05-19; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 478; Head System Check

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.5°C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

835MHz system check/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.50 mW/g


835MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.6 V/m ; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 2.32 mW/g ; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.51 mW/g

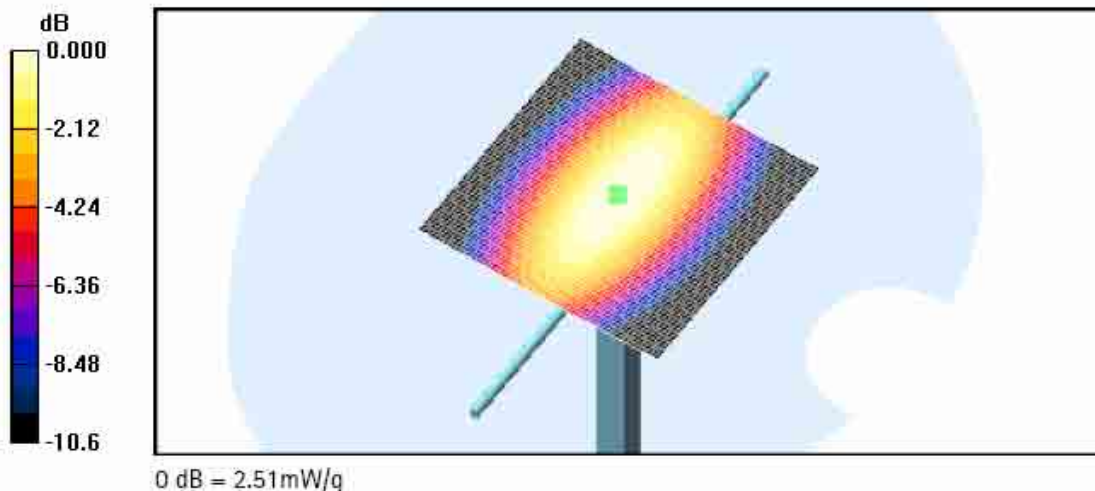

Date: 2006-05-26; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 478; Head System Check

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.5°C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

835MHz system check/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.53 mW/g


835MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.6 V/m ; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.33 mW/g ; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.51 mW/g

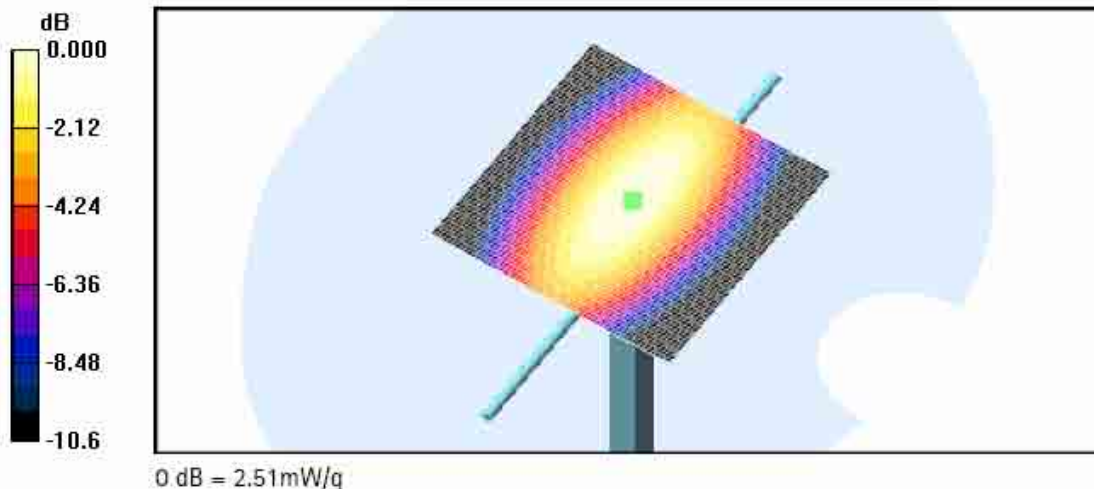

Date: 2006-05-22; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Head System Check

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.7 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

1900MHz system check/Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.9 mW/g


1900MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.1 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.42 mW/g

Maximum value of SAR (measured) = 11.9 mW/g

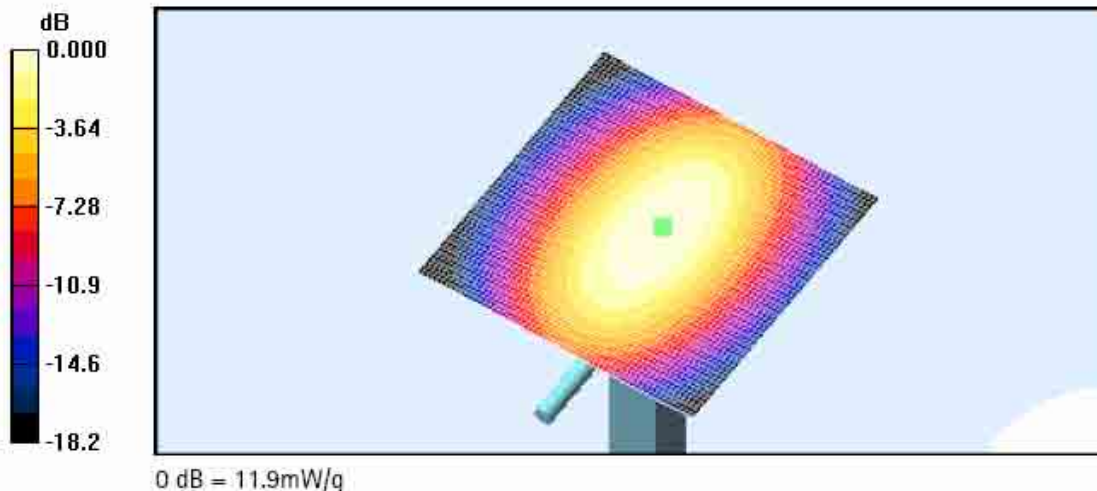

Date: 2006-05-23; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Head System Check

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.6 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

1900MHz system check/Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 12.0 mW/g


1900MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.7 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.44 mW/g

Maximum value of SAR (measured) = 11.9 mW/g

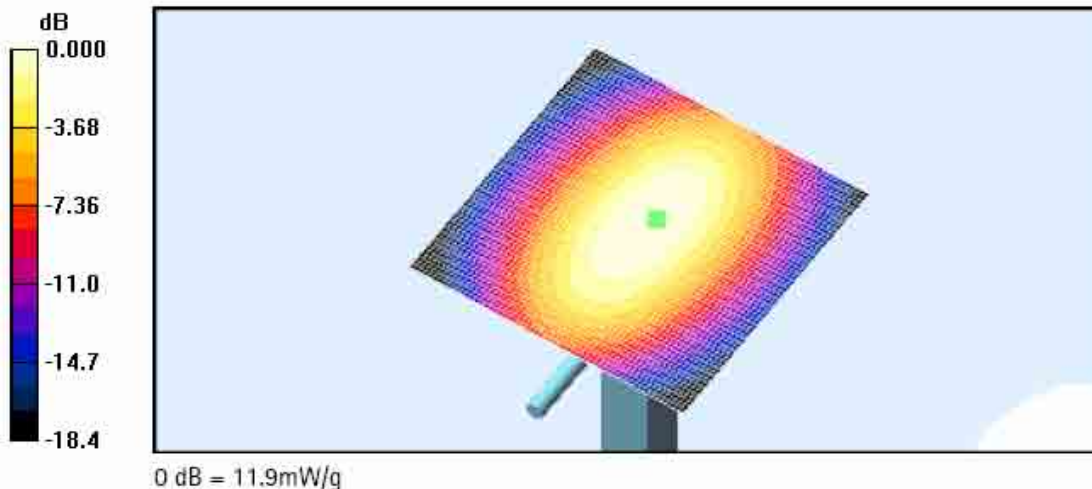

Date: 2006-05-25; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Head System Check

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 21.7°C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

1900MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.9 V/m; Power Drift = 0.049 dB


Peak SAR (extrapolated) = 21.2 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.42 mW/g

Maximum value of SAR (measured) = 12.0 mW/g

1900MHz system check/Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 12.0 mW/g

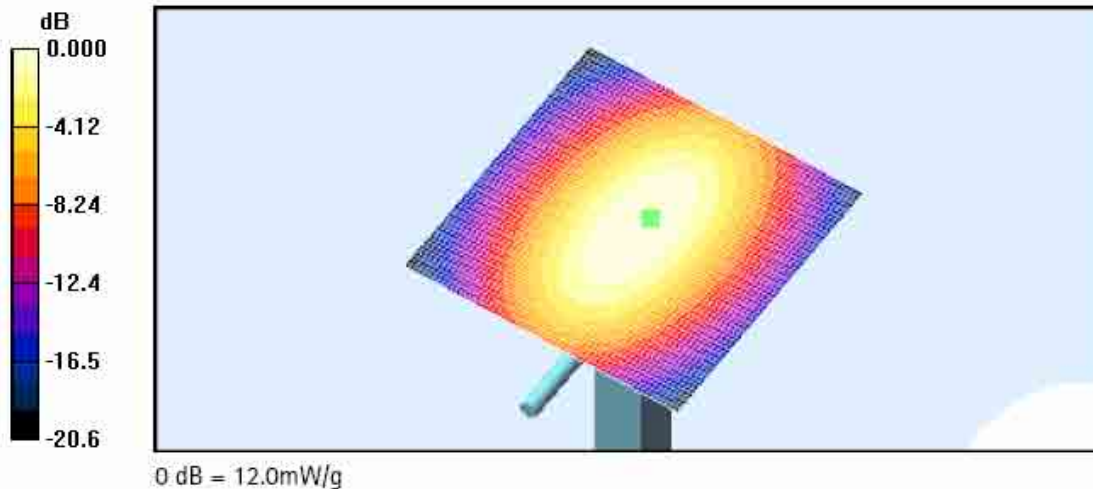

Date: 2006-05-31; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 478; Body System Check

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 20.6°C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

835MHz system check/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.60 mW/g


835MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.7 V/m ; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 2.39 mW/g ; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.59 mW/g

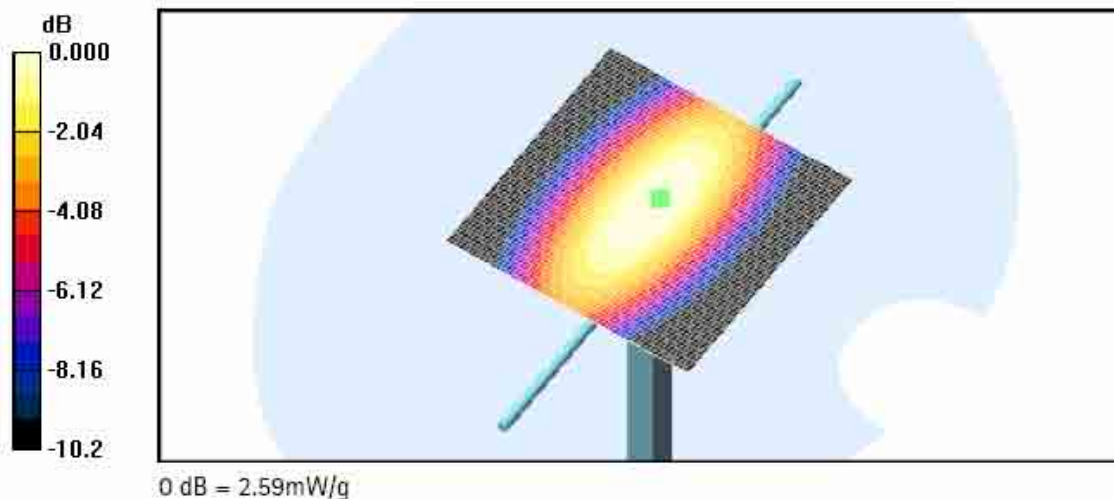

Date: 2006-06-01; Test Laboratory: TCC San Diego

Dipole 835 MHz; Serial No. 478; Body System Check

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$; Temperature (liq.) = 20.7°C

Phantom section: Flat Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

835MHz system check/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.67 mW/g


835MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.1 V/m ; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.45 mW/g ; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.66 mW/g

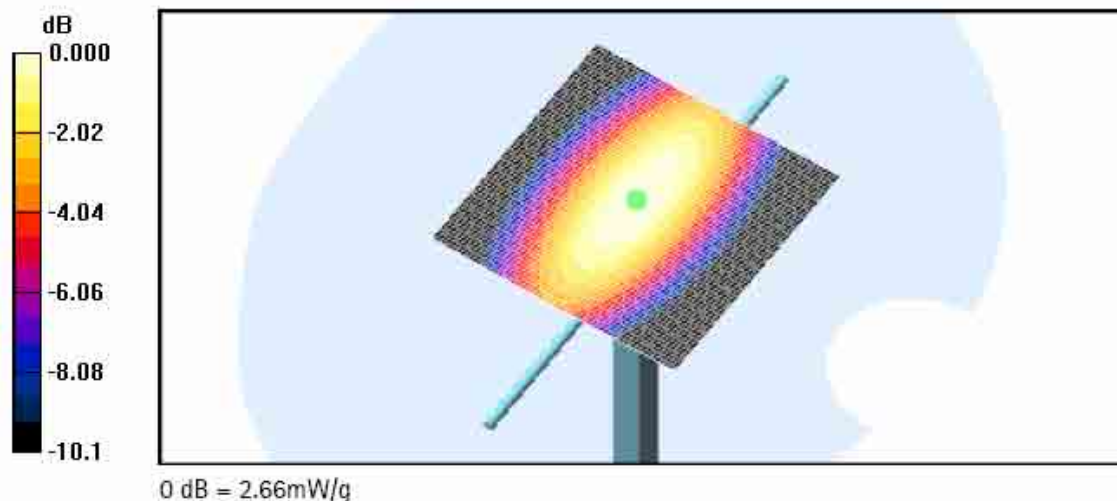

Date: 2006-05-30; Test Laboratory: TCC San Diego

Dipole 1900 MHz; Serial No. 534; Body System Check

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.8 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF{4.56, 4.56, 4.56}; Calibrated: 02/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

1900MHz system check/Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 12.3 mW/g


1900MHz system check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.0 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 19.5 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.45 mW/g

Maximum value of SAR (measured) = 11.9 mW/g

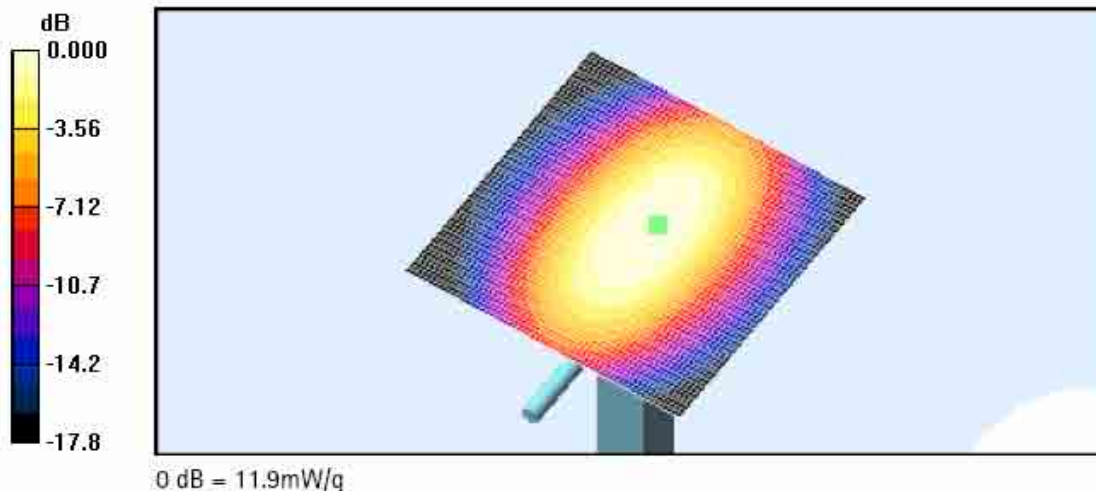

APPENDIX B: MEASUREMENT SCANS

Date: 2006-05-16; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: AMPS800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.6 °C

Phantom section: Left Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.819 mW/g

Left cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.6 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.777 mW/g; SAR(10 g) = 0.563 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 mW/g

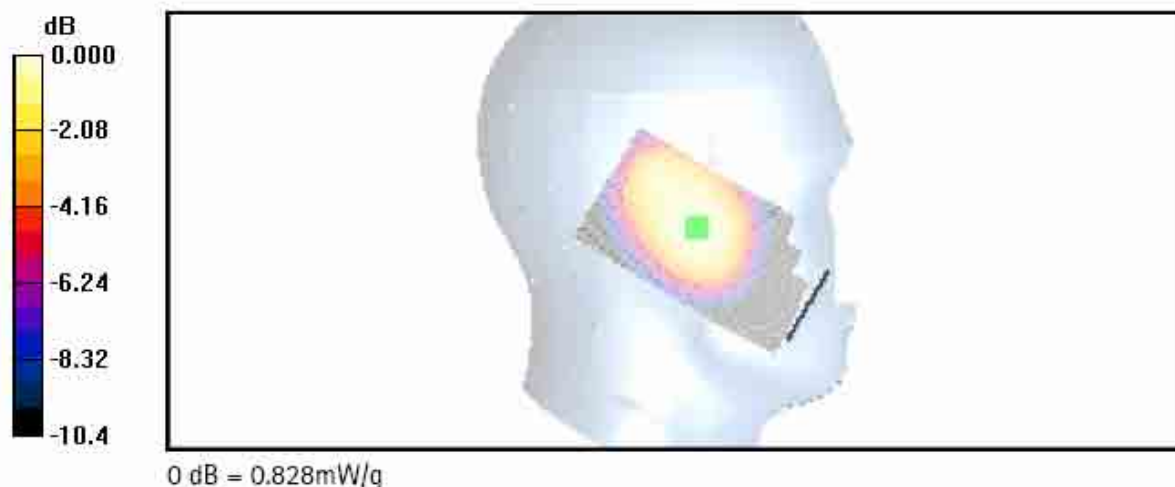



Date: 2006-05-16; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: AMPS800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.6 °C

Phantom section: Left Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left tilt/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.595 mW/g

Left tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.367 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.723 mW/g

Left tilt/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.4 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.646 W/kg

SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.344 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.506 mW/g

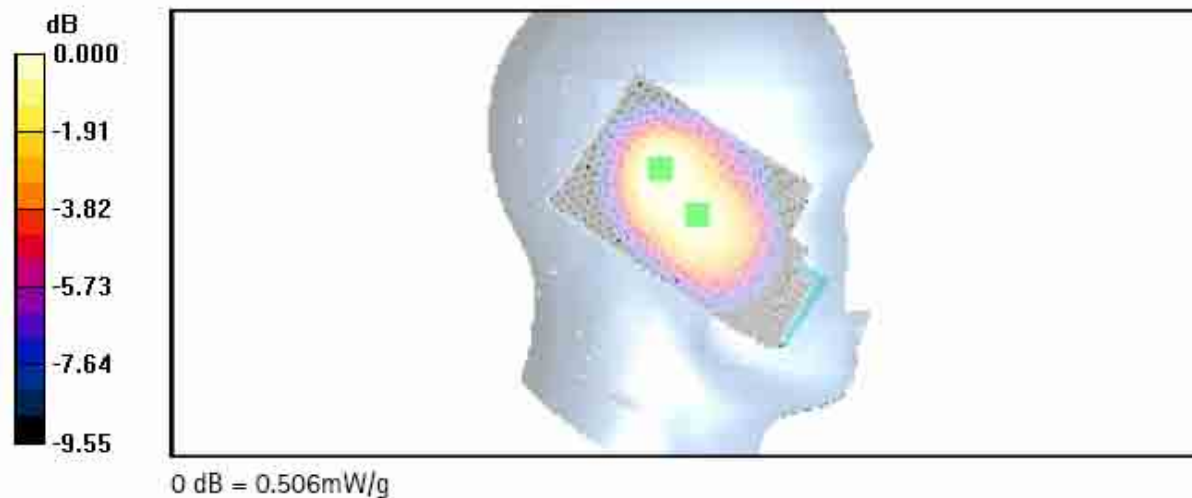



Date: 2006-05-16; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: AMPS800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.6 °C

Phantom section: Right Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right cheek/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.890 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.579 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.810 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.3 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.443 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.732 mW/g

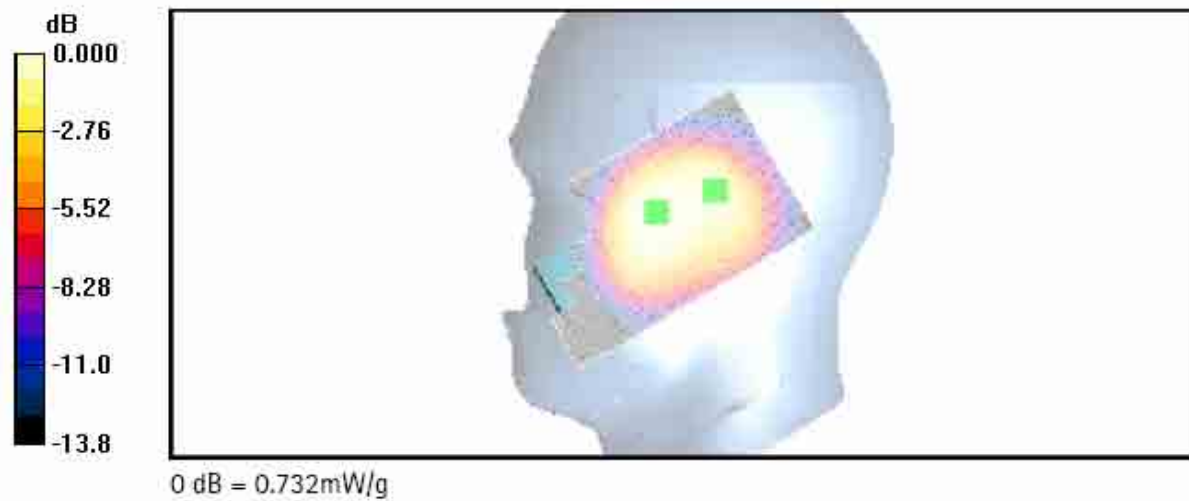



Date: 2006-05-16; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: AMPS800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.6 °C

Phantom section: Right Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right tilt/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.522 mW/g

Right tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.531 mW/g; SAR(10 g) = 0.340 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.597 mW/g

Right tilt/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.347 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.511 mW/g

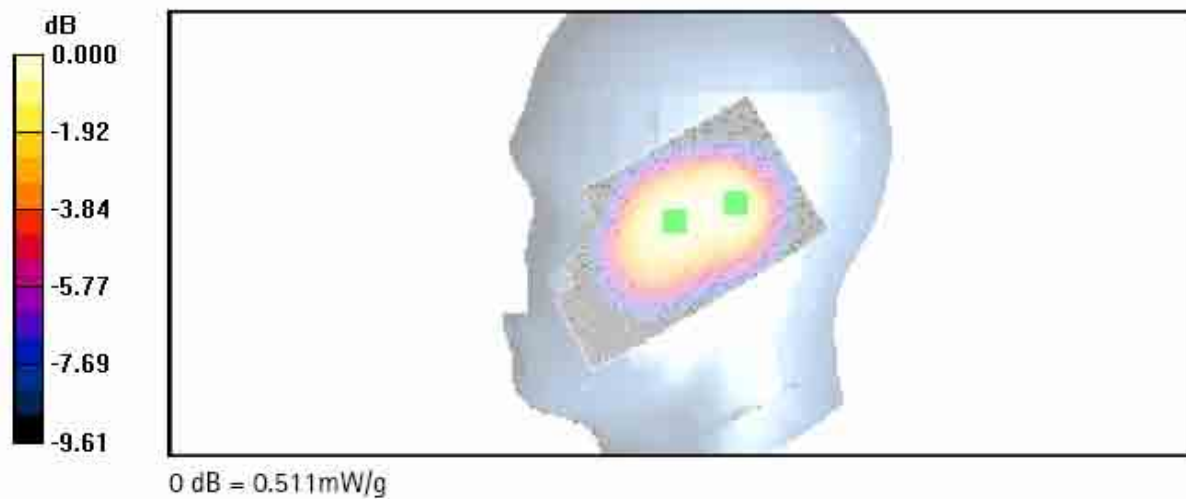

Date: 2006-05-26; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01194102; with Bluetooth active

Communication System: AMPS800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.5 °C

Phantom section: Right Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right cheek/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.907 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.7 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.798 mW/g; SAR(10 g) = 0.577 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.839 mW/g

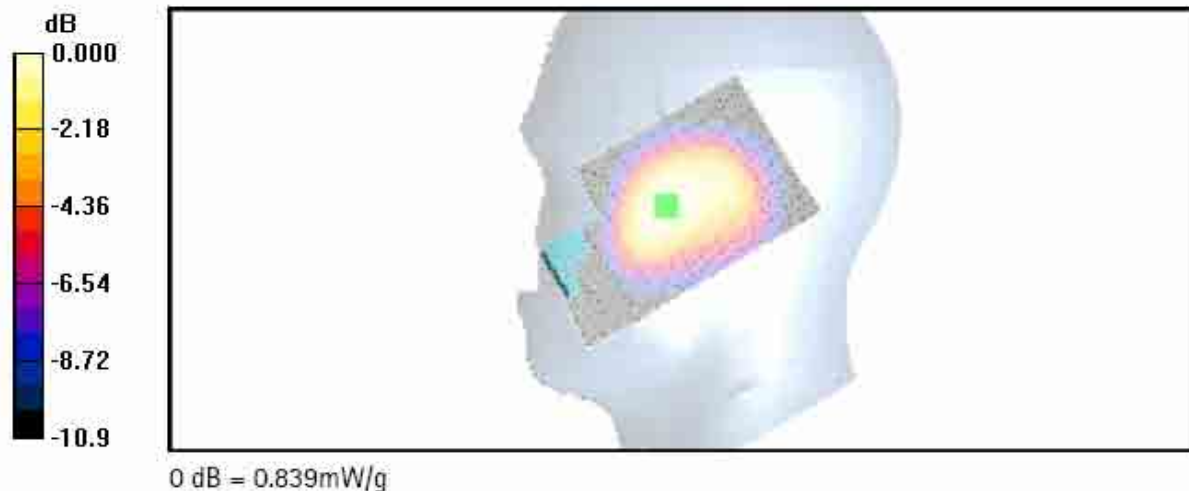



Date: 2006-05-18; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.4 °C

Phantom section: Left Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left cheek/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.886 mW/g

Left cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.593 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.883 mW/g

Left cheek/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.8 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.653 mW/g; SAR(10 g) = 0.429 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.721 mW/g

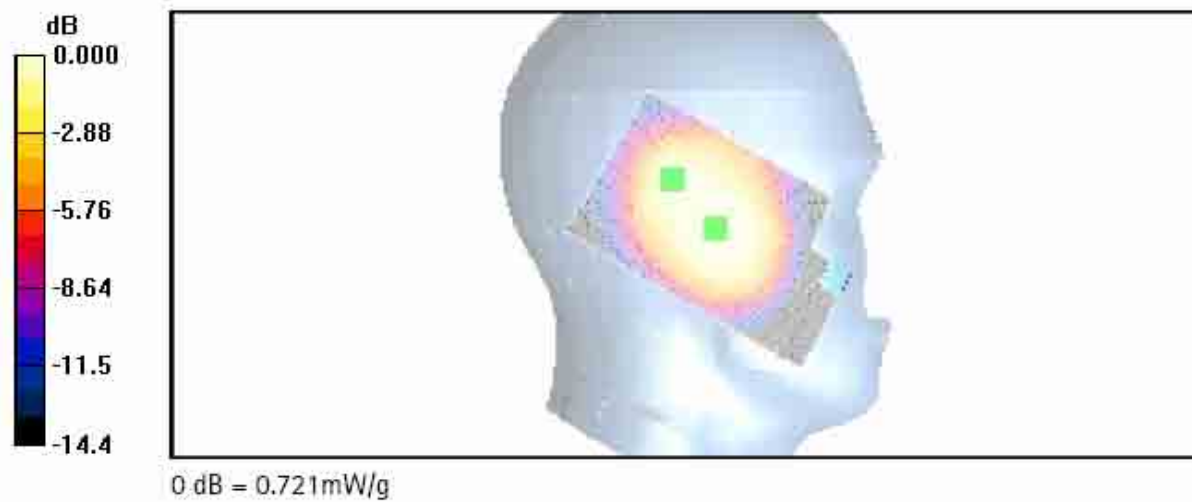



Date: 2006-05-19; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.5 °C

Phantom section: Left Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left tilt/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.636 mW/g

Left tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.386 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.777 mW/g

Left tilt/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.1 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.349 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.512 mW/g

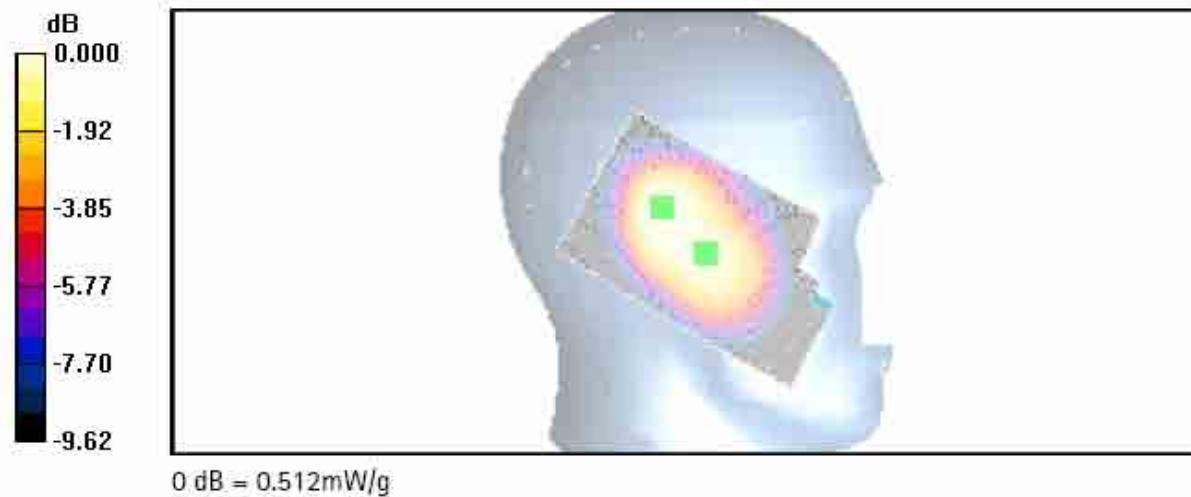



Date: 2006-05-18; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.4 °C

Phantom section: Right Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right cheek/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.918 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.0 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.810 mW/g; SAR(10 g) = 0.593 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.840 mW/g

Right cheek/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.0 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.665 mW/g; SAR(10 g) = 0.454 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.765 mW/g

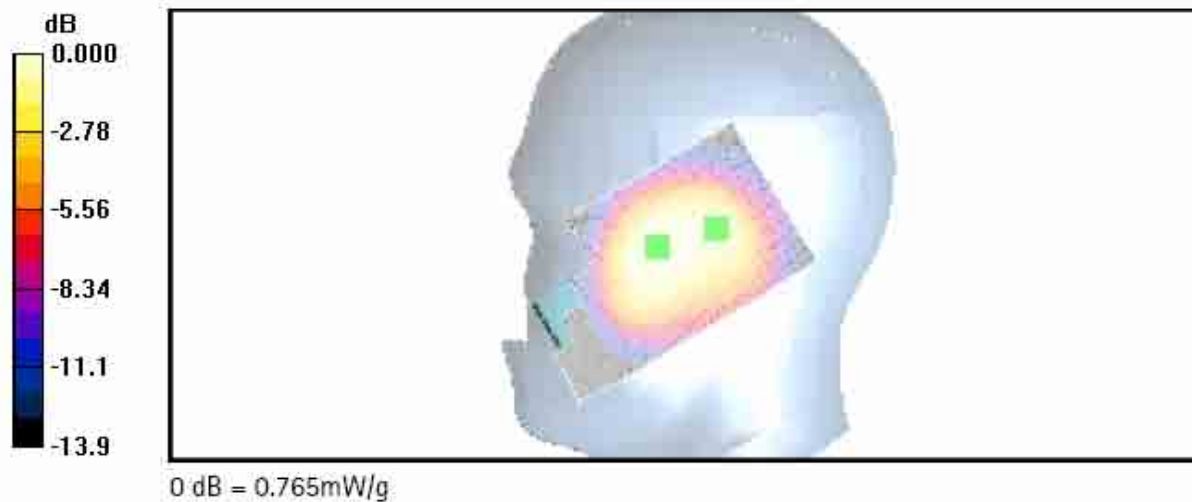



Date: 2006-05-19; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.5 °C

Phantom section: Right Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right tilt/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.518 mW/g

Right tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.339 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.606 mW/g

Right tilt/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.3 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.345 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.500 mW/g

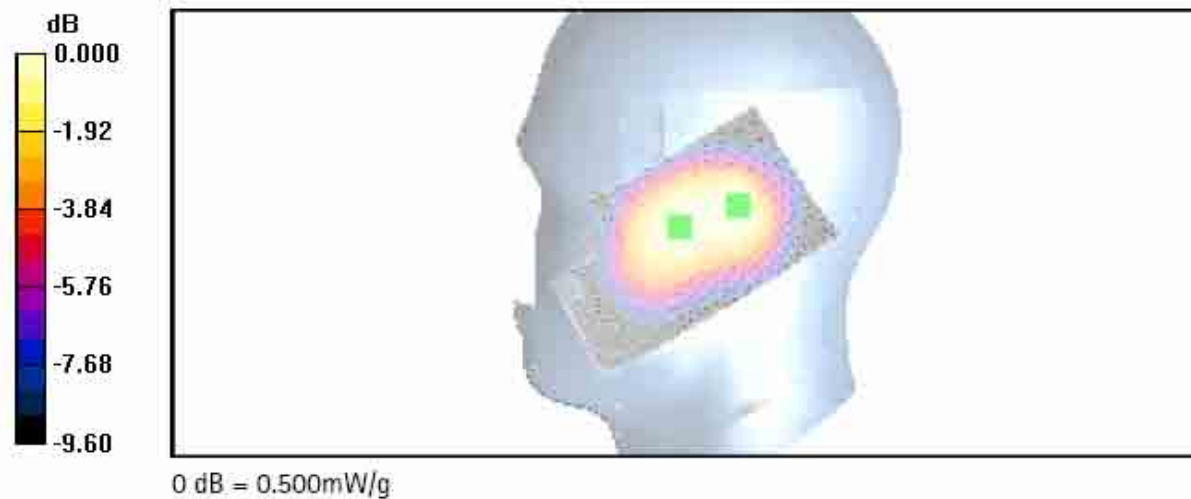



Date: 2006-05-18; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with Bluetooth active

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.4 °C

Phantom section: Left Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left cheek/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.887 mW/g

Left cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.604 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.888 mW/g

Left cheek/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.6 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.435 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.749 mW/g

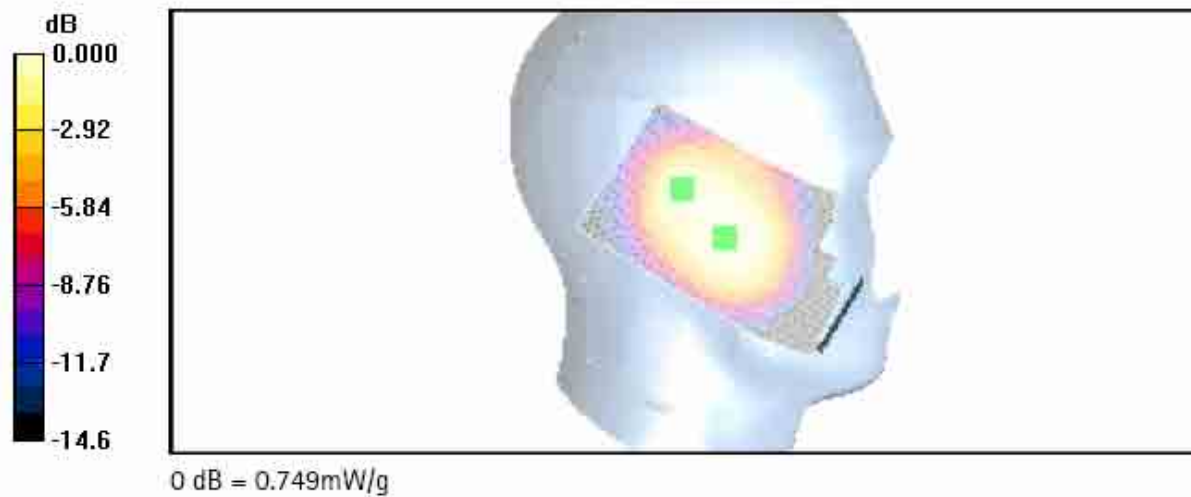



Date: 2006-05-26; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01194102; with Bluetooth active

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.5 °C

Phantom section: Left Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.7, 6.7, 6.7); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left cheek/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.920 mW/g

Left cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.597 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.904 mW/g

Left cheek/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 26.0 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.436 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.754 mW/g

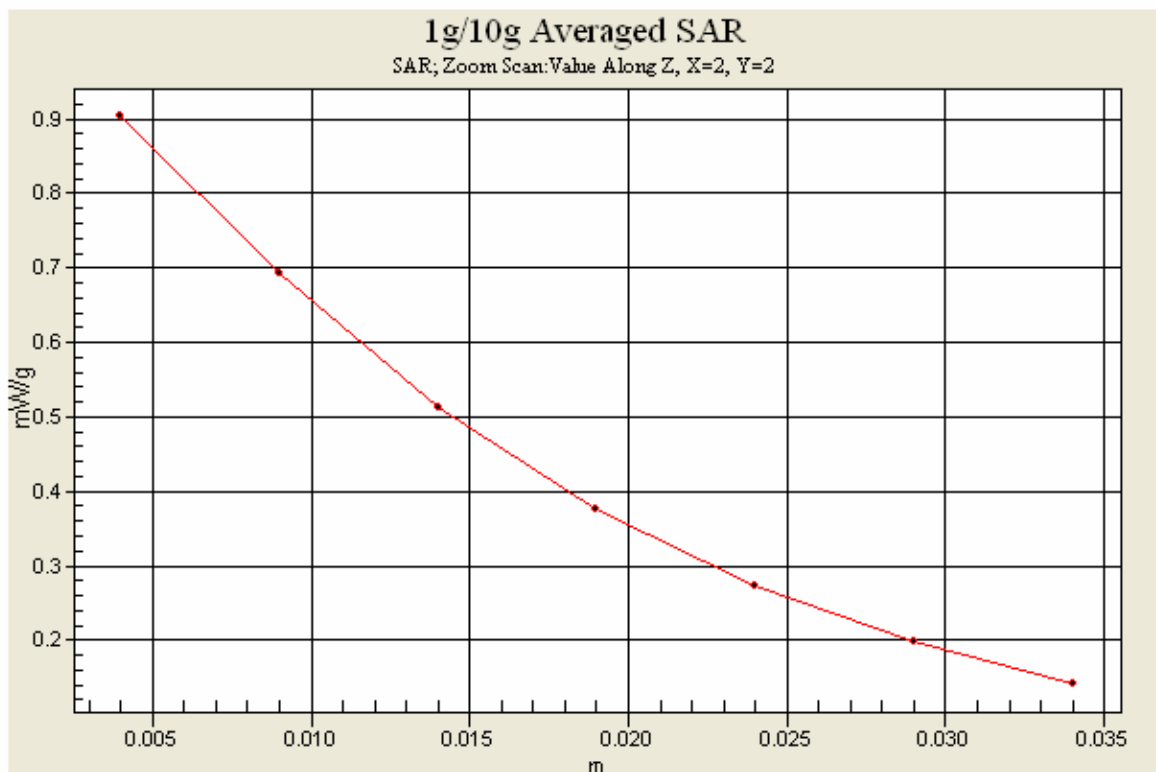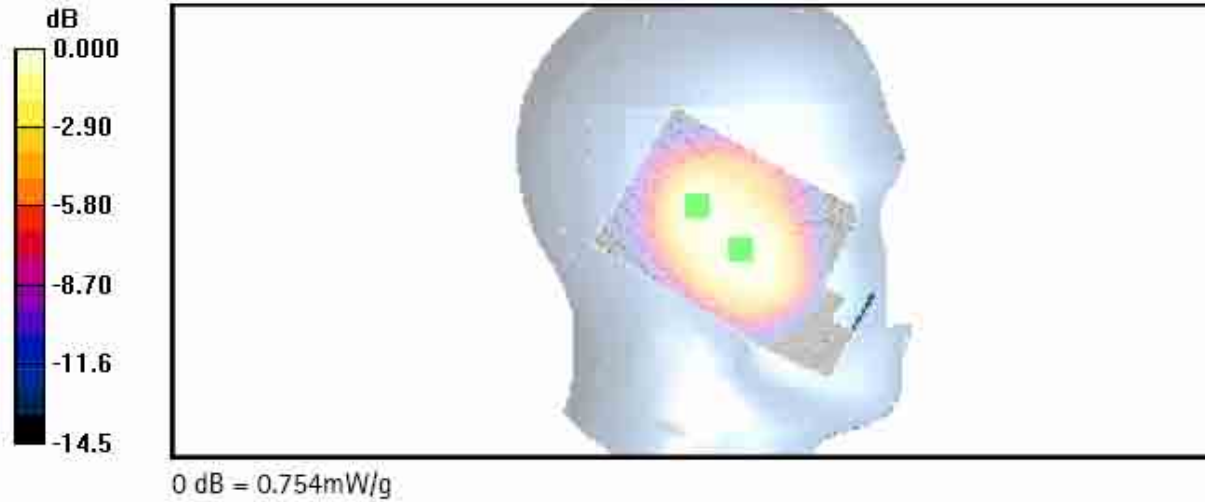

Date: 2006-05-22; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA1900; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.7 °C

Phantom section: Left Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left cheek/Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.762 mW/g


Left cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.855 mW/g

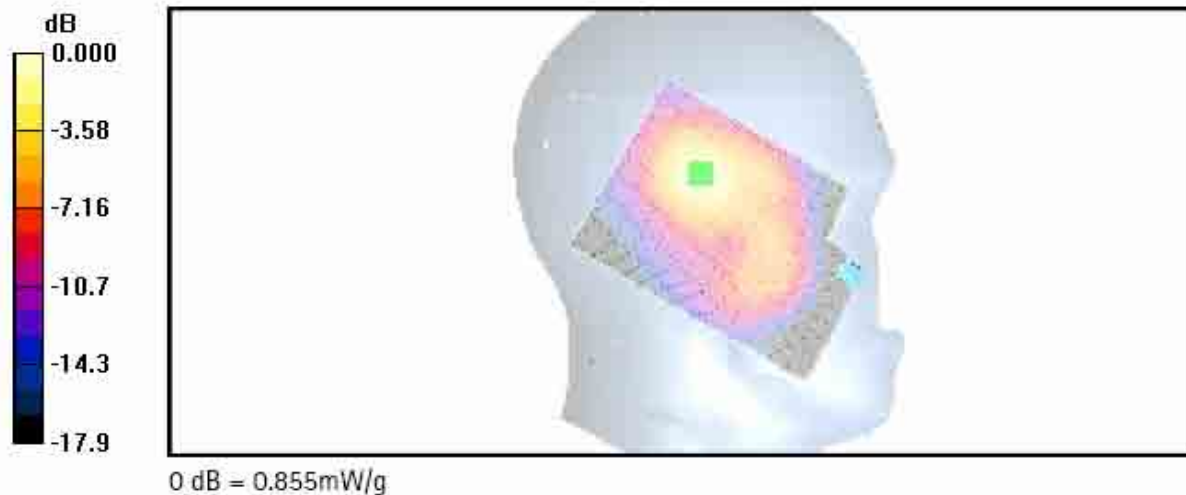

Date: 2006-05-22; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA1900; Channel: 25; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.7 °C

Phantom section: Left Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left tilt/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.01 mW/g

Left tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.6 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.467 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.06 mW/g

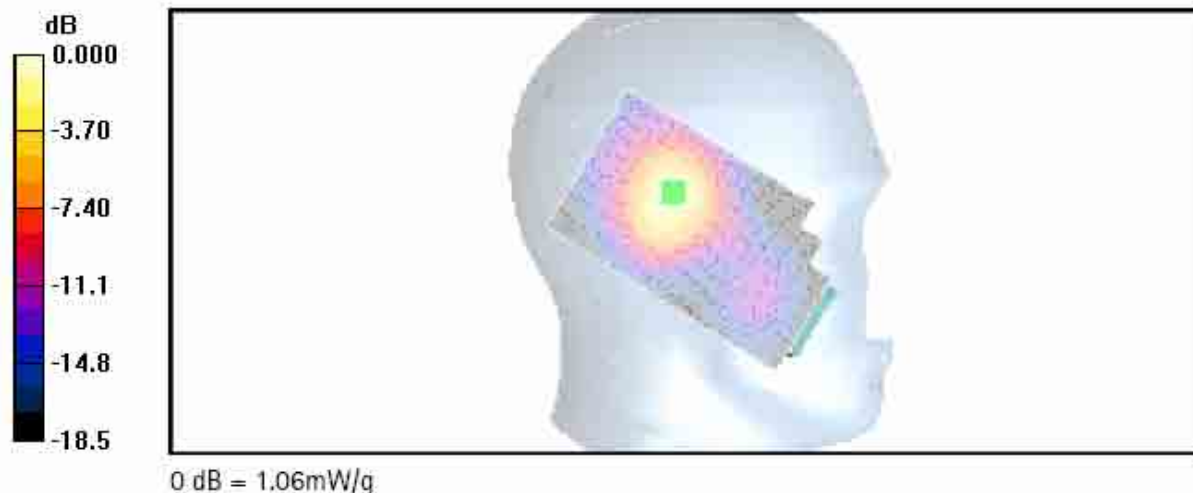

Date: 2006-05-22; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA1900; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.7 °C

Phantom section: Right Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right cheek/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.474 mW/g


Right cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.503 mW/g

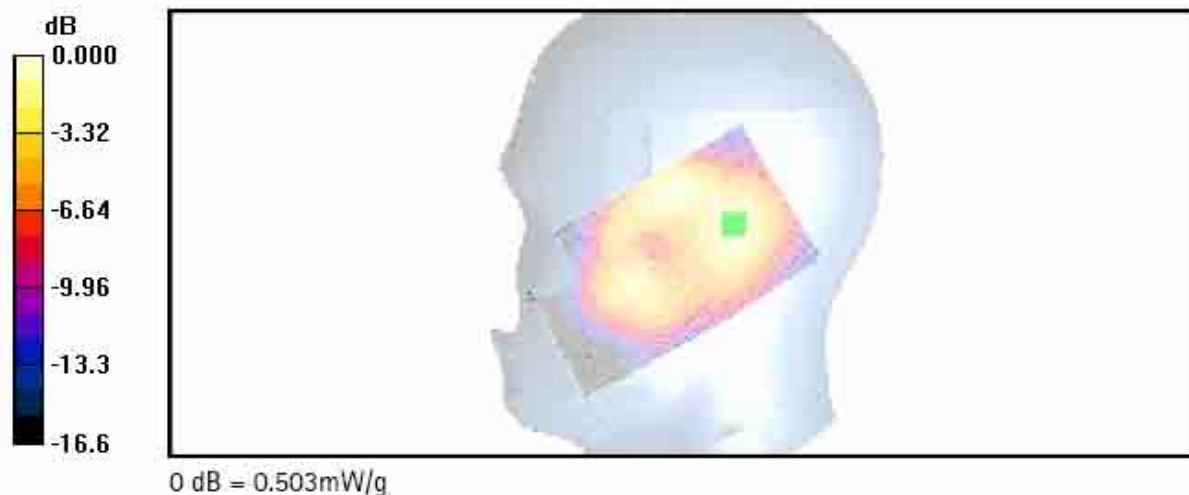

Date: 2006-05-23; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621

Communication System: CDMA1900; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.6 °C

Phantom section: Right Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right tilt/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.846 mW/g


Right tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.743 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 0.825 mW/g

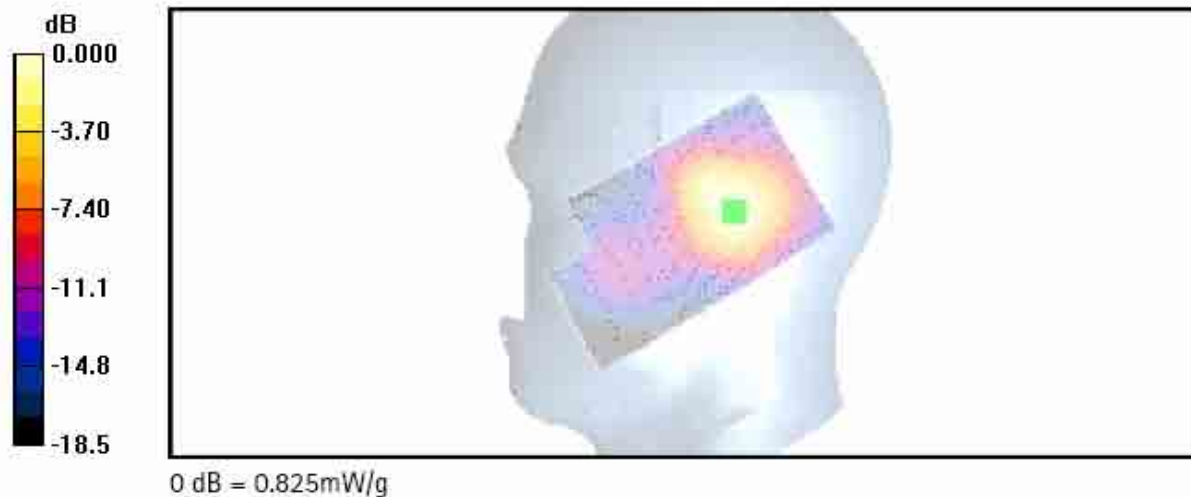

Date: 2006-05-23; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with Bluetooth active

Communication System: CDMA1900 ; Channel: 25; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 21.6 °C

Phantom section: Left Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(5.09, 5.09, 5.09); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left tilt/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

Left tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.7 V/m; Power Drift = -0.016 dB


Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.492 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 mW/g

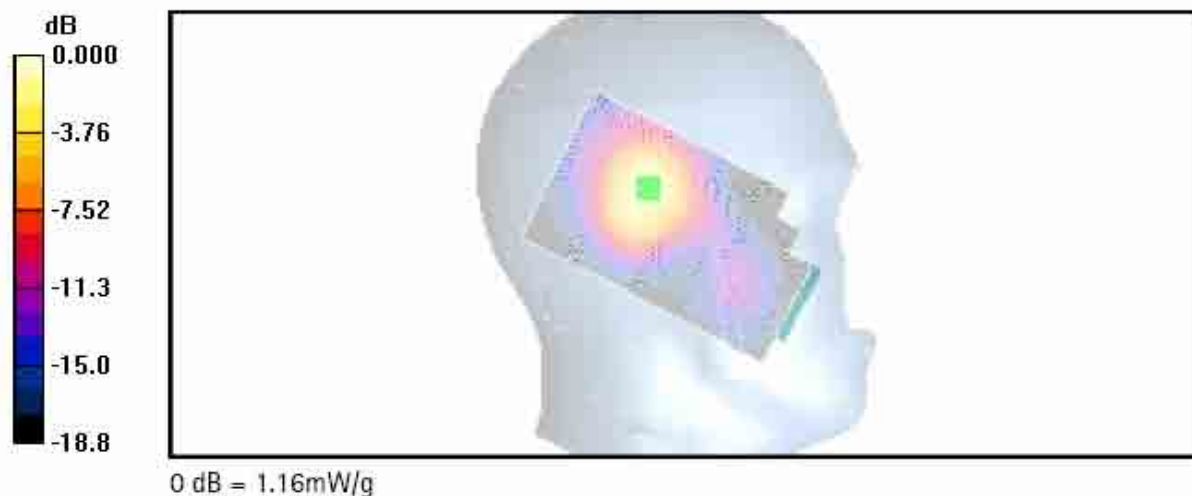

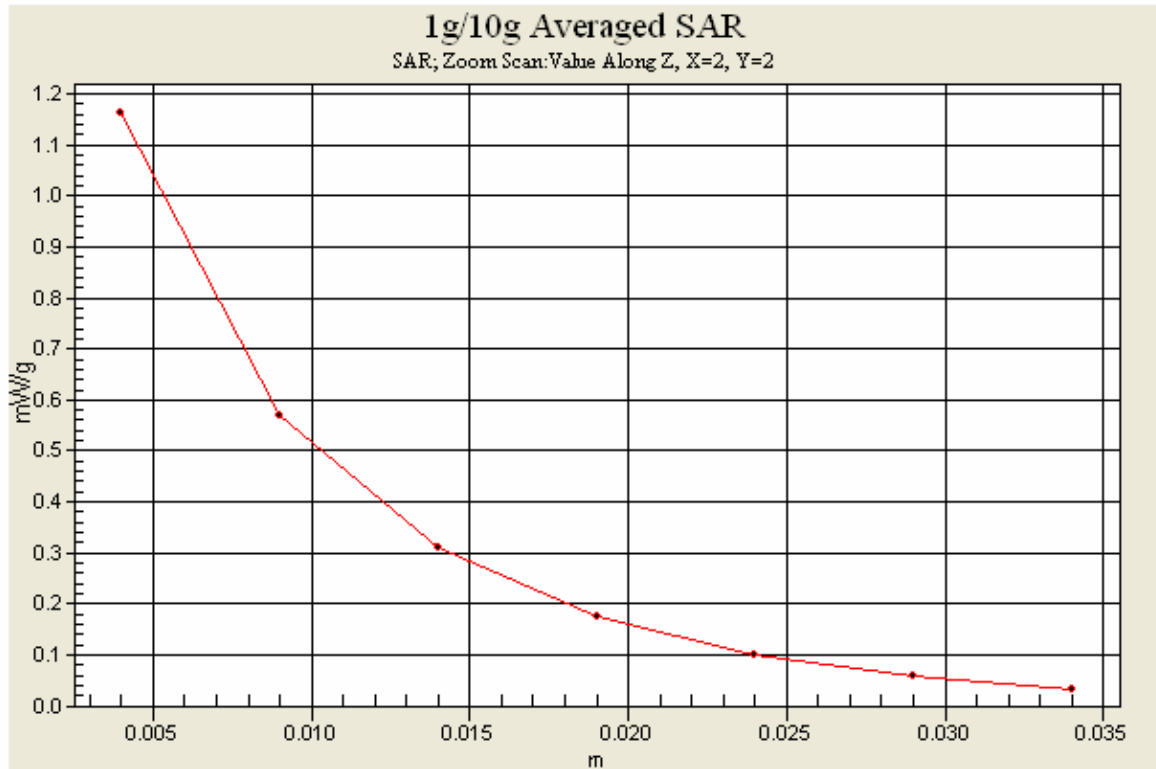

Date: 2006-05-31; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; without headset

Communication System: AMPS800; Channel: 991; Frequency: 824.04 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.04$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.6 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.687 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.0 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.472 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.677 mW/g

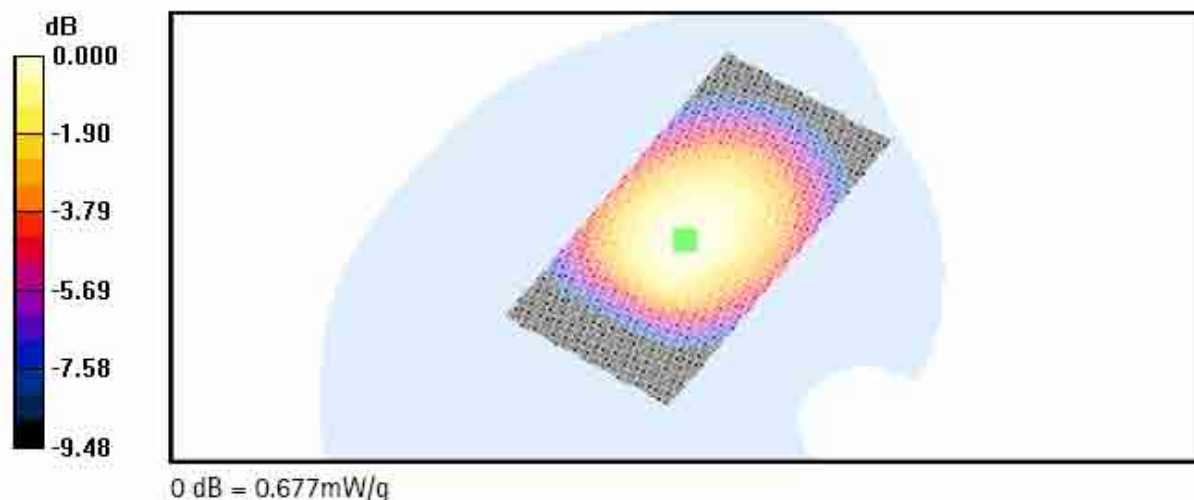

Date: 2006-05-31; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with headset HS-9

Communication System: AMPS800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.6 °C

Phantom section: Flat Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.530 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.3 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.366 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.528 mW/g

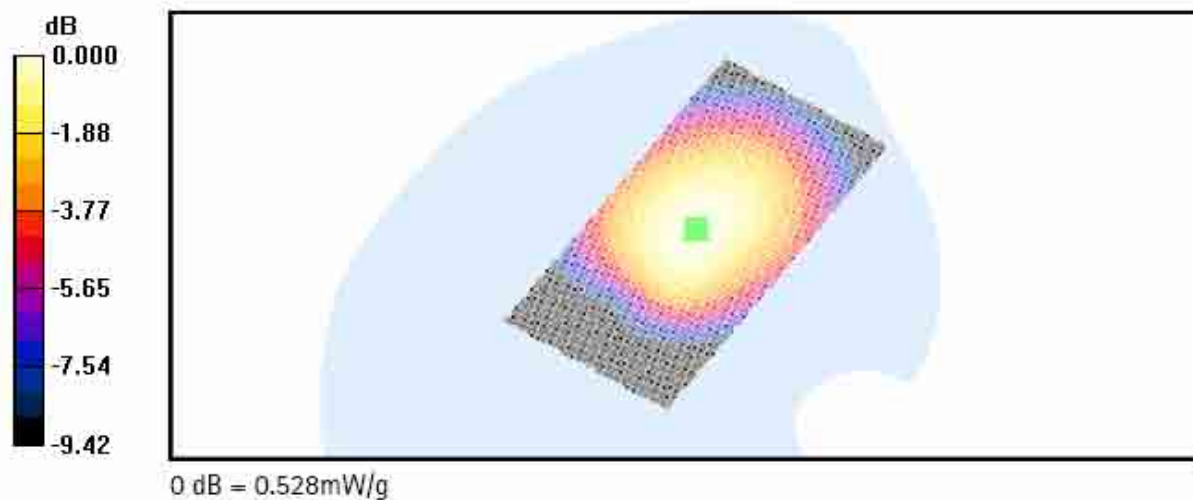

Date: 2006-05-31; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with headset HS-6

Communication System: AMPS800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.6 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.492 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.0 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.332 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.479 mW/g

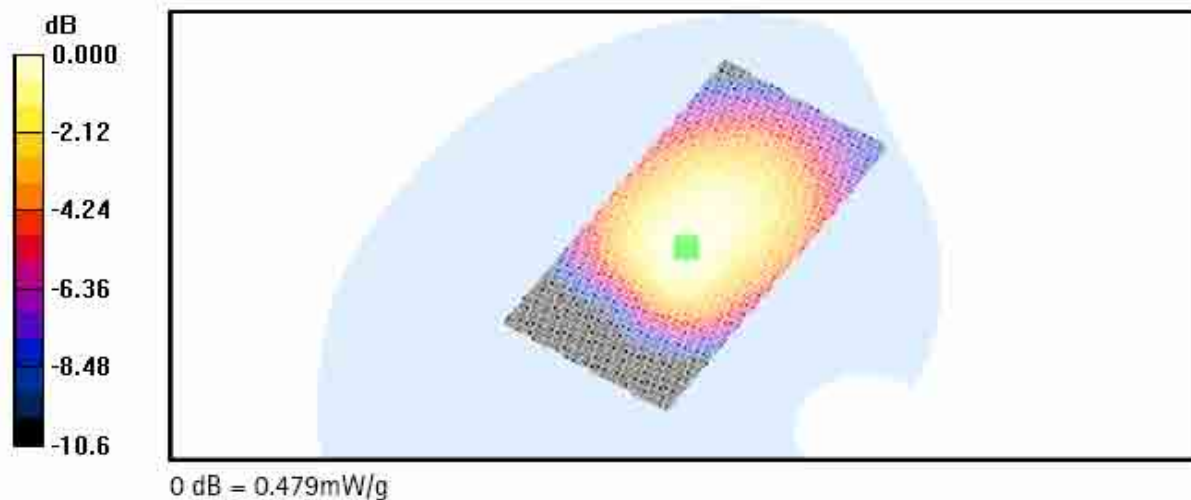

Date: 2006-05-31; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; without headset; Bluetooth active

Communication System: AMPS800; Channel: 991; Frequency: 824.04 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.04$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.6 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.695 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.9 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.650 mW/g; SAR(10 g) = 0.481 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.682 mW/g

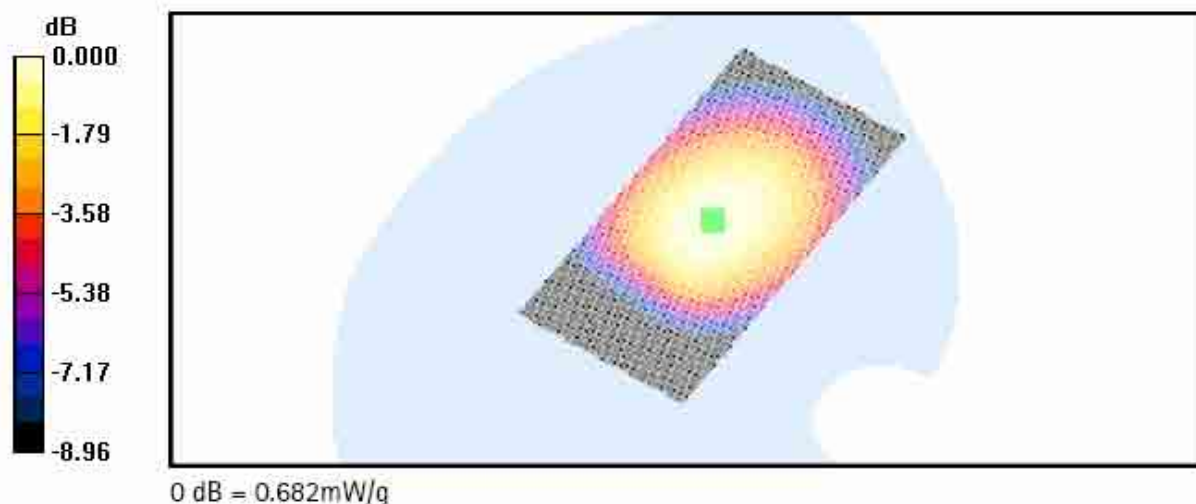

Date: 2006-05-31; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01194102; without headset; Bluetooth active

Communication System: AMPS800; Channel: 991; Frequency: 824.04 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.04$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.6 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.683 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.8 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.640 mW/g; SAR(10 g) = 0.472 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.673 mW/g

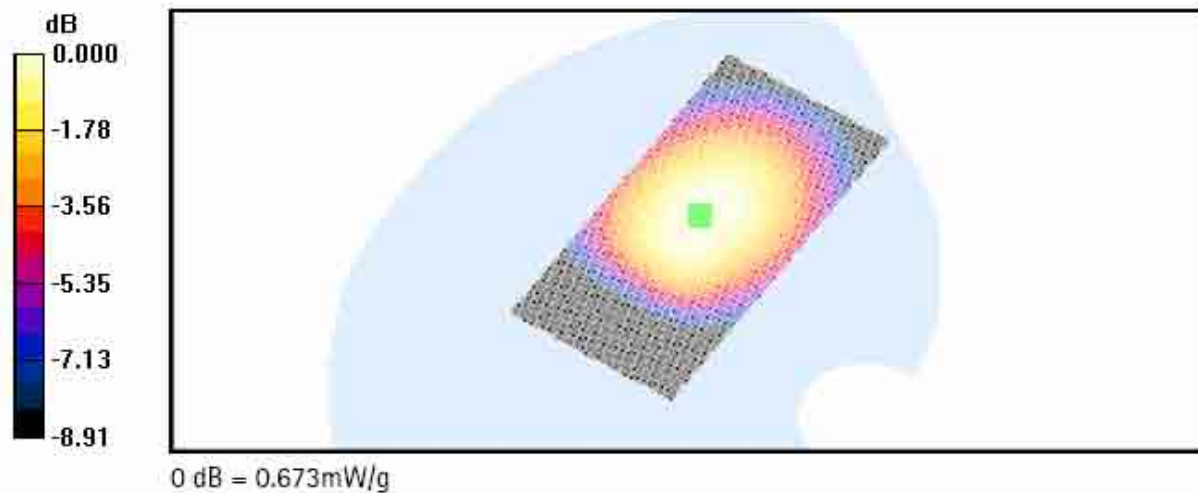

Date: 2006-06-01; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; without headset

Communication System: CDMA800; Channel: 1013; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.7 °C

Phantom section: Flat Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.750 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.9 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.698 mW/g; SAR(10 g) = 0.514 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.740 mW/g

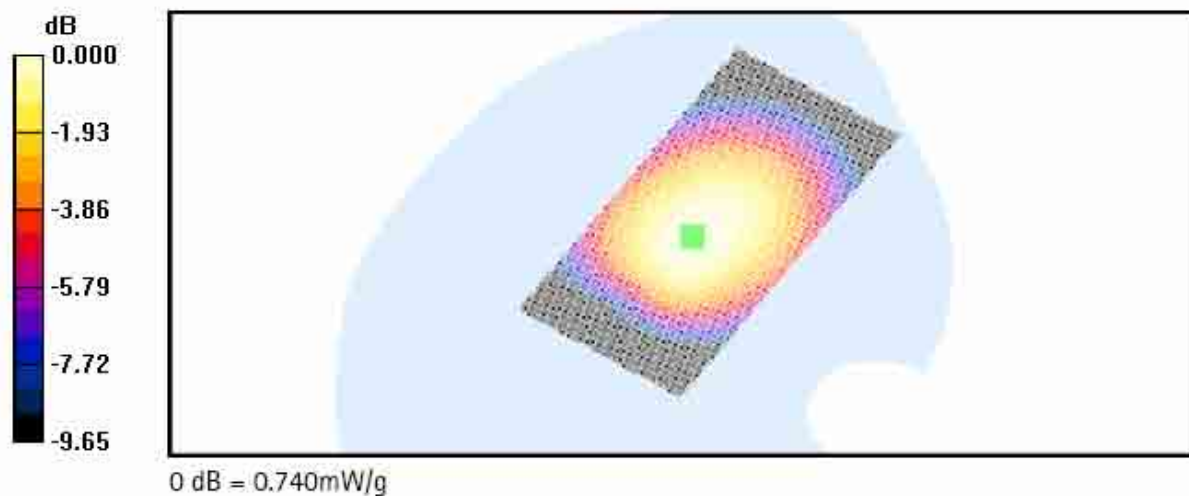

Date: 2006-06-01; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with headset HS-9

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.7 °C

Phantom section: Flat Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.559 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.7 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.679 W/kg

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.386 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.560 mW/g

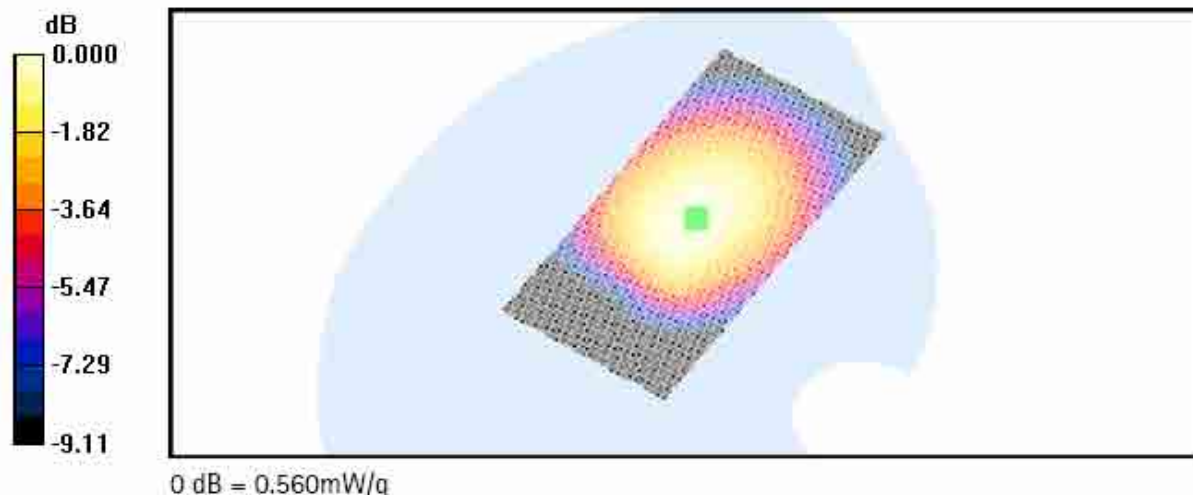

Date: 2006-06-01; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with headset HS-6

Communication System: CDMA800; Channel: 384; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.7 °C

Phantom section: Flat Section; Advanced Extrapolation

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.494 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.2 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.457 mW/g; SAR(10 g) = 0.332 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.484 mW/g

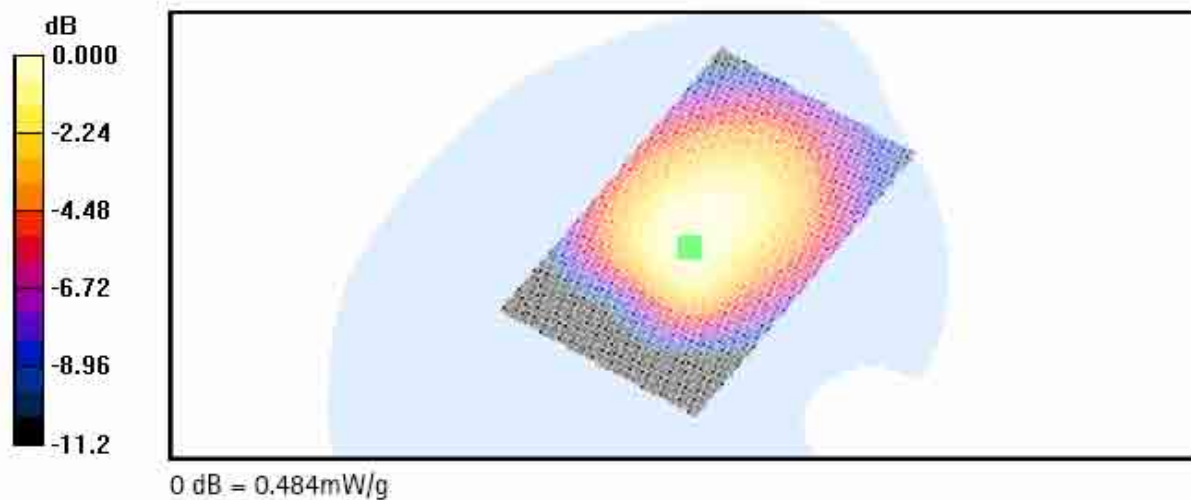

Date: 2006-06-01; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; without headset; Bluetooth active

Communication System: CDMA800; Channel: 1013; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.7 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.747 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.5 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.701 mW/g; SAR(10 g) = 0.516 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.741 mW/g

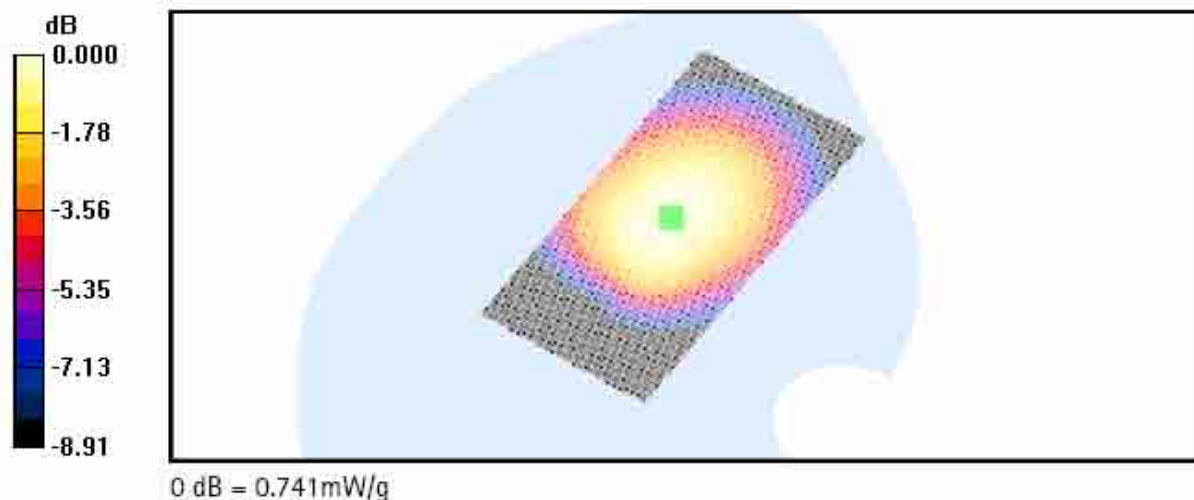

Date: 2006-06-01; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01194102; without headset; Bluetooth active

Communication System: CDMA800; Channel: 1013; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.7$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³;

Temperature (liq.) = 20.7 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(6.4, 6.4, 6.4); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM1; Type: SAM; Serial: TP-1035
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.763 mW/g

Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.3 V/m; Power Drift = -0.100 dB


Peak SAR (extrapolated) = 0.909 W/kg

SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.519 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.746 mW/g

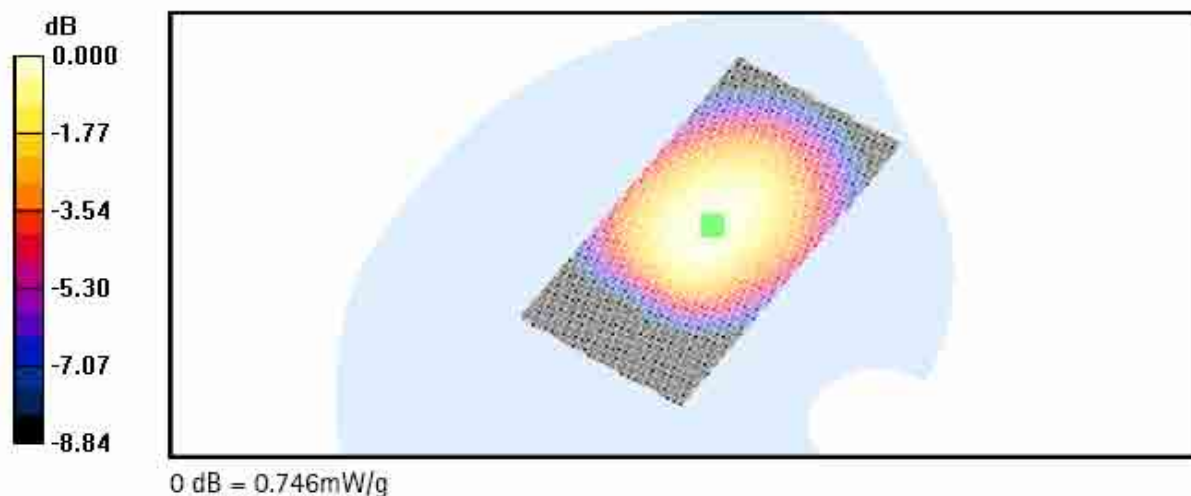

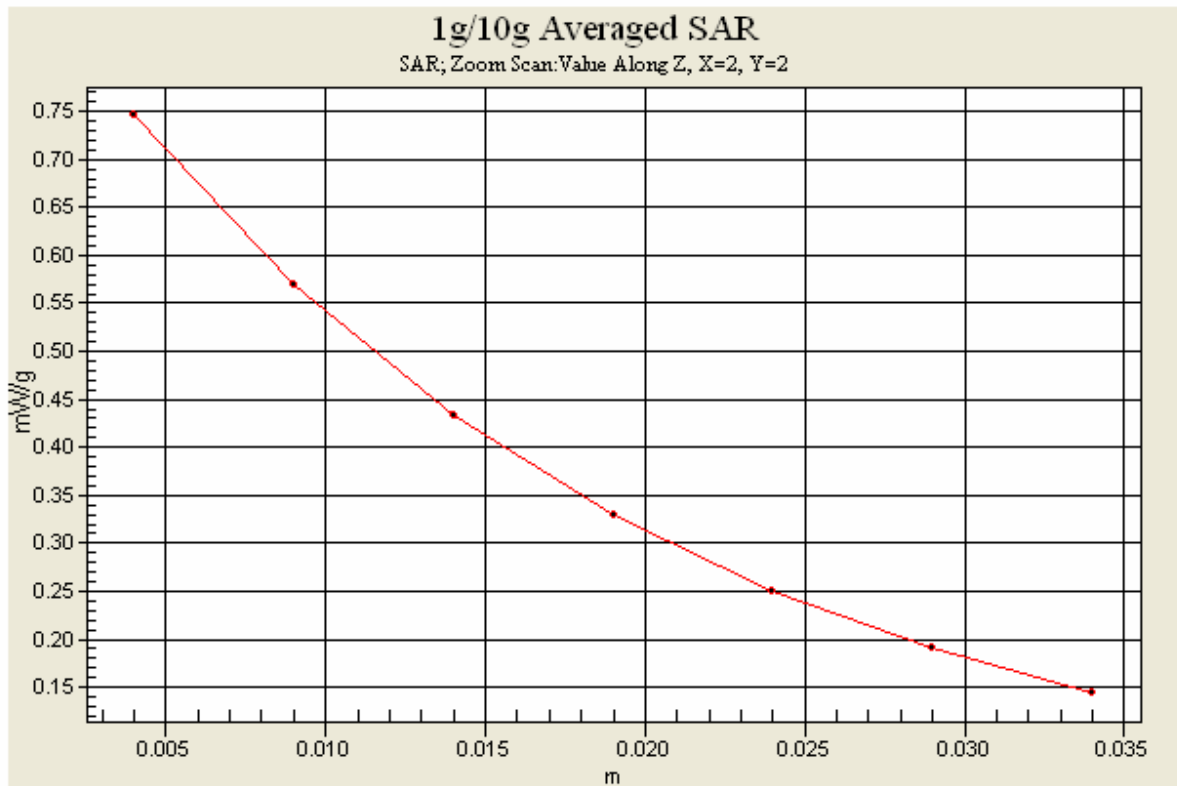

Date: 2006-05-30; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; without headset

Communication System: CDMA1900; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.8 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(4.56, 4.56, 4.56); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.510 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.823 W/kg

SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

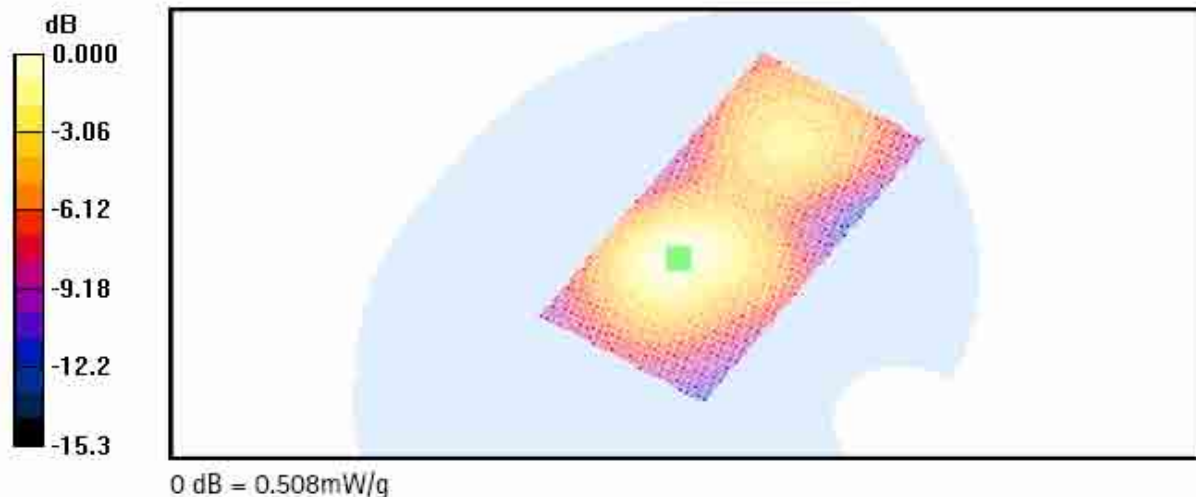

Date: 2006-05-30; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with headset HS-9

Communication System: CDMA1900; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.8 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(4.56, 4.56, 4.56); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.478 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.436 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.466 mW/g

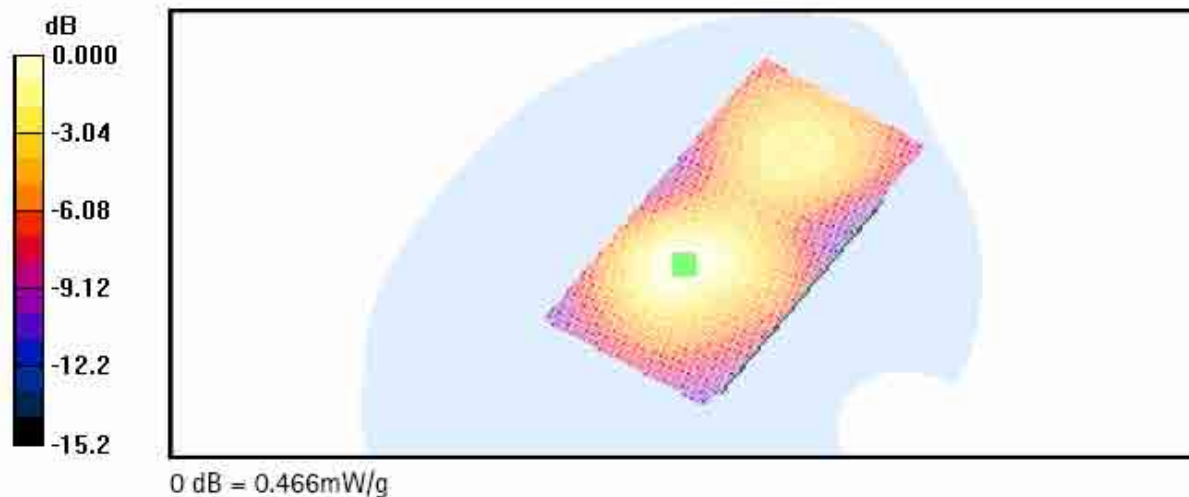

Date: 2006-05-30; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; with headset HS-6

Communication System: CDMA1900 ; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.8 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(4.56, 4.56, 4.56); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.457 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

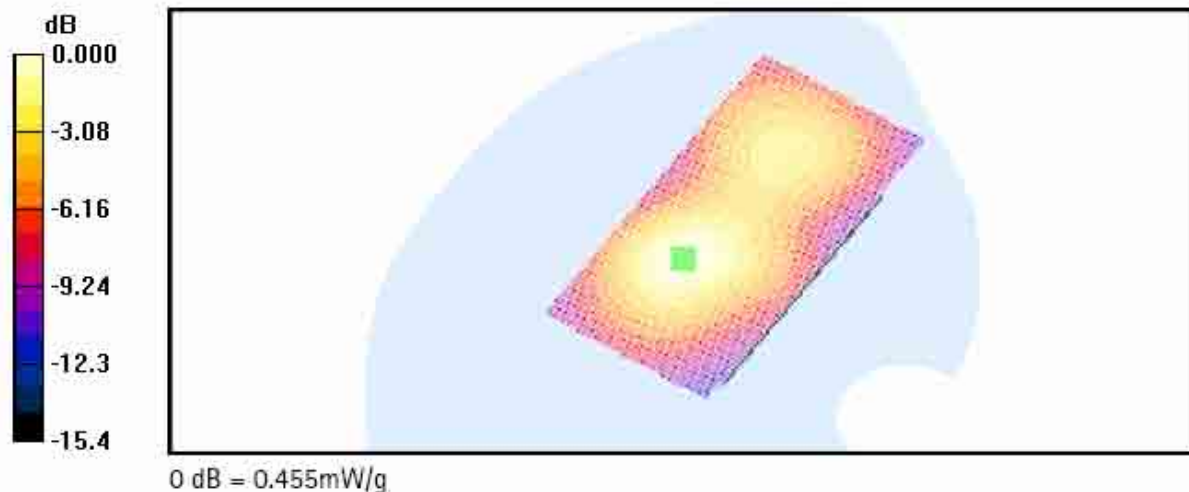

Date: 2006-05-30; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01193621; without headset; Bluetooth active

Communication System: CDMA1900; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.8 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(4.56, 4.56, 4.56); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.521 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.517 mW/g

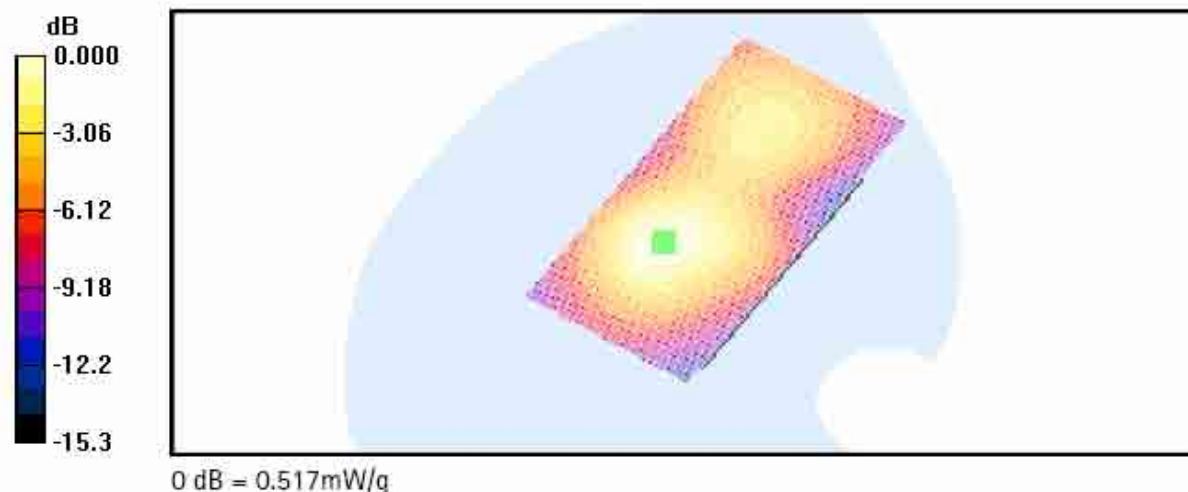

Date: 2006-05-30; Test Laboratory: TCC San Diego

Type: RM-154; HWID: 2000; Serial No: 026/01194102; without headset; Bluetooth active

Communication System: CDMA1900; Channel: 600; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³; Temperature (liq.) = 21.8 °C

Phantom section: Flat Section; **Advanced Extrapolation**

DASY4 Configuration:

- Probe: ET3DV6 - SN1792; ConvF(4.56, 4.56, 4.56); Calibrated: 2/21/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn604; Calibrated: 12/12/2005
- Phantom: SAM2; Type: SAM; Serial: TP-1279
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.6 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.855 W/kg

SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.524 mW/g

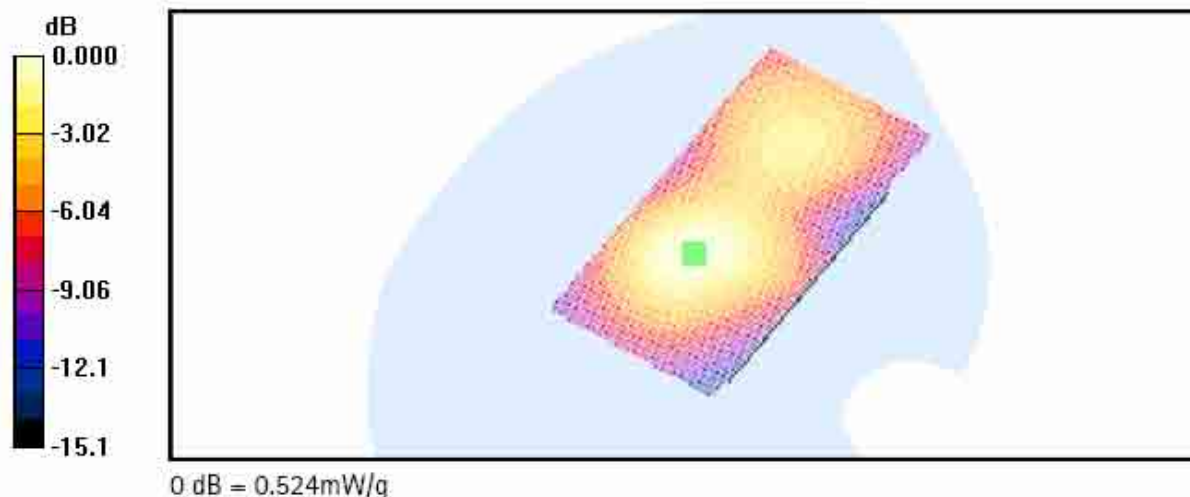

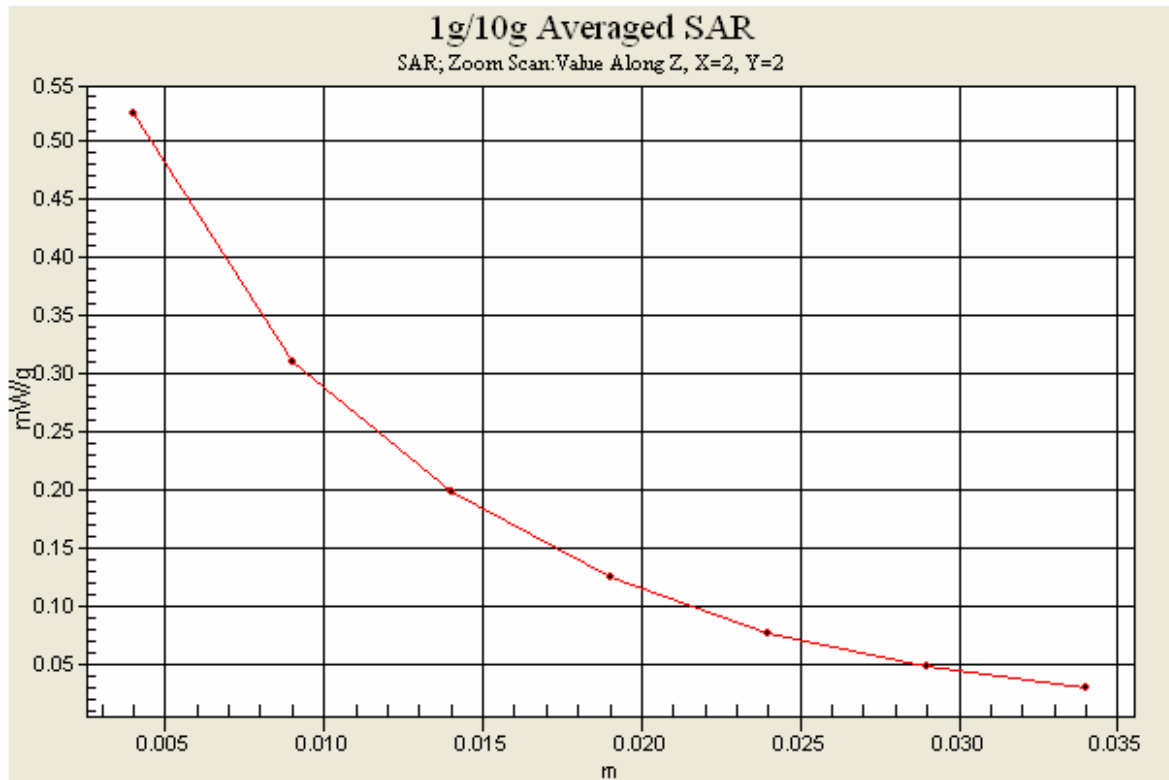



APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia SD TCC**

Certificate No: **ET3-1792_Feb06**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1792**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **February 21, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
AE4	SN: 654	2-Feb-06 (SPEAG, No. DAE4-654_Feb06)	Feb-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov-06

Calibrated by: **Katja Pokovic** Technical Manager

Approved by: **Niels Kuster** Quality Manager

Issued: February 21, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1792_Feb06

Page 1 of 9

Ce

SAR Report
WR1079.001_V1
Applicant: Nokia Corporation



Type: RM-154

Copyright © 2006 TCC San Diego

ET3DV6 SN:1792

February 21, 2006

Conversion Factor Assessment

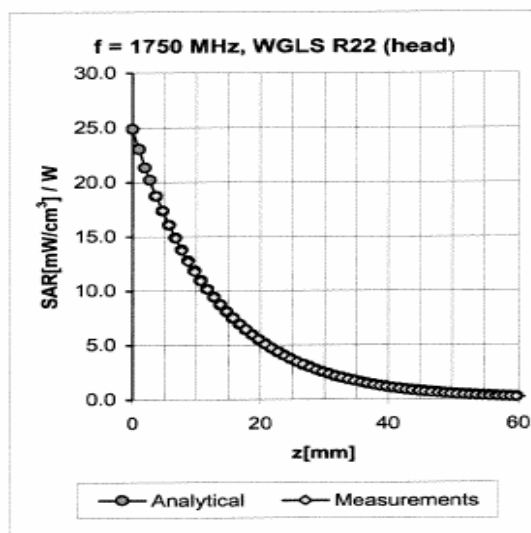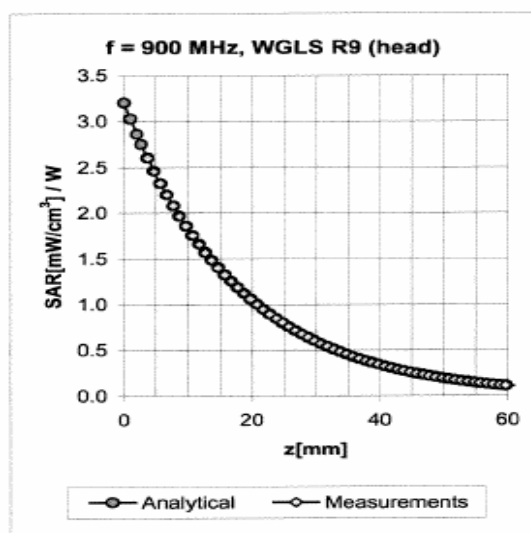

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.57	1.79	6.70 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.59	1.76	6.52 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.59	1.62	5.34 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.64	1.62	5.09 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.71	1.52	5.00 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.64	1.38	4.50 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.48	2.00	6.40 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.46	2.05	6.12 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.76	1.79	4.79 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.73	1.92	4.56 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.51	2.47	4.52 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.53	1.64	4.15 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)



Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia SD**

Certificate No: **D835V2-478_Oct04/2**

CALIBRATION CERTIFICATE (Replacement of No: D835V2-478_Oct04)

Object **D835V2 - SN: 478**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **October 22, 2004**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1680	23-Feb-04 (SPEAG, No. ET3-1680_Feb04)	Feb-05
DAE4	SN 601	22-Jul-04 (SPEAG, No. DAE4-601_Jul04)	Jul-05
Secondary Standards	ID #	Check Date (In house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov-04

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: November 15, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY4 Validation Report for Head TSL

Date/Time: 10/22/04 19:01:22

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN478

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1680; ConvF(6.4, 6.4, 6.4); Calibrated: 23.02.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: Flat Phantom half size; Type: QD000P49AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.49 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.1 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.53 mW/g

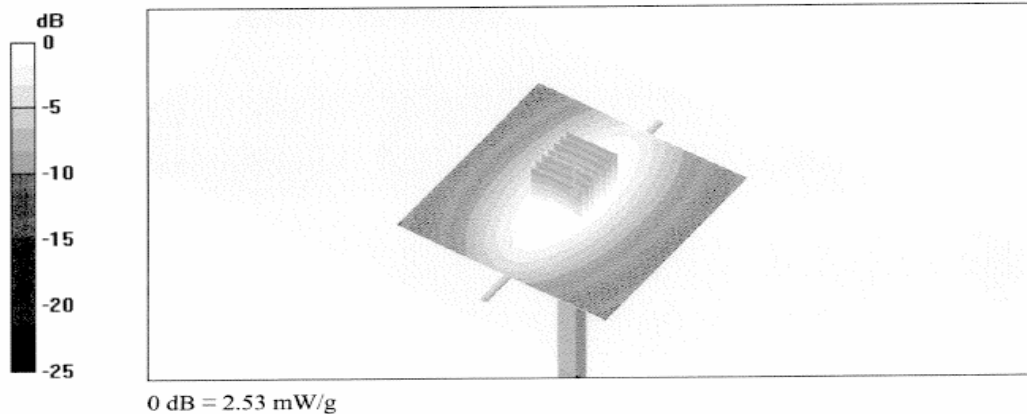

DASY4 Validation Report for Body TSL

Date/Time: 10/22/04 18:58:12

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN478

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Muscle 835 MHz;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1680; ConvF(6.31, 6.31, 6.31); Calibrated: 23.02.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: Flat Phantom half size; Type: QD000P49AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.61 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.6 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.64 mW/g

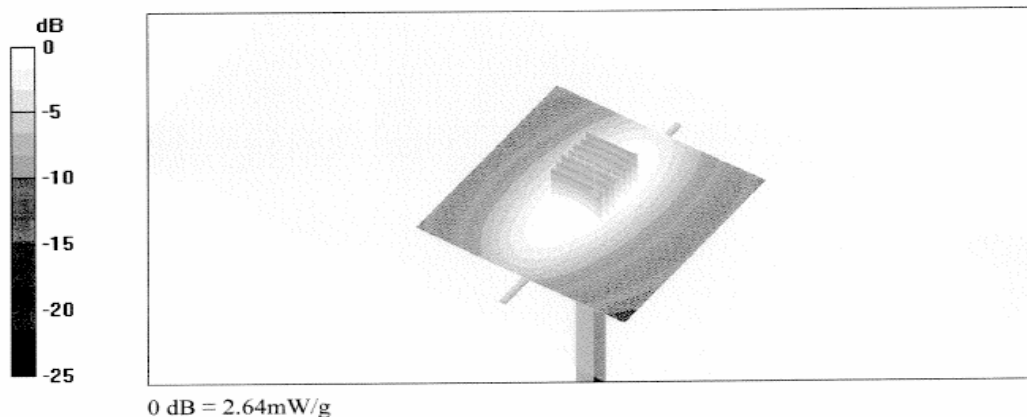



Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia SD**

Certificate No: **D1900V2-534_Oct04/2**

CALIBRATION CERTIFICATE (Replacement of No: D1900V2-534_Oct04)

Object **D1900V2 - SN: 534**

Calibration procedure(s) **QA CAL-05.v6**
Calibration procedure for dipole validation kits

Calibration date: **October 22, 2004**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ET3DV6	SN 1680	23-Feb-04 (SPEAG, No. ET3-1680_Feb04)	Feb-05
DAE4	SN 601	22-Jul-04 (SPEAG, No. DAE4-601_Jul04)	Jul-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04

	Name	Function	Signature
Calibrated by:	Mike Meili	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: November 15, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1900V2-534_Oct04/2

Page 1 of 9

DASY4 Validation Report for Head TSL

Date/Time: 11/15/04 16:09:12

Test Laboratory: SPEAG, Zürich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:534

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1800 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1680; ConvF(5.02, 5.02, 5.02); Calibrated: 23.02.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: Flat Phantom quarter size -SN:1001; Type: QD000P50AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 77.7 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.18 mW/g

Maximum value of SAR (measured) = 11.4 mW/g

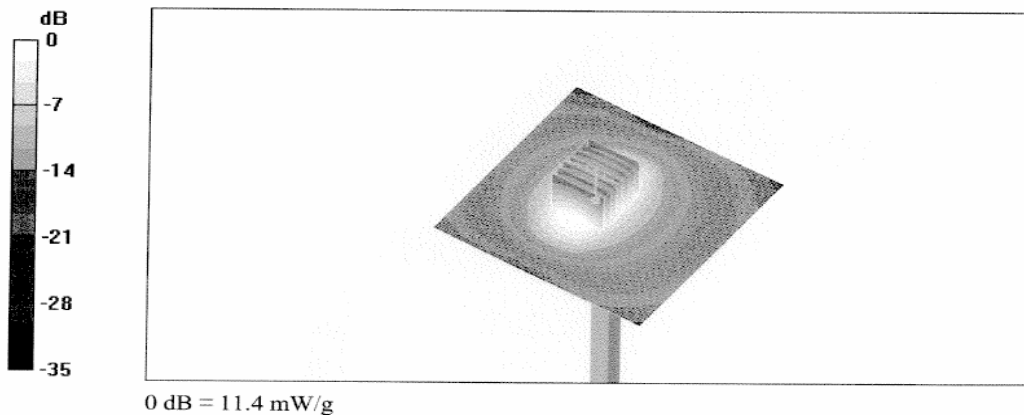

DASY4 Validation Report for Body TSL

Date/Time: 11/15/04 16:09:27

Test Laboratory: SPEAG, Z^{ür}ich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 – SN:534

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1680; ConvF(4.52, 4.52, 4.52); Calibrated: 23.02.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: Flat Phantom quarter size -SN:1001; Type: QD000P50AA; Serial: SN:1001;
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.8 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 74.3 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.85 mW/g; SAR(10 g) = 5.28 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

