

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-845_03	Date of Report:	13-Aug-2012
Number of pages:	43	Customer's Contact person:	Victoria Abadilla
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia, Inc. 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 385 1598
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-845 / Battery BP-4W / Headset WH-902 / AC-Charger AC-50U		
FCC ID:	QMNRM-845	IC:	661X-RM845
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, Engineer, EMC&SAR

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	30-Jul-2012
Testing completed	06-Aug-2012
The customer's contact person	Victoria Abadilla
Test Plan referred to	T:\Projects\RM-845\TestPlan\RS_testplan_RM-845.xlsm
Notes	-
Document name	T:\Projects\RM-845\EMC\FCC15CBT_RM-845_03.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/CDMA/WCDMA/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-845	352875050016426	0209	-	1525.0003.8422.9710.12271	16546
Battery	BP-4W	393213215514010106700670671	-	-	-	16547
Headset	WH-902	209E2R	-	-	-	16564
AC-Charger	AC-50U	409049215427050146700675620	-	-	-	16558
Phone	RM-845	352875050016830	0209	-	1525.000308422.9710.12271	16606
Battery	BP-4W	3932132274140100464;0670672	-	-	-	16607
AC-Charger	AC-50U	409049215427050146000675620	-	-	-	16555

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	PASSED
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))	5
2.1. Test Setup.....	5
2.2. Test method and limit.....	5
2.3. Bluetooth Test results	6
3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	9
3.1. Test Setup.....	9
3.2. Test method and limit.....	9
3.3. Bluetooth Test results	10
4. 20 dB bandwidth 15.247(a)(1), A8.1 (a).....	13
4.1. Test Setup.....	13
4.2. Test method and limit.....	13
4.3. Bluetooth Test results	14
5. AC powerline conducted emissions FCC §15.207, RSS-GEN 7.2.2	17
5.1. Test Setup.....	17
5.2. Test method and limit.....	17
5.3. Test results	18
6. Carrier frequency separation 15.247(a)(1), A8.1 (b)	19
6.1. Test Setup.....	19
6.2. Test method and limit.....	19
6.3. Bluetooth Test results	20
7. Number of hopping frequencies 15.247(a)(1)(iii), A8.1 (d)	22
7.1. Test Setup.....	22
7.2. Test method and limit.....	22
7.3. Bluetooth Test results	23
8. Time of occupancy 15.247(a)(1)(iii), A8.1 (d)	25
8.1. Test Setup.....	25

8.2.	Test method and limit.....	25
8.3.	Bluetooth Test results	26
9.	Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5).....	30
9.2.	Test method and limit.....	30
9.3.	Bluetooth test results.....	31
10.	Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	37
10.2.	Test method and limit.....	37
10.3.	Bluetooth test results.....	39
11.	Test Equipment	42
11.1.	Conducted measurements	42
11.2.	Radiated measurements	42

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-845, DUT 16546
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	24-Jul-2012
Measured by	Sami Lehtonen

2.1. Test Setup

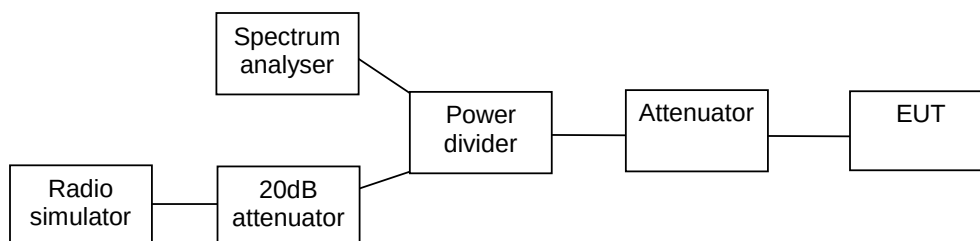

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	<= 1	<= 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	7.99	6.295	PASSED
40 / 2442	6.72	4.699	PASSED
78 / 2480	7.76	5.97	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

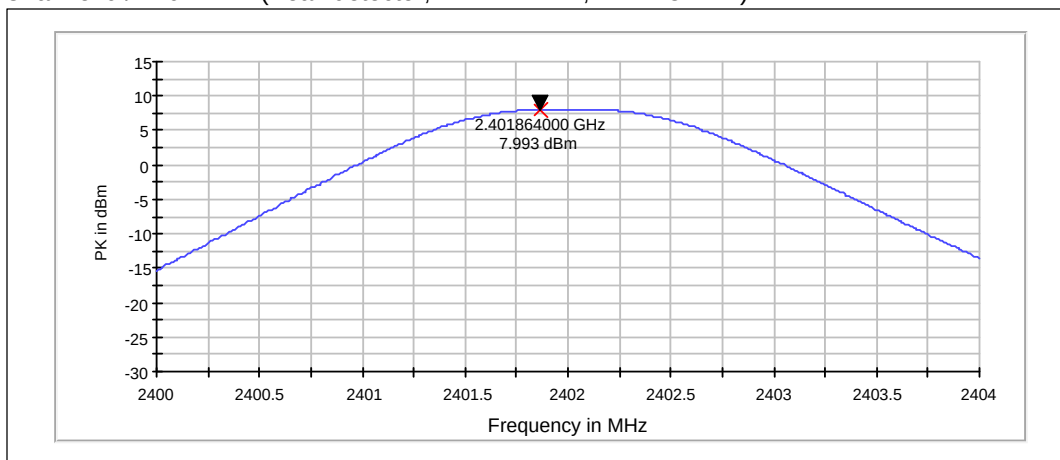

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

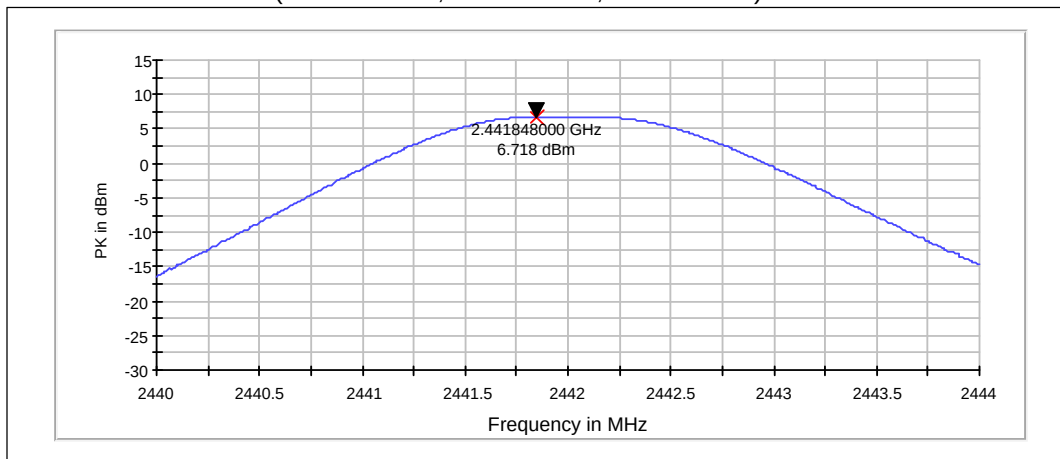


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

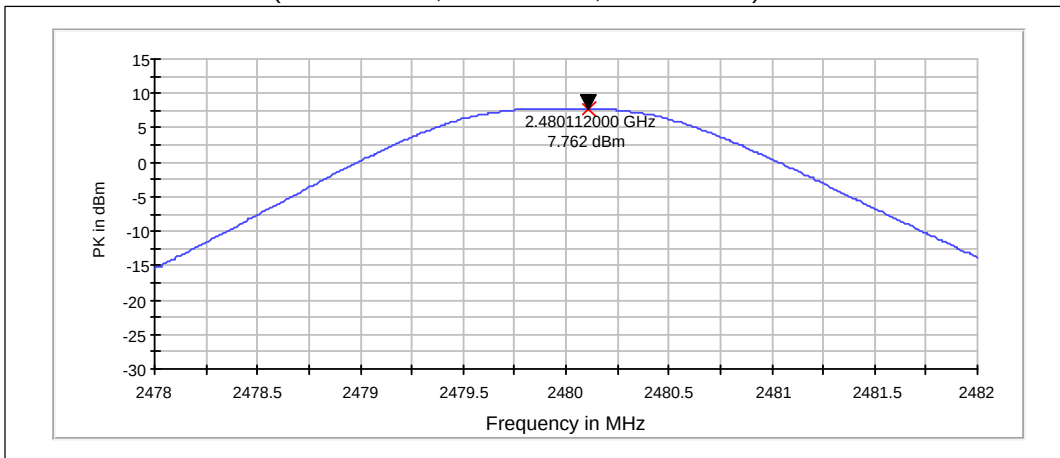


2.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	8.63	7.295	PASSED
40 / 2442	7.29	5.358	PASSED
78 / 2480	8.42	6.95	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

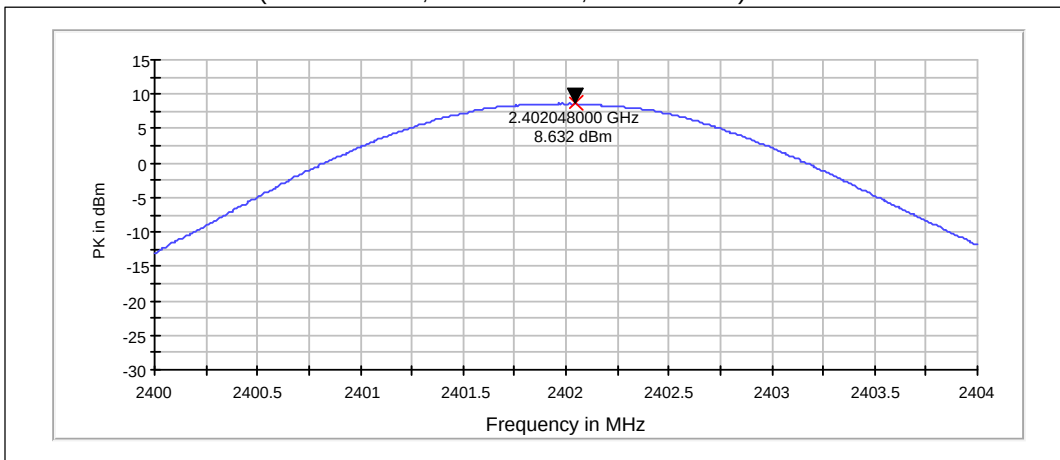

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

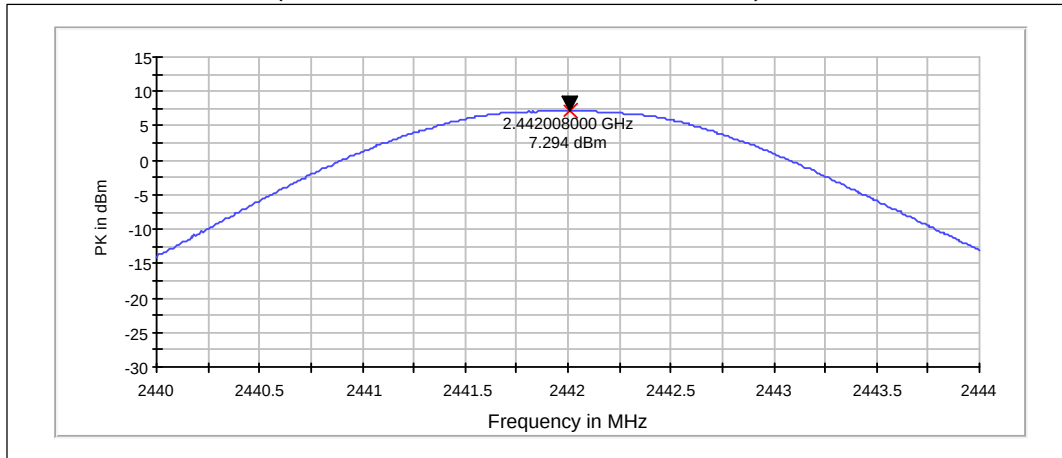


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

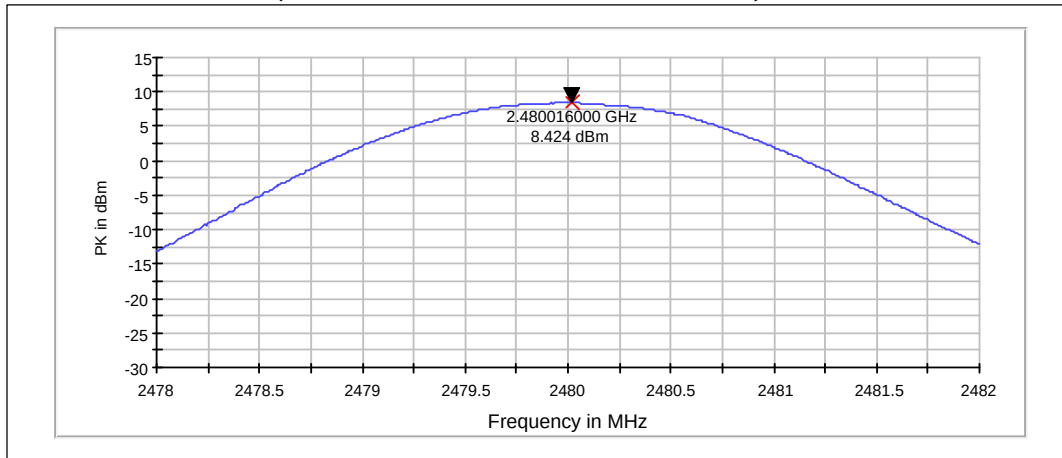

3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-845, DUT 16546
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	24-Jul-2012
Measured by	Sami Lehtonen

3.1. Test Setup

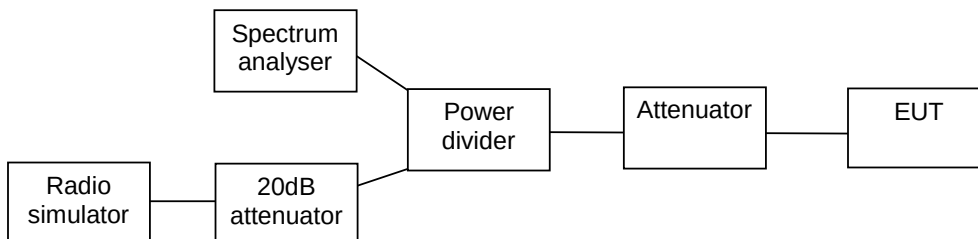

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

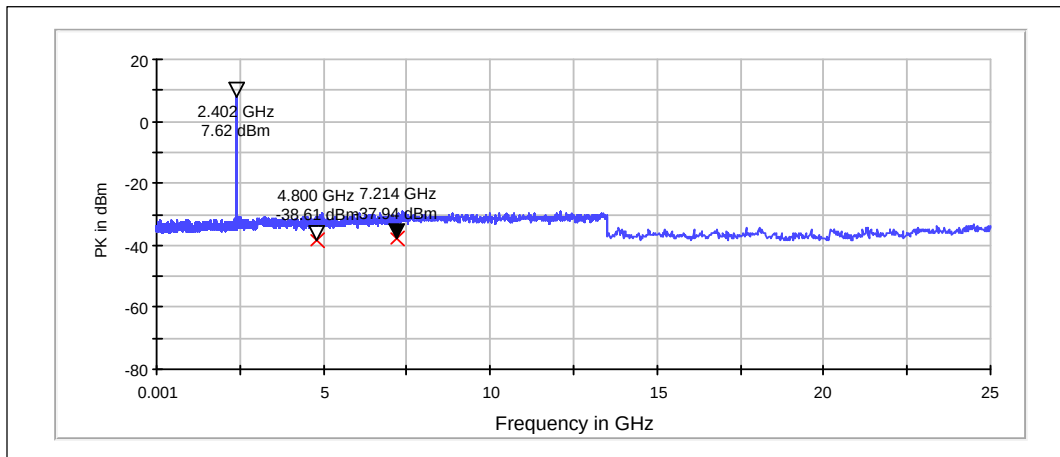

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4800	-38.61	PASSED
7213.8	-37.94	PASSED


Channel 40 / 2442 MHz

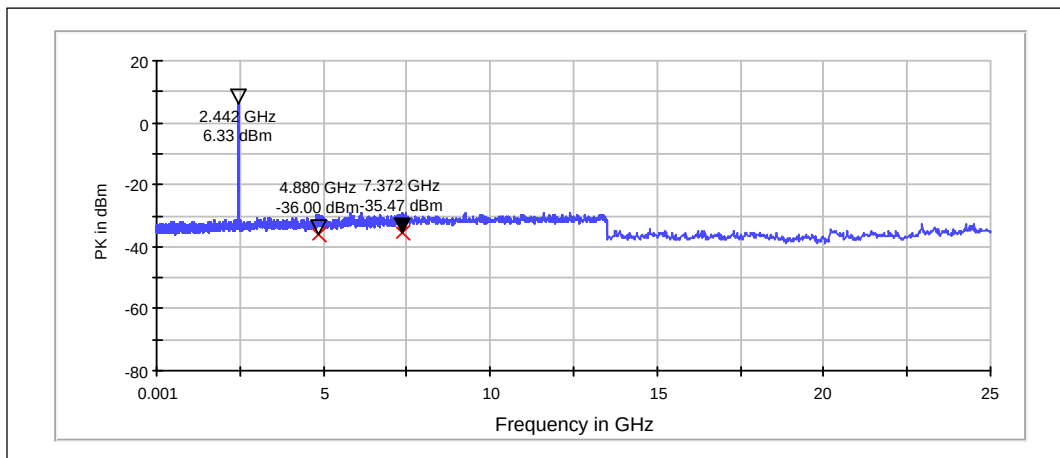

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4880	-36	PASSED
7372.2	-35.47	PASSED

Channel 78 / 2480 MHz

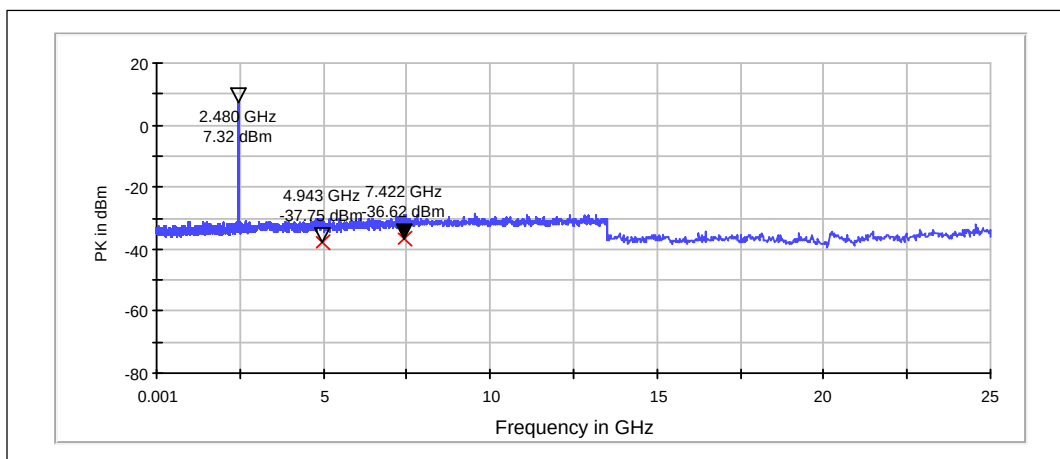


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4942.8	-37.75	PASSED
7422	-36.62	PASSED

3.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

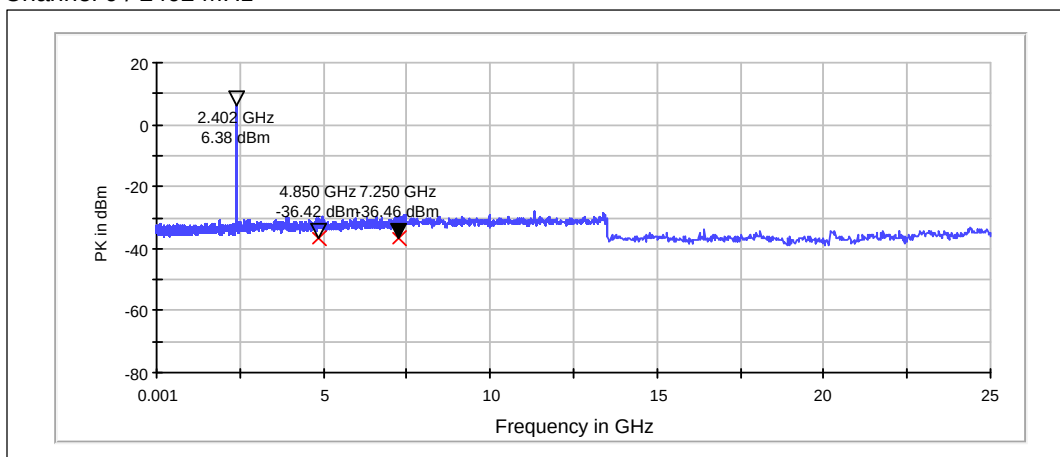

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4850.4	-36.42	PASSED
7250.4	-36.46	PASSED


Channel 40 / 2442 MHz

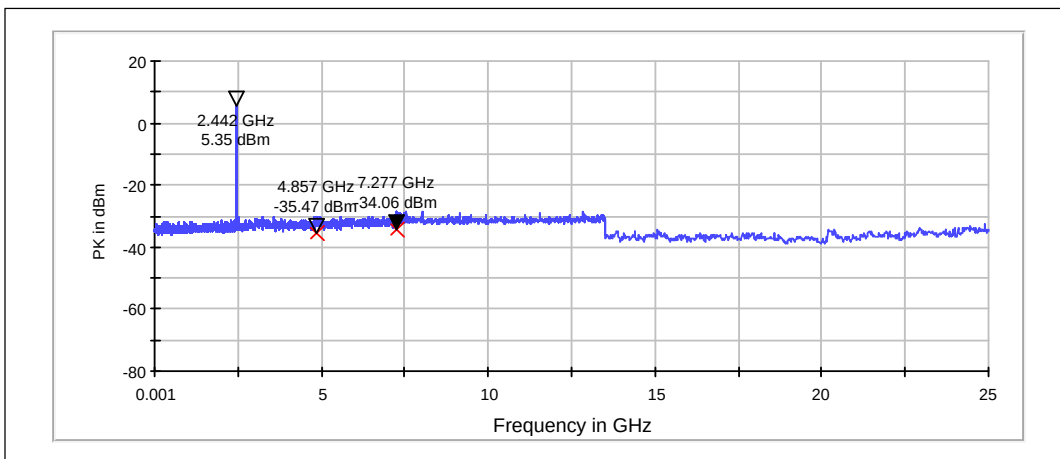

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4857.2	-35.47	PASSED
7277.4	-34.06	PASSED

Channel 78 / 2480 MHz

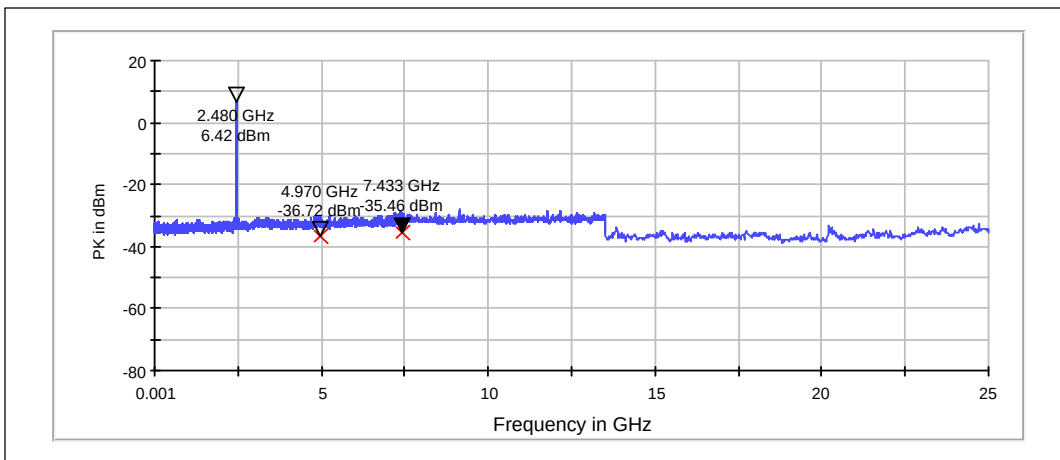


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4969.6	-36.72	PASSED
7433.4	-35.46	PASSED

4. 20 dB bandwidth 15.247(a)(1), A8.1 (a)

EUT with DUT number	RM-845, DUT 16546
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	24-Jul-2012
Measured by	Sami Lehtonen

4.1. Test Setup

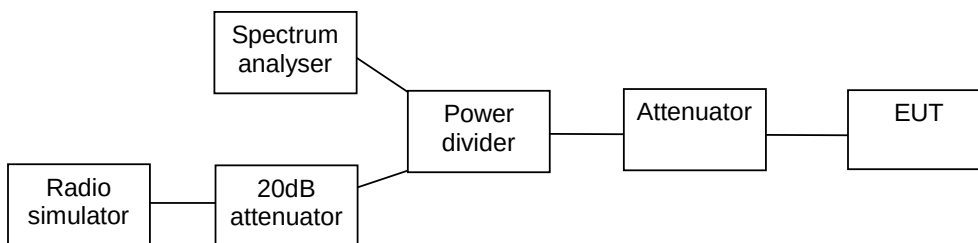

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

4.3. Bluetooth Test results


4.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	844
40 / 2442	844
78 / 2480	844


Channel 0 / 2402 MHz

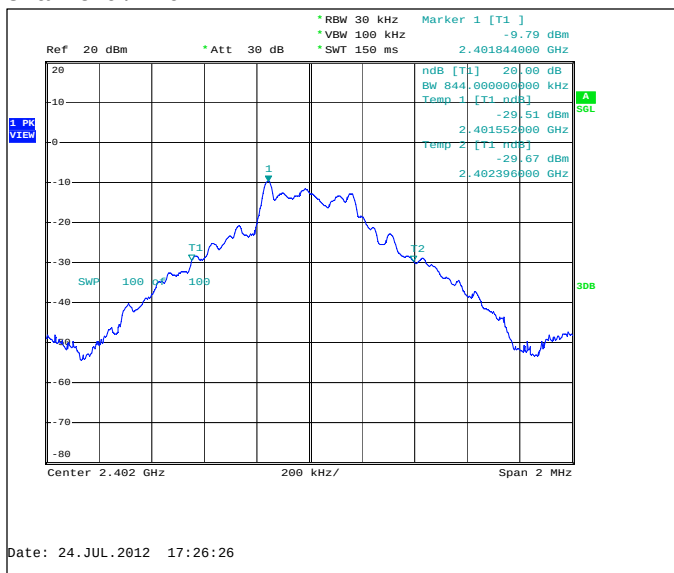

Channel 40 / 2442 MHz

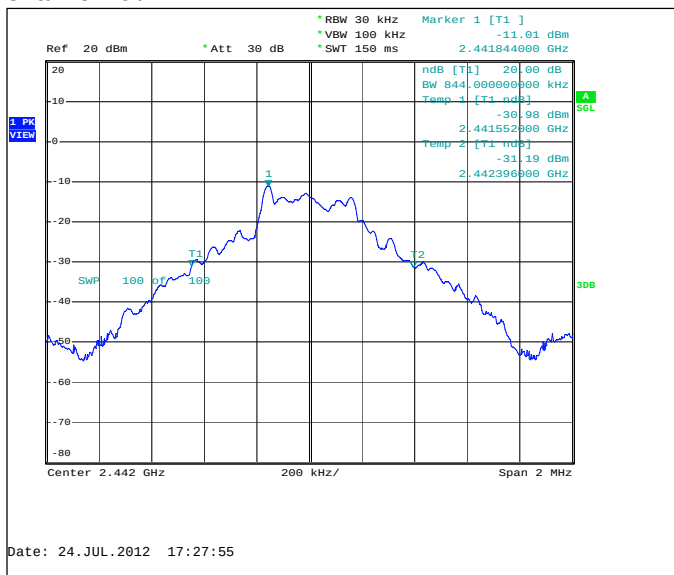


Channel 78 / 2480 MHz

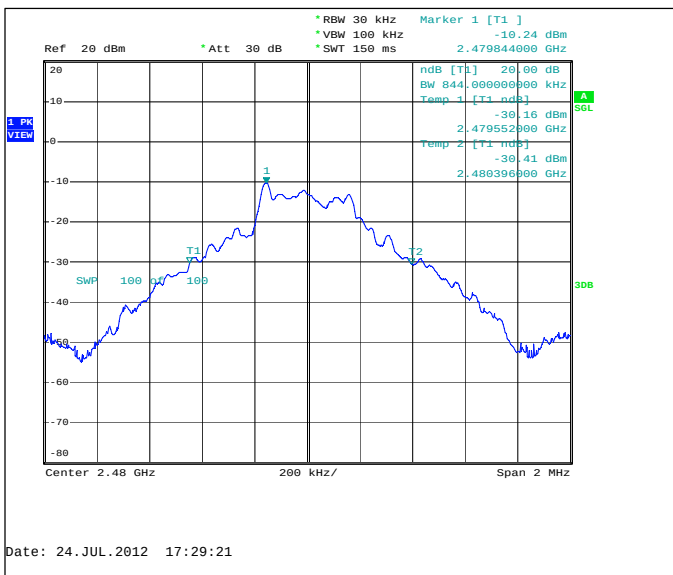


4.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	1304
40 / 2442	1304
78 / 2480	1304


Channel 0 / 2402 MHz

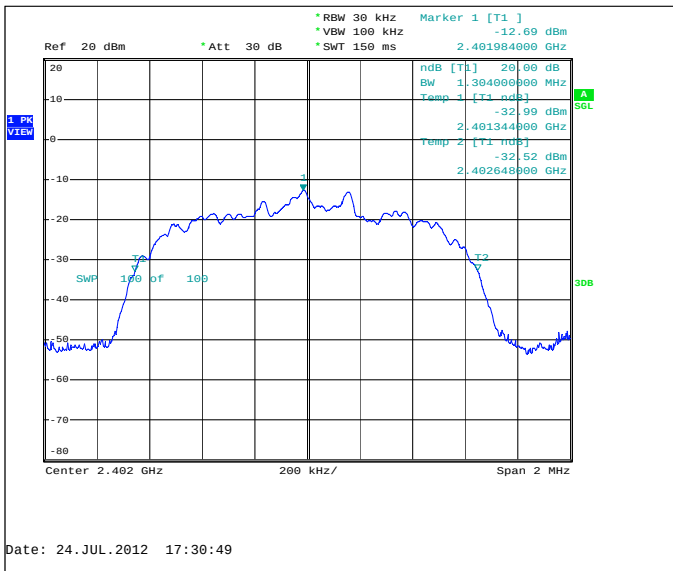

Channel 40 / 2442 MHz

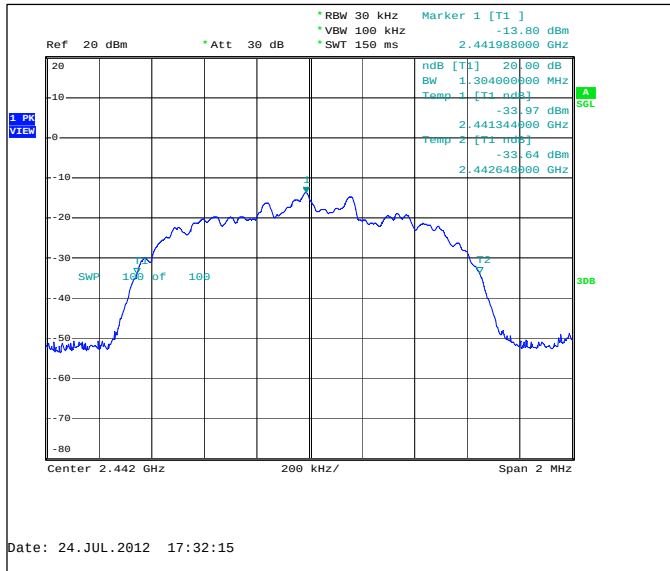

Channel 78 / 2480 MHz

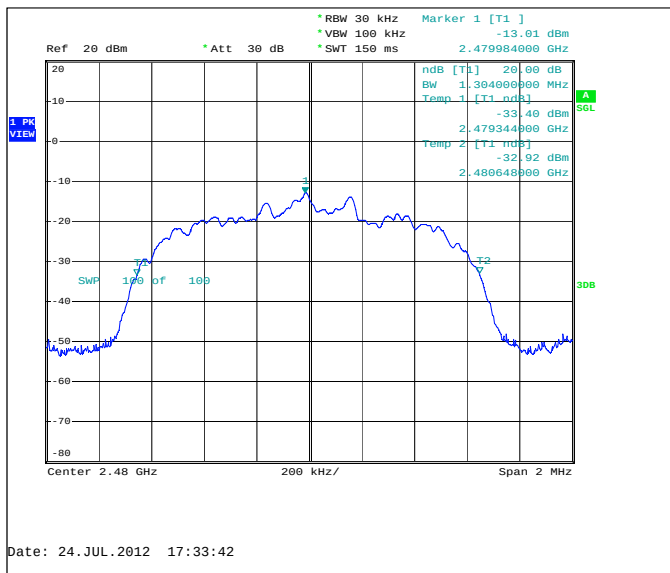


5. AC powerline conducted emissions

FCC §15.207, RSS-GEN 7.2.2

EUT with DUT number	RM-845, DUT 16606
Accessories with DUT numbers	BP-4W, DUT 16607 ; AC-50U, DUT 16555 ; WH-902, DUT 16564
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	08-Aug-2012
Measured by	Sami Lehtonen

5.1. Test Setup



5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:


$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.3. Test results

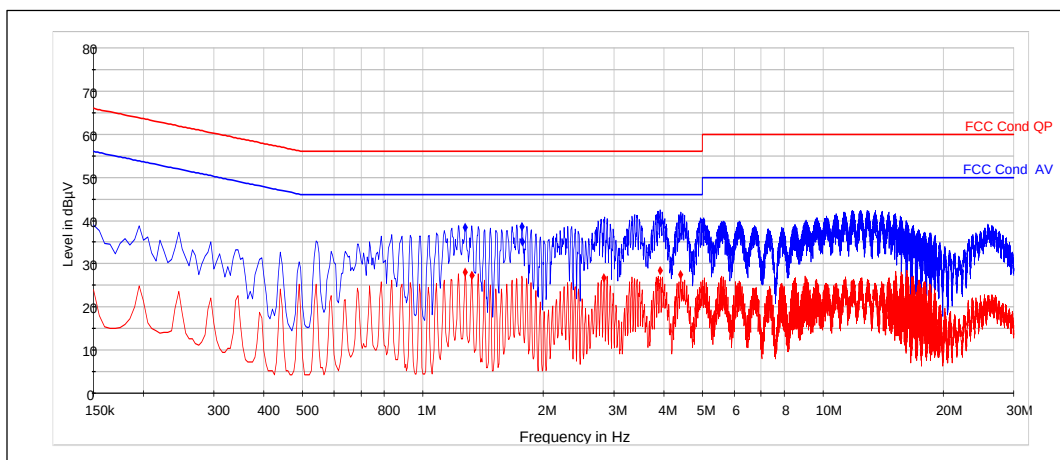

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.275	38.36	N	PASSED
1.765	38.62	N	PASSED
1.77	35.01	N	PASSED
3.865	40.8	N	PASSED
3.925	39.58	N	PASSED
4.405	40.5	N	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
1.275	27.94	N	PASSED
1.325	27.27	N	PASSED
2.835	26.81	N	PASSED
3.915	28.36	N	PASSED
4.405	27.47	N	PASSED

6. Carrier frequency separation

15.247(a)(1), A8.1 (b)

EUT with DUT number	RM-845, DUT 16546
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	24-Jul-2012
Measured by	Sami Lehtonen

6.1. Test Setup

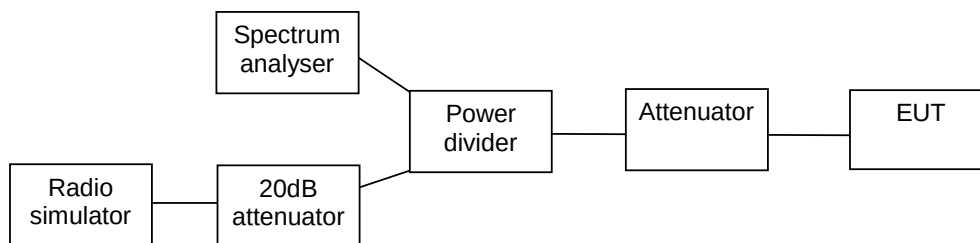

6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

6.3. Bluetooth Test results

6.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1020	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

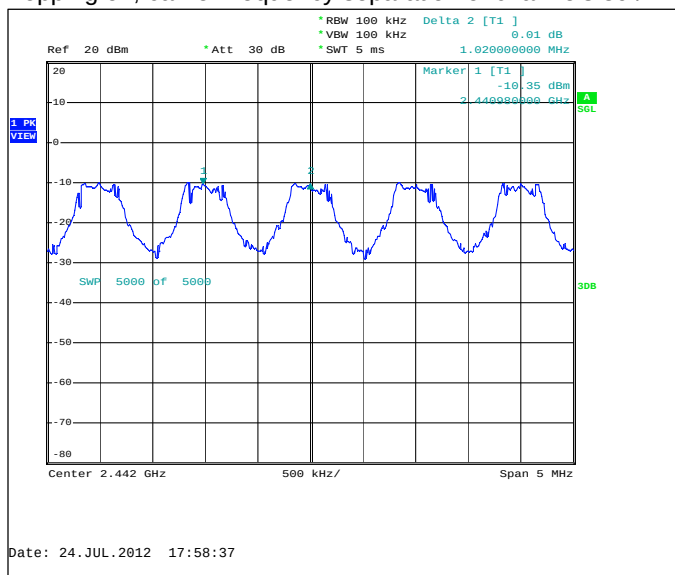

6.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
980	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

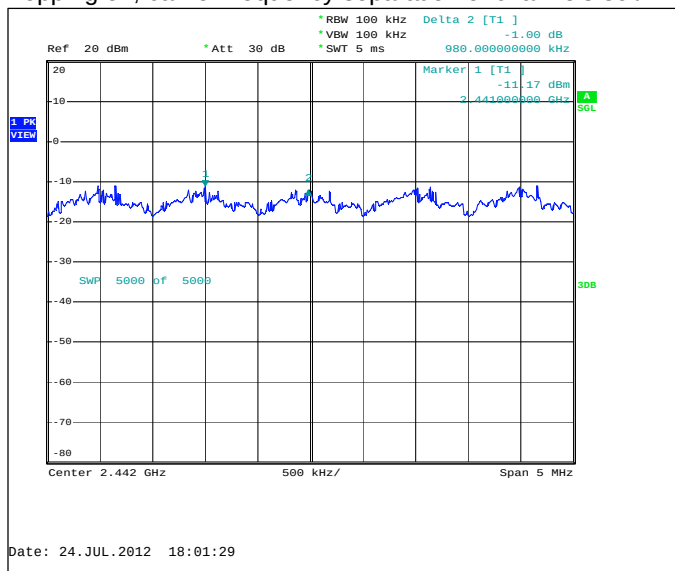


7. Number of hopping frequencies

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-845, DUT 16546
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	24-Jul-2012
Measured by	Sami Lehtonen

7.1. Test Setup

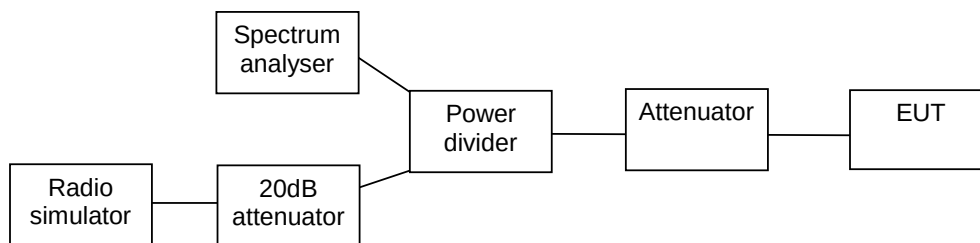

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

7.3. Bluetooth Test results

7.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

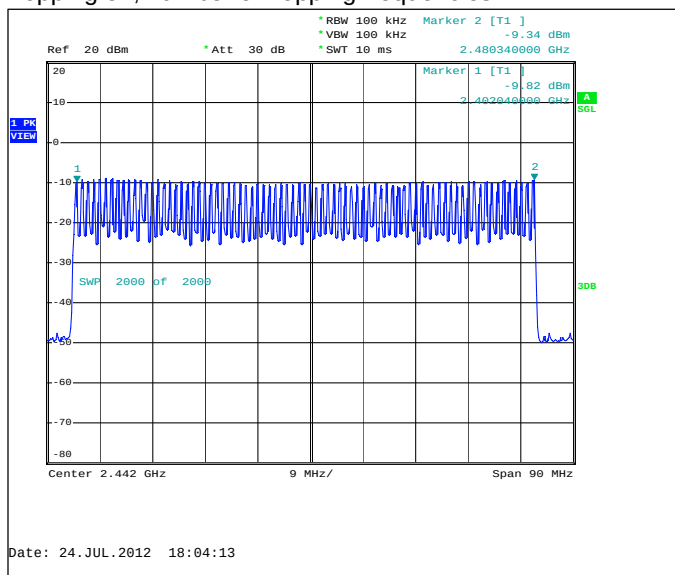

7.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
68	PASSED

Hopping on, number of hopping frequencies

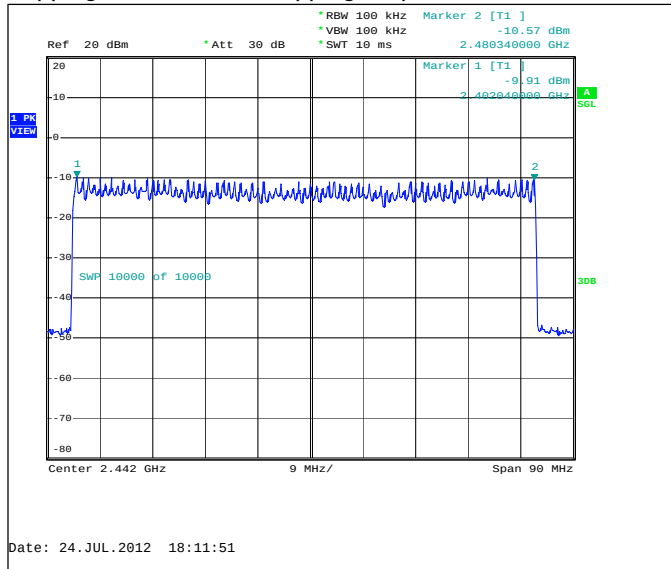


8. Time of occupancy

15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-845, DUT 16546
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	24-Jul-2012
Measured by	Sami Lehtonen

8.1. Test Setup

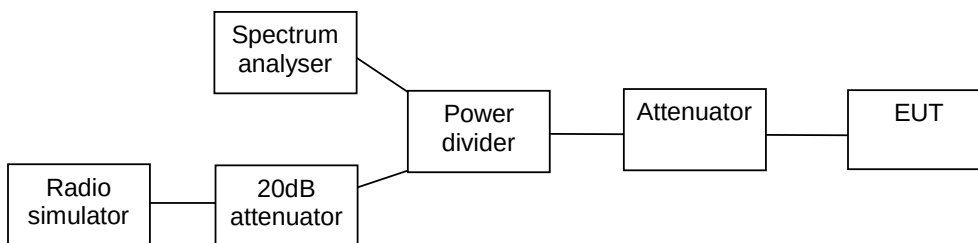

8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
<= 0.4

8.3. Bluetooth Test results


8.3.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
99	2.912	0.288	PASSED
79	2.92	0.231	PASSED


Hopping on, number of transmissions, channel 40 / 2442 MHz

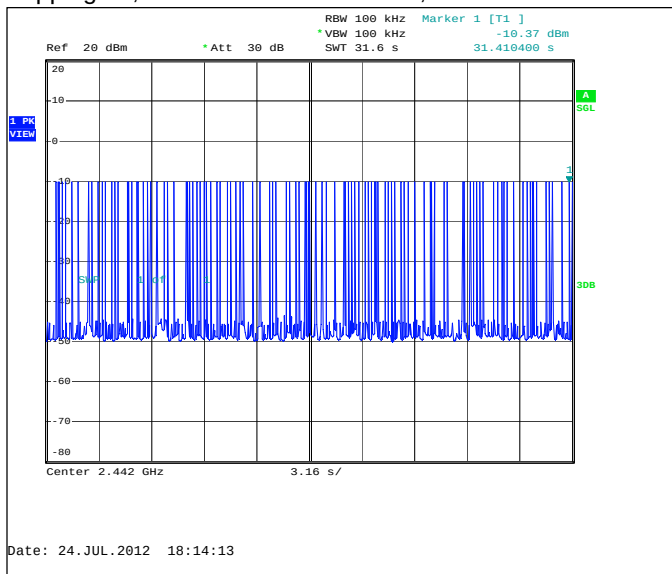


Hopping on, duration of one transmission, channel 40 / 2442 MHz

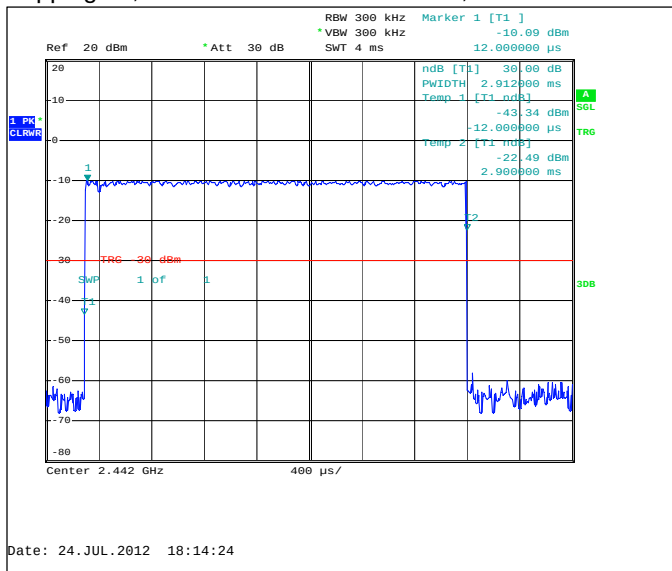

Hopping on, number of transmissions, channel 40 / 2442 MHz

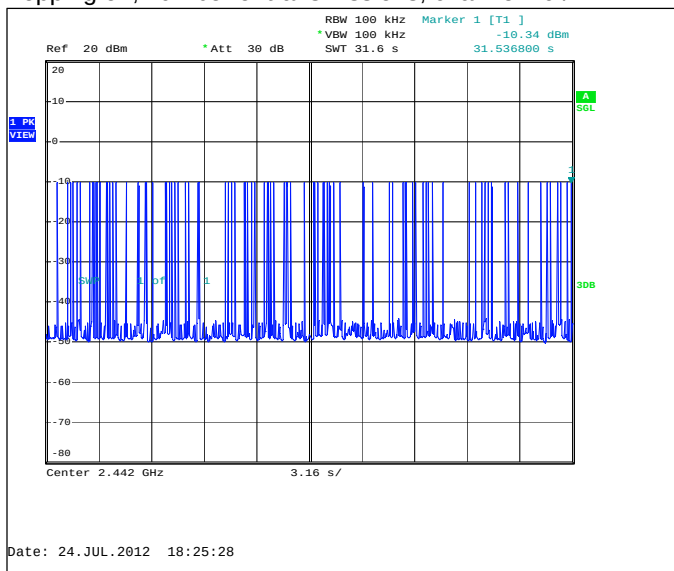


Hopping on, duration of one transmission, channel 40 / 2442 MHz

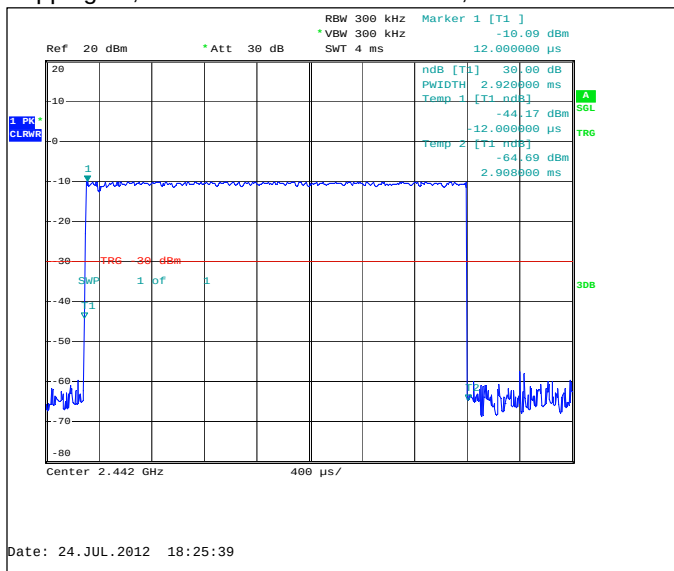


8.3.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
91	2.92	0.266	PASSED
96	2.912	0.28	PASSED


Hopping on, number of transmissions, channel 40 / 2442 MHz

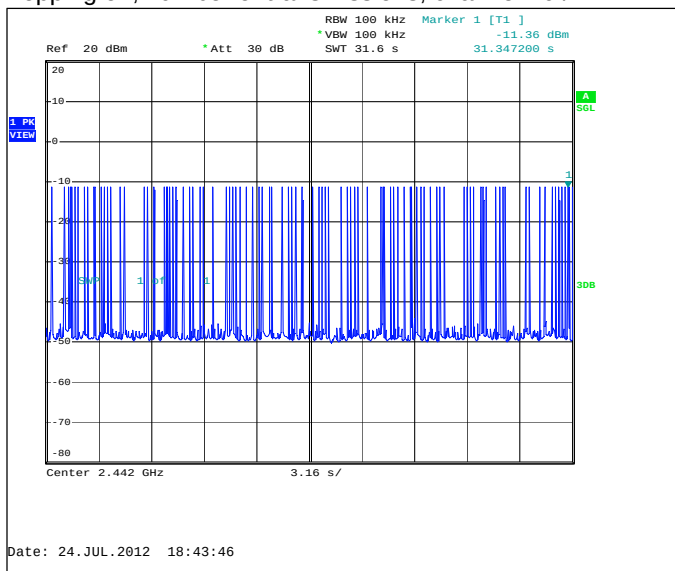


Hopping on, duration of one transmission, channel 40 / 2442 MHz

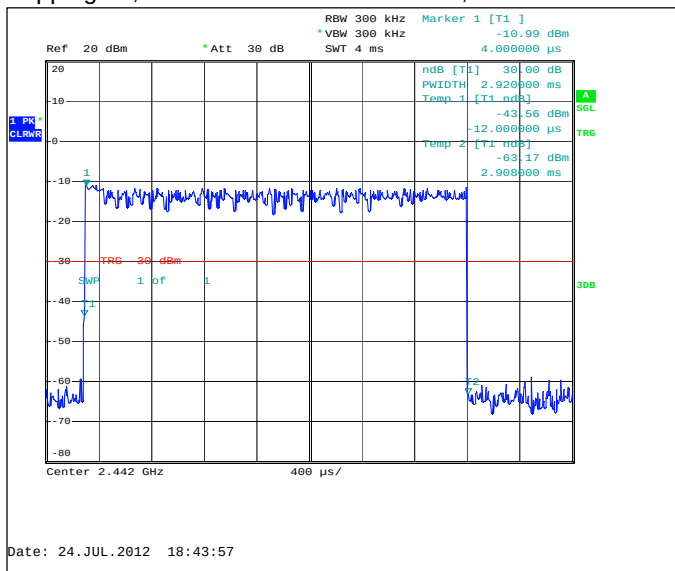

Hopping on, number of transmissions, channel 40 / 2442 MHz

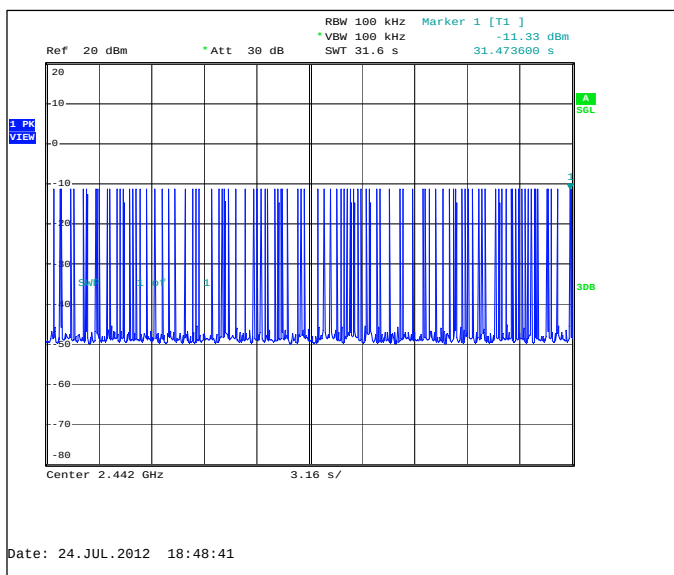


Hopping on, duration of one transmission, channel 40 / 2442 MHz

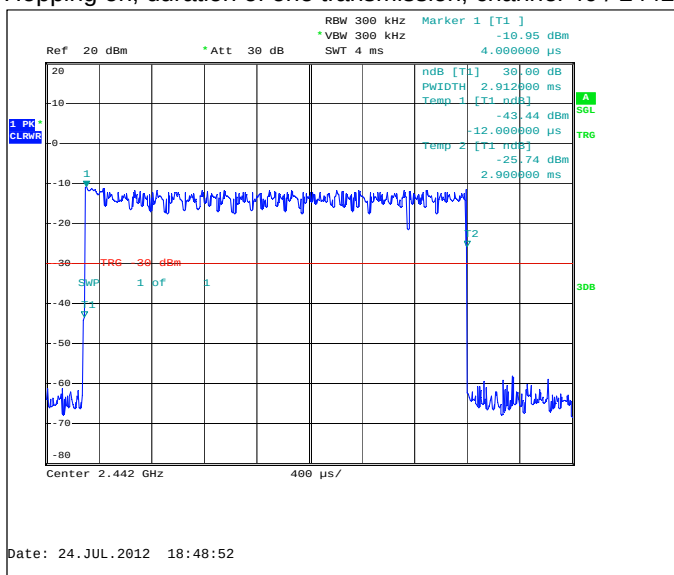

9. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-845, DUT 16577
Accessories with DUT numbers	BP-4W, DUT 16578 ; AC-50U, DUT 16562 ; WH-902, DUT 16563
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101.2
Date of measurements	03-Aug-2012
Measured by	Kalle Hannila / Jari Keto

9.1.1 Test setup

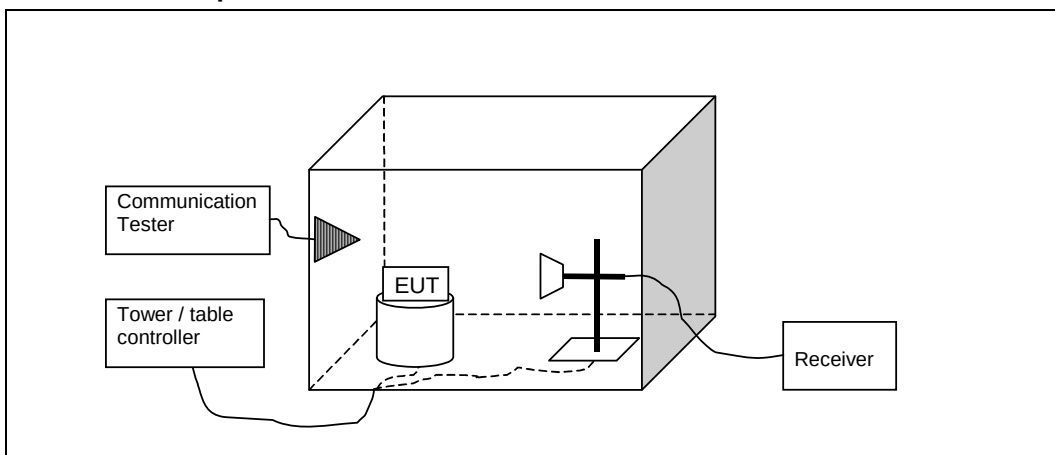

9.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)

9.3. Bluetooth test results

9.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

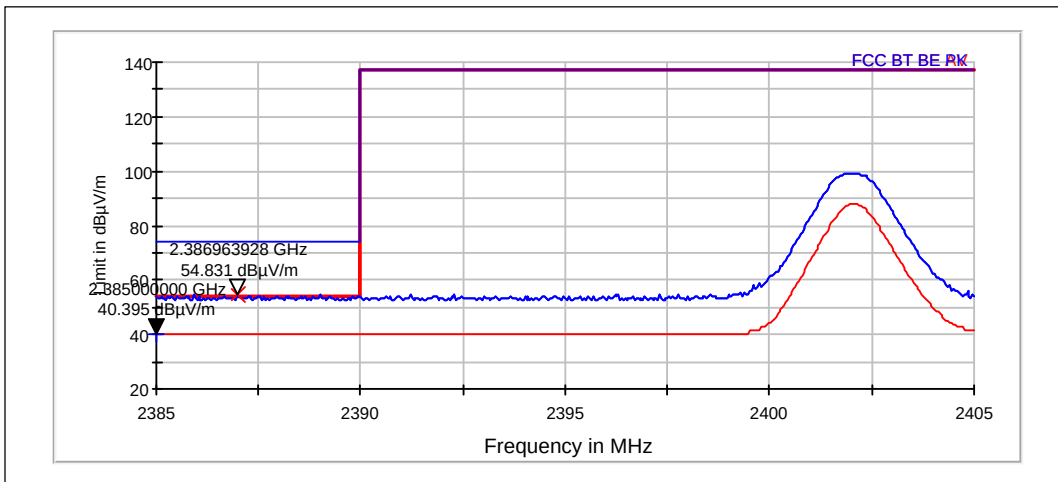


Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2386.964	54.83	551.506	55.67	-0.84	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2385	40.4	104.653	41.24	-0.84	PASSED

Hopping on. Low end.

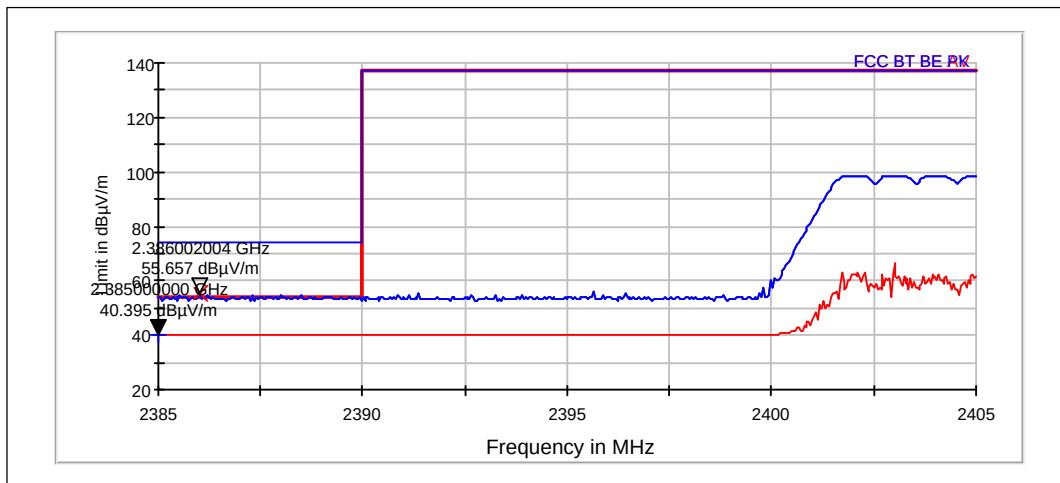


Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2386.002	55.66	606.527	56.5	-0.84	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2385	40.4	104.653	41.24	-0.84	PASSED

Channel 78 / 2480 MHz

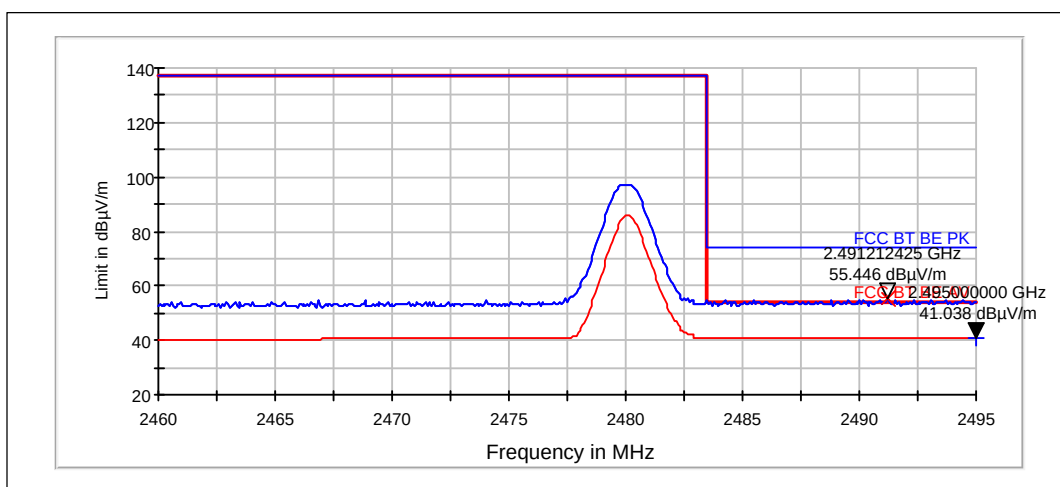

Peak (RBW: 1 MHz, VBW: 3 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
-----------------	------------	----------	------------------------	-----------------------	---------

2491.212	55.45	591.97	54.63	0.82	PASSED
----------	-------	--------	-------	------	--------

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2495	41.04	112.694	40.22	0.82	PASSED

Hopping on. High end.

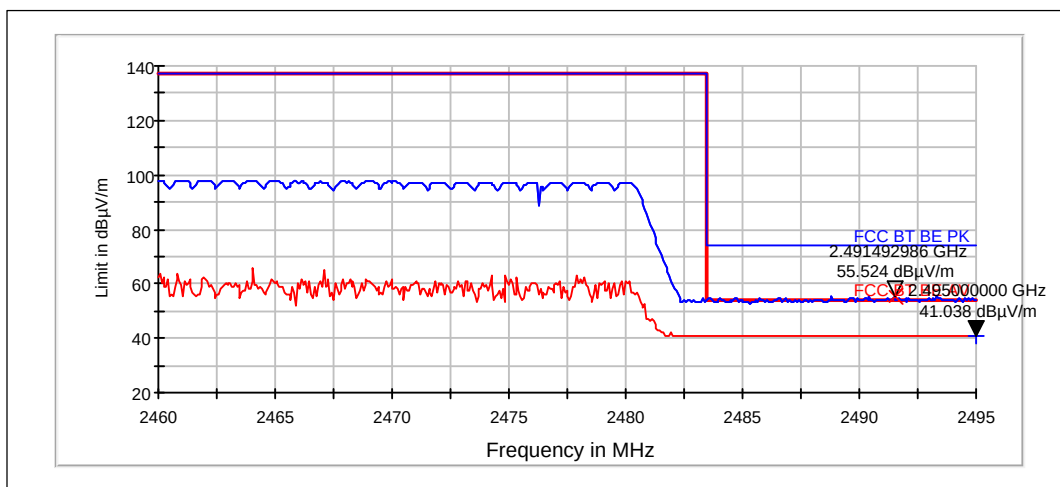

Peak (RBW: 1 MHz, VBW: 3 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2491.493	55.52	597.31	54.7	0.82	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2495	41.04	112.694	40.22	0.82	PASSED

9.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

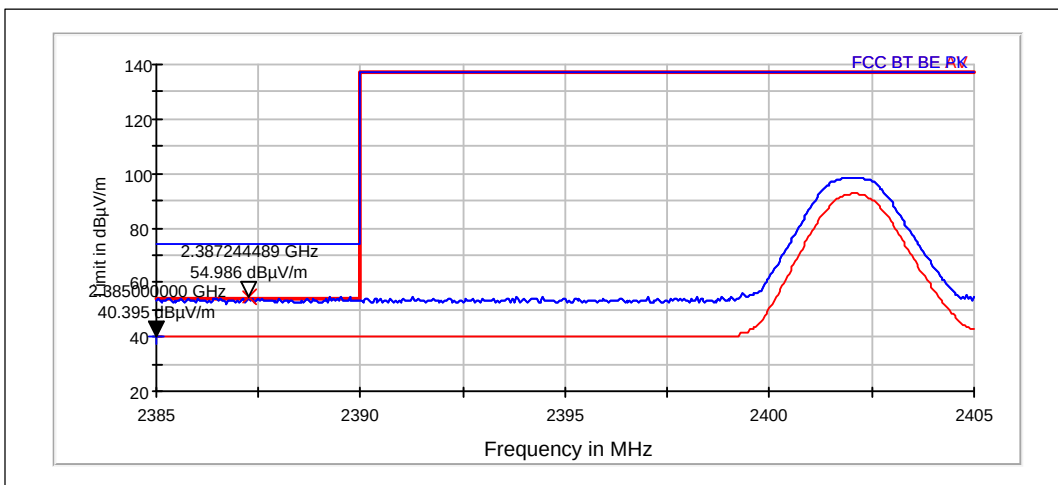


Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2387.244	54.99	561.436	55.83	-0.84	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2385	40.4	104.653	41.24	-0.84	PASSED

Hopping on. Low end.

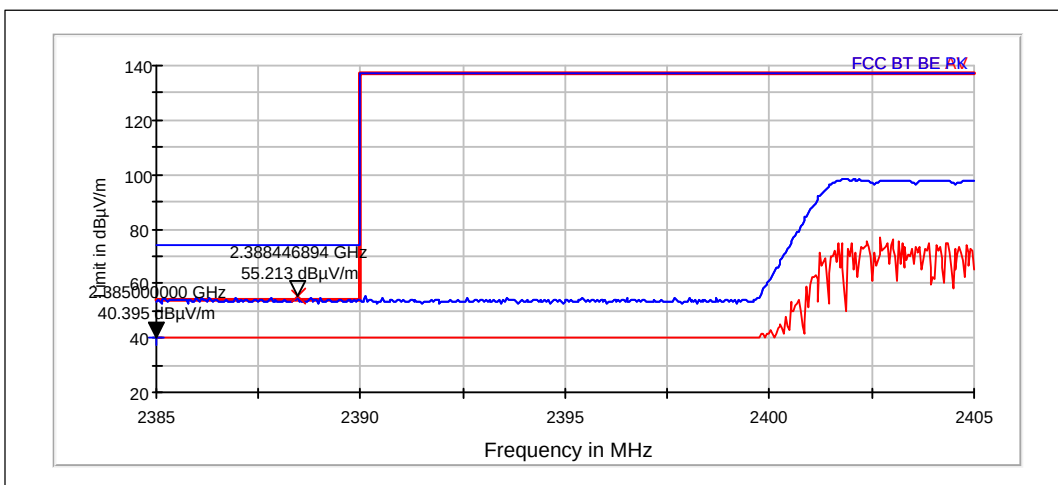


Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2388.447	55.21	576.302	56.05	-0.84	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2385	40.4	104.653	41.24	-0.84	PASSED

Channel 78 / 2480 MHz

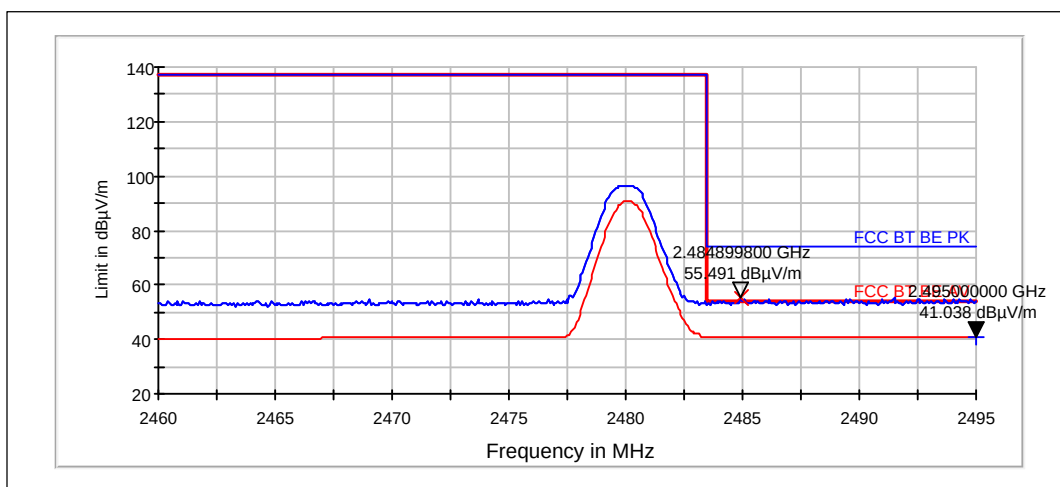


Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484.9	55.49	595.045	54.67	0.82	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2495	41.04	112.694	40.22	0.82	PASSED

Hopping on. High end.

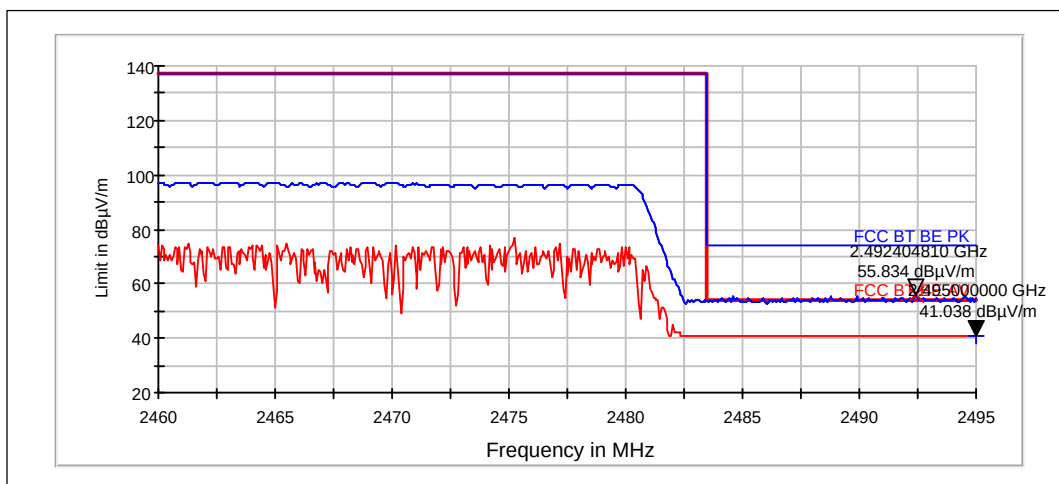

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2492.405	55.83	619.013	55.01	0.82	PASSED


Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2495	41.04	112.694	40.22	0.82	PASSED

10. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-845, DUT 16577
Accessories with DUT numbers	BP-4W, DUT 16578 ; AC-50U, DUT 16562 ; WH-902, DUT 16563
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 40 / 101.2
Date of measurements	02-Aug-2012
Measured by	Kalle Hannila / Jari Keto

10.1.1 Test setup

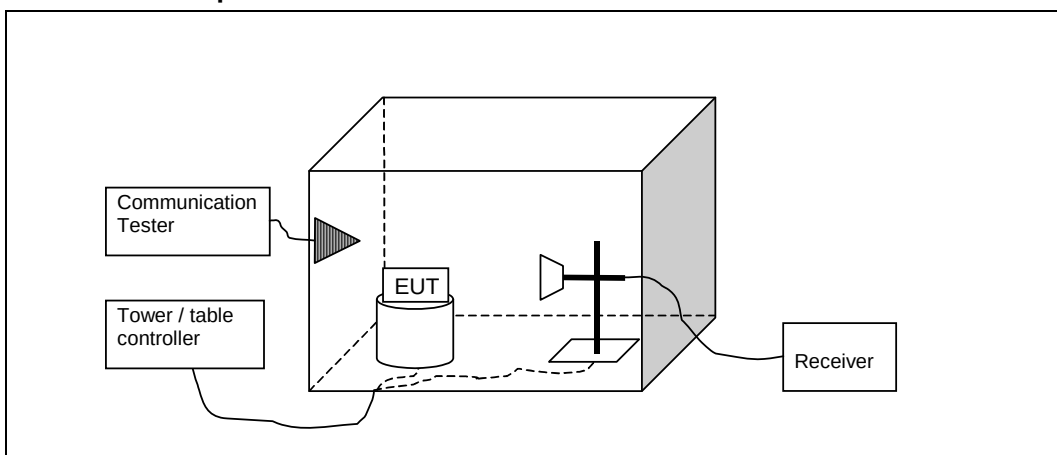

10.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:
The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [$dB\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

10.3. Bluetooth test results

10.3.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
11070.738	52.45	419.035	43.02	9.43	21.5	73.979	PASSED
11296.59	52.42	417.686	43.41	9.01	21.6	73.979	PASSED
14670.742	56.01	631.539	42.03	13.98	69.2	125.23	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
30	26.7	21.615	31.37	-4.67	13.3	40	PASSED
30.06	25.49	18.808	30.19	-4.7	14.5	40	PASSED
33.508	22.28	12.996	29.15	-6.87	17.7	40	PASSED
733.427	32.88	44.066	37.93	-5.05	13.1	46.021	PASSED
750.022	33.93	49.705	38.64	-4.71	12.1	46.021	PASSED
940.403	38.04	79.772	40.43	-2.39	8	46.021	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
11070.738	39.33	92.544	29.9	9.43	14.7	53.98	PASSED
11296.59	39.05	89.64	30.04	9.01	14.9	53.98	PASSED
14670.742	43.24	145.228	29.26	13.98	---	---	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4958.1	40.09	100.983	43.94	-3.85	33.9	73.979	PASSED
7439	45.93	197.856	44.33	1.6	28.1	73.979	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4958.1	27.51	23.736	31.36	-3.85	26.5	53.98	PASSED
7439	33.07	45.051	31.47	1.6	20.9	53.98	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4802.1	40.2	102.294	44.07	-3.87	33.8	73.979	PASSED

7204.7	44.98	177.399	44.2	0.78	80.3	125.23	PASSED
--------	-------	---------	------	------	------	--------	--------

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4802.1	26.82	21.918	30.69	-3.87	27.2	53.98	PASSED
7204.7	32.51	42.228	31.73	0.78	---	---	PASSED

10.3.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
10844.386	52.7	431.37	42.89	9.81	21.3	73.979	PASSED
10957.318	52.39	416.438	42.52	9.87	21.6	73.979	PASSED
14605.915	55.43	591.085	41.9	13.53	69.8	125.23	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
30.3	19.84	9.814	24.7	-4.86	20.2	40	PASSED
32.52	22.54	13.389	28.79	-6.25	17.5	40	PASSED
38.289	15.73	6.116	25.72	-9.99	24.3	40	PASSED
733.427	32.49	42.111	37.54	-5.05	13.5	46.021	PASSED
750.022	33.76	48.736	38.47	-4.71	12.3	46.021	PASSED
940.463	29.76	30.768	32.15	-2.39	16.3	46.021	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
10844.386	39.64	95.962	29.83	9.81	14.3	53.98	PASSED
10957.318	39.53	94.776	29.66	9.87	14.4	53.98	PASSED
14605.915	42.95	140.491	29.42	13.53	---	---	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4804.9	39.05	89.598	42.89	-3.84	34.9	73.979	PASSED
7204	45.1	179.846	44.33	0.77	80.1	125.23	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4804.9	26.94	22.236	30.78	-3.84	27	53.98	PASSED
7204	32.49	42.131	31.72	0.77	---	---	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4958.4	41.13	113.841	44.98	-3.85	32.9	73.979	PASSED
7440.9	45.15	180.988	43.54	1.61	28.8	73.979	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4958.4	27.5	23.706	31.35	-3.85	26.5	53.98	PASSED
7440.9	32.91	44.188	31.3	1.61	21.1	53.98	PASSED

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
6038	Data Logger	Testo 580	Testo	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
6015	Receiver	ESI	R&S	-
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
1759	LISN 50 µH	ESH3-Z5	R&S	-
2390	Directional Coupler	DC2600	AR	-
1916	Communication Tester	CMTA84	R&S	-
6012	CDN	CDN USB/c	Teseq	-
2388	Bluetooth Tester	CBT	R&S	-
6046	Attenuator 10dB	8493C	Agilent	-
6047	Attenuator 20dB	8493C	Agilent	-
6036	Data Logger	175-H2	Testo	-
6045	Power splitter	11667B	Agilent	-
6039	USB Interface	5541765	Testo	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6096	EMC Analyzer	E7405A	HP	-
6098	Signal Generator	8648C	Agilent	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6120	Thermal Chamber	WT 20/40	Weiss	-
6121	Power Splitter	HP11667B	Agilent	-
6122	Power Splitter	HP11667B	Agilent	-
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	-
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	-
2359	Temperature Test Chamber	VT4002	Vötsch	-
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
1999	Receiver	ESIB26	R&S	-
2352	Spectrum Analyzer	FSP-30	R&S	-
2097	Pulse Limiter	ESH3-Z2	R&S	-
2039	Power Supply	PL330QMD	Thurlby	-
1992	Signal Generator	83630B	Agilent	-
2206	Signal Generator	SMX	R&S	-

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6038	Data Logger	Testo 580	Testo	-
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-

Eq. No	Equipment	Type	Manufacturer	Used in
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
1988	Antenna	HL562	R&S	-
-	RF immunity / Emission Software	EMC32	R&S	-
1917	Communication Tester	CMTA84	R&S	-
2388	Bluetooth Tester	CBT	R&S	-
6037	Data Logger	175-H2	Testo	-
6039	USB Interface	5541765	Testo	-
6087	Antenna	BBHA 9120D	Scharzbeck	-
6088	Antenna	VUBA 9117	Scharzbeck	-
6089	Antenna	HFH2-Z2	R&S	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6115	Open switch and control unit	OSP 130	R&S	-
6116	Open switch and control unit	OSP 150	R&S	-
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	-
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
6135	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	-
2140	Antenna	EMCO93110B	EMCO	-
2142	Antenna	3146	EMCO	-
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	-
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
2176	CDN	CDN 801-M3	Lüthi	-
2027	CDN	M2 (modified) DC1	MEB	-
2028	CDN	M3 (modified) DC2	MEB	-
1984	Antenna	BBHA 9120 D	Schwarzbeck	-
6017	Antenna	SBA 9113	Schwarzbeck	-
2009	Signal Generator	SMP 22	R&S	-
2029	Power Supply	PL330	Thurlby	-
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	-
2353	Receiver	ESIB26	R&S	-
2135	CDN	CDN 801-M3	Lüthi	-