

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLAN_RM-878_09.docx	Date of Report:	24-Sep-2012
Number of pages:	10	Customer's Contact person:	Jerry Williams
Testing laboratory:	TCC Nokia San Diego Laboratory 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500	Customer:	Nokia, Inc. 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 385 1598
FCC listing no.:	586140		
IC recognition no.:	10162A-1		
Tested devices/ accessories:	Phone RM-878 / Battery BP-4W / Wireless Charger AC-301U / Wireless Charging Pad DT-900 / WC Cover CC-3063		
FCC ID:	QMNRM-878	IC:	661X-RM878
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Feng You, Senior Specialist

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	23-Aug-2012
Testing completed	19-Sep-2012
The customer's contact person	Jerry Williams
Test Plan referred to	T:\Projects\RM-878\TestPlan\RS_testplan_RM-878_EMC_FCC_SAR.xlsm
Notes	-
Document name	T:\Projects\RM-878\EMC\FCC15CWLAN_RM-878_09.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-878	004402471091631	0205	060	1530.0035.8516.9754.12312	30627
Battery	BP-4W	3932132155140101183;0670671	-	-	-	30616
Wireless Charger	AC-301U	4090492206580200327;0675641	0.34	0.12	-	30628
Wireless Charging Pad	DT-900	SEMCO2127	2.6	3.4	2.2.7.4897	30629
WC Cover	CC-3063	-	-	-	-	30625
Charger	AC-301U	4090492255020200783;0675641	NA	NA	NA	30639
Charging Pad	DT-900	067709123351TW00459	NA	NA	NA	30641

1.2. Summary of Test Results

WLAN 2.4GHz:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	N/P
15.247(d), 15.205(b)	A8.5	Band edge compliance of RF emissions	N/P
15.247(d)	A8.5	Spurious RF conducted emissions	N/P
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	N/P
15.247(a)(2)	A8.2 (a)	6dB(bandwidth)	N/P
15.247(e)	A8.2 (b)	Power spectral density	N/P

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	4
2.2. Test method and limit.....	4
2.3. WLAN 2.4GHz test results	6
3. Test Equipment.....	10
3.1. Radiated measurements	10

2. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-878, DUT 30627
Accessories with DUT numbers	BP-4W, DUT 30616 ; AC-301U, DUT 30628 ; DT-900, DUT 30629 ; -, DUT 30625
Operation Voltage [V] / [Hz]	115V / 60Hz
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19.5 / 46.4
Date of measurements	17-Sep-2012
Measured by	Feng You

2.1.1 Test setup

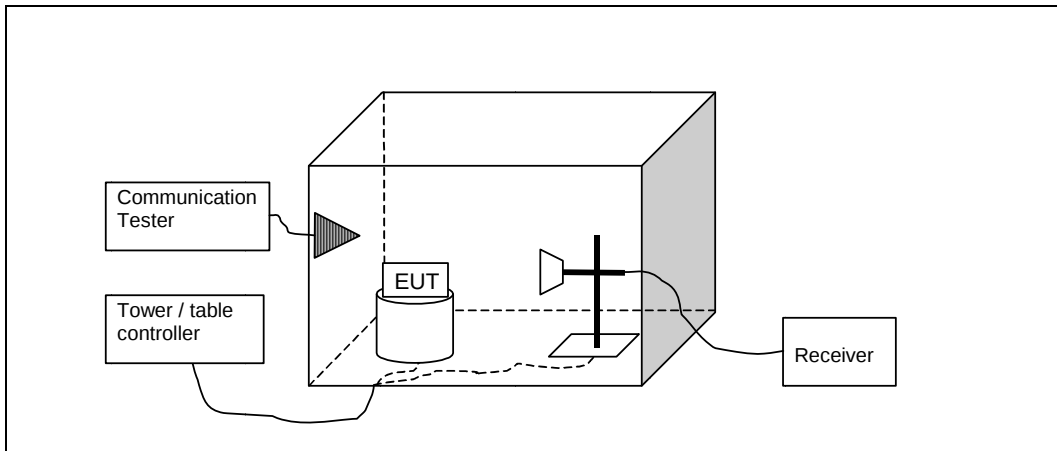

2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [$dB\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

2.3. WLAN 2.4GHz test results

802.11b, Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824	52.97	445.349	42.71	10.27	21	74	PASSED
7234.8	53.89	494.709	40.22	13.67	---	---	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824	39.5	94.373	29.24	10.27	14.5	54	PASSED
7234.8	41.18	114.578	27.51	13.67	---	---	PASSED

802.11b, Channel 7 / 2442 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2493	89.88	31192.487	36.62	53.26	-15.9	74	*PASSED
4884.116	52.61	426.874	42.8	9.81	21.4	74	PASSED
11962.986	60.5	1059.01	40.61	19.89	13.5	74	PASSED

*2493 MHz frequency is coming from BT/WLAN Band Reject Filter Loss calculated back by test software and thus ignored.

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
156.794	34.94	55.815	49.06	-14.12	8.6	43.5	PASSED
170.561	35.85	61.994	50.01	-14.16	7.7	43.5	PASSED
173.53	37.91	78.587	51.68	-13.77	5.6	43.5	PASSED
179.199	38.44	83.599	51.44	-13	5.1	43.5	PASSED
185.588	37.9	78.478	51.97	-14.07	5.6	43.5	PASSED
191.766	34.14	50.939	48.2	-14.06	9.4	43.5	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2493	77.08	7140.851	23.82	53.26	-23.1	54	*PASSED
4884.116	39.38	93.057	29.57	9.81	14.6	54	PASSED
11962.986	47.47	236.401	27.58	19.89	6.5	54	PASSED

*2493 MHz frequency is coming from BT/WLAN Band Reject Filter Loss calculated back by test software and thus ignored.

802.11b Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4924.2	51.4	371.535	41.6	9.8	22.6	74	PASSED

7386.9	54.19	511.976	40.22	13.97	19.8	74	PASSED
--------	-------	---------	-------	-------	------	----	--------

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4924.2	38.37	82.861	28.57	9.8	15.6	54	PASSED
7386.9	41.38	117.233	27.41	13.97	12.6	54	PASSED

802.11g, Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4823.2	50.77	345.541	40.5	10.27	23.2	74	PASSED
7234.1	55.26	579.162	41.7	13.56	---	---	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4823.2	37.52	75.188	27.25	10.27	16.5	54	PASSED
7234.1	41.07	113.084	27.51	13.56	---	---	PASSED

802.11g, Channel 7 / 2442 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2493	89.89	31217.635	36.63	53.26	-15.9	74	*PASSED
3923.877	50.25	325.612	40.97	9.28	23.7	74	PASSED

*2493 MHz frequency is coming from BT/WLAN Band Reject Filter Loss calculated back by test software and thus ignored.

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
30	37.87	78.28	41.99	-4.12	2.1	40	PASSED
143.327	33.22	45.788	47.02	-13.8	10.3	43.5	PASSED
176.68	37.75	77.135	50.36	-12.61	5.8	43.5	PASSED
181.389	27.41	23.469	40.99	-13.58	16.1	43.5	PASSED
186.788	39.45	93.832	53.58	-14.13	4.1	43.5	PASSED
192.516	29.58	30.13	43.68	-14.1	13.9	43.5	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2493	77.07	7136.742	23.81	53.26	-23.1	54	*PASSED
3923.877	36.99	70.746	27.71	9.28	17	54	PASSED

*2493 MHz frequency is coming from BT/WLAN Band Reject Filter Loss calculated back by test software and thus ignored.

802.11g, Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4923.8	49.87	311.387	39.85	10.02	24.1	74	PASSED
7386	54.2	513.039	40.34	13.86	19.8	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4923.8	37.3	73.24	27.28	10.02	16.7	54	PASSED
7386	41.27	115.784	27.41	13.86	12.7	54	PASSED

802.11n, Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4822.7	50.49	334.542	40.14	10.35	23.5	74	PASSED
7236.7	54.16	510.387	40.46	13.7	---	---	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4822.7	37.71	76.807	27.36	10.35	16.3	54	PASSED
7236.7	41.22	115.093	27.52	13.7	---	---	PASSED

802.11n, Channel 7 / 2442 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2493	89.62	30258.681	36.36	53.26	-15.6	74	*PASSED
3899.9	49.24	289.834	40.4	8.84	24.8	74	PASSED
3925.077	49.89	312.212	40.83	9.06	24.1	74	PASSED

*2493 MHz frequency is coming from BT/WLAN Band Reject Filter Loss calculated back by test software and thus ignored.

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
31.38	33.63	48.006	38.34	-4.71	6.4	40	PASSED
34.539	34.53	53.291	40.91	-6.38	5.5	40	PASSED
44.257	28.6	26.928	40.3	-11.7	11.4	40	PASSED
48.306	28.56	26.779	42.7	-14.14	11.4	40	PASSED
504.403	17.51	7.509	21.47	-3.96	28.5	46	PASSED
627.307	19.96	9.953	21.62	-1.66	26	46	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
2493	77.06	7127.71	23.8	53.26	-23.1	54	*PASSED
3899.9	36.43	66.313	27.59	8.84	17.6	54	PASSED
3925.077	36.79	69.08	27.73	9.06	17.2	54	PASSED

*2493 MHz frequency is coming from BT/WLAN Band Reject Filter Loss calculated back by test software and thus ignored.

802.11n, Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 3 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4924.5	50.75	344.786	40.76	9.99	23.2	74	PASSED
7385.7	54.33	520.655	40.46	13.87	19.7	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4924.5	37.26	72.954	27.27	9.99	16.7	54	PASSED
7385.7	41.27	115.744	27.4	13.87	12.7	54	PASSED

3. Test Equipment

3.1. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
N/A	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
7984	Data Logger	Testo175H1	Testo	-
3397	Signal Generator	83630B	Agilent	-
7591	Antenna	HL562	R&S	-
N/A	RF immunity / Emission Software	EMC32	R&S	-
7459	Open switch and control unit	TS-RSP	R&S	-
5729	Open switch and control unit	TS-RSP	R&S	-
N/A	Notch Filter	GSM1900	TTE	24
N/A	Notch Filter	GSM850	Trilithic	22
7572	Antenna	3117	EMCO	-
5730	Preamplifier/Switch Box	TS-ANA	R&S	-
N/A	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	-
N/A	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
N/A	Band Reject Filter	WRC824/849-0,2-6SS	Wainwright	22
4406	Communication Tester	CMU200	R&S	-
7646	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS-Lindgren	-
7451	EMI Receiver	ESU-26	R&S	-
3406	Mast/Turntable Controller	SC99V	Sunol	-