

# ***ION Digital LLP***

## ***Micra G***

### **Class 2 Permissive Change Test Report**

per


## **FCC CFR47 Part 15/C Subpart 15.231 IC RSS 210-Issue 7**

**FCC ID-QNMICRAG**

**IC Certification Number: 4488A-MICRAG**

Revision 1.0

March 2, 2011

	Approval	
Checked By:	 Robert Stirling, P. Eng.	Mar. 2, 2011 Date

**Protocol Data Systems Inc, EMC Lab, Abbotsford BC, Canada. SCC ISO/17025 (CAN-P-4E) Accredited Laboratory  
No. 631 FCC O.A.T.S. Registration Number 96437 Industry Canada O.A.T.S. Registration Number IC3384A-1**

*This report is for the exclusive use of Protocol Data Systems Customer and is provided pursuant to the agreement between Protocol and its Customer. Protocol's responsibility and liability are limited to the terms and conditions of the agreement. Protocol assumes no liability to any party, other than to the Customer in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Customer is authorized to copy or distribute this report and then only in its entirety. Any use of the Protocol Data Systems name for the sale or advertisement of the tested material, product or service must first be approved in writing by Protocol Data Systems. The observations and test results in this report are relevant only to the sample/s tested.*

## **Index**

Section I:	Report of Measurements Testing Information .....	3
Section II:	Spurious Radiated Emissions Measurements .....	6
Appendix A:	Fundamental and Harmonics Emissions Data and Plots.....	7

## Section I: Report of Measurements Testing Information

### General Information

Applicant Company Name	ION Digital LLP
Address	Unit 2109, 1225 Kingsway Ave
	Port Coquitlam, BC V3C 1S2
	Phone: 800-407-4389
	Fax 800-407-4465
	Contact Person: Dean Schebel
	Email: <a href="mailto:dean.schebel@ion-digital.com">dean.schebel@ion-digital.com</a>
Product Name	Intrusion Detector Sensor – Plunger Plastic with wire Antenna
FCC ID#	QNMICRAG
IC Certification Number	4488A-MICRAG
Applicable Standard	FCC Part 15.231, ANSI C63.4:2003; Part 15.207, 15.209 IC RSS-210-Issue 7
Test Results	Pass
Related Report/s Approval	ION Digital RN 03347 Rev 0.1
Statement of Compliance	This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of our knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards. – Signature on Front Cover Page.

### Equipment Under Test Specification

Manufacturer	ION Digital LLP
Product Description	Intrusion Detector Sensor – Plunger Plastic with wire Antenna
FCC ID#	QNMICRAG
IC Certification Number	4488A-MICRAG
Model Number	Micra G
Name	Intrusion Detector Sensor
Operating Frequency	319.5 MHz
Emission Designator	DXX
EUT Power Source	3Vdc Coin Cell Battery
Test Item	Production Unit
Type of Equipment	Fixed
Antennas	Wire Antenna
Antenna Connector	permanently attached
Test Voltage	3Vdc Coin Cell Battery

**Test Environment**

Test Facility	Protocol Data Systems Inc.
	4741 Olund Rd.
	Abbotsford, BC V4X 2E7
	Phone: 604-504-0091
	Fax: 604-554-0091
	Email: info@protocol-emc.com
	Website: www.protocol-emc.com
Test Facility ID's	SCC ISO/17025 (CAN-P-4E) Accredited Laboratory No. 637
	FCC O.A.T.S. Registration Number 627740
	Industry Canada O.A.T.S. Registration Number IC3384A
Date Tested	February 10, 21, 2011
Tested By	Rob Stirling

**Test Setup**

Test Supporting Equipment	None required
Test Conditions	Temperature and Humidity: 21°C, 46%
Test Exercise e.g. software description, test signal, etc.	The EUT was set for continuous transmit mode of operation. It only has 1 frequency. The options were for a CW and modulated frequency.
Deviation from Standard/s	No deviation from Standard
Modification to the EUT	No modifications was made.

**Test Equipment List**

Manufacturer	Model	Equipment Description	Serial No.	Next Cal
HP	85650A	CDN Quasi-Peak Adapter	2811A01080	12/08/11
HP	85662A	Spectrum Analyzer Display	2152A03569	11/08/11
HP	8566B	Spectrum Analyzer RF Section	2241A02102	11/08/11
HP	85685A	RF-Preselector	3107A01222	11/08/11
EMCO	3146	Ant Log Periodic 200-1000MHZ	9611-4699	08/08/11
EMCO	3110B	Ant Biconical 20-300MHz	9401-1850	08/08/11
EMCO	3115	Horn Antenna 1-18GHz	9403-4251	20/08/11
EMCO	3825/2	LISN	2470	20/07/11
Protocol EMC	Custom	Antenna Mast	N/A	N/A
Protocol EMC	Custom	Turntable	N/A	N/A

**Measurement Uncertainty**

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Total RF power, conducted	$\pm 1,5$ dB
RF power density, conducted	$\pm 3$ dB
Spurious emissions, conducted	$\pm 3$ dB
All emissions, radiated	$\pm 3$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
DC and low frequency voltages	$\pm 3$ %

## Section II: Spurious Radiated Emissions Measurements

DATES: Feb 10, 21, 2011

TEST STANDARD: FCC CFR47, Part 15, Subpart C and IC RSS-210 Issue7

TEST VOLTAGE: 3Vdc, as noted in the individual test records

MINIMUM STANDARD: According to FCC Subpart C, 15.209(a) and RSS-210 Issue7, for an intentional radiator devices, the general required field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values

Frequency (MHz)	Field Strength	
	uV/m @ 3-m	dBμV/m at 3m
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

TEST SETUP: During performing the below 1GHz, the equipment was set up in a 3-meter open field test site. Emissions in both horizontal and vertical polarization were measured while rotating the EUT on a turntable to maximize the emissions signal strength.

During performing radiated emissions above 1GHz, the equipment was set 1 meter away from the interference-receiving horn antenna. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1GHz.

The test-receiver system was set to Peak Detect Function and above specified bandwidth with Maximum Hold Mode. If the emissions level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. All measurement performed for this EUT had the 10dB margin, so it did not need re-testing using Quasi-Peak or Average Detection method.

DEVICE DESCRIPTIONS: Refer to the Equipment Under Test Section for EUT Descriptions.

MODIFICATIONS: No modifications were made to the EUT to pass this test.

MEASUREMENTS PLOTS: Refer to Appendix A

PERFORMANCE: The radiated emissions for the EUT meet the requirements for FCC Part 15.231, 15.209 and IC RSS-210 Issue7 standards for Intentional Radiators. No emissions other than fundamental Harmonics were detected. The spectrum was checked from 30MHz – 5 GHz.

**Appendix A: Fundamental and Harmonics Emissions Data and Plots****MICRA G RPS****Fundamental**

Polarizations	Frequency	Uncor-Pk	Uncor-Ave	Gain	Antenna factor	Total Correction Factors	Peak	Ave (no duty cycle)	Duty Cycle Correction Factors *	Corrected Pk Signal	Average Lmt	DelLim-Pk	DelLim-Pk
Ant / EUT	(MHz)	(dB)	(dB)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)
Ant Vert, EUT Vert	319.507	79.3	34.1	-1.8	15.1	16.9	96.2	51	20	76.2	73.7	2.5	-22.7
Ant Vert, EUT Horz	319.507	68.6		-1.8	15.1	16.9	85.5		20	65.5	73.7	-8.2	
Ant Horz, EUT Vert	319.507	79.7	28.7	-1.8	15.1	16.9	96.6	45.6	20	76.6	73.7	2.9	-28.1
Ant Horz, EUT Horz	319.507	64.6		-1.8	15.1	16.9	81.5		20	61.5	73.7	-12.2	

**Harmonics**

Polarization	Frequency	Uncor-Pk	Gain	Antenna factor	Total Correction Factors	Peak	Duty Cycle Correction Factors *	Corrected Pk Signal	Average Lmt	DelLim-Pk
	(MHz)	(dB)	(dB)	dB/m	(dB)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)
Vert	639.014	20.5	-3	20.1	23.1	43.6	20	23.6	46.6	-23
Horz	639.014	27.4	-3	20.1	23.1	50.5	20	30.5	46.6	-16.1
Vert	958.521	7.9	-5.1	25	30.1	38	20	18	46.6	-28.6
Horz	958.521	10.6	-5.1	25	30.1	40.7	20	20.7	46.6	-25.9
Vert	1278.028	19.9	4.8	25.9	21.1	41	20	21	61.94	-40.94
Horz	1278.028	22.5	4.8	25.9	21.1	43.6	20	23.6	61.94	-38.34
Vert	1597.535	21.1	4.2	27.6	23.4	44.5	20	24.5	61.94	-37.44
Horz	1597.535	24.3	4.2	27.6	23.4	47.7	20	27.7	61.94	-34.24
Horz	1917.042	23.6	3.4	28.9	25.5	49.1	20	29.1	61.94	-32.84
Vert	1917.042	21.3	3.4	28.9	25.5	46.8	20	26.8	61.94	-35.14
Vert	2236.549	29.5	24	29.3	5.3	34.8	20	14.8	61.94	-47.14
Horz	2236.549	34.2	24	29.3	5.3	39.5	20	19.5	61.94	-42.44
Horz	2556.056	28.5	22.9	30.5	7.6	36.1	20	16.1	61.94	-45.84
Vert	2556.056	28.8	22.9	30.5	7.6	36.4	20	16.4	61.94	-45.54
Vert	2875.563	27.2	21.1	30.9	9.8	37	20	17	61.94	-44.94
Horz	2875.563	27.9	21.1	30.9	9.8	37.7	20	17.7	61.94	-44.24
Vert	3195.07	27	20.6	31.2	10.6	37.6	20	17.6	61.94	-44.34
Horz	3195.07	27.5	20.6	31.2	10.6	38.1	20	18.1	61.94	-43.84

\* Per Appendix C in original submission ION Digital RN 03347 Rev 0.1

## MICRA G Magnet

### Fundamental

Polarizations	Frequency	Uncor-Pk	Uncor-Ave	Gain	Antenna factor	Total Correction Factors	Peak	Ave (no duty cycle)	Duty Cycle Correction Factors *	Corrected Pk Signal	Average Lmt	DelLim-Pk	DelLim-Pk
Ant / EUT	(MHz)	(dB)	(dB)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)
Ant Vert, EUT Vert	319.507	79.1	36.6	-1.8	15.1	16.9	96	53.5	20	74.7	73.7	2.3	-20.2
Ant Vert, EUT Horz	319.507	61.8		-1.8	15.1	16.9	78.7		20	57.4	73.7	-16.3	
Ant Horz, EUT Vert	319.507	73.9	43.6	-1.8	15.1	16.9	90.8	60.5	20	70.8	73.7	-2.9	-13.2
Ant Horz, EUT Horz	319.507	63.3		-1.8	15.1	16.9	80.2		20	60.2	73.7	-13.5	


### Harmonics

Polarization	Frequency	Uncor-Pk	Gain	Antenna factor	Total Correction Factors	Peak	Duty Cycle Correction Factors *	Corrected Pk Signal	Average Lmt	DelLim-Pk
	(MHz)	(dB)	(dB)	dB/m	(dB)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)
V	639.014	36.3	-3	20.1	23.1	59.4	20	39.4	46.6	-7.2
H	639.014	27	-3	20.1	23.1	50.1	20	28.8	46.6	-16.5
V	958.521	24.1	-5.1	25	30.1	54.2	20	34.2	46.6	-12.4
H	958.521	24.6	-5.1	25	30.1	54.7	20	33.4	46.6	-11.9
V	1278.028	21.9	4.8	25.9	21.1	43	20	23	61.94	-38.94
H	1278.028	19.2	4.8	25.9	21.1	40.3	20	19	61.94	-41.64
V	1597.535	23.3	4.2	27.6	23.4	46.7	20	26.7	61.94	-35.24
H	1597.535	20	4.2	27.6	23.4	43.4	20	22.1	61.94	-38.54
V	1917.042	24.7	3.4	28.9	25.5	50.2	20	30.2	61.94	-31.74
H	1917.042	20.7	3.4	28.9	25.5	46.2	20	24.9	61.94	-35.74
V	2236.549	57.1	24	29.3	5.3	62.4	20	42.4	61.94	-19.54
H	2236.549	52.1	24	29.3	5.3	57.4	20	36.1	61.94	-24.54
V	2556.056	50.2	22.9	30.5	7.6	57.8	20	37.8	61.94	-24.14
H	2556.056	49	22.9	30.5	7.6	56.6	20	35.3	61.94	-25.34
V	2875.563	48.8	21.1	30.9	9.8	58.6	20	38.6	61.94	-23.34
H	2875.563	48	21.1	30.9	9.8	57.8	20	36.5	61.94	-24.14
V	3195.07	47.6	20.6	31.2	10.6	58.2	20	38.2	61.94	-23.74
H	3195.07	48.9	20.6	31.2	10.6	59.5	20	38.2	61.94	-22.44


\* Per Appendix C in original submission ION Digital RN 03347 Rev 0.1



## MICRA G RPS

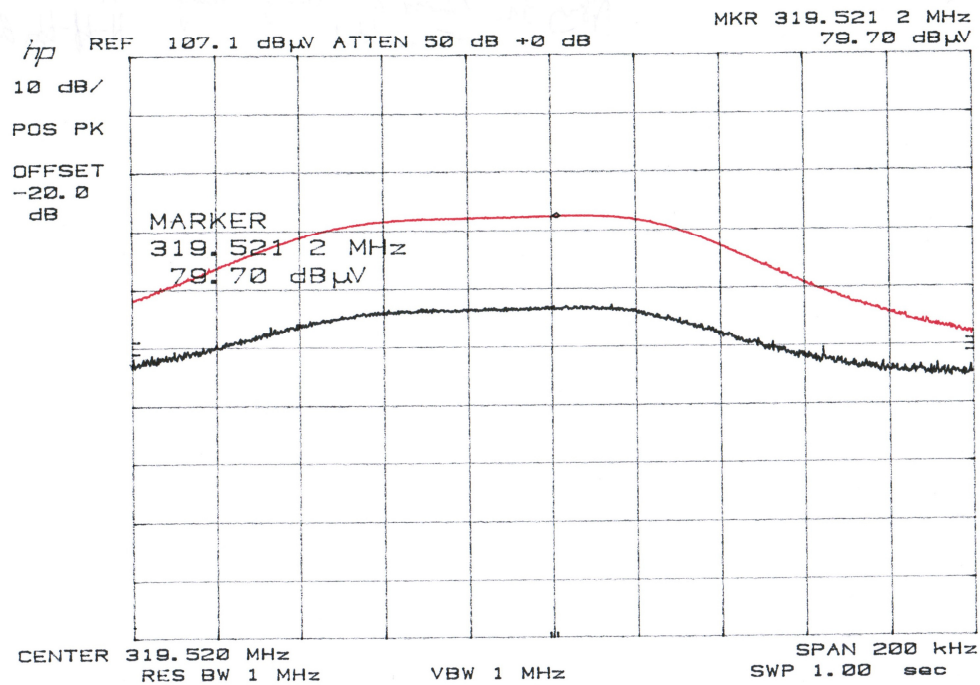


### Antenna Horizontal

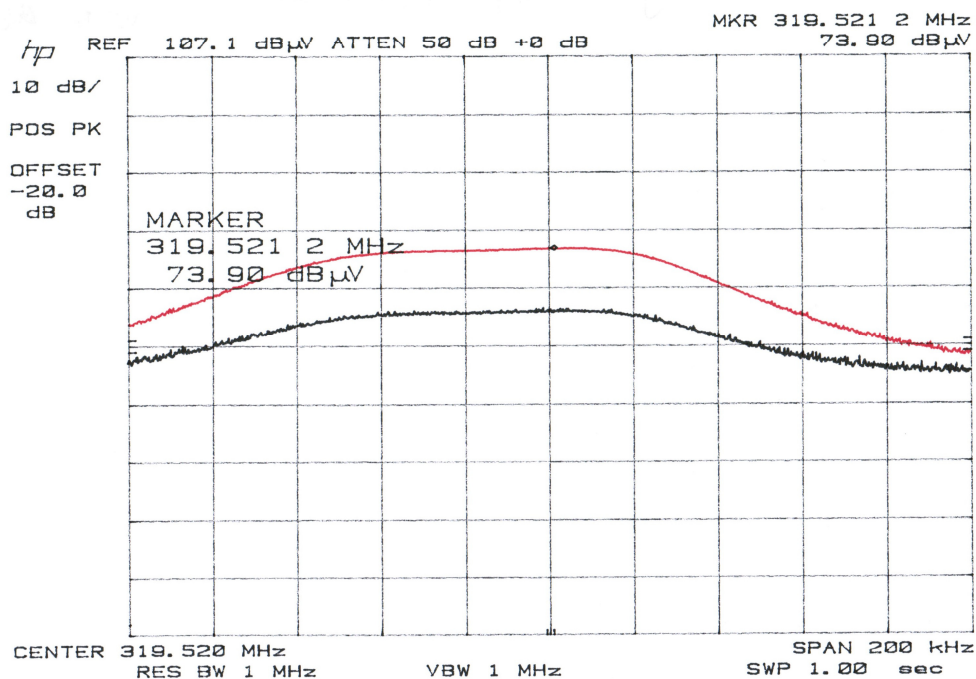


### Antenna Vertical

## MICRA G Magnet

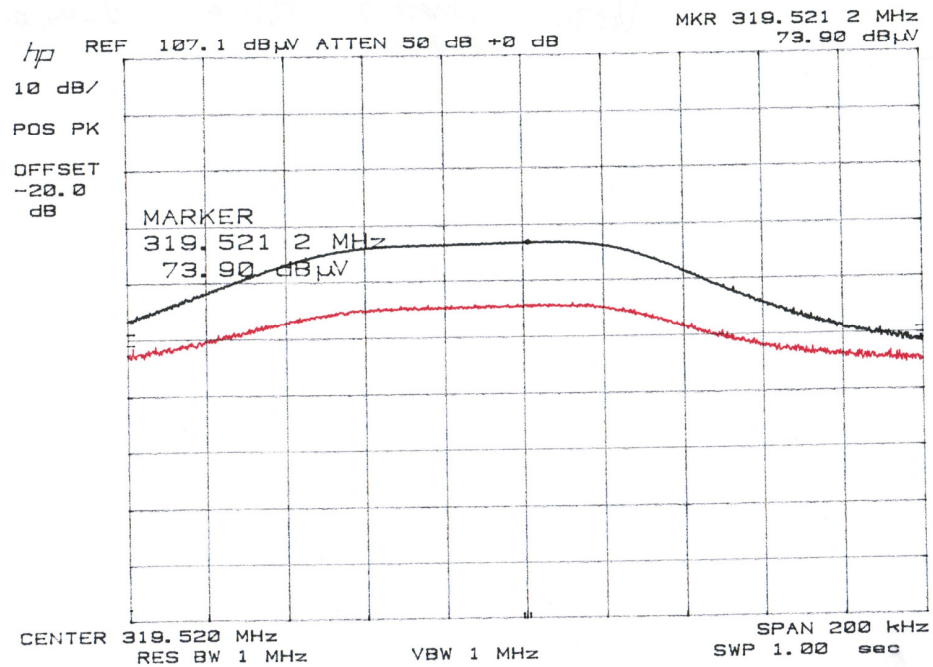

### Antenna Vertical

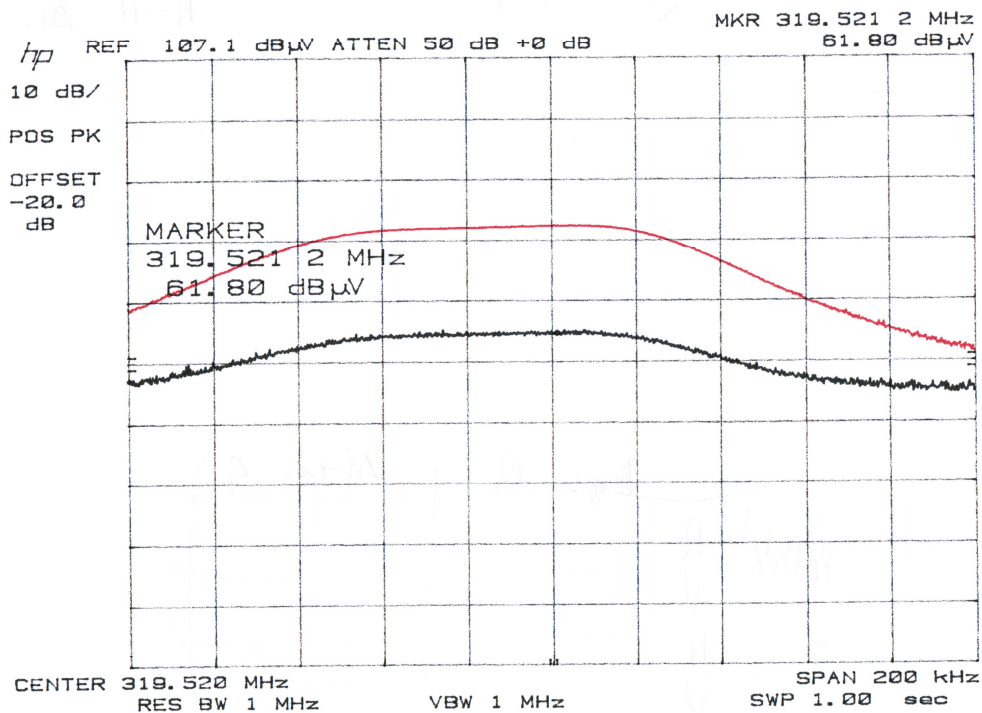

### Antenna Horizontal

Note: Fundamental Plots (EUT Orientation: Horizontal - Black Vertical - Red)

## Appendix B: Test Set-Up Pictures



Test Setup MICRA G RPS



Test Setup MICRA G