



KES Co., Ltd.
C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

TEST REPORT

Part 15 Subpart B&C 15.247

Equipment under test Auto Blood Pressure Meter

Model name HX-461

FCC ID QN8HX-461

Applicant Seers Technology Co., Ltd.

Manufacturer Seers Technology Co., Ltd.

Date of test(s) 2012.10.02 ~ 2012.10.12

Date of issue 2012.10.15

Issued to

Seers Technology Co., Ltd.

#1210, Tech Dong, SKn Technopark 190-1 Sangdaewon-dong, Jungwon-gu
Sungnam-si, Gyeonggi-do, 462-721, Korea

Issued by

KES Co., Ltd.

C3701 Dongil Techno Town, 889-1, Gwanyang 2-dong, Dongan-gu, Anyang-si,
Gyeonggi-do, 431-716, Korea
477-6, Hageo-ri, Yeoju-eup, Yeoju-gun, Gyeonggi-do, 469-803, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
Kwang Yeol Choo Test engineer	Gyu-cheol Shin Technical manager



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Revision history

Revision	Date of issue	Test report No.	Description
-	2012.10.15	KES-RF-120073	Initial



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

TABLE OF CONTENTS

1.0	General product description	4
1.1	Test frequency	4
1.2	Information about variant model	4
1.3	Device modifications	4
1.4	Test facility	5
1.5	Laboratory accreditations and listings	5
2.0	Summary of tests	6
2.1	Test data	7
2.1.1	Pre-scanned output power	7
2.1.2	6 dB bandwidth & 99 % occupied bandwidth	8
2.1.3	Output power	15
2.1.4	Power spectral density	16
2.1.5	Radiated spurious emissions and conducted spurious emissions	20
2.1.6	AC conducted emissions	38
	Appendix A. Test equipment used for test	41



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

1.0 General product description

Equipment under test	Auto Blood Pressure Meter
Model name	HX-461
Serial number	N/A
Frequency Range	2 412 MHz ~ 2 462 MHz(802.11 b/g) // 2 402 MHz ~ 2 480 MHz(Bluetooth BDR)
Modulation technique	DSSS, OFDM, GFSK
Number of channels	11(802.11 b/g) // 79(Bluetooth BDR)
Antenna type & gain	802.11b/g: Fixed type(Chip antenna) // 1.9 dBi Bluetooth: Fixed type(Chip antenna) // 1.7 dBi
Power source	AC 120 V

1.1 Test frequency

- 802.11 b/g

	Low channel	Middle channel	High channel
Frequency (MHz)	2 412	2 442	2 462

1.2 Information about variant model

N/A

1.3 Device modifications

N/A



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

1.4 Test facility

C3701 Dongil Techno Town, 889-1, Gwanyang 2-dong, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
477-6, Hageo-ri, Yeoju-eup, Yeoju-gun, Gyeonggi-do, 469-803, Korea

The open area test site is constructed in conformance with the requirements ANSI C63.4-2003.

1.5 Laboratory accreditations and listings

Country	Agency	Scope of accreditation	Certificate No.
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	343818
KOREA	KC	EMI (10 meter Open Area Test Site and two conducted sites) Radio (3 & 10 meter Open Area Test Sites and one conducted site)	KR0100
CANADA	IC	3 & 10 meter Open Area Test Sites and one conducted site	4769B-1



2.0 Summary of tests

Section in FCC Part 15	Parameter	Status
15.247(a)(2)	6 dB bandwidth and 99 % occupied bandwidth	C
15.247(b)(3)	Output power	C
15.247(e)	Power spectral density	C
15.205, 15.209	Radiated spurious emission and conducted spurious emission	C
15.207	AC conducted emissions	C

Note: C=Complies NC=Not complies NT=Not tested NA=Not applicable

Statement:

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) and the guidance provided in KDB 558074 were used in the measurement of the DUT.



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

2.1 Test data

2.1.1 Pre-scanned output power


Preliminary tests were performed in different data rate as below table and the highest power data rates(802.11b, 802.11g) were chosen for full test in the following section to demonstrate compliance to the FCC limit line.

Test mode	Detector mode	Conducted power(dB m)			
		Data rate(Mbps)			
		1	2	5.5	11
802.11b (Low channel)	Peak	15.03	15.04	15.05	14.99
	Average	12.08	11.98	11.98	11.97

Test mode	Detector mode	Conducted power(dB m)							
		Data rate(Mbps)							
		6	9	12	18	24	36	48	54
802.11g (Low channel)	Peak	19.83	18.91	20.16	19.22	19.82	19.31	19.22	20.04
	Average	9.73	9.66	9.65	9.68	9.70	9.54	9.46	9.47

2.1.2 6 dB bandwidth & 99 % occupied bandwidth

Test setup



Test procedure

The testing follows KDB publication No. 558074 D01 DTS measurement.

1. Set resolution bandwidth (RBW) = 1~5 % of the emission bandwidth (EBW).
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1~5 %.


Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


Test results

Operation mode	Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
802.11b (5.5 Mbps)	2 412	12.20	0.5
	2 442	12.20	
	2 462	12.20	
802.11g (12 Mbps)	2 412	16.62	0.5
	2 442	16.67	
	2 462	16.67	


Low channel // 802.11b // 6 dB bandwidth

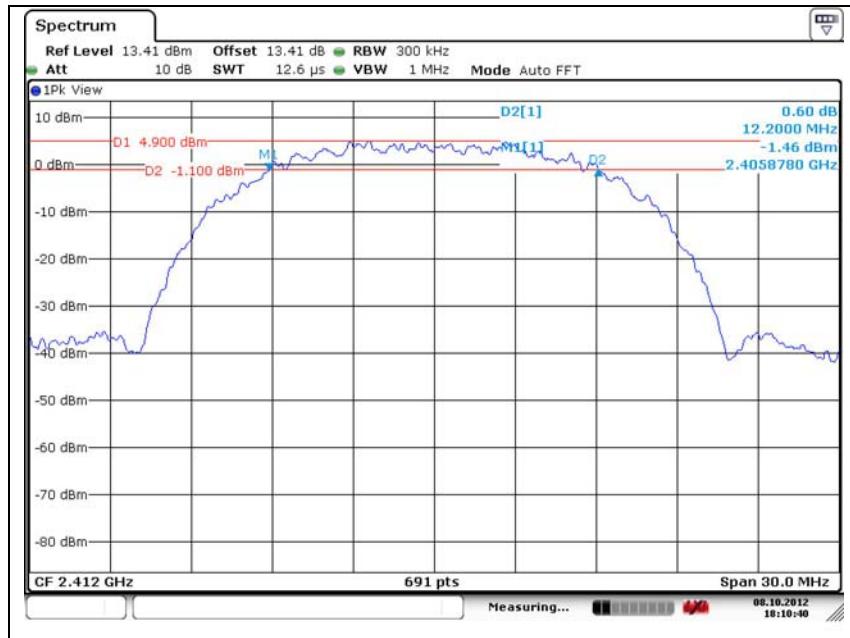


Middle channel // 802.11b // 6 dB bandwidth

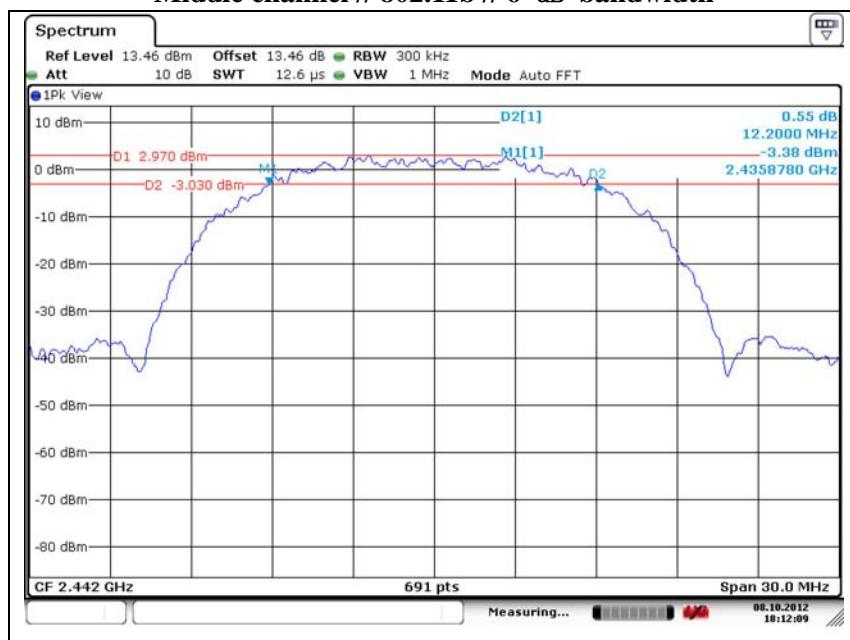


High channel // 802.11b // 6 dB bandwidth

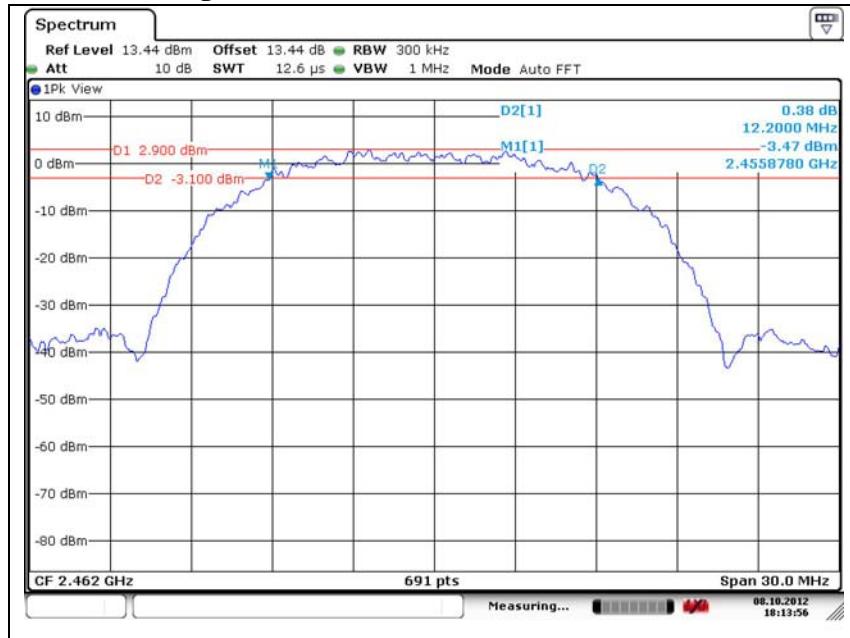


Low channel // 802.11g // 6 dB bandwidth

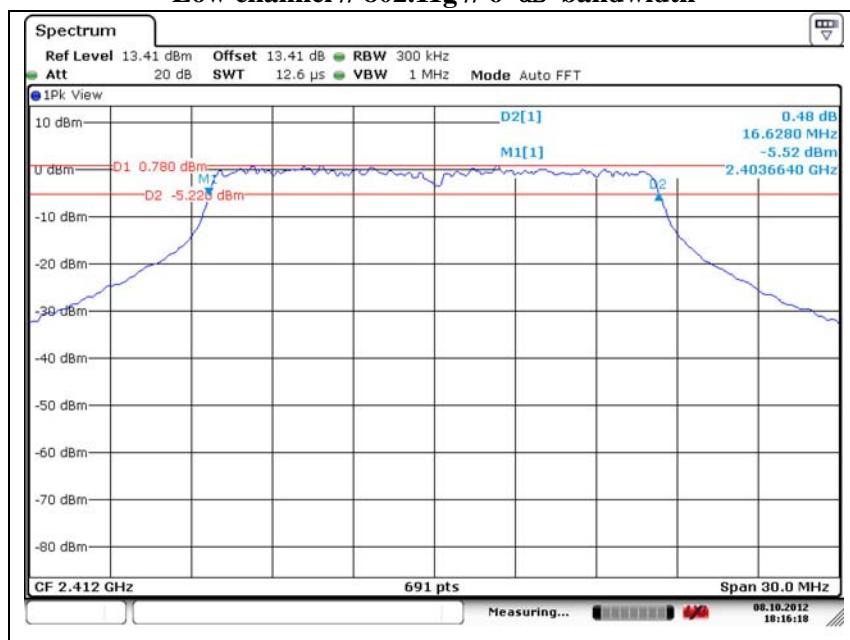


Middle channel // 802.11g // 6 dB bandwidth

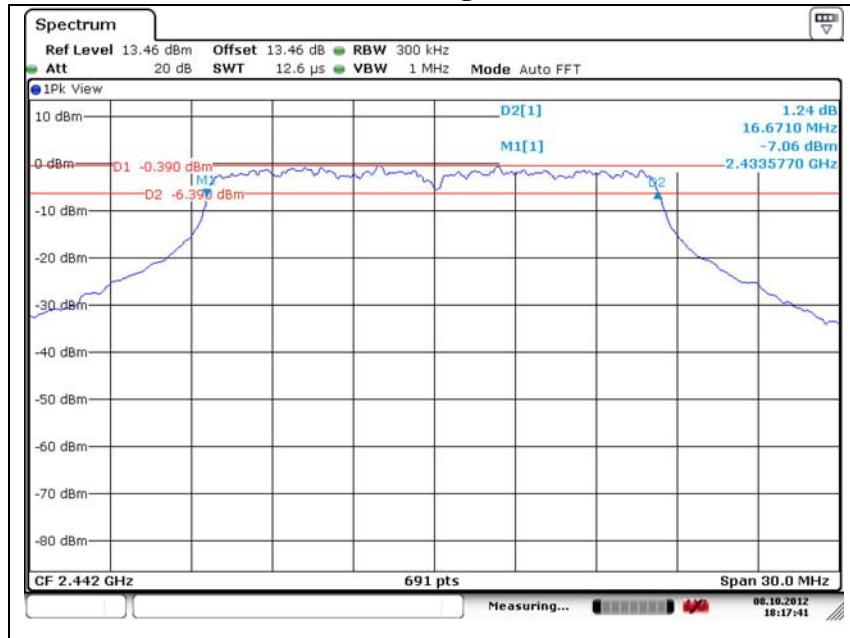

High channel // 802.11g // 6 dB bandwidth

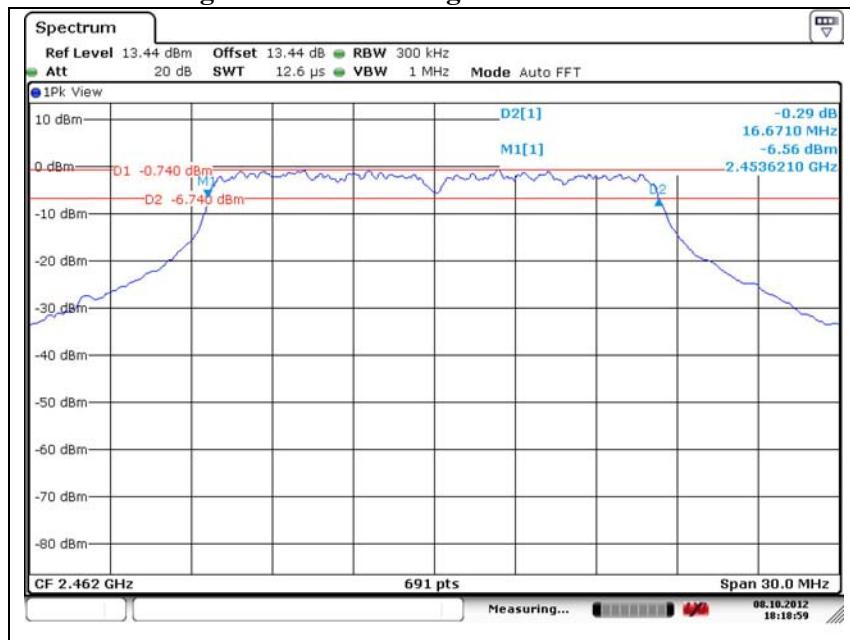


Low channel // 802.11b // 99 % occupied bandwidth

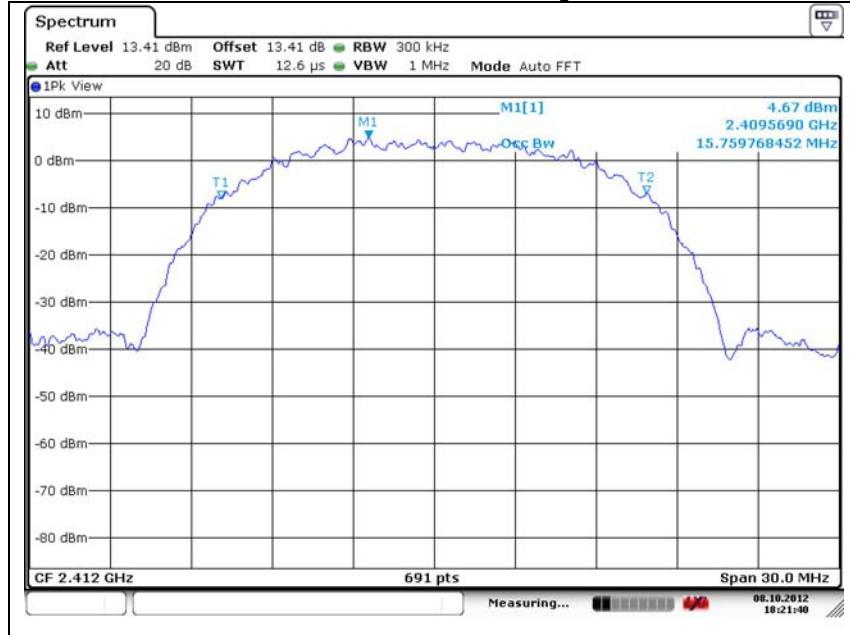


Middle channel // 802.11b // 99 % occupied bandwidth



High channel // 802.11b // 99 % occupied bandwidth

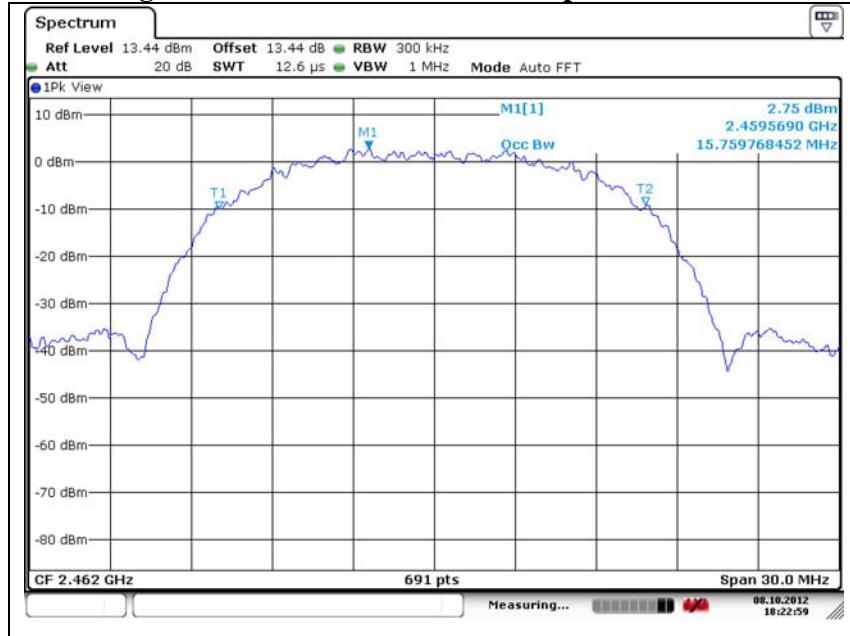


Low channel // 802.11g // 99 % occupied bandwidth

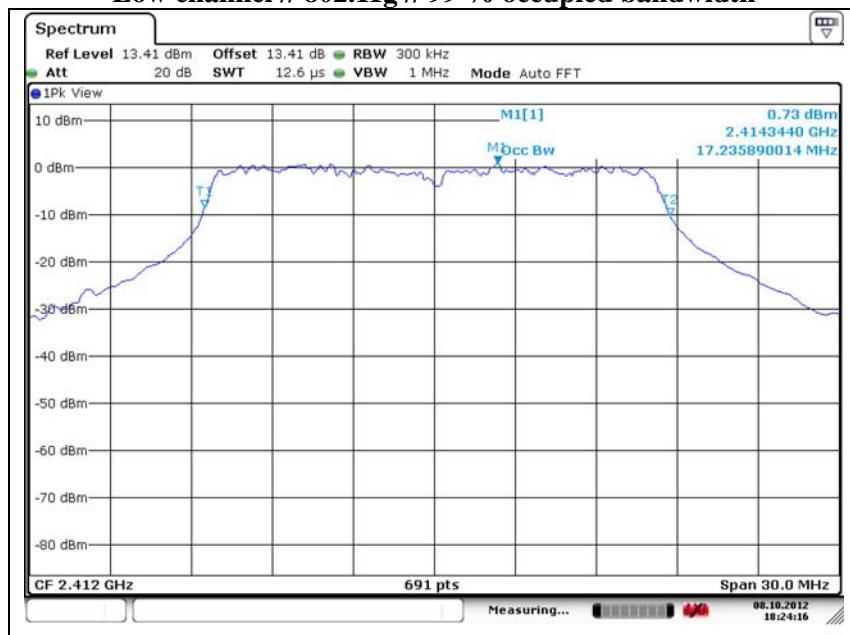

Middle channel // 802.11g // 99 % occupied bandwidth




High channel // 802.11g // 99 % occupied bandwidth

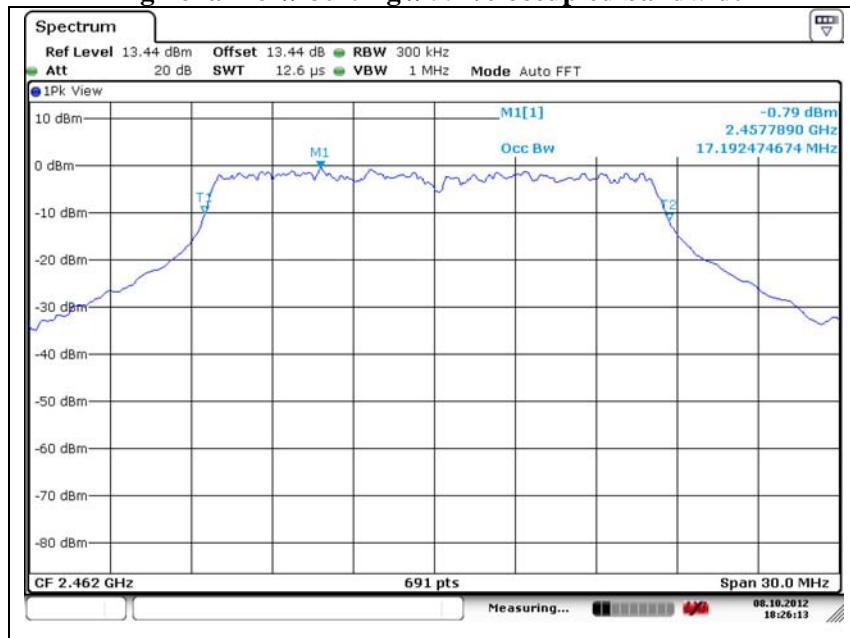

2.1.3 Output power

Test setup

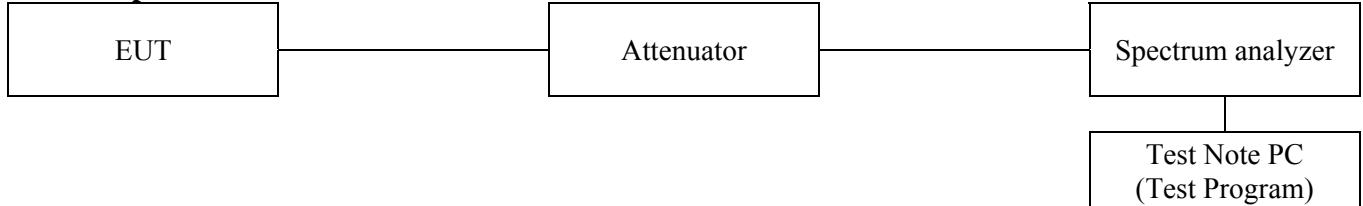

Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmit-ting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test results

Test mode	Frequency(MHz)	Detector mode	Results (dBm)	Limit(dBm)
802.11b (5.5 Mbps)	2 412	Peak	15.05	30
		Average	11.98	
	2 442	Peak	12.98	
		Average	10.02	
	2 462	Peak	12.81	
		Average	9.88	
802.11g (12 Mbps)	2 412	Peak	20.15	
		Average	9.68	
	2 442	Peak	18.69	
		Average	8.19	
	2 462	Peak	18.61	
		Average	7.99	

2.1.4 Power spectral density

Test setup



Test procedure

The testing follows KDB publication No. 558074 D01 DTS measurement.

Measurement procedure PKPSD

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 100 kHz.
3. Set the VBW \geq 300 kHz.
4. Set the span to 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$.
11. The resulting peak PSD level must be $\leq 8 \text{ dBm}$.


Limit

According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


Test results

Operation mode	Frequency(MHz)	Measured PSD(dBm)	BWCF(dB)	Corrected PSD(dBm)	Limit(dBm)
802.11b (5.5 Mbps)	2 412	0.86	-15.2	-14.34	8
	2 442	-0.94		-16.14	
	2 462	-1.03		-16.23	
802.11g (12 Mbps)	2 412	-2.17	-15.2	-17.37	8
	2 442	-3.61		-18.81	
	2 462	-3.98		-19.18	


802.11b // Low channel

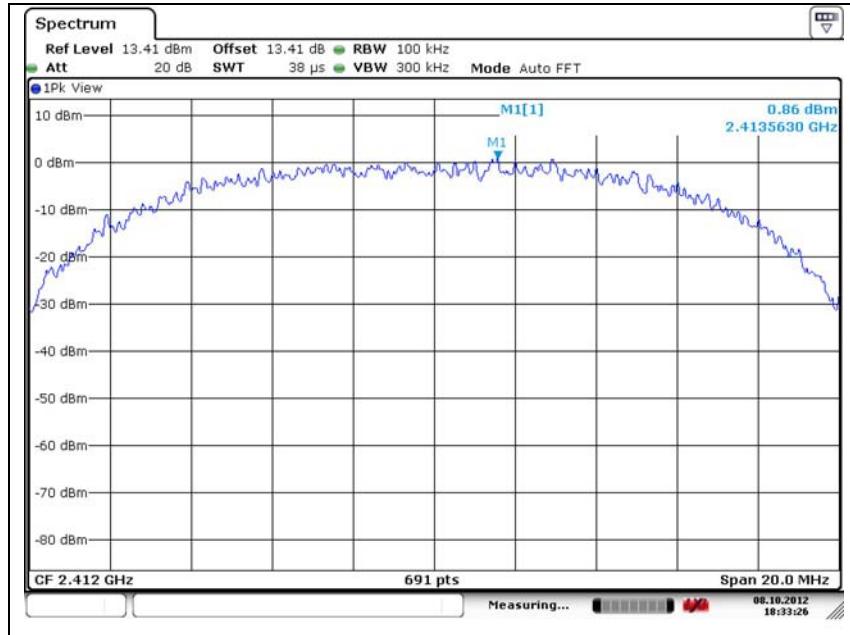


802.11b // Middle channel

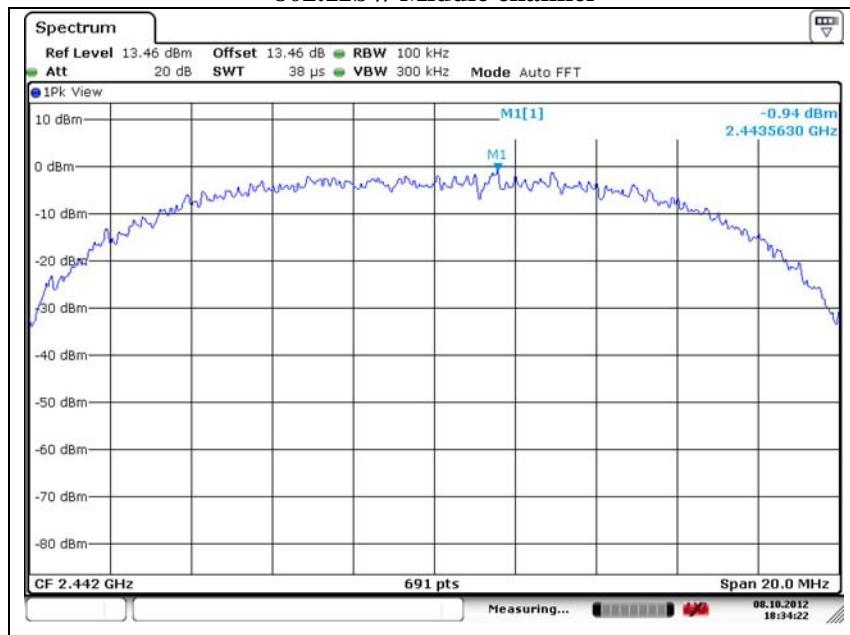


802.11b // High channel

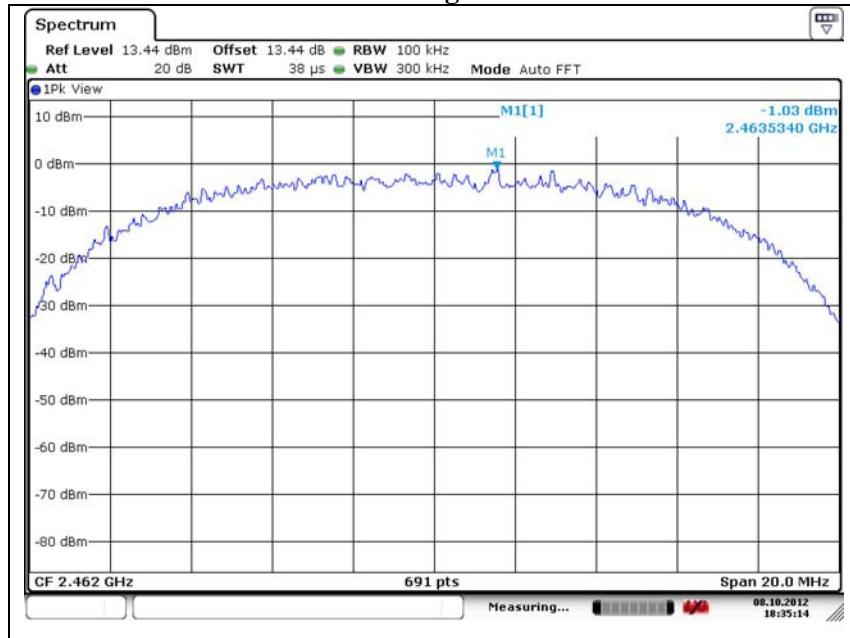


802.11g // Low channel

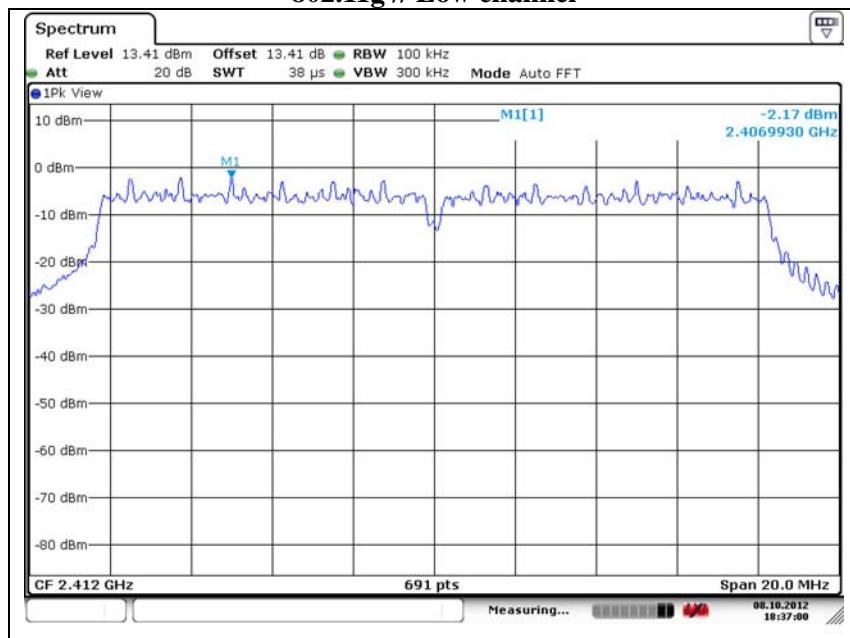

802.11g // Middle channel

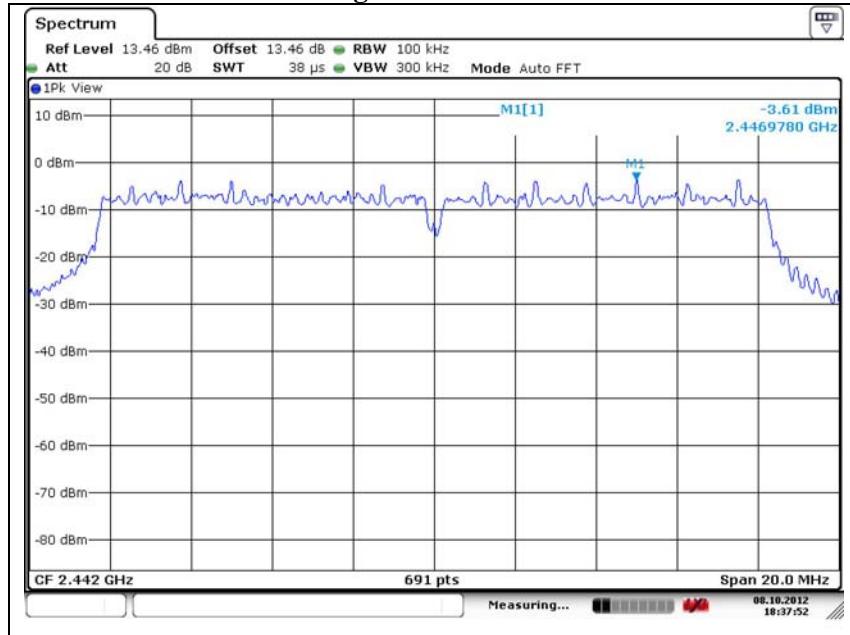


802.11g // High channel

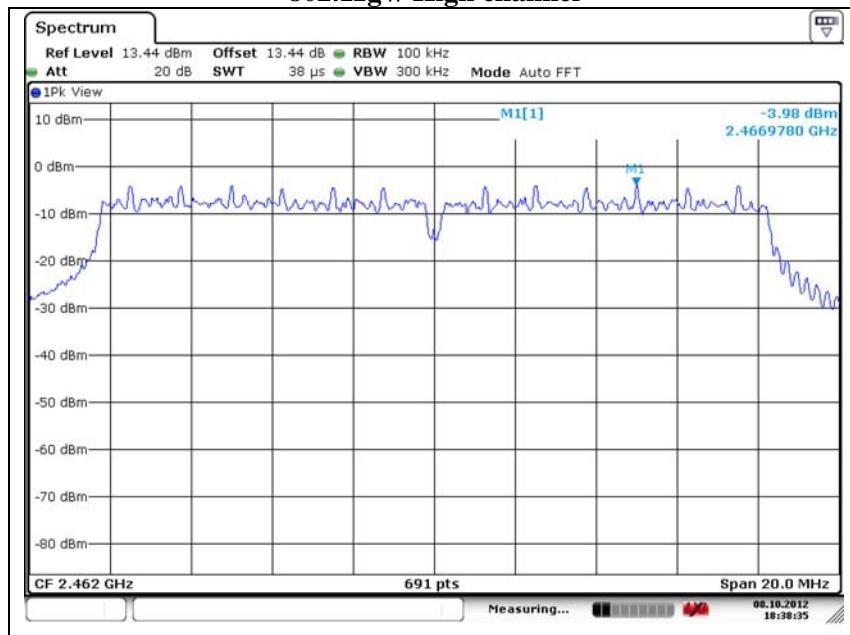


2.1.5 Radiated spurious emissions and conducted spurious emissions

Test setup for radiated spurious emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

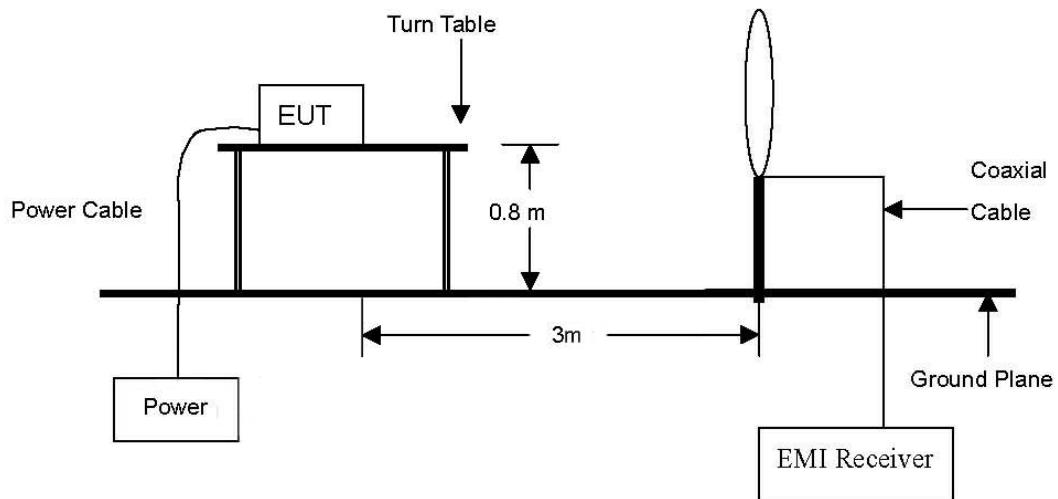


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

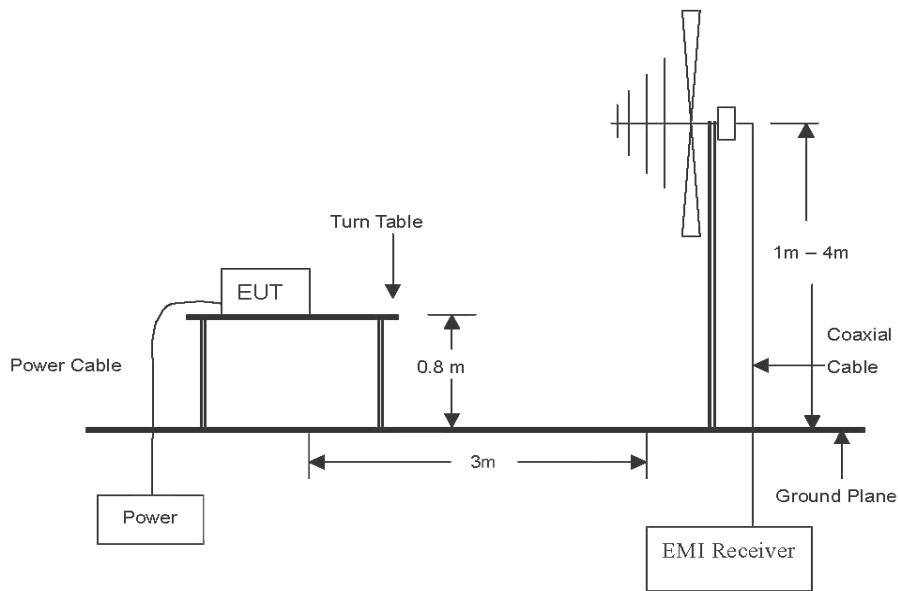

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz emissions.

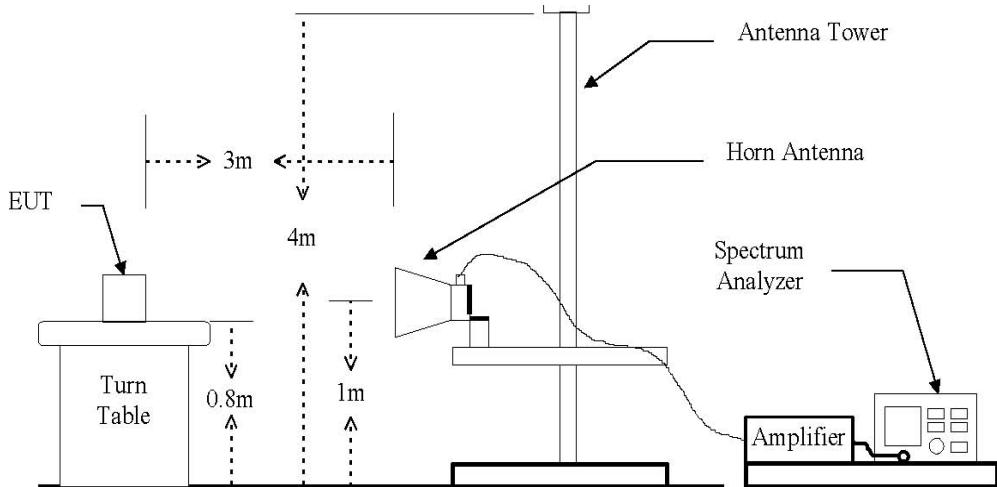

Test setup for conducted spurious emissions



Test procedures for radiated spurious emissions

Radiated emissions from the EUT were measured according to the dictates in section 5.4 of KDB 558074

[9 kHz to 30 MHz]

The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Quasi-peak function and specified bandwidth with maximum hold mode.

The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 200 Hz for Quasi-peak detection (QP) at frequency below 9 kHz~ 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 9 kHz for Quasi-peak detection (QP) at frequency below 150 kHz~ 30 MHz.

[30 MHz to 1 GHz and 1 GHz to 24 GHz]

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

Note;

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

Test procedure for conducted spurious emissions

Per the guidance of KDB 558074, section 5.4.1.1, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in page 48 of the test report. The limit for out of band spurious emission at the band edge is 20dB below the fundamental emission level measured in a 100 kHz bandwidth.



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Limit for radiated spurious emissions

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2400 / F(kHz)
0.490 ~ 1.705	30	24000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Limit for conducted spurious emission

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test results (Below 30 MHz) – Worst case configuration: 802.11g

The frequency spectrum from 9 kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

Radiated emissions		Ant.	Correction factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	F _d (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Below 30	Not detected							

※ Remark

1. All spurious emission at channels are almost the same below 30 MHz, so that high channel was chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss + F_d
3. F_d = 40log(D_m / D_s)

Where:

F_d = Distance factor in dB
D_m = Measurement distance in meters
D_s = Specification distance in meters



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test results (Below 1 000 MHz) – Worst case configuration: 802.11g

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.


Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
76.1	24.27	H	10.25	1.60	36.12	40.00	3.88
76.1	23.39	V	10.25	1.60	35.24	40.00	4.76
112.5	24.94	V	10.26	2.01	37.21	43.50	6.29
144.0	23.23	H	12.81	2.31	38.35	43.50	5.15
221.6	28.40	H	10.69	3.05	42.14	46.00	3.86
221.6	26.25	V	10.69	3.05	39.99	46.00	6.01
274.9	24.36	H	12.51	3.45	40.32	46.00	5.68
287.1	24.12	H	12.92	3.53	40.57	46.00	5.43
384.1	22.24	V	15.25	4.13	41.62	46.00	4.38
391.3	21.55	H	15.41	4.17	41.13	46.00	4.87
403.5	21.36	V	15.68	4.24	41.28	46.00	4.72
532.0	17.99	V	18.37	4.99	41.35	46.00	4.65

※ Remark


1. All spurious emission at channels are almost the same below 1 GHz, so that middle channel was chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss
3. Detector mode: Quasi peak
4. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

Test results (Above 1 000 MHz)


802.11b // Low channel // Peak, Horizontal

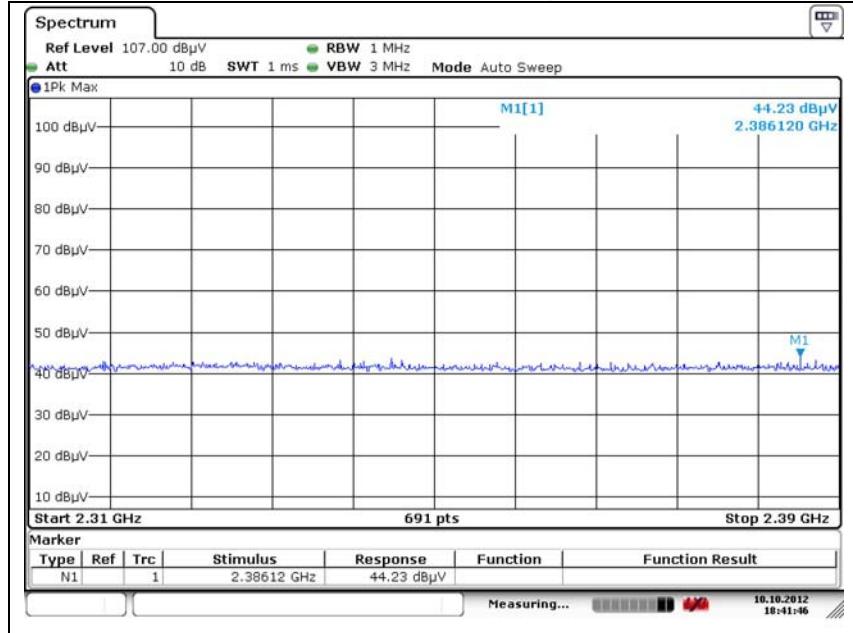


802.11b // Low channel // Peak, Vertical

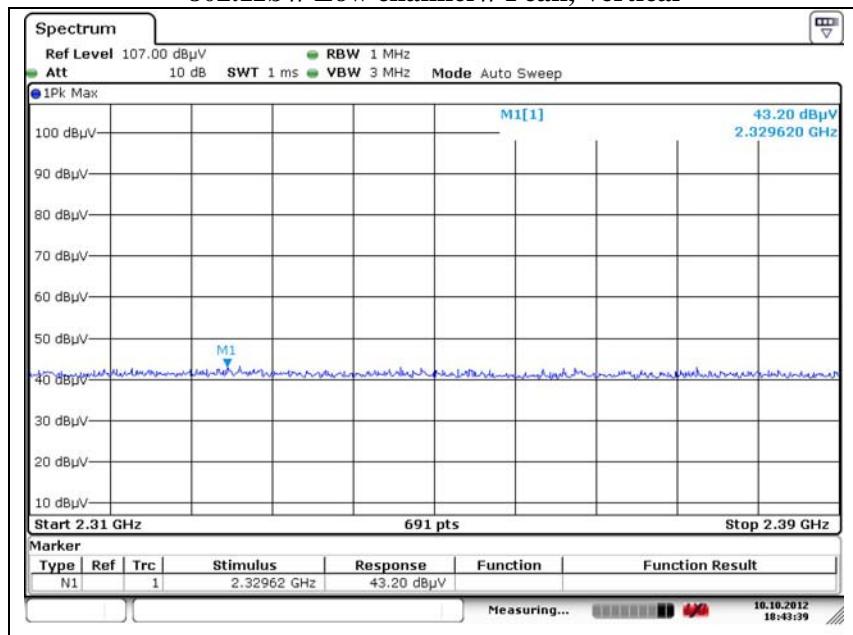

802.11b // High channel // Peak, Horizontal

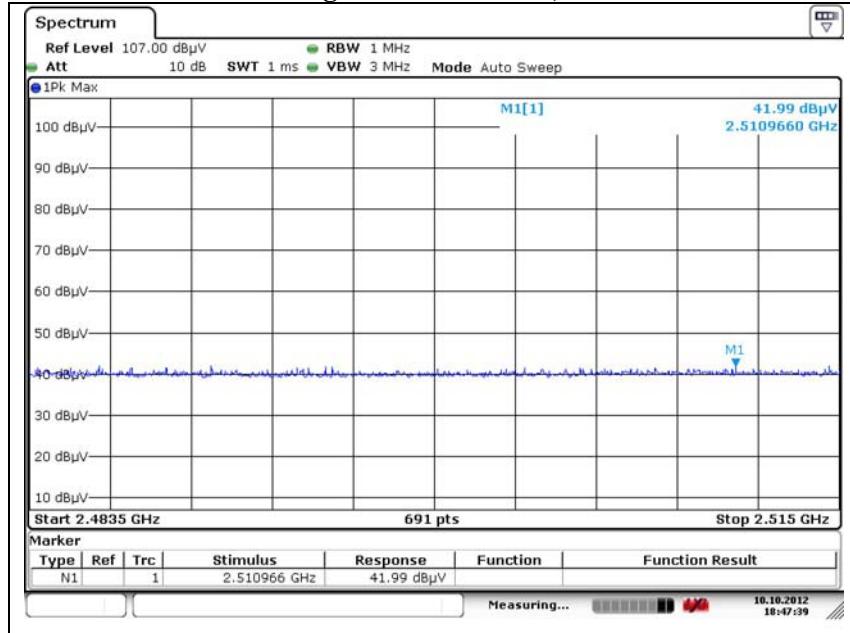

802.11b // High channel // Peak, Vertical

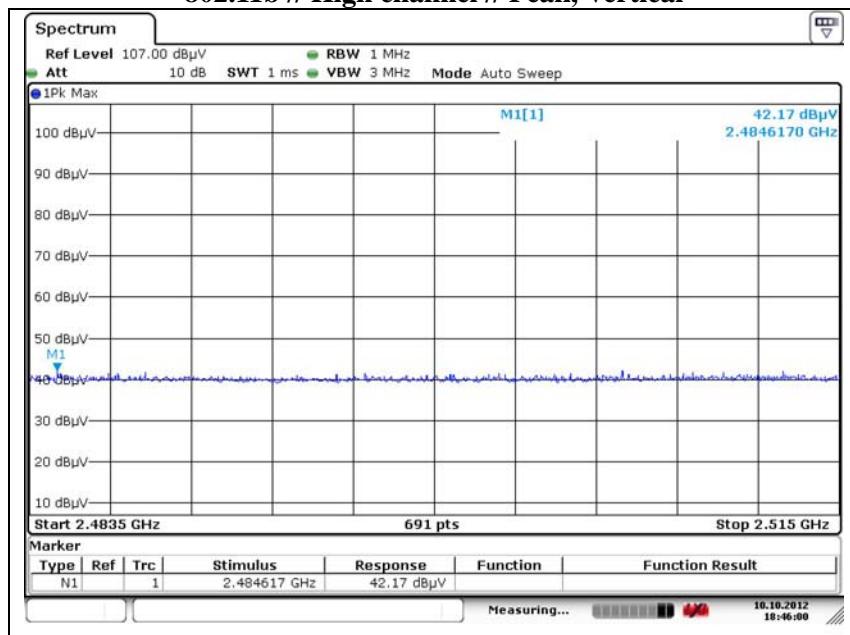



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

The frequency spectrum from 2.5 GHz to 25 GHz was investigated. No Emissions were found above 20 dB below the limit.

802.11b // Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2 386.1	44.23	Peak	H	28.30	-38.88	33.65	74.00	40.35
2 329.6	43.20	Peak	V	28.19	-38.99	32.40	74.00	41.60

802.11b // Middle channel



Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
Above 1 000	Not detected	-	-	-	-	-	74.00	-

802.11b // High channel


Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2 510.9	41.99	Peak	H	28.56	-38.69	31.86	74.00	42.14
2 484.6	42.17	Peak	V	28.50	-38.73	31.94	74.00	42.06

※ Remark


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

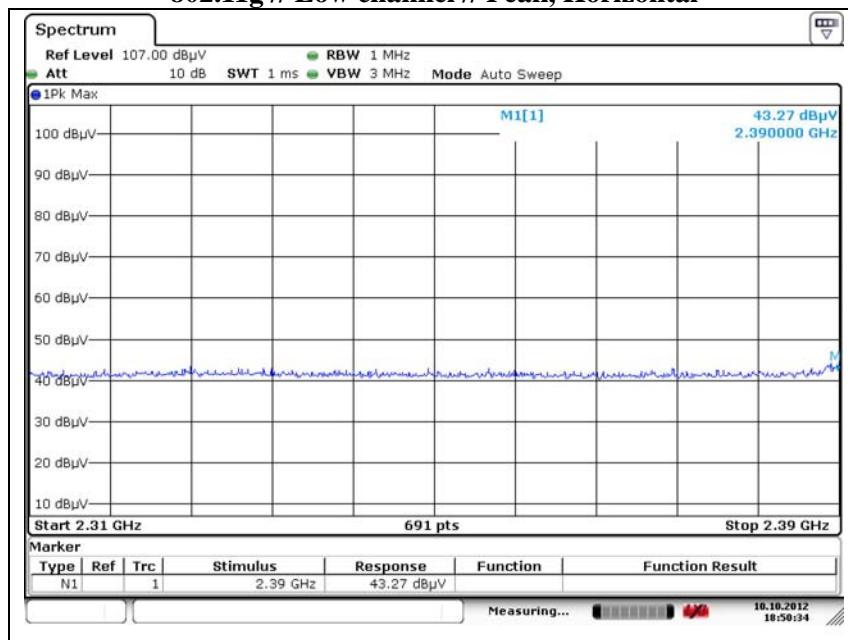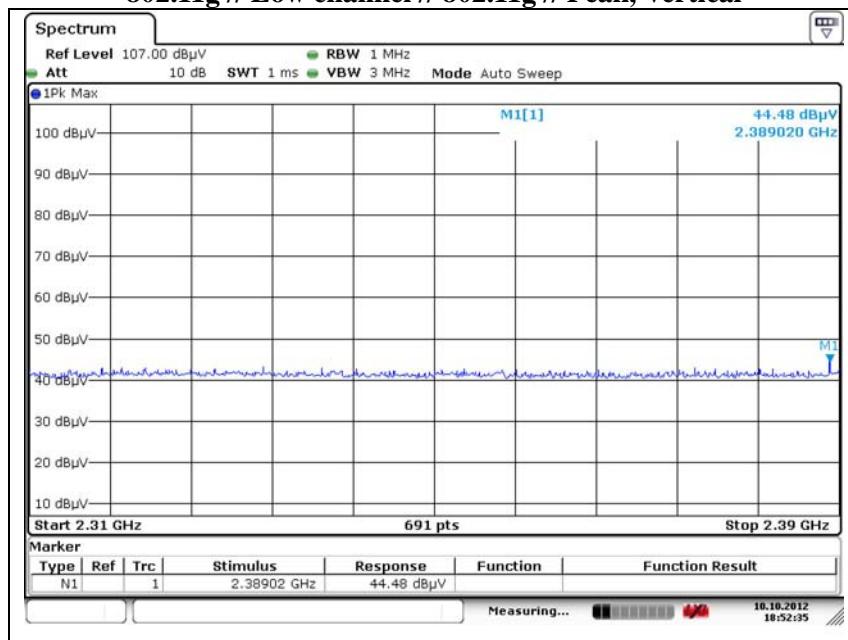802.11g // Low channel // Peak, Horizontal

802.11g // Low channel // 802.11g // Peak, Vertical

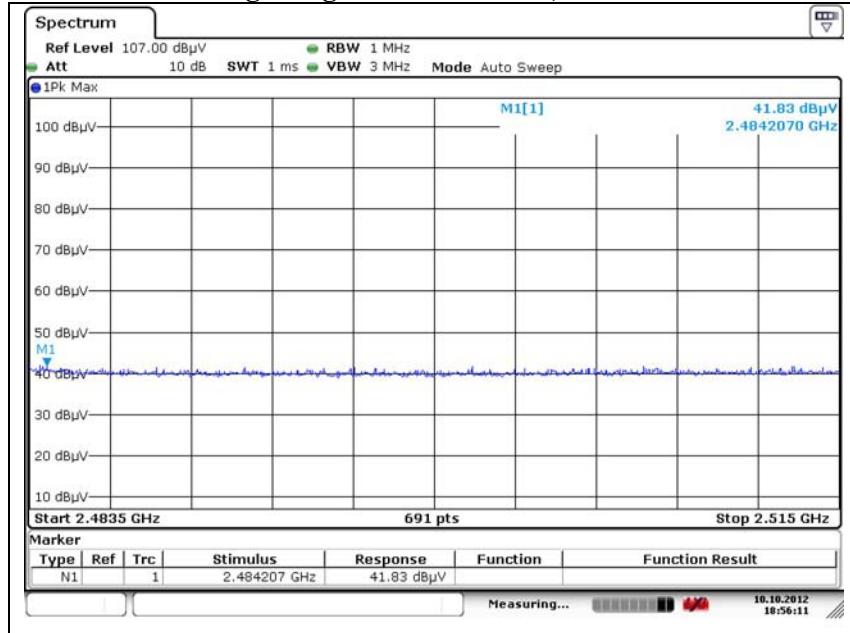
802.11g // High channel // Peak, Horizontal

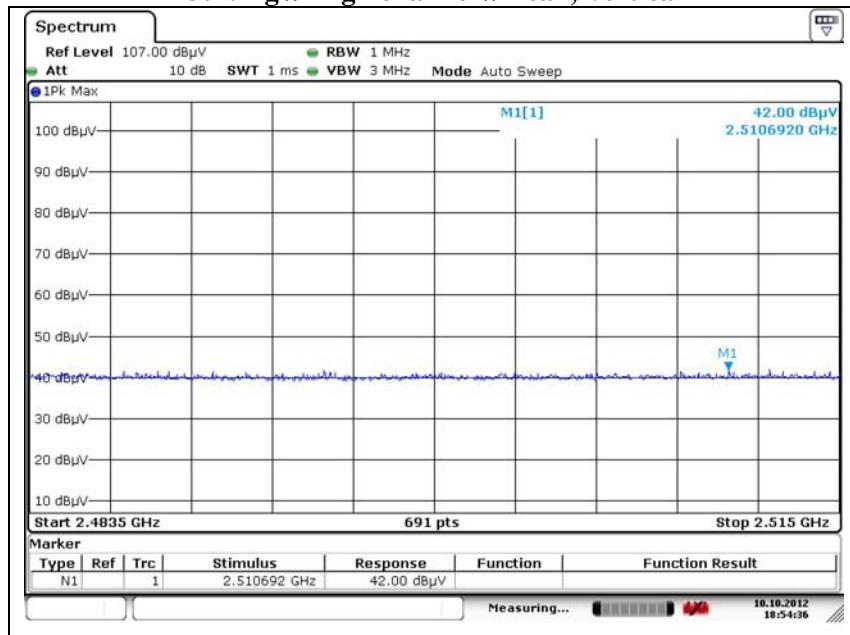

802.11g // High channel // Peak, Vertical





KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

The frequency spectrum from 2.5 GHz to 25 GHz was investigated. No Emissions were found above 20 dB below the limit.

802.11g // Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2 390.0	43.27	Peak	H	28.31	-38.88	32.70	74.00	41.30
2 389.0	44.48	Peak	V	28.31	-38.88	33.91	74.00	40.09

802.11g // Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
Above 1 000	Not detected	-	-	-	-	-	74.00	-

802.11g // High channel



Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2 484.2	41.83	Peak	H	28.50	-38.73	31.60	74.00	42.40
2 510.6	42.00	Peak	V	28.56	-38.69	31.86	74.00	42.14

※ Remark


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

Test results: conducted spurious emission

802.11b // Low channel

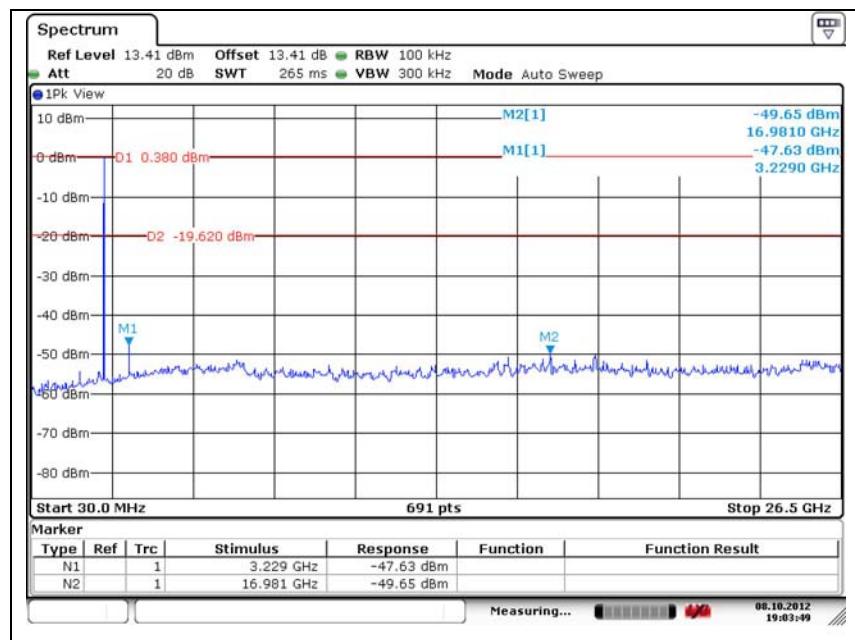
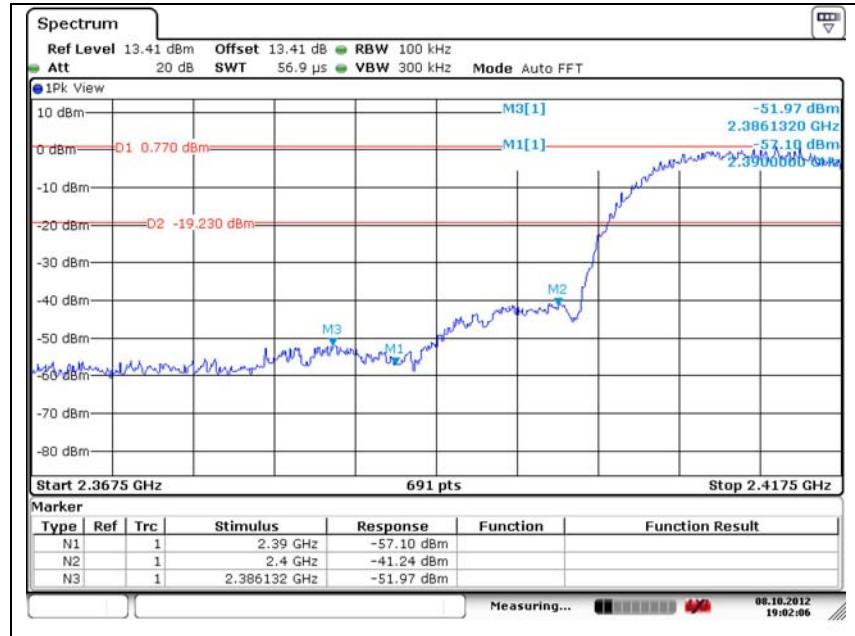


802.11b // Middle channel


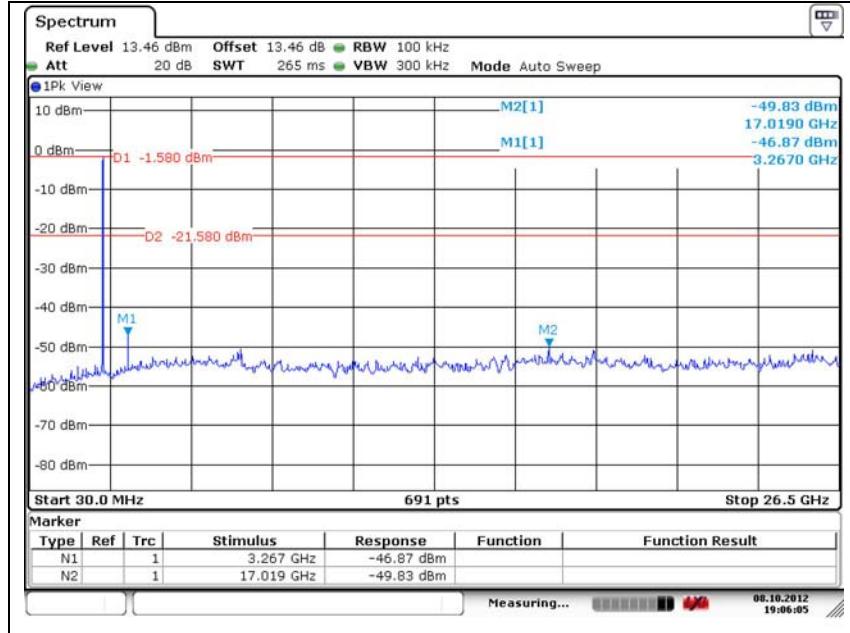


N/A


802.11b // High channel

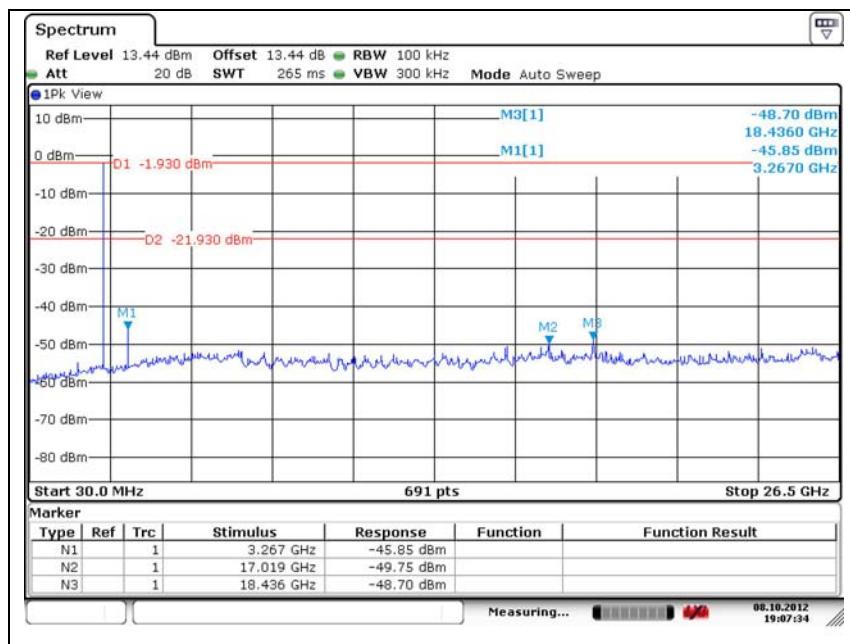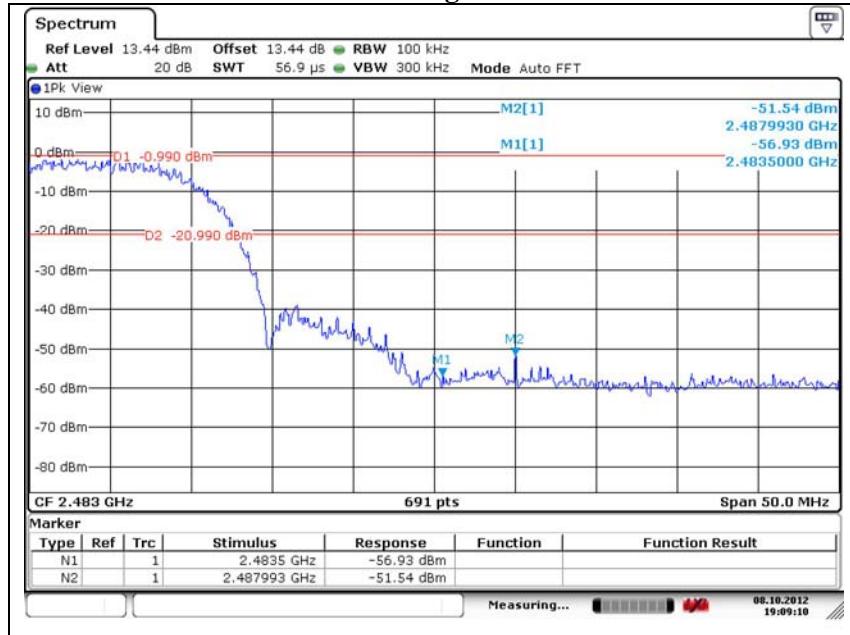

802.11g // Low channel

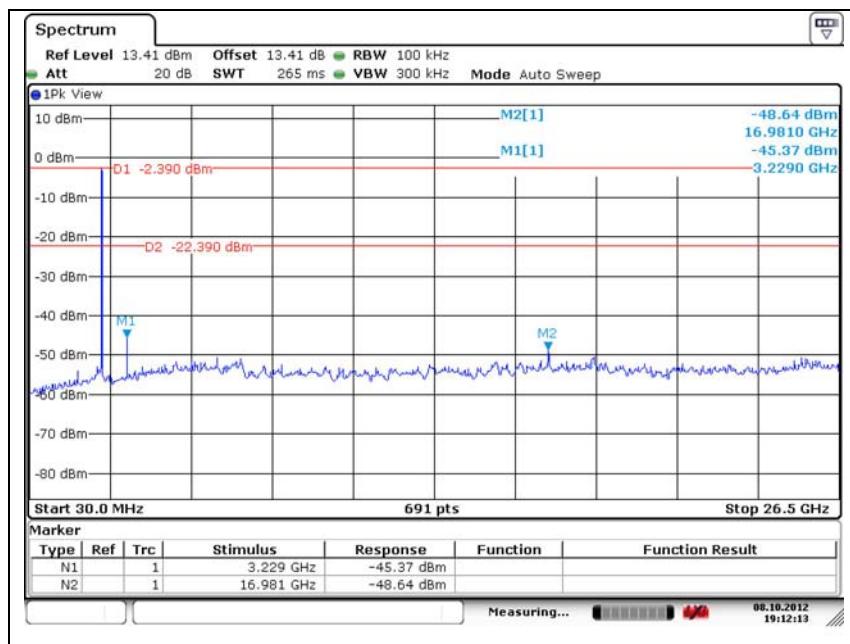
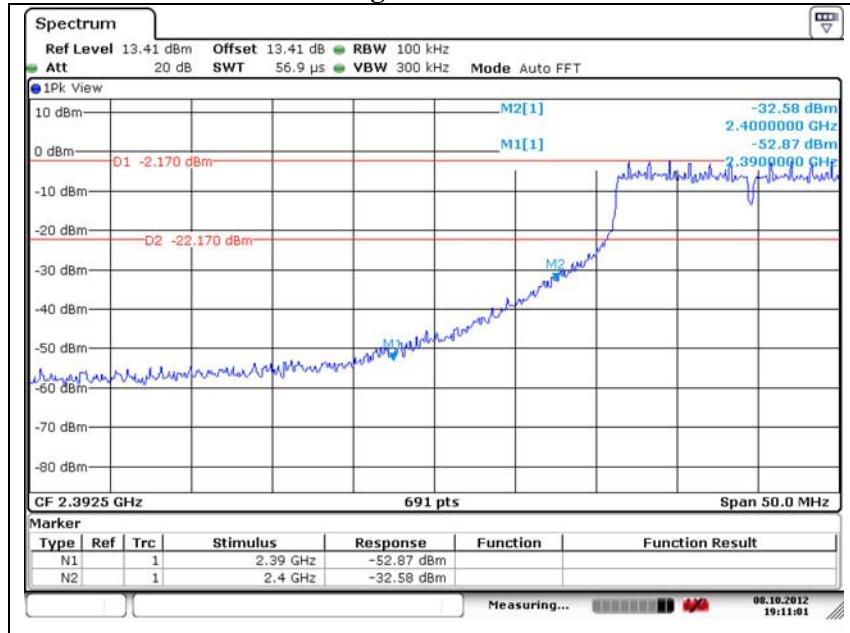


802.11g // Middle channel

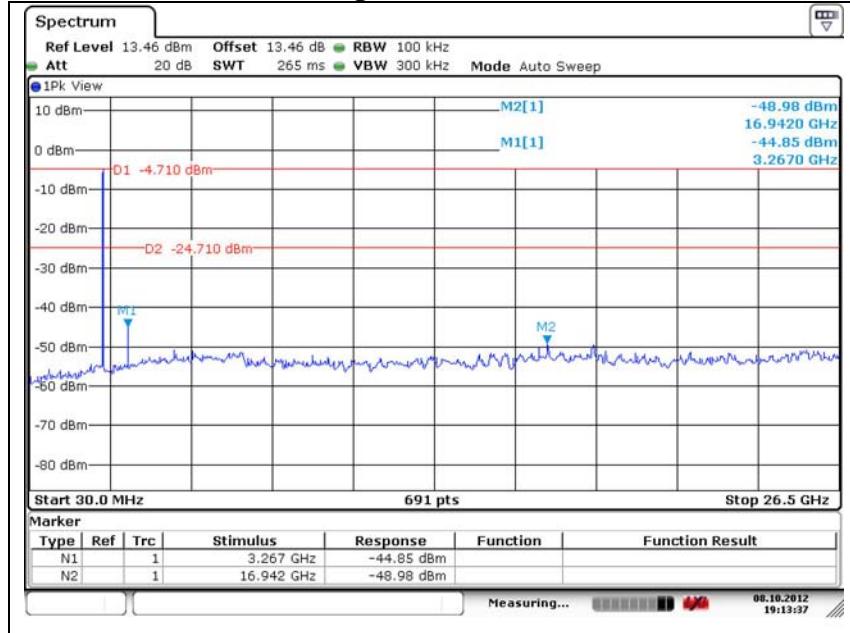

N/A

802.11g // High channel

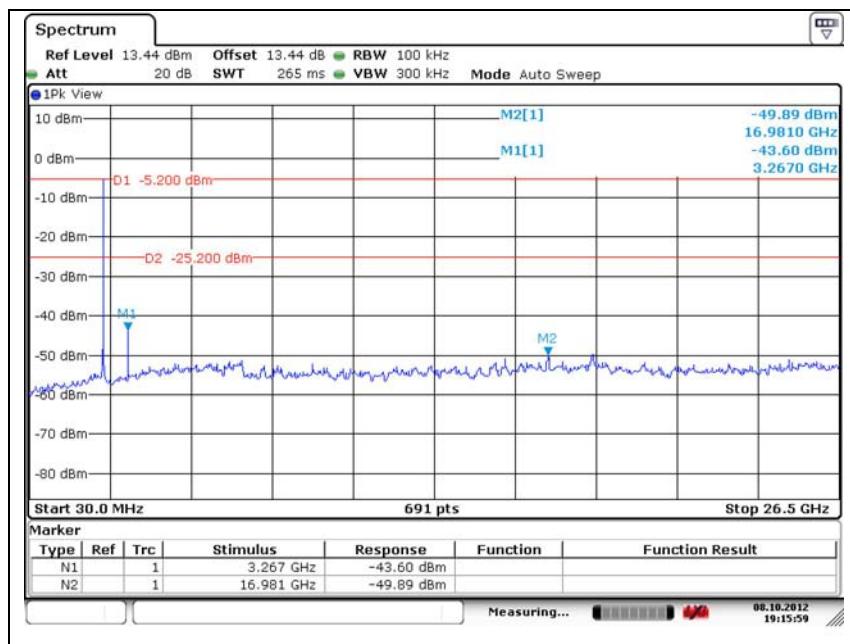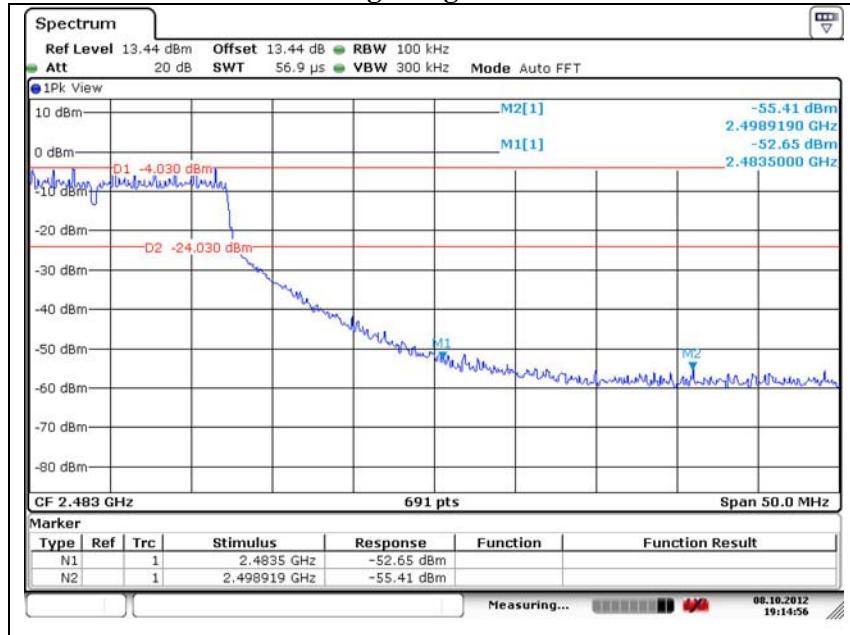

2.1.6 AC conducted emissions

Frequency range of measurement

150 kHz to 30 MHz

Instrument settings

IF Band Width: 9 kHz

Test procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m. Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Remark

Decreases with the logarithm of the frequency.

Test results

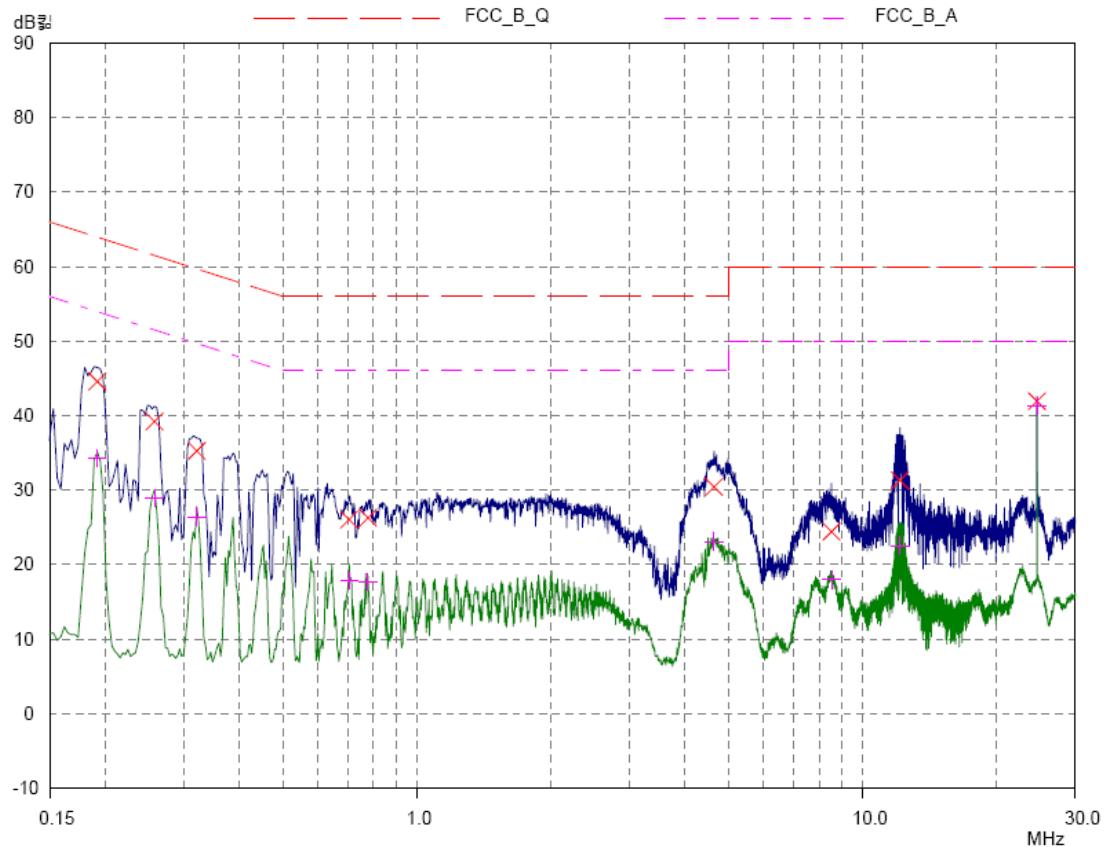

Final Measurement Results

Frequency MHz	QP Level dB μ	QP Limit dB μ	QP Delta dB
------------------	----------------------	----------------------	----------------


0.192	44.56	63.95	19.39
0.258	39.20	61.50	22.30
0.321	35.25	59.68	24.43
0.705	26.06	56.00	29.94
0.777	26.28	56.00	29.72
4.647	30.41	56.00	25.59
8.517	24.42	60.00	35.58
12.135	31.31	60.00	28.69
24.627	41.92	60.00	18.08

Frequency MHz	AV Level dB μ	AV Limit dB μ	AV Delta dB
------------------	----------------------	----------------------	----------------

0.192	34.30	53.95	19.65
0.258	28.93	51.50	22.57
0.321	26.39	49.68	23.29
0.705	17.84	46.00	28.16
0.777	17.63	46.00	28.37
4.647	23.07	46.00	22.93
8.517	17.96	50.00	32.04
12.135	22.56	50.00	27.44
24.627	41.32	50.00	8.68

Note;

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

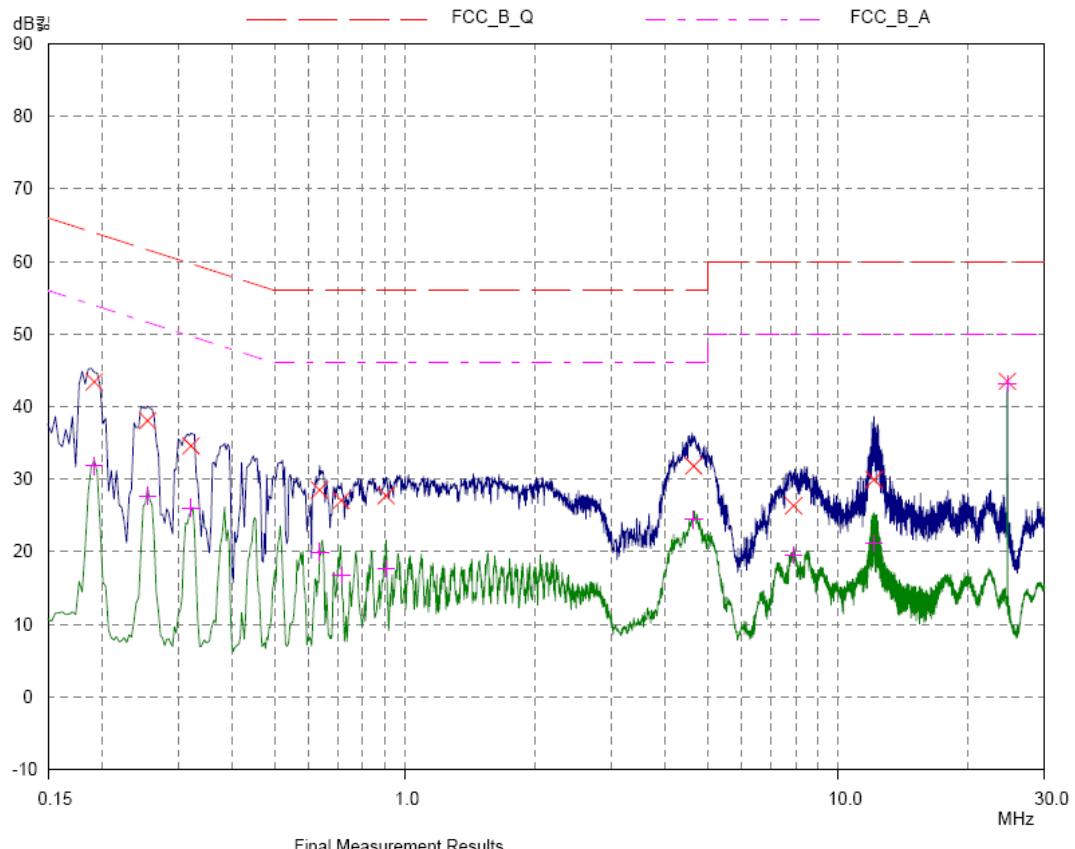

Final Measurement Results

Frequency MHz	QP Level dB _{1/2 octave}	QP Limit dB _{1/2 octave}	QP Delta dB
0.192	43.38	63.95	20.57
0.255	38.04	61.59	23.55
0.321	34.57	59.68	25.11
0.636	28.49	56.00	27.51
0.714	27.05	56.00	28.95
0.906	27.72	56.00	28.28
4.647	31.80	56.00	24.20
7.905	26.31	60.00	33.69
12.117	29.93	60.00	30.07
24.627	43.46	60.00	16.54

Frequency MHz	AV Level dB _{1/2 octave}	AV Limit dB _{1/2 octave}	AV Delta dB
0.192	31.83	53.95	22.12
0.255	27.71	51.59	23.88
0.321	26.06	49.68	23.62
0.636	19.95	46.00	26.05
0.714	16.79	46.00	29.21
0.906	17.65	46.00	28.35
4.647	24.45	46.00	21.55
7.905	19.49	50.00	30.51
12.117	21.21	50.00	28.79
24.627	43.12	50.00	6.88

Note;

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).



KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Appendix A. Test equipment used for test

Equipment	Manufacturer	Model	Calibration due.
Spectrum Analyzer	R&S	FSV30	2013.01.10
8360B Series Swept Signal Generator	HP	83630B	2013.06.06
Attenuator	HP	8495B	2013.05.04
Attenuator	HP	8494B	2013.05.04
AC POWER SOURCE ANALYZER	HP	6813A	2013.07.06
Loop Antenna	R&S	HFH2-Z2.335.4711.52	2013.03.10
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	2013.10.25
Horn Antenna	A.H. System	SAS-571	2013.03.22
Horn Antenna	A.H. System	SAS-572	2013.09.07
High Pass Filter	Wainwright Instrument	WHJS3000-10TT	2013.01.10
Preamplifier	A.H. System	PAM-0118	2013.05.04
Power Amplifier	MITEQ	AFS43-01002600	2013.10.07
EMC Analyzer	Agilent	E7405A	2013.05.04
EMI TEST Receiver	R & S	ESHS10	2013.05.04
LISN	R & S	ENV216	2013.02.27
LISN	EMCO	3810/2	2013.04.18
Wideband Power Sensor	R&S	NRP-Z81	2012-12-21

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
N/A			

Appendix B. Test setup photos

Radiated field emissions



AC conducted emission