


Appendix B

RF power output conducted

**FCC part 15.247
OUTPUT POWER CONDUCTED**

EUT	TRANSMITTER AND RECEIVER FOR REMOTE CONTROL OF AUXILIARY CAR HEATING
Model	TELESTART T91
Approval Holder	DIGADES GmbH
Temperature / Voltage	23°C / Unom.: 3.0 V DC (BATTERY)
Test Site / Operator	ETS / Mr. Schlaps
Test Specification	FCC part 15.247 (b) Power Output

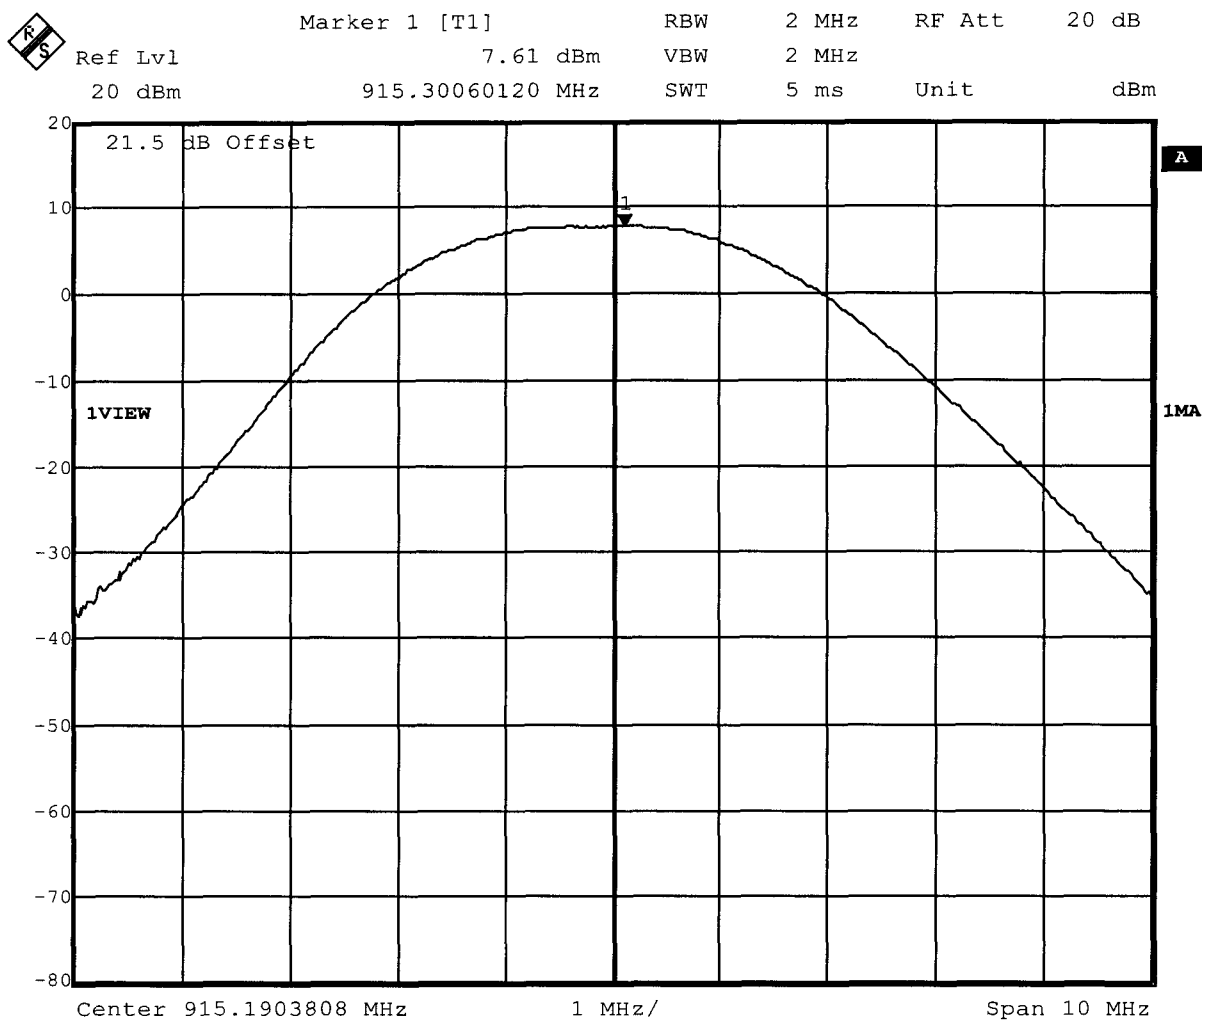

Date: 24.NOV.2006 09:37:57

Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN


Page 1 of 1

Appendix C

RF power output radiated (EIRP)


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 915.220MHz, Pmax: -8.44dBm, RBW: 1MHz

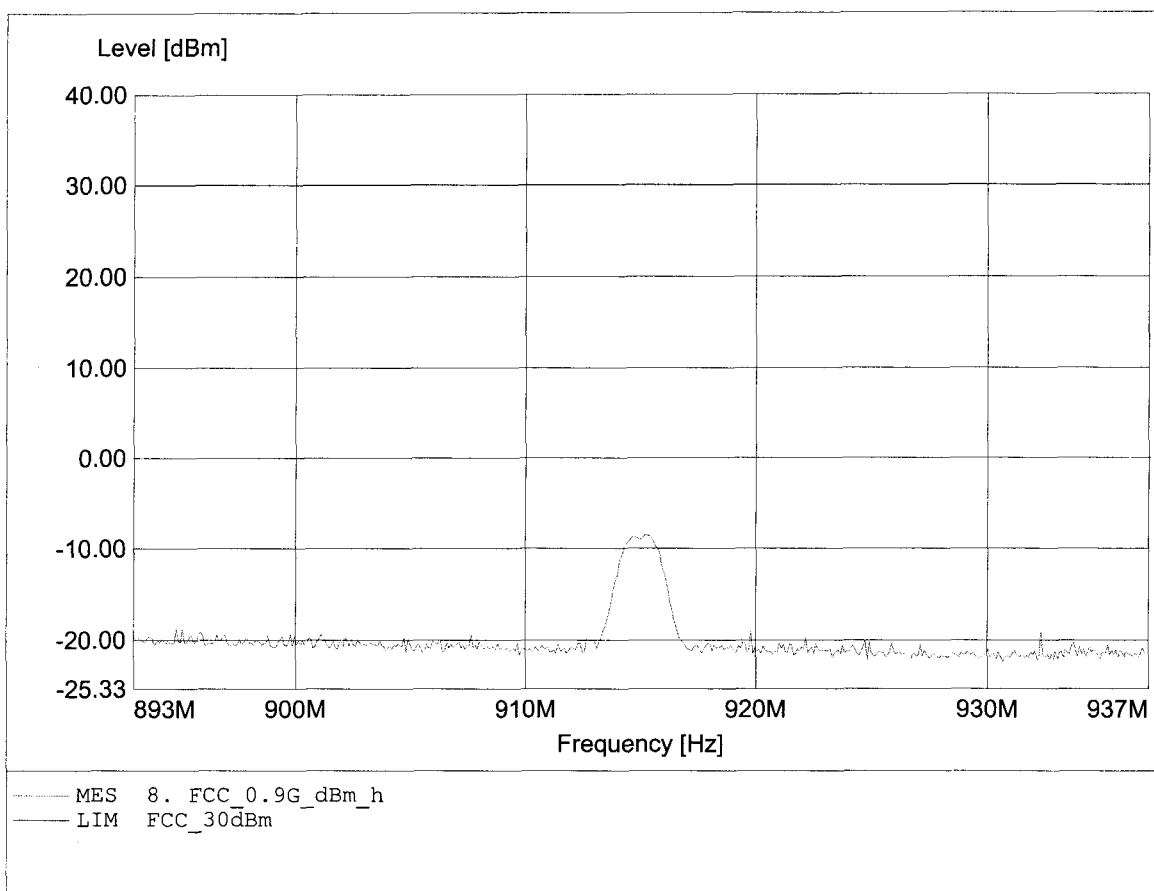

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 915.220MHz, Pmax: 7.64dBm, RBW: 1MHz

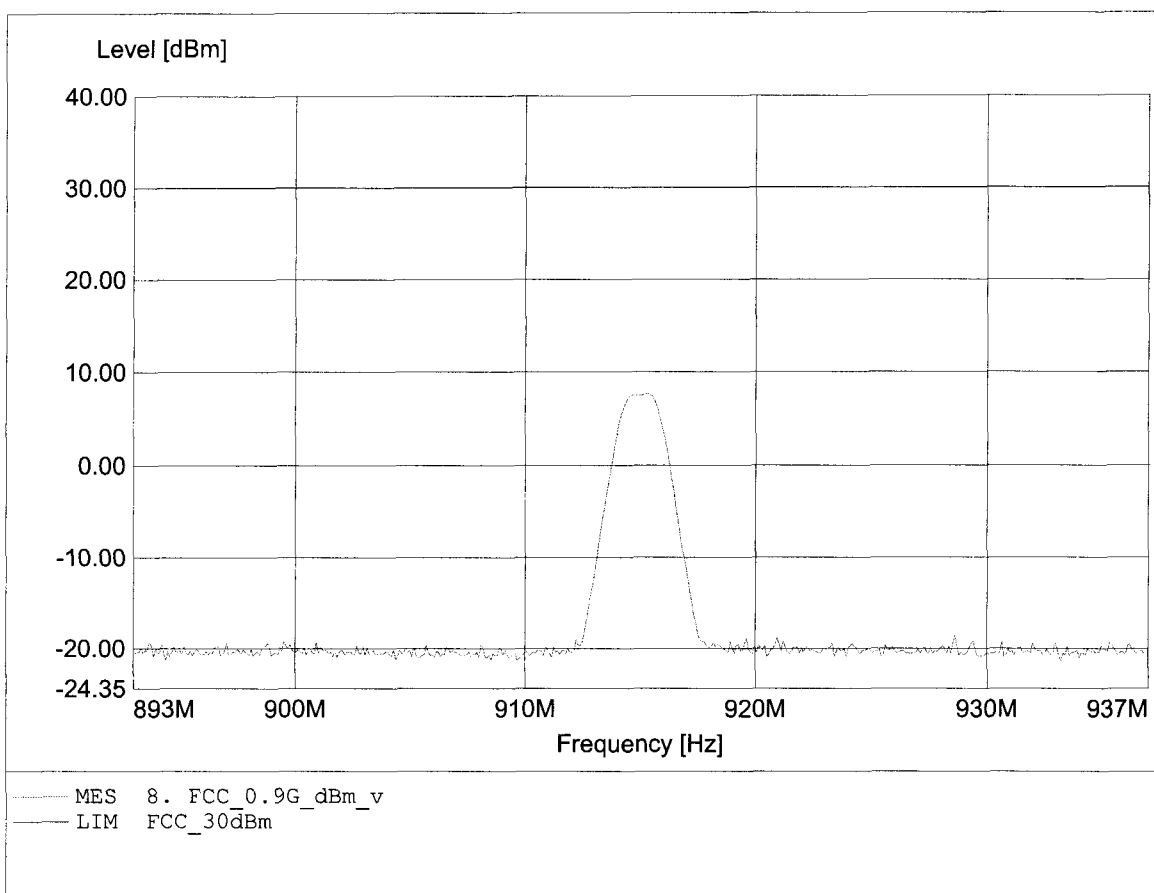


Appendix D

6 dB bandwidth

**FCC part 15.247
BANDWIDTH**

EUT	TRANSMITTER AND RECEIVER FOR REMOTE CONTROL OF AUXILIARY CAR HEATING
Model	TELESTART T91
Approval Holder	DIGADES GmbH
Temperature / Voltage	23°C / Unom.: 3.0 V DC (BATTERY)
Test Site / Operator	ETS / Mr. Schlaps
Test Specification	FCC part 15.247 (a)(2) Bandwidth
Comment 1	The 6 dB bandwidth must be greater than 500 kHz.

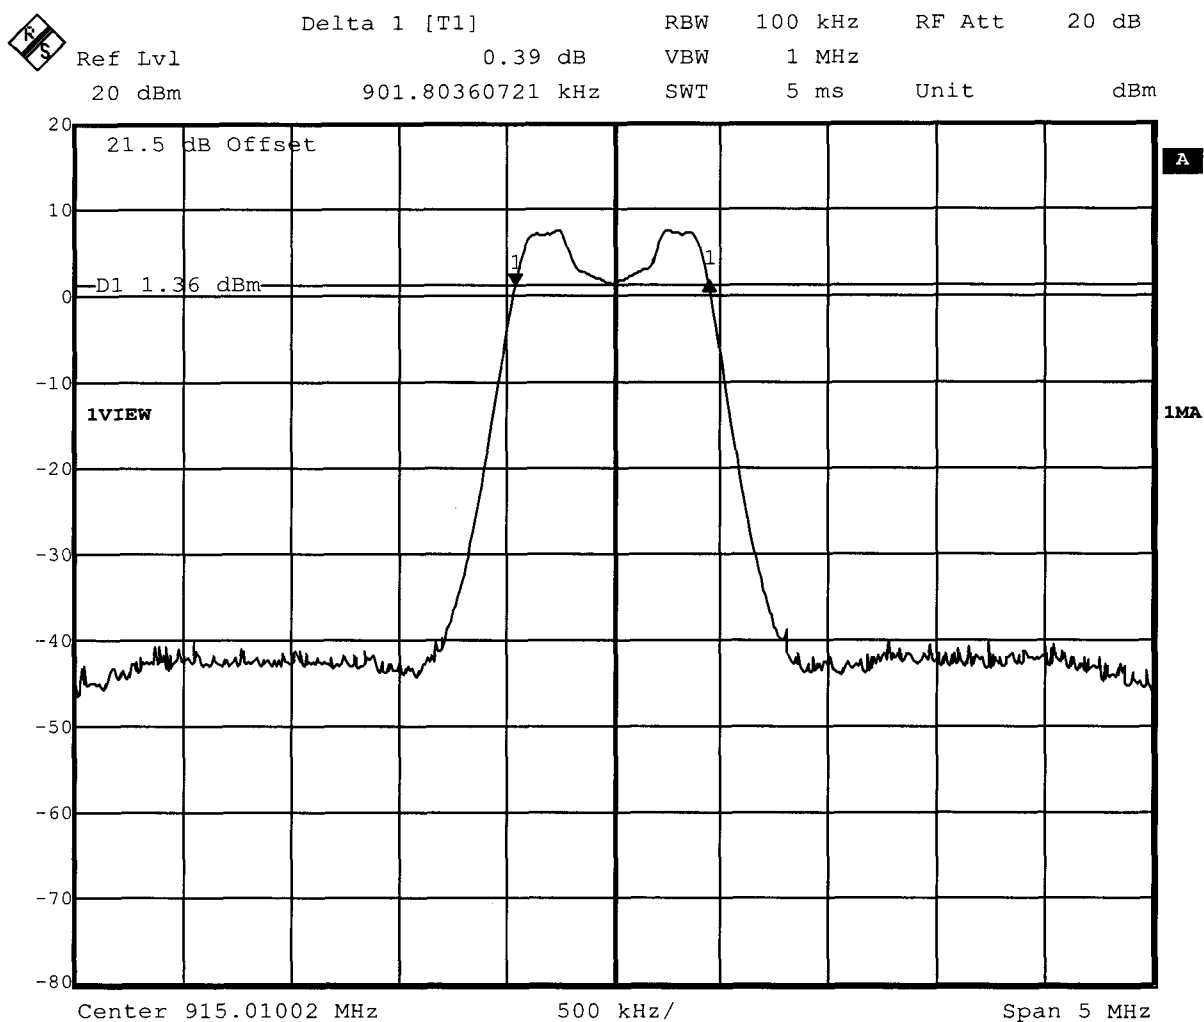

Date: 24.NOV.2006 09:33:47

Measurement diagram

ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN


Page 1 of 1

Appendix E

Peak power spectral density

FCC part 15.247
POWER SPECTRAL DENSITY

EUT	TRANSMITTER AND RECEIVER FOR REMOTE CONTROL OF AUXILIARY CAR HEATING
Model	TELESTART T91
Approval Holder	DIGADES GmbH
Temperature / Voltage	23°C / Unom.: 3.0 V DC (BATTERY)
Test Site / Operator	ETS / Mr. Schlaps
Test Specification	FCC part 15.247 (d) Power spectral density (PSD)

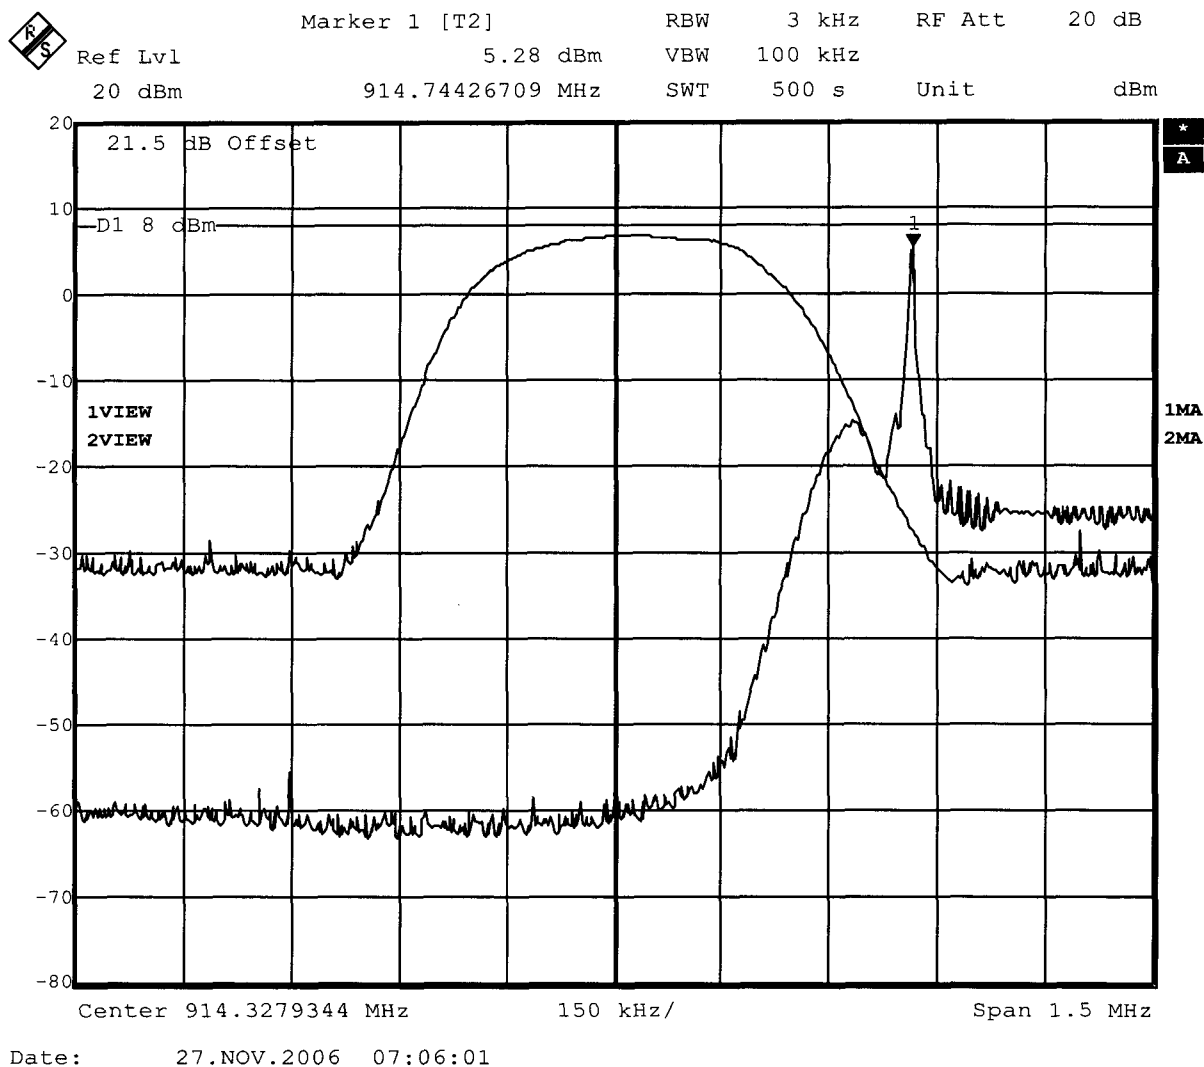

Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

Appendix F


Spurious emission conducted

Appendix G

Spurious emission radiated


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 915.220MHz, Emax: 106.29dBµV/m, RBW: 100kHz

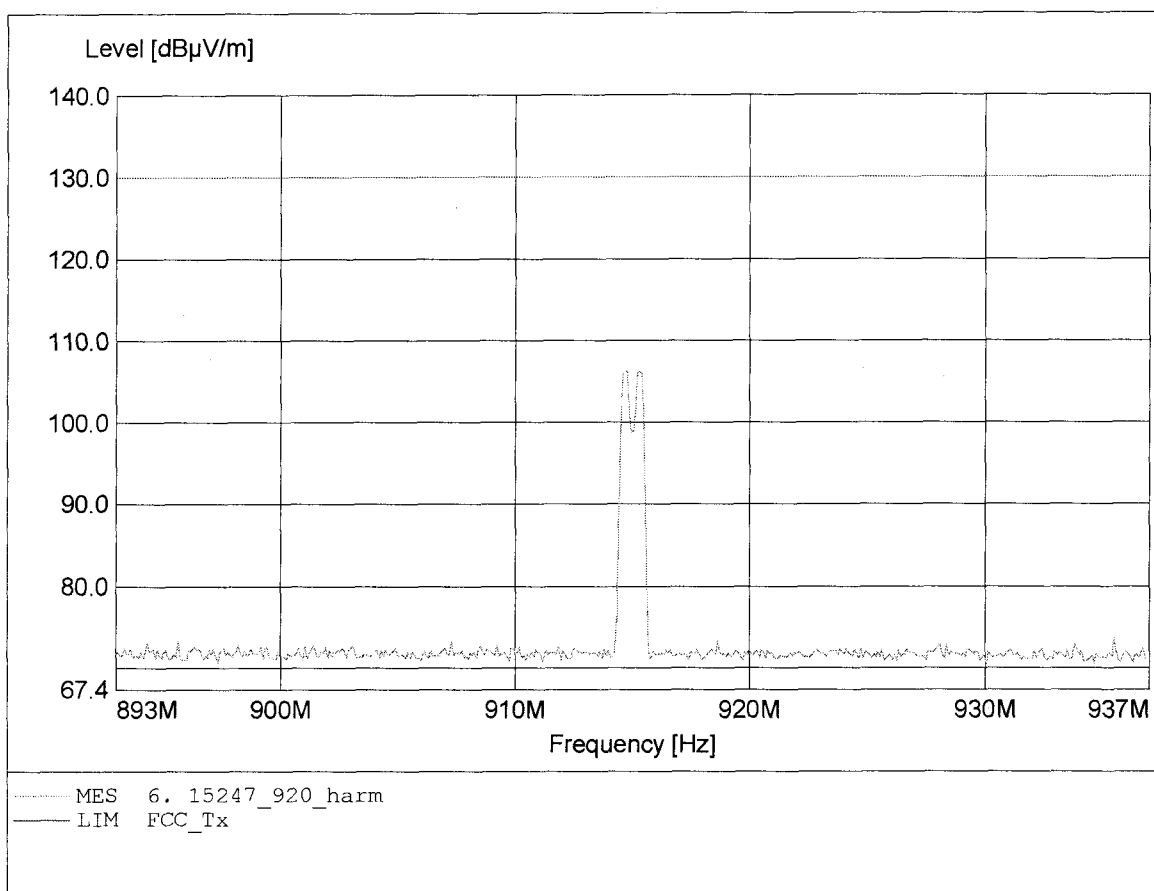


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.593MHz, Emax: 32.87dBµV/m, RBW: 100kHz

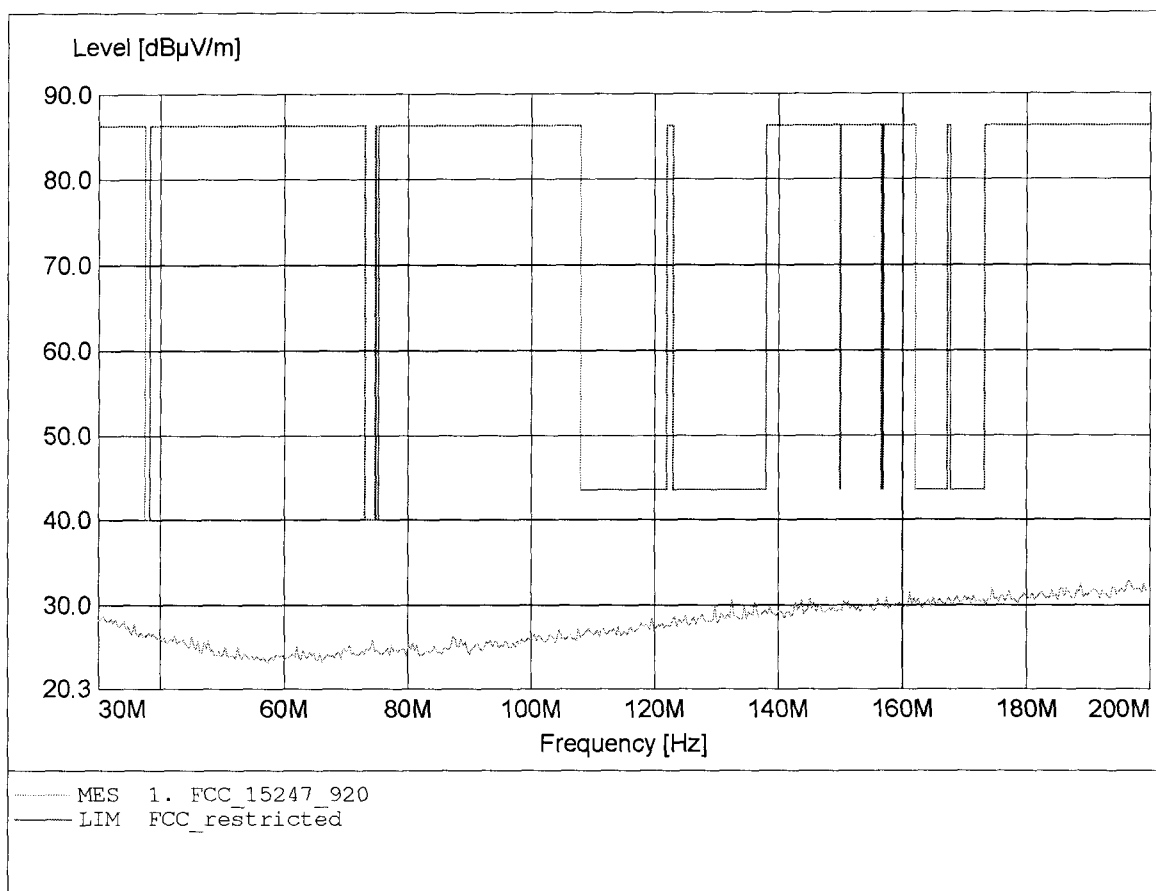


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 32.31dBµV/m, RBW: 100kHz

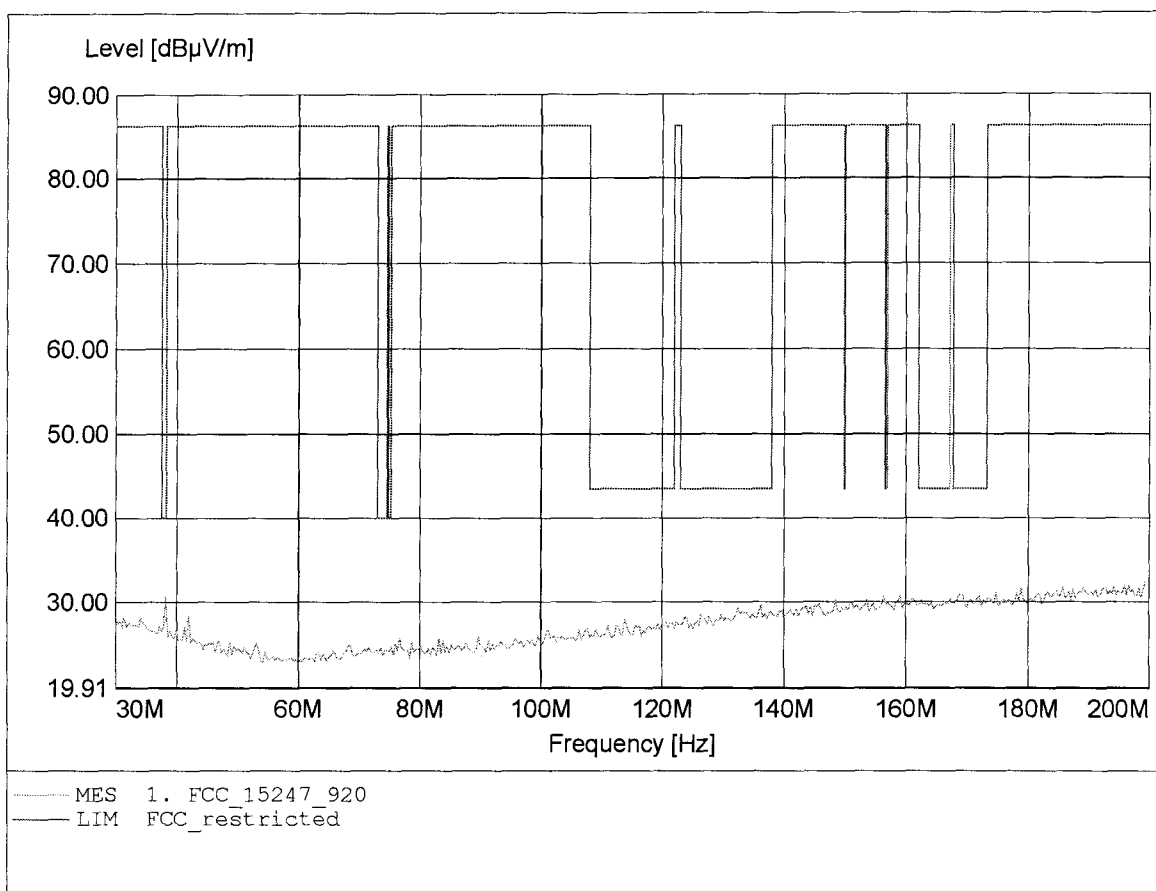


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 890.745MHz, Emax: 26.08dBµV/m, RBW: 100kHz

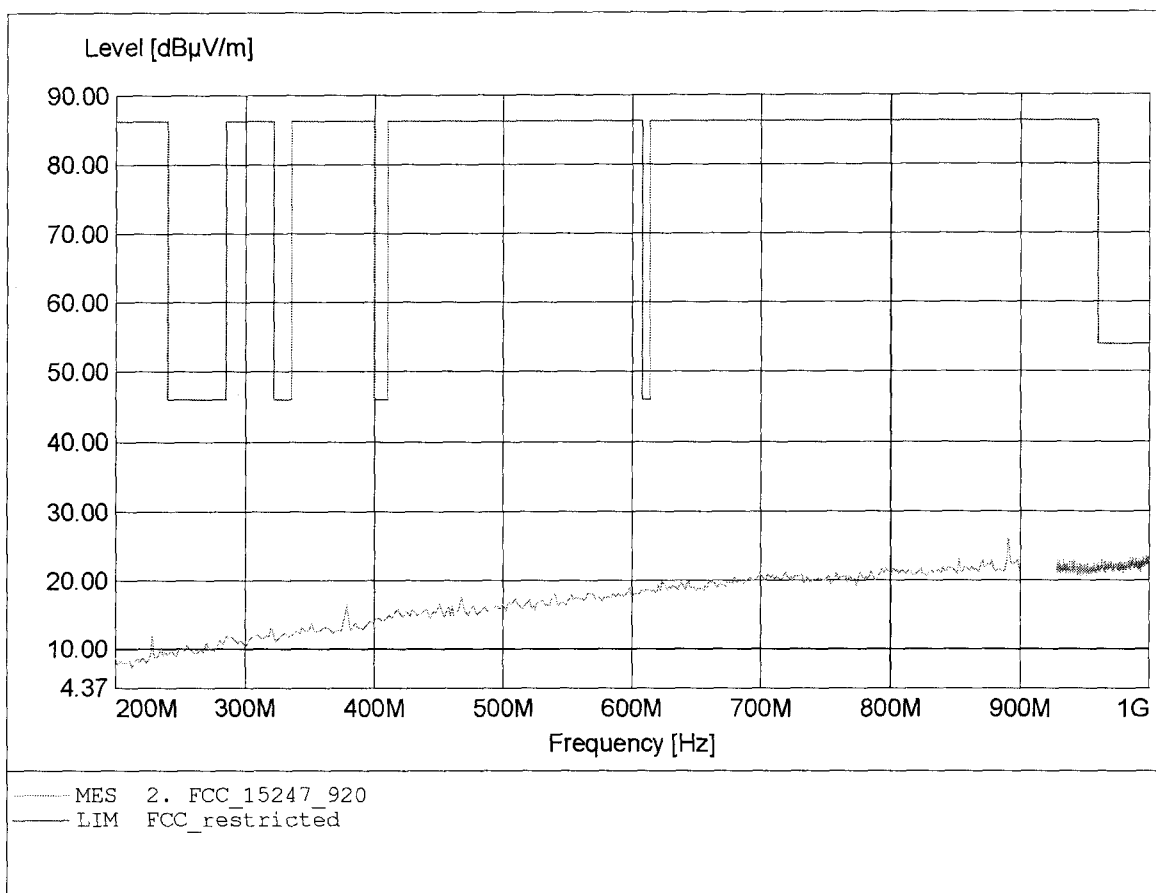


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 954.261MHz, Emax: 28.87dBµV/m, RBW: 100kHz

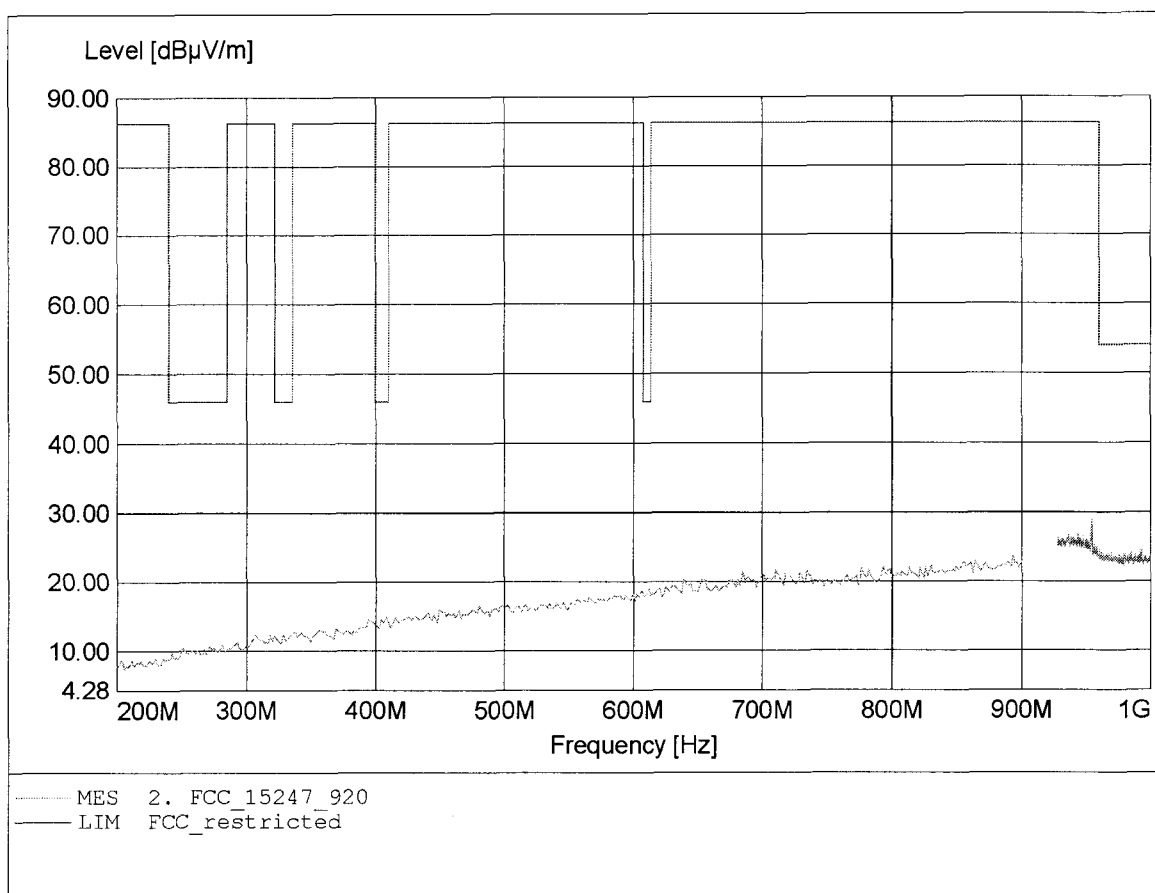


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.910GHz, Emax: 49.86dBµV/m, RBW: 1MHz

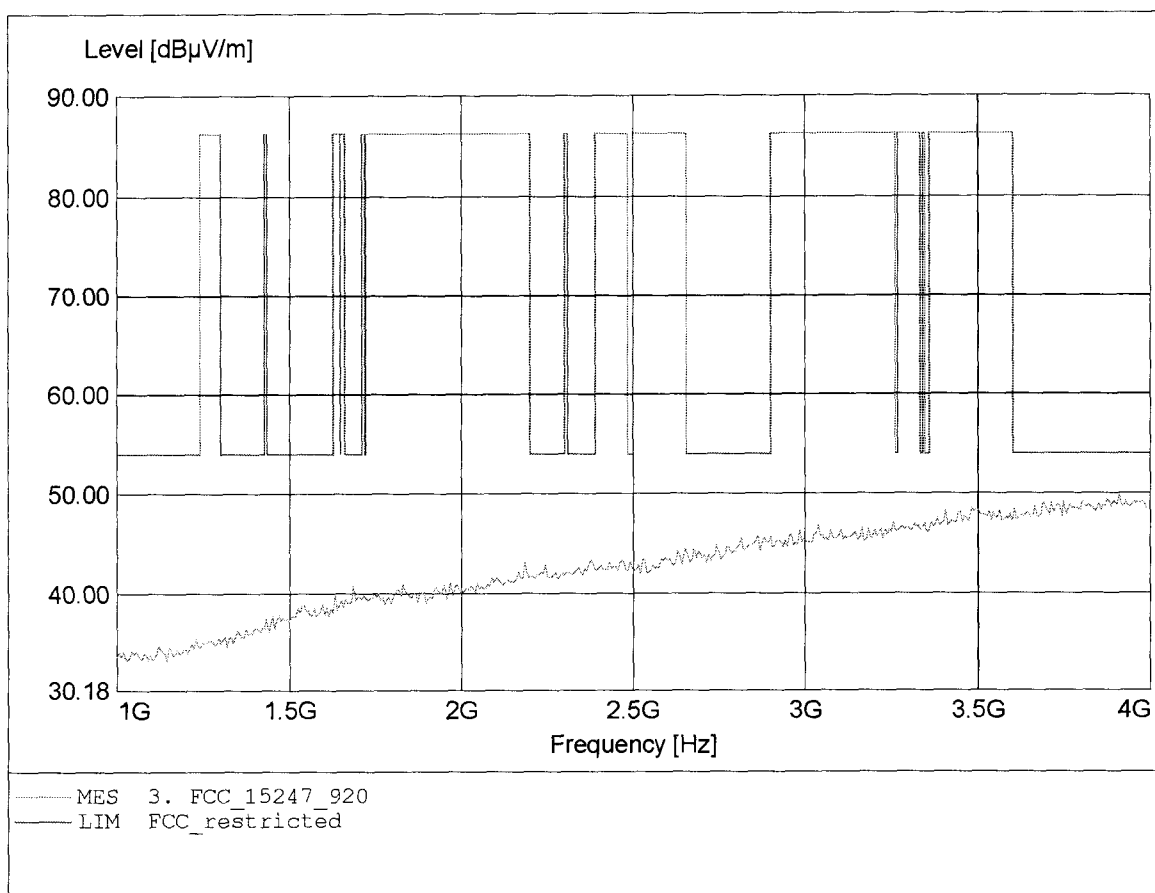


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 2.743GHz, Emax: 51.05dBµV/m, RBW: 1MHz

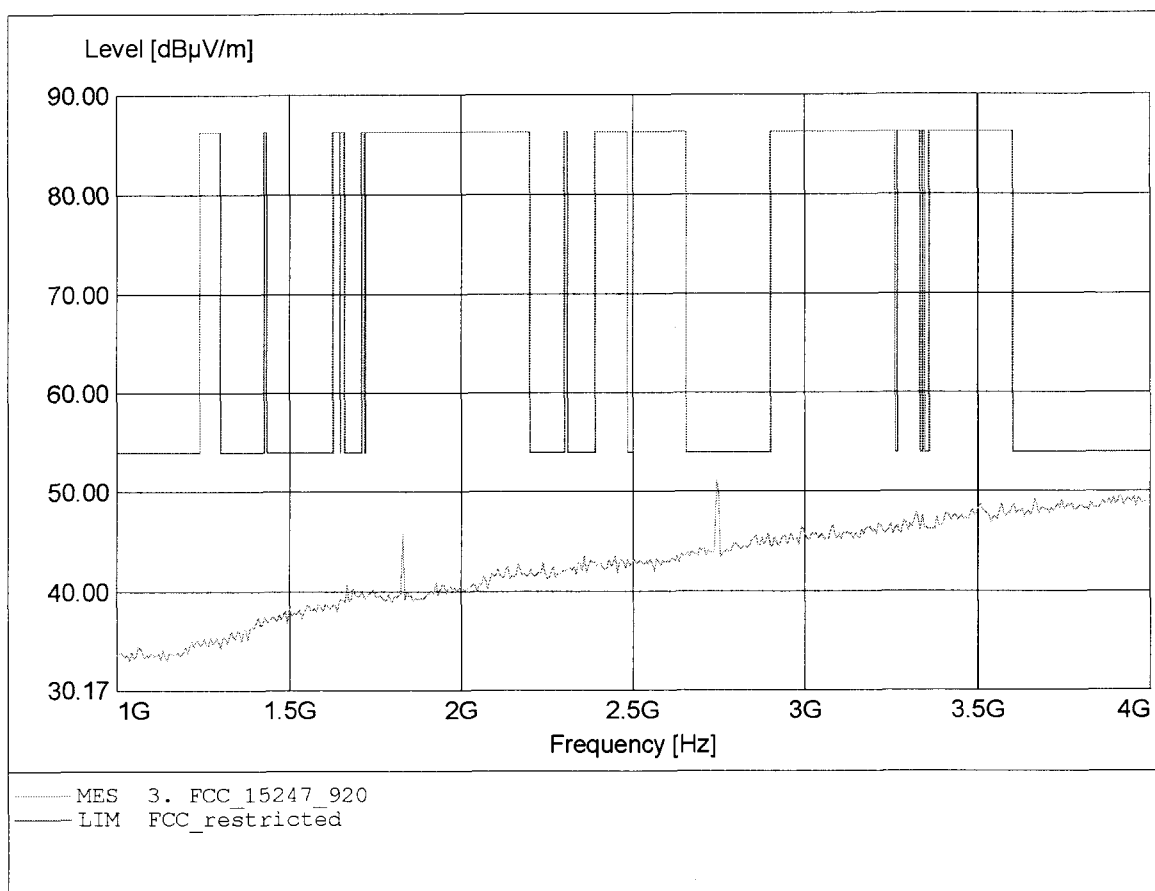


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 7.928GHz, Emax: 42.42dBµV/m, RBW: 1MHz

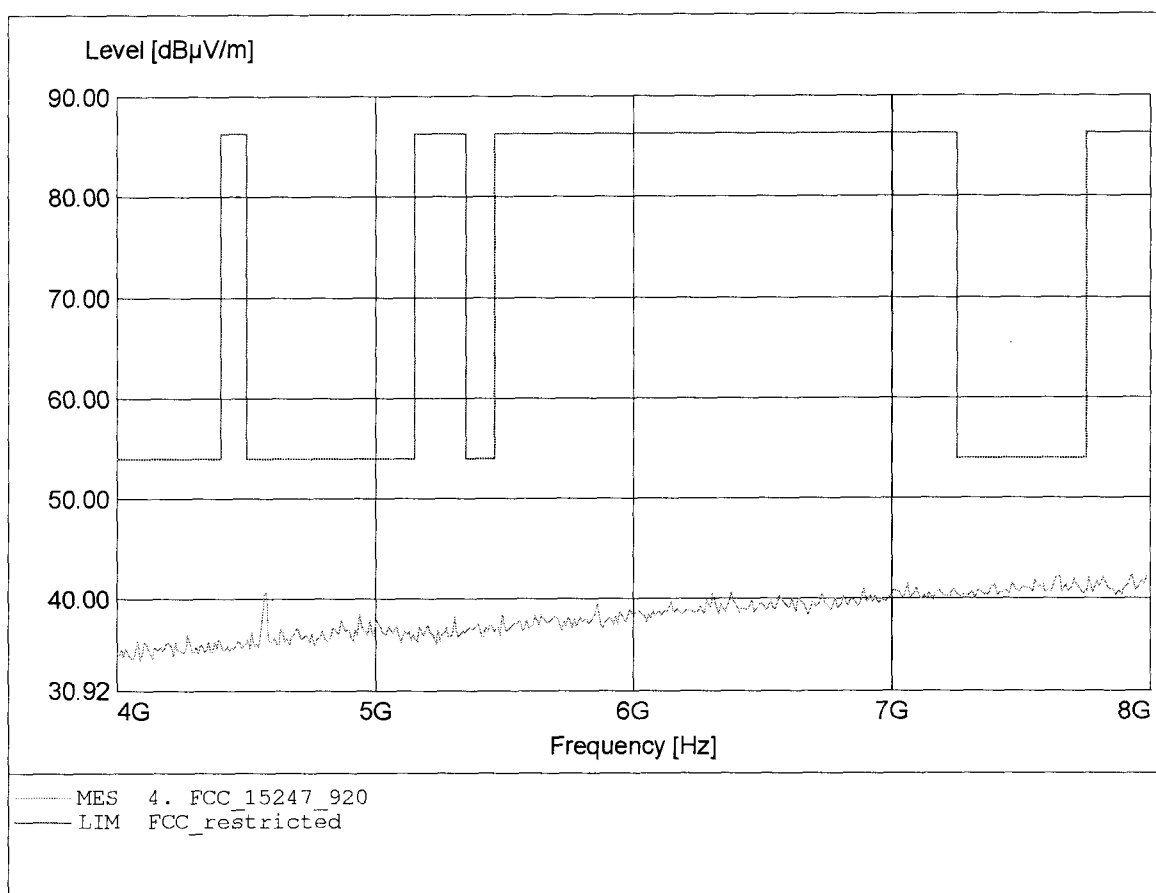


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 7.936GHz, Emax: 42.26dBµV/m, RBW: 1MHz

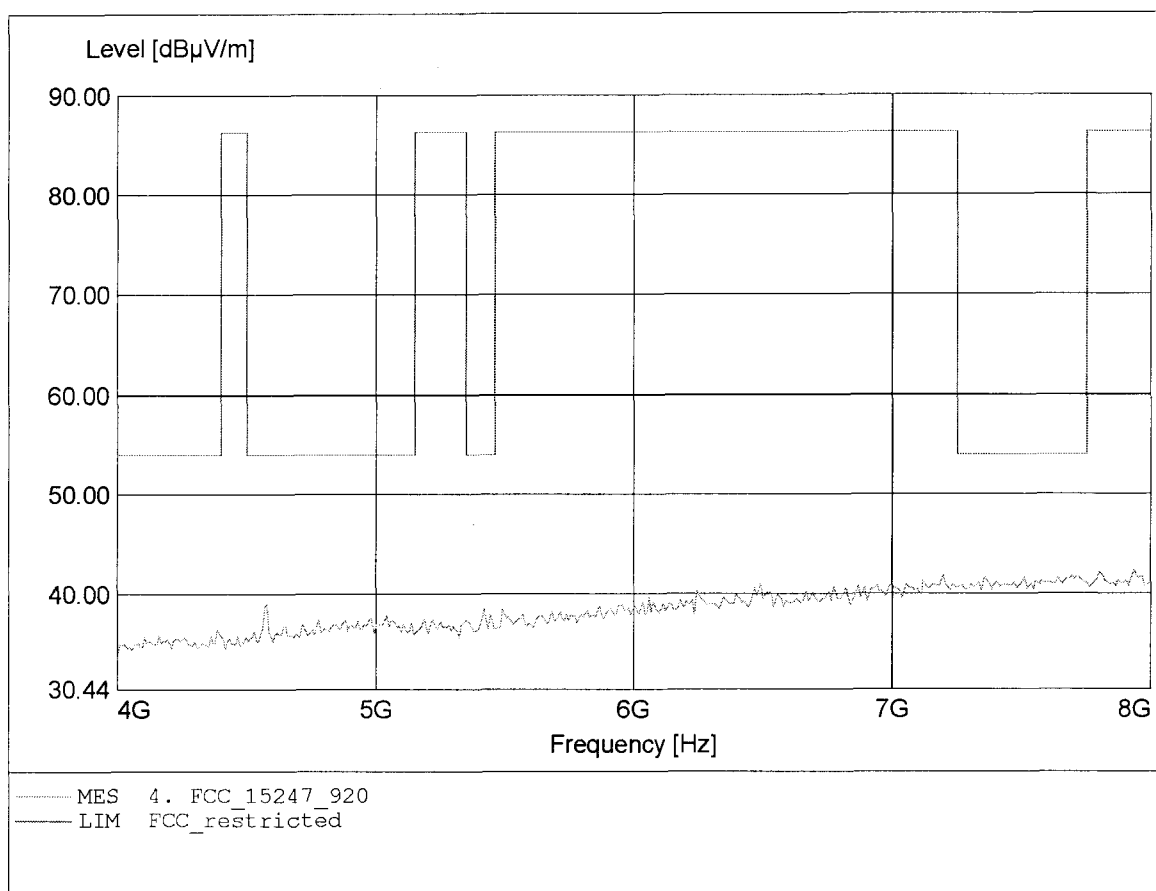


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 11.944GHz, Emax: 46.66dBµV/m, RBW: 1MHz

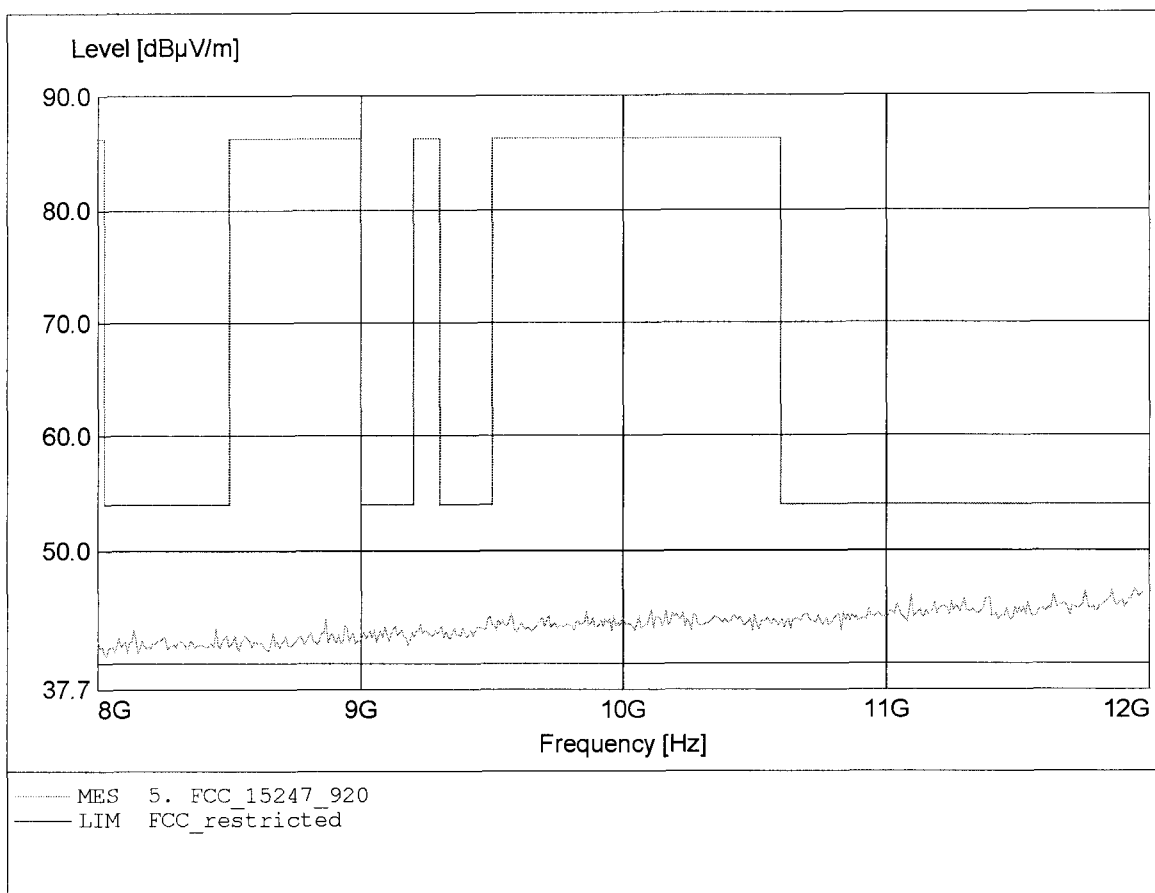

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 11.888GHz, Emax: 46.68dBµV/m, RBW: 1MHz

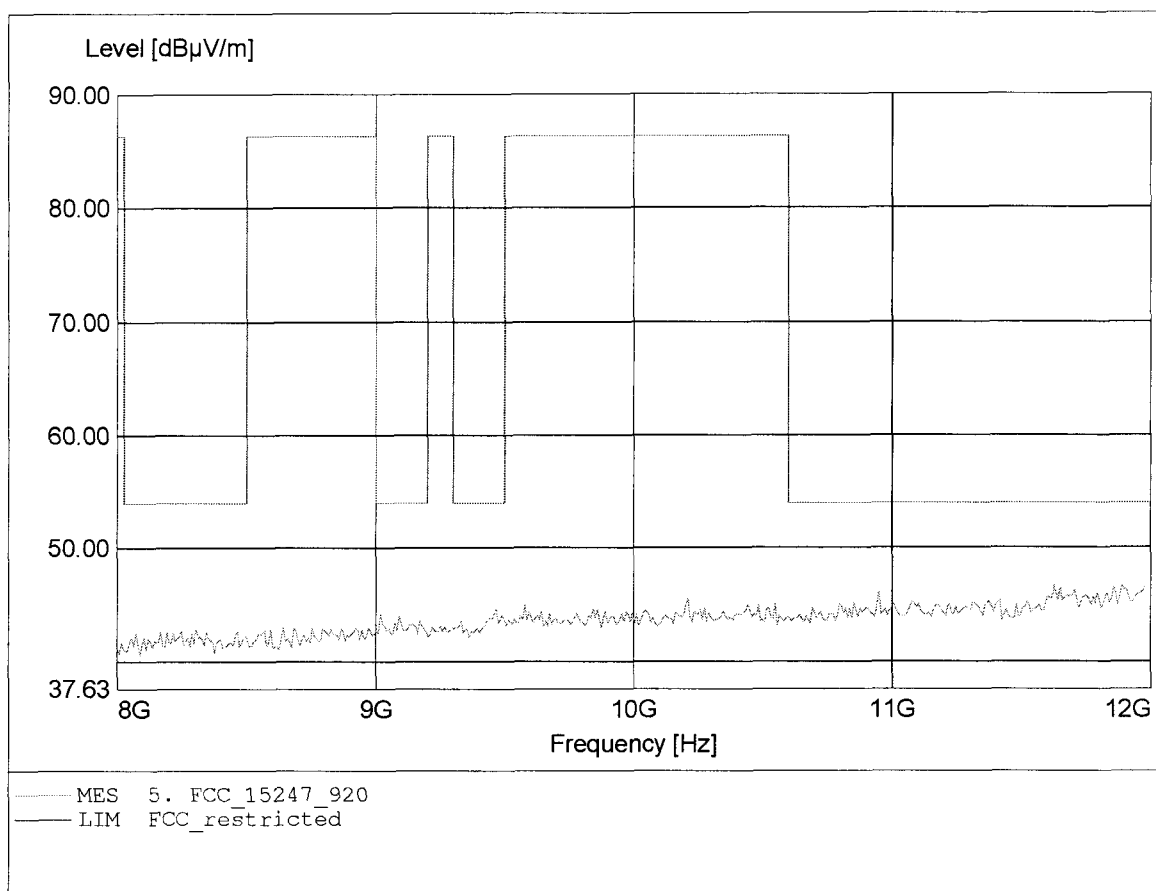

Appendix I


AC power line conducted emissions

Appendix J

Receiver radiated emisissions


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:191.142MHz Emax:32.43dBμV/m RBW: 100 kHz

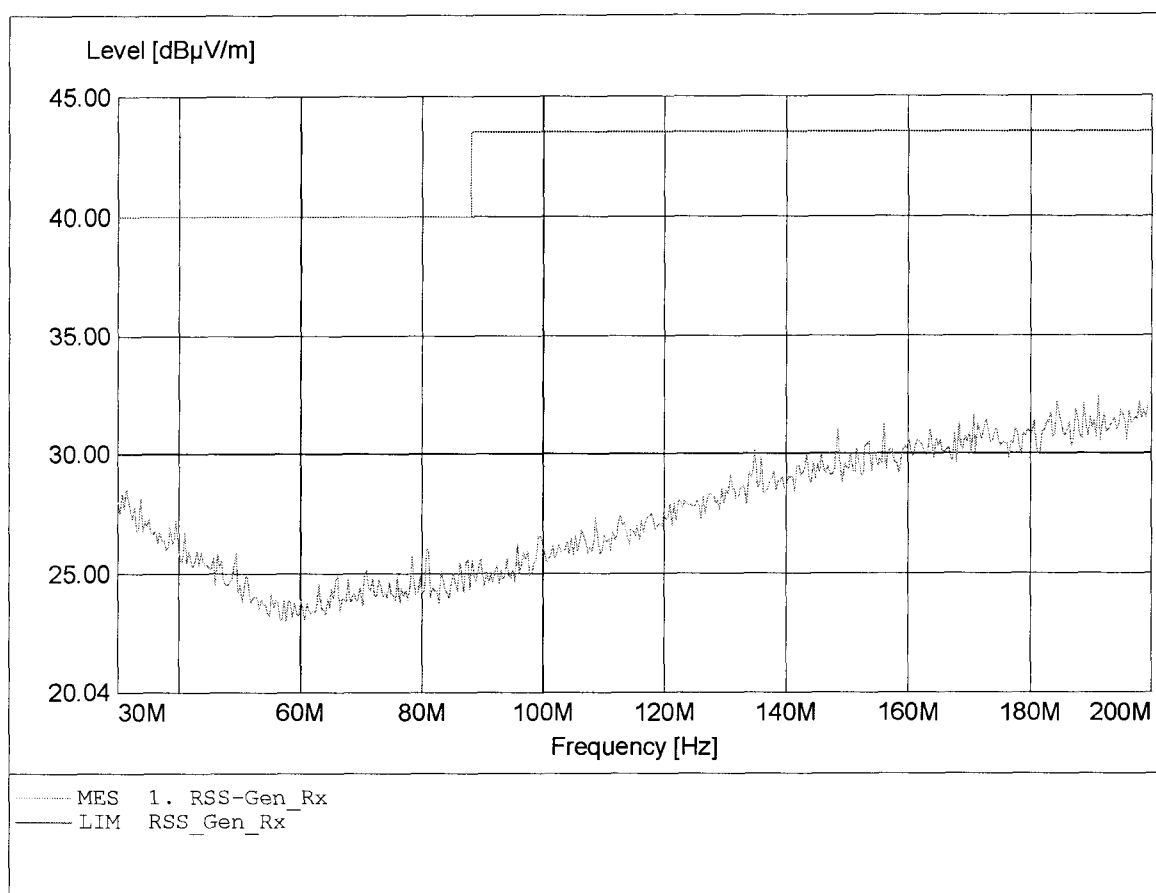


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:197.275MHz Emax:32.06dBμV/m RBW: 100 kHz

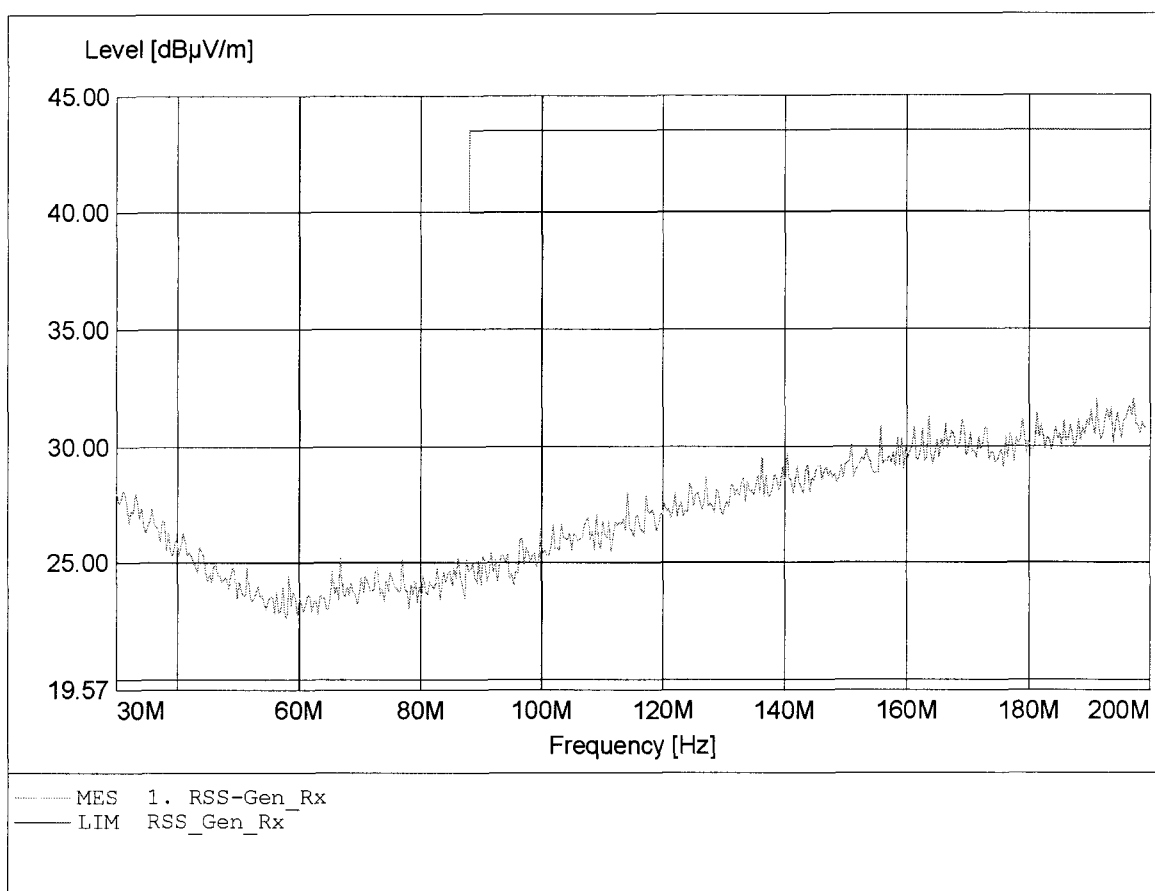


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:915.030MHz Emax:25.32dBμV/m RBW: 100 kHz

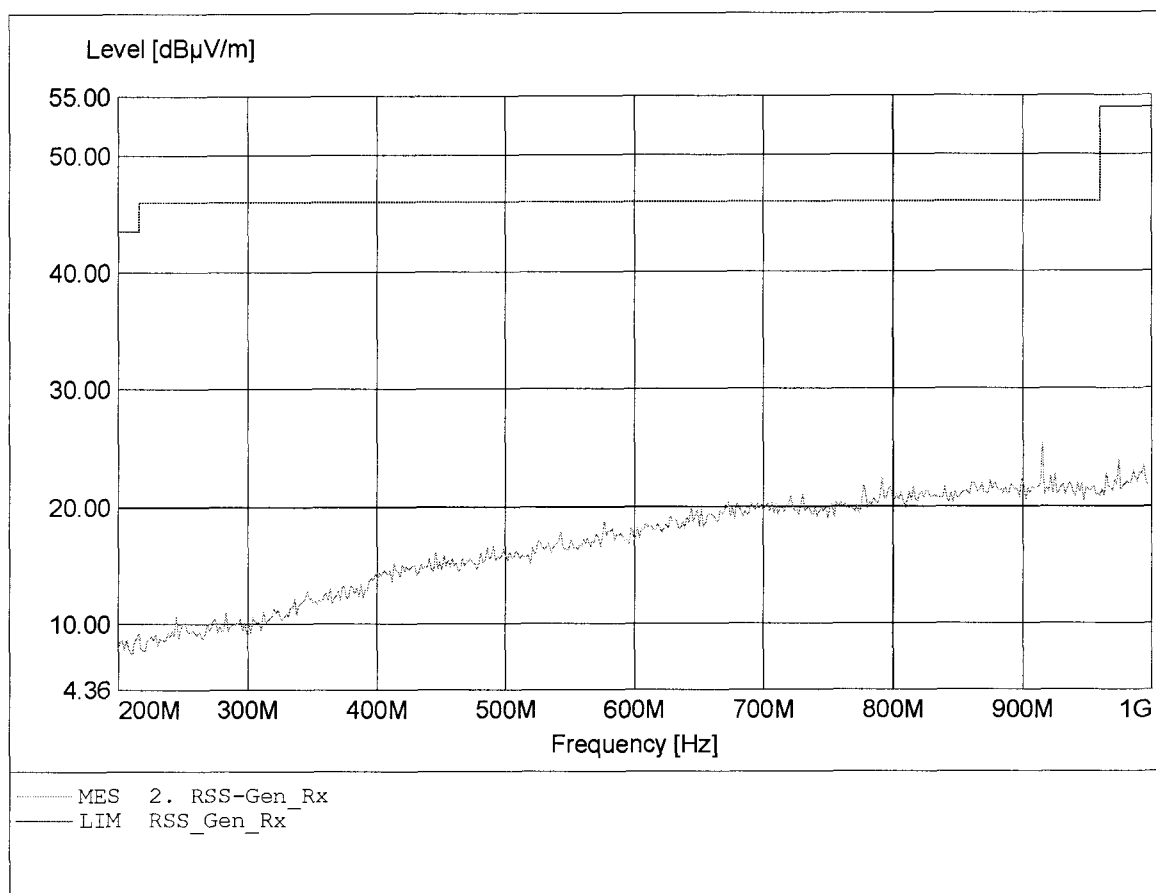


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 915.030MHz Emax: 24.46dBμV/m RBW: 100 kHz

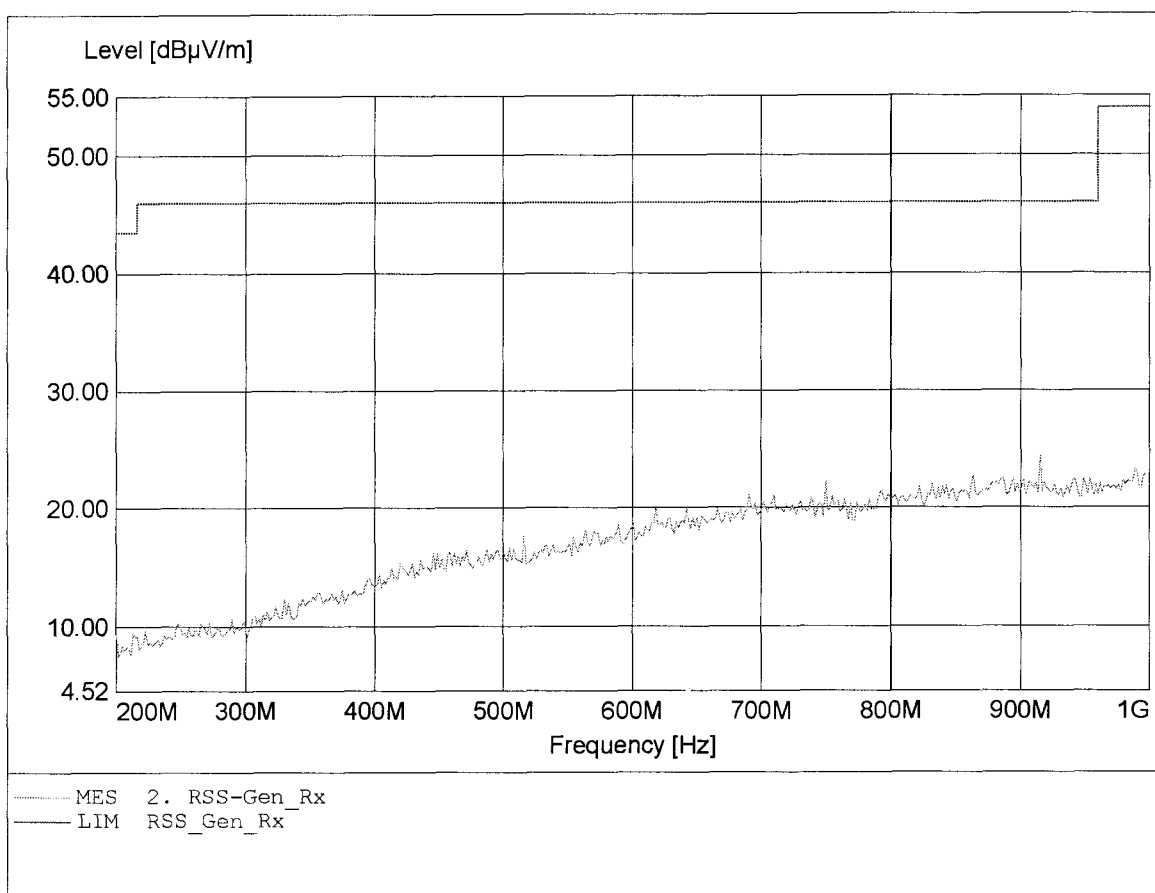


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.952GHz Emax:50.46dBμV/m RBW: 1 MHz

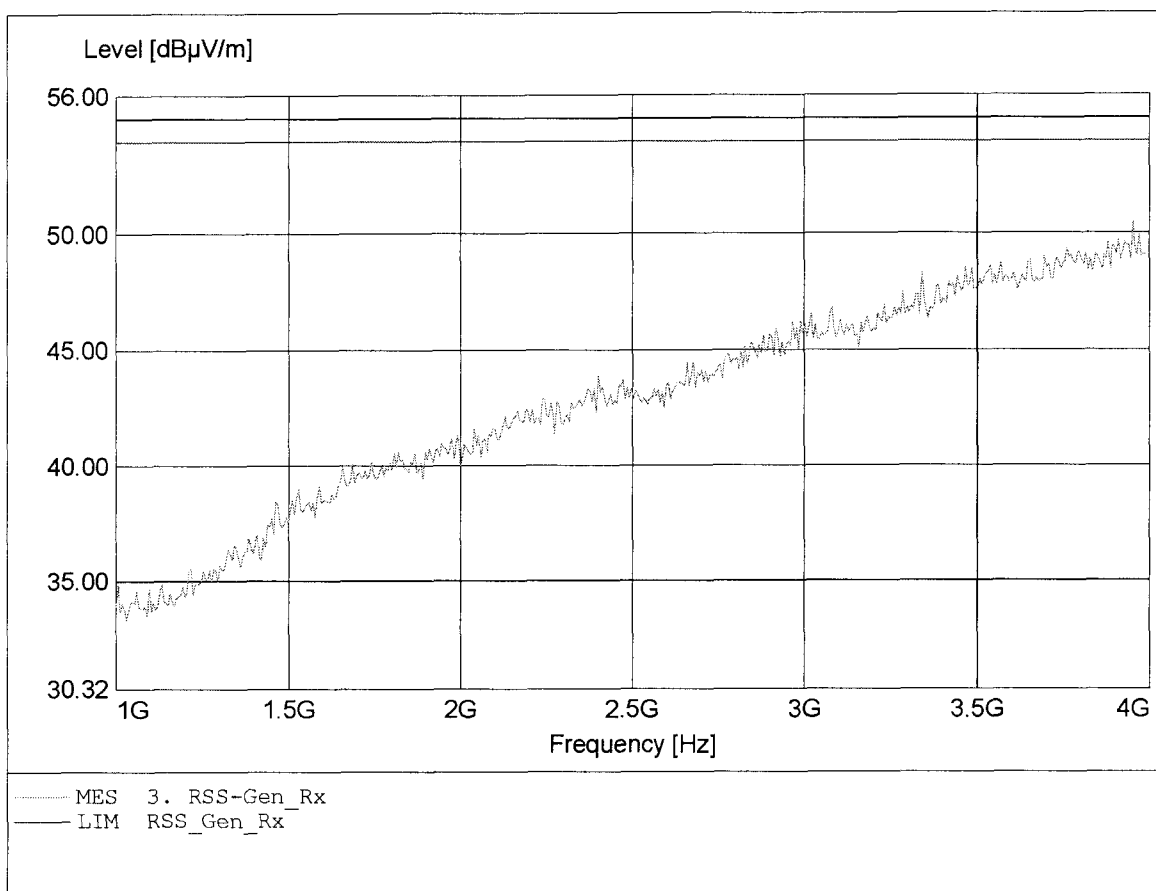


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.904GHz Emax:50.05dBµV/m RBW: 1 MHz

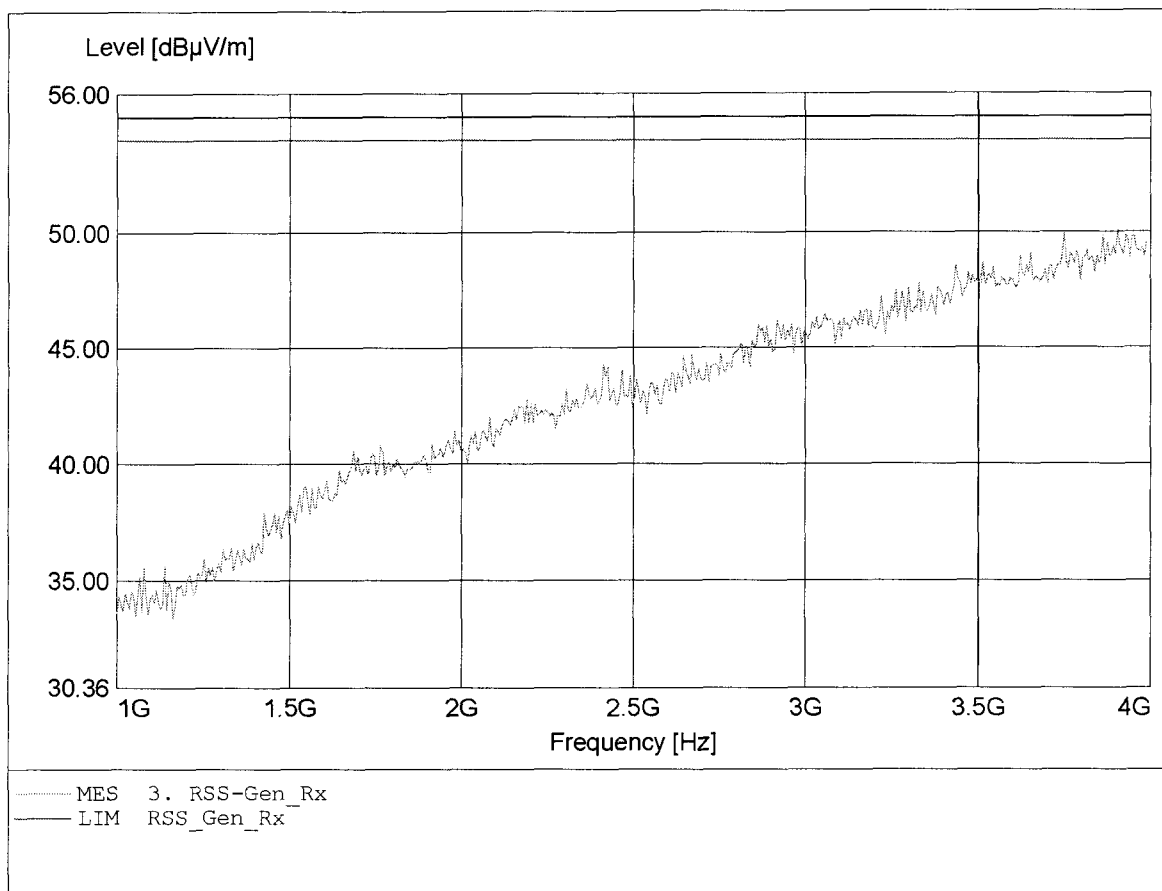


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq: 7.631GHz Emax: 48.06dBμV/m RBW: 1 MHz

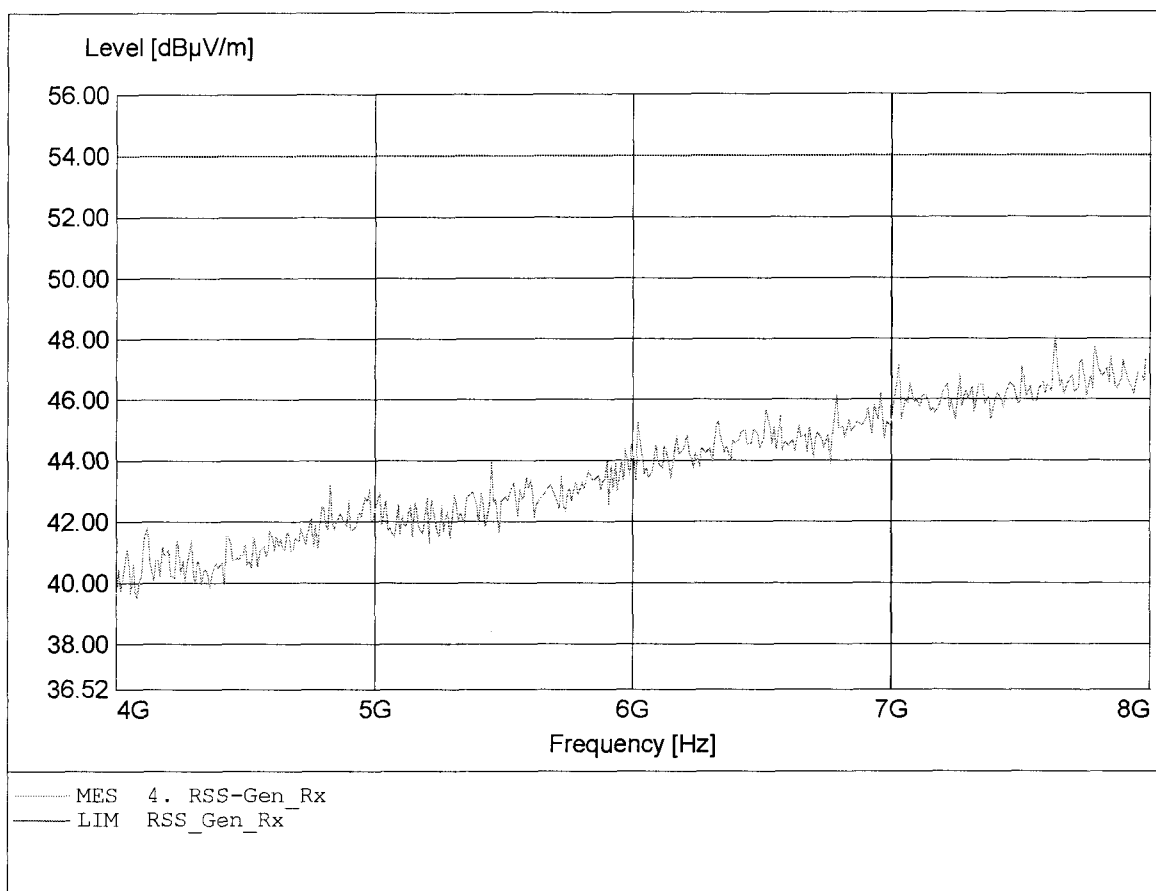


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.527GHz Emax:48.03dBµV/m RBW: 1 MHz

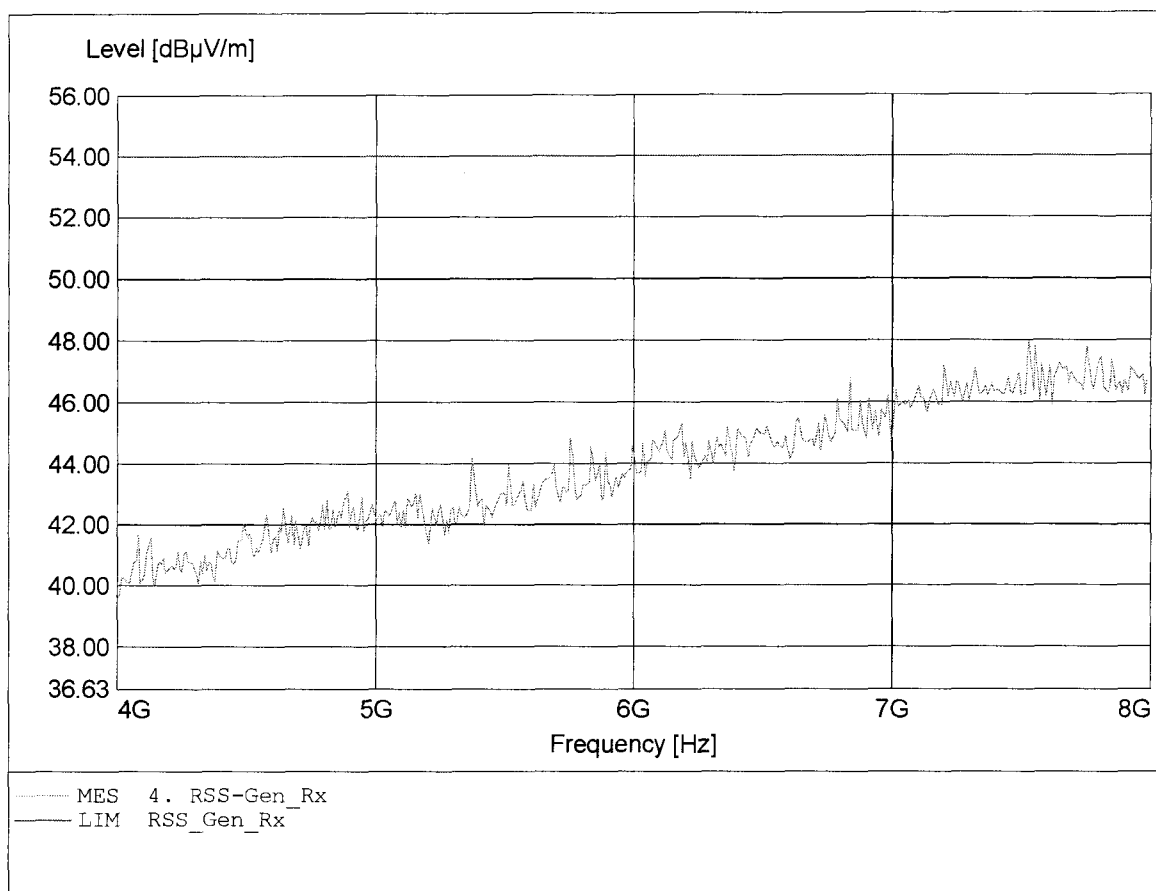

Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Appr. Holder / Model: DIGADES GmbH / TELESTART T91
EUT: TRANSMITTER AND RECEIVER FOR REMOTE CONTROL
OF AUXILIARY CAR HEATING
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:11.984GHz Emax:47.93dBμV/m RBW: 1 MHz

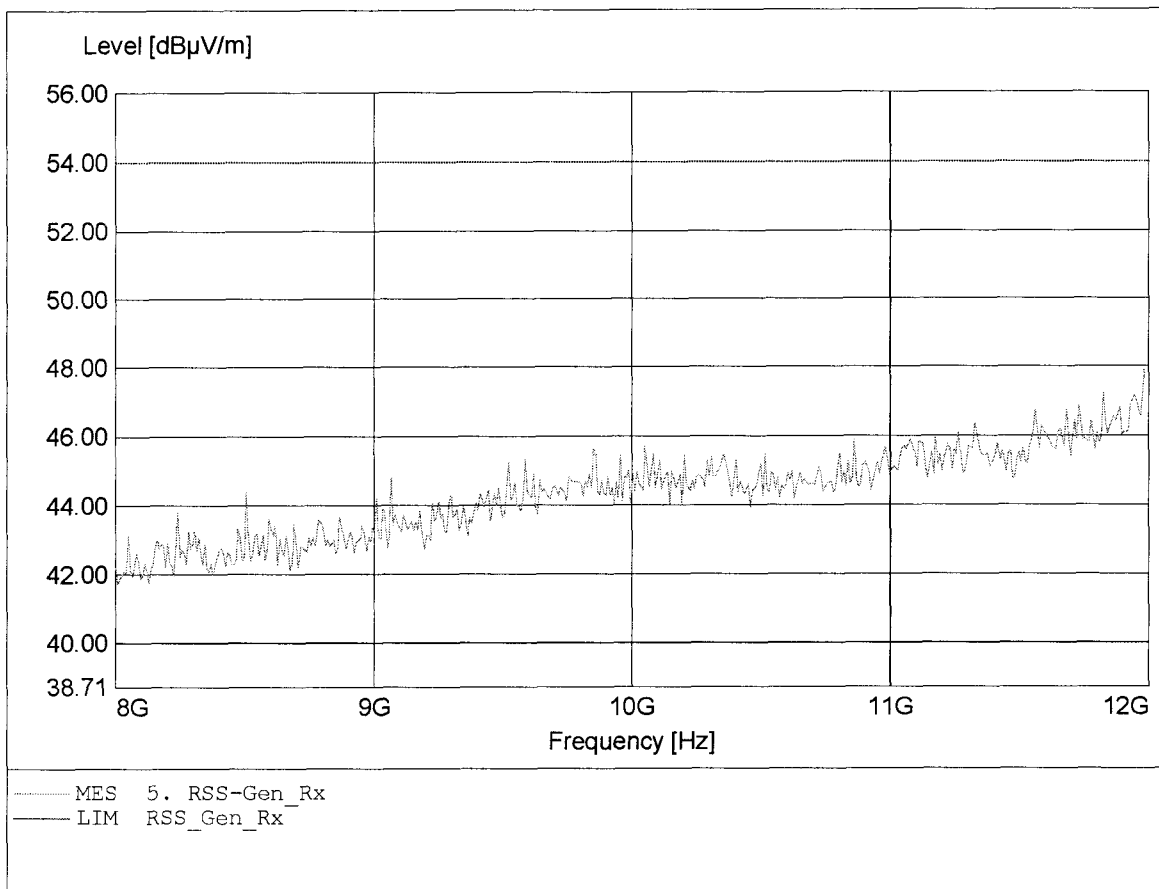

Appendix H

Band-edge compliance