



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT**

**FOR**

**Wireless Glass Break Detector**

**MODEL NUMBER: SW-ATT-GB**

**FCC ID: QNP-433GB  
IC: 4676A-433GB**

**REPORT NUMBER: SR8481734-T001**

**ISSUE DATE: 2012-03-13**

*Prepared for*  
**SECURE WIRELESS, INC  
5817 DRYDEN PLACE, SUITE D  
CARLSBAD  
CA, 92008, USA**

*Prepared by*  
**UL LLC  
1285 WALT WHITMAN RD.  
MELVILLE, NY 11747, U.S.A.  
TEL: (631) 271-6200  
FAX: (877) 854-3577**



**NVLAP LAB CODE 100255-0**

Revision History

Rev.	Issue Date	Revisions	Revised By
--	2012-03-13	Initial Issue	B. DeLisi

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	5
4.2. SAMPLE CALCULATION .....	5
4.3. MEASUREMENT UNCERTAINTY .....	5
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>6</b>
5.1. DESCRIPTION OF EUT .....	6
5.2. DESCRIPTION OF AVAILABLE ANTENNAS .....	6
5.3. SOFTWARE AND FIRMWARE .....	6
5.4. WORST-CASE CONFIGURATION AND MODE .....	6
5.5. MODIFICATIONS .....	6
5.6. DESCRIPTION OF TEST SETUP .....	7
<b>6. ANTENNA PORT TEST RESULTS .....</b>	<b>11</b>
6.1. 20 dB AND 99% BW .....	11
6.2. DUTY CYCLE .....	15
6.3. TRANSMISSION TIME .....	20
<b>7. RADIATED EMISSION TEST RESULTS .....</b>	<b>21</b>
7.1. TX RADIATED SPURIOUS EMISSION .....	21
<b>8. SETUP PHOTOS .....</b>	<b>28</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Secure Wireless, Inc  
5817 Dryden Place, Suite D  
Carlsbad, CA 92008, USA

**EUT DESCRIPTION:** Wireless Glass Break Detector

**MODEL:** SW-ATT-GB

**SERIAL NUMBER:** Non-serialized production unit

**DATE TESTED:** 2012-02-22 through 2012-03-05

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 Issue 8, Annex 1	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation, as described by the referenced documents. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL By:

Tested By:



Joseph Danisi  
Lead Engineering Associate  
UL LLC

Bob DeLisi  
Sr. Staff Engineer  
UL LLC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 1285 Walt Whitman Rd. Melville, NY 11747, USA.

UL Melville is accredited by NVLAP, Laboratory Code 100255-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/1002550.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.3 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.00 dB

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a wireless glass break detector intended for security applications. The EUT is powered by 3VDC nominal, from two CR123A batteries.

### **5.2. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes an internal loop antenna. The gain is estimated by the manufacturer to be -15 dBi.

### **5.3. SOFTWARE AND FIRMWARE**

Not Applicable

### **5.4. WORST-CASE CONFIGURATION AND MODE**

The worst case configuration was in the X-axis. The EUT only has one mode of operation.

### **5.5. MODIFICATIONS**

No modifications were made during testing.

## **5.6. DESCRIPTION OF TEST SETUP**

### **SUPPORT EQUIPMENT**

**Not Applicable**


### **I/O CABLES**

**Not Applicable**

### **TEST SETUP**

The EUT was tested as stand-alone device. The manufacturer configured the device to continuously transmit for emissions data and to operate as intended (periodic) for all other tests.

**SETUP DIAGRAM FOR TESTS**

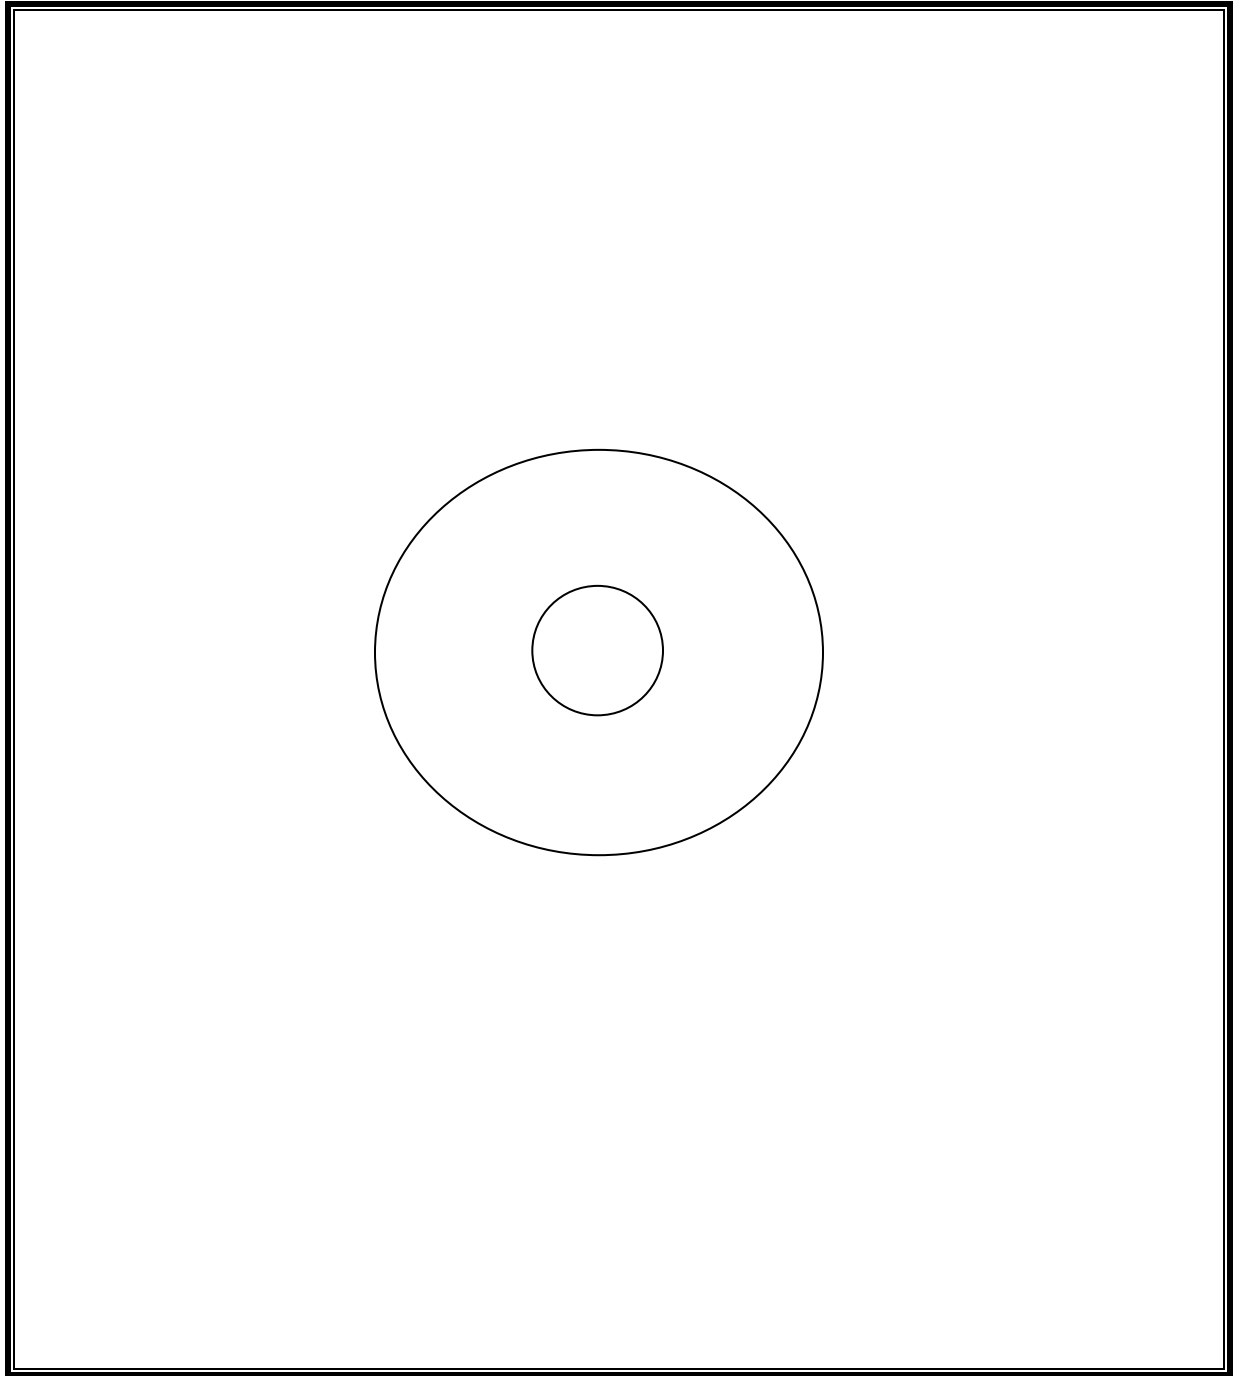



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used – Radiated Emissions					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
30-1000MHz					
EMI Receiver	Rohde & Schwarz	ESIB26	ME5B-081	2012-01-03	2013-01-30
Bicon Antenna	Schaffner	VBA6106A	43441	2011-10-11	2012-10-11
Log-P Antenna	Schaffner	UPA6109	44067	2011-04-29	2012-04-29
Preamp (10kHz - 1.3GHz)	HPSchaffner	CPA9231A84 47D	31613ME7 A-758	N/A	N/A
Switch Driver	HP	11713A	ME7A-627	N/A	N/A
System Controller	Sunol Sciences	SC99V	44396	N/A	N/A
Camera Controller	Panasonic	WV-CU254	44395	N/A	N/A
RF Switch Box	UL	1	44398	N/A	N/A
Measurement Software	UL	Version 9.3	44740	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2010-12-07	2012-12-07
Multimeter	Fluke	83III	ME5B-305	2012-02-01	2013-02-28
Above 1GHz (Band Optimized System)					
Spectrum Analyzer	Agilent	E4446A	72822	2012-01-31	2013-02-28
Horn Antenna (1-2 GHz)	ETS	3161-01	51442	2008-03-28	See * below
Horn Antenna (2-4 GHz)	ETS	3161-02	48107	2007-09-27	See * below
Horn Antenna (4-8 GHz)	ETS	3161-03	48106	2007-09-27	See * below
Signal Path Controller	HP	11713A	50250	N/A	N/A
Gain Controller	HP	11713A	50251	N/A	N/A
RF Switch / Preamp Fixture	UL	BOMS1	50249	N/A	N/A
System Controller	UL	BOMS2	50252	N/A	N/A
Measurement Software	UL	Version 9.3	44740	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2010-12-07	2012-12-07
Multimeter	Fluke	83III	ME5B-305	2012-02-01	2013-02-28
<p>* - Note: As allowed by the calibration standard ANSI C63.4 Section 4.4.2, standard gain horns need only a one-time calibration. Only if physical damage occurs will the horn antenna require re-calibration.</p> <p>* Gain standard horn antennas (sometimes called standard gain horn antennas) need not be calibrated beyond that which is provided by the manufacturer unless they are damaged or deterioration is suspected, or they are used at a distance closer than <math>2D^2/\lambda</math>. Gain standard horn antennas have gains that are fixed by their dimensions and dimensional tolerances.</p>					

Test Equipment Used – Occupied Bandwidth/Cease Operation/Duty Cycle					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
Spectrum Analyzer	Agilent	E44446A	72823	2012-01-31	2013-02-28
Dipole Antenna	EMCO	3121C	3359	2011-12-16	2012-12-16
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	43733	2010-03-08	2012-03-08

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 20 dB AND 99% BW

#### LIMITS

FCC §15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC A1.1.3

For the purpose of Section A1.1, the 99% Bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

#### TEST PROCEDURE

ANSI C63.4

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 10 KHz. The VBW is set to 100 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

## **RESULTS**

No non-compliance noted:


### 20dB Bandwidth

<b>Frequency (MHz)</b>	<b>20dB Bandwidth (kHz)</b>	<b>Limit (kHz)</b>	<b>Margin (kHz)</b>
433.9	84.3	1084.75	-1000.45


### 99% Bandwidth

<b>Frequency (MHz)</b>	<b>99% Bandwidth (kHz)</b>	<b>Limit (kHz)</b>	<b>Margin (kHz)</b>
433.9	559	1084.75	-525.75

## 20dB BANDWIDTH

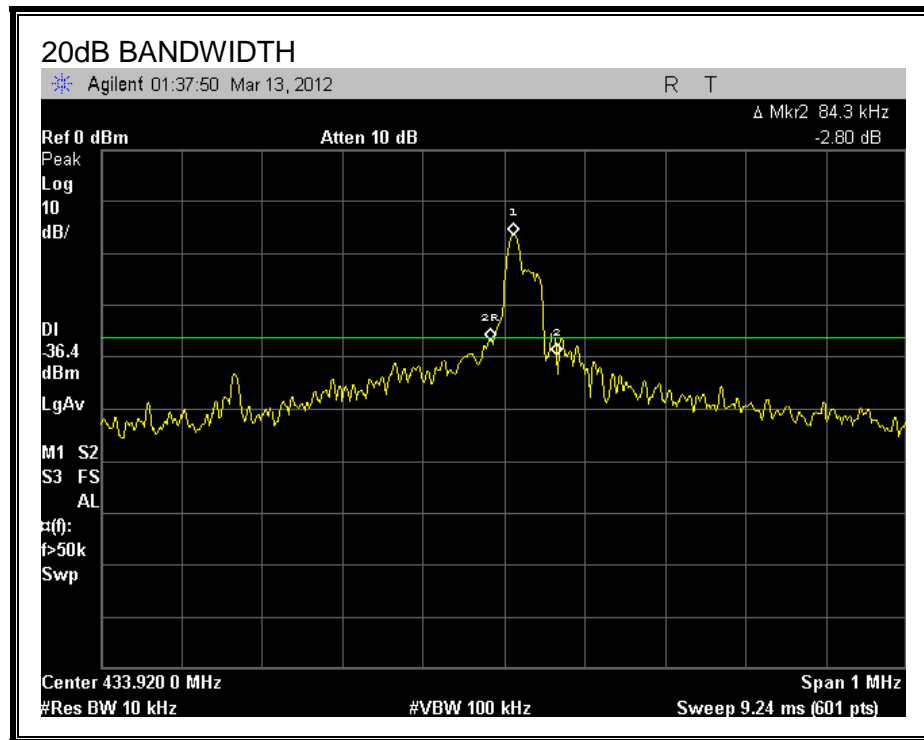

99% BANDWIDTH

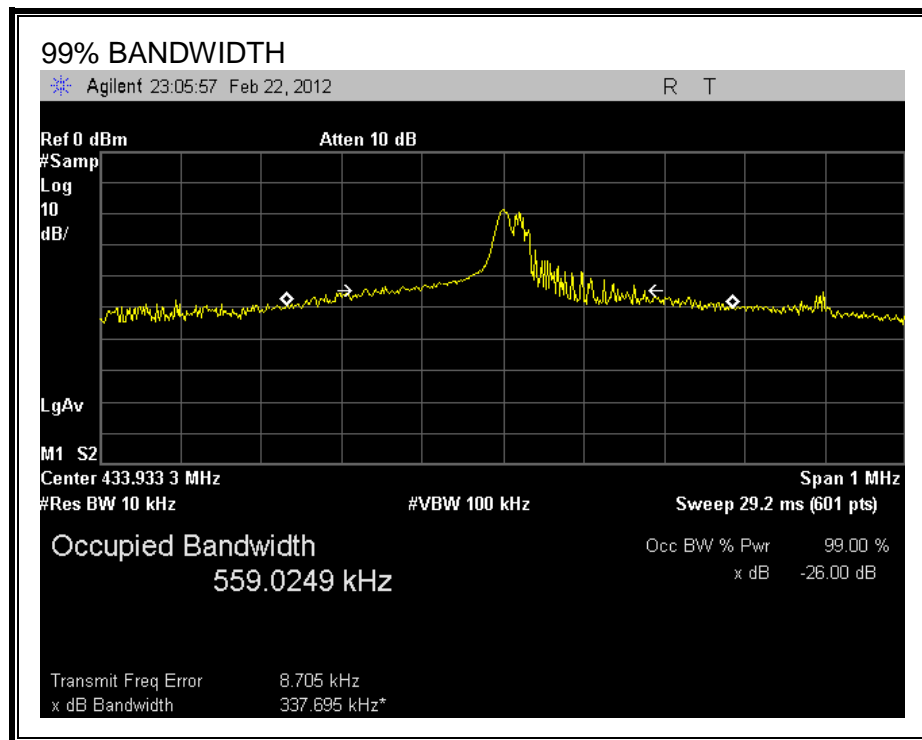

## 7.2. DUTY CYCLE

### LIMITS

FCC §15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1 MHz and the VBW is set to 1 MHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

### CALCULATION


Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T

### RESULTS

No non-compliance noted:


One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
100	0.2667	13	0.1333	50	0.101	-19.89

**ONE PERIOD**

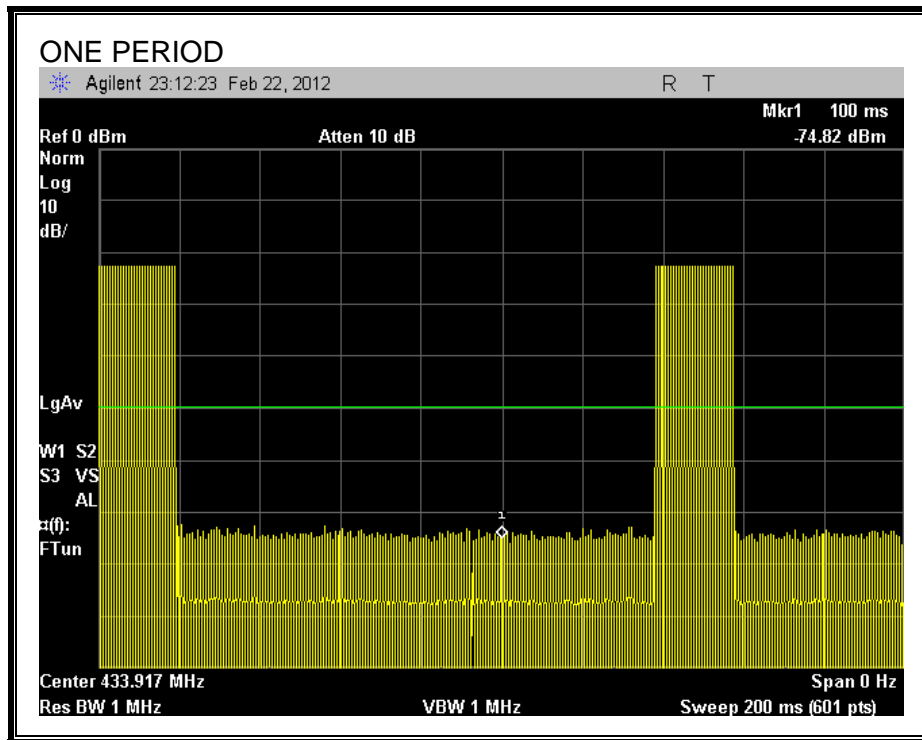





## LONG PULSE WIDTH

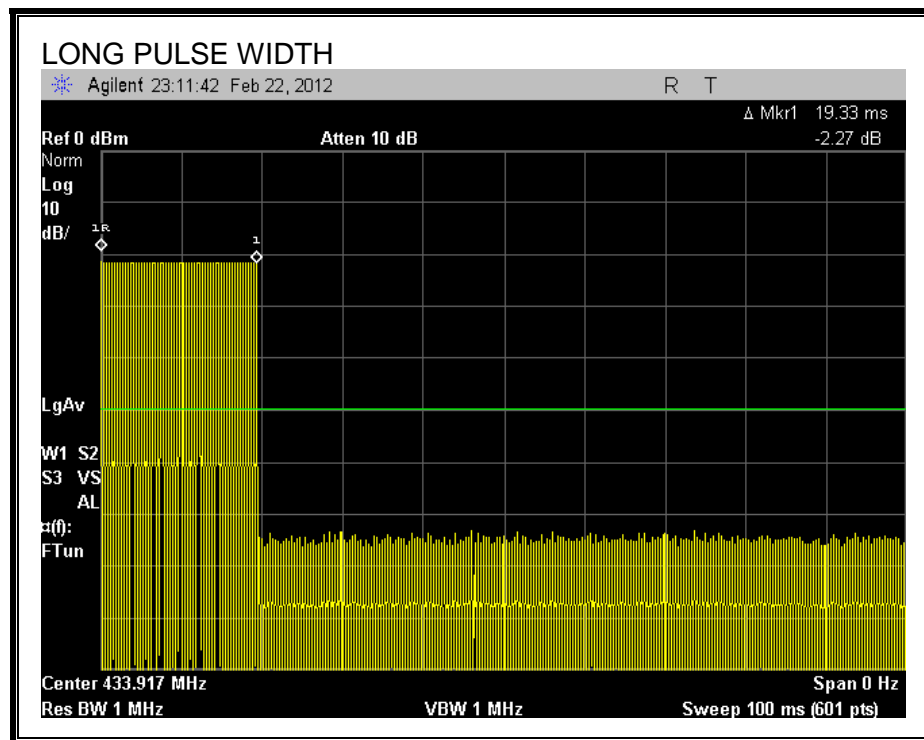

**NUMBER OF LONG PULSES PART 1 (1<sup>st</sup> 10ms)**

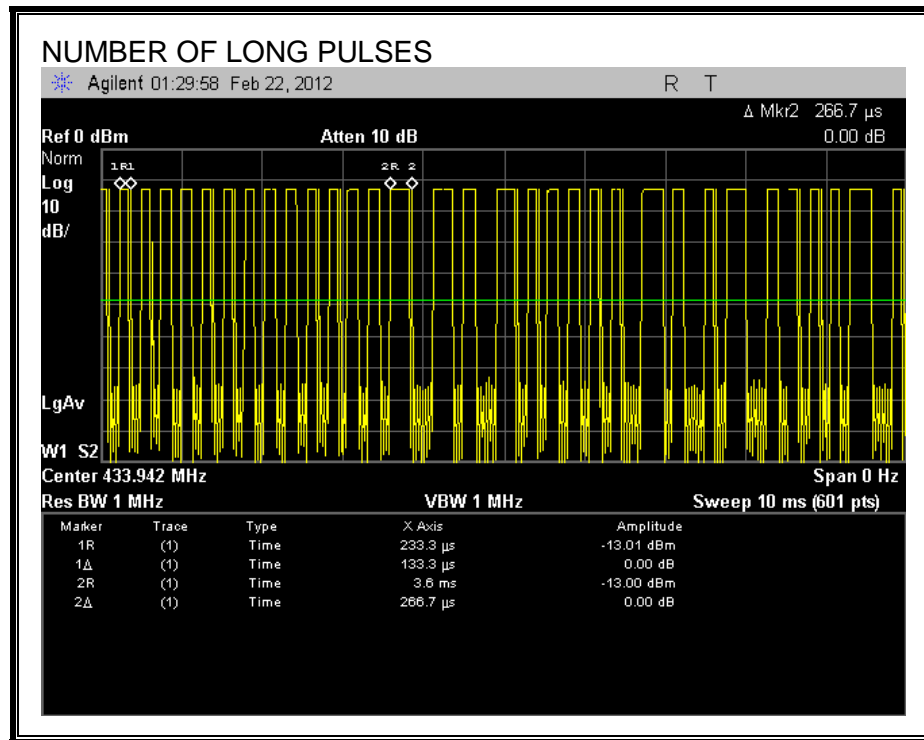

**NUMBER OF SHORT PULSES Part 2 (2<sup>nd</sup> 10ms)**

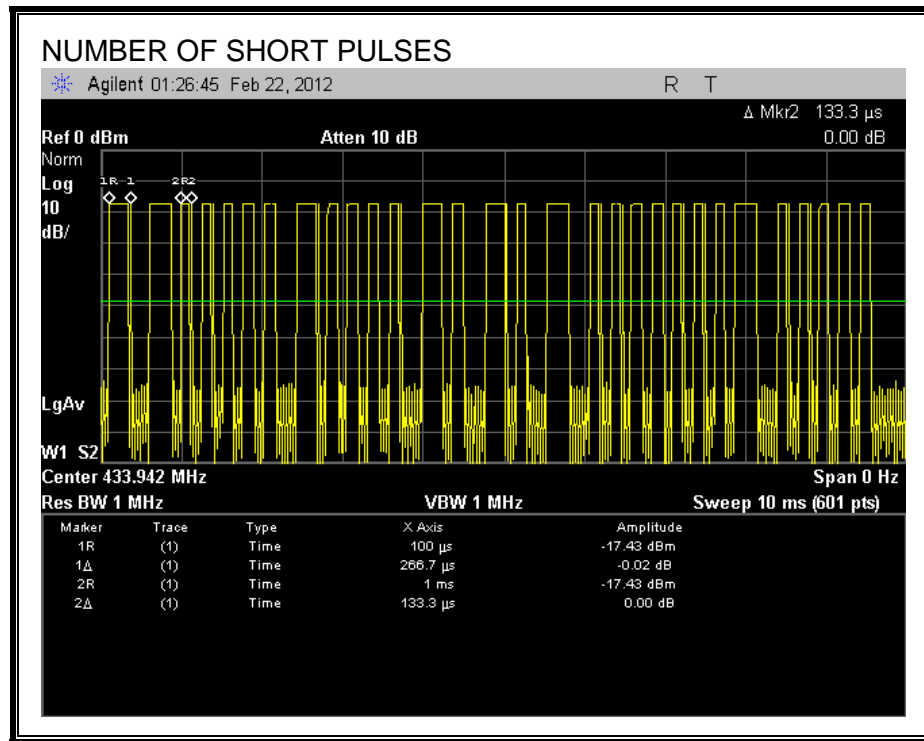

### 7.3. TRANSMISSION TIME

#### LIMITS

FCC §15.231 (a) (2)

IC A1.1.1 (b)


A transmitter activated automatically shall cease transmission within 5 seconds after activation.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1 MHz and the VBW is set to 1 MHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

#### RESULTS

No non-compliance noted:

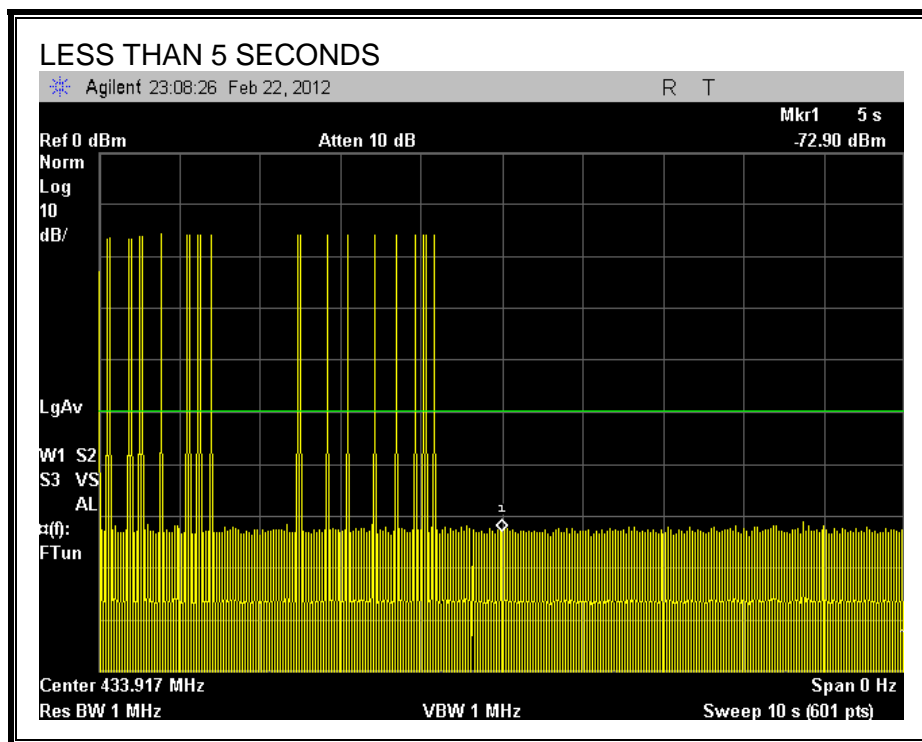

## 8. RADIATED EMISSION TEST RESULTS

### 8.1. TX RADIATED SPURIOUS EMISSION

#### LIMITS

FCC §15.231 (b)

IC A1.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,7501	125 to 3751
174 - 260	3,750	375
260 - 470	3,750 to 12,5001	375 to 1,2501
Above 470	12,500	1,250

1 Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 88	100 **	3
88 216	150 **	3
216 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## **RESULTS**

No non-compliance noted:


**FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz)**

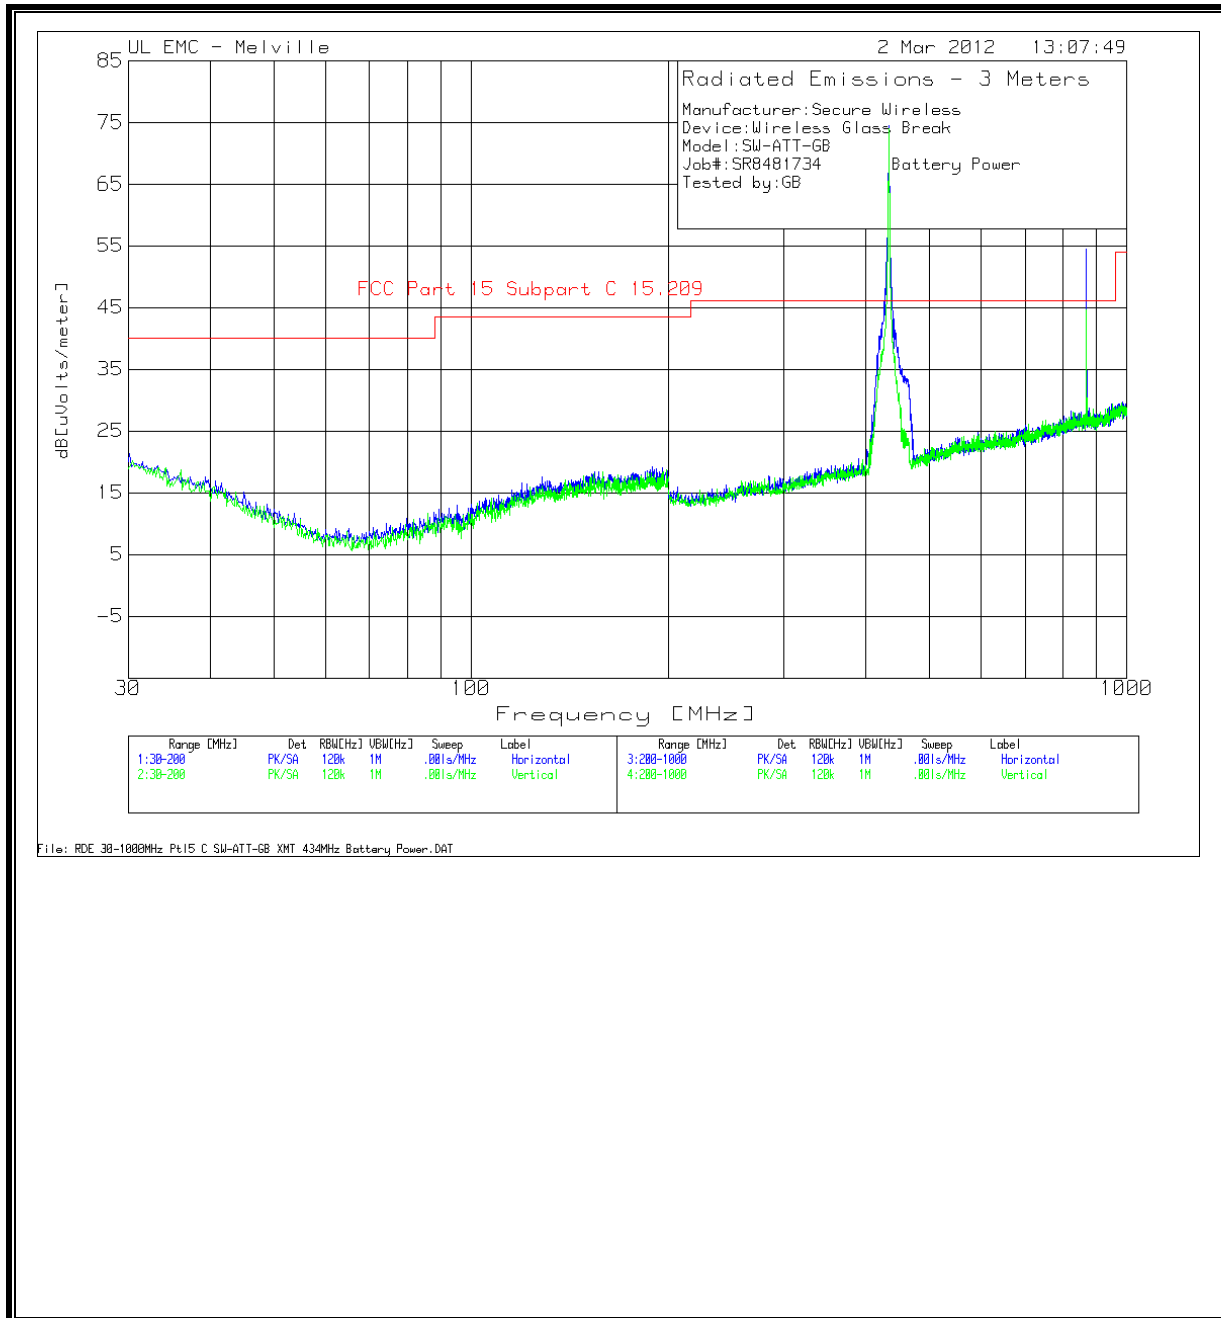



Manufacturer:Secure Wireless																	
Device:Wireless Glass Break																	
Model:SW-ATT-GB																	
Job#:SR8481734 Battery Power																	
Tested by:GB																	
Test	Meter		AF-44067	GL-3M	dB[uVolts/ meter]	DCF	Corrected dB[uVolts/ meter]	FCC Part 15 Subpart C 15.209		FCC Part 15 Subpart C 15.231		FCC Part 15 Subpart C 15.231 Peak		Azimuth [Deps]	Height [cm]	Polarity	
Frequency	Reading	Detector	[dB]	[dB]					Margin		Margin						
Horizontal 200 - 1000MHz																	
433.9263	98.26	PK	17.1	-22.7	92.66	-19.89	72.77	-	-	80.8	-8.03	100.8	-8.14	125	217	Horz	
867.8551	58.68	PK	23.1	-20.8	60.98	-19.89	41.09	-	-	60.8	-19.71	80.8	-19.82	266	225	Horz	
426.9	45.07	QP	16.9	-22.7	39.27	-	-	46	-6.73	-	-	-	-	46	239	Horz	
439.5	47.35	QP	17.2	-22.7	41.85	-	-	46	-4.15	-	-	-	-	145	201	Horz	
444.8968	39.55	QP	17.1	-22.6	34.05	-	-	46	-11.95	-	-	-	-	319	233	Horz	
Vertical 200 - 1000MHz																	
433.9351	93.57	PK	16.6	-22.7	87.47	-19.89	67.58	-	-	80.8	-13.22	100.8	-13.33	345	225	Vert	
867.8614	50.81	PK	23.2	-20.8	53.21	-19.89	33.32	-	-	60.8	-27.48	80.8	-27.59	354	242	Vert	
PK - Peak detector																	
QP - Quasi-Peak detector																	
LnAv - Linear Average detector																	
LgAv - Log Average detector																	
Av - Average detector																	
CAV - CISPR Average detector																	
RMS - RMS detection																	
CRMS - CISPR RMS detection																	


**HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz**

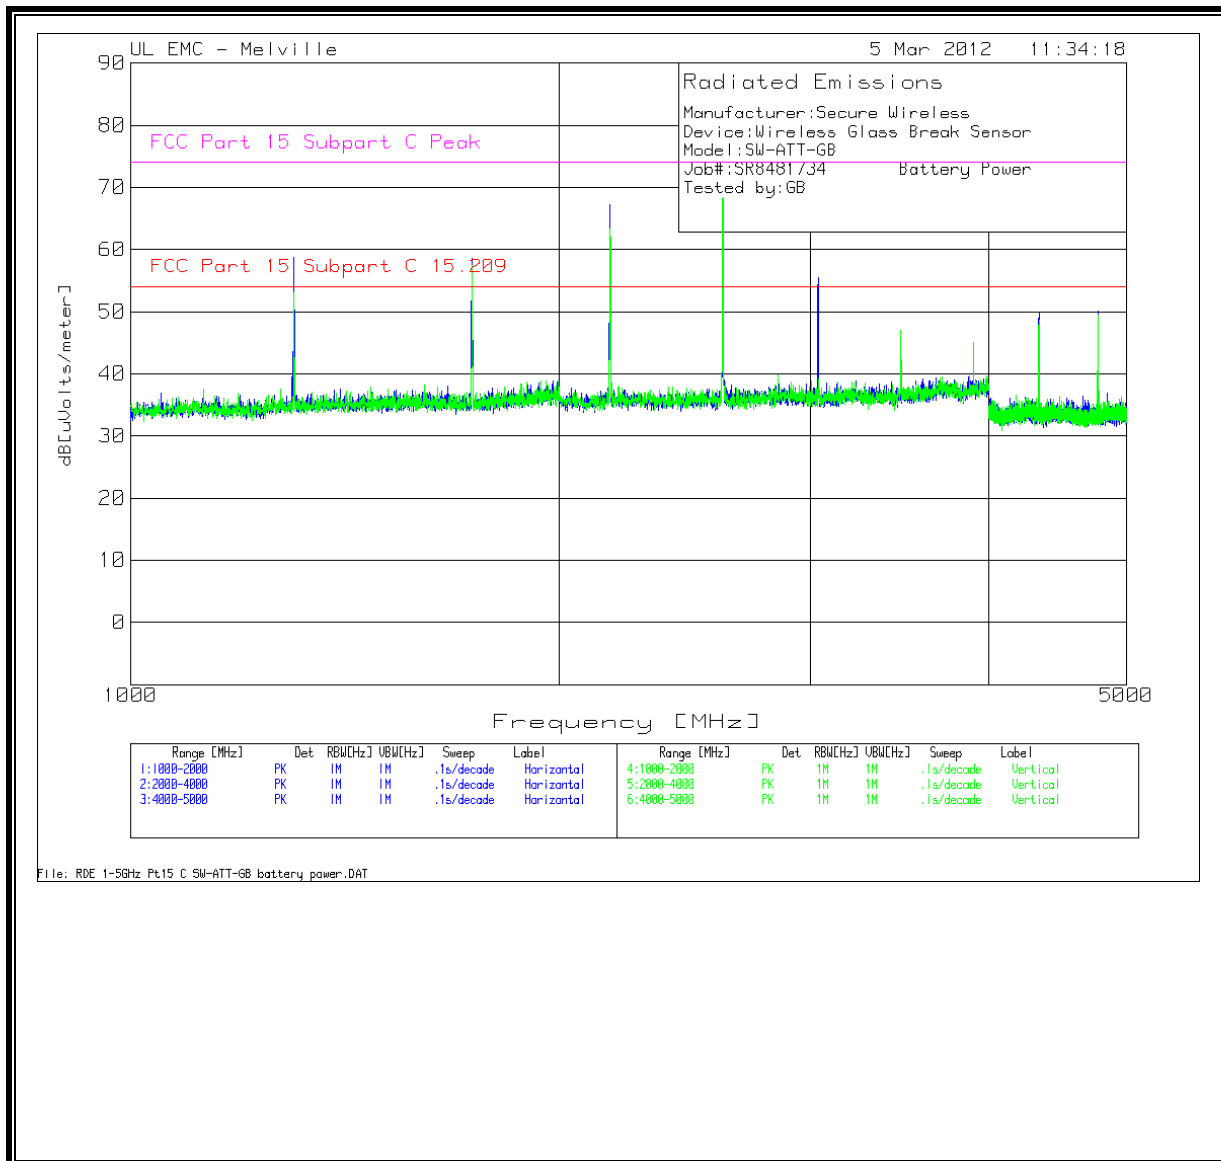


Manufacturer:Secure Wireless															
Device:Wireless Glass Break Sensor															
Model:SW-ATT-GB															
Job#:SR8481734 Battery Power															
Tested by:GB															
Test	Meter		AF-51442	BOMS	dB[uVolts/		Corrected	FCC Part 15		FCC Part 15		Azimuth	Height		
Frequency	Reading	Detector	[dB]	Factor [dB]	meter]	DCF	dB[uVolts/m	Subpart C		Subpart C		[Degs]	[cm]	Polarity	
Horizontal 1000 - 2000MHz															
1301.8	90.84	PK	20.5	-45.22	66.12	-19.89	46.23	54	-7.77	74	-7.88	106	119	Horz	
1735.7	84.87	PK	20.8	-44.71	60.96	-19.89	41.07	54	-12.93	74	-13.04	76	137	Horz	
Horizontal 2000 - 4000MHz															
2169.59	94.02	PK	21.4	-44.23	71.19	-19.89	51.3	54	-2.7	74	-2.81	62	102	Horz	
2603.55	94.55	PK	21.3	-43.65	72.2	-19.89	52.31	54	-1.69	74	-1.8	85	106	Horz	
3037.6	80.09	PK	21.6	-43.07	58.62	-19.89	38.73	54	-15.27	74	-15.38	154	105	Horz	
3471.36	72.66	PK	22.2	-43.02	51.84	-19.89	31.95	54	-22.05	74	-22.16	119	107	Horz	
3905.73	68.8	PK	22.6	-43.06	48.34	-19.89	28.45	54	-25.55	74	-25.66	38	103	Horz	
Horizontal 4000 - 5000MHz															
4504.54	61.47	PK	27.4	-52.64	36.23	-19.89	16.34	54	-37.66	74	-37.77	118	235	Horz	
4773.27	74.03	PK	27.1	-52.49	48.64	-19.89	28.75	54	-25.25	74	-25.36	84	162	Horz	
Vertical 1000 - 2000MHz															
1301.72	81.48	PK	20.5	-45.22	56.76	-19.89	36.87	54	-17.13	74	-17.24	135	170	Vert	
1735.86	84.23	PK	20.8	-44.71	60.32	-19.89	40.43	54	-13.57	74	-13.68	192	167	Vert	
Vertical 2000 - 4000MHz															
2169.62	88.47	PK	21.1	-44.23	65.34	-19.89	45.45	54	-8.55	74	-8.66	44	115	Vert	
2603.71	90.5	PK	21.5	-43.65	68.35	-19.89	48.46	54	-5.54	74	-5.65	247	124	Vert	
3037.4	75.38	PK	21.7	-43.07	54.01	-19.89	34.12	54	-19.88	74	-19.99	80	114	Vert	
3471.32	73.71	PK	22.3	-43.01	53	-19.89	33.11	54	-20.89	74	-21	77	113	Vert	
3905.5	65.95	PK	22.6	-43.06	45.49	-19.89	25.6	54	-28.4	74	-28.51	174	104	Vert	
Vertical 4000 - 5000MHz															
4339.44	77.95	PK	27.8	-51.95	53.8	-19.89	33.91	54	-20.09	74	-20.2	131	115	Vert	
4773.21	81.22	PK	27.2	-52.49	55.93	-19.89	36.04	54	-17.96	74	-18.07	114	114	Vert	
PK - Peak detector															
QP - Quasi-Peak detector															
LnAv - Linear Average detector															
LgAv - Log Average detector															
Av - Average detector															
CAV - CISPR Average detector															
RMS - RMS detection															
CRMS - CISPR RMS detection															

## 9. SETUP PHOTOS


### ANTENNA PORT

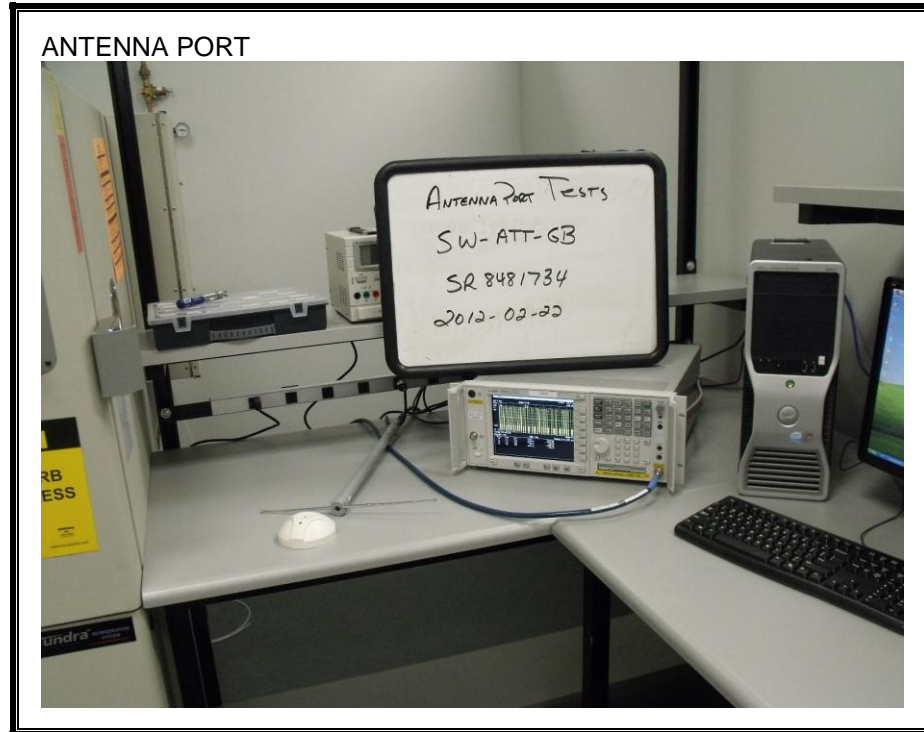


**RADIATED EMISSION FOR PORTABLE CONFIGURATION – X ORIENTATION**

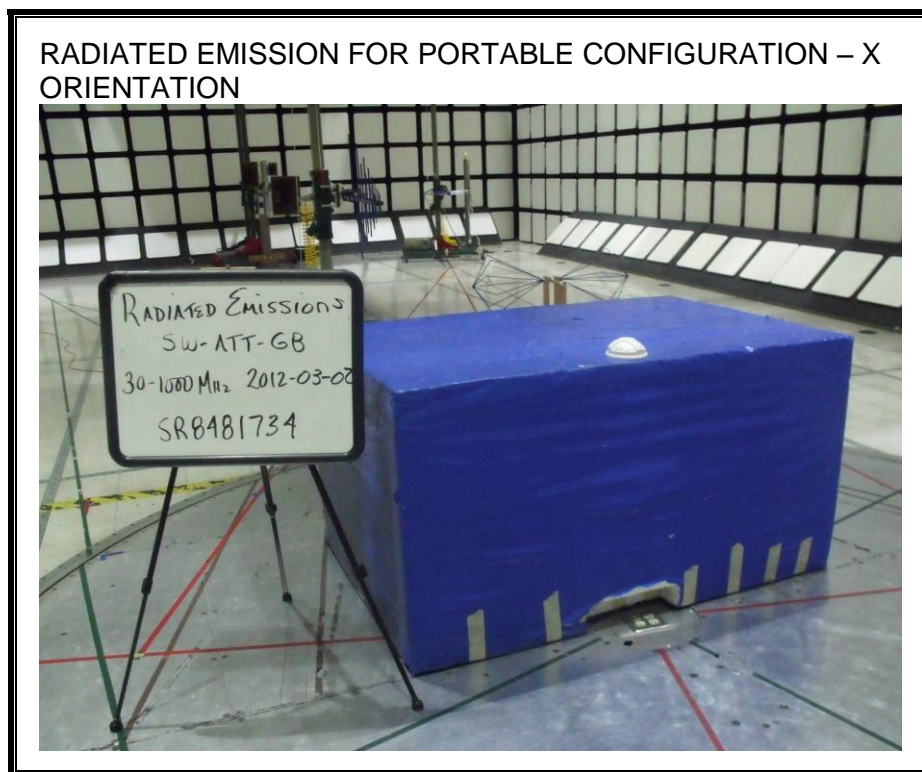

**RADIATED EMISSION FOR PORTABLE CONFIGURATION – Y ORIENTATION**

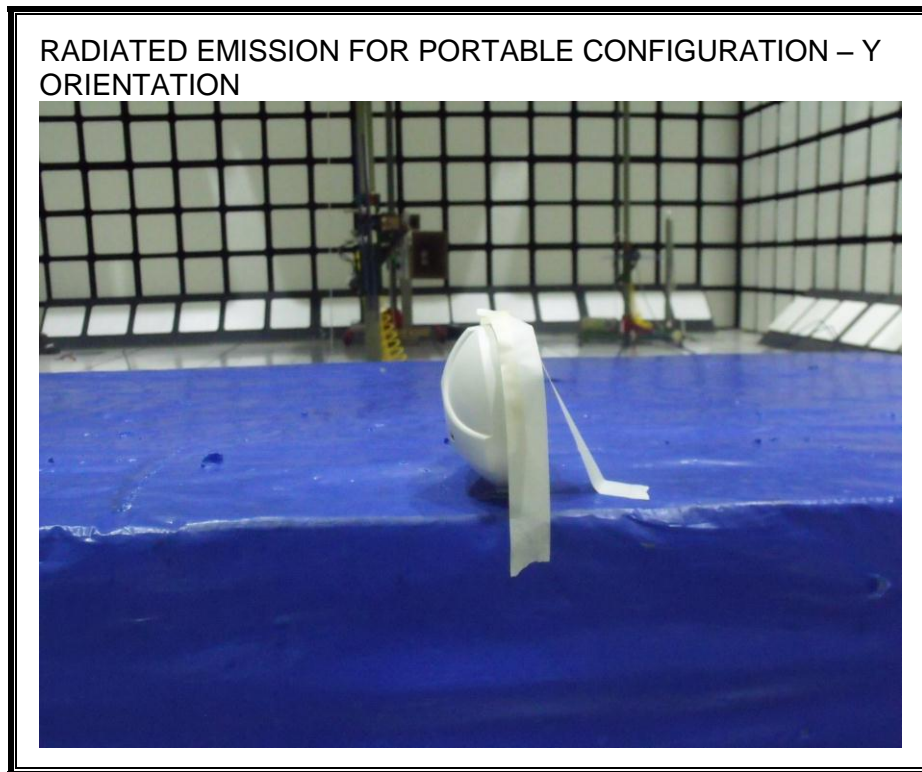



**RADIATED EMISSION FOR PORTABLE CONFIGURATION – Z ORIENTATION**

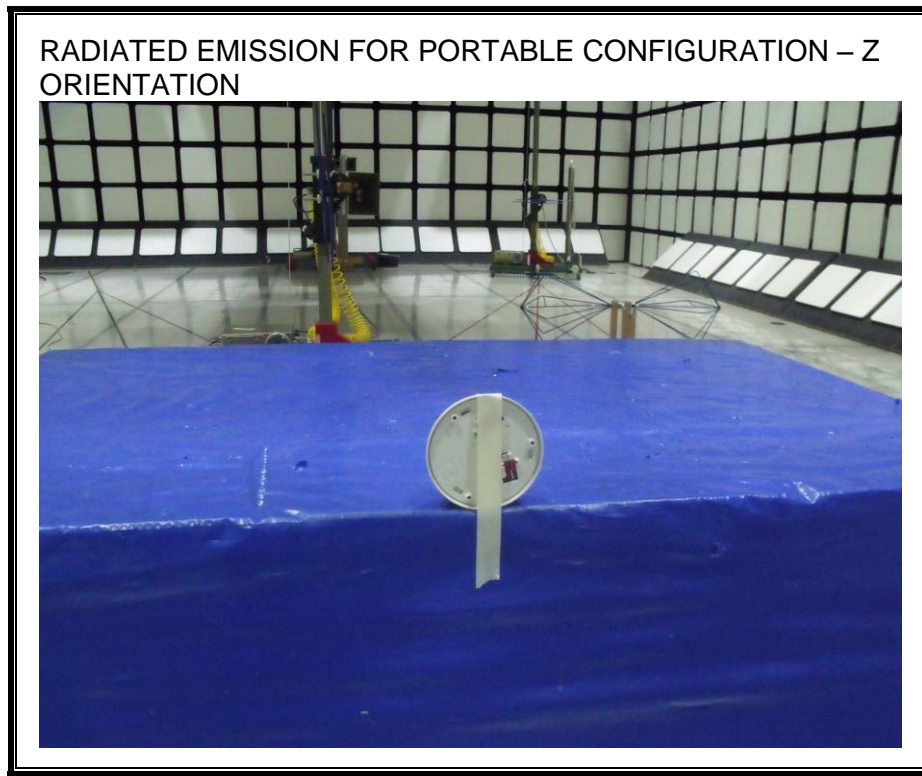





**RADIATED EMISSION ABOVE 30 MHz**

RADIATED EMISSIONS ABOVE 30 MHz (FRONT)

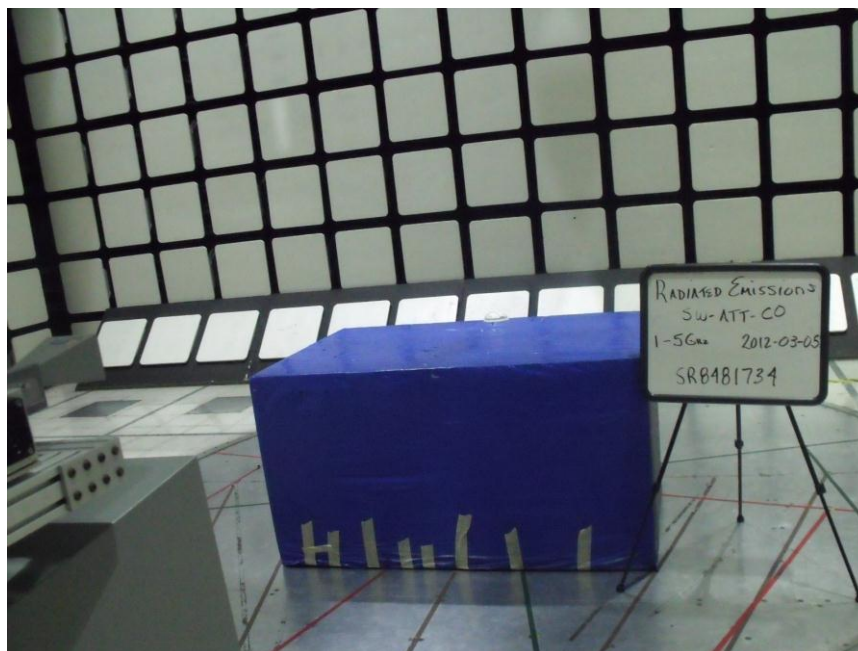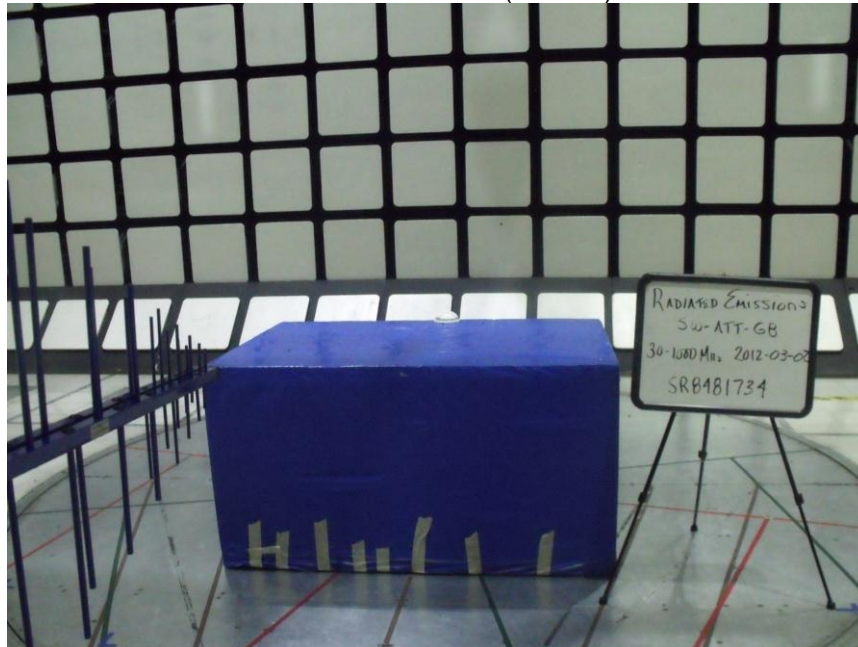



RADIATED EMISSIONS ABOVE 30 MHz (BACK)

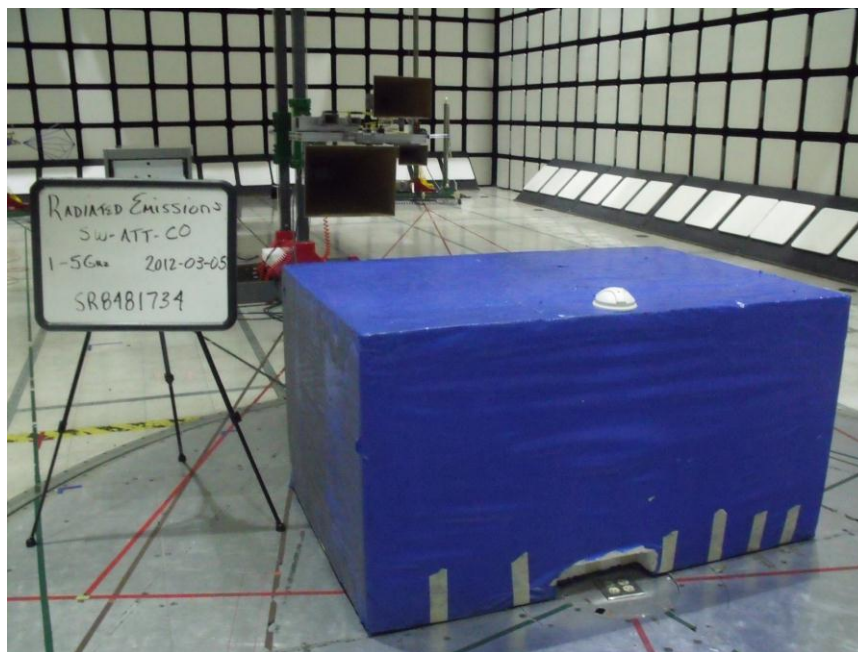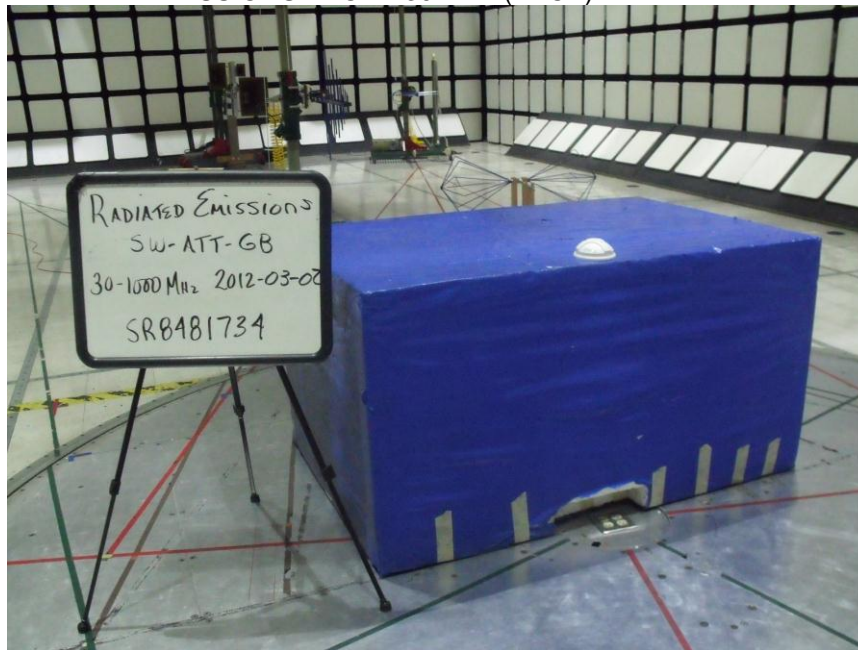

**END OF REPORT**