

FCC ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT CERTIFICATION TO FCC PART 15 REQUIREMENTS

for

INTENTIONAL RADIATOR

of

Wireless home security interface remote

FCC ID Number : QNP-EVREM

Trade Name : Evolution

Model Number : EV-REM

Agency Series : N/A

Report Number : 03E1033-D

Date : June 27, 2003

Prepared for :

Secure Wireless, Inc.

1185 Park Center Dr Suite A/B

Vista, CA 92083, United States

Prepared by :

C&C LABORATORY CO., LTD.

No. 163-1, Chung Sheng Road, Hsin Tien City,

Taipei, Taiwan, R. O. C.

TEL: (02)2217-0894

FAX: (02)2217-1029



Lab. Code: 200617-0



**This report shall not be reproduced, except in full, without the written approval of
C&C Laboratory Co., Ltd.**

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	3
2. PRODUCT DESCRIPTION.....	4
3. TEST FACILITY	4
4. MEASUREMENT STANDARDS	4
5. TEST METHODOLOGY	4
6. MEASUREMENT EQUIPMENT USED	5
7. POWERLINE RFI LIMIT.....	5
8. RADIATED EMISSION LIMITS	6
9. SYSTEM TEST CONFIGURATION	6
10. TEST PROCEDURE	7
11. EQUIPMENT MODIFICATIONS.....	8
12. TEST RESULT	9
12.1. MAXIMUM MODULATION PERCENTAGE(M%).....	9
12.2. THE EMISSIONS BANDWIDTH	9
APPENDIX 1 PHOTOGRAPHS OF EUT	10
APPENDIX 2 TEST DATA	14

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : Secure Wireless, Inc.
1185 Park Center Dr Suite A/B
Vista, CA 92083, United States

CONTACT PERSON : Michael Lamb / Jeff Christensen

TELEPHONE NO. : 866-966 9473

EUT DESCRIPTION : Wireless home security interface remote

MODEL NAME/NUMBER : EV-REM


FCC ID : QNP-EVREM

DATE TESTED : May 15, 2003 ~ June 23, 2003

REPORT NUMBER : 03E1033

TYPE OF EQUIPMENT	SECURITY EQUIPMENT (INTENTIONAL RADIATOR)
EQUIPMENT TYPE	433.92 MHz Wireless home security interface remote
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15

The above equipment was tested by C&C Laboratory Co., Ltd. for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. **Warning:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Engineering Services, Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by C&C Laboratory Co., Ltd. will constitute fraud and shall nullify the document.



Vince Chiang / Supervisor
C&C Laboratory Co., Ltd.

2. PRODUCT DESCRIPTION

Fundamental Frequency	433.92 MHz
Power Source	6V Battery
Transmitting Time	Periodic $\leq$ 5 seconds
Associated Receiver	Model: QNP-EVREC1 (FCC ID)

3. TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at No. 163-1, Chung Sheng Road, Hsin Tien City, Taipei, Taiwan R.O.C. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

4. MEASUREMENT STANDARDS

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

6. MEASUREMENT EQUIPMENT USED

Manufacturer	Model Number	Description	Cal Due Date
SCHAFFNER	SCR3501	MEASURE RECEIVER	06/16/04
ADVANTEST	R3132	SPECTRUM ANALYZER	09/17/03
SCHAFFNER	CBL 6112B	ANTENNA	10/02/03
BELDEN	9913	CABLE	10/13/03
SCHAFFNER	CPA9231A	PRE-AMPLIFIER	10/30/03

7. POWERLINE RFI LIMIT

CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 450 KHz TO 30 MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NO REQUIRED.

8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
PERIODIC OPERATION IN THE BAND 40.66 -40.70 MHz AND ABOVE 70 MHz.	SECTION 15.231

9. SYSTEM TEST CONFIGURATION

Use a block of foam and combined it with EUT wrapping rubber band around it. This way it can test X.Y, and Z axis. To activate continuous transmission, place a small plastic block between rubber band and EUT push button.



Radiated Open Site Test Set-up

10. TEST PROCEDURE

Radiated Emissions, 15.231(4)(b)

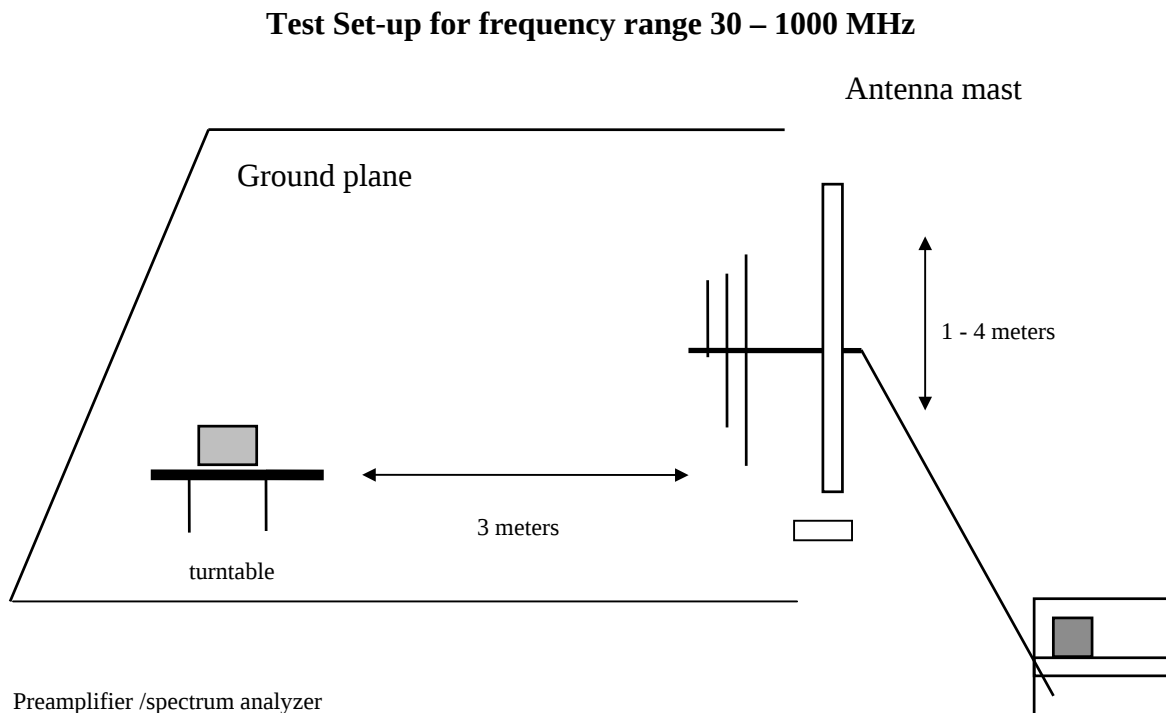


Fig. 1

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3-meters from the EUT.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

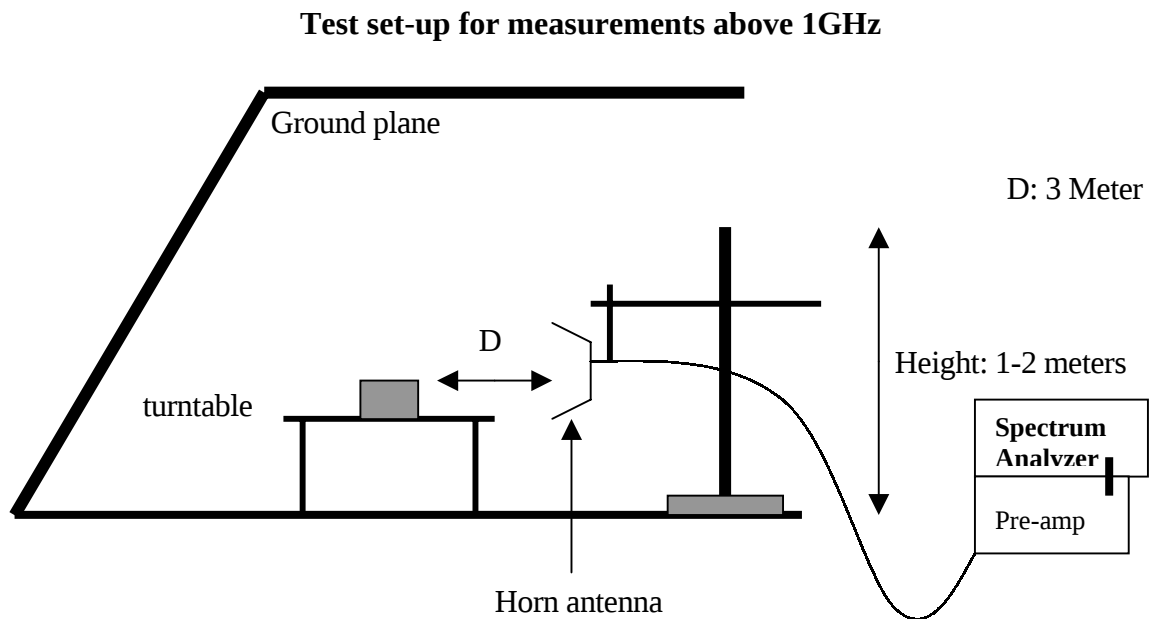


Fig. 2

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 1-meters from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

11. Equipment Modifications

To achieve compliance to FCC Section 15.231 technical limits, the following change(s) were made during compliance testing:

NONE

12. TEST RESULT

Powerline RFI Class B	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	X
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	
BATTERY POWER	X	SECTION 15.231 (b)	X
		SECTION 15.231 (e)	

12.1 Maximum Modulation Percentage (M%)

CALCULATION:

Average Reading = Peak Reading (dBuV/m)+ 20log (Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT.
We measured:

WHERE 1 Period = 98.88 mS
Long pulse = 0.70 mS
Short pulse = 0.34 mS
No of Long pulse = 47
No of Short pulse = 31

Duty Cycle = (N1L1+N2L2+...+Nn-1Ln-1+NnLn)/96.525 or T
Duty Cycle = [(31x0.34)+(47x0.70)]/98.88 =0.4393 =43.93 % or -7.1444dB

12.2 The Emissions Bandwidth

The bandwidth of the emissions were investigated per 15.231(c)

Center Frequency	Measured	Limits
433.92 MHz	408.0 kHz < (refer to plot)	433.92MHzX0.25%=1084.8 kHz

Tue 2003 Jun 17 11:41

REF 90.0 dB μ V


MK Δ 98.88 ms

10dB/

A_Blank Posi B_Write Posi

-0.09 dB

DELTA MKR
98.88 ms

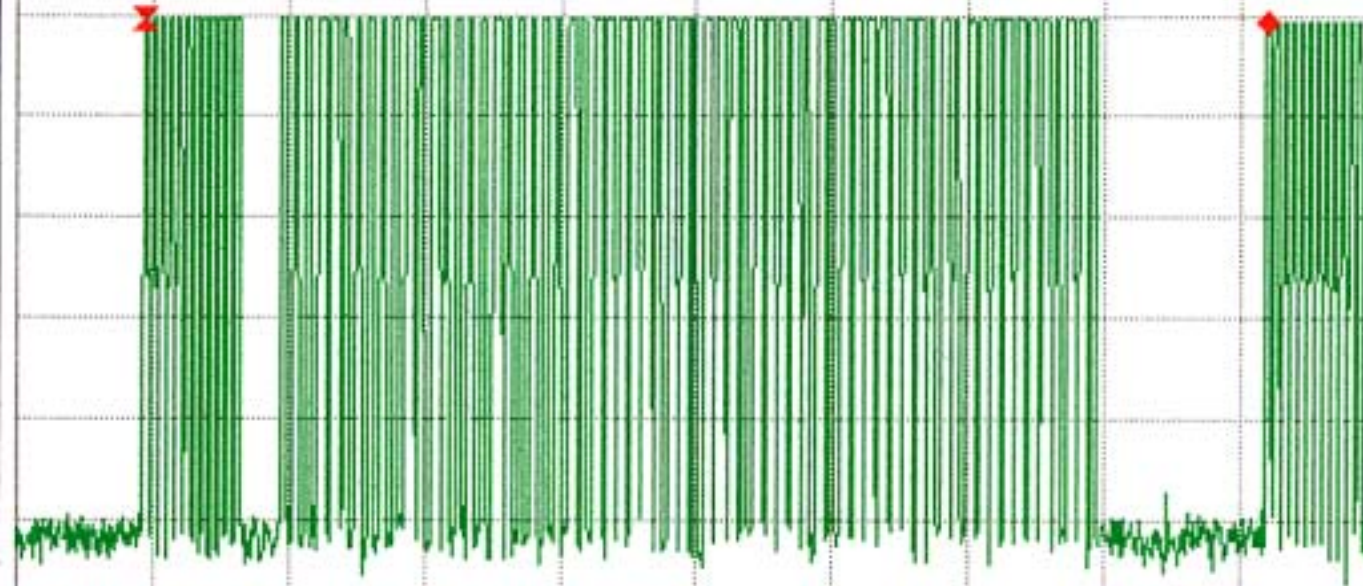

CENTER 433.976000 MHz

SPAN 0.000 kHz

*RBW 100 kHz *VBW 300 kHz *SWP 120 ms

ATT 5 dB

Tue 2003 Jun 17 11:46


REF 90.0 dB μ V

MKA 700.0 μ s

10dB/ A_Blank Posi B_Write Posi

0.15 dB

DELTA MKR
700.0 μ s

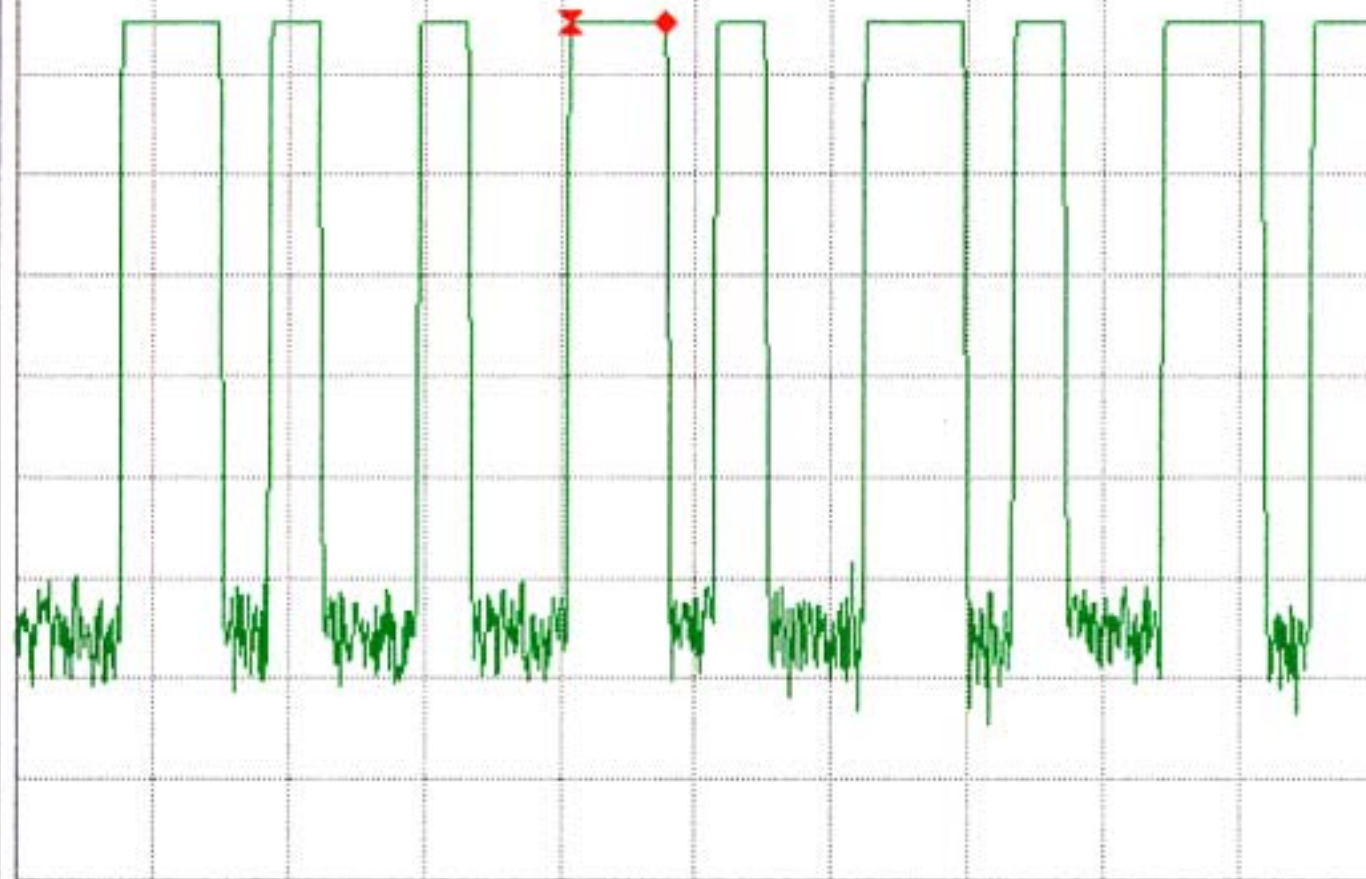

CENTER 433.976000 MHz

SPAN 0.000 kHz

*RBW 100 kHz *VBW 300 kHz *SWP 10 ms

ATT 5 dB

Tue 2003 Jun 17 11:49

REF 90.0 dB μ V

MK Δ 340.0 μ s

10dB/

A_Blank


Posi

B_Write

Posi

0.32 dB

DELTA MKR
340.0 μ s

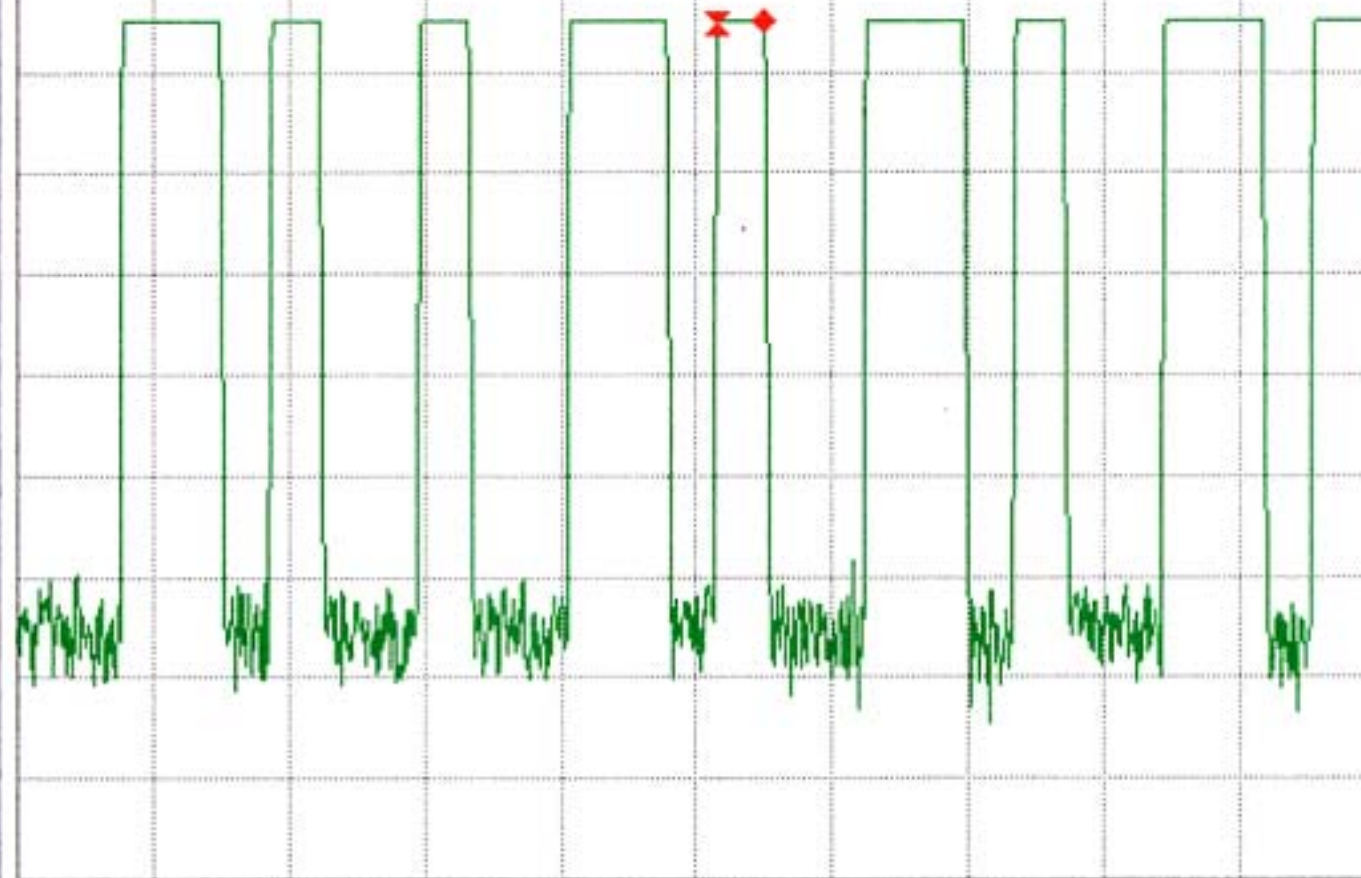

CENTER 433.976000 MHz

SPAN 0.000 kHz

*RBW 100 kHz

*VBW 300 kHz


*SWP 10 ms

ATT 5 dB

Thu 2003 May 15 17:45

REF 100.0 dB μ V

10dB/ A_Write Posi B_Write Posi

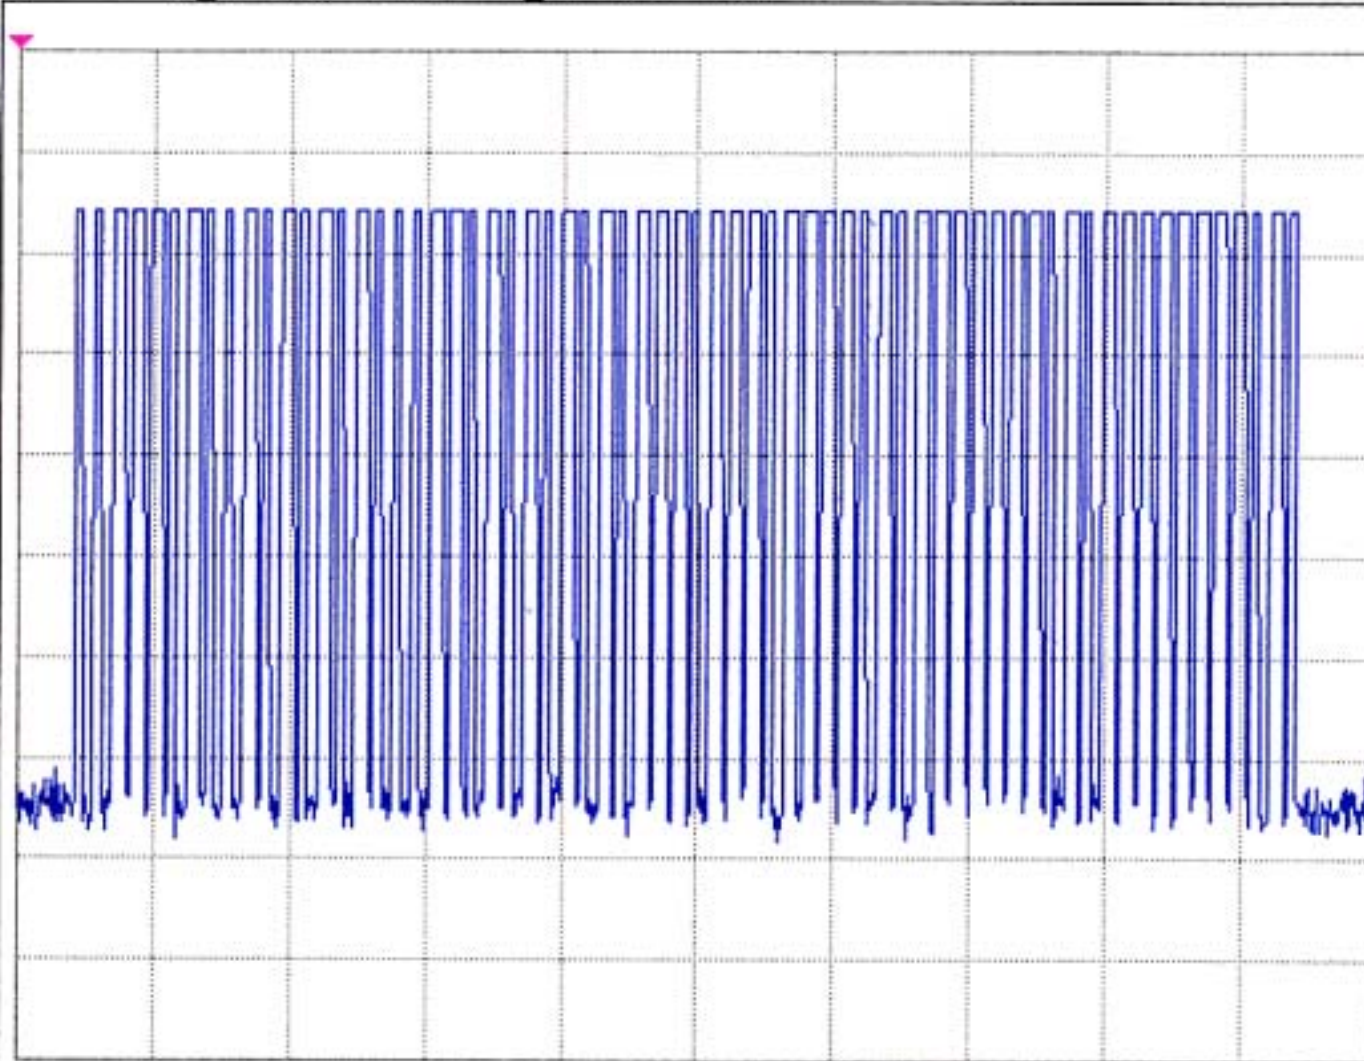

CENTER 433.980600 MHz


SPAN 0.000 kHz

*RBW 100 kHz *VBW 100 kHz *SWP 80 ms *ATT 10dB

Thu 2003 May 15 17:41

REF 100.0 dB μ V

10dB/ A_Write Posi B_Write Posi

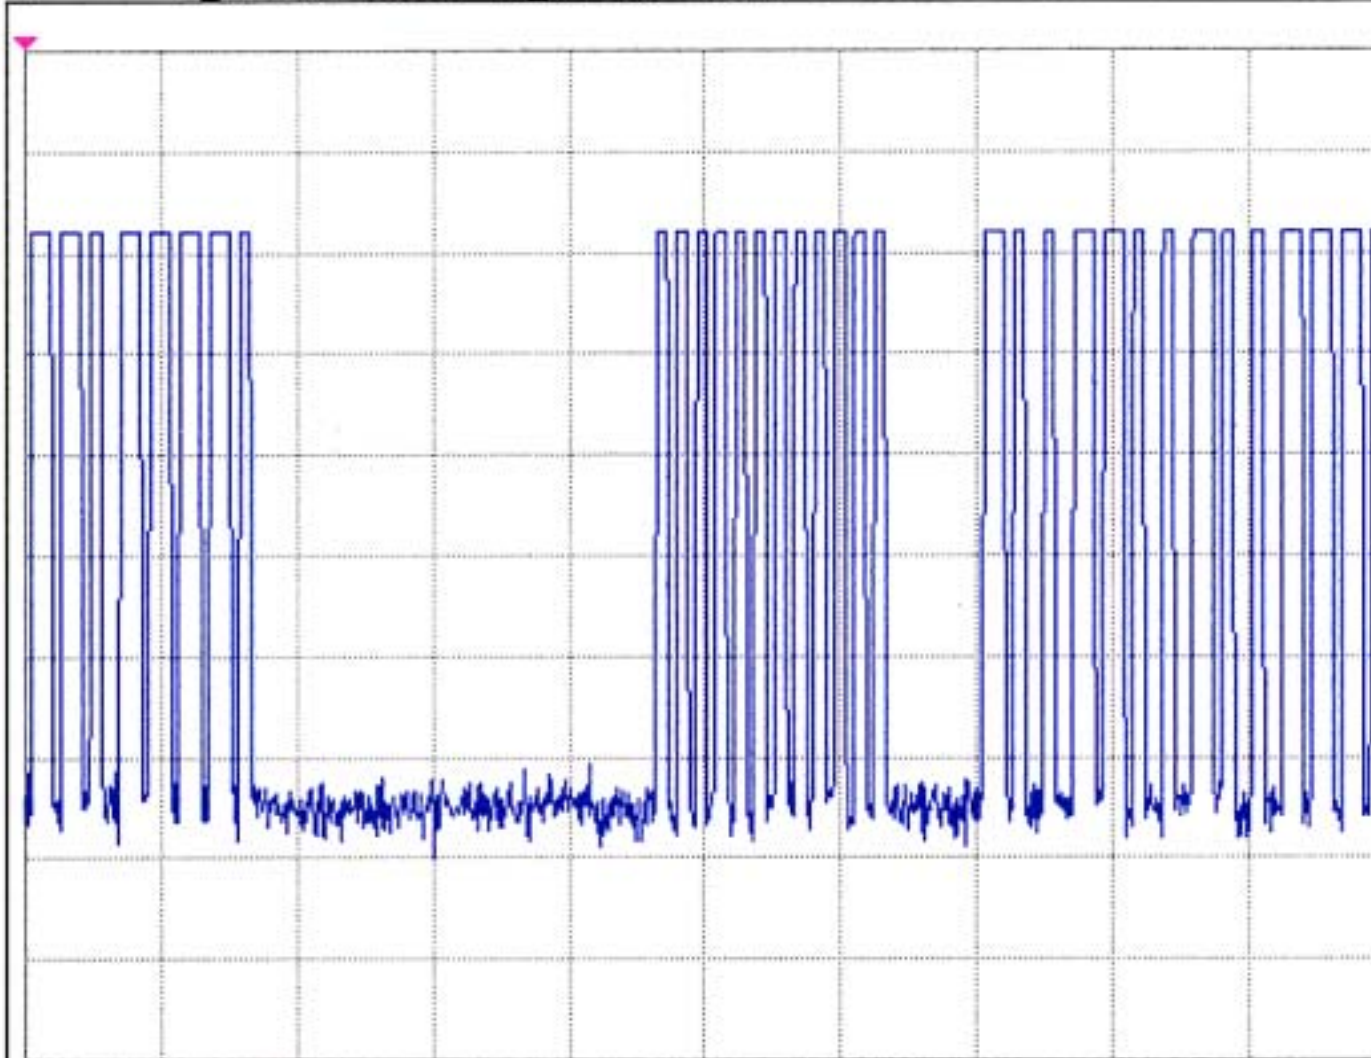

CENTER 433.980600 MHz

SPAN 0.000 kHz

*RBW 100 kHz *VBW 100 kHz *SWP 50 ms *ATT 10dB

Tue 2003 Jun 17 11:33

REF 90.0 dB μ V

DL 52.8 dB μ V

MK Δ 408 kHz

10dB/

A_Max


Posi

B_Blank

Posi

-0.54 dB

DELTA MKR
408 kHz

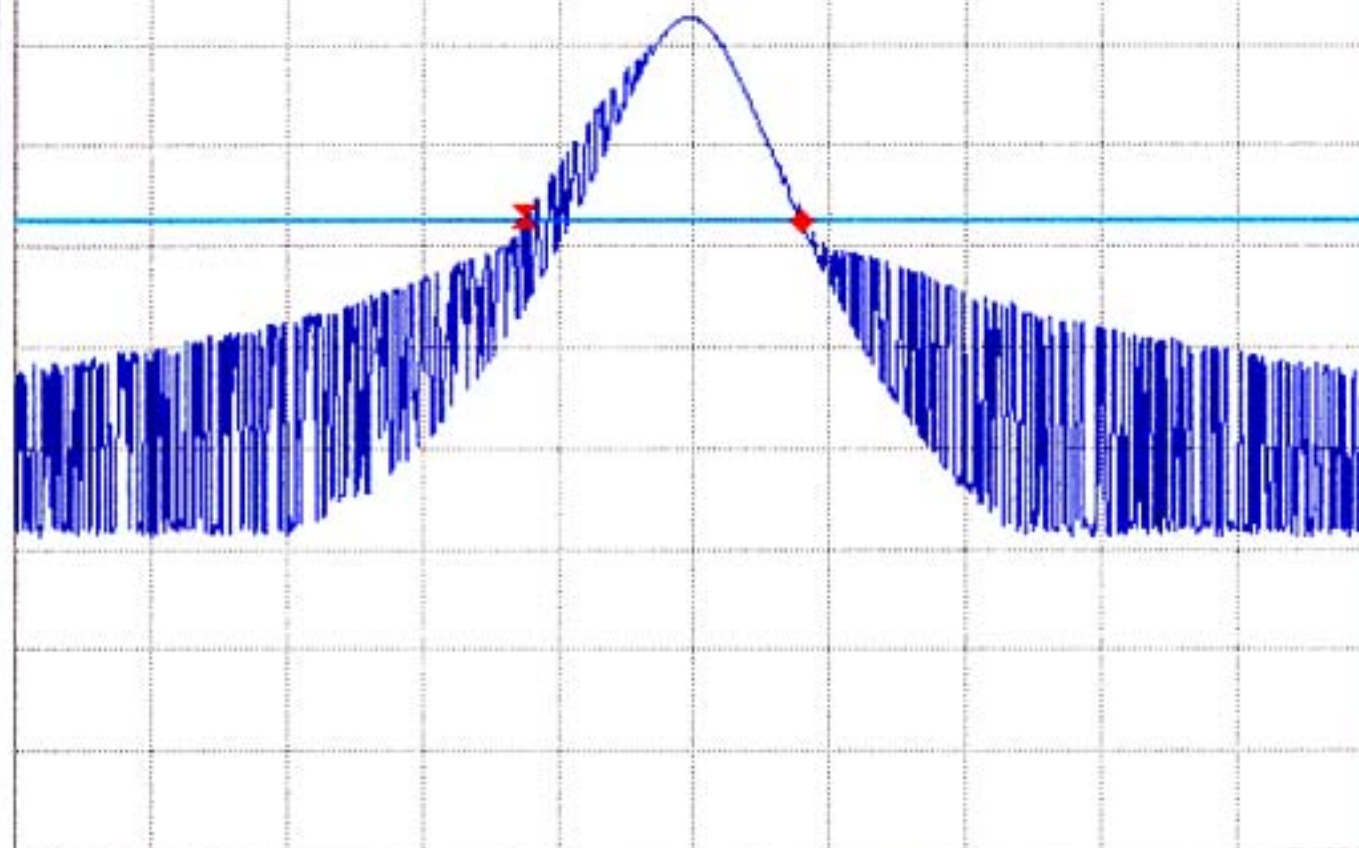

CENTER 433.976 MHz

SPAN 2.000 MHz

*RBW 100 kHz

*VBW 300 kHz

SWP 20 ms

ATT 5 dB

C&C Laboratory CO., LTD.

FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

No. 163-1, Chung Sheng Road,
Hsin Tien City, Taipei, Taiwan, R.O.C.
PHONE: 02-2217-0894 FAX: 02-2217-1029

Project #: 03E1033
Report #: 03E1033D1
Date& Time: 2003/06/23
Test Engr: JIMMY CHEN

Company: Secure Wireless, Inc.
EUT Description: EV-REM (Wireless home security interface remote)
Test Configuration : EUT ONLY
Type of Test: FCC 15.231(b)
Mode of Operation: NORMAL MODE

H-Site

M% = ((t1+t2+t3+...)/T) * 100% = **43.93 %**

Av Reading = Pk Reading + 20*log(M%)
20*log(M%) = **-7.1444**

	Freq.	Pk Rdg	Av Rdg	AF/AT	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height
	(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)
X	Button #1:											
	433.99	62.17	55.03	27.12	3.28	29.68	55.75	80.83	-25.08	3mV	180	1.50
Y	867.99	51.90	44.76	32.74	5.02	28.79	53.73	60.83	-7.10	3mV	0	1.00
	433.99	79.47	72.33	27.12	3.28	29.68	73.05	80.83	-7.78	3mV	90	1.20
Z	867.98	51.12	43.98	32.74	5.02	28.79	52.95	60.83	-7.88	3mV	180	1.50
	433.99	77.49	70.35	27.12	3.28	29.68	71.07	80.83	-9.76	3mV	90	1.40
	867.98	57.50	50.36	32.74	5.02	28.79	59.33	60.83	-1.50	3mV	180	1.00
X	433.99	76.74	69.60	27.12	3.28	29.68	70.32	80.83	-10.51	3mH	180	1.00
	867.99	52.52	45.38	32.74	5.02	28.79	54.35	60.83	-6.48	3mH	90	1.20
Y	434.00	72.17	65.03	27.12	3.28	29.68	65.75	80.83	-15.08	3mH	0	1.10
	867.99	52.52	45.38	32.74	5.02	28.79	54.35	60.83	-6.48	3mH	180	1.30
Z	433.99	70.87	63.73	27.12	3.28	29.68	64.45	80.83	-16.38	3mH	90	1.40
	867.97	50.59	43.45	32.74	5.02	28.79	52.42	60.83	-8.41	3mH	270	1.30

AF/AT=AF+10dB(ATTENUATOR)
Peak: RBW= 100KHz
VBW= 300KHz
A(Average): Pk Reading - 7.1444dB

Total Data #12

C&C Laboratory CO., LTD.

FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

No. 163-1, Chung Sheng Road,
Hsin Tien City, Taipei, Taiwan, R.O.C.
PHONE: 02-2217-0894 FAX: 02-2217-1029

Project #: 03E1033
Report #: 03E1033D1
Date& Time: 2003/06/23
Test Engr: JIMMY CHEN

Company: Secure Wireless, Inc.
EUT Description: EV-REM (Wireless home security interface remote)
Test Configuration : EUT ONLY
Type of Test: FCC 15.231(b)
Mode of Operation: NORMAL MODE

H-Site

M% = ((t1+t2+t3+...)/T) * 100% = **43.93 %**

Av Reading = Pk Reading + 20*log(M%)
20*log(M%) = **-7.1444**

	Freq.	Pk Rdg	Av Rdg	AF/AT	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height
	(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)
X	Button #2:											
	433.99	57.60	50.46	27.12	3.28	29.68	51.18	80.83	-29.65	3mV	90	1.10
Y	867.97	46.03	38.89	32.74	5.02	28.79	47.86	60.83	-12.97	3mV	270	1.50
	433.99	75.53	68.39	27.12	3.28	29.68	69.11	80.83	-11.72	3mV	90	1.20
Z	867.98	54.15	47.01	32.74	5.02	28.79	55.98	60.83	-4.85	3mV	180	1.30
	433.99	75.53	68.39	27.12	3.28	29.68	69.11	80.83	-11.72	3mV	270	1.00
	867.98	54.71	47.57	32.74	5.02	28.79	56.54	60.83	-4.29	3mV	180	1.10
X	433.99	72.78	65.64	27.12	3.28	29.68	66.36	80.83	-14.47	3mH	270	1.00
	867.98	51.36	44.22	32.74	5.02	28.79	53.19	60.83	-7.64	3mH	90	1.20
Y	433.99	71.45	64.31	27.12	3.28	29.68	65.03	80.83	-15.80	3mH	0	1.20
	867.98	51.36	44.22	32.74	5.02	28.79	53.19	60.83	-7.64	3mH	180	1.30
Z	433.99	72.48	65.34	27.12	3.28	29.68	66.06	80.83	-14.77	3mH	0	1.50
	867.97	48.12	40.98	32.74	5.02	28.79	49.95	60.83	-10.88	3mH	270	1.30

AF/AT=AF+10dB(ATTENUATOR)
Peak: RBW= 100KHz
VBW= 300KHz
A(Average): Pk Reading - 7.1444dB

Total Data #12

C&C Laboratory CO., LTD.

FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

No. 163-1, Chung Sheng Road,
Hsin Tien City, Taipei, Taiwan, R.O.C.
PHONE: 02-2217-0894 FAX: 02-2217-1029

Project #: 03E1033
Report #: 03E1033D1
Date& Time: 2003/06/23
Test Engr: JIMMY CHEN

Company: Secure Wireless, Inc.
EUT Description: EV-REM (Wireless home security interface remote)
Test Configuration : EUT ONLY
Type of Test: FCC 15.231(b)
Mode of Operation: NORMAL MODE

H-Site

M% = ((t1+t2+t3+...)/T) * 100% = **43.93 %**

Av Reading = Pk Reading + 20*log(M%)

20*log(M%) = **-7.1444**

	Freq.	Pk Rdg	Av Rdg	AF/AT	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height
	(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)
X	Button #3:											
	433.99	61.95	54.81	27.12	3.28	29.68	55.53	80.83	-25.30	3mV	270	1.00
Y	867.97	49.68	42.54	32.74	5.02	28.79	51.51	60.83	-9.32	3mV	0	1.20
	433.99	75.34	68.20	27.12	3.28	29.68	68.92	80.83	-11.91	3mV	90	1.20
Z	867.98	53.52	46.38	32.74	5.02	28.79	55.35	60.83	-5.48	3mV	270	1.50
	433.99	77.28	70.14	27.12	3.28	29.68	70.86	80.83	-9.97	3mV	90	1.10
	867.98	56.21	49.07	32.74	5.02	28.79	58.04	60.83	-2.79	3mV	0	1.50
X	433.99	75.73	68.59	27.12	3.28	29.68	69.31	80.83	-11.52	3mH	0	1.00
	867.96	52.31	45.17	32.74	5.02	28.79	54.14	60.83	-6.69	3mH	90	1.20
Y	433.99	71.86	64.72	27.12	3.28	29.68	65.44	80.83	-15.39	3mH	0	1.00
	867.96	51.54	44.40	32.74	5.02	28.79	53.37	60.83	-7.46	3mH	90	1.30
Z	433.99	71.23	64.09	27.12	3.28	29.68	64.81	80.83	-16.02	3mH	90	1.40
	867.97	49.12	41.98	32.74	5.02	28.79	50.95	60.83	-9.88	3mH	180	1.70

AF/AT=AF+10dB(ATTENUATOR)
Peak: RBW= 100KHz
VBW= 300KHz
A(Average): Pk Reading - 7.1444dB

Total Data #12

C&C Laboratory CO., LTD.

FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

No. 163-1, Chung Sheng Road,
Hsin Tien City, Taipei, Taiwan, R.O.C.
PHONE: 02-2217-0894 FAX: 02-2217-1029

Project #: 03E1033
Report #: 03E1033D1
Date& Time: 2003/06/23
Test Engr: JIMMY CHEN

Company: Secure Wireless, Inc.
EUT Description: EV-REM (Wireless home security interface remote)
Test Configuration : EUT ONLY
Type of Test: FCC 15.231(b)
Mode of Operation: NORMAL MODE

H-Site

M% = ((t1+t2+t3+...)/T) * 100% = **43.93 %**

Av Reading = Pk Reading + 20*log(M%)
20*log(M%) = **-7.1444**

	Freq.	Pk Rdg	Av Rdg	AF/AT	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height
	(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)
X	Button #4:											
	433.99	76.54	69.40	27.12	3.28	29.68	70.12	80.83	-10.71	3mV	0	1.00
Y	867.98	54.79	47.65	32.74	5.02	28.79	56.62	60.83	-4.21	3mV	90	1.50
	433.99	76.10	68.96	27.12	3.28	29.68	69.68	80.83	-11.15	3mV	180	1.00
Z	867.98	55.30	48.16	32.74	5.02	28.79	57.13	60.83	-3.70	3mV	180	1.20
	433.99	76.10	68.96	27.12	3.28	29.68	69.68	80.83	-11.15	3mV	90	1.10
	867.98	55.30	48.16	32.74	5.02	28.79	57.13	60.83	-3.70	3mV	0	1.70
X	433.99	73.13	65.99	27.12	3.28	29.68	66.71	80.83	-14.12	3mH	180	1.00
	868.00	56.52	49.38	32.74	5.02	28.79	58.35	60.83	-2.48	3mH	0	1.90
Y	433.99	71.87	64.73	27.12	3.28	29.68	65.45	80.83	-15.38	3mH	90	1.10
	867.97	49.34	42.20	32.74	5.02	28.79	51.17	60.83	-9.66	3mH	270	2.00
Z	433.99	69.87	62.73	27.12	3.28	29.68	63.45	80.83	-17.38	3mH	180	1.10
	867.97	43.34	36.20	32.74	5.02	28.79	45.17	60.83	-15.66	3mH	180	1.20

AF/AT=AF+10dB(ATTENUATOR)
Peak: RBW= 100KHz
VBW= 300KHz
A(Average): Pk Reading - 7.1444dB

Total Data #12

C&C Laboratory CO., LTD.

FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

No. 163-1, Chung Sheng Road,
Hsin Tien City, Taipei, Taiwan, R.O.C.
PHONE: 02-2217-0894 FAX: 02-2217-1029

Project #: 03E1033
Report #: 03E1033D1
Date& Time: 2003/06/23
Test Engr: JIMMY CHEN

Company: Secure Wireless, Inc.
EUT Description: EV-REM (Wireless home security interface remote)
Test Configuration : EUT ONLY
Type of Test: FCC 15.231(b)
Mode of Operation: NORMAL MODE

☒ H-Site

Freq.	Pk Rdg	Av Rdg	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
1302	60.42	53.28	25.19	4.75	32.04	51.18	54.00	-2.82	3mV	90	1.1	A
1736	47.71	40.57	26.43	5.58	32.76	39.82	60.83	-21.01	3mV	180	1.0	A
2170	45.35	38.21	27.76	6.25	33.15	39.07	60.83	-21.76	3mV	270	1.2	A
2604	44.74	37.60	28.91	6.77	33.18	40.10	60.83	-20.73	3mV	90	1.1	A
3038	39.50	32.36	30.09	7.45	33.02	36.88	60.83	-23.95	3mV	90	1.0	A
3472	40.13	32.99	31.14	8.18	32.69	39.62	60.83	-21.21	3mV	90	1.0	A
3906	40.02	32.88	32.37	8.62	32.91	40.96	54.00	-13.04	3mV	180	1.3	A
4339	40.72	33.58	32.25	9.10	32.97	41.96	54.00	-12.04	3mV	270	1.5	A
1302	62.64	55.50	25.19	4.75	32.04	53.40	54.00	-0.60	3mH	180	1.8	A
1736	52.72	45.58	26.43	5.58	32.76	44.83	60.83	-16.00	3mH	0	1.0	A
2170	45.16	38.02	27.76	6.25	33.15	38.88	60.83	-21.95	3mH	270	1.1	A
2603	45.04	37.90	28.91	6.77	33.18	40.40	60.83	-20.43	3mH	270	1.3	A
3038	41.19	34.05	30.09	7.45	33.02	38.57	60.83	-22.26	3mH	180	1.2	A
3471	41.19	34.05	31.14	8.18	32.96	40.41	60.83	-20.42	3mH	90	1.5	A
3905	38.52	31.38	32.37	8.62	32.91	39.46	54.00	-14.54	3mH	180	1.5	A
4339	40.07	32.93	32.25	9.10	32.97	41.31	54.00	-12.69	3mH	90	1.0	A

* No other emission were found within 20dB under the limits upto 4.5 GHz.

Total data #16
V.2d

P(Peak): RBW=VBW=1MHz
A(Average): Pk Reading -7.1444dB