



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

HANDHELD TRANSMITTER

MODEL NUMBER: PBTX

FCC ID: QNP-PBTX

REPORT NUMBER: 06U10306-4

ISSUE DATE: JUNE 8, 2006

Prepared for

**SECURE WIRELESS, INC.
5817 DRYDEN PLACE, SUITE D
CARLSBAD, CA 92008, USA**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
<u>---</u>	<u>6/8/2006</u>	<u>Initial Issue</u>	<u>A. Ilarina</u>

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	4
2.	TEST METHODOLOGY	5
3.	FACILITIES AND ACCREDITATION	5
4.	CALIBRATION AND UNCERTAINTY	5
4.1.	MEASURING INSTRUMENT CALIBRATION	5
4.2.	MEASUREMENT UNCERTAINTY	5
5.	EQUIPMENT UNDER TEST	6
5.1.	DESCRIPTION OF EUT	6
5.2.	SOFTWARE AND FIRMWARE	6
5.3.	MODIFICATIONS	6
5.4.	WORST-CASE CONFIGURATION AND MODE	6
5.5.	DESCRIPTION OF TEST SETUP	7
6.	TEST AND MEASUREMENT EQUIPMENT	9
7.	LIMITS AND RESULTS	10
7.1.	20dB BANDWIDTH	10
7.2.	MAXIMUM MODULATION PERCENTAGE (M%)	12
7.3.	LESS THAN 5 SECONDS PLOT	18
7.4.	RADIATED EMISSIONS	20
7.4.1.	TRANSMITTER RADIATED SPURIOUS EMISSIONS	20
8.	SETUP PHOTOS	25

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SECURE WIRELESS, INC.
5817 DRYDEN PLACE, SUITE D
CARLSBAD, CA 92008, U.S.A

EUT DESCRIPTION: HANDHELD TRANSMITTER
\
MODEL: PBTX

SERIAL NUMBER: MD84132

DATE TESTED: May 20-23, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



ALVIN ILARINA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

FRANK IBRAHIM
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The PBTX Handheld Transmitter is a low power wireless remote control device, which is intended to operate on a single fixed frequency of 433.920 MHz. This device operates from a two 3 volt, type CR2450N batteries.

This device contains four buttons, each of which will cause control transmissions to be sent via ASK data transmission at 433.920MHz.

Equipment Type	433.92MHz Transmitter
Fundamental Frequency	433.92 MHz
Power Source	6V Lithium Battery
Transmitting Time	Periodic ≤ 5 seconds
Manufacturer	Secure Wireless, Inc.

5.2. SOFTWARE AND FIRMWARE

EUT is modified to transmit continuously if the button is depressed.

5.3. MODIFICATIONS

No modifications to the EUT were performed.

5.4. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined by X, Y, and Z-axis. The highest measured output power was at Z-Axis.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

N/A


I/O CABLES

N/A

TEST SETUP

The EUT is stand-alone unit and is battery operated.

SETUP DIAGRAM FOR TESTS

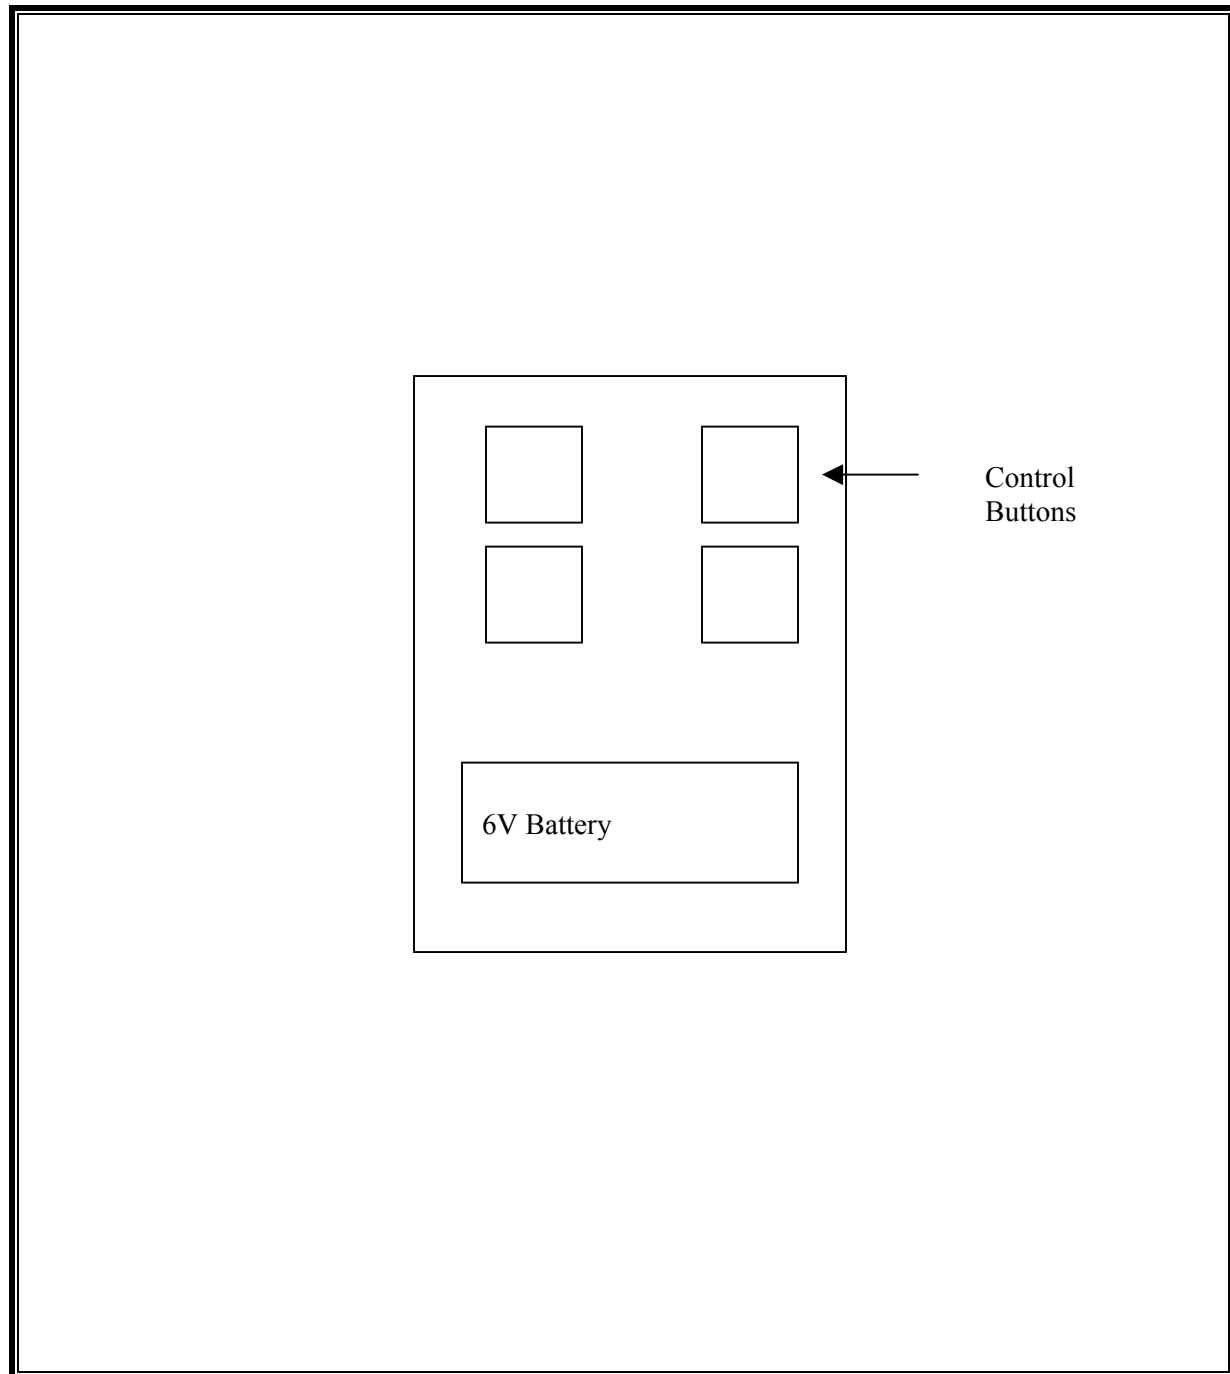

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	02/04/07
RF Filter Section	Agilent / HP	85420E	3705A00256	02/04/07
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	09/03/06
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42510266	10/19/06
Preamplifier, 1300 MHz	Agilent / HP	8447D	2944A06550	09/01/06
Antenna, Log Periodic 200 ~ 1000 MHz	EMCO	3146	9107-3163	03/01/07
Quasi-Peak Adaptor	Agilent / HP	85650A	2521A01038	01/11/08
SA Display Section 3	Agilent / HP	85662A	2314A04793	12/17/07
SA RF Section, 1.5 GHz	Agilent / HP	85680A	2314A02604	03/17/07

7. LIMITS AND RESULTS

7.1. 20dB BANDWIDTH

LIMIT

§15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 100 KHz. The VBW is set to 100 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.


RESULTS

No non-compliance noted:

20dB Bandwidth

Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Margin (KHz)
433.92	437	1084.8	-647.8

20dB BANDWIDTH

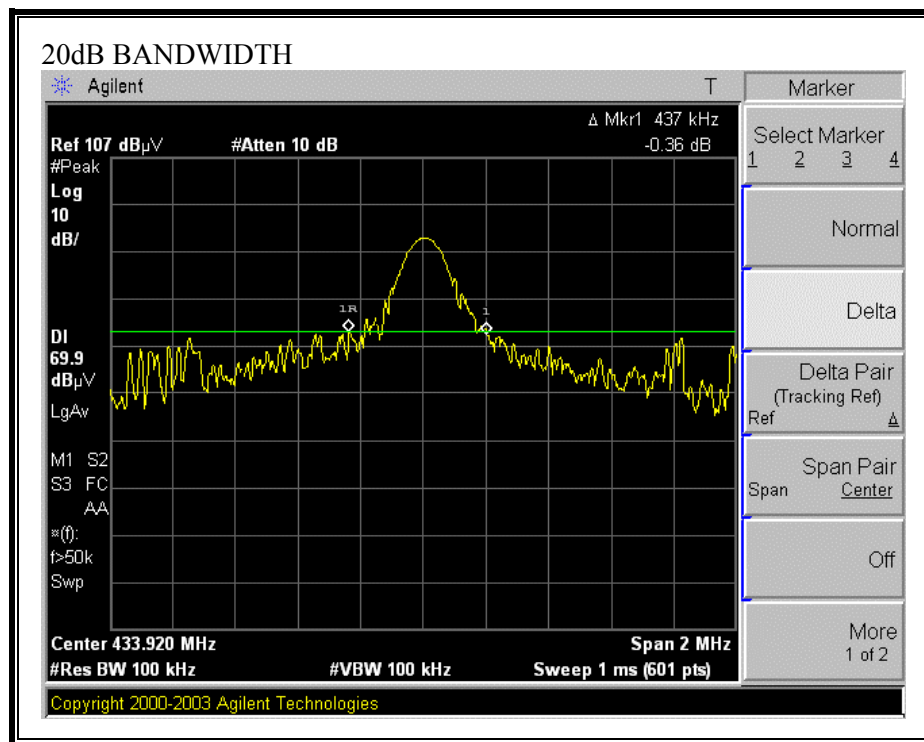

7.2. MAXIMUM MODULATION PERCENTAGE (M%)

LIMIT

§15.35 (c) the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

CALCULATION:

Average Reading = Peak Reading (dBuV/m) + $20\log$ (Duty Cycle), Where Duty Cycle is $(\# \text{ of long pulses} * \text{long pulse width}) + (\# \text{ of short pulses} * \text{short pulse width}) / 100$ or T


RESULTS

No non-compliance noted:


MAXIMUM MODULATION PERCENTAGE

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	% Duty Cycle
60.5	0.25	9	0.10	95	0.190	19.04


ONE PERIOD

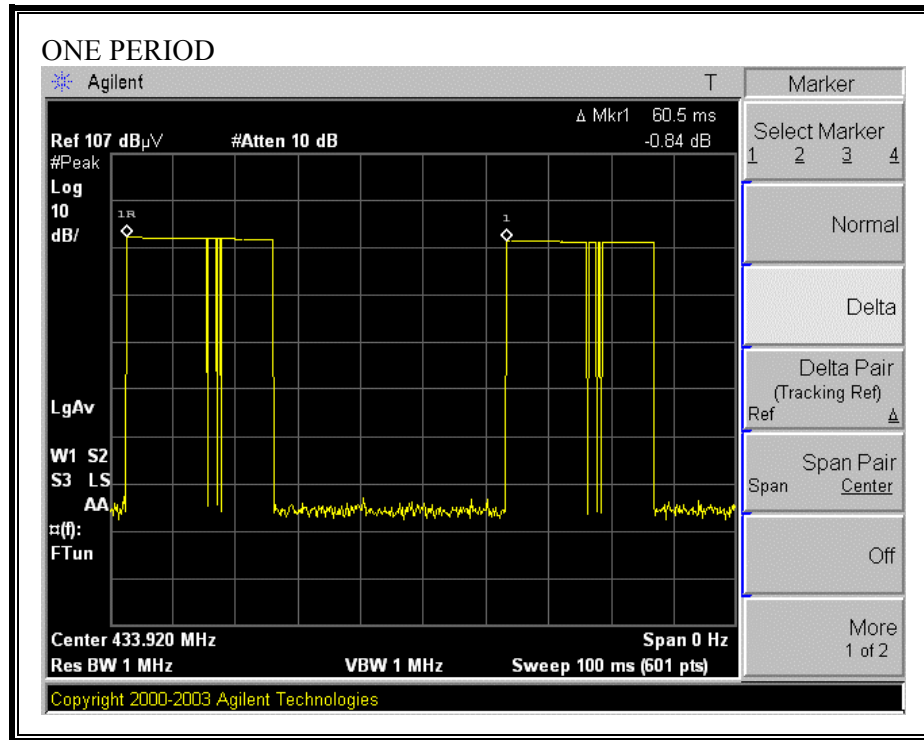


ON TIME

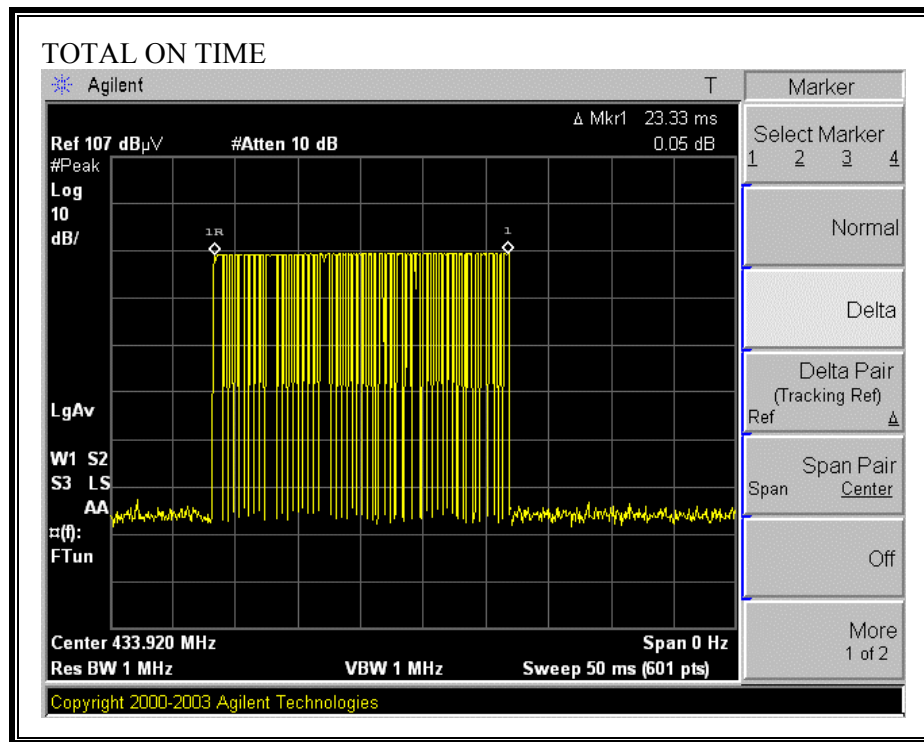

LONG PULSE WIDTH

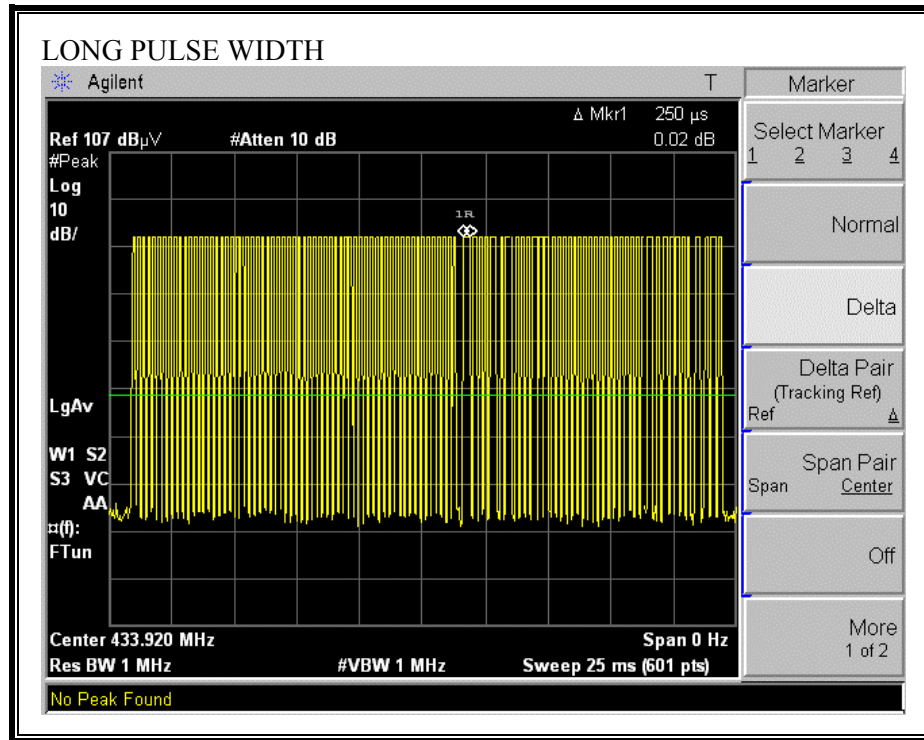

SHORT PULSE WIDTH

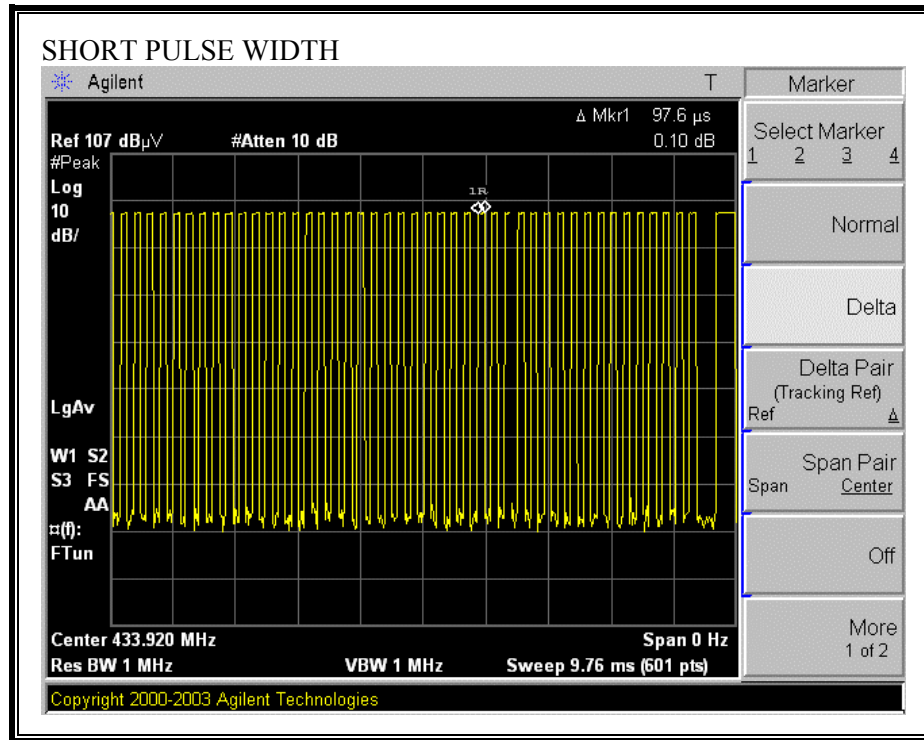

7.3. LESS THAN 5 SECONDS PLOT

LIMIT

§15.231 (a) (1) a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(a) (2) a transmitter activated automatically shall cease transmission within 5 seconds after activation.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

RESULTS

No non-compliance noted:

Transmission begins approximately 1.05 seconds after activation and transmission ceases approximately 3.65 seconds after activation.

LESS THAN 5 SECONDS

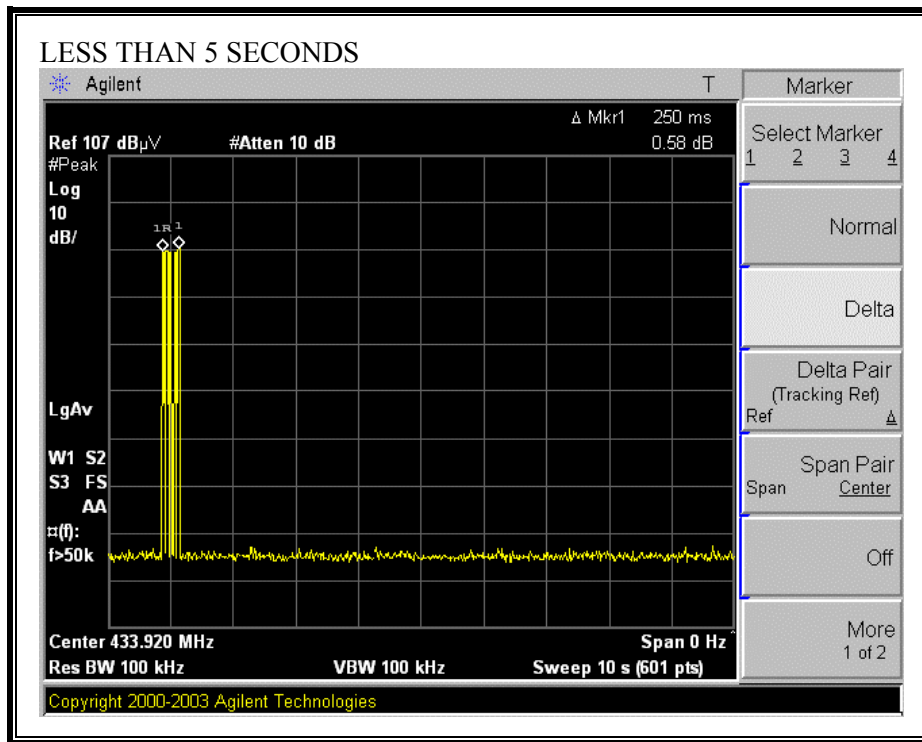

7.4. RADIATED EMISSIONS

7.4.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.231 (b) In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 ¹	125 to 375 ¹
174 - 260	3,750	375
260 - 470	3,750 to 12,500 ¹	375 to 1,250 ¹
Above 470	12,500	1,250

¹ Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE


The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

FUNDAMENTAL, HARMONICS AND SPURIOUS EMISSIONS 30 – 1000 MHZ

 <p>FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888</p>														<p><i>Project #:</i> 06U10306 <i>Report #:</i> 06U10306 <i>Date & Time:</i> 5/20/2006 <i>Test Engr:</i> Frank Ibrahim</p>			
<p><i>Company:</i> Secure Wireless, Inc. <i>EUT Description:</i> Handheld Transmitter <i>Test Configuration:</i> EUT only <i>Type of Test:</i> FCC 15.231b <i>Mode of Operation:</i> Transmitting</p>																	
<p>M% = ((t1+t2+t3+...)/T) = 19.00%</p> <table border="1"> <tr> <td>Av Reading = Pk Reading + 20*log(M%)</td> </tr> <tr> <td>20 * log (M%) = -14.42</td> </tr> </table>																Av Reading = Pk Reading + 20*log(M%)	20 * log (M%) = -14.42
Av Reading = Pk Reading + 20*log(M%)																	
20 * log (M%) = -14.42																	
Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)			
X-Position (EUT Lay down)																	
433.92	68.40	53.98	16.11	6.18	0.00	90.69	76.27	100.83	80.83	-10.14	-4.56	3mV	0.00	1.00			
433.92	68.30	53.88	16.11	6.18	0.00	90.59	76.17	100.83	80.83	-10.24	-4.66	3mH	0.00	2.00			
Y-Position (EUT Standup)																	
433.92	71.20	56.78	16.11	6.18	0.00	93.49	79.07	100.83	80.83	-7.34	-1.76	3mV	0.00	1.00			
433.92	66.10	51.68	16.11	6.18	0.00	88.39	73.97	100.83	80.83	-12.44	-6.86	3mH	0.00	2.00			
Z-Position (EUT Side Lay down)																	
433.92	61.00	46.58	16.11	6.18	0.00	83.29	68.87	100.83	80.83	-17.54	-11.96	3mV	0.00	1.00			
433.92	72.00	57.58	16.11	6.18	0.00	94.29	79.87	100.83	80.83	-6.54	-0.96	3mH	0.00	2.50			
Worst Position:																	
867.00	35.60	21.18	20.32	9.62	0.00	65.54	51.12	80.83	60.83	-15.29	-9.71	3mV	0.00	1.00			
867.00	31.90	17.48	20.32	9.62	0.00	61.84	47.42	80.83	60.83	-18.99	-13.41	3mH	0.00	2.00			

HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz

05/23/06
High Frequency Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engineer: William Zhuang
Project #: 06U10306
Company: Secure Wireless
Test Target: FCC 15.231
Mode Of Operation: TX ON

Test Equipment:

Horn 1-18GHz
T120; S/N: 29310 @3m

Pre-amplifier 1-26GHz
T87 Miteq 924342

Pre-amplifier 26-40GHz

Horn > 18GHz

Limit
FCC 15.205

Hi Frequency Cables

2 foot cable
William 177079009

3 foot cable

12 foot cable
William 187209004

HPF
HPF_1.5GHz

Reject Filter

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.301	3.0	77.2	63.2	28.8	2.3	-44.9	0.0	0.1	63.6	49.6	74.0	54.0	-10.4	-4.4	V
1.735	3.0	68.1	54.1	30.6	2.5	-44.8	0.0	0.3	56.6	42.6	80.8	60.8	-24.2	-18.2	V
2.169	3.0	70.9	56.9	31.7	2.7	-44.8	0.0	0.5	61.0	47.0	80.8	60.8	-19.8	-13.8	V
2.603	3.0	78.2	64.2	32.0	2.9	-44.6	0.0	0.6	69.0	55.0	80.8	60.8	-11.8	-5.8	V
3.037	3.0	73.6	59.6	32.4	3.0	-44.2	0.0	0.6	65.5	51.5	80.8	60.8	-15.3	-9.3	V
3.471	3.0	70.2	56.2	32.8	3.2	-44.5	0.0	0.6	62.2	48.2	80.8	60.8	-18.6	-12.6	V
3.905	3.0	72.4	58.4	33.3	3.3	-44.8	0.0	0.6	64.8	50.8	74.0	54.0	-9.2	-3.2	V
4.339	3.0	67.4	53.4	33.6	3.5	-45.0	0.0	0.6	60.0	46.0	74.0	54.0	-14.0	-8.0	V
1.301	3.0	77.0	62.6	28.8	2.3	-44.9	0.0	0.1	63.5	49.0	74.0	54.0	-10.5	-5.0	H
1.735	3.0	66.8	52.3	30.6	2.5	-44.8	0.0	0.3	55.3	40.9	80.8	60.8	-25.5	-19.9	H
2.169	3.0	68.0	53.6	31.7	2.7	-44.8	0.0	0.5	58.0	43.6	80.8	60.8	-22.8	-17.2	H
2.603	3.0	81.6	67.2	32.0	2.9	-44.6	0.0	0.6	72.4	58.0	80.8	60.8	-8.4	-2.8	H
3.037	3.0	79.0	64.6	32.4	3.0	-44.2	0.0	0.6	70.8	56.4	80.8	60.8	-10.0	-4.4	H
3.471	3.0	73.9	59.5	32.8	3.2	-44.5	0.0	0.6	66.0	51.6	80.8	60.8	-14.8	-9.2	H
3.905	3.0	72.8	58.4	33.3	3.3	-44.8	0.0	0.6	65.2	50.7	74.0	54.0	-8.8	-3.3	H
4.339	3.0	67.8	53.3	33.6	3.5	-45.0	0.0	0.6	60.3	45.9	74.0	54.0	-13.7	-8.1	H

f Measurement Frequency
Dist Distance to Antenna
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss

Amp Preamp Gain
D Corr Distance Correct to 3 meters
Avg Average Field Strength @ 3 m
Peak Calculated Peak Field Strength
HPF High Pass Filter

Avg Lim Average Field Strength Limit
Pk Lim Peak Field Strength Limit
Avg Mar Margin vs. Average Limit
Pk Mar Margin vs. Peak Limit

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION



Y-AXIS





END OF REPORT