



Underwriters Laboratories Inc.
1285 Walt Whitman Rd.
Melville, NY 11747

www.ul.com/emc
(631) 271-6200

Job Number:	11U13642
Project Number:	SR7342910-T001
Date:	2011-02-17
Revision Date:	2012-03-21
Model:	SW-NAP-V2DW
FCC ID:	QNP-V2DW319
IC Number:	4676A-V2DW319

Electromagnetic Compatibility Test Report

For

Secure Wireless, Inc

Copyright © 2010 Underwriters Laboratories Inc.

Underwriters Laboratories Inc. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Underwriters Laboratories Inc.
1285 Walt Whitman Rd.
Melville, NY 11747

**A not-for-profit organization dedicated
to public safety and committed to
quality service for over 100 years**

Tel: (631) 271-6200 Fax: (631) 439-6095

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 2 of 29

IC Number: 4676A-V2DW319

Test Report Details

Tests Performed By: **Underwriters Laboratories Inc.
1285 Walt Whitman Rd.
Melville, NY 11747**

Tests Performed For: **Secure Wireless, Inc
5817 Dryden Place, Suite D
Carlsbad, CA 92008**

Applicant Contact: **Jay Stone**
Phone: **(866) 966-9473**
E-mail: **jay@mysecurewireless.com**

Test Report Date: **2011-02-17**
Test Report Revision Date: **2012-03-21**

Product Type: **Door Window Sensor**

Product standards **FCC Part 15, Subpart C, 15.231, RSS-GEN, Issue 3, RSS-210,
Issue 8**

Model Number: **SW-NAP-V2DW**

Sample Serial Number: **Non-serialized production unit**

EUT Category: **Periodic Low Power Transmitter**

Testing Start Date: **2011-02-05**

Date Testing Complete: **2011-02-15**

Overall Results: Compliant

Underwriters Laboratories Inc. reports apply only to the specific samples tested under stated test conditions. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. Underwriters Laboratories Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Underwriters Laboratories Inc. issued reports. This report shall not be used to claim, constitute or imply product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the US government.

This report may contain test results that are not covered by the NVLAP or A2LA accreditation. The scope of accreditation is limited to the specific tests that are listed on the NVLAP and/or A2LA websites referenced at the end of this report.

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 3 of 29

IC Number: 4676A-V2DW319

Report Directory

1.0	GENERAL - Product Description	4
1.1	Equipment Description	4
1.2	Equipment Marking Plate	4
1.3	Device Configuration During Test	5
1.3.1	Equipment Used During Test:	5
1.3.2	Input/Output Ports:	5
1.3.3	EUT Internal Operating Frequencies:	6
1.3.4	Power Interface:	6
1.4	Block Diagram:	6
1.5	EUT Configurations	7
1.6	EUT Operation Modes	7
2.0	Summary	8
2.1	Deviations from standard test methods	8
2.2	Device Modifications Necessary for Compliance	8
2.3	Reference Standards	9
2.4	Results Summary	9
3.0	Calibration of Equipment Used for Measurement	10
4.0	EMISSIONS TEST RESULTS	10
4.1	Test Conditions and Results – Occupied Bandwidth	11
4.2	Test Conditions and Results – Cease Operation	14
4.3	Test Conditions and Results – Pulse Train	17
4.4	Test Conditions and Results – RADIATED EMISSIONS	21
5.0	IMMUNITY TEST RESULTS	27
5.1	Performance Criteria	27
5.1.1	General	27
5.1.2	Product Specific Performance Criteria	27
Appendix A		27
	Accreditations and Authorizations	27

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 4 of 29

IC Number: 4676A-V2DW319

Report Revision History

Revision Date	Description	Revised By	Revision Reviewed By
None	Original	-	-
2011-04-18	Updated equipment product description	B. DeLisi	M. Antola
2012-03-16	Added IC Number	B. DeLisi	N/A, no technical changes
2012-03-21	Updated product description	B. DeLisi	N/A, no technical changes

1.0 G E N E R A L - Product Description

1.1 Equipment Description

The SW-NAP-V2DW is a door window sensor for security use.

Per FCC Part 2.1093 (C) this device is not required to undergo testing for radio-frequency radiation exposure.

Antenna description: Permanently attached internal loop on the RF circuit board.

The transmissions are triggered by a magnetic switch. The device does transmit at predetermined intervals. According to the applicant, a single transmission occurs every 70 minutes. A single transmission is less than 2 seconds in duration. A single transmission can be seen in Figure 4 of this report.

1.2 Equipment Marking Plate

Not available at time of test.

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 5 of 29

IC Number: 4676A-V2DW319

1.3 Device Configuration During Test

1.3.1 Equipment Used During Test:

Use	Product Type	Manufacturer	Model	Comments
EUT	Door Window Sensor	Secure Wireless, Inc	SW-NAP-V2DW	None
Note: EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment, or SIM - Simulator (Not Subjected to Test)				

1.3.2 Input/Output Ports:

Port #	Name	Type*	Cable Max. >3m (Y/N)	Cable Shielded (Y/N)	Comments
0	Enclosure	N/E	—	—	None
1	Mains	Batt	NA	NA	3V Lithium batteries
Note: AC = AC Power Port DC = DC Power Port N/E = Non-Electrical I/O = Signal Input or Output Port (Not Involved in Process Control) Batt = Battery TP = Telecommunication Ports					

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 6 of 29

IC Number: 4676A-V2DW319

1.3.3 EUT Internal Operating Frequencies:


Frequency (MHz)	Description
9.984375	Crystal
319.5	Transmit frequency

1.3.4 Power Interface:

Mode # /Rated	Voltage (V)	Current (A)	Power (W)	Frequency (DC/AC-Hz)	Phases (#)	Comments
1	3	-	-	DC	-	3Vdc Lithium Battery

1.4 Block Diagram:

The diagram below illustrates the configuration of the equipment above.

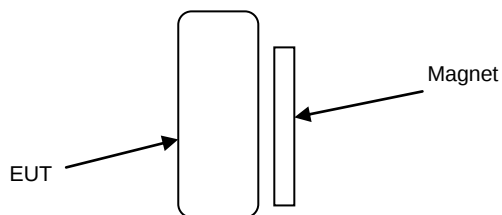

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 7 of 29

IC Number: 4676A-V2DW319

1.5 EUT Configurations

Mode #	Description
1	Stand-alone

1.6 EUT Operation Modes

Mode #	Description
1	Continuously transmitting
2	Transmitting on magnet trigger

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 8 of 29

IC Number: 4676A-V2DW319

2.0 Summary

The tests listed in the Summary of Testing section of this report have been performed and the results recorded by Underwriters Laboratories Inc. in accordance with the procedures stated in each test requirement and specification. The applicant determined the list of tests performed were applicable to the Equipment Under Test. As a result, the subject product has been verified to comply or not comply as noted in the Summary of Testing with each test specification. The test results relate only to the items tested.

2.1 Deviations from standard test methods

None

2.2 Device Modifications Necessary for Compliance

None

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 9 of 29

IC Number: 4676A-V2DW319

2.3 Reference Standards

Standard Number	Standard Name	Standard Date
47 CFR Part 15, Subpart C	Code of Federal Regulations, Part 15, Radio Frequency Devices	2011
RSS-GEN, Issue 3	General Requirements and Information for the Certification of Radiocommunication Equipment	2010
RSS-210, Issue 8	Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment	2010

2.4 Results Summary

This product is considered a Periodic Operating Transmitter

Requirement – Test	Result (Compliant / Non-Compliant)*
Cease Operation	Compliant
Radiated Emissions	Compliant
Occupied Bandwidth	Compliant
Pulse Train - Averaging Factor	Compliant

Test Engineer:

Reviewer:



Bob DeLisi (Ext.22452)
Senior Staff Engineer
International EMC Services
Conformity Assessment Services-

Michael Antola (Ext. 23053)
Senior Project Engineer
International EMC Services
Conformity Assessment Services

Any information and documentation involving UL Mark services are provided on behalf of Underwriters Laboratories Inc. (UL) or any authorized licensee of UL.

3.0 Calibration of Equipment Used for Measurement

All test equipment and test accessories are calibrated on a regular basis. The maximum time between calibrations is one year or the manufacturers' recommendation, whichever is less.

All test equipment calibrations are traceable to the National Institute of Standards and Technology (NIST); therefore, all test data recorded in this report is traceable to NIST.

4.0 EMISSIONS TEST RESULTS

The emissions tests were performed according to following regulations:

----- North America -----

Code of Federal Regulations Title 47	Part 15, Subpart C, Radio Frequency Devices
Industry Canada	RSS-GEN, RSS-210

Unless specified otherwise in the individual Methods, the tests shall be conducted under the following ambient conditions. Confirmation of these conditions shall be verified at the time the test is conducted.

Ambient Temperature, °C	22.5 ± 2.5	Relative Humidity, %	45 ± 15	Barometric Pressure, mBar	950 ± 150
-------------------------	------------	----------------------	---------	---------------------------	-----------

Sample Calculations

Radiated Field Strength and Conducted Emissions data contained within this report is calculated on the following basis:

Field Strength (dBuV/m) = Meter Reading (dBuV) + AF (dB/m) - Gain (dB) + Cable Loss (dB)

Conducted Voltage (dBuV) = Meter Reading (dBuV) + Cable Loss (dB) + LISN IL (dB)

Conducted Current (dBuA) = Meter Reading (dBuV) + Cable Loss (dB) - Transducer Factor (dBohms)

Job Number: 11U13642
 Model Number: SW-NAP-V2DW
 Client Name: Secure Wireless, Inc
 FCC ID: QNP-V2DW319

Page 11 of 29

IC Number: 4676A-V2DW319

4.1 Test Conditions and Results – Occupied Bandwidth

Test Description	Measurements were made in the laboratory environment. A Dipole (or equivalent) antenna tuned to the transmit frequency was attached to the input of a spectrum analyzer. The device was operated and the spectrum analyzer resolution bandwidth set per the appropriate standard.	
Basic Standard		FCC Part 15, 15.215
Occupied Bandwidth Limits		
0.25% Fo		

Table 1 Occupied Bandwidth Configuration Settings

Power Interface Mode	EUT Configurations Mode	EUT Operation Mode
1	1	2
Supplementary information: None		

Table 2 Occupied Bandwidth Spectrum Analyzer Settings

Resolution Bandwidth (MHz)	Occupied Bandwidth Requirements	
	dBc	%
0.010	-20	99
Supplementary information: None		

Table 3 Occupied Bandwidth Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
EMI Receiver	Rohde & Schwarz	ESIB26	ME5B-081	2011-01-27	2012-01-27
Dipole Antenna	EMCO	3121C	3359	2010-12-08	2011-12-08
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	43734	2010-03-08	2012-03-08


Job Number: 11U13642
 Model Number: SW-NAP-V2DW
 Client Name: Secure Wireless, Inc
 FCC ID: QNP-V2DW319

IC Number: 4676A-V2DW319

Table 4 Occupied Bandwidth Results

Power Mode	Frequency (MHz)	20dB OBW (kHz)	99% OBW (kHz)	Limit (MHz)	Result
Battery	319.5	80.16	336.67	0.799	Pass

Figure 2 Occupied Bandwidth Graph

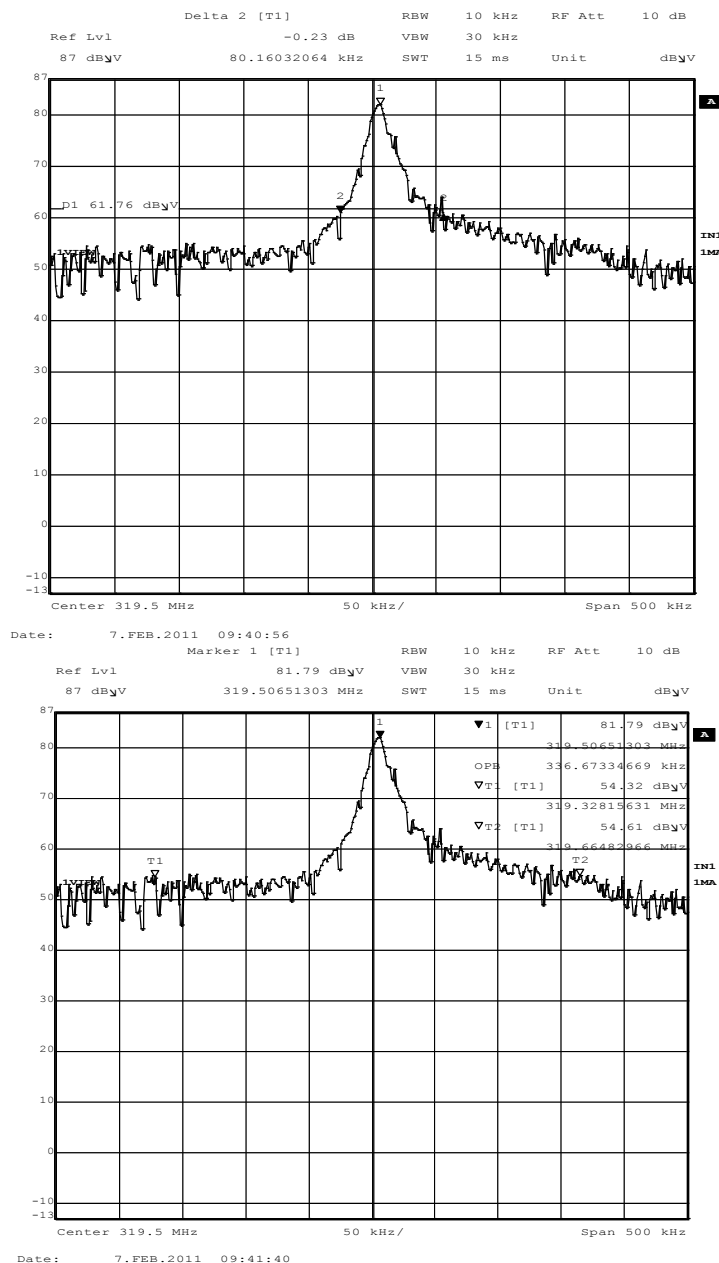

Job Number: 11U13642
 Model Number: SW-NAP-V2DW
 Client Name: Secure Wireless, Inc
 FCC ID: QNP-V2DW319

Page 14 of 29

IC Number: 4676A-V2DW319

4.2 Test Conditions and Results – Cease Operation

Test Description	Measurements were made in the laboratory environment. A Dipole (or equivalent) antenna tuned to the transmit frequency was attached to the input of a spectrum analyzer. The device was operated and the transmission time measured with the spectrum analyzer set to zero span at the fundamental frequency.
Basic Standard	FCC Part 15, 15.215
Cease Operation Limits	
The transmissions shall stop within 5 seconds of either a button being released or if automatically controlled transmissions shall be stopped 5 seconds after transmissions begin.	


Table 5 Cease Operation Configuration Settings

Power Interface Mode	EUT Configurations Mode	EUT Operation Mode
1	1	2
Supplementary information: None		

Table 6 Cease Operation Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
EMI Receiver	Rohde & Schwarz	ESIB26	ME5B-081	2011-01-27	2012-01-27
Dipole Antenna	EMCO	3121C	3359	2010-12-08	2011-12-08
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	43734	2010-03-08	2012-03-08

Figure 4 Cease Operation Graph

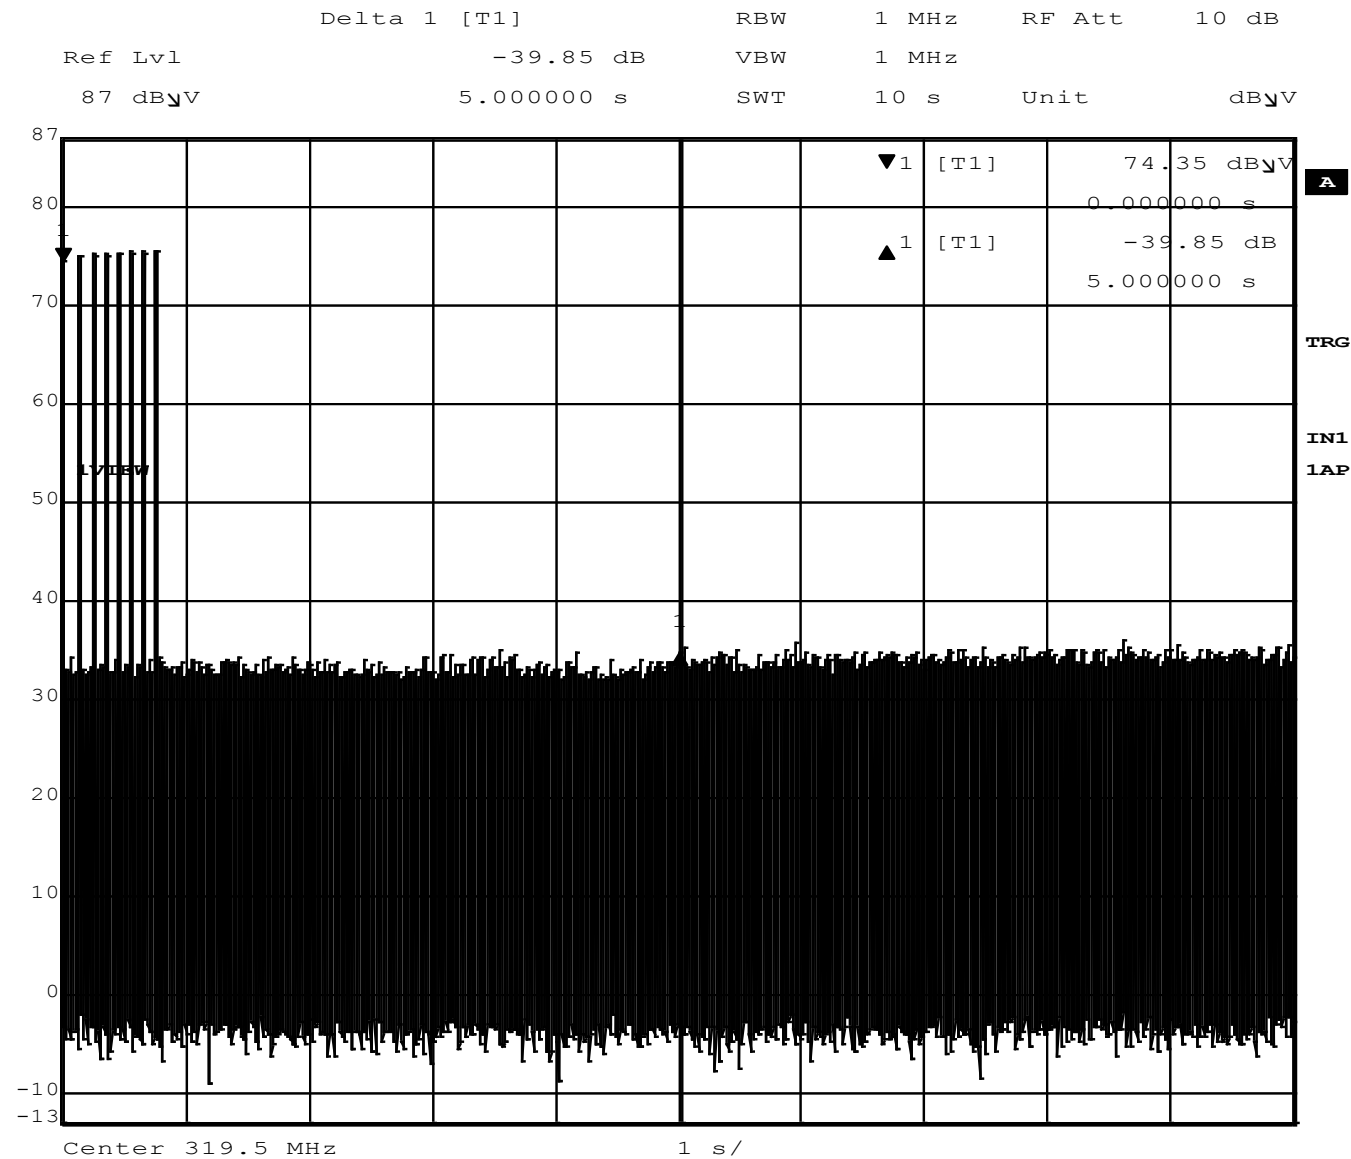

Date: 7.FEB.2011 09:58:16

Job Number: 11U13642
 Model Number: SW-NAP-V2DW
 Client Name: Secure Wireless, Inc
 FCC ID: QNP-V2DW319

Page 17 of 29

IC Number: 4676A-V2DW319

4.3 Test Conditions and Results – Pulse Train

Test Description	Measurements were made in the laboratory environment. A Dipole (or equivalent) antenna tuned to the transmit frequency was attached to the input of a spectrum analyzer. The pulse train was measured with the spectrum analyzer set to zero span at the fundamental frequency.		
Basic Standard		FCC Part 15 Subpart A, 15.35	
Pulse Train Limits			
There are no limits for this test. This data is used to calculate the averaging correction factor that is applied to the measured peak radiated emissions results.			

Table 7 Pulse Train Configuration Settings

Power Interface Mode	EUT Configurations Mode	EUT Operation Mode
1	1	2
Supplementary information: None		


Table 8 Pulse Train Calculation

Pulse Width (mS)	Total Transmission time or 100ms which ever is lesser	Average Correction Factor (dB) $20 \log \left(\frac{PulseWidth}{TotalTransmissionTime} \right)$
$31 \times 0.120 = 3.72$ $17 \times 0.240 = 4.08$ $3.72 + 4.08 = 7.8$ (total on time)	100	-22.2


Table 9 Pulse Train Test Equipment

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
EMI Receiver	Rohde & Schwarz	ESIB26	ME5B-081	2011-01-27	2012-01-27
Dipole Antenna	EMCO	3121C	3359	2010-12-08	2011-12-08
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	43734	2010-03-08	2012-03-08

Figure 6 Pulse Train Graph

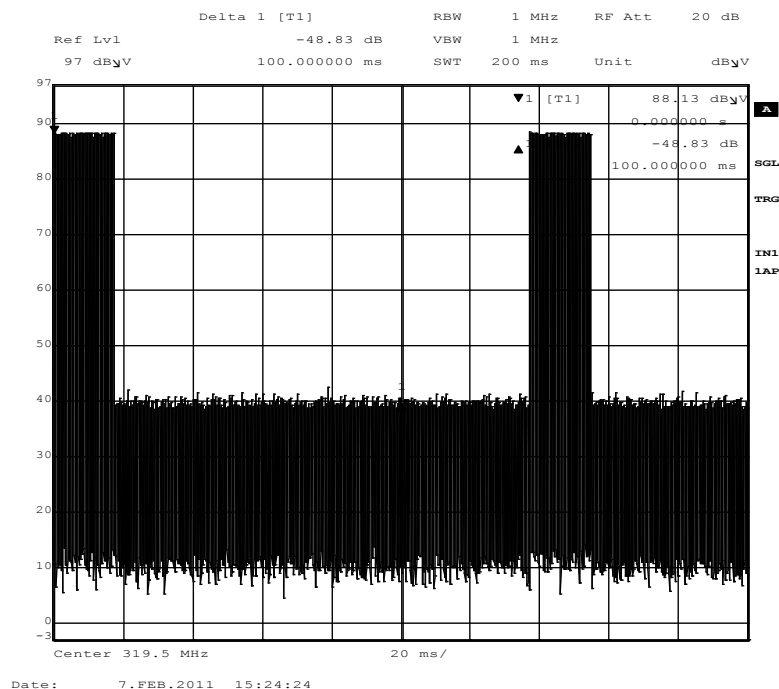

Pulses in 100mS


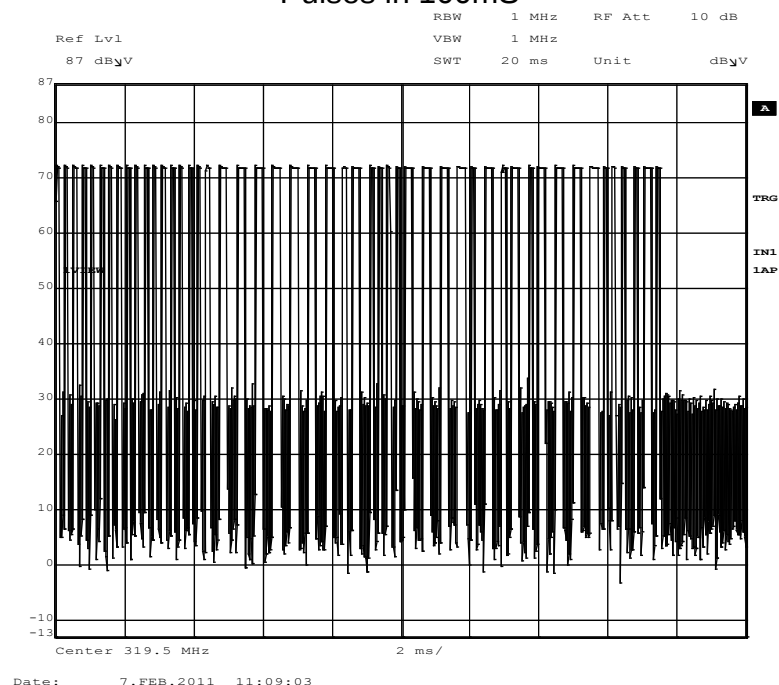


Number of pulses in 1 Pulse over 100mS

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 20 of 29

IC Number: 4676A-V2DW319

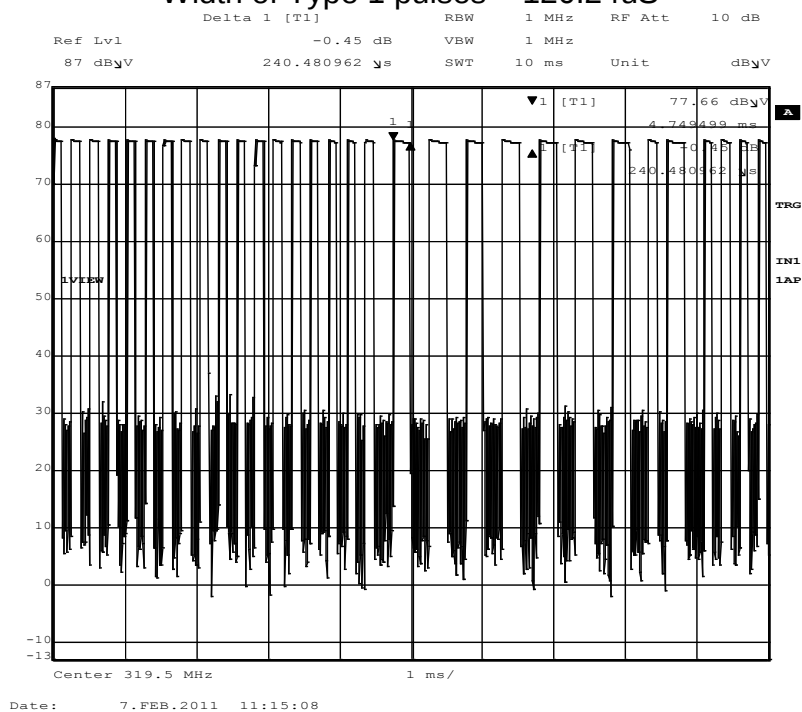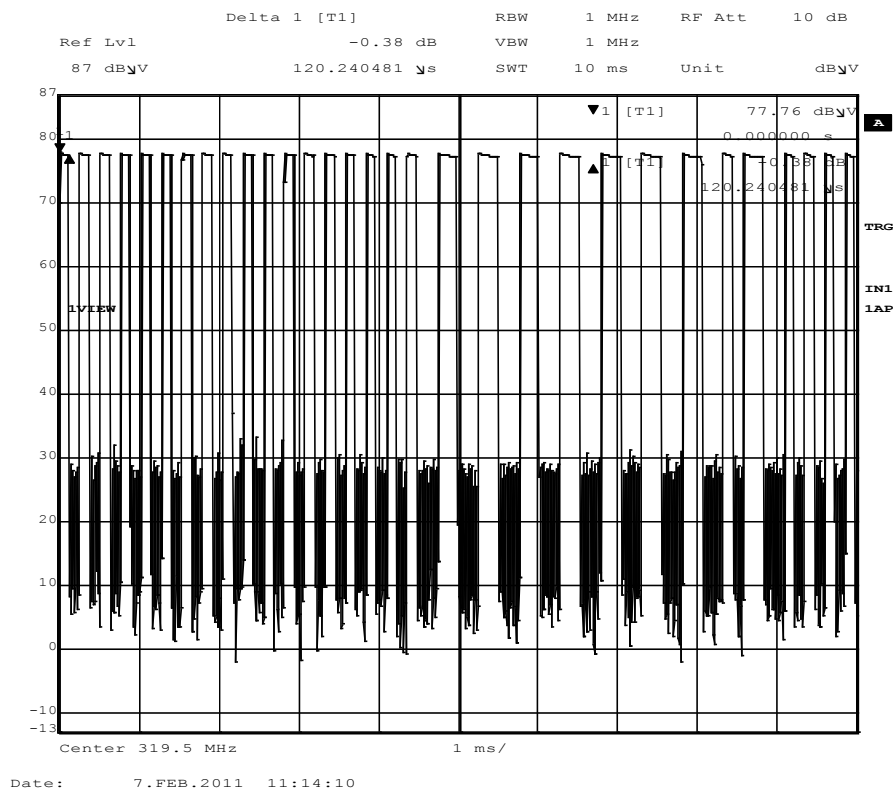

4.4 Test Conditions and Results – RADIATED EMISSIONS

Test Description	Measurements were made in a 10-meter semi-anechoic chamber that complies to CISPR 16/ANSI C63.4:2003. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in both horizontal and vertical polarities. Final measurements (quasi-peak or average as noted) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4-meters. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.		
Basic Standard			
UL LPG		80-EM-S0029	
	Frequency range	Measurement Point	
Fully configured sample scanned over the following frequency range	30 MHz – 1GHz	(3 meter measurement distance)	
Fully configured sample scanned over the following frequency range	1GHz – 3.2 GHz	(3 meter measurement distance)	
Limits			
Frequency (MHz)	Limit (dBµV/m)		
	Quasi-Peak	Peak	Average
	General Emissions		
0.009 – 0.490	128.5 – 93.8	-	-
0.490 – 1.705	73.8 – 63	-	-
1.705 – 30	69.5	-	-
30 – 88	40	-	-
88 – 216	43.5	-	-
216-960	46	-	
960-1000	46	-	
1000-3200	-	74	54
Fundamental - 418	NA	95.89	75.89
Spurious	NA	75.89	55.89
Supplementary information: Spurious limits are only applied against products of the transmitter. All other emissions must meet the general limits.			

Job Number: 11U13642
 Model Number: SW-NAP-V2DW
 Client Name: Secure Wireless, Inc
 FCC ID: QNP-V2DW319

Page 22 of 29

IC Number: 4676A-V2DW319

Table 10 Radiated Emissions EUT Configuration Settings

Power Interface Mode	EUT Configurations Mode	EUT Operation Mode
1	1	1
Supplementary information: Device checked for maximum emissions in 3 orthogonal axis. Worst case emissions are reported.		

Table 11 Radiated Emissions Test Equipment


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
30-1000MHz					
EMI Receiver	Rohde & Schwarz	ESIB40	34968	2010-02-22	2011-02-22
Bicon Antenna	Schaffner	VBA6106A	43441	2010-09-09	2011-09-09
Log-P Antenna	Schaffner	UPA6109	44067	2010-04-26	2011-04-26
Switch Driver	HP	11713A	ME7A-627	N/A	N/A
System Controller	Sunol Sciences	SC99V	44396	N/A	N/A
Camera Controller	Panasonic	WV-CU254	44395	N/A	N/A
RF Switch Box	UL	1	44398	N/A	N/A
Measurement Software	UL	Version 9.3	44740	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2010-12-07	2012-12-07
Multimeter	Fluke	83III	ME5B-305	2011-02-01	2012-02-29
Above 1GHz (Band Optimized System)					
Spectrum Analyzer	Agilent	E7405A	19695	2011-02-01	2012-02-01
Horn Antenna (1-2 GHz)	ETS	3161-01	51442	2008-03-28	See * below
Horn Antenna (2-4 GHz)	ETS	3161-02	48107	2007-09-27	See * below
Signal Path Controller	HP	11713A	50250	N/A	N/A
Gain Controller	HP	11713A	50251	N/A	N/A
RF Switch / Preamp Fixture	UL	BOMS1	50249	N/A	N/A
System Controller	UL	BOMS2	50252	N/A	N/A
Measurement Software	UL	Version 9.3	44740	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2010-12-07	2012-12-07
Multimeter	Fluke	87V	44547	2011-02-01	2012-02-29
* - Note: As allowed by the calibration standard ANSI C63.4 Section 4.4.2, standard gain horns need only a one-time calibration. Only if physical damage occurs will the horn antenna require re-calibration. * Gain standard horn antennas (sometimes called standard gain horn antennas) need not be calibrated beyond that which is provided by the manufacturer unless they are damaged or deterioration is suspected, or they are used at a distance closer than $2D^2/\lambda$. Gain standard horn antennas have gains that are fixed by their dimensions and dimensional tolerances.					

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 24 of 29

IC Number: 4676A-V2DW319

Figure 8 Radiated Emissions Graph

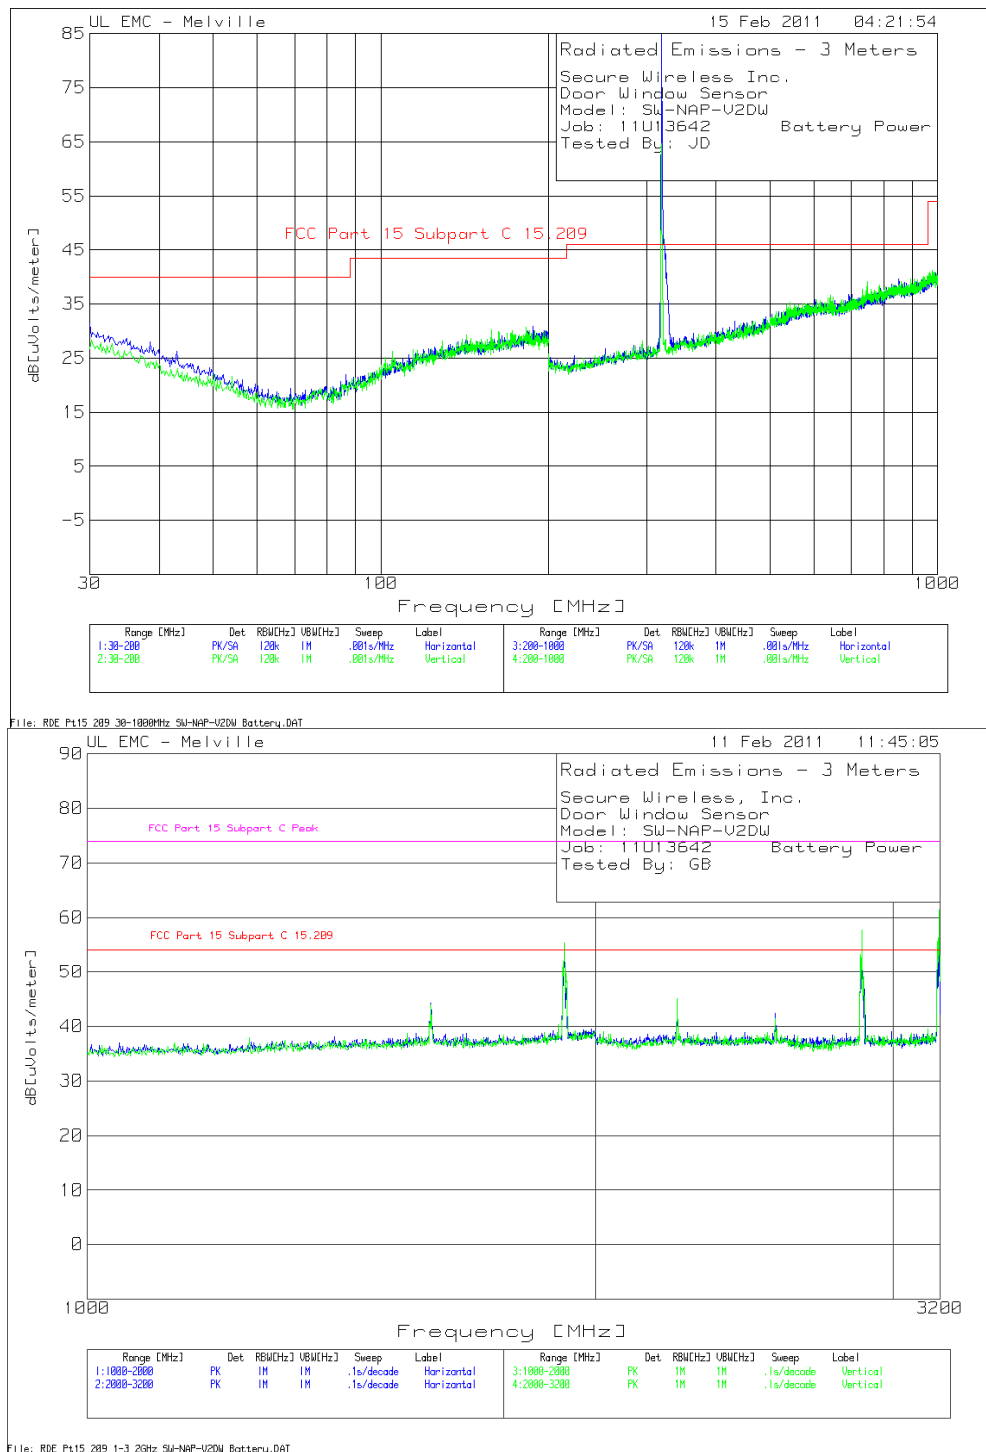

Job Number: 11U13642
 Model Number: SW-NAP-V2DW
 Client Name: Secure Wireless, Inc
 FCC ID: QNP-V2DW319

Page 25 of 29

IC Number: 4676A-V2DW319

Table 12 Radiated Emissions Data Points

Secure Wireless Inc.												
Door Window Sensor												
Model: SW-NAP-V2DW												
Job: 11U13642 Battery Power												
Tested By: JD												
Test	Meter	Detector	Gain/Loss	Transducer	Level	DCF	Corrected	Limit 1	Margin 1[dB]	Azimuth	Height [cm]	Polarity
Frequency	Reading	Type	Factor	Factor	dB[uVolts/ meter]	dB	dB[uVolts/ meter]			[deg]		
[MHz]	[dB(uV)]		[dB]	[dB]								
Horizontal 200 - 1000MHz												
319.4954	66.27	PK	1	14.2	81.47	-22	59.27	75.89	-16.62	72	136	Horz
Vertical 200 - 1000MHz												
319.4906	50.61	PK	1	14.1	65.71	-22	43.51	75.89	-32.38	286	178	Vert
LIMIT 1: FCC Part 15 Subpart C 15.231 (fundamental)												
LIMIT 2: None												
LIMIT 3: NONE												
LIMIT 4: NONE												
LIMIT 5: NONE												
LIMIT 6: NONE												
PK - Peak detector (maximized)												
QP - Quasi-Peak detector												
LnAv - Linear Average detector												
LgAv - Log Average detector												
Av - Average detector												
CAV - CISPR Average detector												
RMS - RMS detection												
CRMS - CISPR RMS detection												

Job Number: 11U13642
 Model Number: SW-NAP-V2DW
 Client Name: Secure Wireless, Inc
 FCC ID: QNP-V2DW319

Page 26 of 29

IC Number: 4676A-V2DW319

Secure Wireless, Inc.															
Door Window Sensor															
Model: SW-NAP-V2DW															
Job: 11U13642 Battery Power															
Tested By: GB															
Test	Meter	Detector	Gain/Loss	Transducer	Level	DCF	Corrected	Limit 1	Margin 1[dB]	Limit 2	Margin 2[dB]	Azimuth	Height [cm]	Polarity	
Frequency	Reading	Type	Factor	Factor	dB[uVolts/ meter]	dB	dB[uVolts/ meter]					[deg]			
[MHz]	[dB(uV)]		[dB]	[dB]											
Horizontal 1000 - 2000MHz															
1597.624	65.07	PK	-44.53	21.2	41.74	-22	19.54	54	-34.46	74	-32.26	7	121	Horz	
1917.2125	76.76	PK	-44.08	21.7	54.38	-22	32.18	54	-21.82	74	-19.62	37	102	Horz	
Horizontal 2000 - 3200MHz															
2236.6375	69.65	PK	-43.94	21.4	47.11	-22	24.91	54	-29.09	74	-26.89	215	121	Horz	
2555.8875	61.98	PK	-43.55	21.3	39.73	-22	17.53	54	-36.47	74	-34.27	167	135	Horz	
2875.8875	78.24	PK	-43.34	21.7	56.6	-22	34.4	54	-19.6	74	-17.4	284	194	Horz	
3195.1875	77.76	PK	-43.26	22	56.5	-22	34.3	54	-19.7	74	-17.5	174	172	Horz	
Vertical 1000 - 2000MHz															
1597.5	67.11	PK	-44.53	21.2	43.78	-22	21.58	54	-32.42	74	-30.22	274	107	Vert	
1917	70.33	PK	-44.09	21.7	47.94	-22	25.74	54	-28.26	74	-26.06	221	101	Vert	
Vertical 2000 - 3200MHz															
2236.638	67.71	PK	-43.94	21.3	45.07	-22	22.87	54	-31.13	74	-28.93	201	102	Vert	
2875.5375	75.5	PK	-43.35	21.9	54.05	-22	31.85	54	-22.15	74	-19.95	218	119	Vert	
3195.05	74.46	PK	-43.26	22.1	53.3	-22	31.1	54	-22.9	74	-20.7	167	102	Vert	
LIMIT 1: FCC Part 15 Subpart C 15.209															
LIMIT 2: FCC Part 15 Subpart C Peak															
LIMIT 3: NONE															
LIMIT 4: NONE															
LIMIT 5: NONE															
LIMIT 6: NONE															
PK - Peak detector (maximized)															
QP - Quasi-Peak detector															
LnAv - Linear Average detector															
LgAv - Log Average detector															
Av - Average detector															
CAV - CISPR Average detector															
RMS - RMS detection															
CRMS - CISPR RMS detection															

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 27 of 29

IC Number: 4676A-V2DW319

Appendix A

Accreditations and Authorizations



NVLAP Lab code: 100255-0

NVLAP: The National Institute of Standards and Technology (NIST) administers the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP is comprised of laboratory accreditation programs (LAPs) which are established on the basis of requests and demonstrated need. Each LAP includes specific calibration and/or test standards and related methods and protocols assembled to satisfy the unique needs for accreditation in a field of testing or calibration. NVLAP accredits public and private laboratories based on evaluation of their technical qualifications and competence to carry out specific calibrations or tests. Accreditation criteria are established in accordance with the U.S. Code of Federal Regulations (CFR, Title 15, Part 285), NVLAP Procedures and General Requirements, and encompass the requirements of ISO/IEC 17025. For a full scope listing see <http://ts.nist.gov/ts/htdocs/210/214/scopes/1002550.htm>



FCC: Details of the measurement facilities used for these tests have been filed with the Federal Communications Commission's Laboratory in Columbia, Maryland (Ref. No. 91040).



Industry Canada Industrie Canada

Industry of Canada: Accredited by Industry Canada for performance of radiated measurements. Our test site complies with RSP 100, Issue 7, Section 3.3. File #: IC 2181



VCCI: Accepted as an Associate Member to the VCCI. The measurement facilities detailed in this test report have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. Registration Nos.: (Radiated Emissions) R-797, (Conducted Emissions) C-832, C-83400, and C-81879 and (Conducted Emissions - Telecommunications Ports) T-1582 and T-1583.

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 28 of 29

IC Number: 4676A-V2DW319

Job Number: 11U13642
Model Number: SW-NAP-V2DW
Client Name: Secure Wireless, Inc
FCC ID: QNP-V2DW319

Page 29 of 29

IC Number: 4676A-V2DW319



ICASA: ICASA (Independent Communications Authority of South Africa) has appointed UL as a Designated Test Laboratory to test Telecommunications equipment for type approval in compliance with CISPR 22 to assist in fulfilling its mandate under section 54(1) of the Telecommunications Act, 1996 (Act 103 of 1996).



NIST/CAB: Validated by the European Commission as a U.S. Conformity Assessment Body (CAB) of the U.S.-EU Mutual Recognition Agreement (MRA) for the Electromagnetic Compatibility - Council Directive 2004/108/EC, Annex III (2-3). Also validated for the Telecommunication Equipment-Council Directive 99/5/EC, Annex III and IV, Identification Number: 0983.

NIST/CAB: Provisioned to act as a U.S. Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the Asia Pacific Economic Cooperation (APEC) MRA between the American Institute in Taiwan (AIT) and the United States. Our laboratory is considered qualified to test equipment subject to the applicable EMC regulations of the Chinese Taipei Bureau of Standards, Metrology and Inspection (BSMI) which require testing to CNS 13438 (CISPR 22).

NIST/CAB: Recognized by the Infocomm Development Authority of Singapore (IDA) under the Asia Pacific Economic Cooperation Mutual Recognition Agreement (APEC MRA). Our laboratory is provisionally designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC MRA. Our scope of designation includes IDA TS EMC (CISPR 22), IEC 61000-4-2, -4-3, -4-4, -4-5, and -4-6

