




TEST REPORT

Report No.:	EM201200322	Application No.:	ZJ00017485
Client: GOLDEN POWER MANUFACTURING LIMITED			
Address:	ROOM 1004,10/F KWAN CHART TOWER 6 TONNOCHY ROAD WANCHAI		
Sample Description:	Thermostat		
Model:	CT101		
FCC ID:	QO8-CT101R1		
Test Specification:	FCC 15.249:2010		
Issue Date:	2012-07-13		
Test Result:	Pass.		
Tested By: Lynn Xiao / Test Engineer	Reviewed By: Angel Liu/ Technical Support	Approved By: Gavin Wu / Manager	
			
Date: 2012-07-13	Date: 2012-07-13	Date: 2012-07-13	
Other Aspects: <i>None</i>			
Abbreviations: <i>ok / P = passed; fail / F = failed; n.a. / N = not applicable</i>			
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.			

DIRECTIONS OF TEST

- 1. This station carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.**
- 2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.**
- 3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.**

TABLE OF CONTENTS

1. TEST RESULT SUMMARY	4
2. GENERAL DESCRIPTION OF EUT.....	5
2.1 APPLICANT	5
2.2 MANFACTURER	5
2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	5
2.4 TEST OPERATION MODES	5
2.5 LOCAL SUPPORTIVE INSTRUMENTS	5
3. LABORATORY AND ACCREDITATIONS	6
3.1 LABORATORY.....	6
3.2 ACCREDITATIONS	6
3.3 MEASUREMENT UNCERTAINTY	6
3.4 LIST OF USED TEST EQUIPMENT AT GRT	7
4. ANTENNA REQUIREMENT.....	8
5. EMISSION TEST	9
5.1 INTENTIONAL RADIATORS FIELD STRENGTH.....	9
5.1.1 LIMITS.....	9
5.1.2 TEST PROCEDURE.....	9
5.1.3 TEST SETUP.....	10
5.1.4 TEST RESULTS.....	11
5.2 RADIATED ELECTROMAGNETIC DISTURBANCE	12
5.2.1 LIMITS.....	12
5.2.2 TEST PROCEDURES	12
5.2.3 TEST SETUP.....	14
5.2.4 TEST RESULTS.....	16
5.3 OUT OF BAND EMISSIONS	22
5.3.1 LIMITS.....	22
5.3.2 TEST PROCEDURES	22
5.3.3 TEST SETUP.....	23
5.3.4 TEST RESULTS.....	24
5.4 CONDUCTED EMISSION MEASUREMENT	26
5.4.1 LIMITS.....	26
5.4.2 TEST PROCEDURES	26
5.4.3 TEST SETUP.....	27
5.4.4 TEST RESULTS.....	28

1. TEST RESULT SUMMARY

FCC 15.249:2010			
Standard	Item	Limit / Severity	Result
FCC 15.249:2010	Antenna Requirement	FCC Part 15.203	PASS
	Intentional radiators Field Strength	FCC Part 15.249(a)	PASS
	Radiated Electromagnetic Disturbance	FCC Part 15.249 (e)	PASS
	Conduction Emissions	/	N/A(Note)
	Out of Band Emissions	FCC Part 15.249(d)	PASS

Note: The EUT is own DC 3V battery supply

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT

Name: GOLDEN POWER MANUFACTURING LIMITED
Address: ROOM 1004,10/F KWAN CHART TOWER 6 TONNOCHY ROAD
WANCHAI

2.2 MANUFACTURER

Name: ZhuHai Herald Datanetics Limited
Address: No.1 PingXi Road 6. Nanping Science and Technology Industrial Park,
Zhuhai, Guangdong, China

2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Thermostat
Model No.: CT101
Trade Name: Radio Thermostat
Power Supply: DC 3V(AA battery)
Frequency 908.42MHz
Channel number /
Note: /

2.4 TEST OPERATION MODES

Test mode: Mode 1:continuous transmission

2.5 LOCAL SUPPORTIVE INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number
/	/	/	/

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests and measurements refer to this report were performed by EMC Laboratory of Guangzhou GRG Metrology and Test Co., Ltd.

Add. : 163 Pingyun Rd, West of Huangpu Ave, Guangzhou, 510656, P. R. China

Telephone: +86-20-38699959, 38699960, 38699961

Fax : +86-20-38695185

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC Listed Lab No. 688188
China	CNAS NO.L0446
China	DILAC No.DL175
Canada	Registration No.:8355A-1

3.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Radiated Emission	Horizontal 30MHz~1000MHz	4.2dB
	Horizontal 1GHz~18GHz	4.2dB
	Vertical 30MHz~1000MHz	4.4dB
	Vertical 1GHz~18GHz	4.4dB


This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4 LIST OF USED TEST EQUIPMENT AT GRT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Radiated Emission				
Bi-Log Antenna	ETS-LINDGREN	3142C	75971	2014-05-26
EMI Receiver	Rohde & Schwarz	ESU40	100106	2013-02-04
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120E3 18	2013-10-14
Intentional radiators Field Strength				
EMI Receiver	Rohde & Schwarz	ESU40	100106	2013-02-04
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120E3 18	2013-10-14
Out of Band Emissions				
EMI Receiver	Rohde & Schwarz	ESU40	100106	2013-02-04
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120E3 18	2013-10-14
CE				
L.I.S.N	SCHWARZBECK	NSLK 8127	8127450	2012-08-21
EMI Receiver	R&S	ESCI	100527	2012-07-25

4. ANTENNA REQUIREMENT

The EUT antenna is PCB Printed antenna. Antenna gain is -0.5dBi .which accordance 15.203.is considered sufficient to comply with the provisions of this section.

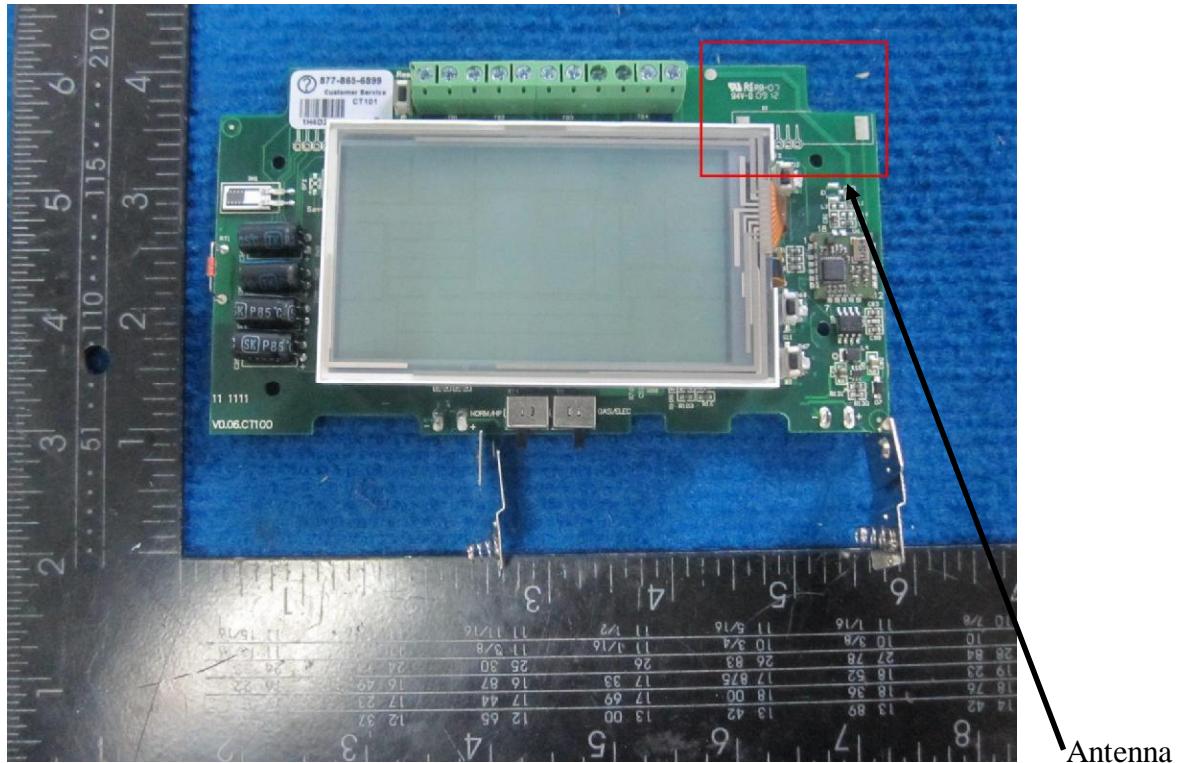

5. EMISSION TEST

5.1 INTENTIONAL RADIATORS FIELD STRENGTH

5.1.1 LIMITS

Frequency (MHz)	Field Strength
908.4	50(millivolts/meter)
Field Strength of Harmonics	500(microvolts/meter)

5.1.2 TEST PROCEDURE

Procedure of Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.


The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2009 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the test.

5.1.3 TEST SETUP

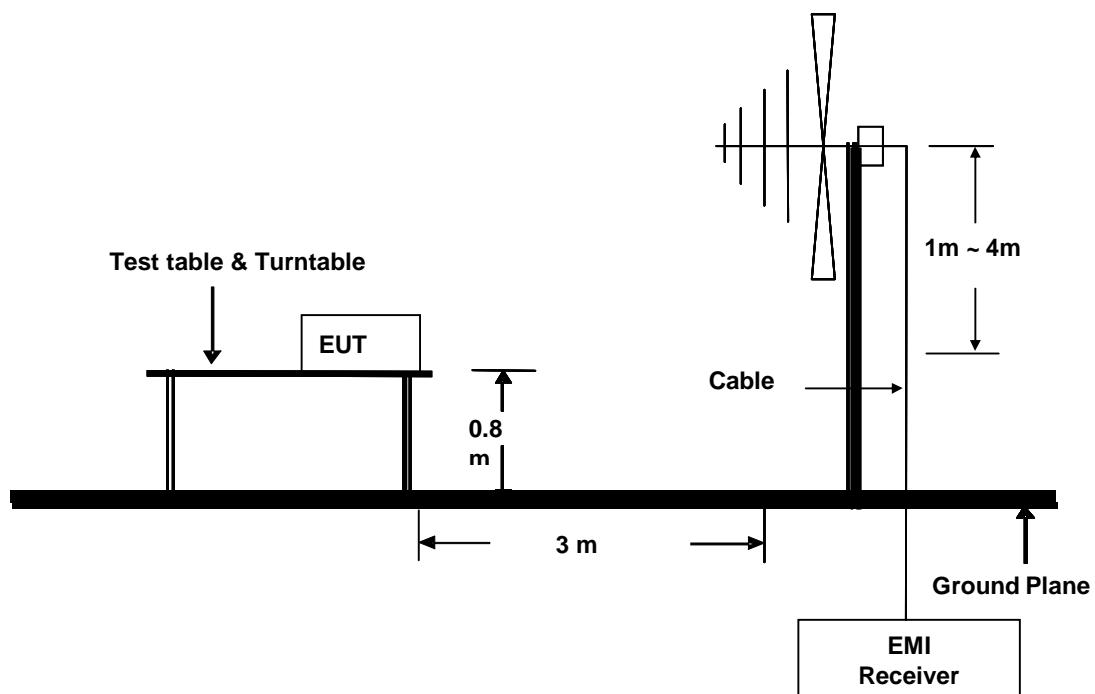

5.1.4 TEST RESULTS

The field strength was measured with an EMI measuring receiver.
Set 100kHz RBW/VBW for QP detector at a distance of 3m.

Project No.:	ZJ00017485	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	9:34:58
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	908.4027	66.16	26.14	93.30	94.00	-0.7	QP

Project No.:	ZJ00017485	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	9:20:59
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	908.4092	59.16	26.14	85.60	94.00	-8.4	QP

5.2 RADIATED ELECTROMAGNETIC DISTURBANCE

5.2.1 LIMITS

Frequency (MHz)	Quasi-peak(dB μ V/m)
30 ~ 88	40
88~216	43.5
216 ~ 960	46
Above 960	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

Frequency (GHz)	PEAK and AVG(dB μ V/m)
Above 1G	74 PEAK
Above 1G	54 AVG

5.2.2 TEST PROCEDURES

Procedure of Preliminary Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.

The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2009 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test. The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level. Record at least six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only QP reading is presented. The test data of the worst-case condition(s) was recorded.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.2.3 TEST SETUP

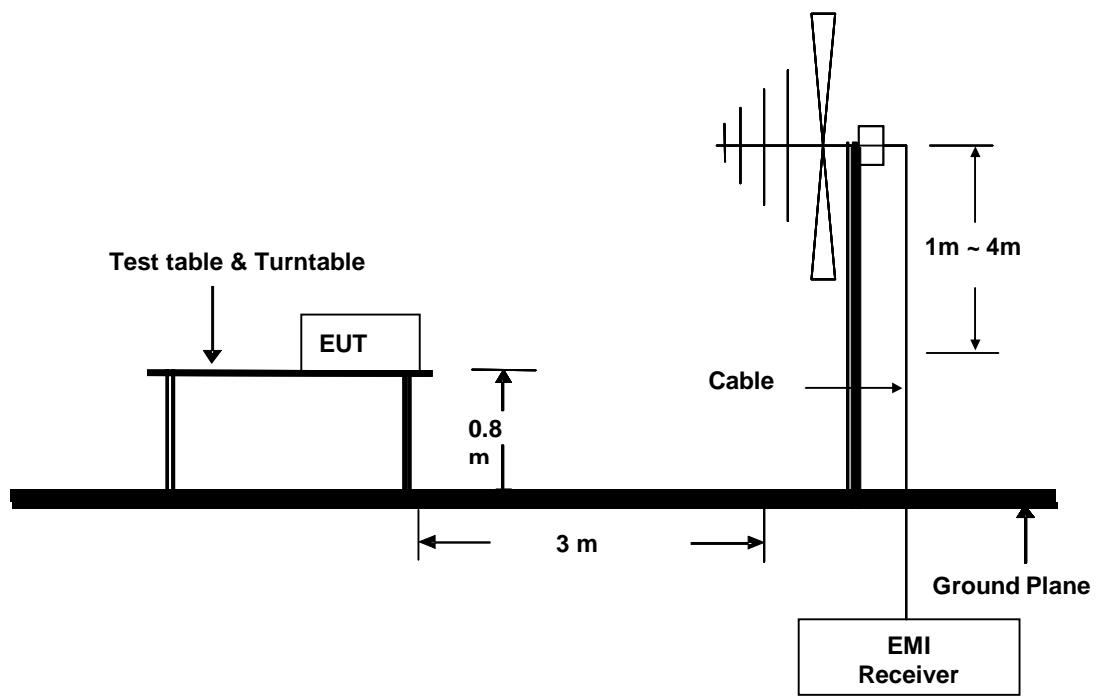


Figure 1. 30MHz to 1GHz radiated emissions test configuration

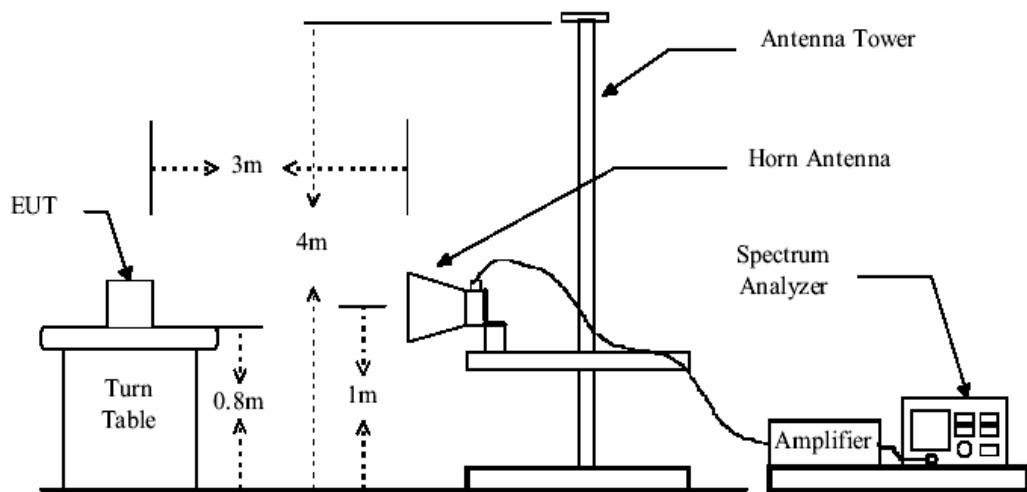


Figure 2 Above 1GHz radiated emissions test configuration


5.2.4 TEST RESULTS

The field strength was measured with an EMI measuring receiver.

Set 100kHz RBW/VBW for QP detector at a distance of 3m when we test below 1GHz.


Set 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m when we test above 1GHz.

Project No.:	ZJ00017485 RE 30-1G	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	9:34:58
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:			

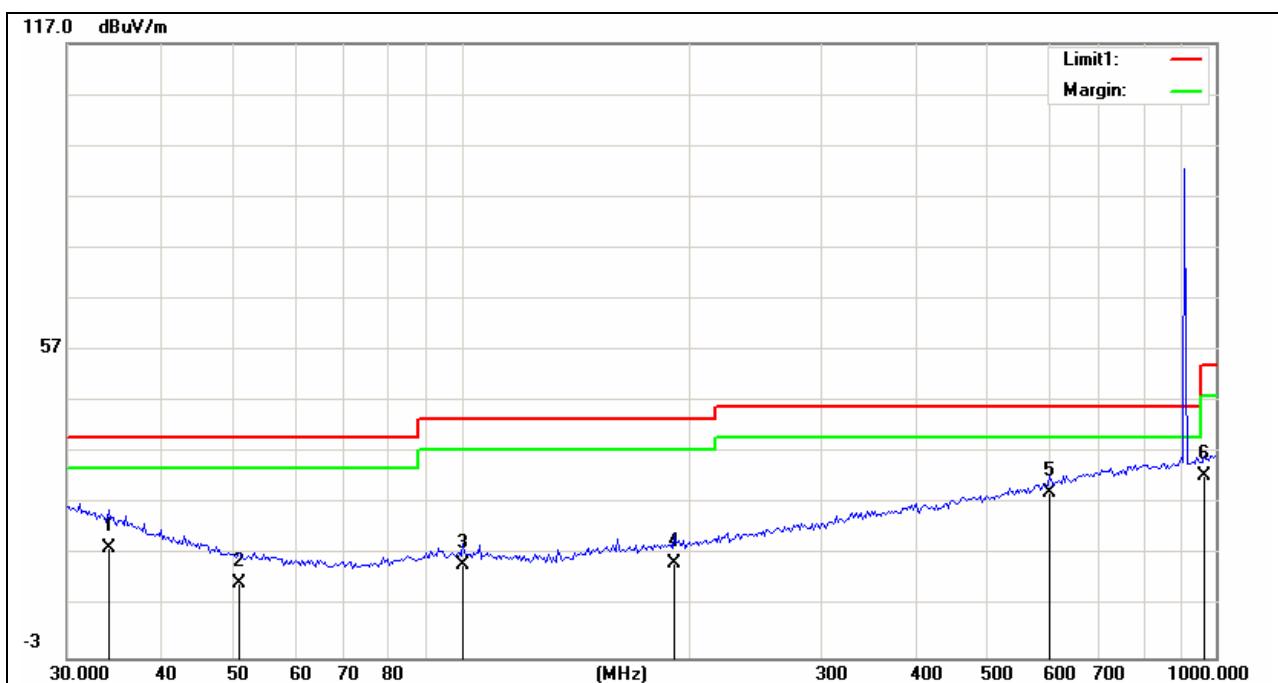


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.1392	1.58	16.92	18.50	40.00	-21.50	QP
2	50.8778	1.92	9.58	11.50	40.00	-28.50	QP
3	100.4224	5.22	9.98	15.20	43.50	-28.30	QP
4	191.6416	3.85	11.45	15.30	43.50	-28.20	QP
5	603.0510	7.07	22.33	29.40	46.00	-16.60	QP
6	966.8451	6.07	26.53	32.60	54.00	-21.40	QP

Project No.:	ZJ00017485 RE 30-1G	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	9:20:59
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:			

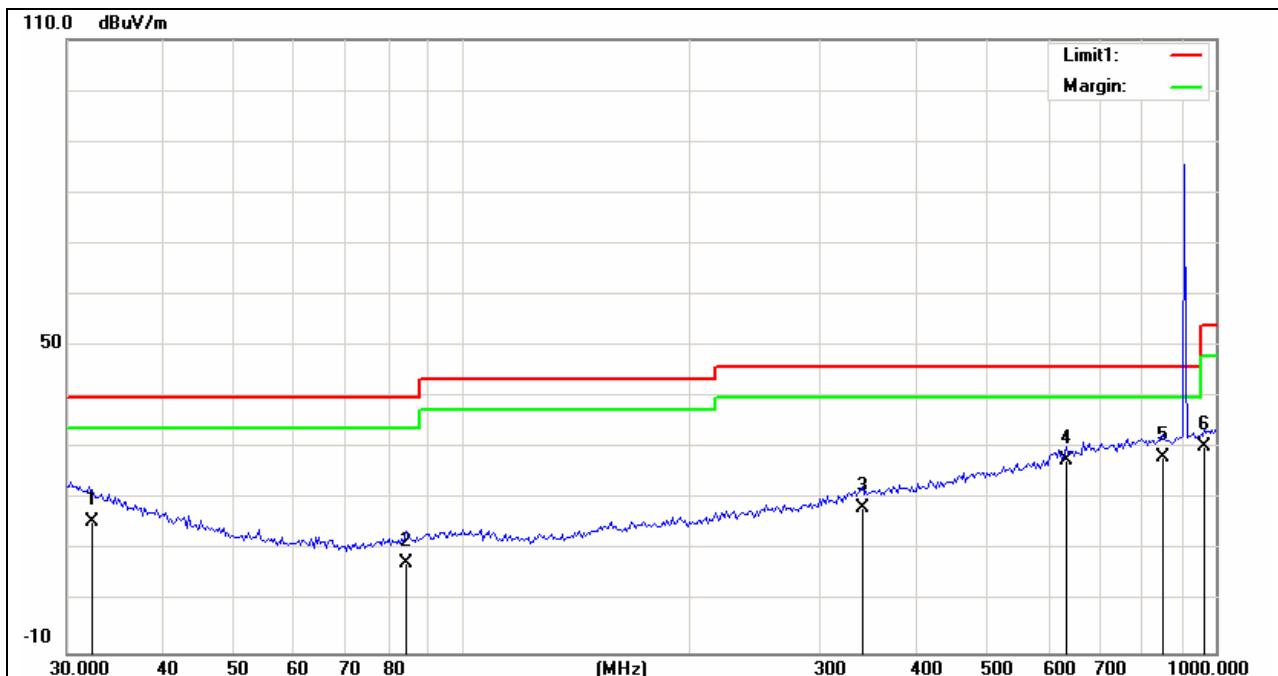


No.	Frequency (MHz)	Reading (dB _u V/m)	Correct Factor(dB/m)	Result (dB _u V/m)	Limit (dB _u V/m)	Margin (dB)	Remark
1	32.4555	-2.22	17.92	15.70	40.00	-24.30	QP
2	84.3675	-1.33	9.03	7.70	40.00	-32.30	QP
3	339.9554	1.53	16.97	18.50	46.00	-27.50	QP
4	634.3348	4.79	22.81	27.60	46.00	-18.40	QP
5	849.6209	3.24	25.16	28.40	46.00	-17.60	QP
6	966.8452	3.97	26.53	30.50	54.00	-23.50	QP

Project No.:	ZJ00017485 RSE 1G-3G	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m_PEAK	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	10:20:58
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:			

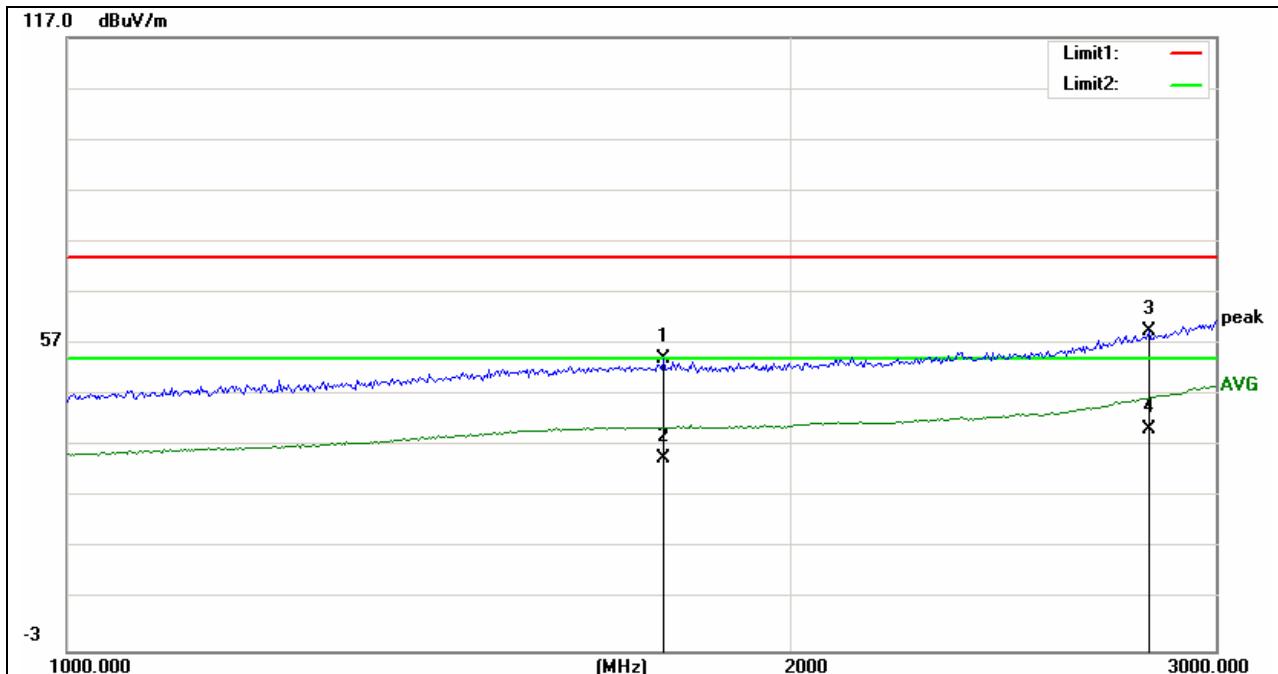


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1769.033	20.45	33.64	54.09	74.00	-19.91	peak
2	1769.033	1.06	33.64	34.70	54.00	-19.30	AVG
3	2815.756	20.20	39.23	59.43	74.00	-14.57	peak
4	2815.756	1.17	39.23	40.40	54.00	-13.60	AVG

Project No.:	ZJ00017485 RSE 1G-3G	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m_PEAK	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	10:25:00
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:			

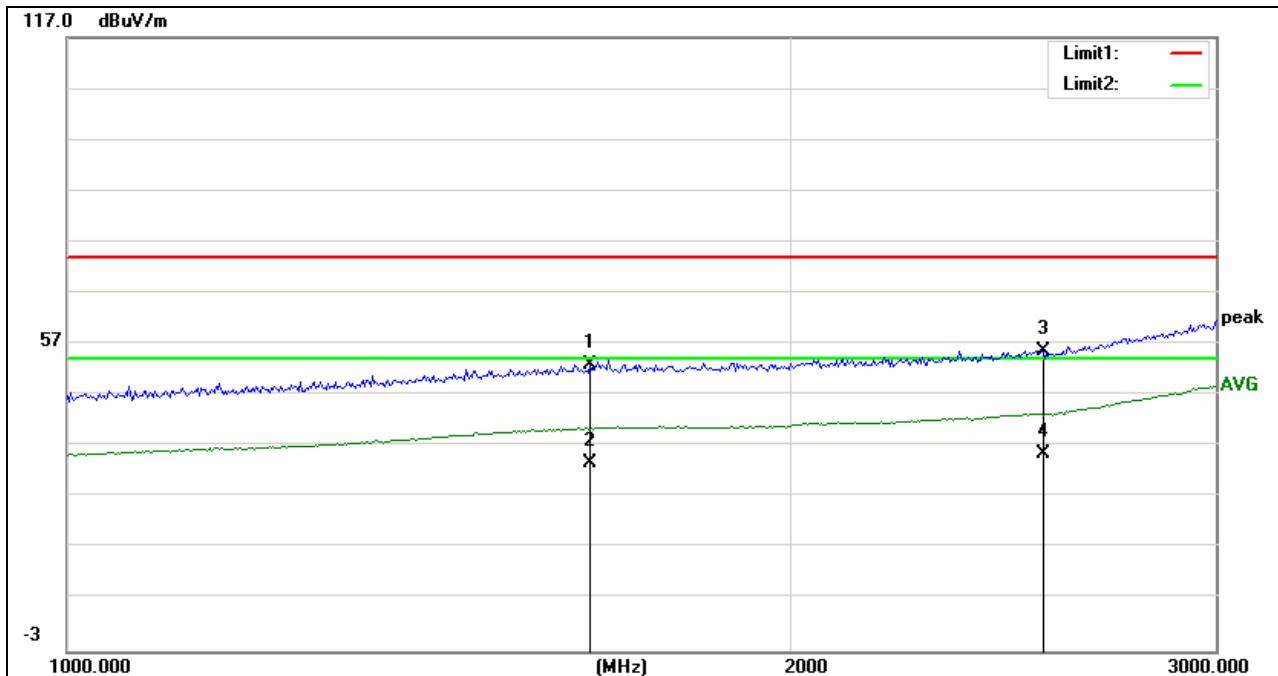


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1648.737	19.66	33.35	53.01	74.00	-20.99	peak
2	1648.737	0.55	33.35	33.90	54.00	-20.10	AVG
3	2542.420	19.70	35.90	55.60	74.00	-18.40	peak
4	2542.420	-0.30	35.90	35.60	54.00	-18.40	AVG

Project No.:	ZJ00017485 RSE 1G-3G	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m_PEAK	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	10:32:01
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:			

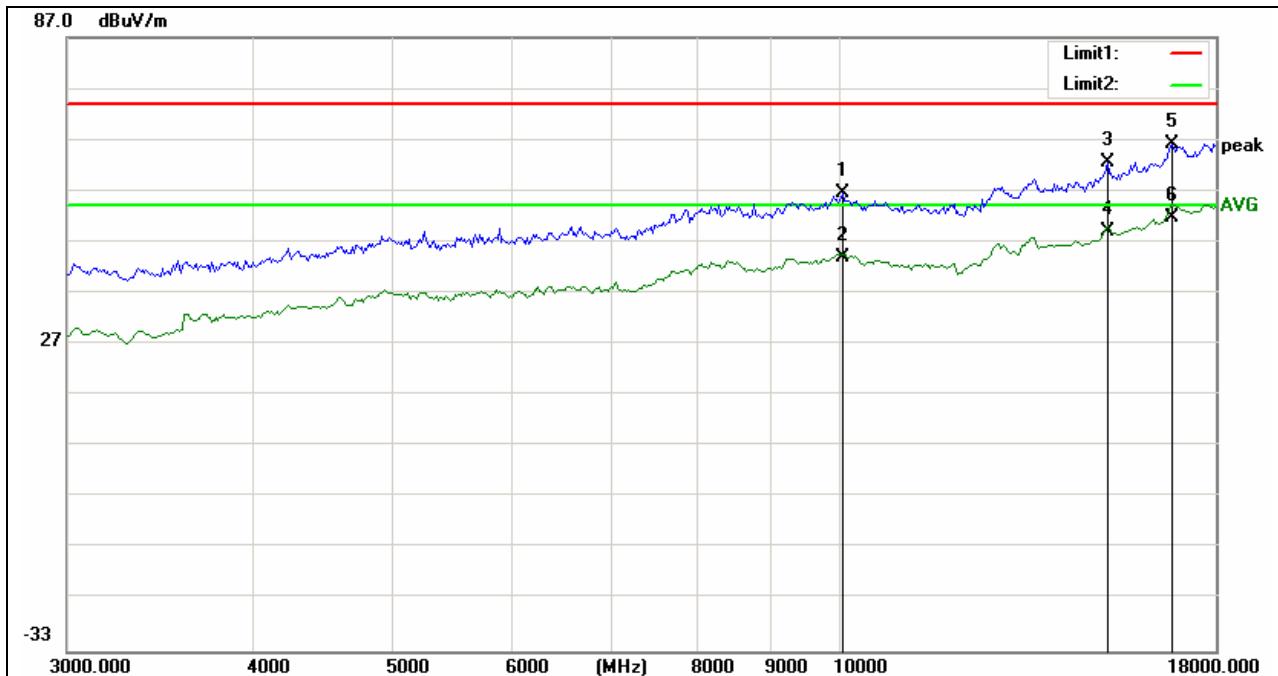

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10049.025	30.82	25.78	56.60	74.00	-17.40	peak
2	10049.025	18.12	25.78	43.90	54.00	-10.10	AVG
3	15194.881	30.86	31.59	62.45	74.00	-11.55	peak
4	15194.881	17.51	31.59	49.10	54.00	-4.90	AVG
5	16801.328	31.15	35.12	66.27	74.00	-7.73	peak
6	16801.328	16.68	35.12	51.80	54.00	-2.20	AVG

Project No.:	ZJ00017485 RSE 1G-3G	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m_PEAK	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-12
Temp./Hum.(%RH):	23/50%RH	Time:	10:39:33
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:			

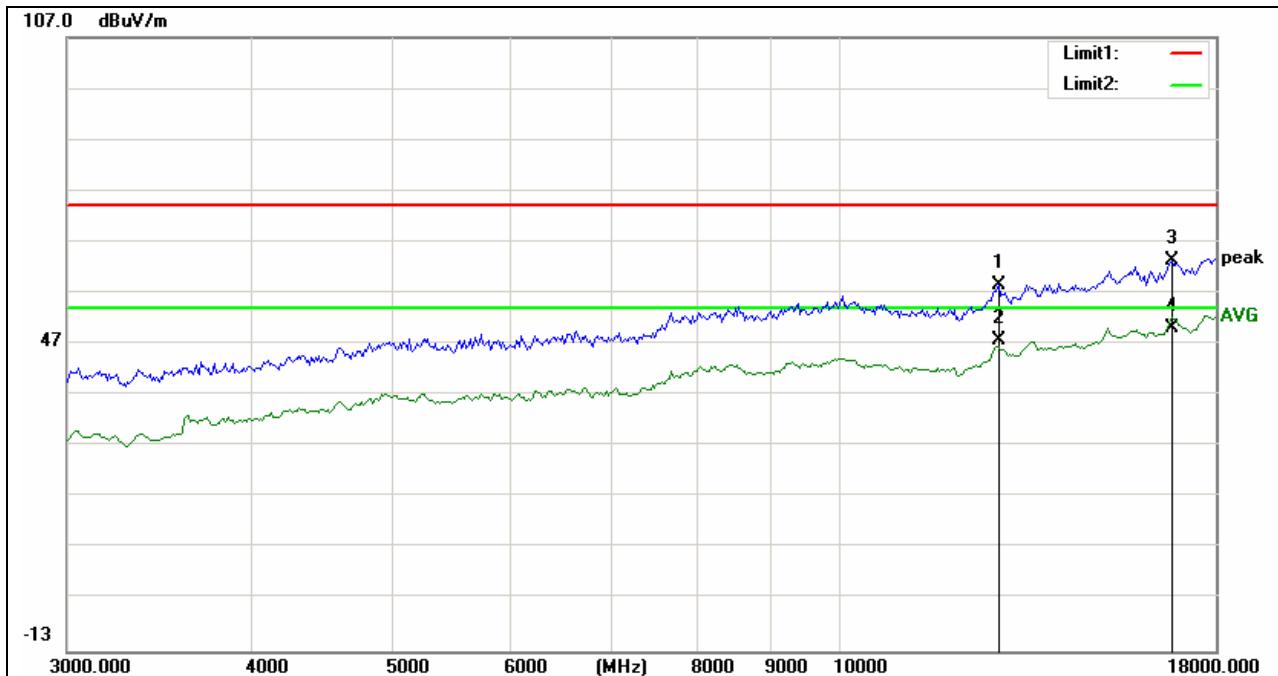

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12826.912	31.00	27.53	58.53	74.00	-15.47	peak
2	12826.912	20.17	27.53	47.70	54.00	-6.30	AVG
3	16801.328	28.22	35.12	63.34	74.00	-10.66	peak
4	16801.328	15.08	35.12	50.20	54.00	-3.80	AVG

5.3 OUT OF BAND EMISSIONS

5.3.1 LIMITS

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

5.3.2 TEST PROCEDURES

Procedure of Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.


The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2009 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the test.

5.3.3 TEST SETUP

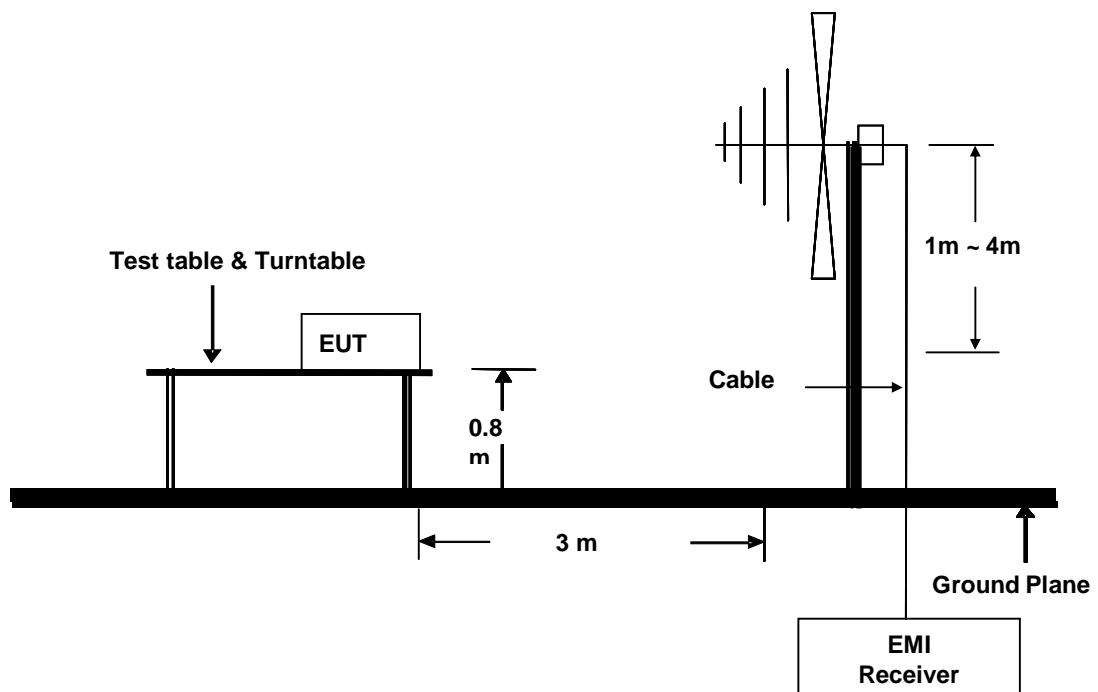


5.3.4 TEST RESULTS

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.


Measurement:

Project No.:	ZJ00017485 RE	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-24
Temp./Hum.(%RH):	23/50%RH	Time:	17:35:29
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:	band edge		

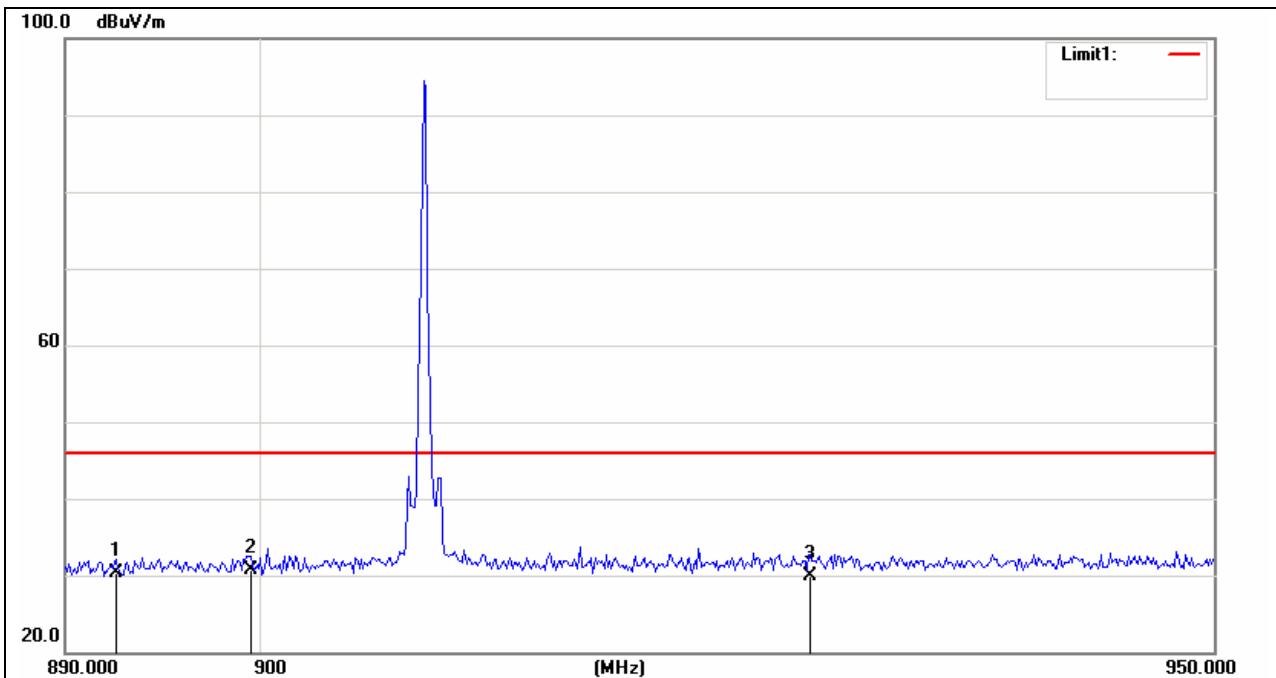

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	892.6923	4.25	26.00	30.25	46.00	-15.75	QP
2	899.5191	4.51	26.16	30.67	46.00	-15.33	QP
3	928.5576	3.88	26.10	29.98	46.00	-16.02	QP

Project No.:	ZJ00017485 RE	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	DC 3V
Test item:	Radiation Test	Date:	2012-7-24
Temp./Hum.(%RH):	23/50%RH	Time:	17:28:41
EUT:	Thermostat	Distance:	3m
Model:	transmit	Test Result:	Pass
Note:	band edge		

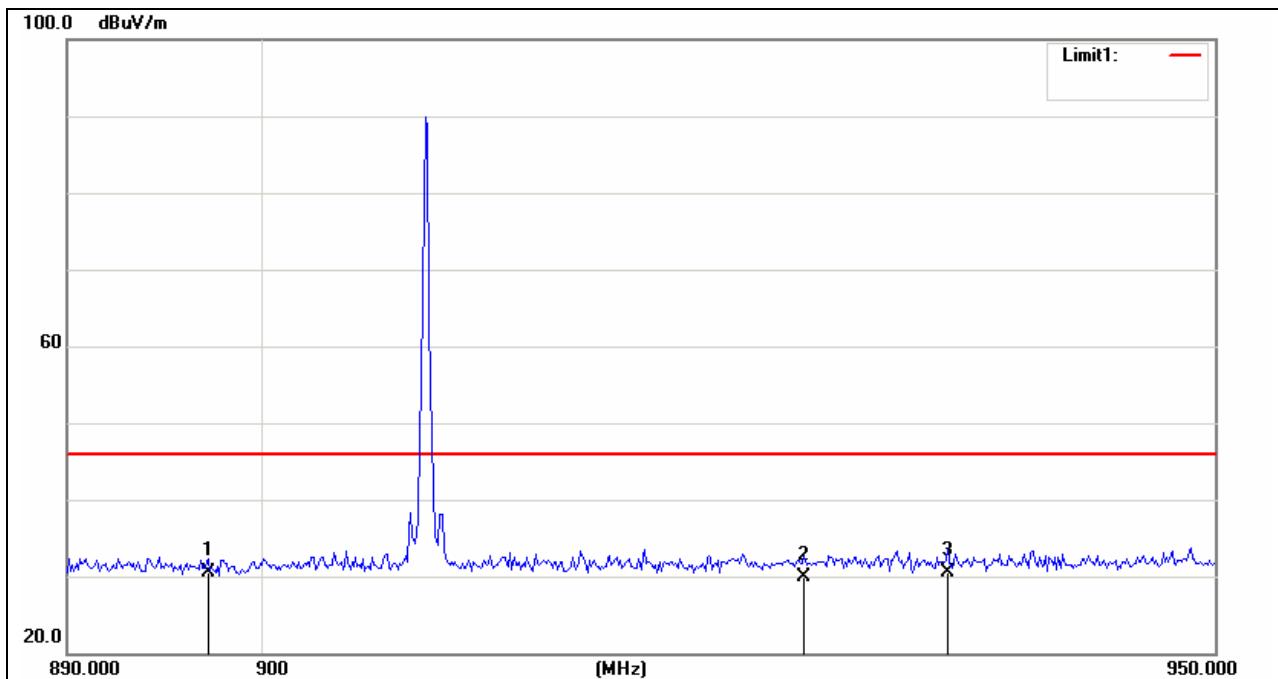

No.	Frequency (MHz)	Reading (dB _u V/m)	Correct Factor(dB/m)	Result (dB _u V/m)	Limit (dB _u V/m)	Margin (dB)	Remark
1	897.2115	4.42	26.10	30.52	46.00	-15.48	QP
2	928.1730	3.71	26.10	29.81	46.00	-16.19	QP
3	935.7690	4.43	26.16	30.59	46.00	-15.41	QP

5.4 CONDUCTED EMISSION MEASUREMENT

5.4.1 LIMITS

Frequency range	Limits (dB μ V)	
	Quasi-peak	Average
150kHz ~ 0.5MHz	66~56	56~46
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150kHz to 0.5MHz.

5.4.2 TEST PROCEDURES

Procedure of Preliminary Test

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:

- Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:
 - 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or
 - 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;
- All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;
- The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.
- I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.


The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the

applicable limit. The test data of the worst-case condition(s) was recorded.

5.4.3 TEST SETUP

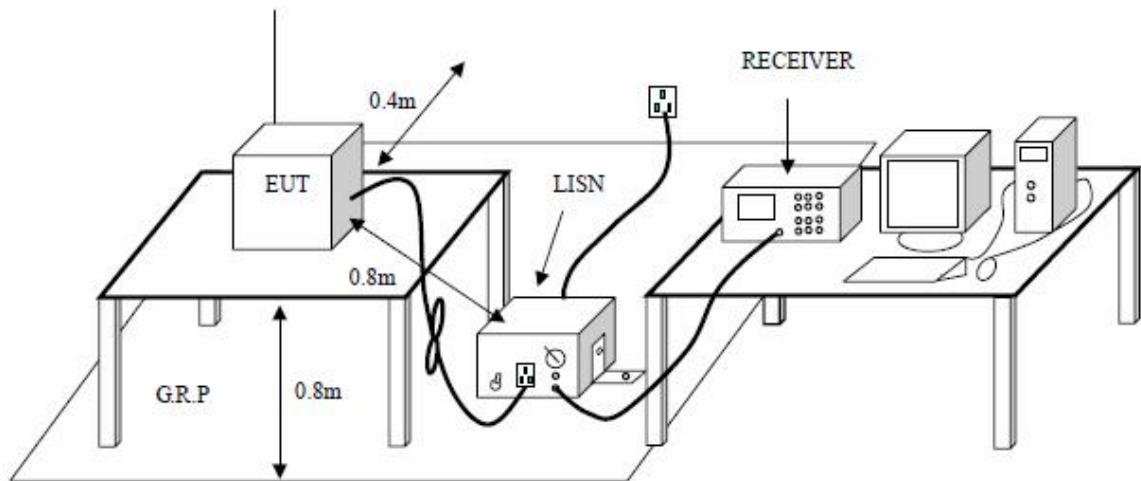

5.4.4 TEST RESULTS

N/A: The EUT is own DC 3V battery supply.

-----This is the last page of the report. -----