


THIS DOCUMENT provides the GS1011 block diagrams for submitting reports for regulatory certification.

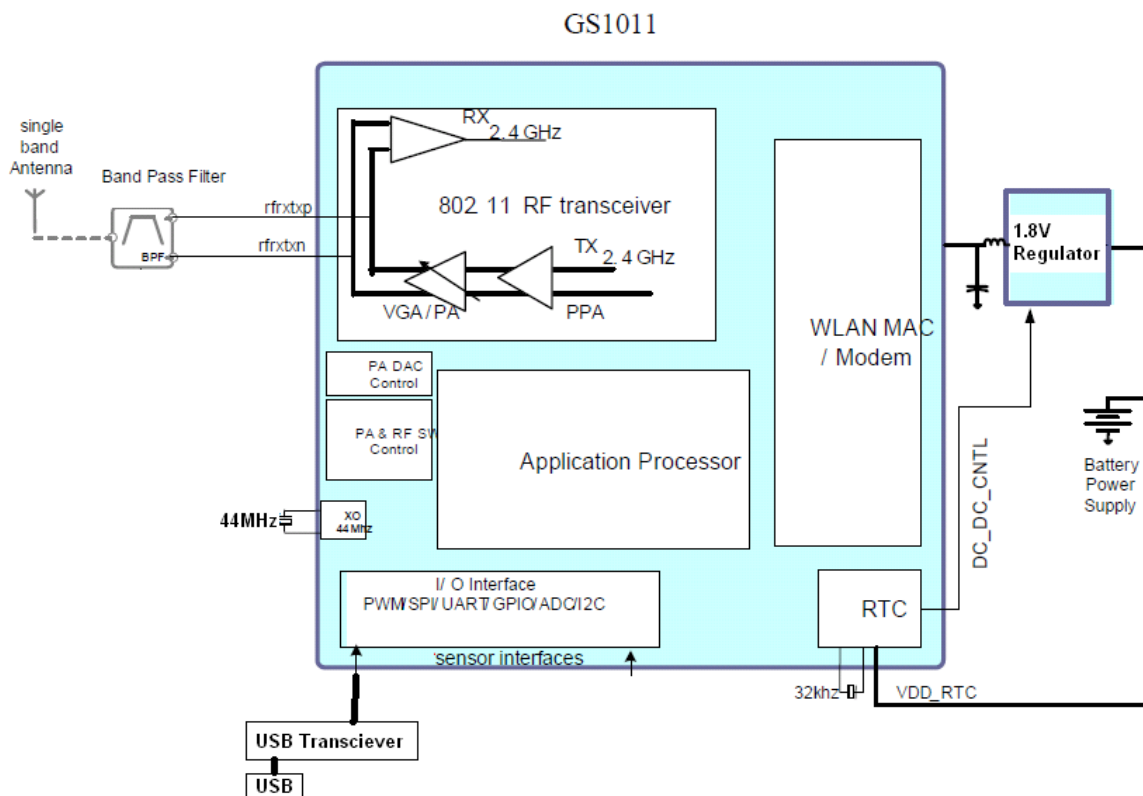

The GS1011 is a single chip system on chip solution that includes an internal 2.45GHz RF transceiver which is IEEE 802.11b/g – compatible and supports direct sequence spread spectrum (DSSS). It supports BPSK/QPSK/CCK modulation with data rates up to 11 Mb/s (802.11b).

GainSpan Corporation • 125 S Market Street • San Jose CA 95111 • U.S.A. +1  
(408) 4546630 • [info@GainSpan.com](mailto:info@GainSpan.com) • [www.GainSpan.com](http://www.GainSpan.com)

Copyright © 2009 by GainSpan Corporation. All rights reserved.

GainSpan and GainSpan logo are trademarks or registered trademarks of GainSpan Corporation. Other trademarks are the property of their owners.

Specifications, features, and availability are subject to change without notice.