

# Test Report



## INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C AND ISED CANADA REQUIREMENTS

Equipment Under Test: Multi-Protocol Wireless Module

Model: MGM12P02GA

Manufacturer: Silicon Laboratories Finland Oy  
Bertel Jungin aukio 3  
FI-02600 ESPOO  
FINLAND

Customer: Silicon Laboratories Finland Oy  
Bertel Jungin aukio 3  
FI-02600 ESPOO  
FINLAND

FCC Rule Part: 15.247: 2017  
IC Rule Part: RSS-247, Issue 2, 2017  
RSS-GEN Issue 4, 2014

KDB: Guidance for Performing Compliance  
Measurements on Digital Transmission Systems  
(DTS) Operating Under §15.247 (April 5, 2017)

Date: 31 July 2018

Issued by:

  
Rauno Repo  
Testing Engineer

Date: 31 July 2018

Checked by:

  
Emil Haverinen  
Development Engineer

**Table of Contents**

---

PRODUCT DESCRIPTION .....	3
Equipment Under Test (EUT) .....	3
Description of the EUT .....	3
Ratings and declarations .....	3
Power Supply .....	3
Mechanical Size of the EUT .....	3
GENERAL REMARKS.....	4
Disclaimer .....	4
SUMMARY OF TESTING.....	5
EUT Test Conditions during Testing .....	5
TEST RESULTS.....	6
Transmitter Radiated Spurious Emissions 9 kHz - 26500 MHz .....	6
TEST EQUIPMENT .....	16

## Equipment Under Test (EUT)

Trade mark:	Silicon Labs
Model:	MGM12P02GA
Type:	Multi-Protocol Wireless Module
Serial no:	-
FCC ID:	QOQMGM12P0
IC:	5123A-MGM12P0

## Description of the EUT

MGM12P02G is a multi-protocol wireless module. MGM12P02GA variant is equipped with integral chip antenna.

This test report contains test results for Bluetooth Low Energy.

## Classification of the device

Fixed device	<input type="checkbox"/>
Mobile Device (Human body distance > 20cm)	<input checked="" type="checkbox"/>
Portable Device (Human body distance < 20cm)	<input checked="" type="checkbox"/>

## Modifications Incorporated in the EUT

No modifications.

## Ratings and declarations

Operating Frequency Range (OFR):	2402 - 2480 MHz
Channels:	40
Channel separation:	2 MHz
Modulation:	GFSK
Integral Antenna gain:	1 dBi

## Power Supply

Operating voltage range: 2.0 - 3.8 VDC (tested with 3.3V regulated by the development board)

In tests the development board was supplied with laboratory power supply.

## Mechanical Size of the EUT

Height: 2 mm

Width: 20 mm

Length: 15 mm

## Disclaimer

*This document is issued by the Company under its General Conditions of service accessible at [http://www.sgs.com/terms and conditions.htm](http://www.sgs.com/terms_and_conditions.htm), attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.*

*Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.*

*Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This document cannot be reproduced except in full, without prior approval of the Company.*

## SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.207(a) / RSS-GEN 8.8	Conducted Emissions on Power Supply Lines	N/T <sup>(1)</sup>
§15.247(b)(3) / RSS-247 5.4(d)	Maximum Peak Conducted Output Power	N/T <sup>(1)</sup>
§15.247(a)(2) / RSS-247 5.2(a)	6 dB Bandwidth	N/T <sup>(1)</sup>
§15.247(e) / RSS-247 5.2(b)	Power Spectral Density	N/T <sup>(1)</sup>
RSS-GEN 6.6	99% Occupied Bandwidth	N/T <sup>(1)</sup>
§15.247(d) / RSS-247 5.5	100 kHz Bandwidth of Frequency Band Edges and Conducted Spurious Emissions	N/T <sup>(1)</sup>
§15.209(a), §15.247(d) / RSS-247 5.5	Radiated Emissions Within the Restricted Bands	<b>PASS</b>

1) Not tested by the request of the customer

### EUT Test Conditions during Testing

The EUT was in continuous transmit mode during all the tests. The hopping was stopped and the EUT was configured into the wanted channel using software provided by the manufacturer.

The EUT was installed in the development board.

Following channels and settings were used during the tests:

**Table 1:** Test frequencies and settings

Channel	Frequency (MHz)	Power setting	PHY	Low energy transmit	Packet Length
0	2402	104	1M	PRBS9 (GFSK)	255
19	2440	104	1M	PRBS9 (GFSK)	255
39	2480	104	1M	PRBS9 (GFSK)	255

### Test Facility

Testing Laboratory / address: FCC registration number: <b>904175</b>	SGS Fimko Ltd Särkiniementie 3 FI-00210, HELSINKI FINLAND
Test Site:	<input type="checkbox"/> Kara 10, ISED Canada registration number: <b>8708A-1</b> <input checked="" type="checkbox"/> Kara 5, ISED Canada registration number: <b>8708A-2</b> <input type="checkbox"/> Laru 3 <input type="checkbox"/> Kallio 10

**TEST RESULTS**

**Transmitter Radiated Spurious Emissions 9 kHz - 26500 MHz**

**Standard:** ANSI C63.10 (2013)  
**Tested by:** RRE  
**Date:** 19 - 20 July 2018  
**Temperature:** 23 ± 3 °C  
**Humidity:** 20 - 60 % RH  
**Measurement uncertainty:** ± 4.51 dB Level of confidence 95 % (k = 2)

**FCC Rule: 15.247(d), 15.209(a)**  
**RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

The correction factor in the final result table contains the sum of the transducers (antenna + amplifier + cables). Peak values of emissions below 1000 MHz measured for reference as well as transmitter fundamental.

In the frequency range 9 kHz – 30 MHz measurements were performed in middle channel.

Frequency range [MHz]	Limit [ $\mu$ V/m]	Limit [dB $\mu$ V/m]	Detector
30 - 80	100	40.0	Quasi-peak
88 - 216	150	43.5	Quasi-peak
216 - 960	200	46.0	Quasi-peak
960 - 1000	500	53.9	Quasi-peak
Above 1000	500	53.9	Average
Above 1000	5000	73.9	Peak

Low channel (0)

Full Spectrum

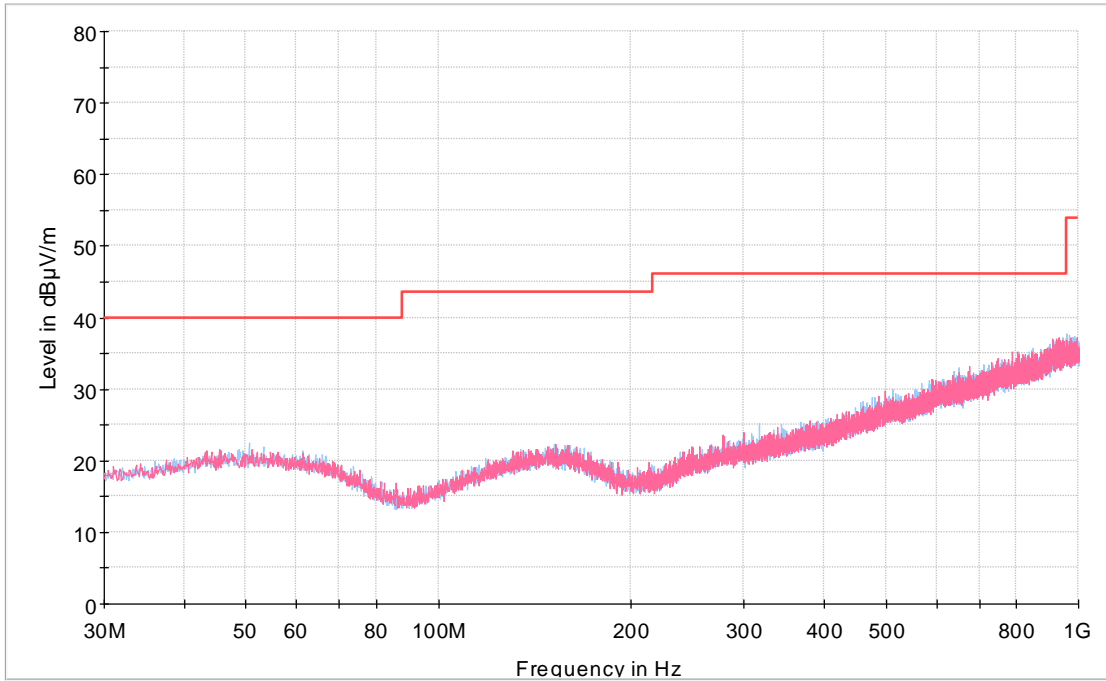


Figure 1: Channel 0 low 30 MHz – 1000 MHz

Full Spectrum

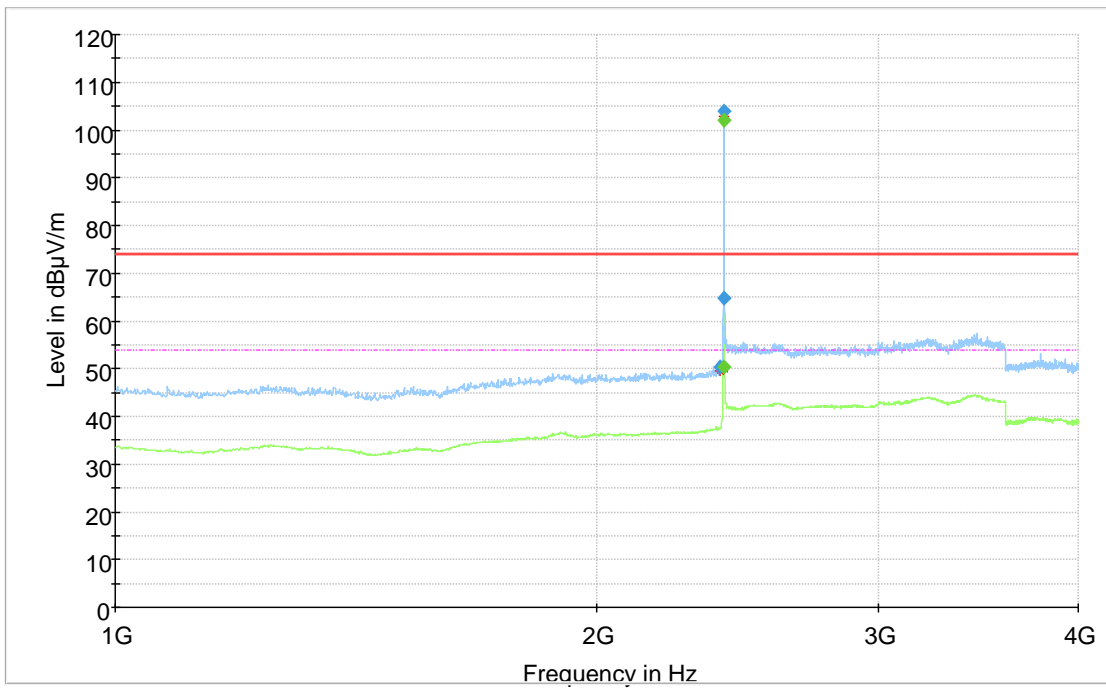


Figure 2: Channel 0 low 1 GHz – 4 GHz

Transmitter Radiated Spurious Emissions 9 kHz – 26500 MHz

Full Spectrum

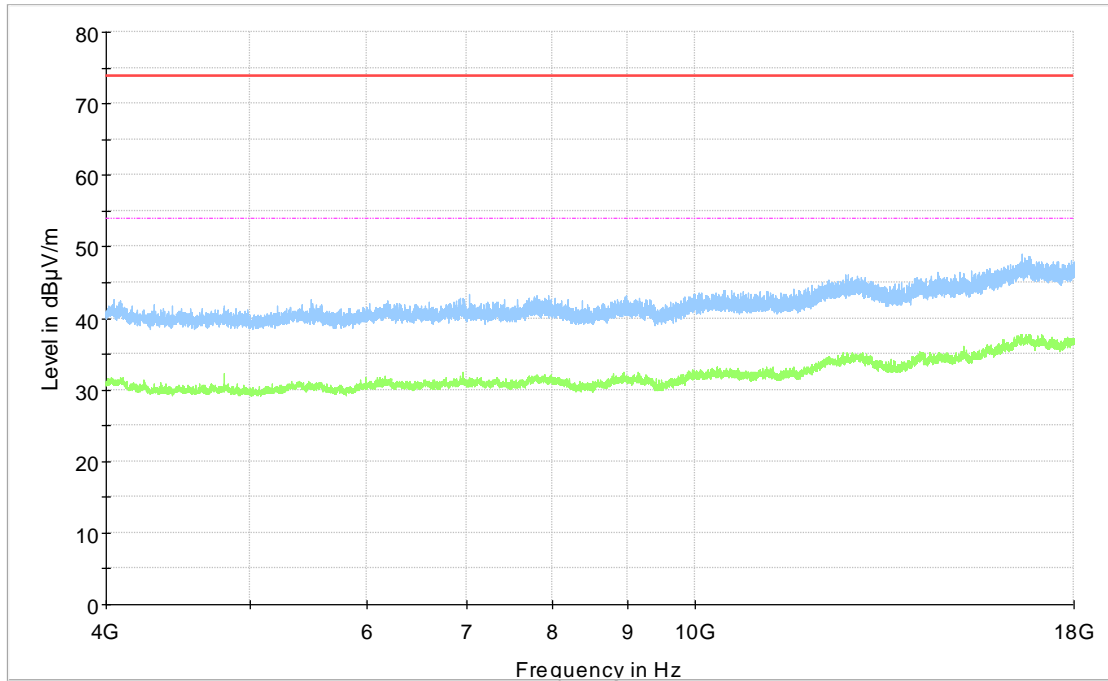


Figure 3: Channel 0 low 4 GHz – 18 GHz

Full Spectrum


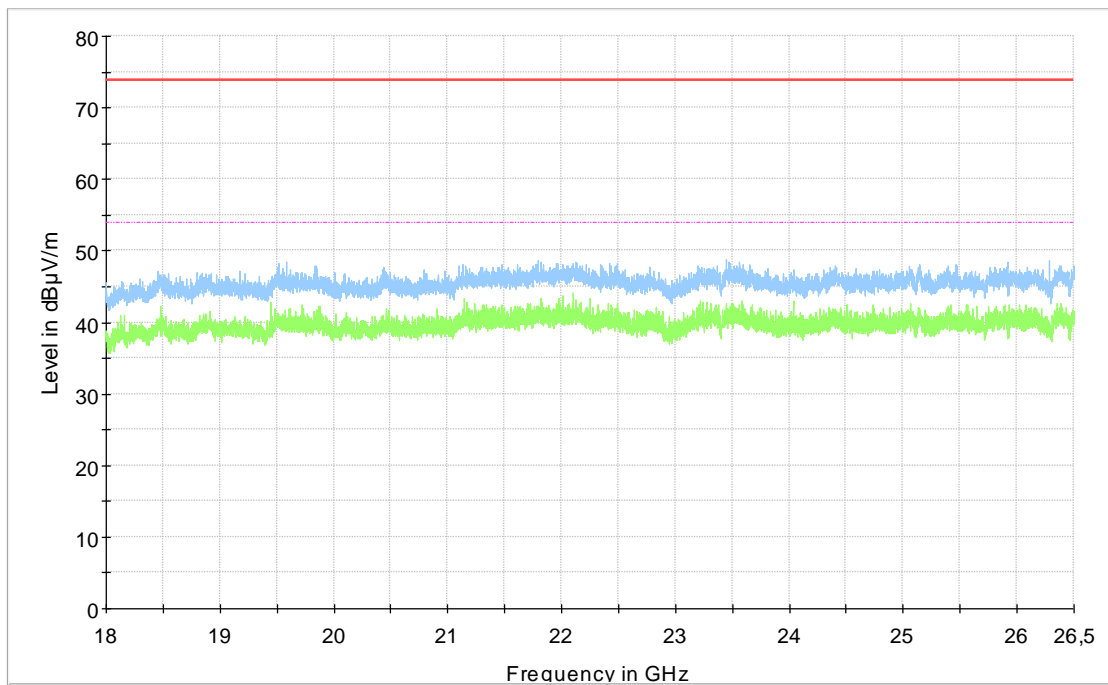


Figure 4: Channel 0 low 18 GHz – 26.5 GHz




**Middle channel (19)**

Full Spectrum

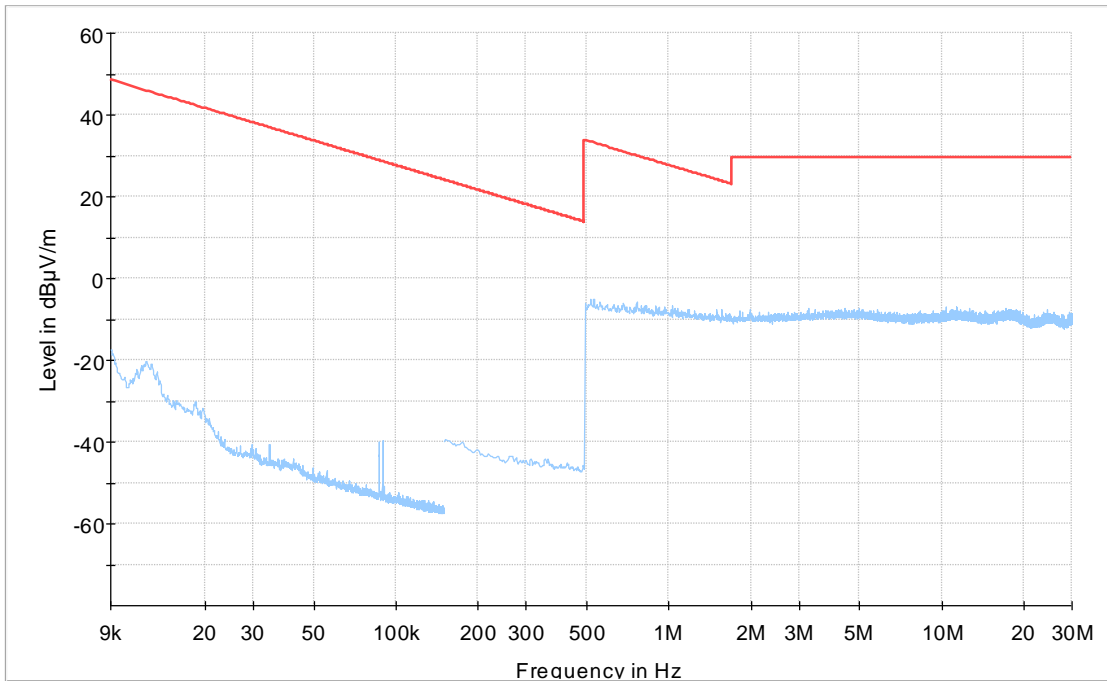

**Figure 5:** Channel 19 mid 9 kHz – 30 MHz


Full Spectrum

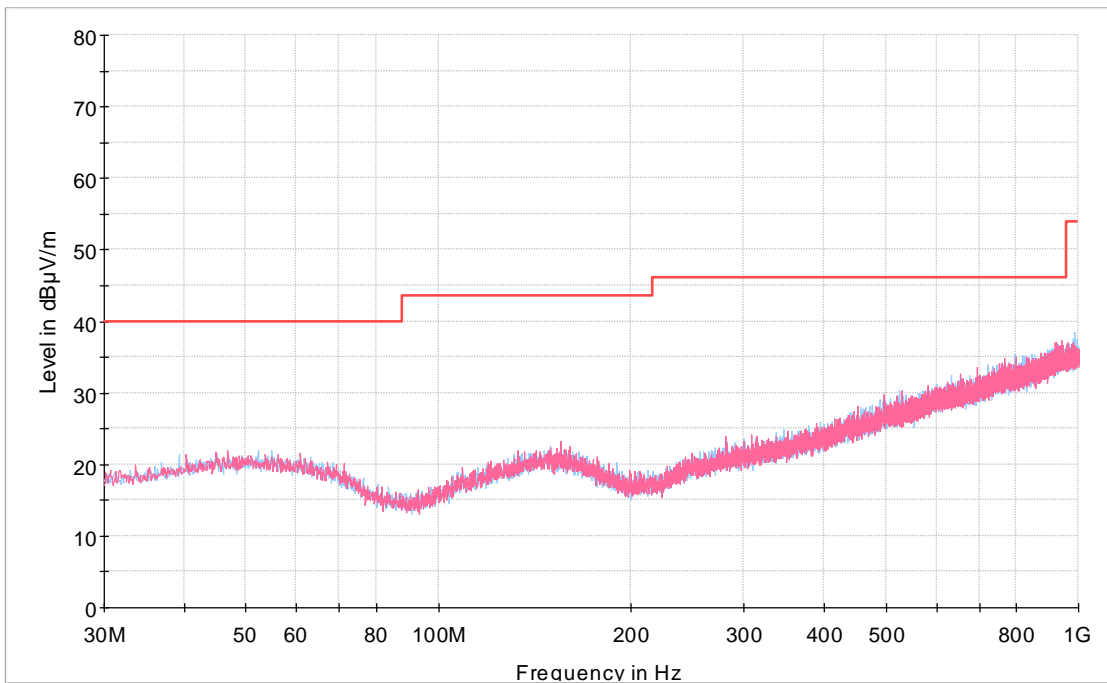

**Figure 6:** Channel 19 mid 30 MHz – 1000 MHz


**Transmitter Radiated Spurious Emissions 9 kHz – 26500 MHz**

Full Spectrum

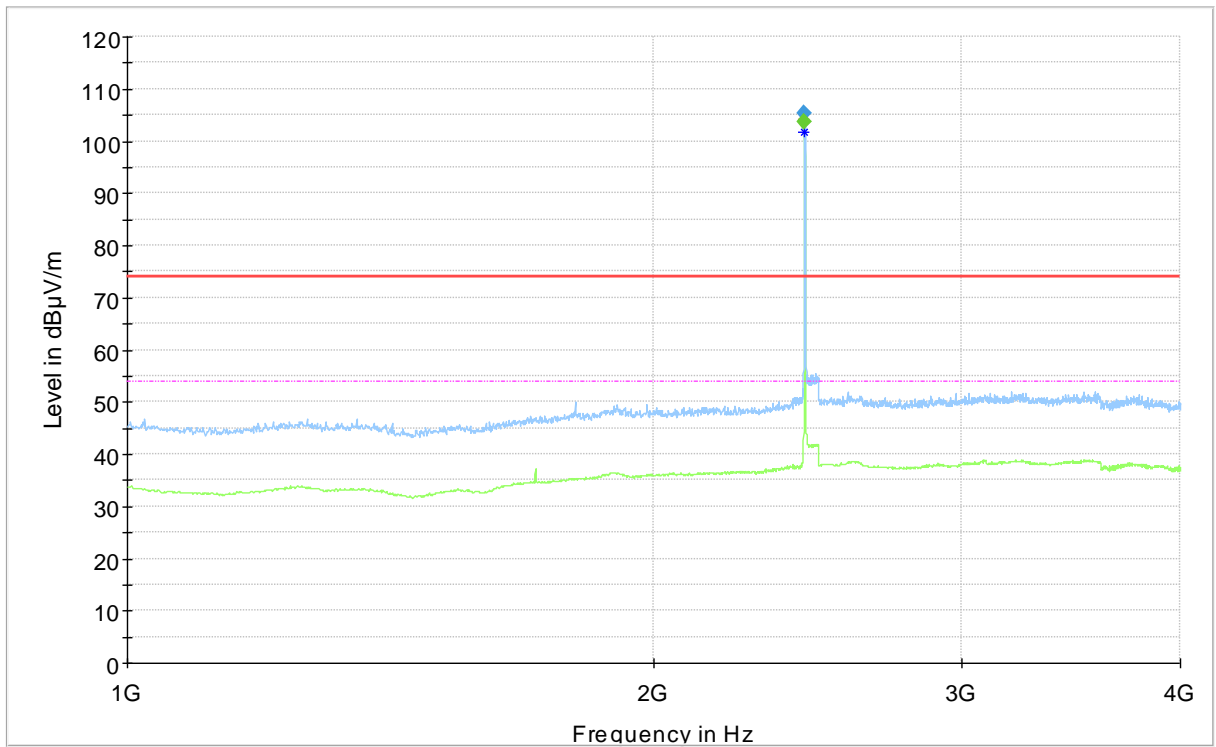


**Figure 7: Channel 19 mid 1 GHz – 4 GHz**

Full Spectrum

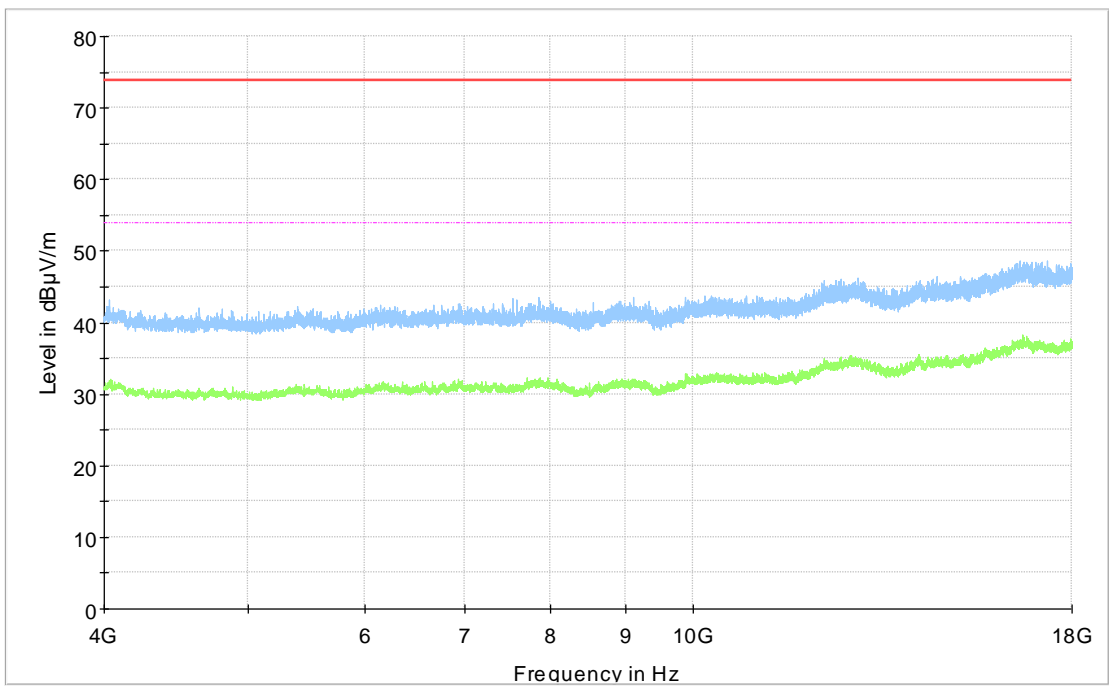

**Figure 8: Channel 19 mid 4 GHz – 18 GHz**


Full Spectrum

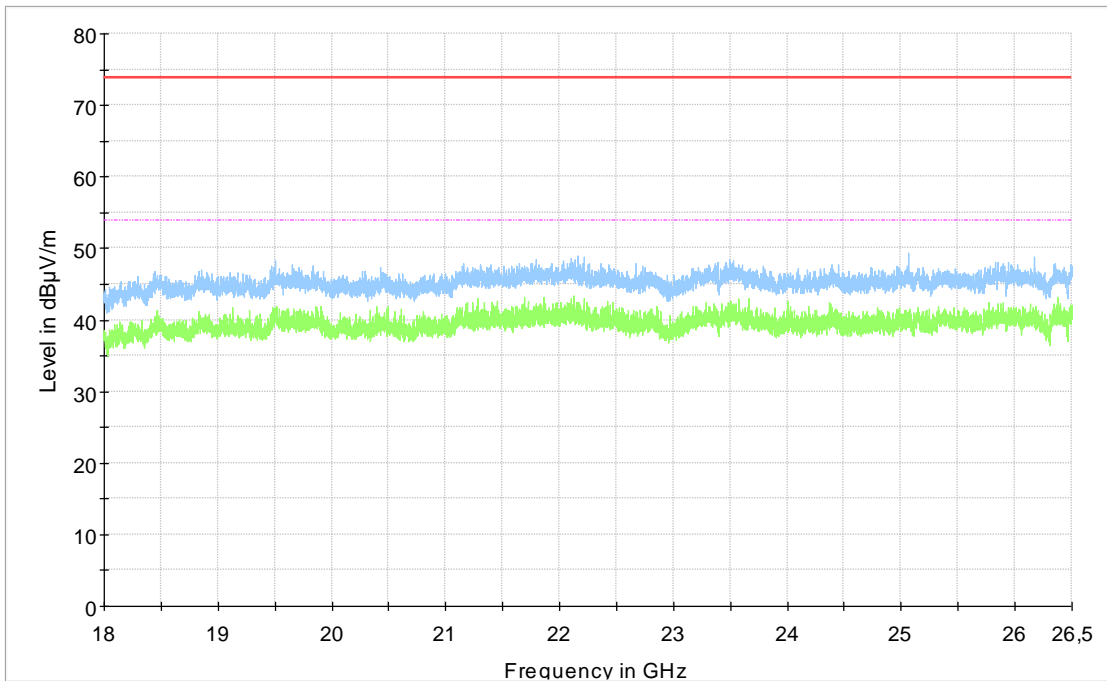

**Figure 9: Channel 19 mid 18 GHz – 26.5 GHz**

**High channel (39)**


Full Spectrum

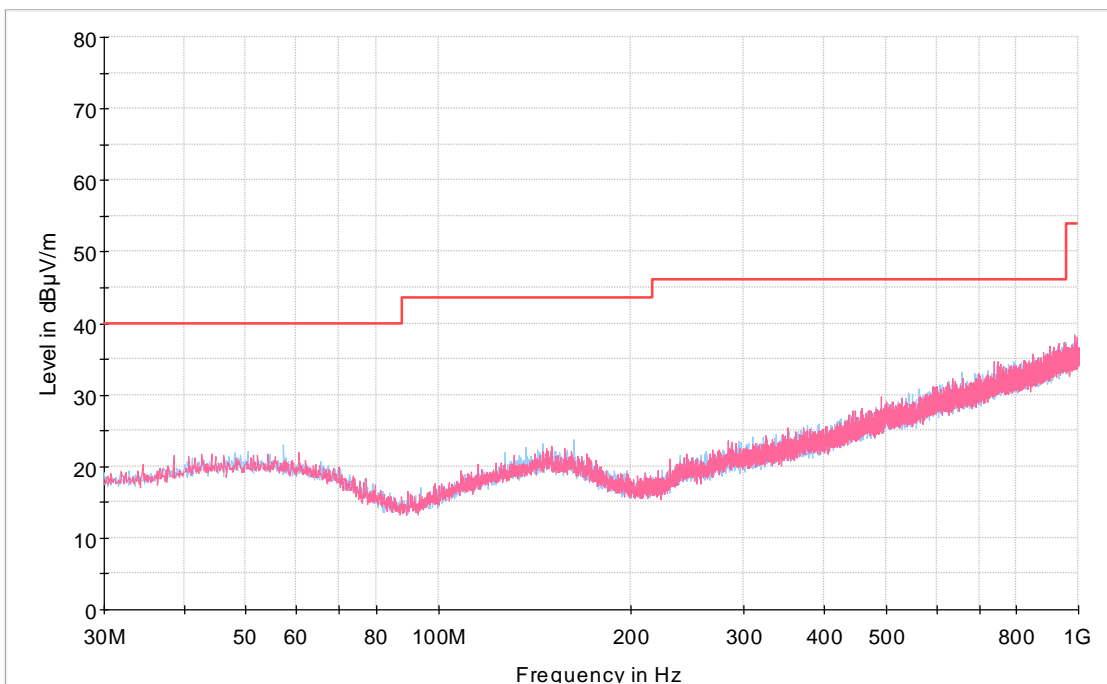

**Figure 10: Channel 39 high 30 MHz – 1000 MHz**


**Transmitter Radiated Spurious Emissions 9 kHz – 26500 MHz**

Full Spectrum

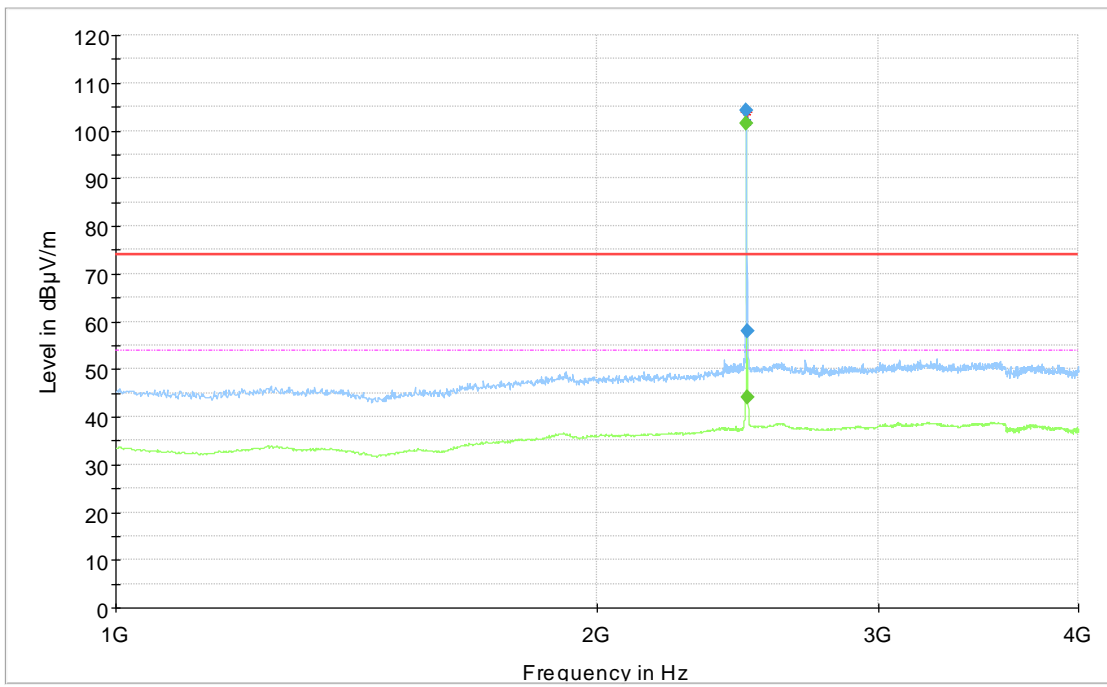

**Figure 11:** Channel 39 high 1 GHz – 4 GHz


Full Spectrum

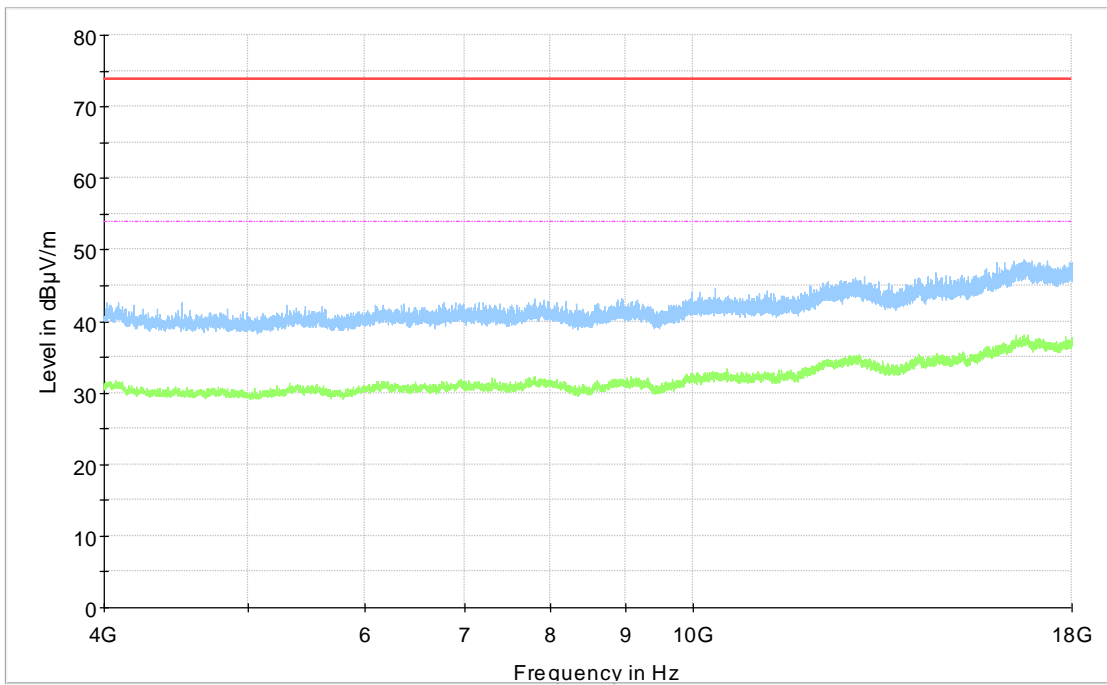

**Figure 12:** Channel 39 high 4 GHz – 18 GHz

**Transmitter Radiated Spurious Emissions 9 kHz – 26500 MHz**


Full Spectrum

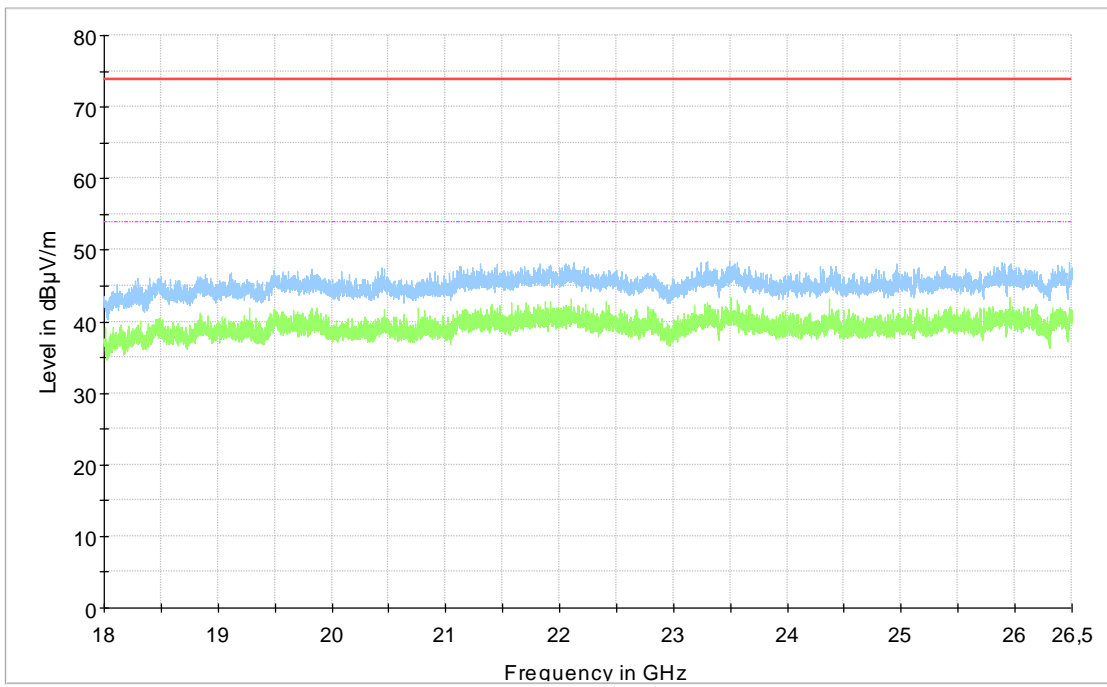

**Figure 13:** Channel 39 high 18 GHz – 26.5 GHz

**Radiated Band Edge results**

Full Spectrum

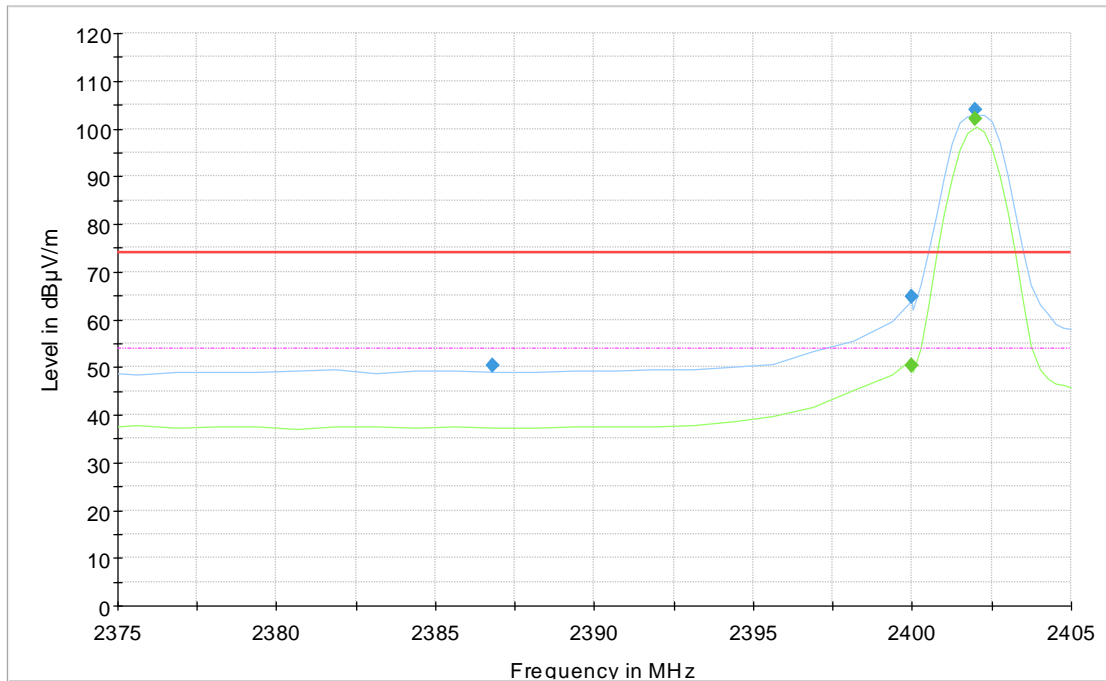


**Figure 14:** Radiated Band Edge measurement graph, Channel 0 low

**Table 2:** Peak and Average results, channel 0 low

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.800000	50.30	---	73.90	23.60	1000.0	1000.000	277.0	H	190.0	14.6
2400.000000	64.77	---	73.90	9.13	1000.0	1000.000	144.0	H	290.0	14.7
2400.000000	---	50.32	53.90	3.58	1000.0	1000.000	146.0	H	290.0	14.7

**Transmitter Radiated Spurious Emissions 9 kHz – 26500 MHz**

Full Spectrum

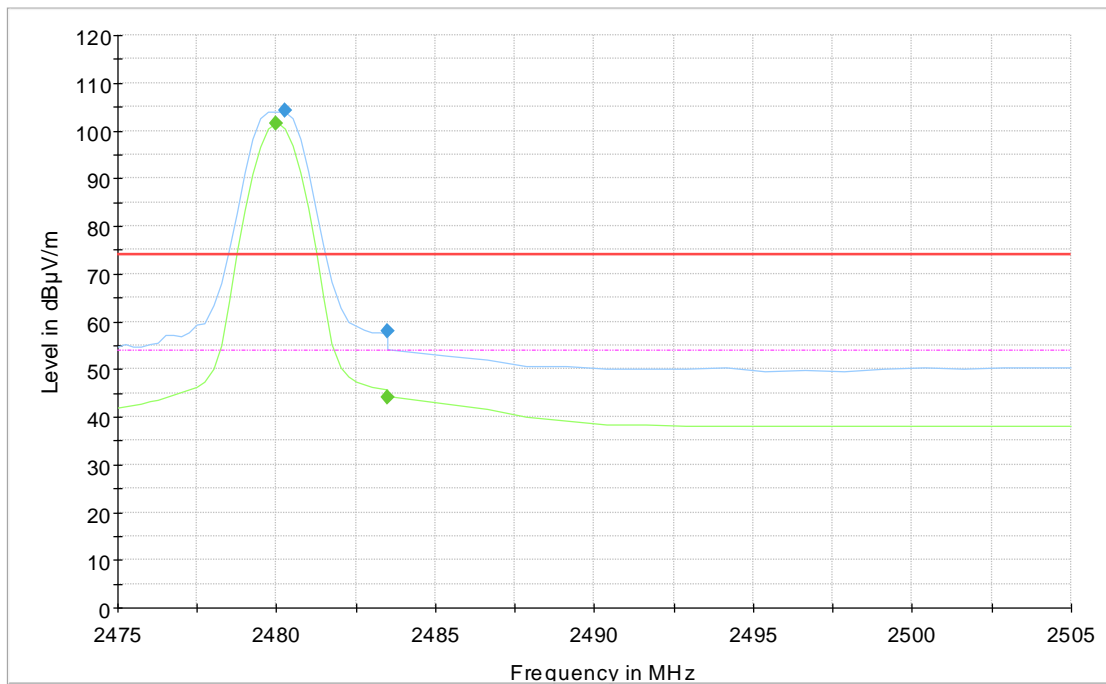

**Figure 15:** Radiated Band Edge measurement graph, Channel 39 high

**Table 3:** Peak and Average results, channel 39 high

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
2483.500000	---	44.16	53.90	9.74	1000.0	1000.000	155.0	H	73.0	14.7
2483.500000	58.05	---	73.90	15.85	1000.0	1000.000	150.0	H	72.0	14.7

## TEST EQUIPMENT

### RF-Test Equipment

Equipment	Manufacturer	Type	Inv or serial	Prev Calib	Next Calib
ANTENNA	A.H. SYSTEMS	SAS-200/518	inv:7873	-	-
SPECTRUM ANALYZER	AGILENT	E7405A	inv:9746	2018-01-08	2020-01-08
PREAMPLIFIER	AMC MICROWAVE	ALS1826-41-12	sn:11	2017-11-16	2018-11-16
PREAMPLIFIER	CIAO	CA118-3123	inv:10278	2017-11-16	2018-11-16
ANTENNA	EMCO	3117	inv:7293	2018-03-14	2020-03-14
ATTENUATOR	HUBER&SUHNER	6830.19.A	inv:10394	2017-11-01	2019-11-01
TURNTABLE	MATURO	DS430 UPGRADED	inv:10182	-	-
MAST & TURNTABLE CONTROLLER	MATURO	NCD	inv:10183	-	-
ANTENNA MAST	MATURO	TAM 4.0E	inv:10181	-	-
ATTENUATOR	PASTERNAK	10 dB, DC-40 GHz	sn:A1	2017-11-16	2019-11-16
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-	-
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU 26	inv:8453	2018-06-27	2019-06-27
ANTENNA	ROHDE & SCHWARZ	HFH2-Z2 , 335.4711.52	inv:8013	2016-08-29	2018-08-29
ANTENNA	SCHWARZBECK	VULB 9168	inv:8911	2016-10-25	2018-10-25
POWER SUPPLY	THANDAR	TS3021S	sn:099610	-	-
TEMPERATURE/ HUMIDITY METER	VAISALA	HMT 333	inv:8638	2018-04-05	2019-04-05
FILTER	WAINWRIGHT	HP, WHKX4.0/18G-10SS	inv:10403	2017-03-01	2019-03-01
MULTIMETER	BECKMAN	DM95	inv:8255	2017-12-19	2018-12-19