

# Test Report



## INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C AND ISED CANADA REQUIREMENTS

Equipment Under Test: Multi-Protocol Wireless Module

Model: MGM13P02A  
MGM13P02E

Manufacturer: Silicon Laboratories Finland Oy  
Bertel Jungin aukio 3  
FI-02600 ESPOO  
FINLAND

Customer: Silicon Laboratories Finland Oy  
Bertel Jungin aukio 3  
FI-02600 ESPOO  
FINLAND

FCC Rule Part: 15.247: 2017  
IC Rule Part: RSS-247, Issue 2, 2017  
RSS-GEN Issue 4, 2014

KDB: Guidance for Performing Compliance  
Measurements on Digital Transmission Systems  
(DTS) Operating Under §15.247 (April 5, 2017)

Date: 2 November 2017

Issued by:

A handwritten signature in blue ink, appearing to read "Emil Haverinen".

Emil Haverinen  
Testing Engineer

Date:

2 November 2017

Checked by:

A handwritten signature in blue ink, appearing to read "Rauno Repo".

Rauno Repo  
Testing Engineer

**Table of Contents**

---

PRODUCT DESCRIPTION .....	3
Equipment Under Test (EUT) .....	3
Description of the EUT .....	3
Ratings and declarations .....	3
Power Supply .....	3
Mechanical Size of the EUT .....	3
Samples .....	3
GENERAL REMARKS .....	4
Disclaimer .....	4
SUMMARY OF TESTING .....	5
EUT Test Conditions during Testing .....	5
TEST RESULTS .....	6
Maximum Peak Conducted Output Power .....	6
99% Occupied Bandwidth .....	8
TEST EQUIPMENT .....	10

## Equipment Under Test (EUT)

Trade mark: Silicon Labs  
 Model: MGM13P02A, MGM13P02E  
 Type: Multi-Protocol Wireless Module  
 Serial no: -  
 FCC ID: QOQMGM13P  
 IC: 5123A-MGM13P

## Description of the EUT

MGM13P is a multi-protocol wireless module with two antenna variants. Variant A is equipped with chip antenna while the E variant has RF connector for the use of external antenna.

This test report contains test results for Bluetooth Low Energy.

## Classification of the device

Fixed device   
 Mobile Device (Human body distance > 20cm)   
 Portable Device (Human body distance < 20cm)

## Modifications Incorporated in the EUT

-

## Ratings and declarations

Operating Frequency Range (OFR): 2402 - 2480 MHz  
 Channels: 40  
 Channel separation: 2 MHz  
 Effective conducted power: 10.69 dBm (Peak)  
 Modulation: GFSK  
 Integral Antenna gain: A-variant: 1 dBi  
 External Antenna gain: E-variant: 2.14 dBi

## Power Supply

Operating voltage range: 2.0 - 3.8 VDC (tested with 3.3V regulated by the development board)

The EUT was powered from the development board which was powered by PC.

## Mechanical Size of the EUT

Height: 2 mm                      Width: 20 mm                      Length: 15 mm

## Samples

One sample was used in tests.

EUT	Description
1. MGM13P02E	Original E variant

## Disclaimer

*This document is issued by the Company under its General Conditions of service accessible at [http://www.sgs.com/terms and conditions.htm](http://www.sgs.com/terms_and_conditions.htm), attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.*

*Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.*

*Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This document cannot be reproduced except in full, without prior approval of the Company.*

## SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.207(a) / RSS-GEN 8.8	Conducted Emissions on Power Supply Lines	N/T
§15.247(b)(3) / RSS-247 5.4(d)	Maximum Peak Conducted Output Power	PASS
§15.247(a)(2) / RSS-247 5.2(a)	6 dB Bandwidth	N/T
§15.247(e) / RSS-247 5.2(b)	Power Spectral Density	N/T
RSS-GEN 6.6	99% Occupied Bandwidth	PASS
§15.247(d) / RSS-247 5.5	100 kHz Bandwidth of Frequency Band Edges and Conducted Spurious Emissions	N/T
§15.209(a), §15.247(d) / RSS-247 5.5	Radiated Emissions Within the Restricted Bands	N/T

### Possible test case verdicts:

EUT does meet the requirement: P (Pass)  
 EUT does not meet the requirement: F (Fail)  
 Test was not performed by SGS Fimko: N/T

## EUT Test Conditions during Testing

The EUT was in continuous transmit mode during all the tests. The hopping was stopped and the EUT was configured into the wanted channel using software provided by the manufacturer.

During conducted measurements, the EUT was connected to WSTK development board.

Following channels and settings were used during the tests;

### EUT 1. MGM13P02E

Channel	Frequency (MHz)	Power setting	PHY	Low energy transmit	Packet Length
0	2402	100	125K Coded	PRBS9 (GFSK)	255
19	2440	100	125K Coded	PRBS9 (GFSK)	255
39	2480	100	125K Coded	PRBS9 (GFSK)	255

## Test Facility

<input type="checkbox"/>	Testing Location / address: FCC registration number: <b>90598</b>	SGS Fimko Ltd Särkiniementie 3 FI-00210, HELSINKI FINLAND
<input checked="" type="checkbox"/>	Testing Location / address: FCC registration number: <b>178986</b> Industry Canada registration number: <b>8708A-2</b>	SGS Fimko Ltd Karakaarenkuja 4 FI-02610, ESPOO FINLAND

**TEST RESULTS**

**Maximum Peak Conducted Output Power**

**Standard:** ANSI C63.10 (2013)  
**Tested by:** JAT  
**Date:** 19 October 2017  
**Temperature:** 23 ± 3 °C  
**Humidity:** 20 - 60 % RH  
**Measurement uncertainty:** ± 2.87dB Level of confidence 95 % (k = 2)

**FCC Rule: 15.247(b)(3)**  
**RSS-247 5.4(d)**


For systems using digital modulation in the 2400-2483.5 MHz bands the limit is 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Measured values are peak values.

**Results:**


**Table 1:** Maximum conducted output power

Channel	Conducted Power [dBm]	Limit [dBm]	Margin [dBm]	Result
0 Low	10.69	30	19.31	PASS
19 Mid	10.49	30	19.51	PASS
39 High	10.31	30	19.69	PASS

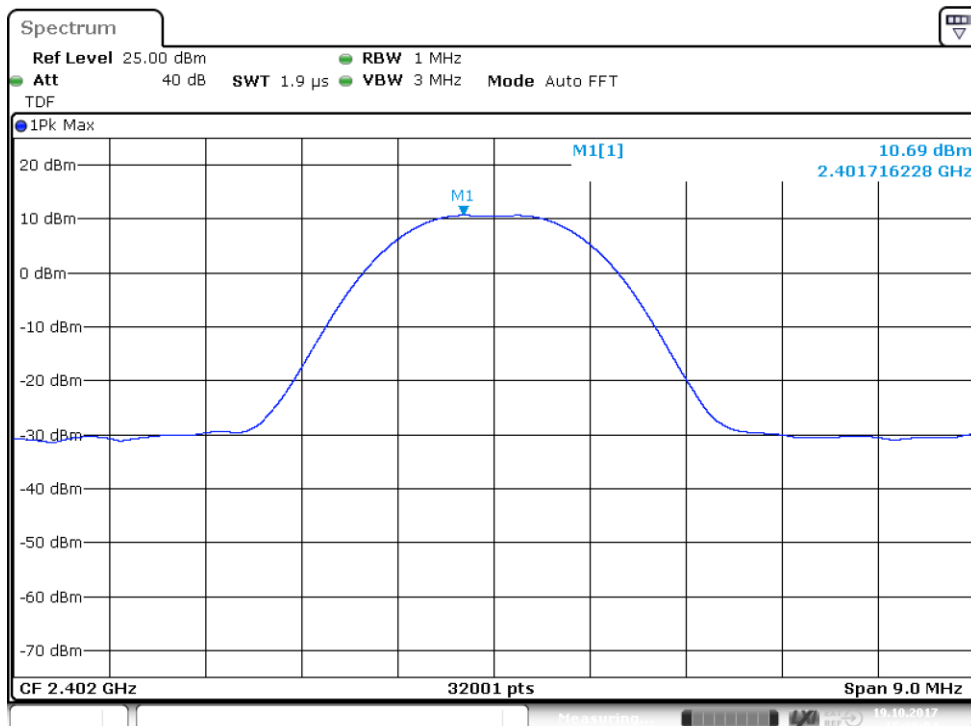


**Figure 1:** Conducted power, Channel 0 low

## Maximum Peak Conducted Output Power

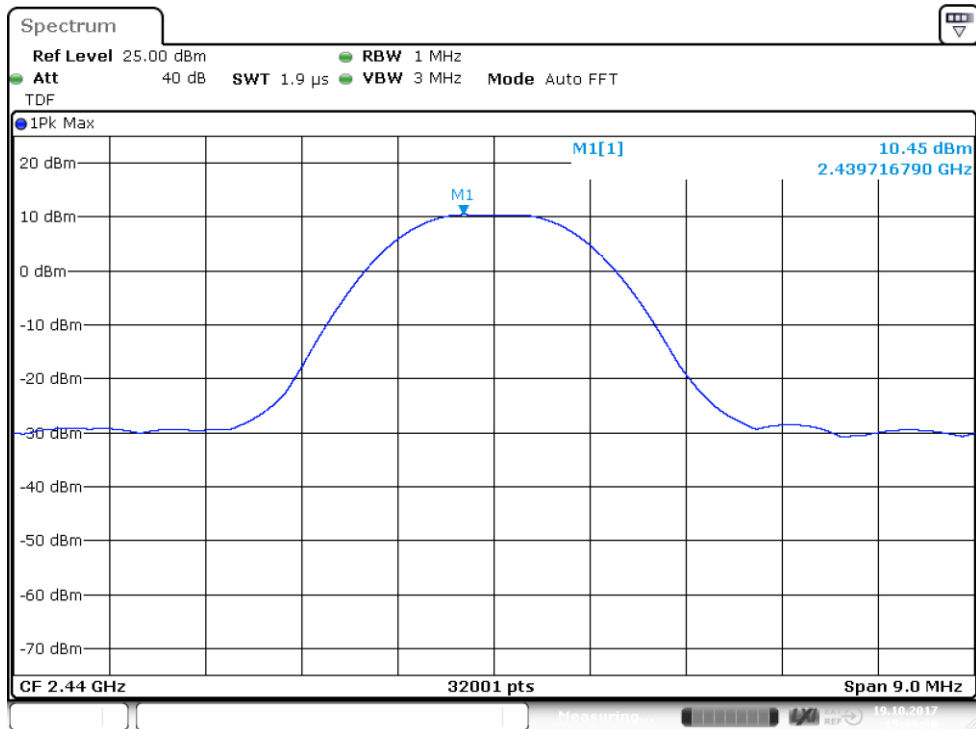

**Figure 2:** Conducted power, Channel 19 mid

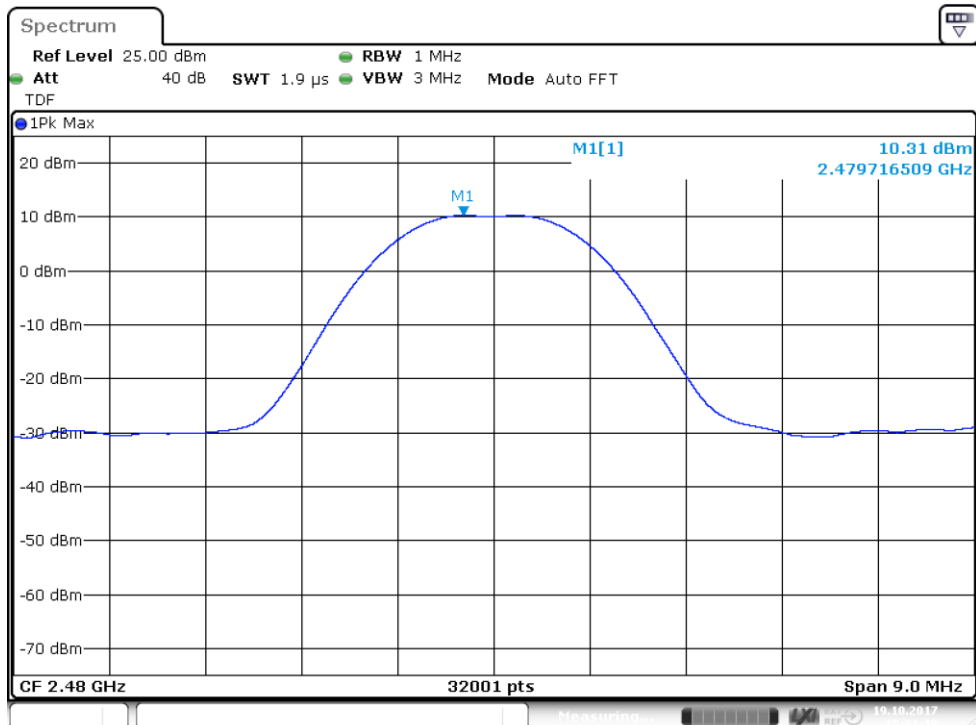

**Figure 3:** Conducted power, Channel 39 high

### 99% Occupied Bandwidth


**Standard:** RSS-GEN (2014)  
**Tested by:** JAT  
**Date:** 19 October 2017  
**Temperature:** 23 ± 3 °C  
**Humidity:** 20 - 60 % RH

#### RSS-GEN 6.6

#### Results:

**Table 2:** 99% occupied bandwidth test results

Channel	Limit	99 % BW [MHz]	Result
0 Low	-	1.049967189	PASS
19 Mid	-	1.056716978	PASS
39 High	-	1.057091966	PASS

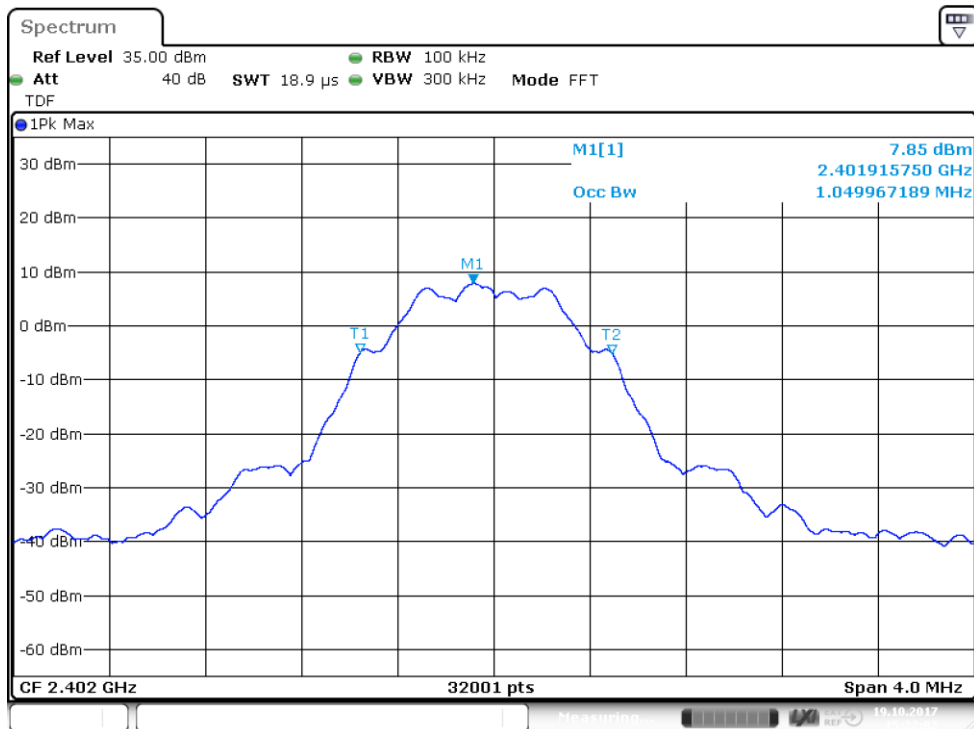

**Figure 4:** 99% OBW, Channel 0 low



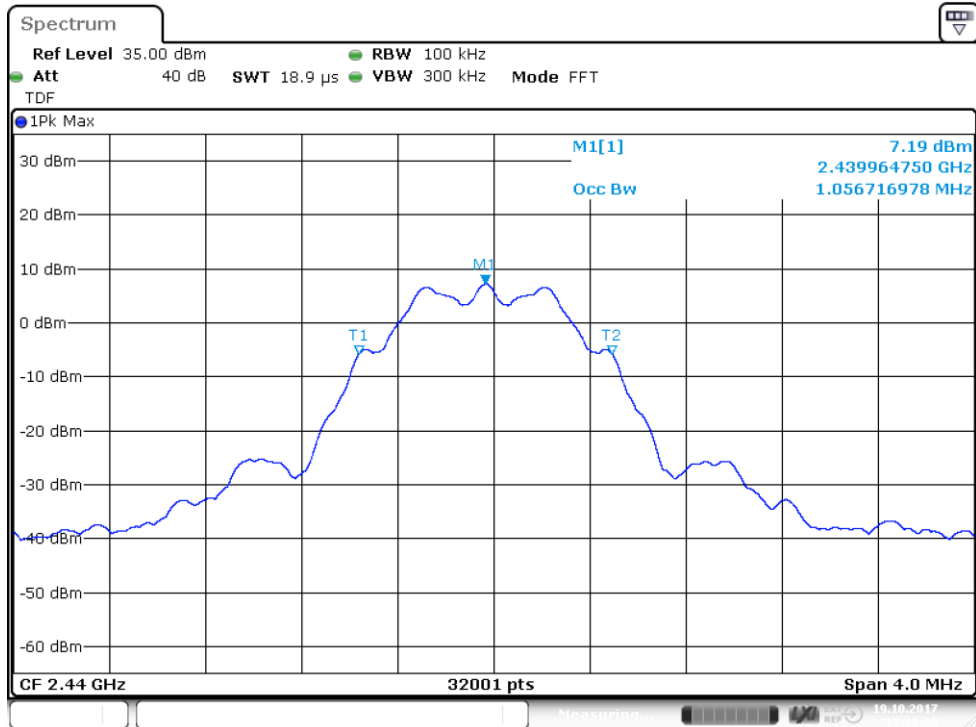


Figure 5: 99% OBW, Channel 19 mid

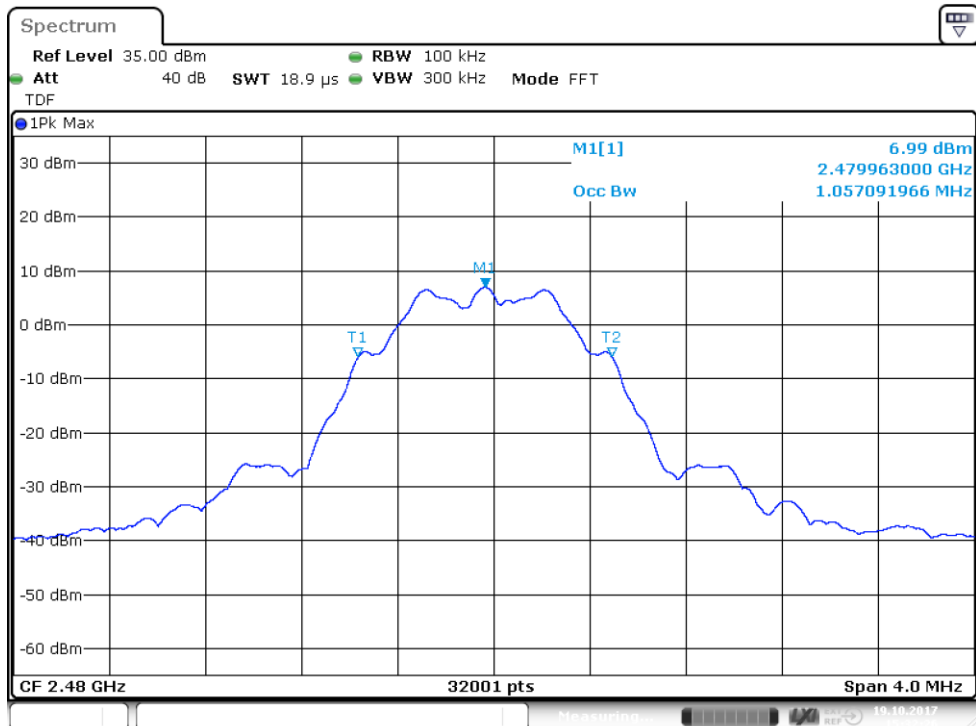


Figure 6: 99% OBW, Channel 39 high

**TEST EQUIPMENT****RF-Test Equipment**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Type</b>	<b>Inv or serial</b>	<b>Prev Calib</b>	<b>Next Calib</b>
ATTENUATOR	PASTERNAK	10dB DC-40GHz	-	-	-
SIGNAL ANALYZER	ROHDE & SCHWARZ	FSV40	inv:9093	2017-07-07	2018-07-07