

Report No.: EF/2006/20016-04 Issue Date: Dec. 18, 2006

Page: 1 of 25

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT **FULL MODULE APPROVE CLASS II PERMISSIVE CHANGE**

Product Name: Bluetooth Class I EDR Module

Brand Name: Bluegiga

WT11# **Model Name:**

Model Differences: N/A

FCC ID: QOQWT11

Report No.: EF/2006/20016-04

Issue Date: Dec. 18, 2006

FCC Rule Part: §15.247

Prepared for: Bluegiga Technologies

> Sinikalliontie 11, 02630 ESPOO,

FINLAND

Prepared by: SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial

Zone, Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 2

VERIFICATION OF COMPLIANCE

Applicant: Bluegiga Technologies

Sinikalliontie 11, 02630 ESPOO, FINLAND

Equipment Under Test: Bluetooth Class I EDR Module

Brand Name: Bluegiga

FCC ID Number: QOQWT11

Model No.: WT11#

Model Difference: N/A

File Number: EF/2006/20016-04

Date of test: Dec. 08, 2006 ~ Dec. 15, 2006

Date of EUT Received: Dec. 08, 2006

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Alex Hsieh	Date	Dec. 18, 2006	
	Alex Hsieh			
Prepared By:	Evalow	Date	Dec. 18, 2006	
	Eva Kao			
Approved By:	Timent du	Date	Dec. 18, 2006	
_	Vincent Su			



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 3

Version

Version No.	Date
00	Dec. 18, 2006



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 4

Table of Contents

1.	GEN	ERAL INFORMATION	6			
	1.1.	Product Description	6			
	1.2.	Related Submittal(s) / Grant (s)	6			
	1.3.	Test Methodology	6			
	1.4.	Test Facility	6			
	1.5.	Special Accessories	6			
	1.6.	Equipment Modifications	6			
2.	SYST	FEM TEST CONFIGURATION	7			
	2.1.	EUT Configuration	7			
	2.2.	EUT Exercise	7			
	2.3.	Test Procedure	7			
	2.4.	Configuration of Tested System	8			
3.	SUM	IMARY OF TEST RESULTS	9			
4.	DES	CRIPTION OF TEST MODES	9			
5.	PEAK OUTPUT POWER MEASUREMENT					
	5.1.	Standard Applicable	10			
	5.2.	Measurement Procedure	10			
	5.3.	Measurement Result	10			
	5.4.	Measurement Equipment Used:	10			
6.	20dB	BAND WIDTH	13			
	6.1.	Standard Applicable	13			
	6.2.	Measurement Procedure	13			
	6.3.	Measurement Result	13			
	6.4.	Measurement Equipment Used:	13			
7.	100K	CHz BANDWIDTH OF BAND EDGES MEASUREMENT	16			
	7.1.	Standard Applicable	16			
	7.2.	Measurement Procedure	16			
	7.3.	Measurement Result	16			
	7.4.	Measurement Equipment Used:	16			



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 5

8.	SPUF	SPURIOUS RADIATED EMISSION TEST				
	8.1.	Standard Applicable	20			
		EUT Setup				
	8.3.	-				
	8.4.	Test SET-UP (Block Diagram of Configuration)	21			
	8.5.	Measurement Equipment Used:	22			
	8.6.	Field Strength Calculation	22			
	8.7.	Measurement Result.	22			



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 6

1. GENERAL INFORMATION

1.1. Product Description

The Bluegiga Technologies, Model: WT11# is a Bluetooth Class I EDR Module.

The EUT is compliance with Bluetooth Standard.

A major technical descriptions of EUT is described as following:

A). Operation Frequency: 2402 – 2480Hz, 79 channels

B). Rated output power: 13.24 dBm

C). Modulation type: Frequency Hopping Spread Spectrum (FHSS)

D). Antenna Designation: Chip Antenna, 0 dBi, Non-User Replaceable (Fixed)

E). Power Supply: 3.3Vdc

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: QOQWT11 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a Doc procedure.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 & 10 meters) Registration Number: 94644, Anechoic chamber (3 meters) Registration Number: 573967.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 7

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.



Report No.: EF/2006/20016-04 Issue Date: Dec. 18, 2006

Page: 8

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

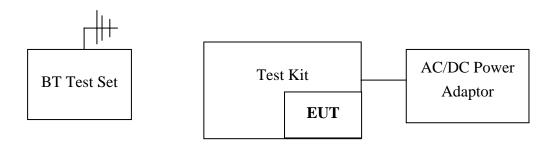


Table 5-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	FCC ID	Series No.	Data Cable	Power Cord
1.	BT Test Set	Anritsu	MT8852B	N/A	6K00004318	N/A	Un-shielding
2.	Test Kit	Bluegiga	WT11 CertBoard	N/A	V1.0	N/A	Un-shielding
	AC/DC Power						_
3.	Adaptor	Topward	3303A	N/A	715856	N/A	Un-shielding



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 9

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result	
§15.207(a)	Conducted Emission	N/A	
§15.247(b)(1)	Peak Output Power	Compliant	
§15.247(a)	20dB Bandwidth	Compliant	
§15.247(c)	100 KHz Bandwidth Of Fre-	Compliant	
	quency Band Edges	Ι	
§15.209(a) (f)	Spurious Emission	Compliant	
§15.247(a)(1)	Frequency Separation	N/A	
§15.247(a)(1)(iii)	Number of hopping frequency	N/A	
§15.247(a)(1)(iii)	Time of Occupancy	N/A	
§15.247	Peak Power Density	N/A	
§15.203, §15.247(b)(4)(i)	Antenna Requirement	N/A	

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) · mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing.



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 10

5. PEAK OUTPUT POWER MEASUREMENT

5.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

5.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

5.3. Measurement Result

СН	Frequency (MHz)	Reading Power dBm	Cable Loss	Output Power dBm	Output Power W	Limit (W)
LOW	2402.0	13.24	0.00	13.24	0.02109	1
MID	2441.0	12.52	0.00	12.52	0.01786	1
HIGH	2480.0	12.64	0.00	12.64	0.01837	1

5.4. Measurement Equipment Used:


EQUIPMENT MFR		MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2006	05/26/2007
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2006	08/27/2007
Spectrum Analyzer	Agilent	E4446A	MY43360126	01/22/2006	01/21/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007



Report No.: EF/2006/20016-04 Issue Date: Dec. 18, 2006

Page: 11

Peak Power Output Data Plot (CH Low)

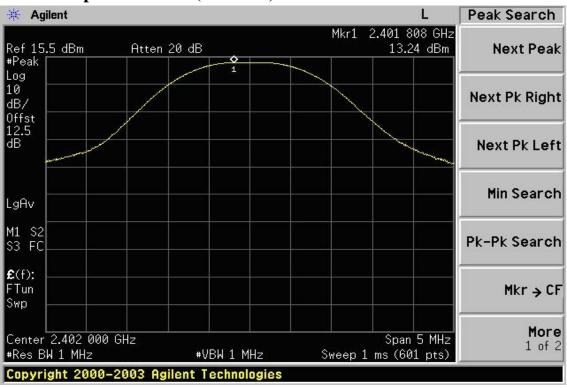

Peak Power Output Data Plot (CH Mid)





Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 12

Peak Power Output Data Plot (CH High)





Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 13

6. 20dB BAND WIDTH

6.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

6.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

6.3. Measurement Result

СН	Bandwidth (MHz)	2/3* Bandwidth (MHz)
Lower	1.212	0.808
Mid	1.212	0.808
Higher	1.208	0.805

6.4. Measurement Equipment Used:


EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2006	05/26/2007
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2006	08/27/2007
Spectrum Analyzer	Agilent	E4446A	MY43360126	01/22/2006	01/21/2007
Low Loss Cable	·		N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007




Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 14

20dB Band Width Test Data CH-Low

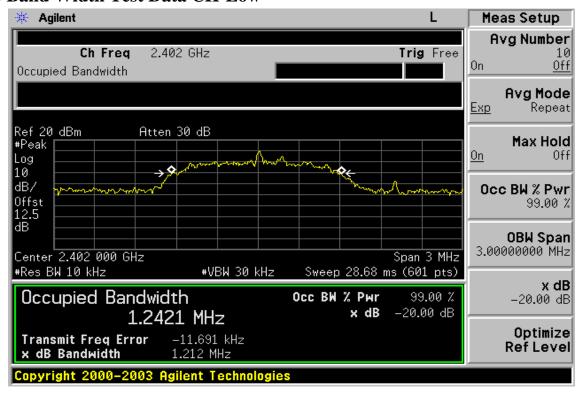

20dB Band Width Test Data CH-Mid

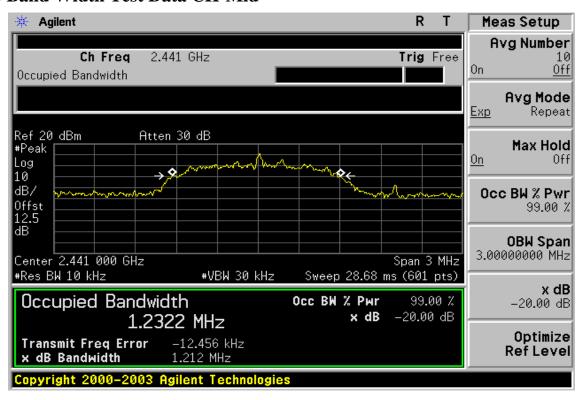




Report No.: EF/2006/20016-04

Issue Date: Dec. 18, 2006

Page: 15

20dB Band Width Test Data CH-High

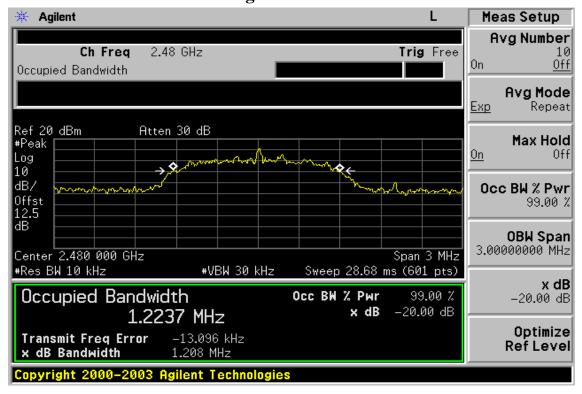



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 16

7. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

7.1. Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

7.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.488GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

7.3. Measurement Result

Refer to attach spectrum analyzer data chart.

7.4. Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2005	05/26/2006
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2005	08/26/2006
Spectrum Analyzer	Agilent	E4446A	MY43360126	01/22/2006	01/21/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2005	10/06/2006


Note: Measurement Equipment for radiated emission refers to section 9.




Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 17

Conducted Emission: Test Data CH-Low

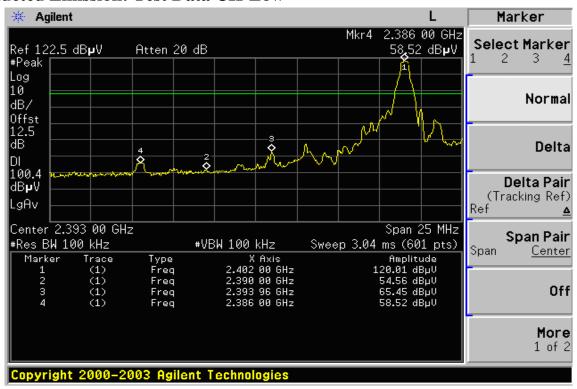

Conducted Emission: Test Data CH-High

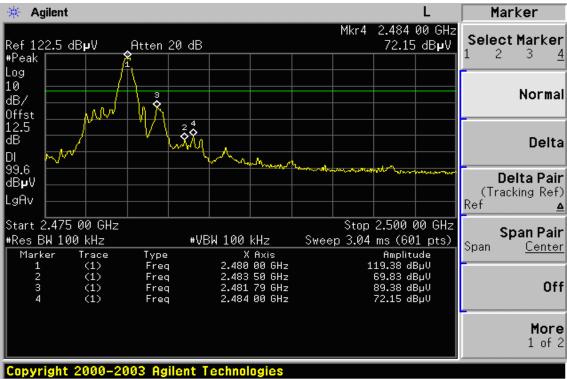



Report No.: EF/2006/20016-04 Issue Date: Dec. 18, 2006

Page: 18

Radiated Emission:

Operation Mode TX CH Low Test Date Dec. 18, 2006

Fundamental Frequency 2402 MHz Temperature 25 $^{\circ}\text{C}$ Test By Alex Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2386.0						74.00	54.00		Peak
2390.0						74.00	54.00		Peak

Operation Mode TX CH Low Test Date Dec. 18, 2006

Fundamental Frequency 2402 MHz Test By Alex Temperature 25 $^{\circ}$ C Pol Hor. Humidity 65 $^{\circ}$

		Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
	Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
•	2386.0						74.00	54.00		Peak
	2390.0						74.00	54.00		Peak

Remark:

- (1) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EF/2006/20016-04 Issue Date: Dec. 18, 2006

Page: 19

Radiated Emission:

Operation Mode TX CH High Test Date Dec. 18, 2006

Fundamental Frequency 2480 MHz Test By Alex Temperature 25 $^{\circ}$ C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}	Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV) $CF(dB)$	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.5					74.00	54.00		Peak
2484.0					74.00	54.00		Peak

Operation Mode TX CH High Test Date Dec. 18, 2006

Fundamental Frequency 2480 MHz Temperature 2480 MHz Test By Alex Pol Hor.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.5						74.00	54.00		Peak
2484.0						74.00	54.00		Peak

Remark:

- (1) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 20

8. SPURIOUS RADIATED EMISSION TEST

8.1. Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

8.2. EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The peripherals was placed on the side of the host system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host PC system was connected with 110Vac/60Hz power source.

8.3. Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until all frequency measured were complete.




Report No.: EF/2006/20016-04 Issue Date: Dec. 18, 2006


Page: 21

8.4. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1GHz

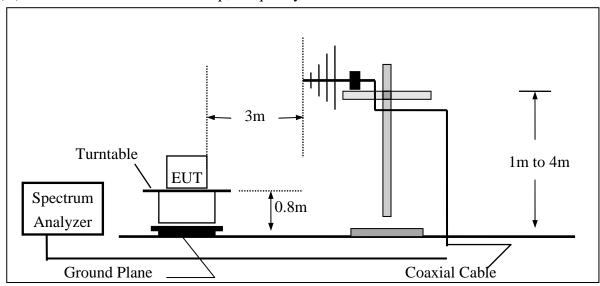

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

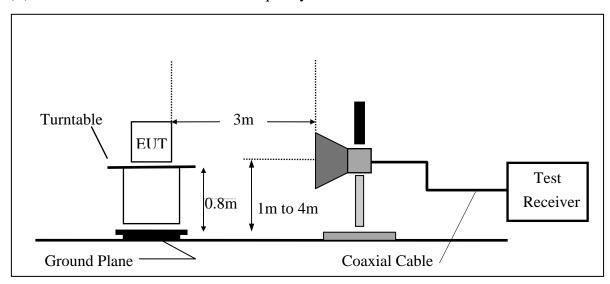



Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 22

8.5. **Measurement Equipment Used:**

966 Chamber							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2006	05/26/2007		
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2006	08/26/2007		
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2006	06/02/2007		
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2006	08/15/2007		
Horn antenna	Schwarzbeck	BBHA 9170	184/185	07/04/2006	07/03/2007		
Pre-Amplifier	HP	8447D	2944A09469	07/19/2006	07/18/2007		
Pre-Amplifier	HP	8494B	3008A00578	02/26/2006	02/25/2007		
Turn Table	HD	DT420	N/A	N.C.R	N.C.R		
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R		
Controller	HD	HD100	N/A	N.C.R	N.C.R		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2006	10/08/2007		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2006	10/08/2007		
Site NSA	SGS	966 chamber	N/A	11/17/2006	11/16/2007		

8.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)				
	RA = Reading Amplitude	AG = Amplifier Gain				
	AF = Antenna Factor					

8.7. Measurement Result


Refer to attach tabular data sheets.




Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 23

Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz

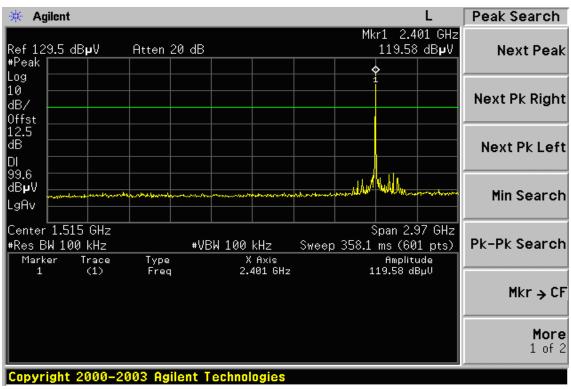

Ch Low 3GHz - 26.5GHz

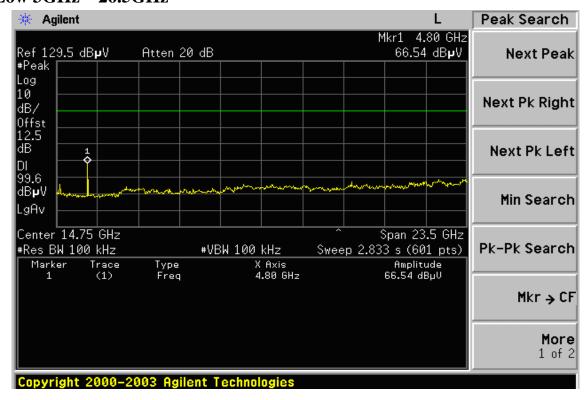





Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 24

Ch Mid 30MHz - 3GHz

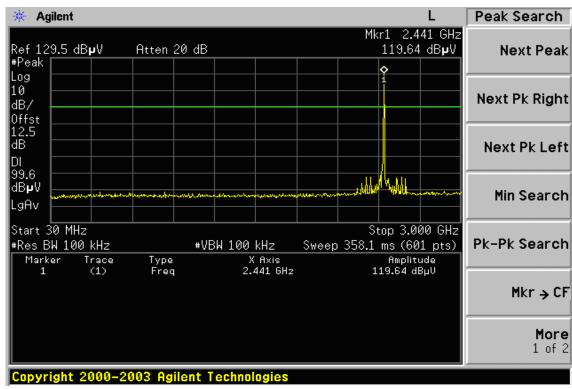

Ch Mid 3GHz – 26.5GHz

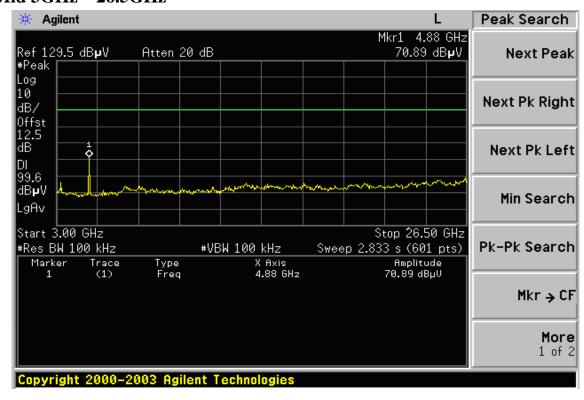




Report No.: EF/2006/20016-04 **Issue Date: Dec. 18, 2006**

Page: 25

Ch High 30MHz - 3GHz

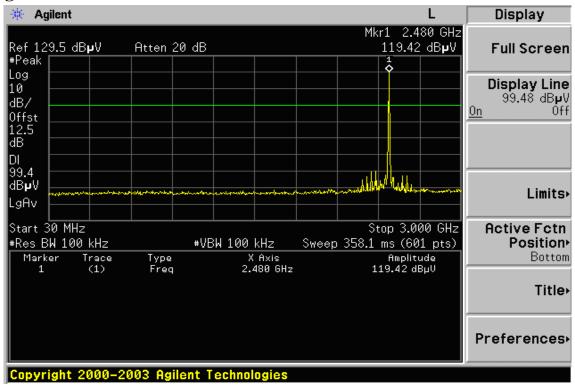

Ch High 3GHz - 26.5GHz

