



FCC Certification Test Report
for the
MEI
Cashflow RFID Reader Base

FCC ID: QP8EASITRAXB

WLL JOB# 9915
September 21, 2007

Prepared for:

MEI
1301 Wilson Drive
West Chester, PA 19380

Prepared By:

Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879


FCC Certification Test Report
For the
MEI
Cashflow RFID Reader Base

FCC ID: QP8EASITRAXRB


September 21, 2007

WLL JOB# 9915

Prepared by:


John P. Repella
EMC Engineer

Reviewed by:


Steven D. Koster
EMC Operations Manager

Abstract

This report has been prepared on behalf of MEI to support the attached Application for Equipment Authorization. The test report and application are submitted for an Intentional Radiator under Part 15.225 of the FCC Rules and Regulations. This Certification Test Report documents the test configuration and test results for a MEI Cashflow RFID Reader Base with easitrax™.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

The MEI Cashflow RFID Reader Base with easitrax™ complies with the limits for an Intentional Radiator device under FCC Part 15.225.

Table of Contents

Abstract..... ii

1 Introduction..... 1

 1.1 Compliance Statement 1

 1.2 Test Scope..... 1

 1.3 Contract Information..... 1

 1.4 Test Dates 1

 1.5 Test and Support Personnel 1

 1.6 Abbreviations..... 2

2 Equipment Under Test..... 3

 2.1 EUT Identification & Description 3

 2.2 Test Configuration 3

 2.3 Testing Algorithm..... 4

 2.4 Test Location 4

 2.5 Measurements 4

 2.5.1 References..... 4

 2.6 Measurement Uncertainty..... 5

3 Test Equipment 6

4 Test Results..... 7

 4.1 Occupied Bandwidth..... 7

 4.2 Radiated Spurious Emissions: §15.225, §15.209 9

 4.2.1 **Test Procedure** 9

 4.2.2 Test Results..... 10

 4.3 Frequency Stability: (FCC Part §2.1055) 12

 4.3.1 Test Procedure 12

 4.3.2 Test Results..... 12

 4.4 Conducted Emissions (AC Power Line)..... 14

List of Tables

Table 1. Device Summary..... 3

Table 2: Test Equipment List..... 6

Table 3: Occupied Bandwidth Results..... 8

Table 4: Radiated Spurious Emissions Limits..... 9

Table 5: Radiated Emission Test Data, Fundamental Frequency 10

Table 6: Radiated Emission Test Data..... 11

Table 7: Frequency Stability Test Data 13

Table 8: AC Power Conducted Emissions Test Data 14

List of Figures

Figure 1: Test Configuration..... 4

Figure 2. 20dB Occupied Bandwidth 7

Figure 3. 26dB Occupied Bandwidth 8

1 Introduction

1.1 Compliance Statement

The MEI Cashflow RFID Reader Base with easitrax™ complies with the limits for an Intentional Radiator device under FCC Part 15.225.

1.2 Test Scope

Tests for radiated and conducted emissions were performed. All measurements were performed in accordance with the 2003 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.3 Contract Information

Customer:	MEI 1301 Wilson Drive West Chester, PA 19380
Purchase Order Number:	4500056316
Quotation Number:	63687

1.4 Test Dates

Testing was performed on the following date(s): August 27-29, 2007

1.5 Test and Support Personnel

Washington Laboratories, LTD	John Repella
Client Representative	Bob Carney

1.6 Abbreviations

A	Ampere
ac	alternating current
AM	Amplitude Modulation
Amps	Amperes
b/s	bits per second
BW	Bandwidth
CE	Conducted Emission
cm	centimeter
CW	Continuous Wave
dB	decibel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for 10⁹ multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for 10³ multiplier
LISN	Line Impedance Stabilization Network
M	Mega - prefix for 10⁶ multiplier
m	meter
μ	micro - prefix for 10⁻⁶ multiplier
NB	Narrowband
QP	Quasi-Peak
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

2 Equipment Under Test

2.1 EUT Identification & Description

The MEI Cashflow RFID Reader Base is a companion to the Cashflow SC66 Series Bill Validator (FCC ID: QP8ESITRAX) cashbox with RF tag installed. When the cashbox becomes full it is removed from the SC66 for reconciliation. The cashbox is placed on the Cashflow RFID Reader Base and the reader base interrogates the RF tag located in the cashbox for a full accounting of the contents. The data is transferred from the tag via USB to a back end system for further processing.

Table 1. Device Summary

ITEM	DESCRIPTION
Manufacturer:	MEI
FCC ID:	QP8EASITRAXRB
Model:	Cashflow RFID Reader Base w/ easitrax™
FCC Rule Parts:	§15.225
Frequency Range:	13.56MHz
Maximum Output Power:	651.3 μV/m at 10 meters
Modulation:	None
Occupied Bandwidth:	1.27 kHz
Type of Information:	Data
Number of Channels:	1
Power Output Level	Fixed
Antenna Type	Internal PCB
Frequency Tolerance:	>±0.01% (±100 ppm)
Interface Cables:	Power
Power Source & Voltage:	5Vdc from 120Vac

2.2 Test Configuration

The Cashflow RFID Reader Base was configured for testing as indicated in the figure below.

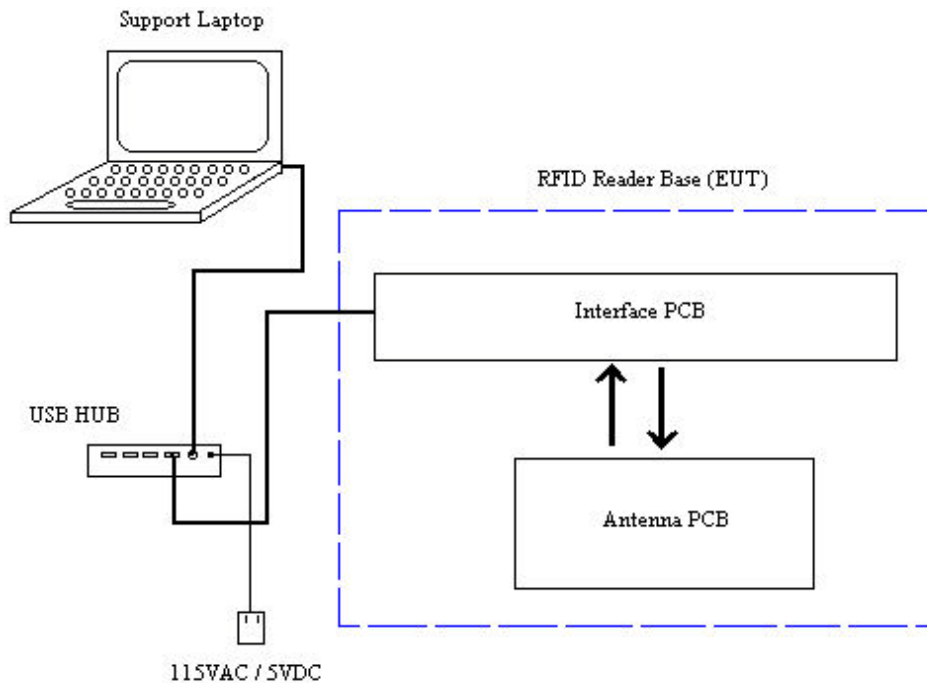


Figure 1: Test Configuration

2.3 Testing Algorithm

The Reader operates at 13.56MHz.

The Reader talks to the RF Tag on the lower side at 156 kHz modulation. This is Miller Encoded.

The RF tag responds to the Reader using the Manchester Protocol. The Tag does not emit; rather it shorts the Reader's field in a binary response.

Functionality:

The Reader checks for the presence of an RF tag in its field twice a second.

Worst case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is ± 2.3 dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2} / (n-1)$$

Where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, Total Uncertainty = $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$ dB.

3 Test Equipment

Table 2 shows a list of the test equipment used for measurements along with the calibration information.

Table 2: Test Equipment List

Test Name: RFFCC		Test Date: 08/27/2007	
Asset #	Manufacturer/Model	Description	Cal. Due
00069	HP, 85650A	ADAPTER, QP	07/06/2008
00073	HP, 8568B	ANALYZER, SPECTRUM	07/06/2008
00071	HP, 85685A	PRESELECTOR, RF	07/06/2008
00125	SOLAR, 8028-50-TS-24-BNC	LISN	02/01/2008
00126	SOLAR, 8028-50-TS-24-BNC	LISN	02/01/2008
00007	ARA, LPB-2520	ANTENNA, BICONILOG ANTENNA	06/07/2008
00254	TENNEY, TR64	BIG BLUE ENVIRONMENTAL CHAMBER	12/21/2007
00031	EMCO, 6502	ANTENNA, ACTIVE LOOP	2/12/2008
00067	HP, 8564E	ANALYZER, SPECTRUM	10/01/2007
00473	FLUKE, 111	MULTIMETER, TRUE RMS W/CURRENT CLAMP	07/25/2008
00317	HP, E4356A	SUPPLY, POWER, DC	Cal in Test
00476	TEKTRONIX, TDS220	OSCILLOSCOPE	08/02/2008
00594	TEKTRONIC, P6139A	PROBE	Cal in Test

4 Test Results

4.1 Occupied Bandwidth

Occupied bandwidth measurement was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The occupied bandwidth was measured as shown:

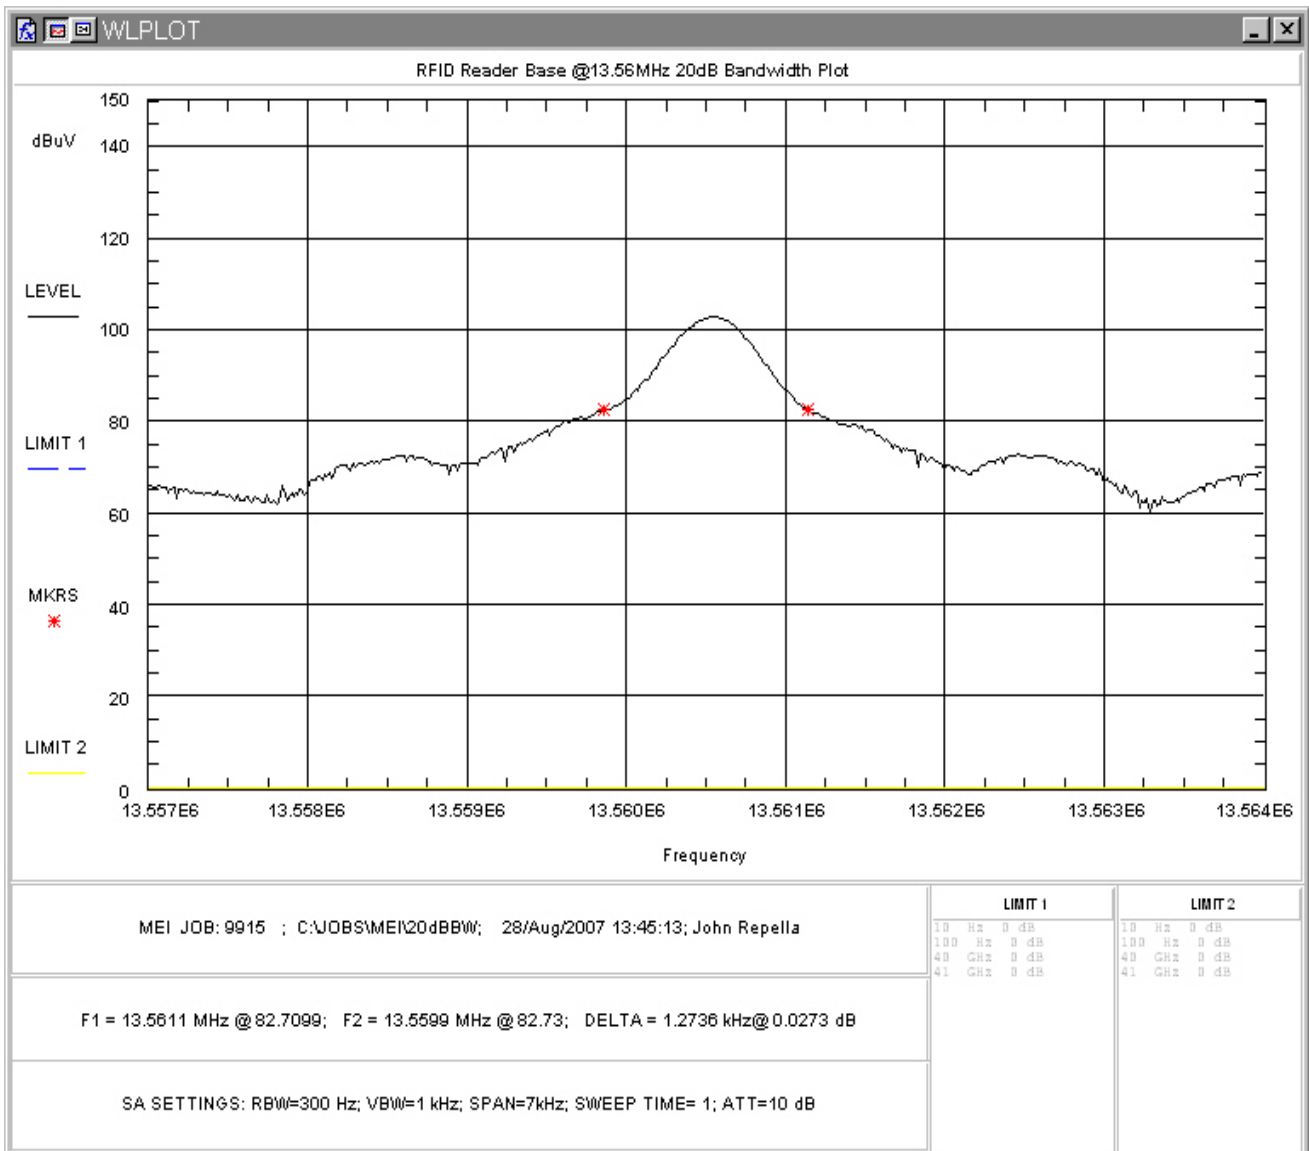


Figure 2. 20dB Occupied Bandwidth

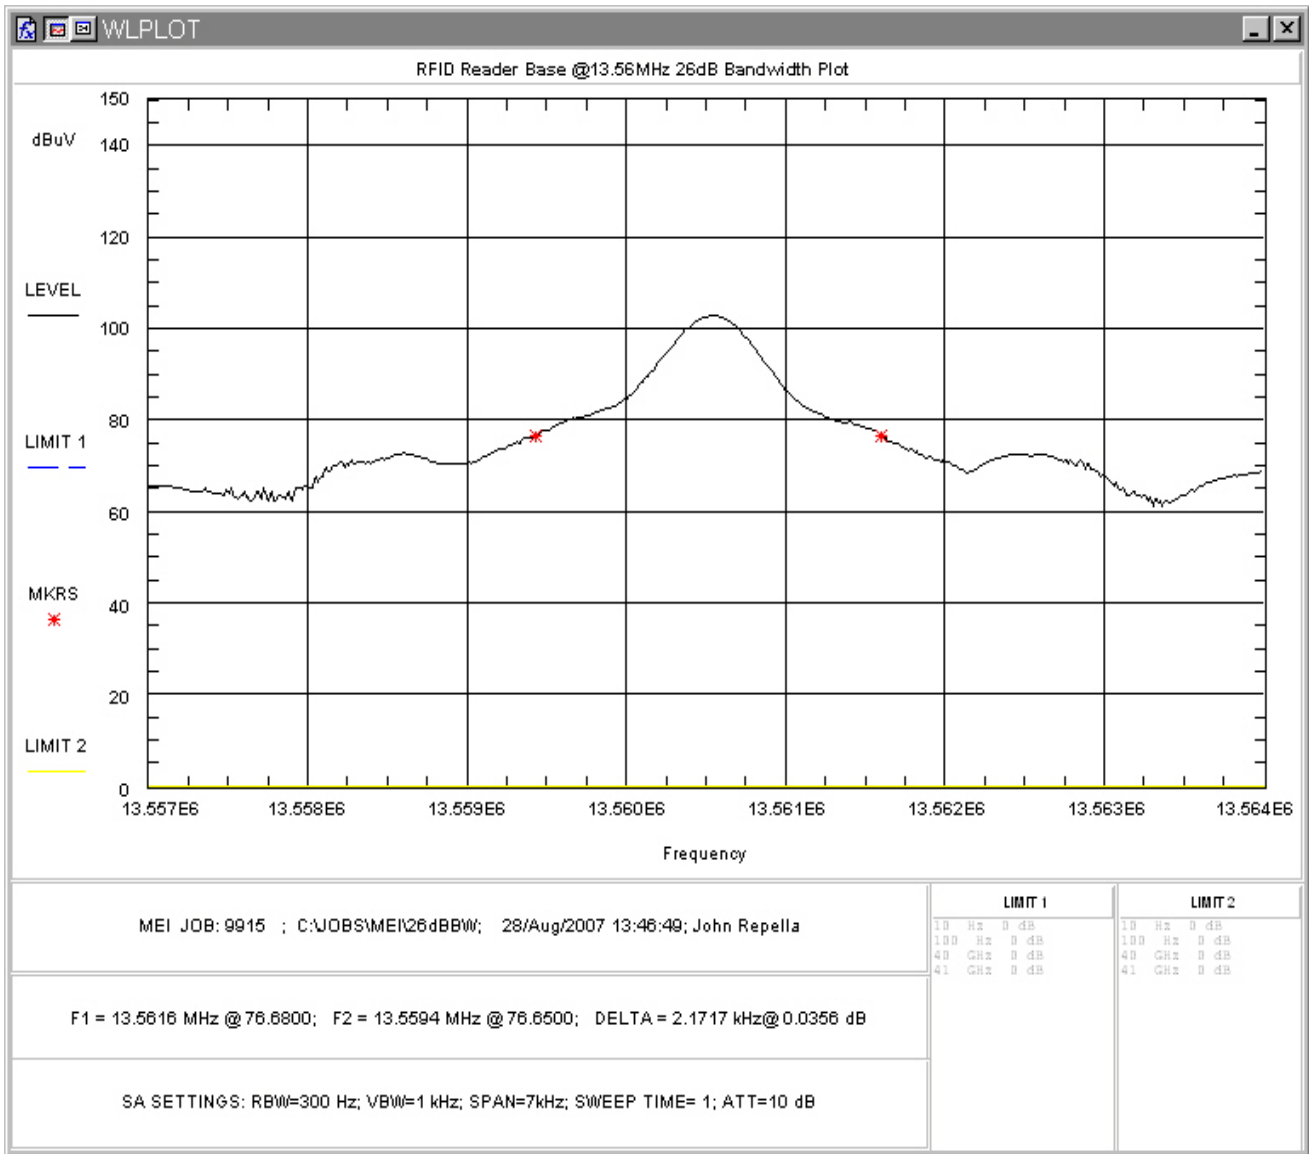


Figure 3. 26dB Occupied Bandwidth

Table 3 provides a summary of the Occupied Bandwidth Results.

Table 3: Occupied Bandwidth Results

Frequency	Bandwidth	Limit	Pass/Fail
13.560MHz	(20dB)1.273 kHz	N/A	Pass
13.560MHz	(26dB)2.171 kHz	N/A	Pass

4.2 Radiated Spurious Emissions: §15.225, §15.209

Radiated emissions from the EUT must comply with the field strength limits as specified in FCC Part 15.225 and 15.209. The limits for the radiated emissions are as shown in the following table.

Table 4: Radiated Spurious Emissions Limits

Frequency (MHz)	Limit ($\mu\text{V/m}$)	Rule Part Reference
13.553 - 13.567	15,848 (@ 30m)	§15.225(a)
13.410 – 13.553	334 (@ 30m)	§15.225(b)
13.567 – 13.710	334 (@ 30m)	§15.225(b)
13.110 – 13.410	106 (@ 30m)	§15.225(c)
13.710 – 14.010	106 (@ 30m)	§15.225(c)
1.705 – 13.110 14.010 – 30.0	30 (@ 30m)	§15.225(d), §15.209
30.00 – 88.00	100 (@ 3m)	§15.225(d), §15.209
88.00 – 216.00	150 (@ 3m)	§15.225(d), §15.209
216.00 – 960.00	200 (@ 3m)	§15.225(d), §15.209
Above 960	500 (@ 3m)	§15.225(d), §15.209

4.2.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on an Open Area Test Site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured

Testing at frequencies below 30 MHz was performed at ten meters with a loop antenna. The 30 meter limits were normalized to 10m. Three orientations of the loop antenna were tested.

Emissions were scanned up to 1 GHz. Only the fundamental frequency was detected. No other emissions were detected that were related to the RFID Transmitter. All other emissions detected were related to digital emissions of the IUS electronics. Since the EUT is used in a commercial application, these digital emissions were compared to the Class A limit of §15.109(b). For emissions up to 30 MHz peak levels were recorded. Emissions from 30 MHz to 1000 MHz were measured using a Quasi-peak detector. Worst-case emissions are reported in the data table.

The following is a sample calculation used in the data tables for calculating the final field strength of spurious emissions and comparing these levels to the specified limits.

Sample Calculation:

Spectrum Analyzer Voltage (SA Level): $VdB\mu V$
 Antenna Factor (Ant Corr): $AFdB/m$
 Cable Loss Correction (Cable Corr): $CCdB$
 Amplifier Gain: GdB (if applicable)
 Electric Field (Corr Level): $EdB\mu V/m = VdB\mu V + AFdB/m + CCdB - GdB$
 To convert to linear units: $E\mu V/m = \text{antilog}(EdB\mu V/m/20)$

4.2.2 Test Results

The EUT complies with the radiated emission requirements of §15.225.

Table 5: Radiated Emission Test Data, Fundamental Frequency

Freq (MHz)	Pol H/V	Az Deg	Ant. Ht (m)	SA Level (QP) (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin (dB)	Notes
13.561	X	90.0	1.0	42.20	10.5	1.1	53.8	488.4	142554.3	-49.3	X
13.561	X	90.0	1.0	44.70	10.5	1.1	56.3	651.3	142554.3	-46.8	Y
13.561	X	90.0	1.0	41.20	10.5	1.1	52.8	435.3	142554.3	-50.3	Z
13.561	Y	0.0	1.0	41.90	10.5	1.1	53.5	471.8	142554.3	-49.6	X
13.561	Y	180.0	1.0	39.80	10.5	1.1	51.4	370.5	142554.3	-51.7	Y
13.561	Y	0.0	1.0	39.40	10.5	1.1	51.0	353.8	142554.3	-52.1	Z
13.561	Z	0.0	1.0	32.90	10.5	1.1	44.5	167.4	142554.3	-58.6	X
13.561	Z	180.0	1.0	32.60	10.5	1.1	44.2	161.7	142554.3	-58.9	Y
13.561	Z	0.0	1.0	33.60	10.5	1.1	45.2	181.4	142554.3	-57.9	Z

Notes: 30m limit normalized to 10m
 0 degree azimuth; antenna height = one (1) meter

Table 6: Radiated Emission Test Data

Freq (MHz)	Pol H/V	Az Deg	Ant. Ht (m)	SA Level (QP) (dBµV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (dBµV/m)	Corr. Level (µV/m)	Limit (µV/m)	Margin (dB)
40.666	V	180.0	1.0	11.4	17.6	1.8	30.7	34.4	90.0	-8.3
135.580	V	180.0	1.0	19.00	10.3	3.2	32.5	42.4	150.0	-11.0
162.704	V	180.0	1.0	18.80	10.1	3.5	32.4	41.9	150.0	-11.1
176.270	V	0.0	1.0	13.40	9.8	3.7	26.9	22.2	150.0	-16.6
189.840	V	270.0	1.0	15.40	10.0	3.8	29.2	28.9	150.0	-14.3
203.393	V	180.0	1.0	23.40	10.9	3.9	38.2	81.4	150.0	-5.3
216.653	V	180.0	1.0	12.60	11.9	4.1	28.6	26.9	210.0	-17.8
230.513	V	180.0	1.0	17.90	12.7	4.3	34.9	55.4	210.0	-11.6
257.674	V	270.0	1.0	14.90	13.8	4.6	33.3	46.4	210.0	-13.1
284.756	V	180.0	1.0	10.70	14.7	4.9	30.2	32.5	210.0	-16.2
311.869	V	270.0	1.0	3.40	14.3	5.1	22.9	13.9	210.0	-23.6
433.913	V	270.0	1.0	4.50	16.2	6.1	26.8	21.9	210.0	-19.6
40.675	H	0.0	4.0	10.30	17.6	1.8	29.6	30.3	90.0	-9.4
122.035	H	180.0	4.0	13.50	11.6	3.0	28.2	25.6	150.0	-15.3
135.590	H	90.0	4.0	17.70	10.3	3.2	31.2	36.5	150.0	-12.3
149.155	H	180.0	4.0	23.40	9.2	3.4	35.9	62.7	150.0	-7.6
189.834	H	135.0	4.0	16.20	10.0	3.8	30.0	31.6	150.0	-13.5
203.403	H	270.0	4.0	22.70	10.9	3.9	37.5	75.1	150.0	-6.0
216.998	H	180.0	4.0	9.20	11.9	4.1	25.2	18.3	210.0	-21.2
230.561	H	90.0	4.0	13.00	12.7	4.3	30.0	31.5	210.0	-16.5
257.630	H	270.0	4.0	12.70	13.8	4.6	31.1	36.0	210.0	-15.3
284.804	H	180.0	4.0	11.20	14.7	4.9	30.7	34.5	210.0	-15.7
311.869	H	180.0	4.0	6.50	14.3	5.1	26.0	19.9	210.0	-20.5

Notes:

Clocks: Fundamental Frequency 13.56MHz, 42 MHz

4.3 Frequency Stability: (FCC Part §2.1055)

Frequency as a function of temperature and voltage variation shall be maintained within the FCC-prescribed tolerances. Per §15.225(e) the frequency tolerance shall be maintained within $\pm 0.01\%$ of the reference frequency.

4.3.1 Test Procedure

The temperature stability was measured with the unit in an environmental chamber used to vary the temperature of the sample. The sample was held at each temperature step to allow the temperature of the sample to stabilize.

The frequency stability of the transmitter was examined at the voltage extremes and for the temperature range of -30°C to $+50^{\circ}\text{C}$. The carrier frequency was measured while the EUT was in the temperature chamber. The reference frequency of the EUT was measured at the ambient room temperature with the frequency counter.

The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range.

The RF carrier frequency shall not depart from the reference frequency (reference frequency is the frequency at 20°C and rated supply voltage) in excess of ± 1356 Hz.

The EUT is powered by 5Vdc voltage supplied via an external DC power supply.

4.3.2 Test Results

The EUT complies with the temperature stability requirements of FCC §15.225(e). Test results are given in Table 7.

Table 7: Frequency Stability Test Data

Temperature (Centigrade)	Frequency (MHz)	Difference (Hz)	Deviation (%)
Ambient (25.3)	13.560502	0.0	0
-30	13.560558	56.0	0.000413
-20	13.560551	49.0	0.000361
-10	13.560548	46.0	0.000339
0	13.560559	57.0	0.000420
10	13.560633	131.0	0.000966
20	13.560582	80.0	0.000590
30	13.560518	16.0	0.000118
40	13.560490	-12.0	0.000088
50	13.560485	-17.0	0.000125

Voltage (Volts)	Frequency (MHz)	Difference (Hz)	Deviation (%)	Voltage (Volts)
At rated	13.560503	0	0.0	5VDC
At 85%	13.560480	-23.0	0.000170	4.25VDC
At 115%	13.560517	14.0	0.000103	5.75VDC

4.4 Conducted Emissions (AC Power Line)

The EUT was placed on an 80 cm high 1 x 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50 Ω/50 μH Line Impedance Stabilization Network bonded to a 3 x 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power and data cables were moved about to obtain maximum emissions.

The 50 Ω output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak or peak, as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth.

The unit was tested with the antenna terminated.

AC Power Line conducted emissions test data are included in Table 8.

Table 8: AC Power Conducted Emissions Test Data

LINE 1 - NEUTRAL

Frequency (MHz)	Level QP (dBμV)	Cable Loss (dB)	LISN Corr (dB)	Limit QP (dBμV)	Level Corr (dBμV)	Margin QP (dB)	Level AVG (dBμV)	Cable Loss (dB)	Level Corr (dBμV)	Limit AVG (dBμV)	Margin AVG (dB)
0.169	45.3	10.1	0.7	65.0	56.1	-8.9	43.2	10.1	54.0	55.0	-1.0
0.341	31.5	10.2	0.3	59.2	42.1	-17.1	31.1	10.2	41.7	49.2	-7.5
0.514	19.8	10.3	0.3	56.0	30.4	-25.6	17.6	10.3	28.2	46.0	-17.8
1.022	21.7	10.5	0.2	56.0	32.5	-23.5	18.9	10.5	29.6	46.0	-16.4
2.390	22.8	10.5	0.5	56.0	33.8	-22.2	16.7	10.5	27.7	46.0	-18.3
4.116	17.2	10.5	0.7	56.0	28.5	-27.5	10.8	10.5	22.1	46.0	-23.9

LINE 2 - PHASE

Frequency (MHz)	Level QP (dBμV)	Cable Loss (dB)	LISN Corr (dB)	Limit QP (dBμV)	Level Corr (dBμV)	Margin QP (dB)	Level AVG (dBμV)	Cable Loss (dB)	Level Corr (dBμV)	Limit AVG (dBμV)	Margin AVG (dB)
0.170	49.7	10.1	0.3	65.0	60.2	-4.8	43.3	10.1	53.7	55.0	-1.2
0.345	35.6	10.2	0.2	59.1	46.0	-13.0	33.0	10.2	43.4	49.1	-5.6
0.514	24.2	10.3	0.2	56.0	34.7	-21.3	21.1	10.3	31.6	46.0	-14.4
1.027	25.3	10.5	0.2	56.0	36.0	-20.0	15.7	10.5	26.4	46.0	-19.6
2.406	23.4	10.5	0.6	56.0	34.5	-21.5	14.7	10.5	25.8	46.0	-20.2
4.116	20.5	10.5	1.0	56.0	32.0	-24.0	8.9	10.5	20.4	46.0	-25.6