

# EMC TEST REPORT

<b>Applicant</b>	MobiWire SAS
<b>FCC ID</b>	QPN-F4
<b>Product</b>	4G Feature Phone
<b>Brand</b>	altice; MobiWire
<b>Model</b>	altice F4; MobiWire Hinto lite
<b>Report No.</b>	R2404A0414-E1
<b>Issue Date</b>	April 22, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2023)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Prepared by: Liu Wei*

*Approved by: Fan Guangchang*

**Eurofins TA Technology (Shanghai) Co., Ltd.**

*Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*

## Table of Contents

1	Test Laboratory .....	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test .....	5
2.1	Applicant and Manufacturer Information .....	5
2.2	General Information .....	5
2.3	Applied Standards .....	7
2.4	Test Mode .....	8
3	Test Case Results .....	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	16
4	Uncertainty Measurement.....	19
5	Main Test Instruments.....	20
	ANNEX A: The EUT Appearance .....	21
	ANNEX B: Test Setup Photos .....	22
	ANNEX C: Product Change Description .....	23

### Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: (Original) May 9, 2022 ~ May 22, 2022 (Variant) April 16, 2024 ~ April 17, 2024 Date of Sample Received: (Original) May 6, 2022 (Variant) April 3, 2024			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

altice F4; MobiWire Hinto lite (Report No.: R2404A0414-E1; FCC ID: QPN-F4) is a variant model of altice F4; Sagetel Hinto lite (Report No.: R2205A0384-E1; FCC ID: 2AT2L-HINTO-LITE).

**ACCESSORY MODIFICATIONS:**

Battery changes: Yes, changed from 800 mAh to 1000mAh.

Tested case refers to the following table.

Test case	Original	Variant
Radiated Emission	Pass	Only tested with worst mode of Original
Conducted Emission	Pass	/

The detailed product change description please refers to the *Difference Declaration Letter*.

## 1 Test Laboratory

### 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2 Test Facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Fan Guangchang  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <https://www.eurofins.com/electrical-and-electronics>  
E-mail: Jack.Fan@cpt.eurofinscn.com

## 2 General Description of Equipment Under Test

### 2.1 Applicant and Manufacturer Information

<b>Applicant</b>	MobiWire SAS
<b>Applicant address</b>	107 Boulevard de la Mission Marchand 92400 Courbevoie FRANCE
<b>Manufacturer</b>	MobiWire SAS
<b>Manufacturer address</b>	107 Boulevard de la Mission Marchand 92400 Courbevoie FRANCE

### 2.2 General Information

EUT Description			
Device Type	Portable Device		
Model	altice F4; MobiWire Hinto lite		
IMEI	Original: 352847500227382 Variant: 351726810516182		
HW Version	V01E		
SW Version	ALTICE_GX2421L_SS_L_V01_FCC_220428		
Power Rating	DC 3.7V from battery or DC 5V from Adapter.		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	PIFA Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	GSM 1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 5	824 ~ 849	869 ~ 894
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5
EUT Accessory			
Adapter	Manufacturer: DongGuan AoHai Power Technology Co.Ltd. Model: A31A-050055U-US1 Input: 100-240V~50/60Hz 0.2A Output: 5.0V ---550mAh		
Battery	Manufacturer: Shenzhen Aerospace Electronic.Co.Ltd Model: 178136112		

	DC 3.7V, 1000mAh, 3.7Wh
Earphone	Manufacturer: Baoshan Dahuahaihan Technology Co.,Ltd. Model: 3.5_black_stereophony without mic_HTC
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. The customer claims that altice F4 and MobiWire Hinto lite are only different in model, and the others are the same.	

## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B (2023)**

**ANSI C63.4-2014**

## 2.4 Test Mode

Test Mode	
Mode 1	Adapter +EUT+ Rear camera +EARPHONR+ GSM/WCDMA/LTE/ Bluetooth receiver
Mode 2	Adapter +EUT+ Rear camera + EARPHONR+GSM/WCDMA/LTE/ Bluetooth Traffic
Mode 3	Adapter +EUT+ FM + EARPHONR+GSM/WCDMA/LTE/ Bluetooth receiver
Mode 4	Adapter +EUT+ FM + EARPHONR+GSM/WCDMA/LTE / Bluetooth Traffic
Mode 5	Adapter +EUT+ PLAY MUSIC + EARPHONR+GSM/WCDMA/LTE/ Bluetooth receiver
Mode 6	Adapter +EUT+ PLAY MUSIC + EARPHONR+GSM/WCDMA/LTE/ Bluetooth Traffic

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1, 2, 3, 4, 5, 6	Mode 1
Conducted Emission	Mode 1, 2, 3, 4, 5, 6	Mode 1
During the test, the preliminary test was performed in all modes, the test data of the worst-case condition was recorded in this report.		



### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

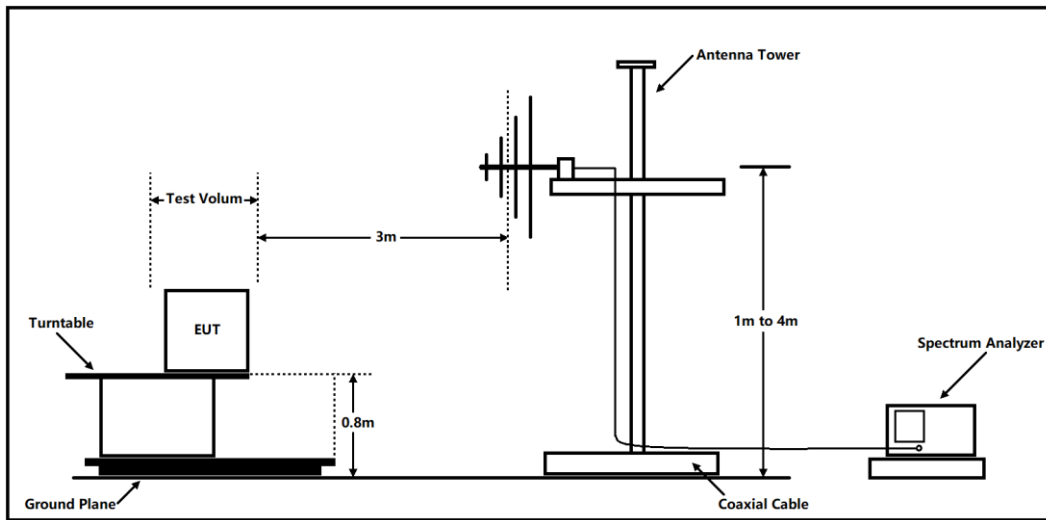

Above 1GHz

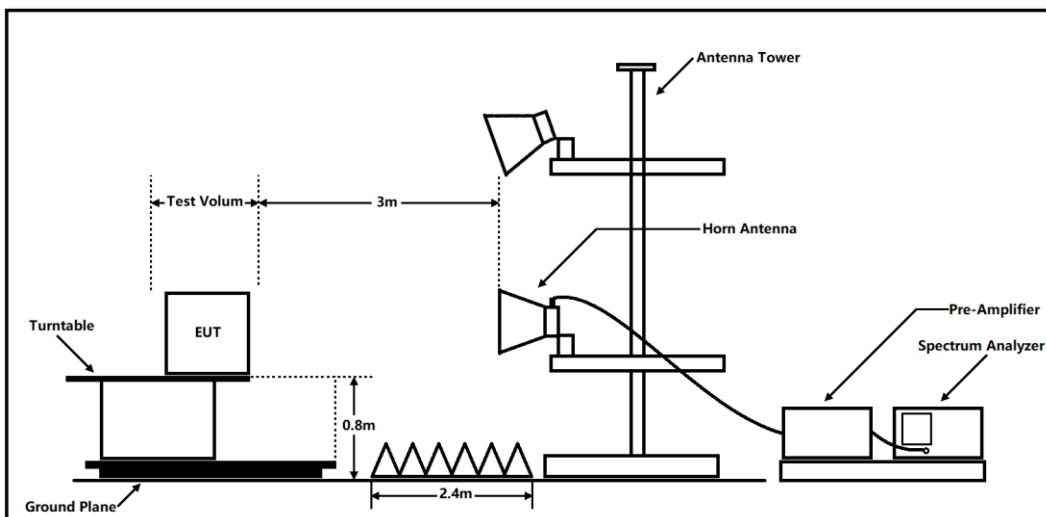

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**
**Class B**

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

**Frequency range of radiated measurements**

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.


**Test Results**

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.  
 For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.  
 A symbol ( dB<sub>μV/m</sub> ) in the test plot below means (dB<sub>μV/m</sub>)

**Original**

**Mode 1 is the worst case**

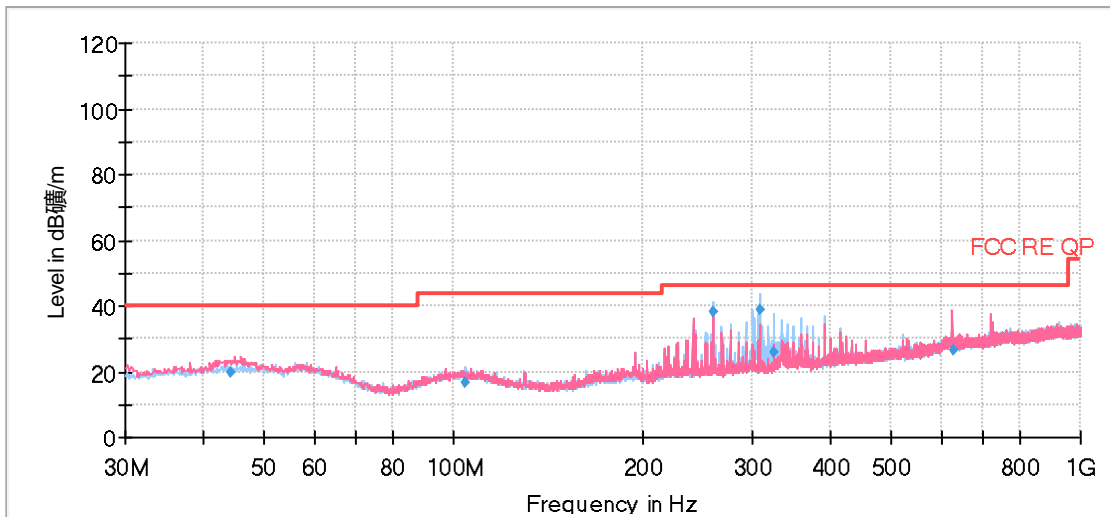


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB <sub>μV/m</sub> )	Limit (dB <sub>μV/m</sub> )	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
44.27	19.73	40.00	20.27	1000.00	125.0	V	77.00	14
104.53	16.51	43.50	26.99	1000.00	111.0	H	100.00	13
260.01	37.93	46.00	8.07	1000.00	125.0	H	101.00	14
308.59	38.56	46.00	7.44	1000.00	100.0	H	317.00	15
325.08	26.00	46.00	20.00	1000.00	105.0	H	279.00	16
625.70	26.50	46.00	19.50	1000.00	125.0	V	284.00	22

**Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)**

**2. Margin = Limit – Quasi-Peak**

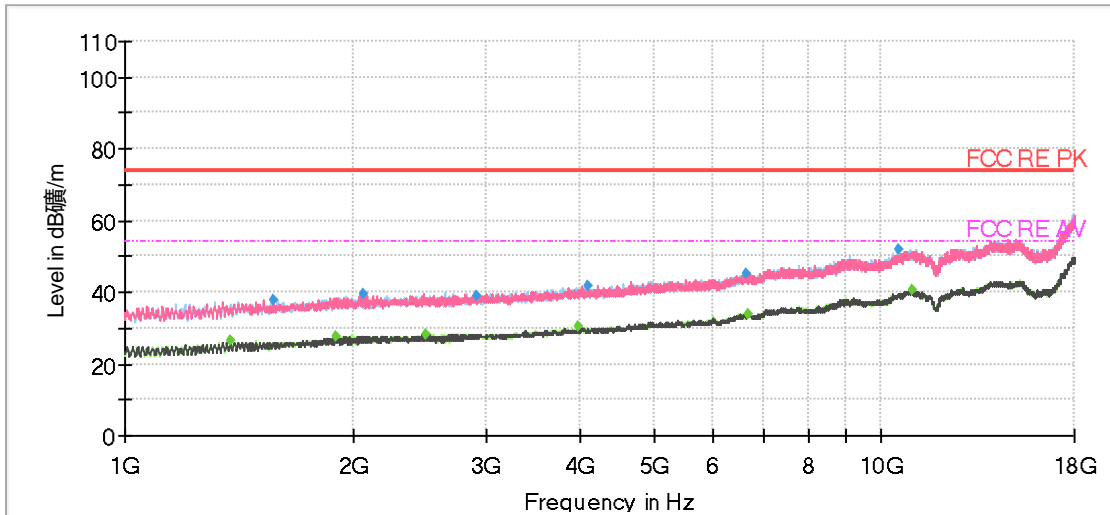


Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1378.25	---	26.25	54.00	27.75	500.00	200.0	V	0.00	-17
1569.50	37.94	---	74.00	36.06	500.00	200.0	V	0.00	-17
1896.75	---	27.43	54.00	26.57	500.00	200.0	V	17.00	-15
2060.38	39.71	---	74.00	34.29	500.00	200.0	H	206.00	-15
2498.13	---	28.28	54.00	25.72	500.00	200.0	V	278.00	-14
2921.00	38.97	---	74.00	35.03	500.00	100.0	V	357.00	-13
3962.25	---	30.25	54.00	23.75	500.00	200.0	V	6.00	-11
4091.88	41.93	---	74.00	32.07	500.00	200.0	V	138.00	-11
6612.13	45.21	---	74.00	28.79	500.00	100.0	V	240.00	-4
6675.88	---	33.94	54.00	20.06	500.00	100.0	H	187.00	-4
10562.50	52.02	---	74.00	21.98	500.00	200.0	H	104.00	0
10955.63	---	40.72	54.00	13.28	500.00	100.0	H	159.00	0

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Peak Margin = Limit - MAX Peak/ Average

Variant

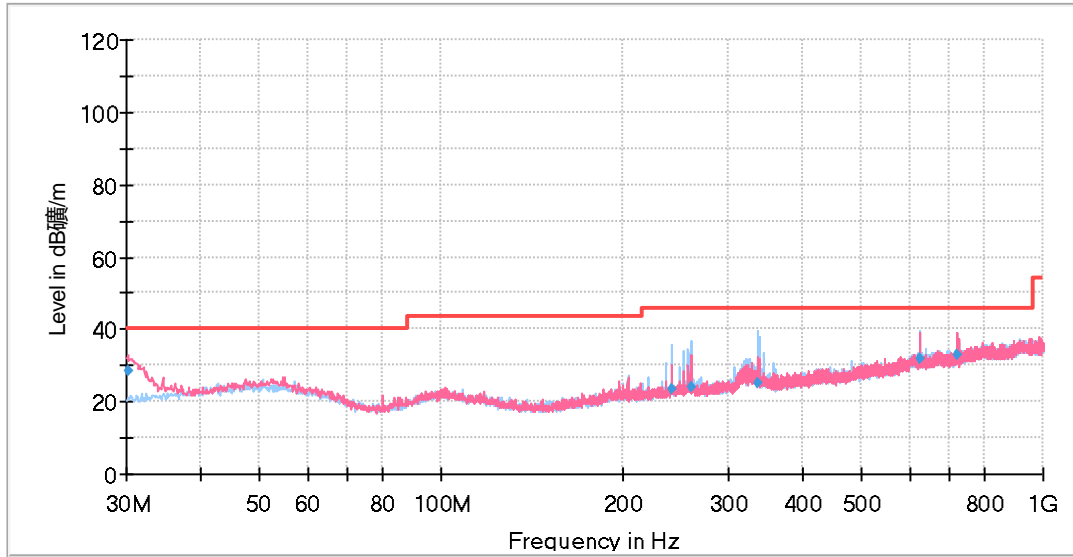


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
30.16	28.27	40.00	11.73	111.0	V	18.00	17
241.46	23.47	46.00	22.53	125.0	H	252.00	20
260.09	23.97	46.00	22.03	105.0	H	338.00	20
335.10	25.27	46.00	20.73	100.0	H	74.00	22
625.10	32.04	46.00	13.96	125.0	H	136.00	27
718.46	32.98	46.00	13.02	100.0	H	186.00	28

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss)

2. Margin = Limit – Quasi-Peak

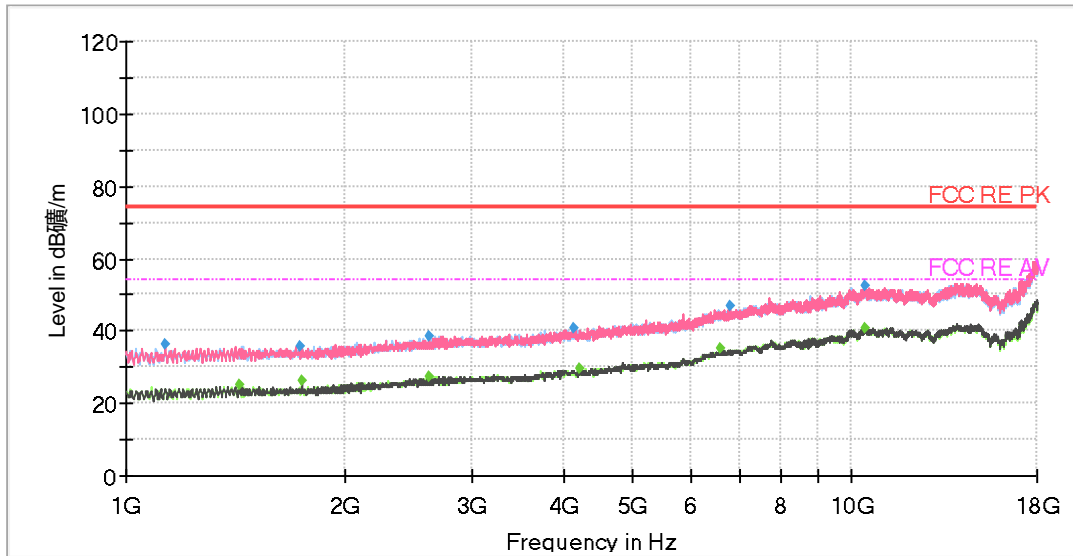

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1131.75	36.13	---	74.00	37.87	500.00	100.0	V	293.00	-22
1431.38	---	25.04	54.00	28.96	500.00	100.0	V	302.00	-20
1733.13	35.81	---	74.00	38.19	500.00	200.0	V	280.00	-20
1745.88	---	26.08	54.00	27.92	500.00	100.0	V	0.00	-20
2610.75	38.40	---	74.00	35.60	500.00	100.0	V	358.00	-17
2610.75	---	27.32	54.00	26.68	500.00	100.0	H	128.00	-17
4134.38	40.71	---	74.00	33.29	500.00	200.0	H	359.00	-13
4221.50	---	29.39	54.00	24.61	500.00	100.0	V	351.00	-13
6610.00	---	34.91	54.00	19.09	500.00	200.0	H	312.00	-5
6811.88	46.83	---	74.00	27.17	500.00	100.0	V	328.00	-5
10424.38	---	40.92	54.00	13.08	500.00	100.0	V	164.00	0
10428.63	52.30	---	74.00	21.70	500.00	100.0	H	2.00	0

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Peak Margin = Limit -MAX Peak/ Average

### 3.2 Conducted Emission


#### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

#### Test Setup

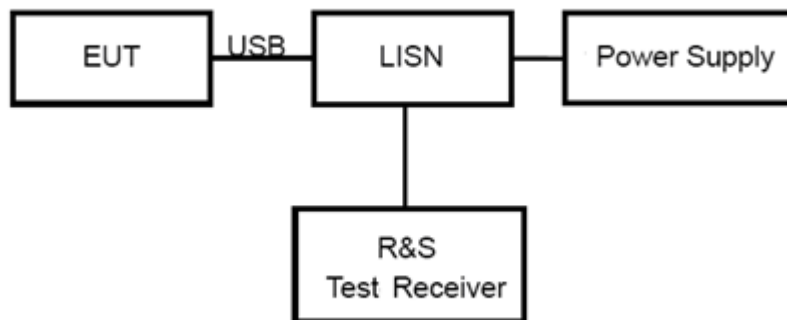

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

#### Limits

Frequency (MHz)	Class A (dBµV)		Class B (dBµV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50

\*: Decreases with the logarithm of the frequency.


Note: The EUT should meet CLASS B limit.



**Test Results**

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

**Mode 1 is the worst case**

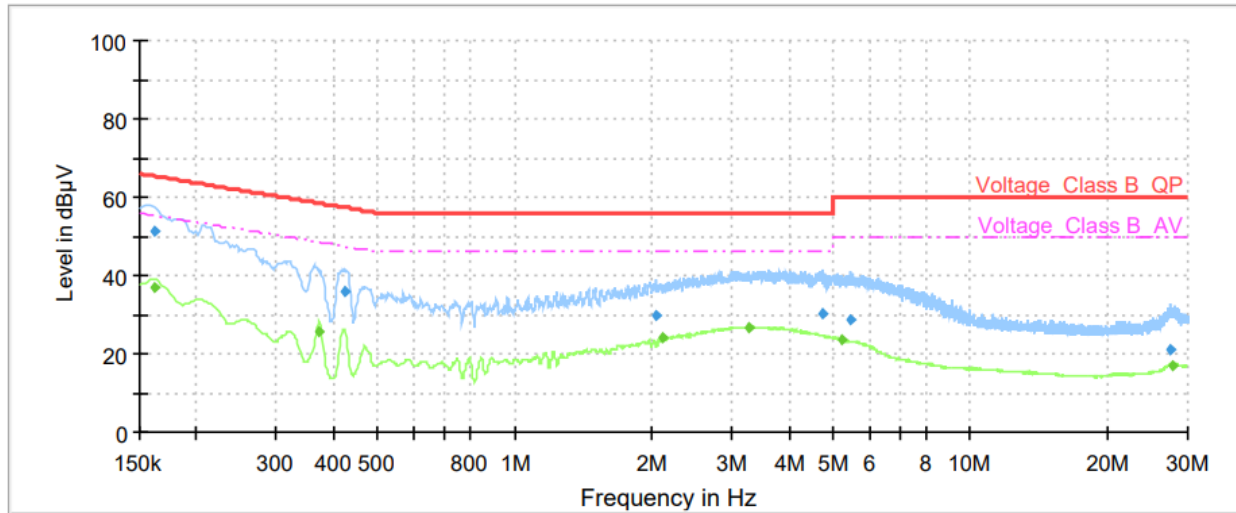


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	---	36.85	55.40	18.55	1000.00	9.000	L1	ON	21
0.16	51.47	---	65.40	13.93	1000.00	9.000	L1	ON	21
0.37	---	25.82	48.44	22.62	1000.00	9.000	L1	ON	21
0.42	35.89	---	57.36	21.47	1000.00	9.000	L1	ON	20
2.04	29.52	---	56.00	26.48	1000.00	9.000	L1	ON	20
2.12	---	23.89	46.00	22.11	1000.00	9.000	L1	ON	20
3.27	---	26.60	46.00	19.40	1000.00	9.000	L1	ON	19
4.72	30.42	---	56.00	25.58	1000.00	9.000	L1	ON	19
5.20	---	23.42	50.00	26.58	1000.00	9.000	L1	ON	19
5.46	28.71	---	60.00	31.29	1000.00	9.000	L1	ON	19
27.50	20.85	---	60.00	39.15	1000.00	9.000	L1	ON	20
27.91	---	16.93	50.00	33.07	1000.00	9.000	L1	ON	20

**Remark: Correct factor=cable loss + LISN factor**

L line

Conducted Emission from 150 kHz to 30 MHz

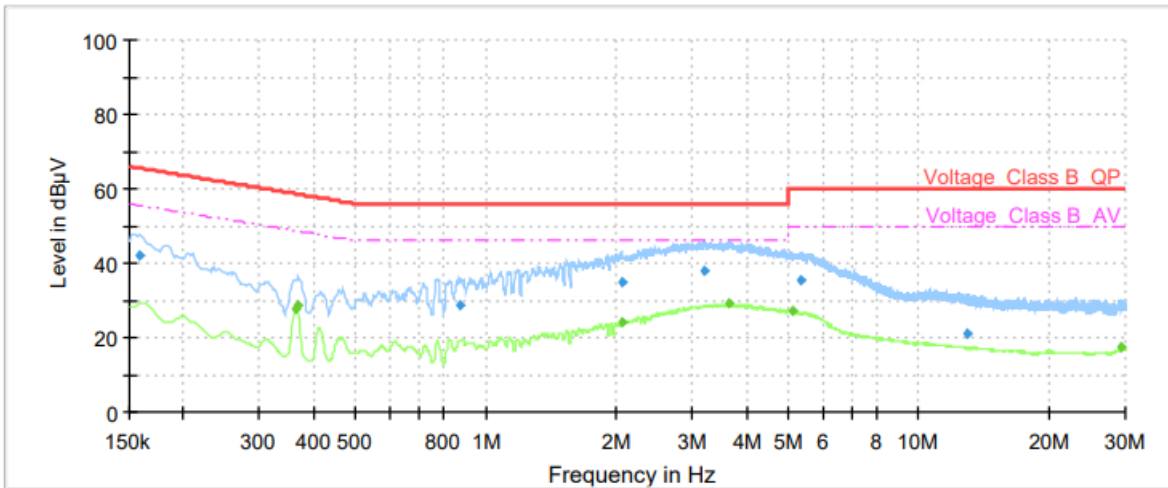

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	42.20	---	65.52	23.32	1000.00	9.000	N	ON	21
0.36	---	27.72	48.69	20.97	1000.00	9.000	N	ON	21
0.37	---	28.77	48.59	19.82	1000.00	9.000	N	ON	21
0.87	28.55	---	56.00	27.45	1000.00	9.000	N	ON	20
2.05	34.90	---	56.00	21.10	1000.00	9.000	N	ON	20
2.06	---	24.30	46.00	21.70	1000.00	9.000	N	ON	20
3.18	38.13	---	56.00	17.87	1000.00	9.000	N	ON	19
3.64	---	29.10	46.00	16.90	1000.00	9.000	N	ON	19
5.13	---	26.99	50.00	23.01	1000.00	9.000	N	ON	19
5.34	35.28	---	60.00	24.72	1000.00	9.000	N	ON	19
12.98	21.05	---	60.00	38.95	1000.00	9.000	N	ON	20
29.24	---	17.37	50.00	32.63	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 kHz to 30 MHz

## 4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Conducted Emission	2.57 dB	2

## 5 Main Test Instruments

Date of Testing: May 9, 2022 ~ May 22, 2022

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI7	100936	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV30	103591	2021-12-12	2022-12-11
TRILOG Broadband Antenna	SCHWARZBECK	9163	1023	2021-06-07	2024-06-06
Horn Antenna	Schwarzbeck	BBHA 9120D	430	2019-12-16	2022-12-15
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	101171	2020-12-13	2022-12-12
EMI Test Receiver	R&S	ESR	101667	2021-06-04	2022-06-03
Software	R&S	EMC32	10.35.10	/	/

Date of Testing: April 16, 2024 ~ April 17, 2024

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2023-05-12	2024-05-11
Signal Analyzer	R&S	FSV40	101298	2023-05-12	2024-05-11
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2021-07-26	2024-07-25
Amplifier	MWPA.CN	MWLA-010200G 40	YQ2103039B0 1	2023-05-12	2024-05-11
Software	R&S	EMC32	9.26.01	/	/

## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

## ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

## ANNEX C: Product Change Description

The Product Change Description are submitted separately.

\*\*\*\*\* END OF REPORT \*\*\*\*\*