


2-3. VSWR ,Efficiency ,Matching and Active Data :

2-3.1 VSWR:

Frequency Band	1575.42	2400	2500	
2-3-1. Typical Value:	≤ 2	≤ 3	≤ 3.5	

2-3-2 Measuring Method	<ol style="list-style-type: none"> 1. A 50 Ω coaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.
------------------------	--

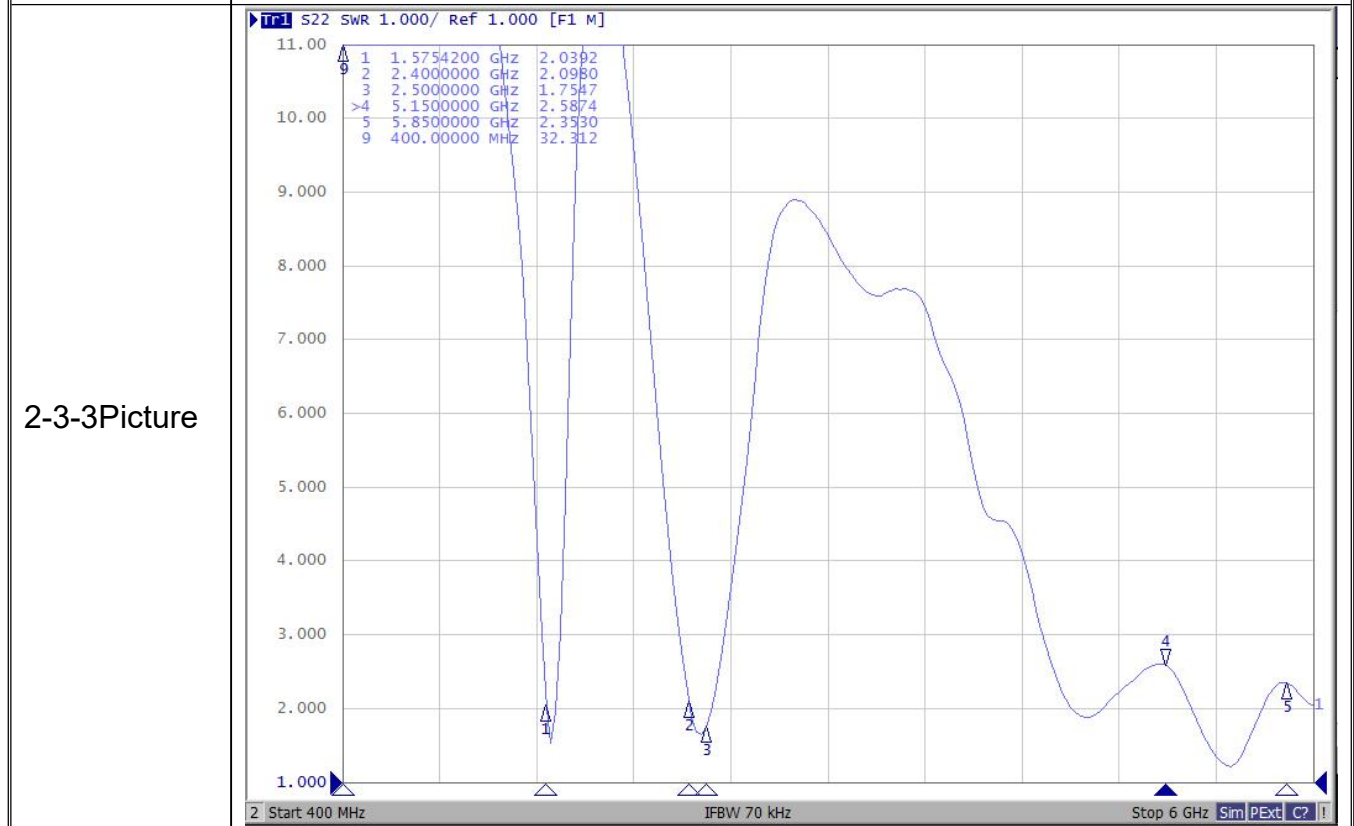

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

SCALE: UNIT: mm

DRAWN BY: 黄土勇 CHECKED BY: 肖坤雄

DESIGNED BY: 苏汉鹏 APPROVED BY: 王伟

TITLE: GH6511-GPS-ANT-V2.0Specification



深圳市可信华成通信科技有限公司
SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.


PAGE REV.
A0

2-4. Measure and Chamber

2-4-1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

2-4-2 Chamber definition

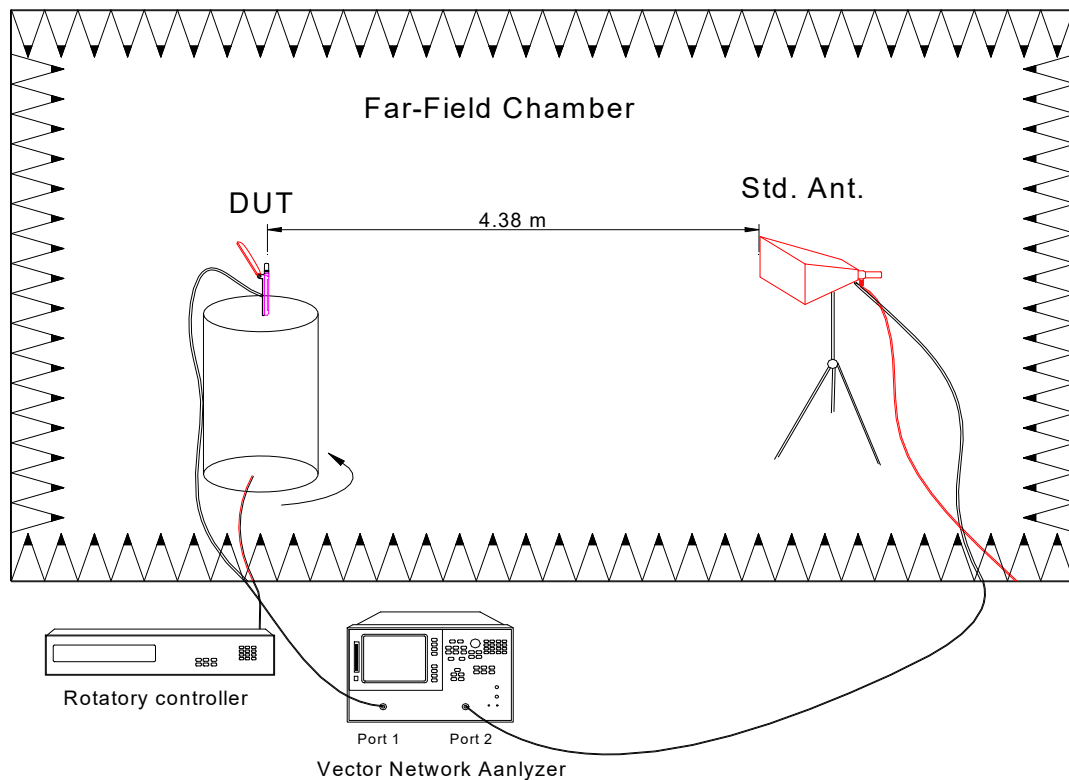

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

SCALE: UNIT: mm

DRAWN BY: 黄土勇 CHECKED BY: 肖坤雄

DESIGNED BY: 苏汉鹏 APPROVED BY: 王伟

TITLE: GH6511-GPS-ANT-V2.0Specification



深圳市可信华成通信科技有限公司
SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

PAGE REV.
A0

2-4-3 TRP/TIS

			SPEC	测试值	GAP
802.11 b	TRP	1	12.5	12.16	-0.34
		6	12.5	13.03	0.53
		13	12.5	14.16	1.66
	TIS	1			
		6			
		13		-80.16	
5GHz 802.11a TRP(6M)/TIS(54M)	TRP	36	8.5	8.55	
		64	8.5	9.24	
		165	8.5	8.2	
	TIS	36			
		64			
		165			
GPS	SPEC		测试值	GAP	
TIS	-143		-142.55	-0.45	

2-4-4 Antenna Efficiency

Frequency (MHz)	Peak Gain (dB)
5150	-3.27
5200	-3.03
5250	-3.59
5300	-3.11
5350	-3.98
5400	-3.79
5450	-3.50
5500	-3.52
5550	-3.96
5600	-3.81
5650	-3.88
5700	-3.94
5750	-3.87
5800	-3.80
5850	-4.51

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

SCALE:

UNIT: mm

DRAWN BY: 黄土勇

CHECKED BY: 肖坤雄

DESIGNED BY: 苏汉鹏

APPROVED BY: 王伟

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: GH6511-GPS-ANT-V2.0Specification

DOCUMENT NO.

PAGE REV.
A0

Frequency (MHz)	Peak Gain (dB)
1570	-2.71
1571	-2.72
1572	-2.73
1573	-2.75
1574	-2.77
1575	-2.77
1575.42	-2.77
1576	-2.77
1577	-2.78
1578	-2.77
1579	-2.76
1580	-2.74
2400	-3.26
2410	-2.05
2420	-2.15
2430	-2.13
2440	-2.00
2450	-2.50
2460	-2.00
2470	-2.00
2480	-2.00
2490	-2.01
2500	-2.01

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

SCALE:

UNIT: mm

DRAWN BY: 黄土勇

CHECKED BY: 肖坤雄

DESIGNED BY: 苏汉鹏

APPROVED BY: 王伟


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: GH6511-GPS-ANT-V2.0Specification


DOCUMENT NO.

PAGE REV.
A0

3. Antenna Dimensions:

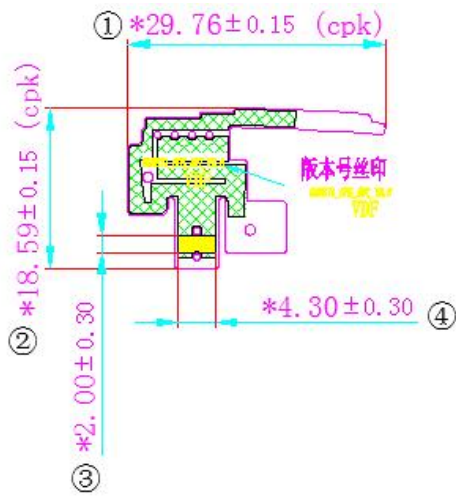

正面 (走线面)

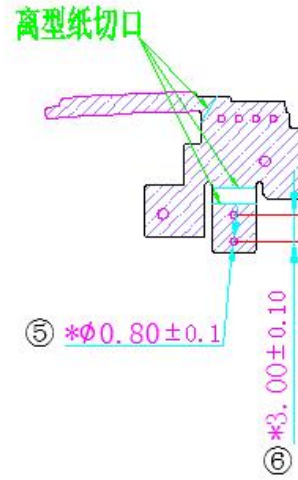

反面 (背胶面)

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE:

UNIT: mm

DRAWN BY: 黄土勇

CHECKED BY: 肖坤雄

DESIGNED BY: 苏汉鹏

APPROVED BY: 王伟

TITLE: GH6511-GPS-ANT-V2.0Specification



深圳市可信华成通信科技有限公司
SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

PAGE REV.
A0