

Date: 3/27/2020

## P01 GSM850\_GPRS12\_Left Cheek\_Ch128

### DUT: EUT

Communication System: GPRS12; Frequency: 824.2 MHz; Duty Cycle: 1:2  
Medium: H835 Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.921 \text{ S/m}$ ;  $\epsilon_r = 41.252$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(10.23, 10.23, 10.23) @ 824.2 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186


**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.433 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 7.061 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.468 W/kg

**SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.282 W/kg**

Maximum value of SAR (measured) = 0.437 W/kg

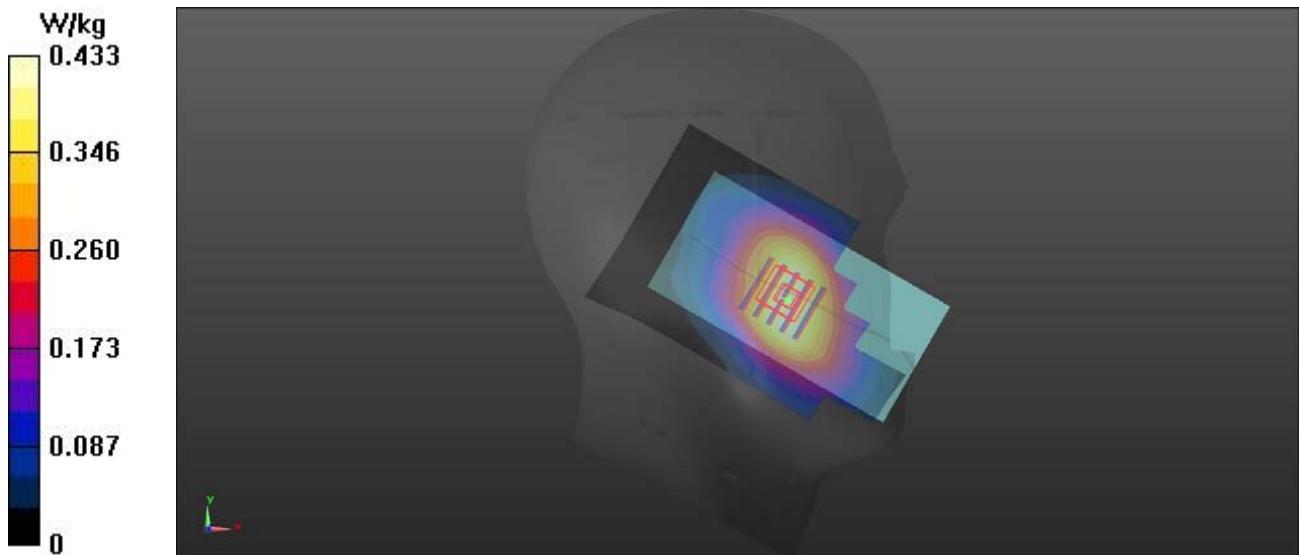

Date: 3/28/2020

## P02 GSM1900\_GPRS12\_Left Cheek\_Ch661

### DUT: EUT


Communication System: GPRS12; Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium: H1900 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.444 \text{ S/m}$ ;  $\epsilon_r = 39.278$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1880 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.501 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 5.830 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 0.561 W/kg  
**SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.209 W/kg**  
Maximum value of SAR (measured) = 0.473 W/kg

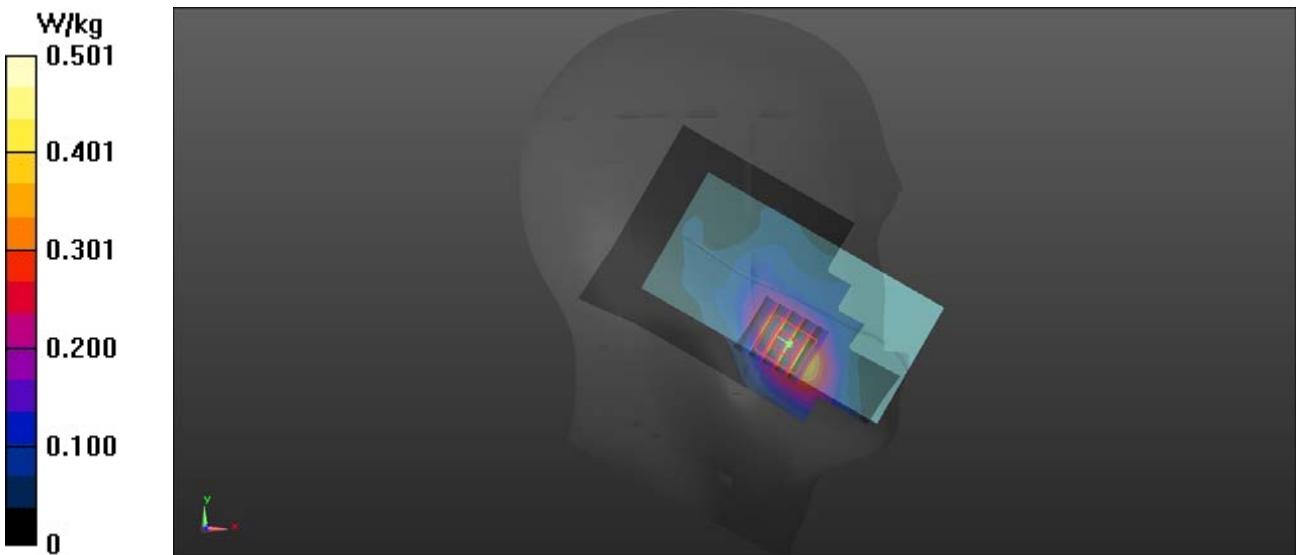

Date: 3/28/2020

## P03 WCDMA II\_RMC12.2K\_Left Cheek\_Ch9538

### DUT: EUT

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1


Medium: H1900 Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.46 \text{ S/m}$ ;  $\epsilon_r = 39.26$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1907.6 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.641 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 6.892 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.725 W/kg  
**SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.265 W/kg**  
Maximum value of SAR (measured) = 0.612 W/kg

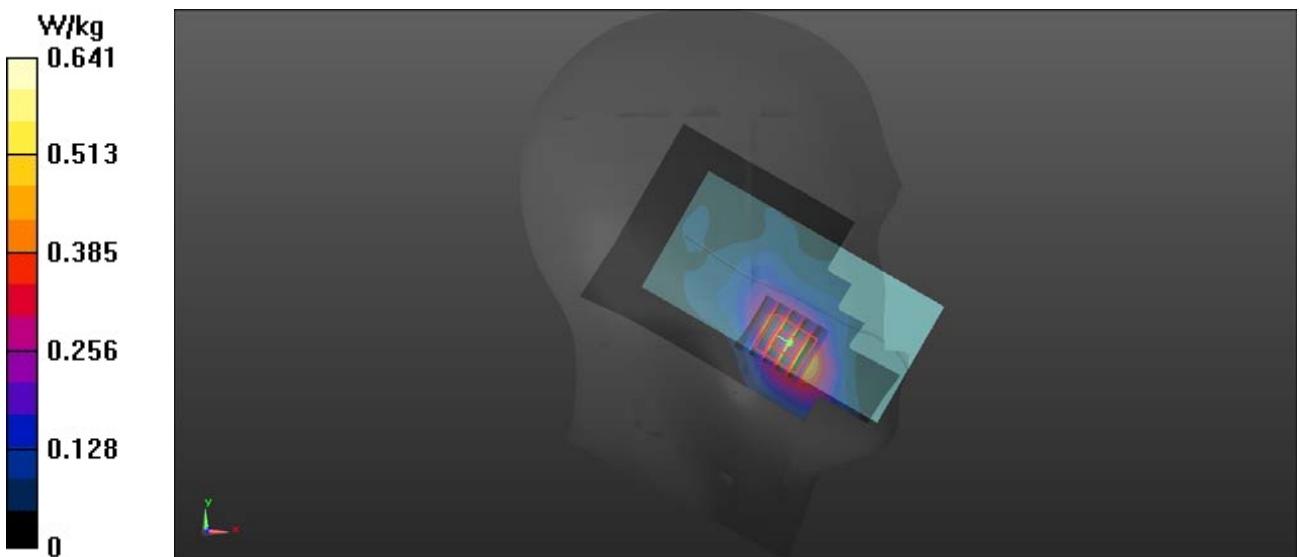

## P04 WCDMA V\_RMC12.2K\_Left Cheek\_Ch4233

### DUT: EUT

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1


Medium: H835 Medium parameters used:  $f = 847 \text{ MHz}$ ;  $\sigma = 0.93 \text{ S/m}$ ;  $\epsilon_r = 41.195$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(10.23, 10.23, 10.23) @ 846.6 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.302 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 5.699 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.330 W/kg  
**SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.193 W/kg**  
Maximum value of SAR (measured) = 0.306 W/kg

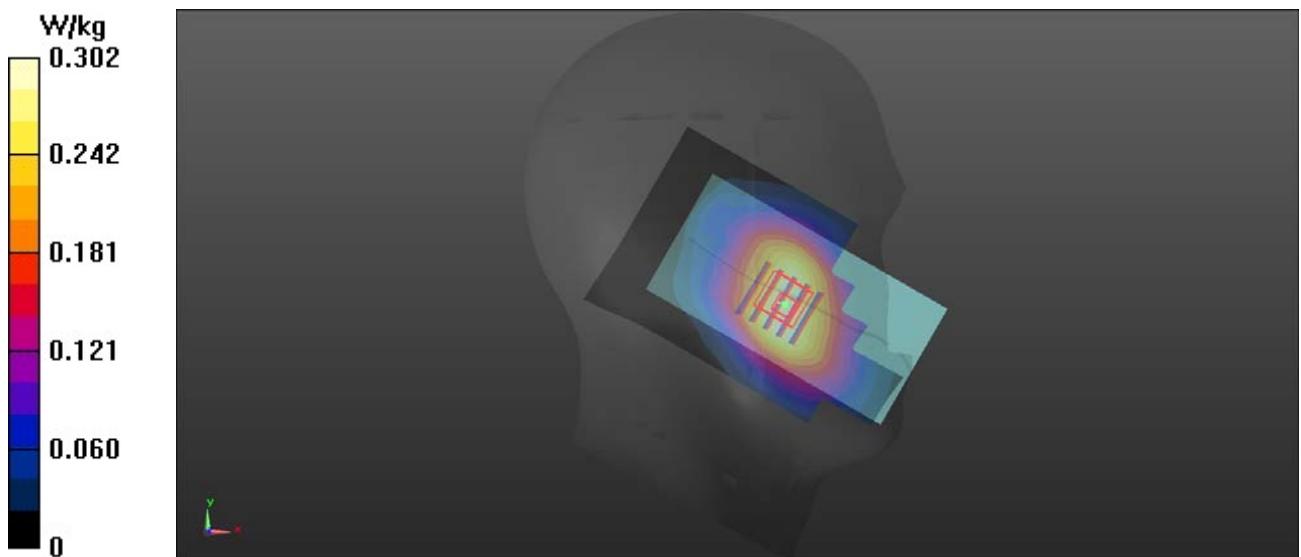

Date: 3/29/2020

## P05 LTE 2\_QPSK20M\_Left Cheek\_Ch18700\_1RB\_OS50

### DUT: EUT

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.433 \text{ S/m}$ ;  $\epsilon_r = 39.298$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1860 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.37 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.25 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.513 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

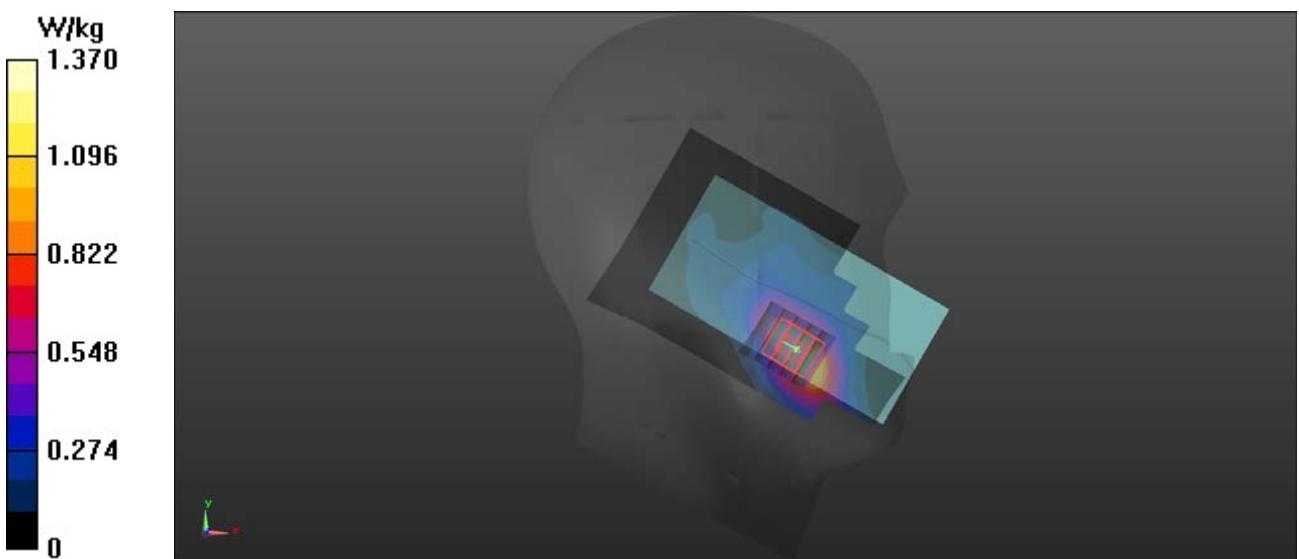

Date: 3/25/2020

## P06 LTE 7\_QPSK20M\_Left Cheek\_Ch21100\_1RB\_OS50

### DUT: EUT

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.898 \text{ S/m}$ ;  $\epsilon_r = 37.829$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.59, 7.59, 7.59) @ 2535 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (91x141x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.434 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.123 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.495 W/kg

**SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.410 W/kg

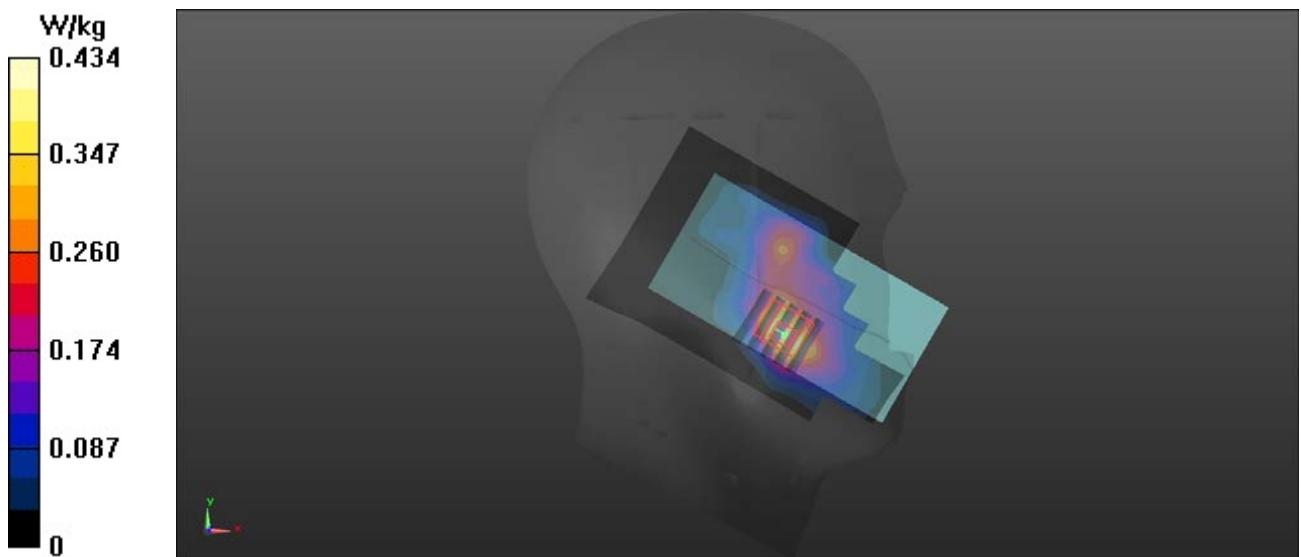

Date: 3/24/2020

## P07 802.11b\_Left Tilted\_Ch11

### DUT: EUT


Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: H2450 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.837 \text{ S/m}$ ;  $\epsilon_r = 37.975$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.85, 7.85, 7.85) @ 2462 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (91x141x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.752 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 12.46 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 0.823 W/kg  
**SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.155 W/kg**  
Maximum value of SAR (measured) = 0.649 W/kg

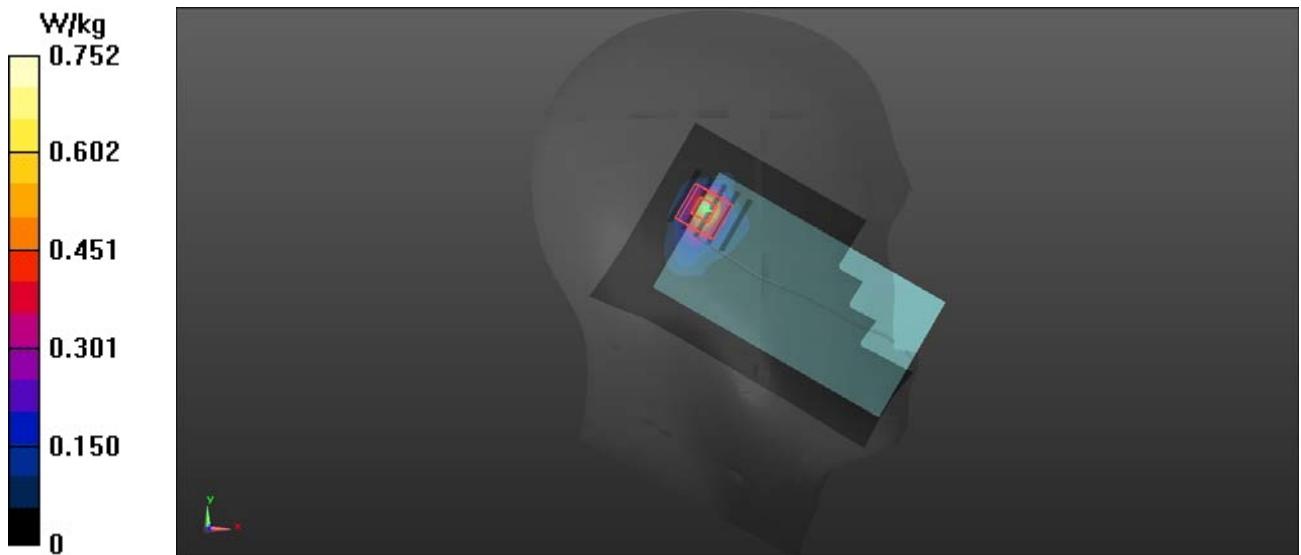

Date: 3/27/2020

## P08 GSM850\_GPRS12\_Rear Face\_1cm\_Ch128

### DUT: EUT


Communication System: GPRS12; Frequency: 824.2 MHz; Duty Cycle: 1:2  
Medium: H835 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.252$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(10.23, 10.23, 10.23) @ 824.2 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.769 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 30.29 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.834 W/kg  
**SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.476 W/kg**  
Maximum value of SAR (measured) = 0.765 W/kg

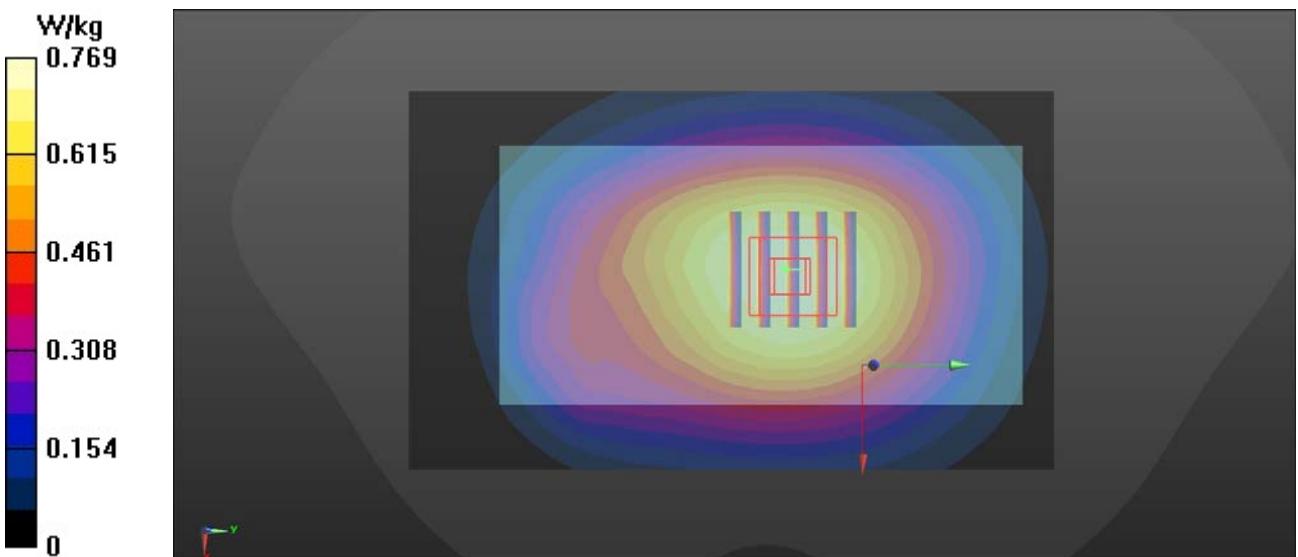

Date: 3/28/2020

## P09 GSM1900\_GPRS12\_Rear Face\_1cm\_Ch661

### DUT: EUT


Communication System: GPRS12; Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium: H1900 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.444 \text{ S/m}$ ;  $\epsilon_r = 39.278$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1880 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.616 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 9.543 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.772 W/kg  
**SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.226 W/kg**  
Maximum value of SAR (measured) = 0.636 W/kg

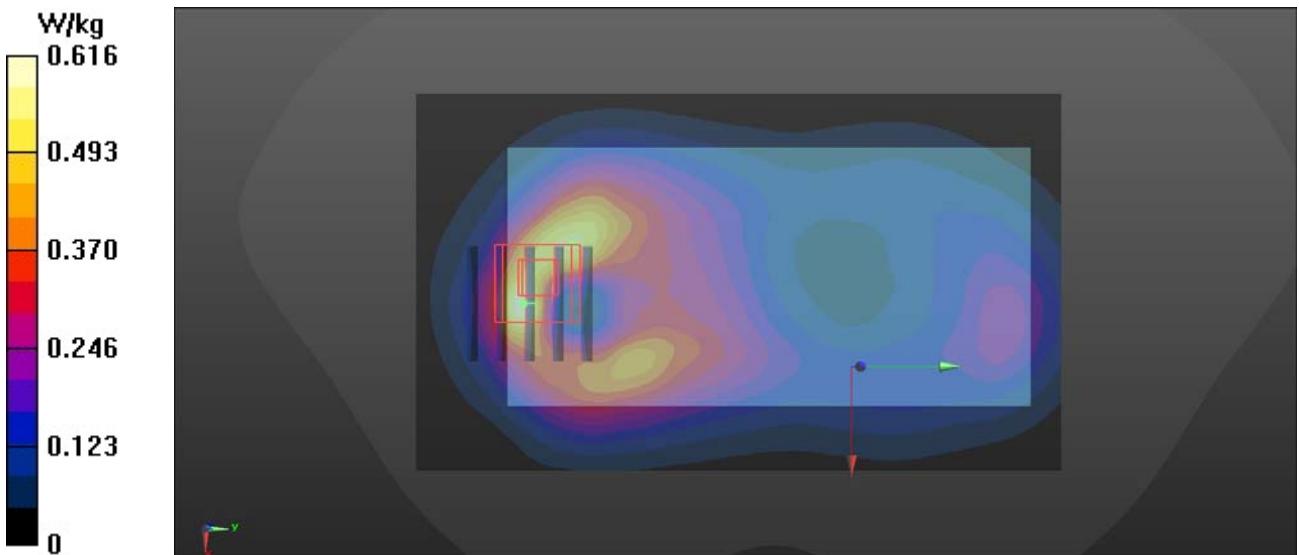

Date: 3/28/2020

## P10 WCDMA II\_RMC12.2K\_Rear Face\_1cm\_Ch9538

### DUT: EUT

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1


Medium: H1900 Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.46 \text{ S/m}$ ;  $\epsilon_r = 39.26$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1907.6 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.885 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 9.101 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 1.08 W/kg  
**SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.296 W/kg**  
Maximum value of SAR (measured) = 0.887 W/kg

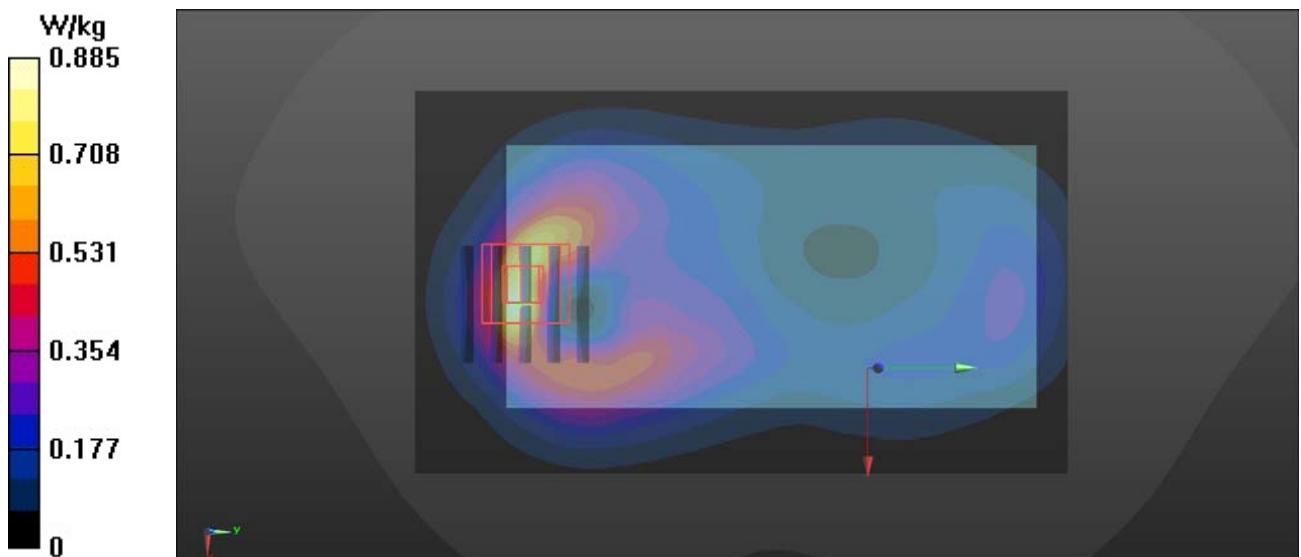

Date: 3/27/2020

## P11 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4233

### DUT: EUT

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1


Medium: H835 Medium parameters used:  $f = 847 \text{ MHz}$ ;  $\sigma = 0.93 \text{ S/m}$ ;  $\epsilon_r = 41.195$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(10.23, 10.23, 10.23) @ 846.6 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.469 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 23.09 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 0.500 W/kg  
**SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.284 W/kg**  
Maximum value of SAR (measured) = 0.460 W/kg

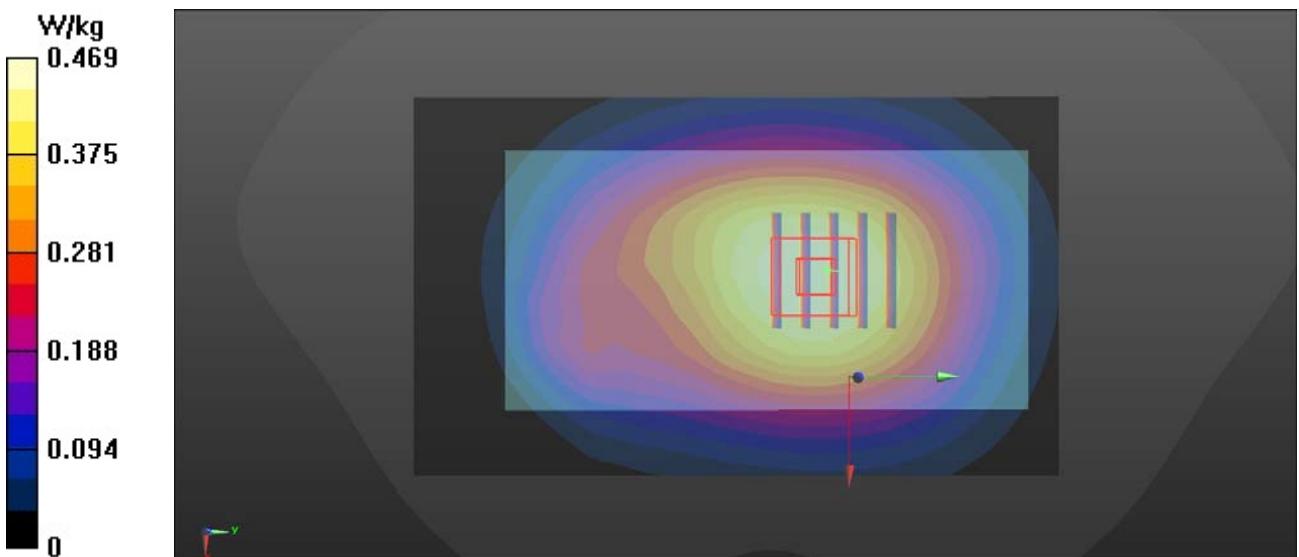

Date: 3/29/2020

## P12 LTE 2\_QPSK20M\_Front Face\_1cm\_Ch19100\_50RB\_OS50

### DUT: EUT

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.455$  S/m;  $\epsilon_r = 39.264$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1900 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.28 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.62 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.898 W/kg; SAR(10 g) = 0.514 W/kg**

Maximum value of SAR (measured) = 1.26 W/kg

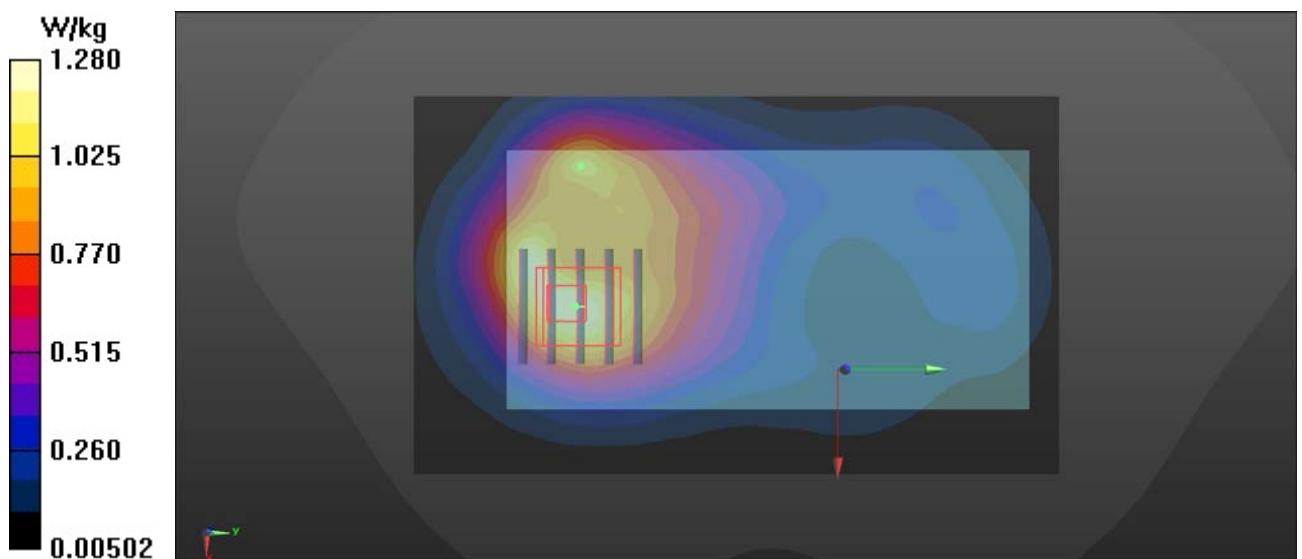

Date: 3/25/2020

## P13 LTE 7\_QPSK20M\_Rear Face\_1cm\_Ch21100\_1RB\_OS50

### DUT: EUT

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.898 \text{ S/m}$ ;  $\epsilon_r = 37.829$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.59, 7.59, 7.59) @ 2535 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (91x141x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 1.13 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.958 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.253 W/kg**

Maximum value of SAR (measured) = 0.965 W/kg

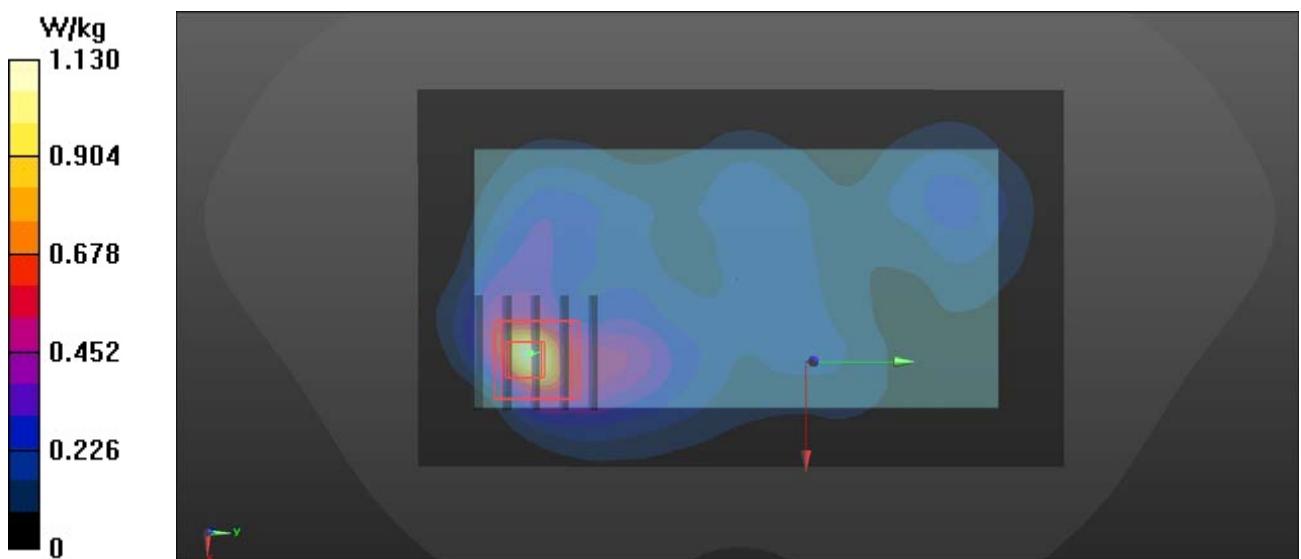

Date: 3/24/2020

## P14 802.11b\_Front Face\_1cm\_Ch11

### DUT: EUT


Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: H2450 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.837 \text{ S/m}$ ;  $\epsilon_r = 37.975$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.85, 7.85, 7.85) @ 2462 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (91x141x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.121 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 2.736 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.151 W/kg  
**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.031 W/kg**  
Maximum value of SAR (measured) = 0.123 W/kg

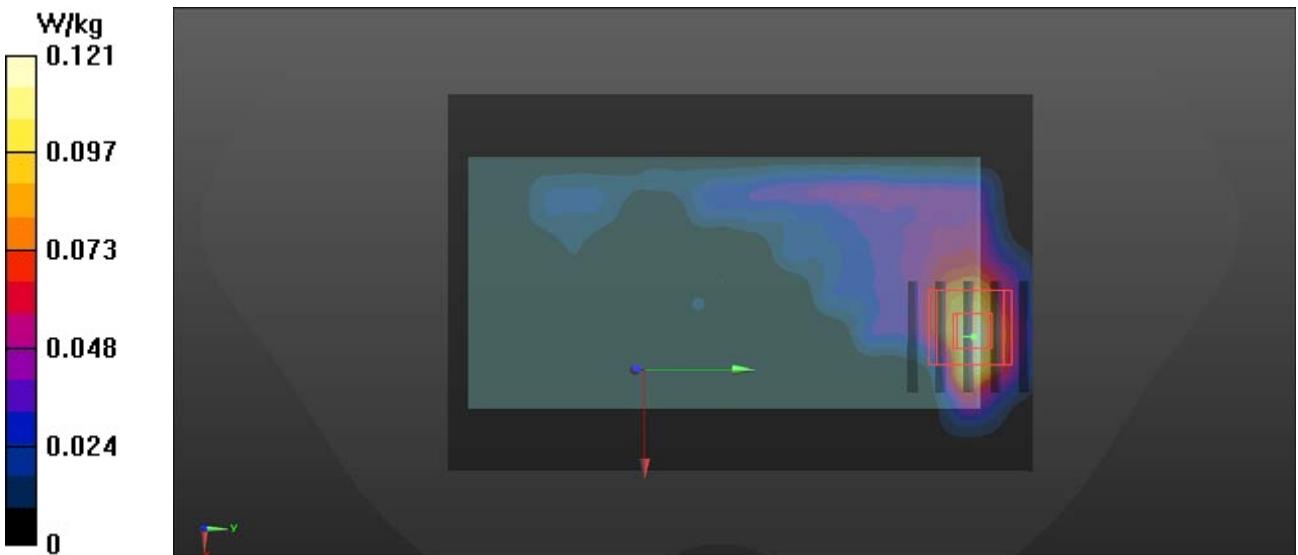

Date: 3/28/2020

## P15 GSM1900\_GPRS12\_Bottom Side\_1cm\_Ch661

### DUT: EUT

Communication System: GPRS12; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: H1900 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.444 \text{ S/m}$ ;  $\epsilon_r = 39.278$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1880 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (41x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.782 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.01 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.902 W/kg

**SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.278 W/kg**

Maximum value of SAR (measured) = 0.765 W/kg

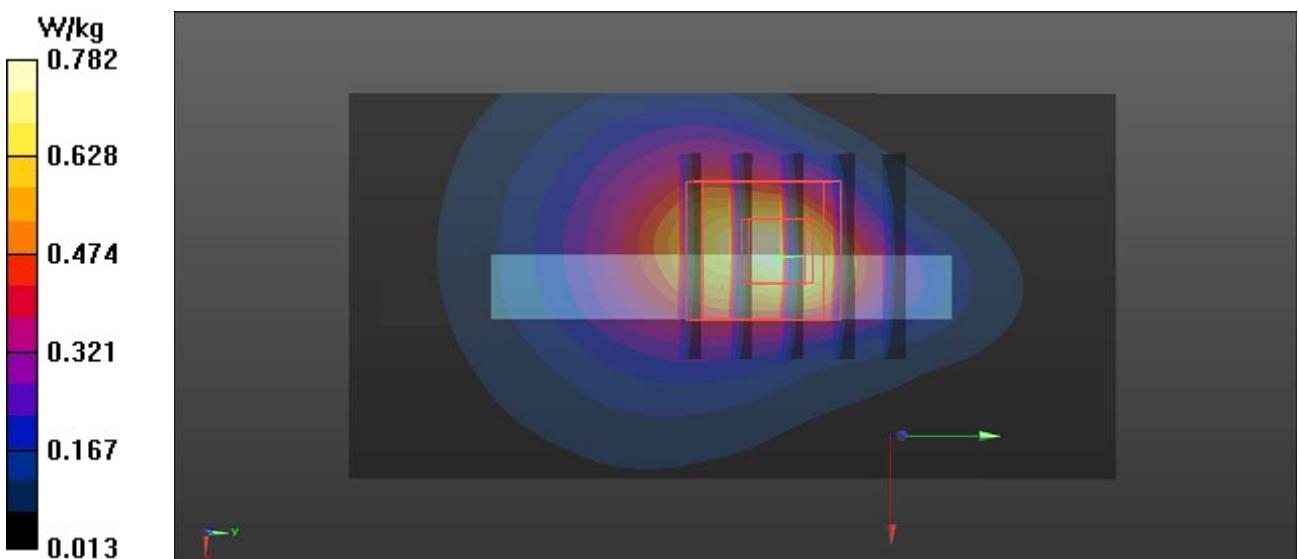

Date: 3/28/2020

## P16 WCDMA II\_RMC12.2K\_Bottom Side\_1cm\_Ch9538

### DUT: EUT

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1


Medium: H1900 Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.46 \text{ S/m}$ ;  $\epsilon_r = 39.26$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1907.6 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (61x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 1.10 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 22.87 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 1.26 W/kg  
**SAR(1 g) = 0.696 W/kg; SAR(10 g) = 0.369 W/kg**  
Maximum value of SAR (measured) = 1.06 W/kg

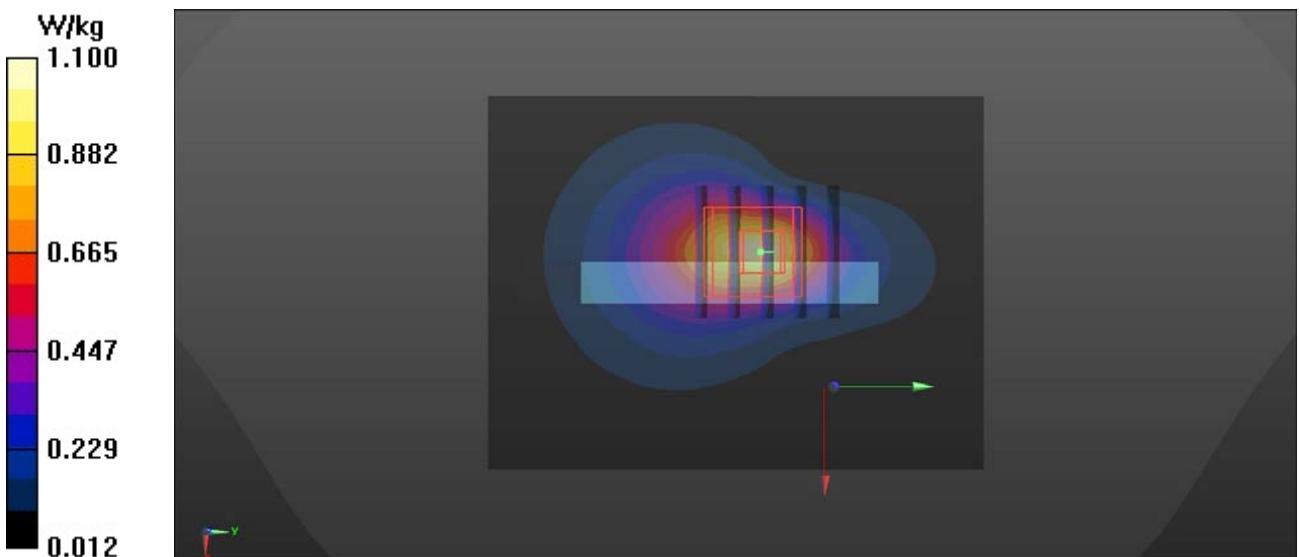

Date: 3/29/2020

## P17 LTE 2\_QPSK20M\_Bottom Side\_1cm\_Ch18910\_1RB\_OS50

### DUT: EUT

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.455$  S/m;  $\epsilon_r = 39.264$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.57, 8.57, 8.57) @ 1900 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.76 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.57 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.599 W/kg**

Maximum value of SAR (measured) = 1.68 W/kg

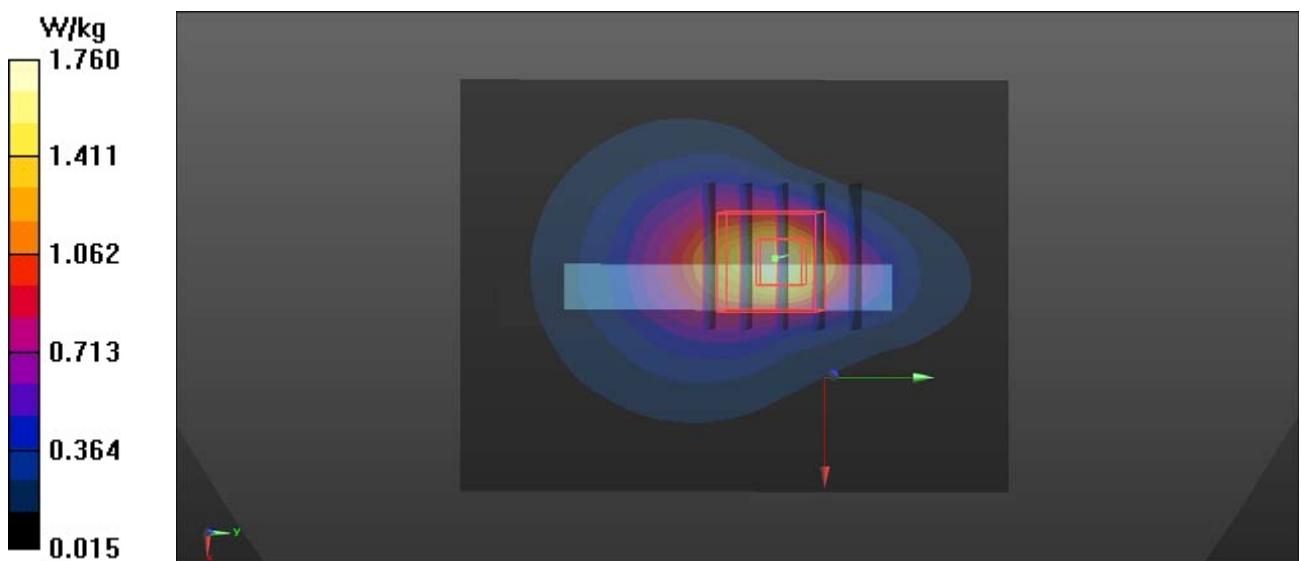

Date: 3/24/2020

## P18 802.11b\_Top Side\_1cm\_Ch11

### DUT: EUT

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: H2450 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.837 \text{ S/m}$ ;  $\epsilon_r = 37.975$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.85, 7.85, 7.85) @ 2462 MHz; Calibrated: 6/27/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 6/18/2019
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**- Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.182 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 6.558 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.172 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

