

WIFI 802.11 n40-Right Head Cheek CH38.....	2
WIFI 802.11 n40-Right Head Tilted CH38.....	3
WIFI 802.11 n40-Right Head Cheek CH118.....	4
WIFI 802.11 n40-Right Head Tilted CH118.....	5
WIFI 802.11 n20-Right Head Cheek CH149.....	6
WIFI 802.11 n20-Right Head Tilted CH149.....	7
WIFI 802.11 n40-Left Head Cheek CH38.....	8
WIFI 802.11 n40-Left Head Tilted CH38.....	9
WIFI 802.11 n40-Left Head Cheek CH118.....	10
WIFI 802.11 n40-Left Head Tilted CH118.....	11
WIFI 802.11 n20-Left Head Cheek CH149.....	12
WIFI 802.11 n20-Left Head Tilted CH149.....	13
WIFI 802.11 n40-Body Front CH38.....	14
WIFI 802.11 n40-Body Rear CH38.....	15
WIFI 802.11 n40-Body Front CH118.....	16
WIFI 802.11 n40-Body Rear CH118.....	17
WIFI 802.11 n20-Body Front CH149.....	18
WIFI 802.11 n20-Body Rear CH149.....	19
WIFI 802.11 n40-Body Right CH38.....	20
WIFI 802.11 n40-Body Top CH38.....	21
WIFI 802.11 n40-Body Right CH118.....	22
WIFI 802.11 n40-Body Top CH118.....	23
WIFI 802.11 n20-Body Right Right CH149.....	24
WIFI 802.11 n20-Body Top Top CH149.....	25

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Right Head Cheek CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;
Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.524$ S/m; $\epsilon_r = 36.002$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.93, 4.93, 4.93); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Right Head Cheek CH38/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.238 W/kg


WIFI/IEEE802.11n40 Right Head Cheek CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.554 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

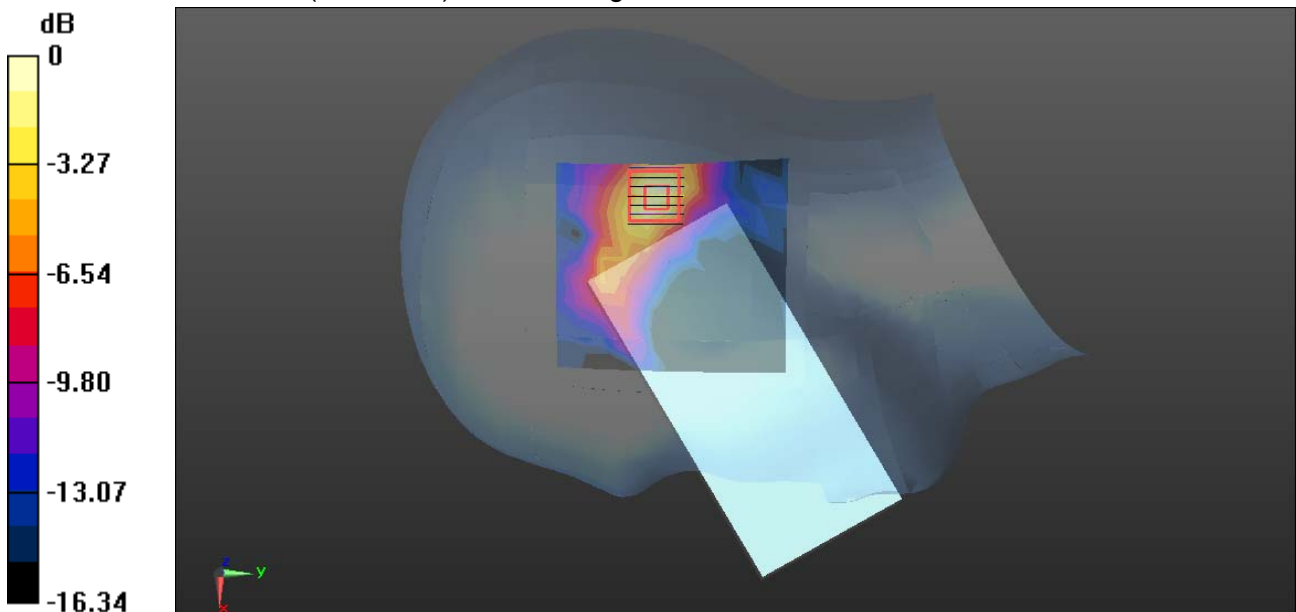

0 dB = 0.299 W/kg = -5.24 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Right Head Tilted CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;
Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 4.524 \text{ S/m}$; $\epsilon_r = 36.002$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.93, 4.93, 4.93); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Right Head Tilted CH38/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.570 W/kg


WIFI/IEEE802.11n40 Right Head Tilted CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.084 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

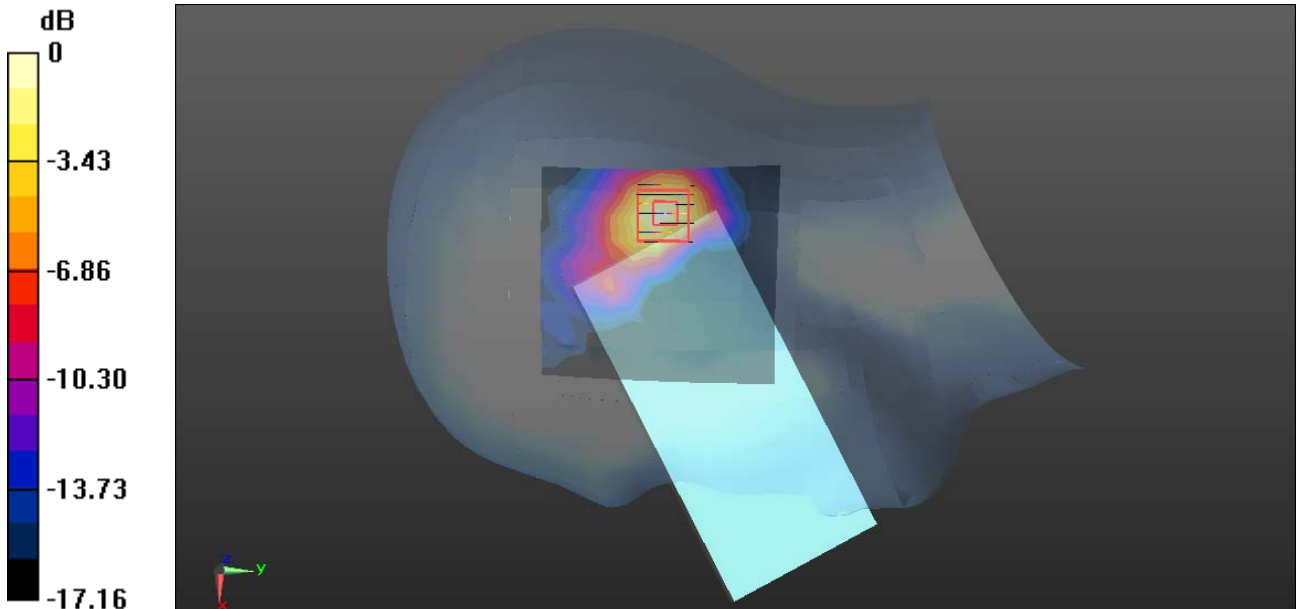

0 dB = 0.600 W/kg = -2.22 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Right Head Cheek CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 4.971 \text{ S/m}$; $\epsilon_r = 35.053$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.69, 4.69, 4.69); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Right Head Cheek CH118/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.107 W/kg


WIFI/IEEE802.11n40 Right Head Cheek CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.892 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

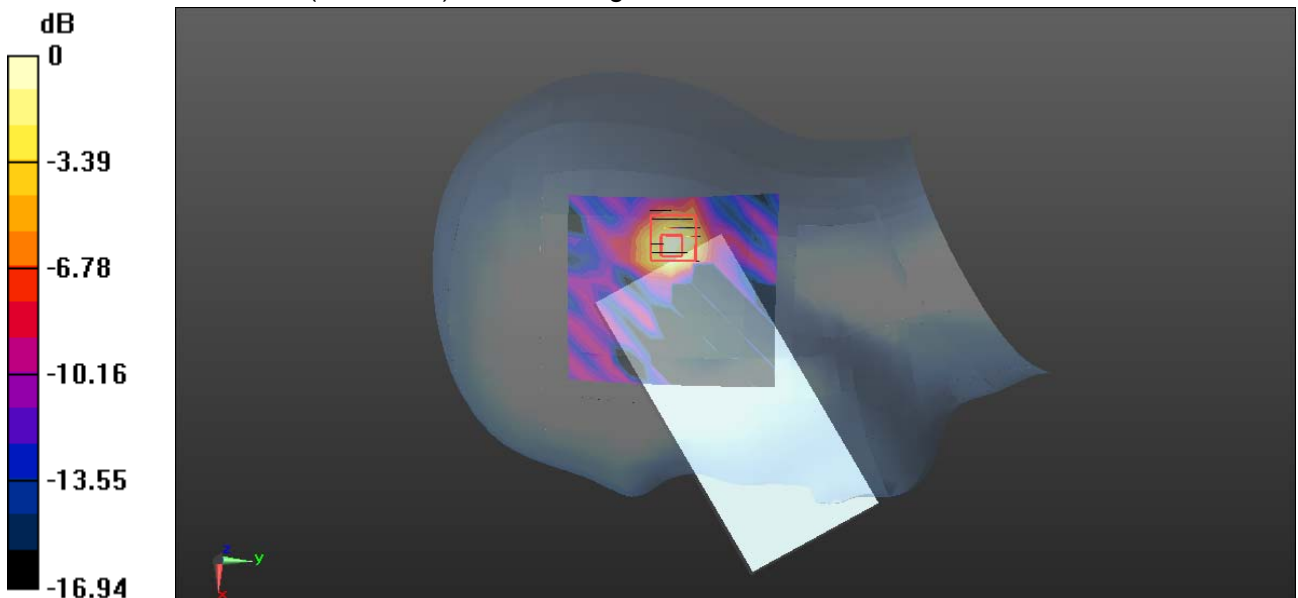

0 dB = 0.106 W/kg = -9.75 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Right Head Tilted CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;

Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 4.971$ S/m; $\epsilon_r = 35.053$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.69, 4.69, 4.69); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Right Head Tilted CH118/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.128 W/kg


WIFI/IEEE802.11n40 Right Head Tilted CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.551 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

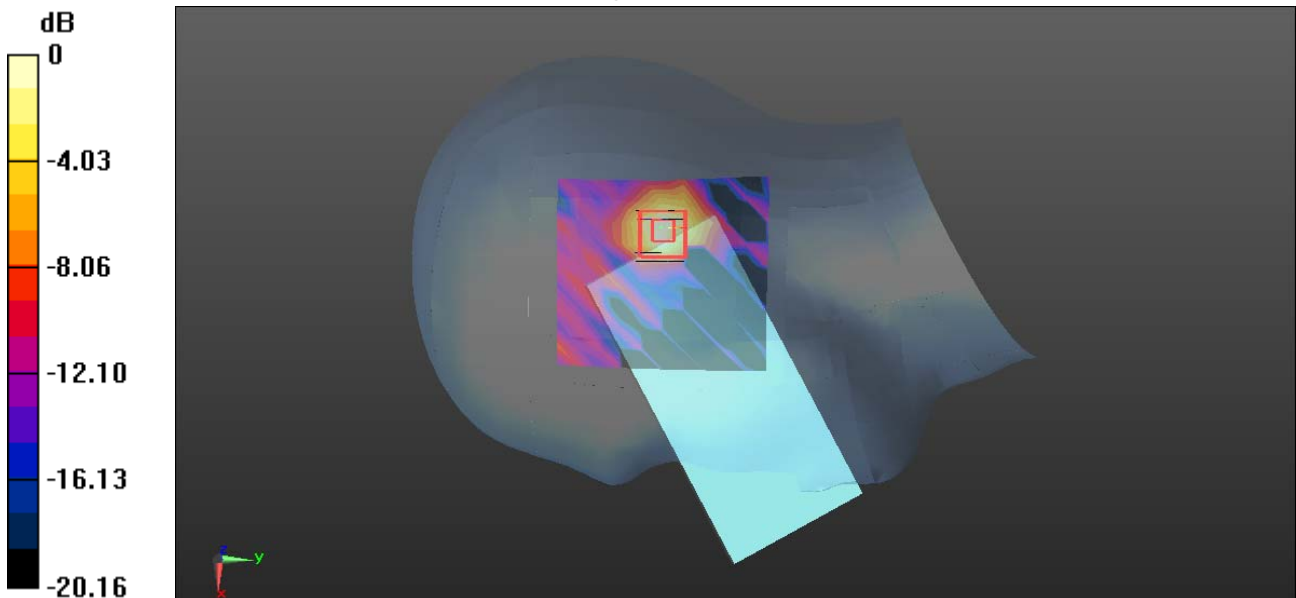

0 dB = 0.128 W/kg = -8.93 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n20-Right Head Cheek CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.138 \text{ S/m}$; $\epsilon_r = 34.712$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.61, 4.61, 4.61); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n20 Right Head Cheek CH149/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0719 W/kg


WIFI/IEEE802.11n20 Right Head Cheek CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.042 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00991 W/kg

Maximum value of SAR (measured) = 0.0863 W/kg

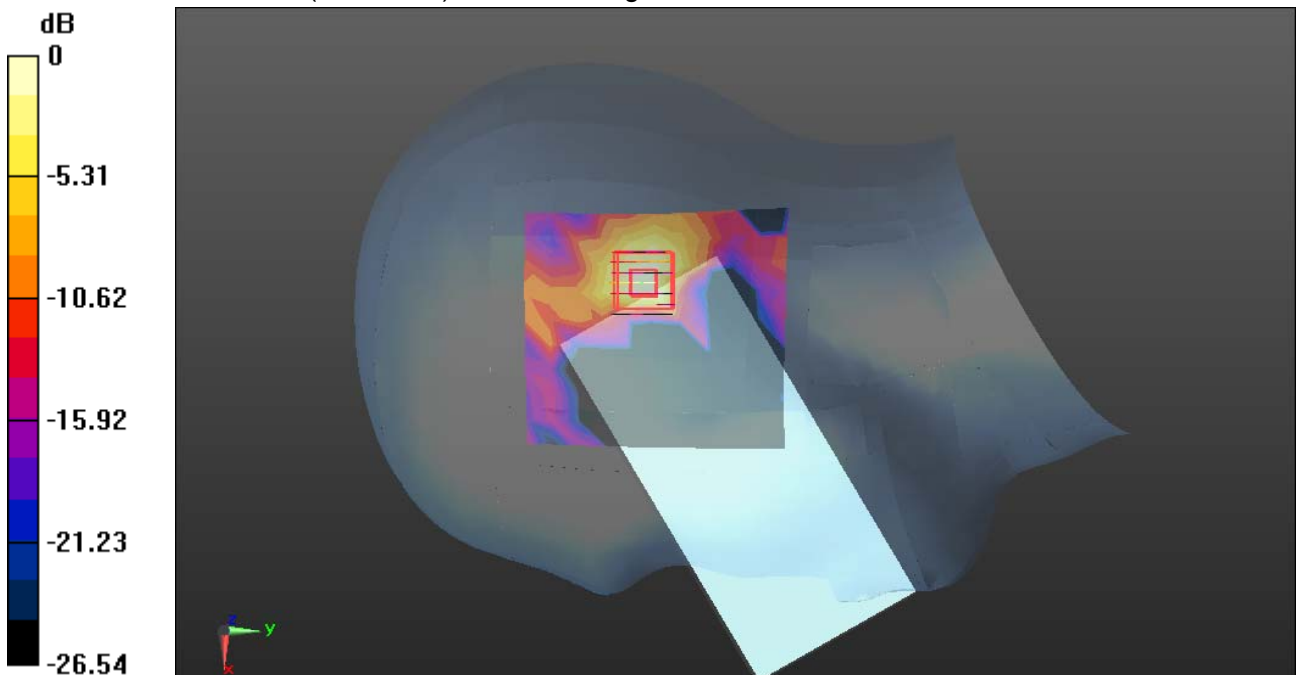

0 dB = 0.0863 W/kg = -10.64 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n20-Right Head Tilted CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.138 \text{ S/m}$; $\epsilon_r = 34.712$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.61, 4.61, 4.61); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n20 Right Head Tilted CH149/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0921 W/kg


WIFI/IEEE802.11n20 Right Head Tilted CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5290 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0984 W/kg

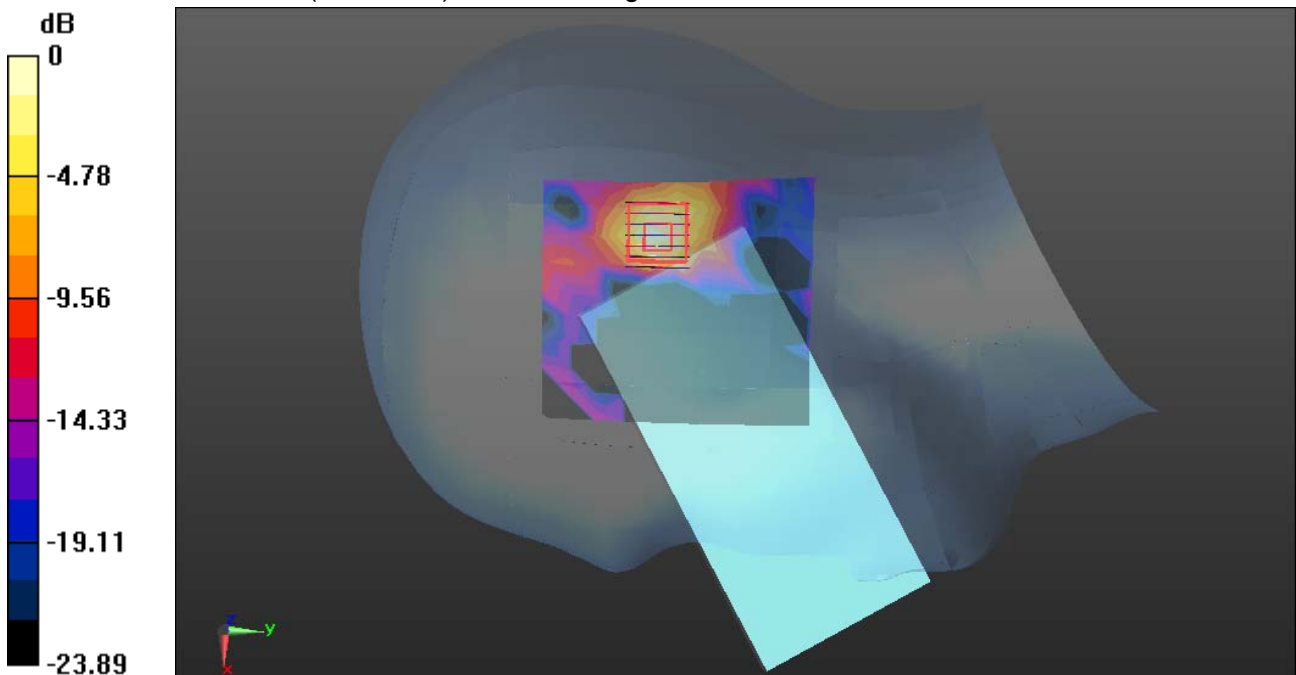

0 dB = 0.0984 W/kg = -10.07 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Left Head Cheek CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;

Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 4.524 \text{ S/m}$; $\epsilon_r = 36.002$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.93, 4.93, 4.93); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Left Head Cheek CH38/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.427 W/kg


WIFI/IEEE802.11n40 Left Head Cheek CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.699 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.461 W/kg

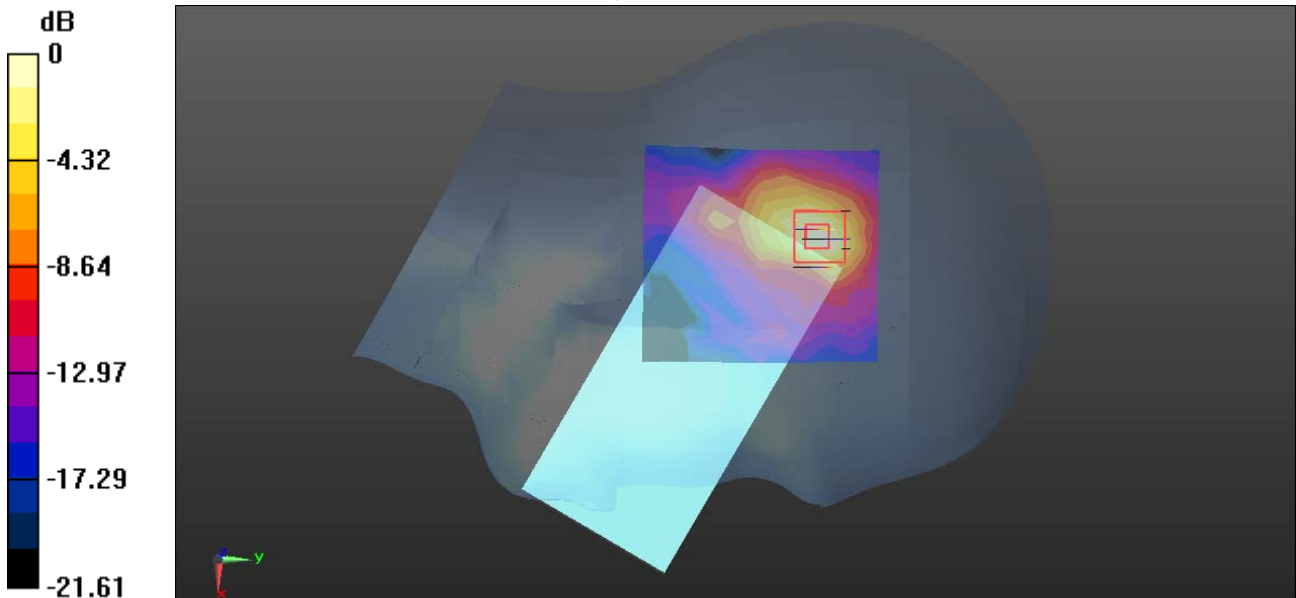

0 dB = 0.461 W/kg = -3.36 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Left Head Tilted CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;
Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 4.524 \text{ S/m}$; $\epsilon_r = 36.002$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.93, 4.93, 4.93); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Left Head Tilted CH38/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.567 W/kg


WIFI/IEEE802.11n40 Left Head Tilted CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.806 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.622 W/kg

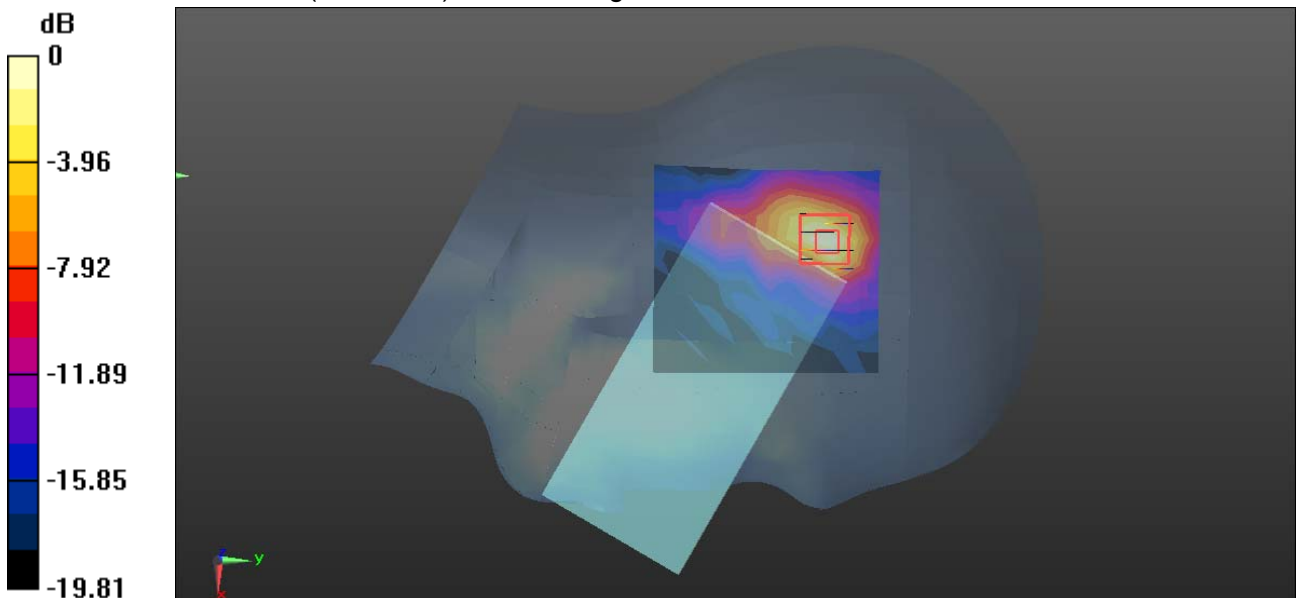

0 dB = 0.622 W/kg = -2.06 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Left Head Cheek CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 4.971 \text{ S/m}$; $\epsilon_r = 35.053$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.69, 4.69, 4.69); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Left Head Cheek CH118/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0737 W/kg


WIFI/IEEE802.11n40 Left Head Cheek CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.575 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00989 W/kg

Maximum value of SAR (measured) = 0.0860 W/kg

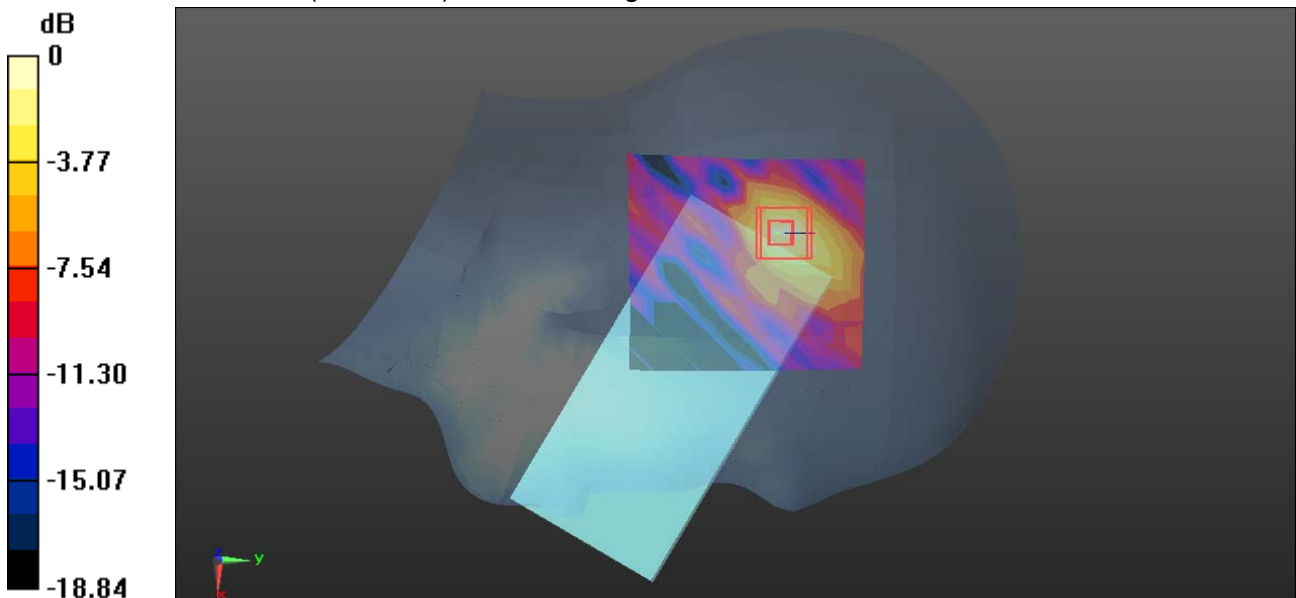

0 dB = 0.0860 W/kg = -10.66 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n40-Left Head Tilted CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 4.971 \text{ S/m}$; $\epsilon_r = 35.053$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.69, 4.69, 4.69); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Left Head Tilted CH118/Area Scan (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.100 W/kg


WIFI/IEEE802.11n40 Left Head Tilted CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 2.680 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

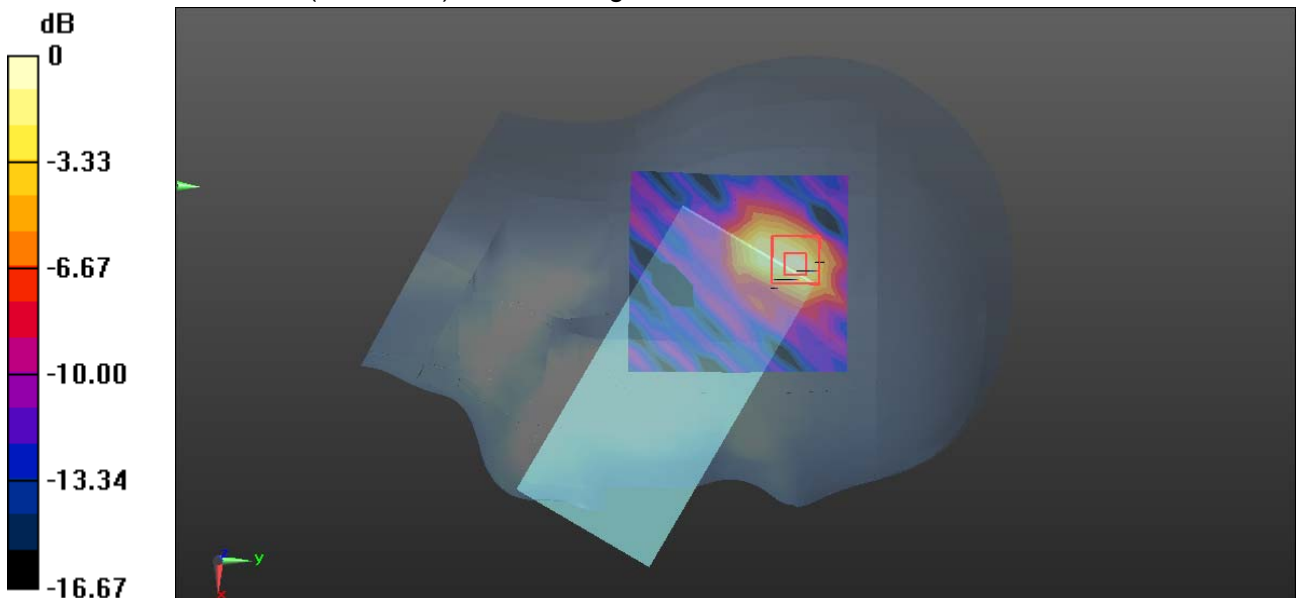

0 dB = 0.104 W/kg = -9.83 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n20-Left Head Cheek CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.138 \text{ S/m}$; $\epsilon_r = 34.712$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.61, 4.61, 4.61); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n20 Left Head Cheek CH149/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0537 W/kg


WIFI/IEEE802.11n20 Left Head Cheek CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.259 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00636 W/kg

Maximum value of SAR (measured) = 0.0600 W/kg

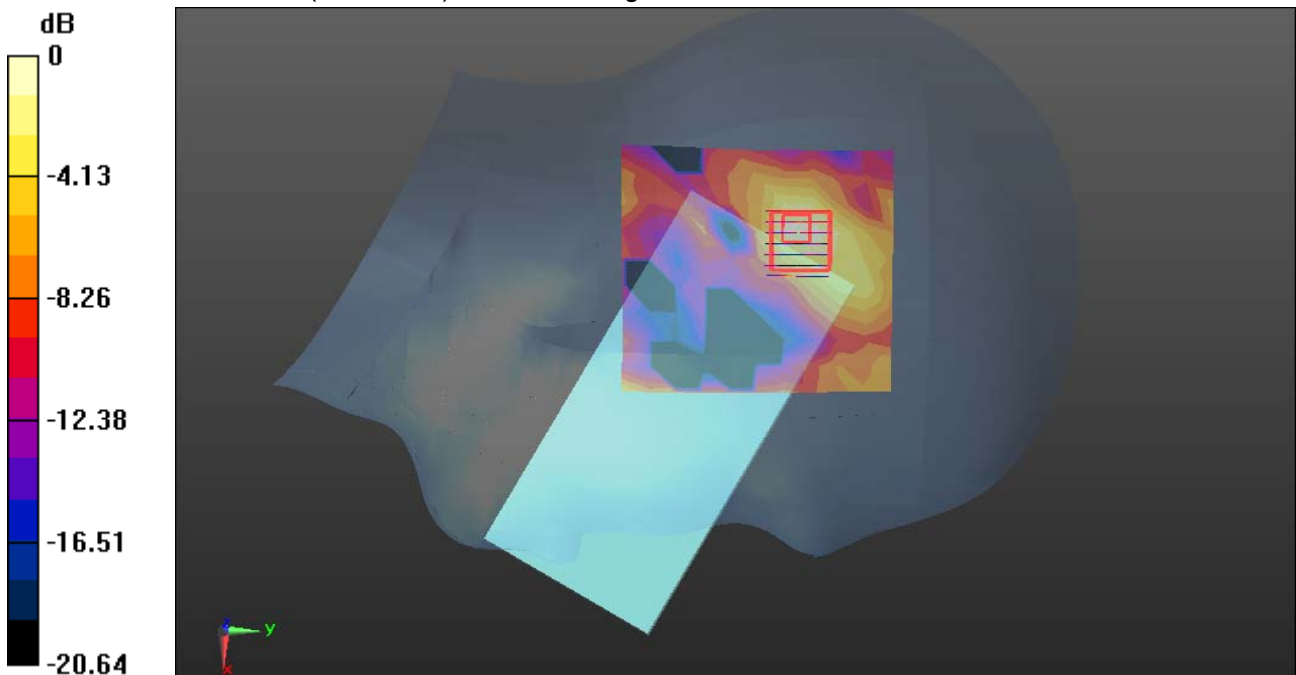

0 dB = 0.0600 W/kg = -12.22 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/20/2018

WIFI 802.11 n20-Left Head Tilted CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.138 \text{ S/m}$; $\epsilon_r = 34.712$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.61, 4.61, 4.61); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n20 Left Head Tilted CH149/Area Scan (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0585 W/kg


WIFI/IEEE802.11n20 Left Head Tilted CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0.6780 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00757 W/kg

Maximum value of SAR (measured) = 0.0693 W/kg

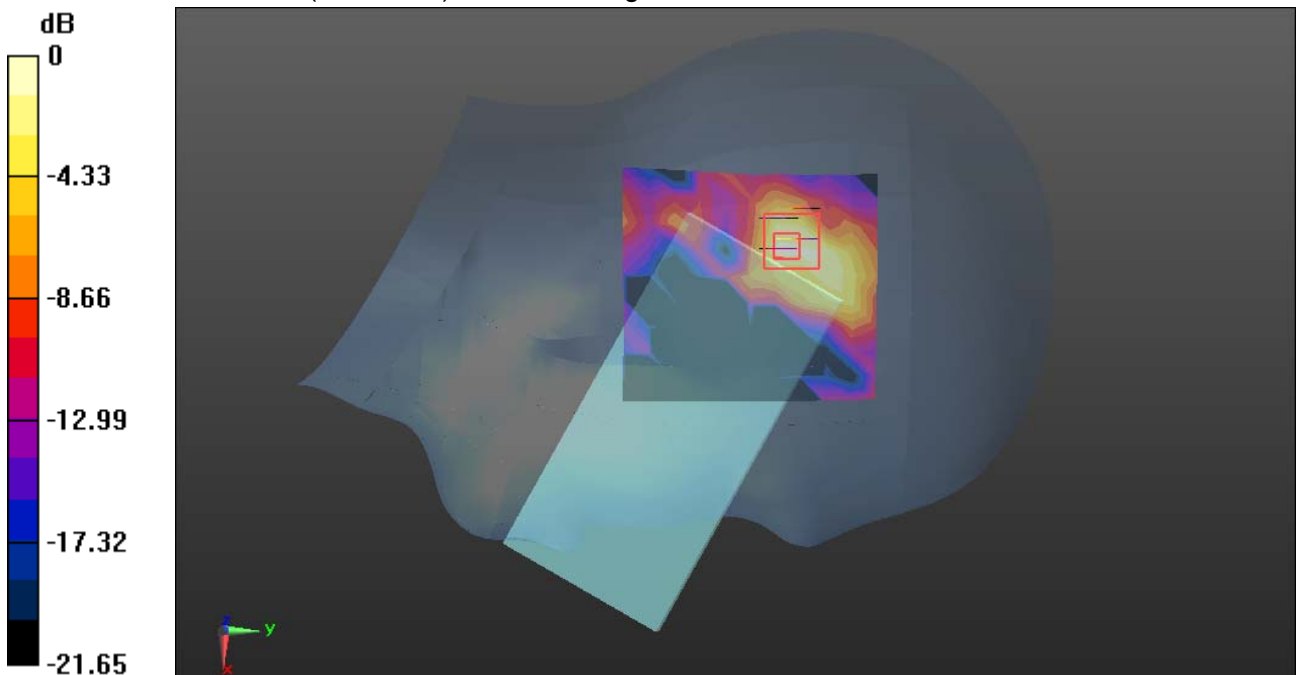

0 dB = 0.0693 W/kg = -11.59 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Front CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;

Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.305 \text{ S/m}$; $\epsilon_r = 48.902$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.23, 4.23, 4.23); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Front CH38/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.181 W/kg


WIFI/IEEE802.11n40 Body Front CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.664 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

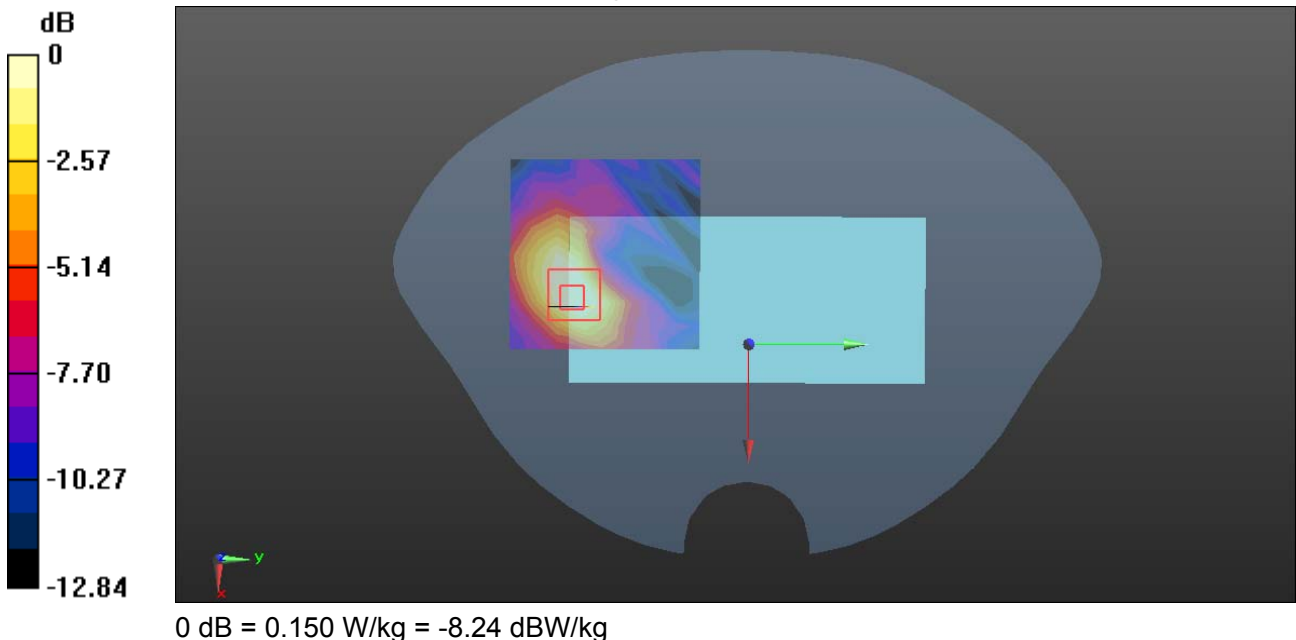

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Rear CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;

Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.305 \text{ S/m}$; $\epsilon_r = 48.902$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.23, 4.23, 4.23); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH38/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.740 W/kg


WIFI/IEEE802.11n40 Body Rear CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6050 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.798 W/kg

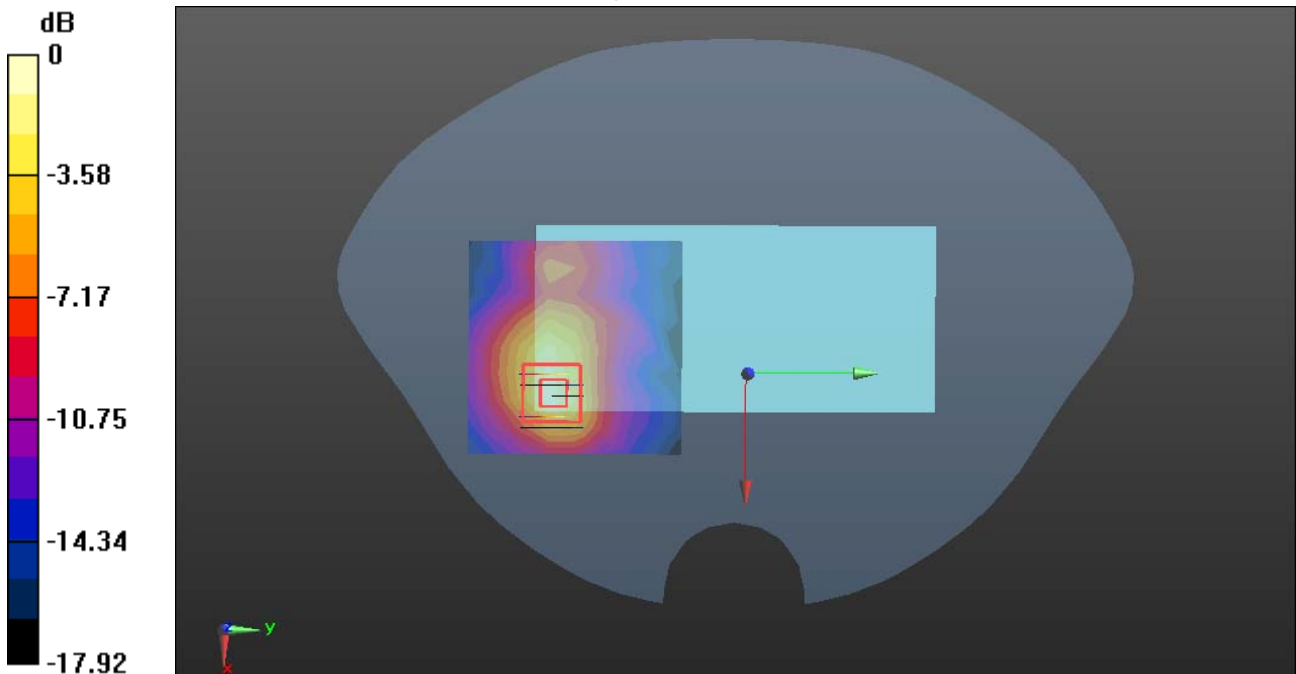

0 dB = 0.798 W/kg = -0.98 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Front CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;

Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 5.916 \text{ S/m}$; $\epsilon_r = 48.079$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.8, 3.8, 3.8); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Front CH118/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0273 W/kg


WIFI/IEEE802.11n40 Body Front CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6990 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.00975 W/kg; SAR(10 g) = 0.00302 W/kg

Maximum value of SAR (measured) = 0.0304 W/kg

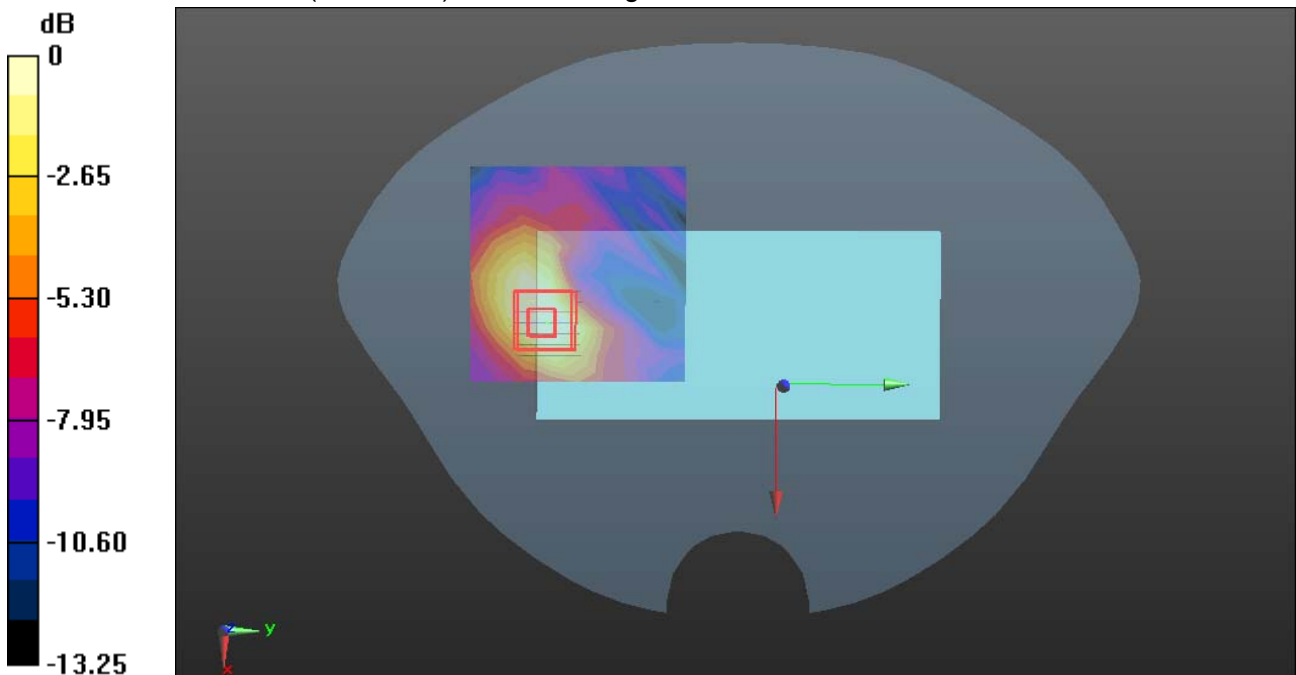

0 dB = 0.0304 W/kg = -15.17 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Rear CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.916$ S/m; $\epsilon_r = 48.079$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.8, 3.8, 3.8); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH118/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.142 W/kg


WIFI/IEEE802.11n40 Body Rear CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5210 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

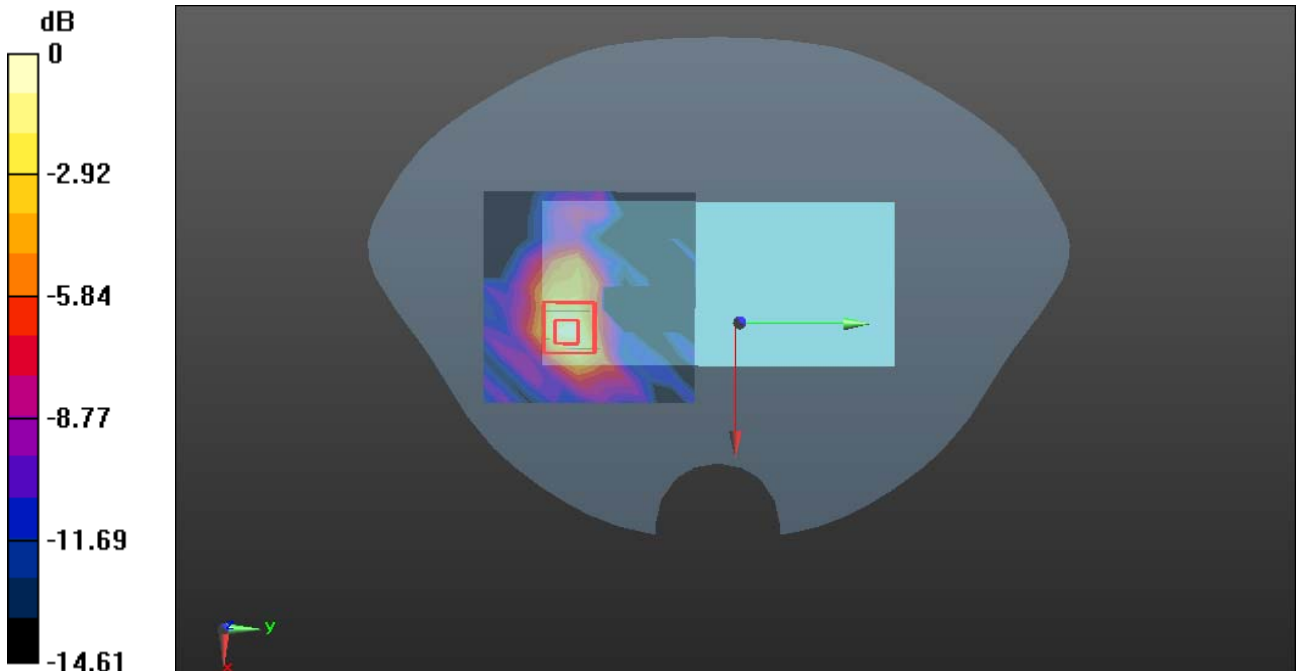

0 dB = 0.155 W/kg = -8.10 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n20-Body Front CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.155 \text{ S/m}$; $\epsilon_r = 47.727$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.95, 3.95, 3.95); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n20 Body Front CH149/Area Scan (10x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0225 W/kg


WIFI/IEEE802.11n20 Body Front CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6840 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.0038 W/kg

Maximum value of SAR (measured) = 0.0283 W/kg

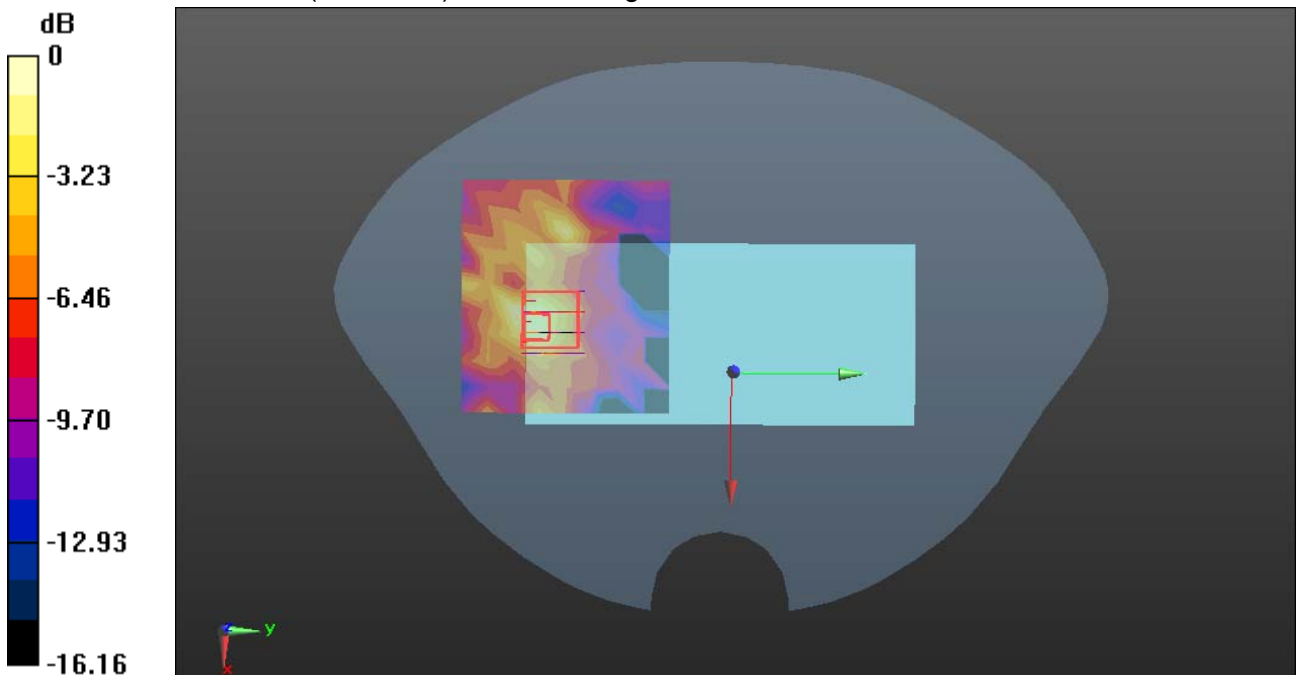

0 dB = 0.0283 W/kg = -15.48 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n20-Body Rear CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.155 \text{ S/m}$; $\epsilon_r = 47.727$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.95, 3.95, 3.95); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH149/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.133 W/kg


WIFI/IEEE802.11n40 Body Rear CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6010 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

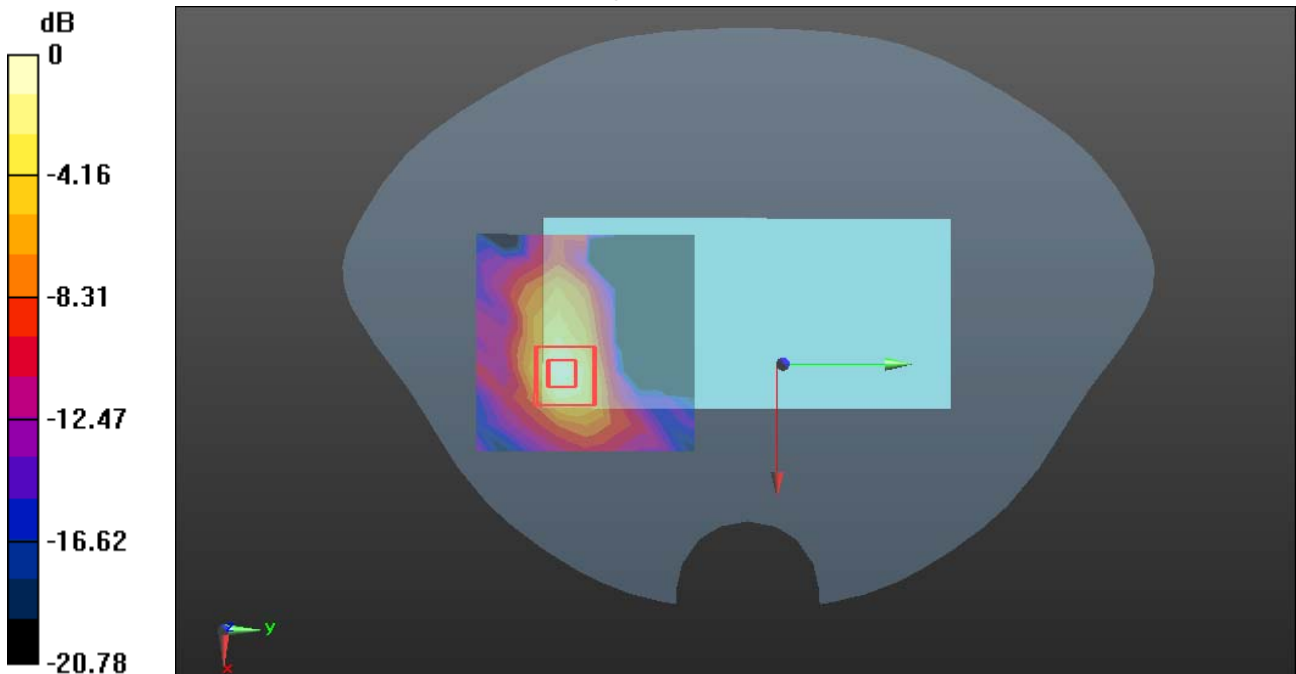

0 dB = 0.131 W/kg = -8.83 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Right CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;
Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.305 \text{ S/m}$; $\epsilon_r = 48.902$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.23, 4.23, 4.23); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Right CH38/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0692 W/kg


WIFI/IEEE802.11n40 Body Right CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.662 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0712 W/kg

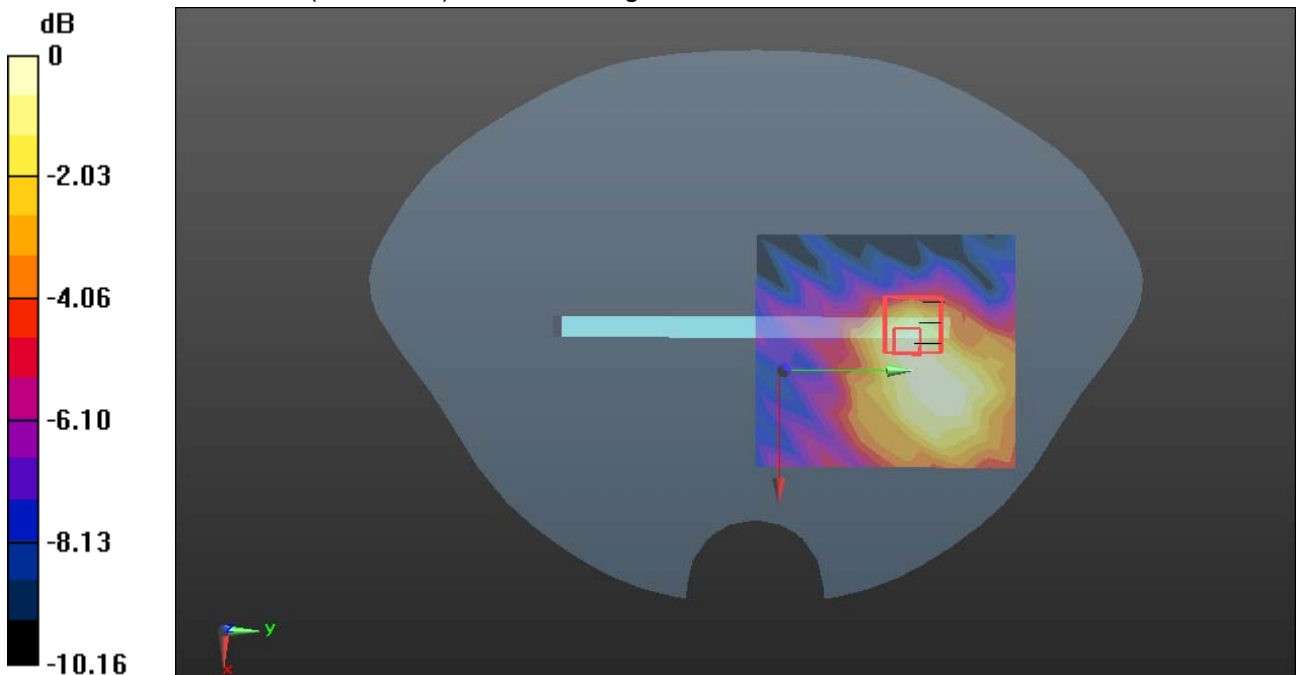

0 dB = 0.0712 W/kg = -11.48 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Top CH38

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band I;

Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.305 \text{ S/m}$; $\epsilon_r = 48.902$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.23, 4.23, 4.23); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Top CH38/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.399 W/kg


WIFI/IEEE802.11n40 Body Top CH38/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.344 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.438 W/kg

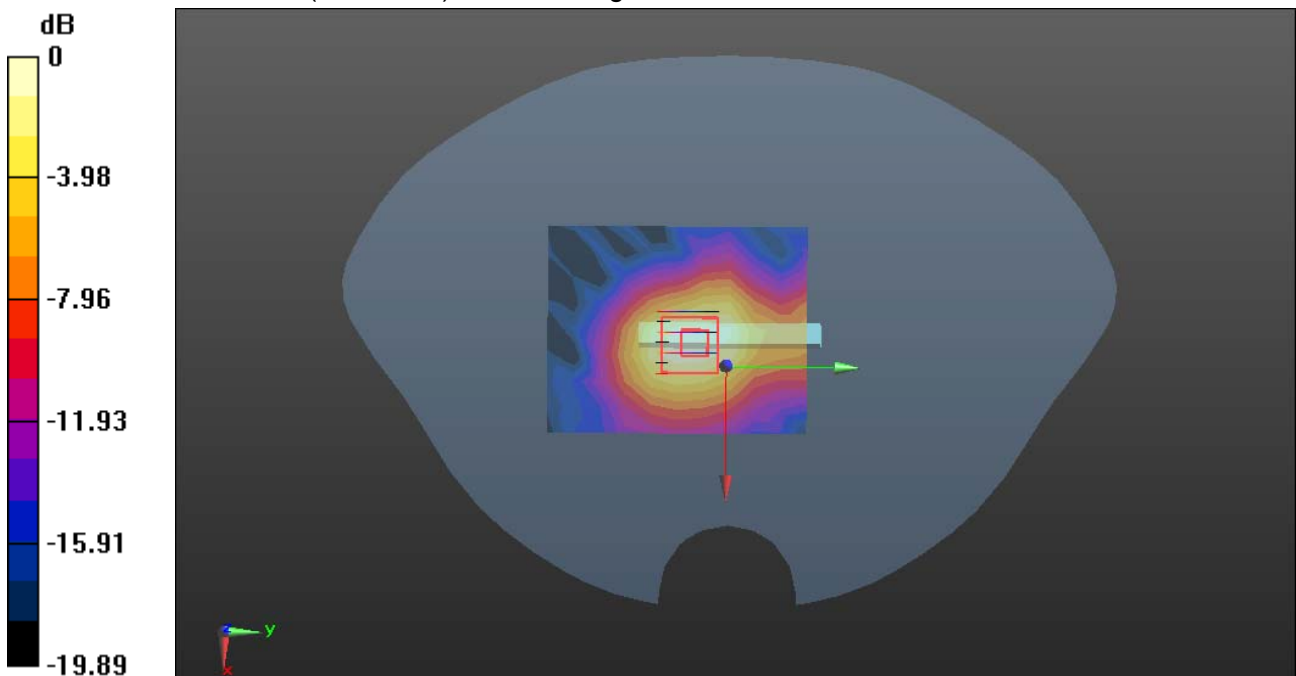

0 dB = 0.438 W/kg = -3.59 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Right CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;

Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.916$ S/m; $\epsilon_r = 48.079$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.8, 3.8, 3.8); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Right CH118/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0322 W/kg


WIFI/IEEE802.11n40 Body Right CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9950 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00332 W/kg

Maximum value of SAR (measured) = 0.0304 W/kg

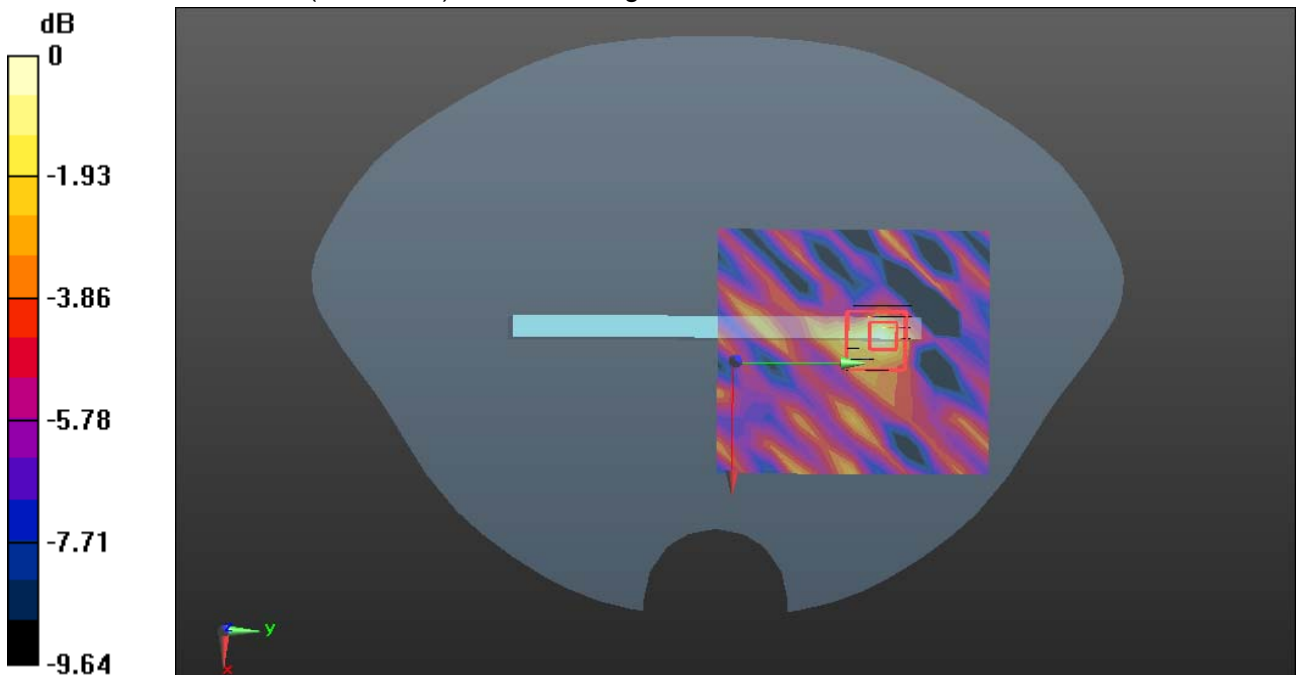

0 dB = 0.0304 W/kg = -15.17 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n40-Body Top CH118

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.916$ S/m; $\epsilon_r = 48.079$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.8, 3.8, 3.8); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Top CH118/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.0753 W/kg


WIFI/IEEE802.11n40 Body Top CH118/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.454 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.00872 W/kg

Maximum value of SAR (measured) = 0.0741 W/kg

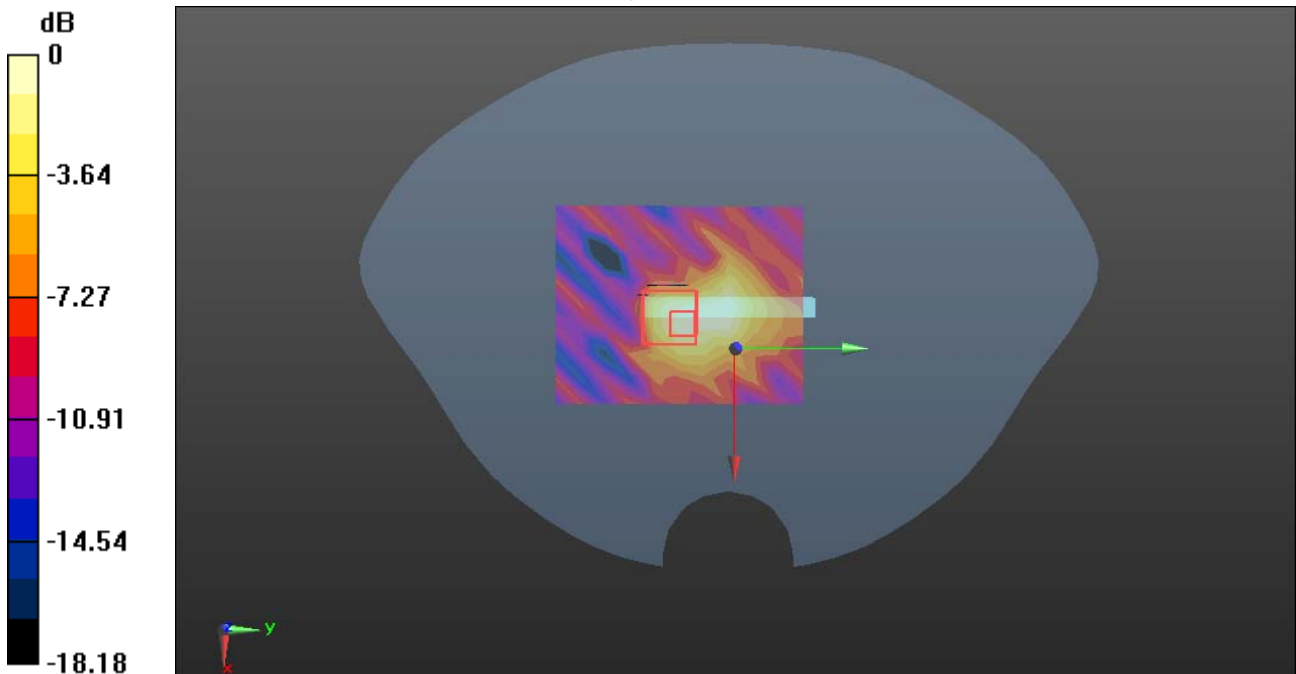

0 dB = 0.0741 W/kg = -11.30 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n20-Body Right Right CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.155 \text{ S/m}$; $\epsilon_r = 47.727$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.95, 3.95, 3.95); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n20 Body Right CH149/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0281 W/kg


WIFI/IEEE802.11n20 Body Right CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.673 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.00646 W/kg; SAR(10 g) = 0.00338 W/kg

Maximum value of SAR (measured) = 0.0149 W/kg

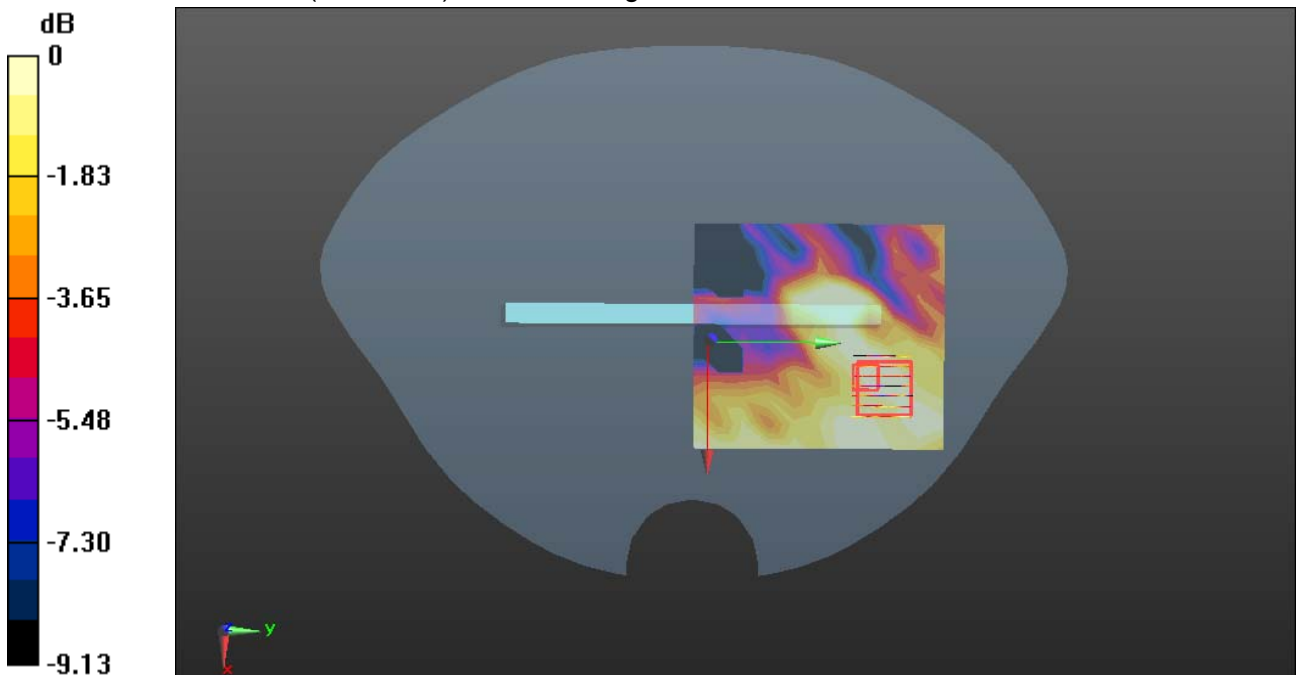

0 dB = 0.0149 W/kg = -18.27 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/21/2018

WIFI 802.11 n20-Body Top Top CH149

DUT: 4G Smartphone; Type: MobiWire Huritt, Altice S61; Serial: N/A

Communication System: UID 0, IEEE 802.11 20HT(5G) (0); Communication System Band: 5G Band IV;
Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.155 \text{ S/m}$; $\epsilon_r = 47.727$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.95, 3.95, 3.95); Calibrated: 6/26/2018;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 6/21/2018
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n20 Body Top CH149/Area Scan (9x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.0672 W/kg


WIFI/IEEE802.11n20 Body Top CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 3.001 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00818 W/kg

Maximum value of SAR (measured) = 0.0681 W/kg

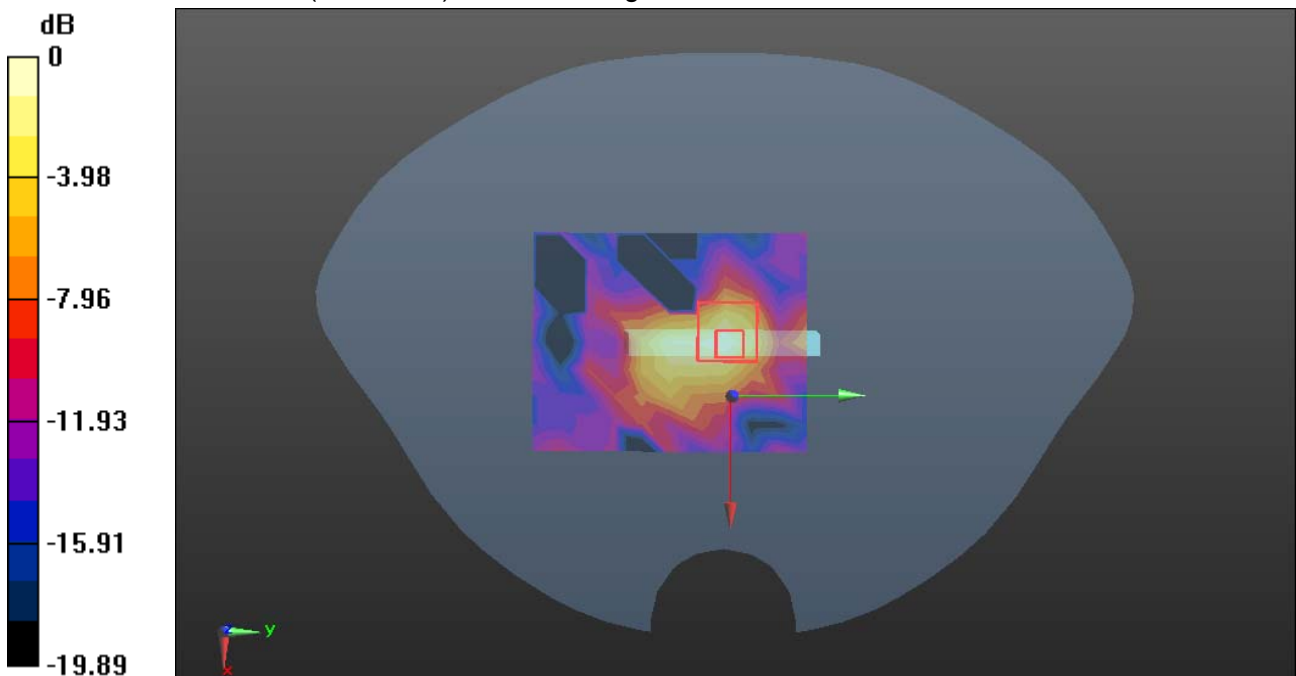

0 dB = 0.0681 W/kg = -11.67 dBW/kg