

## TEST REPORT

**Report Number: 103948971MPK-002**

**Project Number: G103948971**

**Original Issue: December 29, 2019**

**Revision Date: January 10, 2020**

**Testing performed on the  
SmartBypass™  
Model Number: SmartBypass 2000-63**

**FCC ID: QPS01008**

**IC ID: 22326-01008**


**To  
FCC Part 15 Subpart C (15.247)  
Industry Canada RSS-247 Issue 2**

**For**


**Smart Wires, Inc.**

Test Performed by:  
Intertek  
1365 Adams Court  
Menlo Park, CA 94025 USA

Test Authorized by:  
Smart Wires, Inc.  
3292 Whipple Rd.  
Union City, CA 94587 USA

Prepared by:   
Anderson Soungpanya

Date: December 29, 2019

Reviewed by:   
Krishna K Vemuri

Date: December 29, 2019

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

Report No. 103948971MPK-002	
<b>Equipment Under Test:</b>	SmartBypass™
<b>Trade Name:</b>	Smart Wires, Inc.
<b>Model Number(s):</b>	SmartBypass 2000-63
<b>Applicant:</b>	Smart Wires, Inc.
<b>Contact:</b>	Karamjit Singh
<b>Address:</b>	Smart Wires, Inc. 3292 Whipple Rd. Union City, CA 94587
<b>Country:</b>	USA
<b>Tel. Number:</b>	(510) 952-2668
<b>Email:</b>	karamjit.singh@smartwires.com
<b>Applicable Regulation:</b>	FCC Part 15 Subpart C (15.247) Industry Canada RSS-247 Issue 2
<b>Date of Test:</b>	November 22 – December 10, 2019

**Original: We attest to the accuracy of this report:**



Anderson Soungpanya  
Project Engineer



Krishna K Vemuri  
Engineering Team Lead

**Revision: We attest to the accuracy of this report:**



Anderson Soungpanya  
Project Engineer



Krishna K Vemuri  
Engineering Team Lead

## TABLE OF CONTENTS

<b>1.0</b>	<b>Introduction .....</b>	<b>4</b>
1.1	Summary of Tests .....	4
<b>2.0</b>	<b>General Description .....</b>	<b>5</b>
2.1	Product Description .....	5
2.2	Related Submittal(s) Grants .....	6
2.3	Test Methodology .....	6
2.4	Test Facility .....	6
<b>3.0</b>	<b>System Test Configuration .....</b>	<b>7</b>
3.1	Support Equipment .....	7
3.2	Block Diagram of Test Setup .....	7
3.3	Justification .....	8
3.4	Mode of Operation During Test .....	8
3.5	Modifications Required for Compliance .....	8
3.6	Additions, Deviations and Exclusions from Standards .....	8
<b>4.0</b>	<b>Emissions Measurement Results .....</b>	<b>9</b>
4.1	20dB Bandwidth, and 99% Occupied Bandwidth .....	9
4.2	Conducted Output Power at Antenna Terminals .....	14
4.3	Carrier Frequency Separation .....	19
4.4	Number of Channels .....	21
4.5	Average Channel Occupancy Time .....	23
4.6	Out-of-Band Conducted Emissions .....	26
4.7	Transmitter Radiated Emissions .....	34
4.8	AC Line Conducted Emission .....	50
<b>5.0</b>	<b>List of Test Equipment and Software .....</b>	<b>56</b>
<b>6.0</b>	<b>Document History .....</b>	<b>57</b>
<b>Annex A</b>	<b>- Duty Cycle Measurement .....</b>	<b>58</b>
A.1	Procedure .....	58
A.2	Test Results .....	59

## 1.0 Introduction

This report is designed to show compliance of the 2.4GHz transceiver with the requirements of FCC Part 15 Subpart C (15.247) and RSS-247. This test report covers only the FHSS radio.

### 1.1 Summary of Tests

TEST	Reference FCC	Reference Industry Canada	RESULTS
RF Output Power	15.247(b)	RSS-247, 5.4.2	Complies
20-dB Bandwidth	15.247(a)(1)	RSS-247, 5.1.1	Complies
Channel Separation	15.247(a)(1)	RSS-247, 5.1.2	Complies
Number of Hopping Channels	15.247(a)(1)	RSS-247, 5.14	Complies
Average Channel Occupancy Time	15.247(a)(1)	RSS-247, 5.14	Complies
Out-of-Band Antenna Conducted Emission	15.247(d)	RSS-247, 5.5	Complies
Transmitter Radiated Emissions	15.247(d), 15.209, 15.205	RSS-GEN	Complies
RF Exposure	15.247(i)	RSS-102	Complies
AC Conducted Emission	15.207	RSS-GEN	Complies
Antenna Requirement	15.203	RSS-GEN	Complies (Professional Installation)

## 2.0 General Description

### 2.1 Product Description

Smart Wires, Inc. supplied the following description of the EUT:

Smart Wires' SmartBypass technology is designed to protect other Smart Wires series compensation devices. The SmartBypass does this by automatically activating switches to carry the transmission line current during line faults or when operators desire to manually bypass the series compensation. The SmartBypass technology builds on the protection used in other Smart Wires products. The SmartBypass is installed on a single-phase basis, meaning that for most transmission deployments, there will be an equal number of units per phase.

For more information, see user's manual provided by the manufacturer.

Information about the 2.4 GHz radio is presented below:

<b>Applicant</b>	Smart Wires, Inc.
<b>Model No.</b>	SmartBypass 2000-63
<b>FCC Identifier</b>	QPS01008
<b>Type of Transmission</b>	Frequency Hopping Spread Spectrum
<b>Rated RF Output</b>	16.40 dBm
<b>Antenna(s) &amp; Gain</b>	Internal Antenna, Gain: 4.42 dBi
<b>Frequency Range</b>	2436.000000 – 2463.921747 MHz
<b>Number of Channel(s)</b>	24
<b>Modulation Type</b>	2-FSK
<b>Applicant Name &amp; Address</b>	Smart Wires, Inc. 3292 Whipple Rd. Union City, CA 94587 USA

**EUT receive date:** November 18, 2019

**EUT receive condition:** The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

**Test start date:** November 22, 2019

**Test completion date:** December 10, 2019

The test results in this report pertain only to the item tested.

## 2.2 Related Submittal(s) Grants

None.

## 2.3 Test Methodology

Antenna conducted measurements were performed according to the FCC documents "Guidance for Performing Compliance Measurement on Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System devices Operating under §15.247" (KDB 558074 D01 15.247 Meas Guidance v05r02), RSS-247 Issue 2, ANSI C63.10: 2013 and RSS-GEN Issue 5.

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10: 2013 & ANSI C63.4-2014. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Data Sheet" of this report.

All other measurements were made in accordance with the procedures in part 2 of CFR 47.

Following is the channel test plan:

Channels in 2.4 GHz band			
Test Channel		Frequency, MHz	Tested
Low	0	2436.000000	√
Middle	12	2450.567868	√
High	23	2463.921747	√
Hopping Mode	0-23	2436.000000 - 2463.921747	√

## 2.4 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

### 3.0 System Test Configuration


#### 3.1 Support Equipment

Description	Manufacturer	Model Number
Laptop	DELL	Latitude 7490
DC Power Supply	Exetech	D30030012

#### 3.2 Block Diagram of Test Setup

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Communication Device	Smart Wires, Inc.	SmartBypass 2000-63	23318-002-09-00-0-1

Antenna was removed and co-axial connector with a cable was installed for Conducted Measurements.

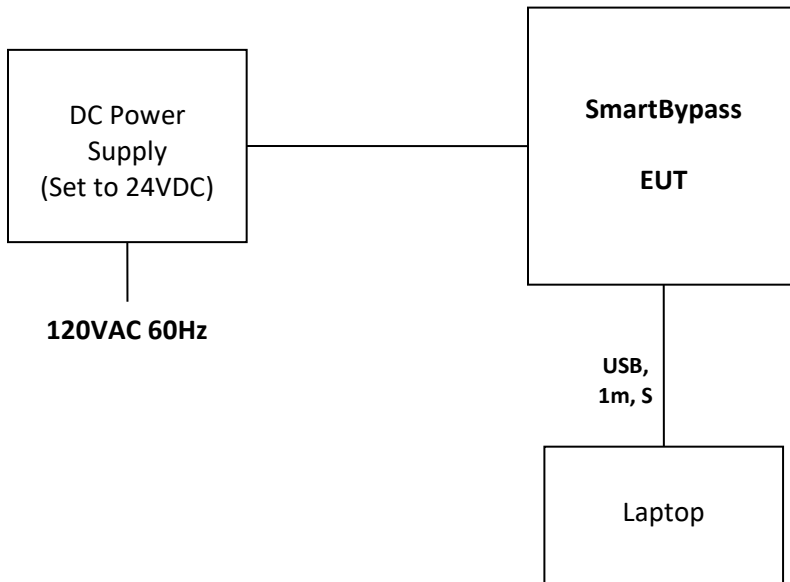

<b>S</b> = Shielded	<b>F</b> = With Ferrite
<b>U</b> = Unshielded	<b>m</b> = Length in Meters

### 3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive platform 15cm off the ground. The EUT is attached to peripherals and they are connected and operational (as typical as possible). The EUT is wired to transmit full power. During testing, all cables are manipulated to produce worst-case emissions.

The SmartBypass' size and weight were excessive (~2600 pounds) to safely lift onto an 80cm or 1.5m table for testing. Arrangements were made to safely test it as a floor standing unit.

### 3.4 Mode of Operation During Test

During transmitter testing, the transmitter was setup to transmit continuously at maximum RF power on the low channel, middle channel, high channel and with hopping channels enabled.

The Maximum power allowed by the manufacturer's provided GUI is RF Power = 15

### 3.5 Modifications Required for Compliance

Intertek installed no modifications during compliance testing in order to bring the product into compliance.

### 3.6 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.



**4.0 Emissions Measurement Results**

**4.1 20dB Bandwidth, and 99% Occupied Bandwidth  
FCC Rule 15.247(a)(1)**

**4.1.1 Procedure**

The Procedure described in the FCC Publication 558074 D01 Meas Guidance v05r02 & Section 7.8.7 of ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the 20dB bandwidth.

- Span = Approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
- RBW = 1% of the 20 dB bandwidth
- VBW = 3 x RBW
- Sweep = Auto
- Detector function = Peak
- Trace = Max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

For 99% power bandwidth measurement, the bandwidth was determined by using the built-in 99% occupied bandwidth function of the spectrum analyzer.

The antenna port of the EUT was connected to the input of a spectrum analyzer (SA). For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A Peak output reading was taken, a Display line was drawn for 20dB lower than Peak level. The 20dB bandwidth was determined from where the channel output spectrum intersected the display line.


Tested By	Test Date
Anderson Soungpanya	November 27, 2019

4.1.2 Test Result

Frequency MHz	20 dB FCC Bandwidth, kHz	99% Bandwidth, kHz	Plot #
2436.000000	793.269	764.423	1.1
2450.567868	846.154	764.423	1.2
2463.921747	846.154	764.423	1.3


<b>Results</b>	Complies
----------------	----------

Plot 1. 1 – 20dB Bandwidth and 99% Bandwidth Low Channel

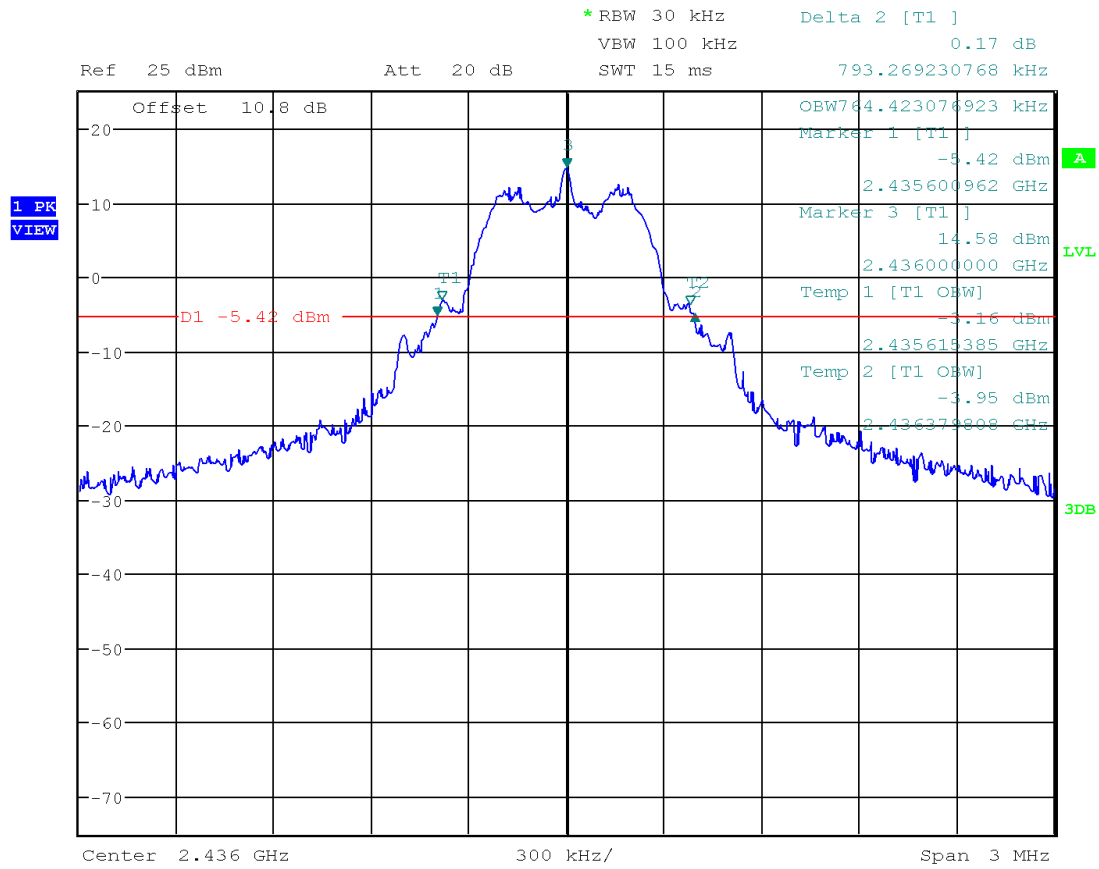


Date: 27.NOV.2019 08:53:12

Plot 1. 2 – 20dB Bandwidth and 99% Bandwidth Middle Channel

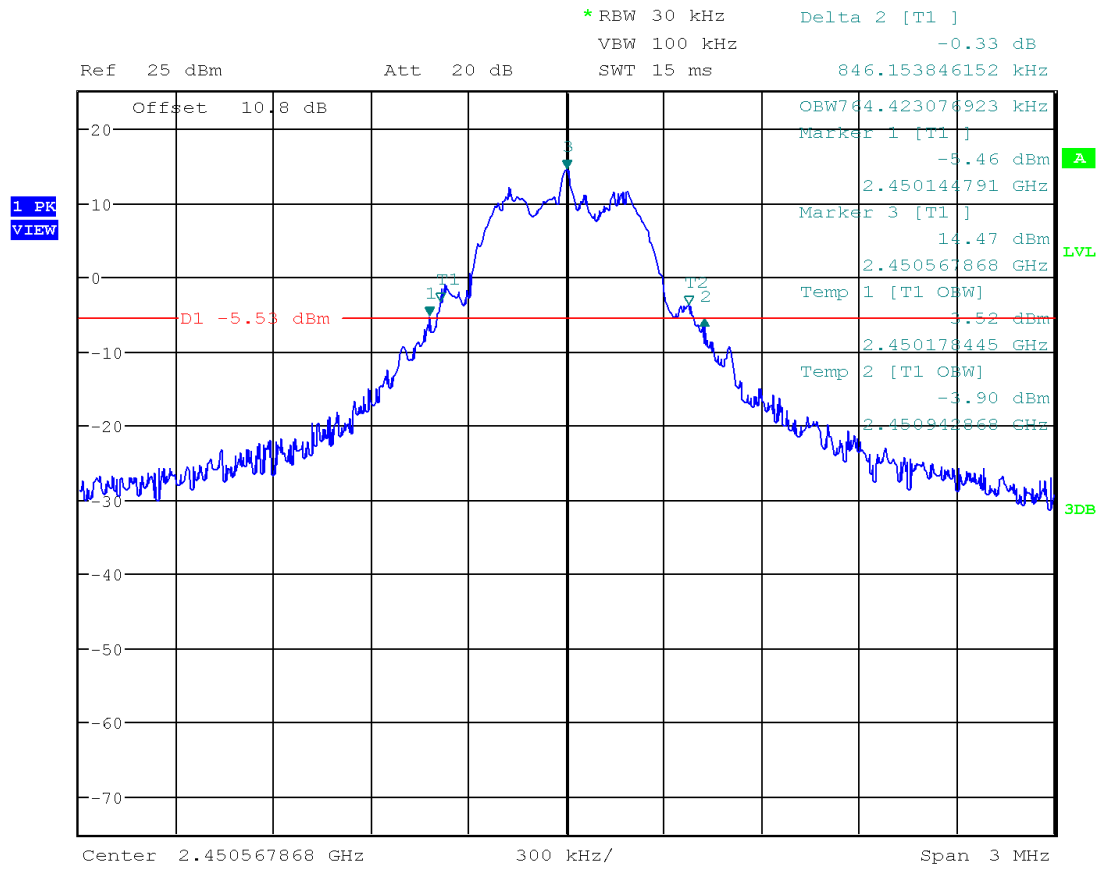

Date: 27.NOV.2019 08:40:30

Plot 1. 3 – 20dB Bandwidth and 99% Bandwidth High Channel

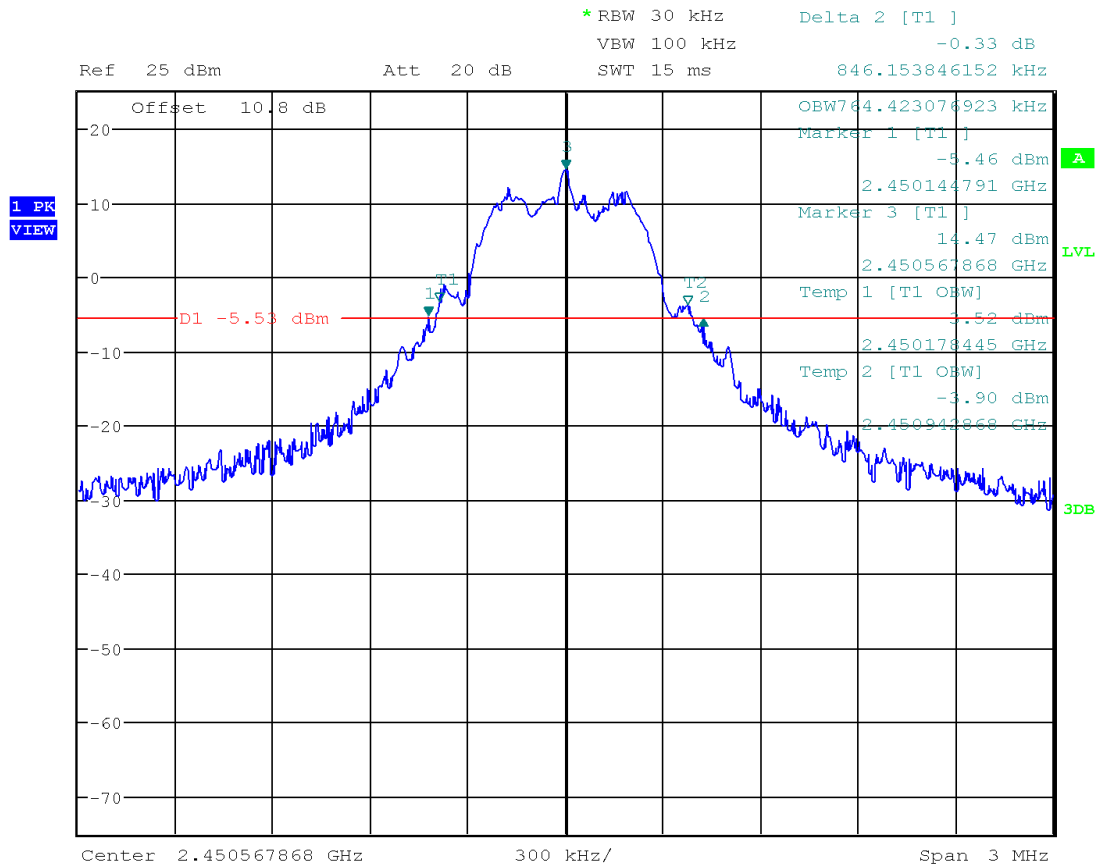

Date: 27.NOV.2019 08:40:30

4.2 Conducted Output Power at Antenna Terminals  
FCC Rule 15.247(b)(1)

4.2.1 Requirement

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

4.2.2 Procedure

The procedure described in FCC Publication 558074 D01 Meas Guidance v05r02 was used. Specifically, Section 7.8.5 of ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the RF Output Power.

- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- RBW > the 20 dB bandwidth of the emission being measured
- VBW = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the NOTE above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Power was read directly from the spectrum analyzer and cable loss correction was added to the reading to obtain the power at the antenna terminals.

Tested By	Test Date
Anderson Soungpanya	November 27, 2019


4.2.3 Test Result

Refer to the following plots for the test result:

Frequency MHz	Conducted Peak Power dBm	Conducted Peak Power mW	Plot #
2436.000000	16.40	43.652	2.1
2450.567868	16.17	41.400	2.2
2463.921747	15.93	39.174	2.3

<b>Results</b>	64 Channels used; Complies
----------------	----------------------------


Plot 2. 2 – Output Power Low Channel

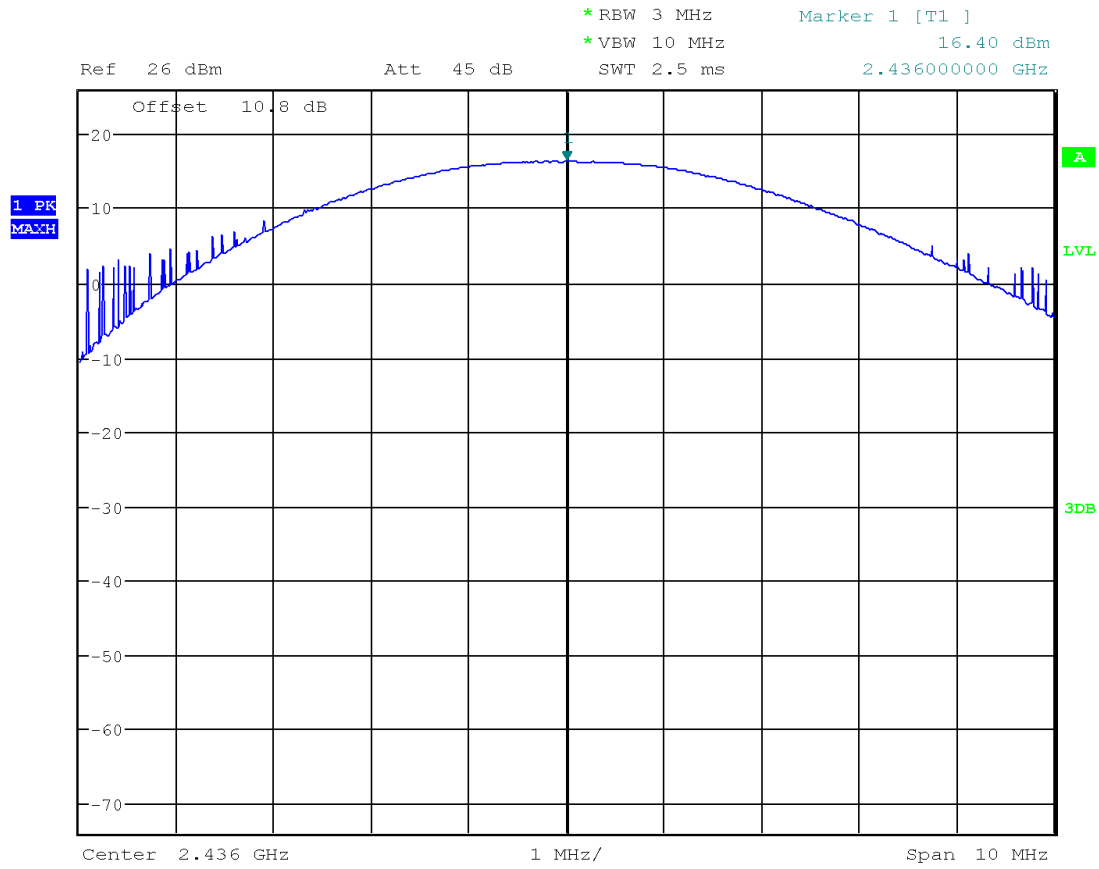

Date: 27.NOV.2019 08:23:26




*Plot 2.2 – Output Power Middle Channel*

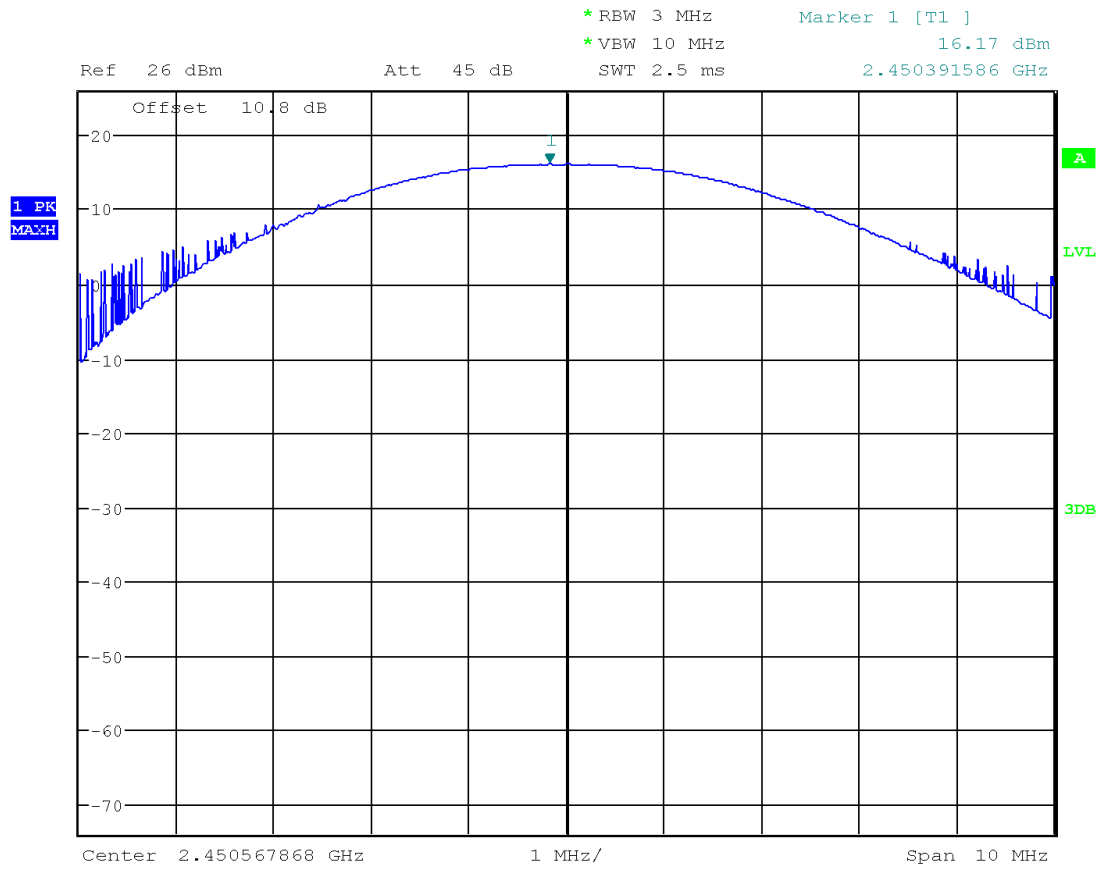

Date: 27.NOV.2019 08:24:37

*Plot 2. 3 – Output Power High Channel*

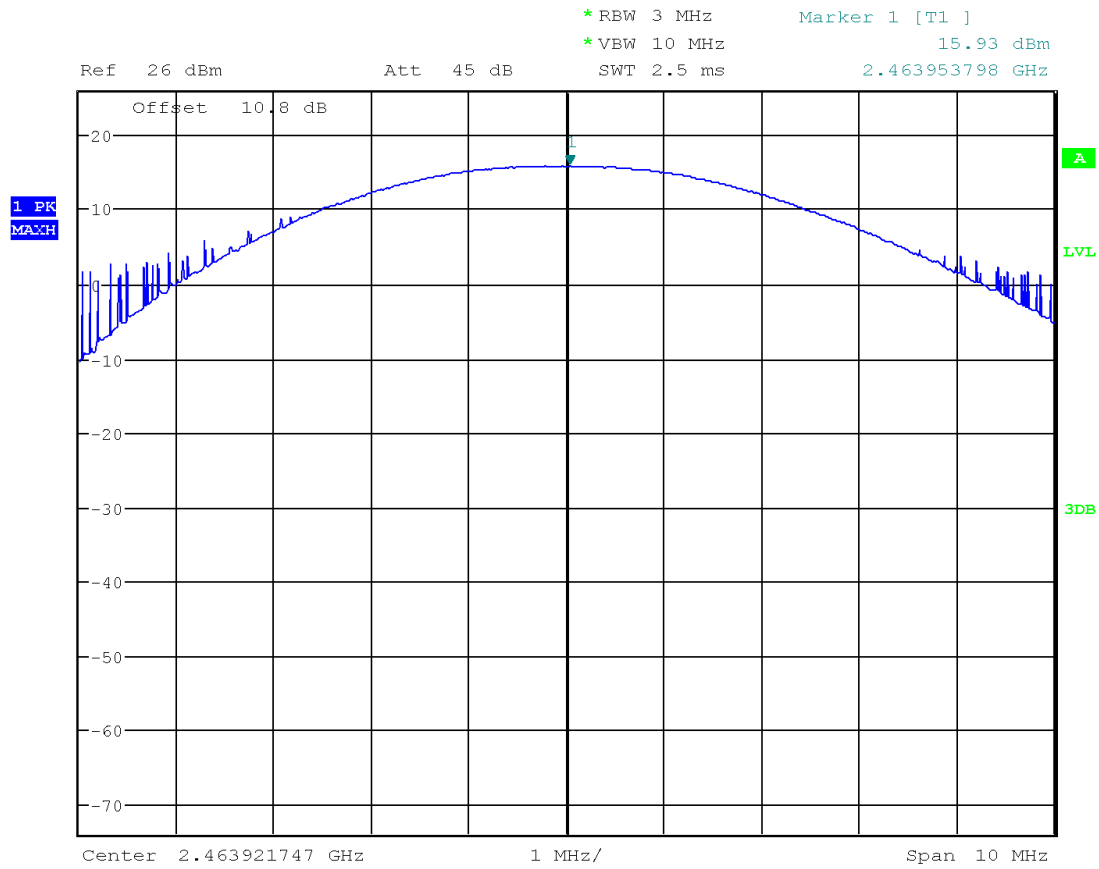

Date: 27.NOV.2019 08:25:35

4.3 Carrier Frequency Separation  
FCC 15.247 (a)(1)

4.3.1 Requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2 Procedure

The procedure described in FCC Publication 558074 D01 Meas Guidance v05r02 was used. Specifically, Section 7.8.2 of ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Carrier Frequency Separation.

- The EUT must have its hopping function enabled
- Span = wide enough to capture the peaks of two adjacent channels
- Resolution (or IF) Bandwidth (RBW) = 1% of the span
- Video (or Average) Bandwidth (VBW) = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Tested By	Test Date
Anderson Soungpanya	November 27, 2019

### 4.3.3 Test Result

The worst case 20dB Bandwidth is 845.154 kHz, therefore the minimum Carrier Frequency Separation shall be greater than two thirds of 845.154 kHz (563.718 kHz). The measured channel separation is 1.218 MHz. Carrier Frequency Separation meets the minimum requirement. Please refer to spectrum analyzer Plot 3.1 below for the test result.

*Plot 3.1– Channel Separation*

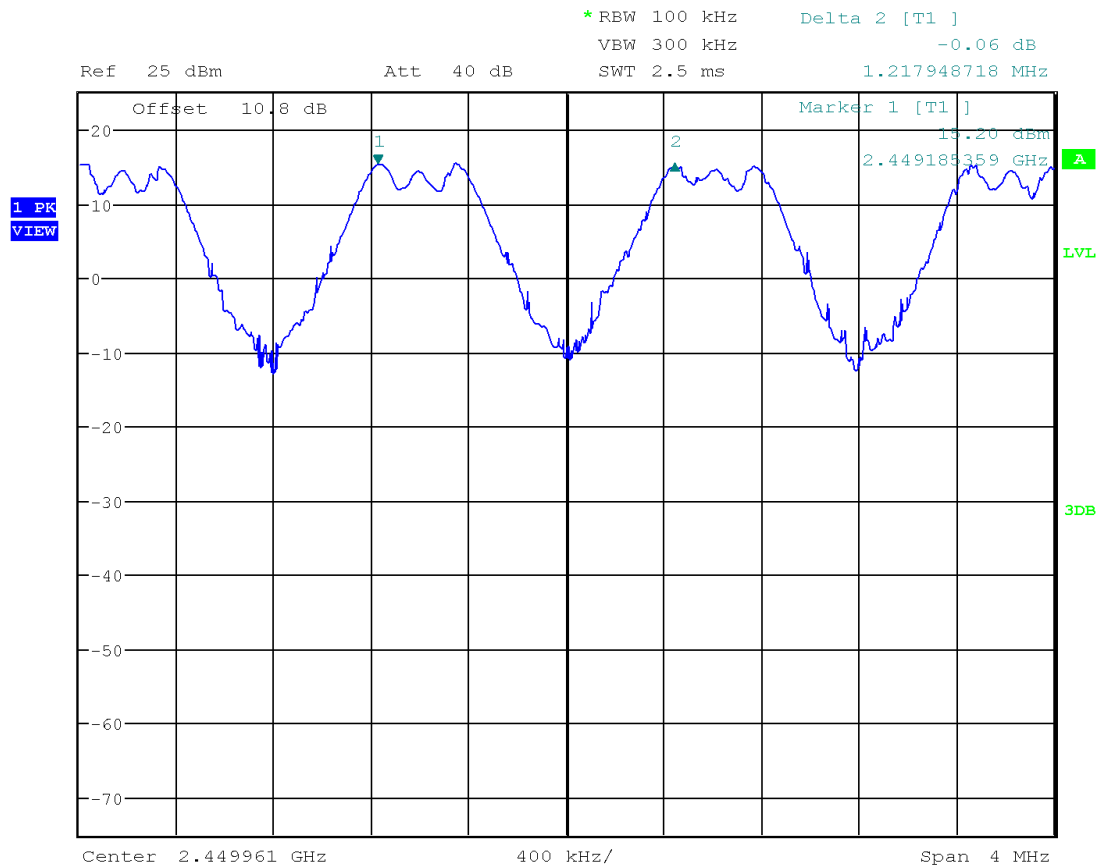

Date: 27.NOV.2019 09:33:25

**Results**      **Complies**

4.4 Number of Channels  
FCC 15.247 (a)(1)(iii)

4.4.1 Requirement

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

4.4.2 Procedure

The procedure described in FCC Publication 558074 D01 Meas Guidance v05r02 was used. Specifically, Section 7.8.3 of ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Number of Channels.

- The EUT must have its hopping function enabled.
- Span = the frequency band of operation
- RBW = 1% of the span
- VBW = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

With the analyzer set to MAX HOLD, readings were taken once channels were filled in. The channel peaks were recorded and compared to the minimum number of channels required in the regulation.

Tested By	Test Date
Anderson Soungpanya	November 27, 2019



4.5 Average Channel Occupancy Time  
FCC 15.247(a)(1)

4.5.1 Requirement

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

4.5.2 Procedure

The procedure described in FCC Publication 558074 D01 Meas Guidance v05r02 was used. Specifically, Section 7.8.4 of ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Average Channel Occupancy Time.

- The EUT must have its hopping function enabled.
- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW = 3 x RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. An oscilloscope may be used instead of a spectrum analyzer.

The spectrum analyzer center frequency was set to one of the known hopping channels, the SPAN was set to ZERO SPANS, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.


Tested By	Test Date
Anderson Soungpanya	November 27, 2019

4.5.3 Test Results

No. of Burst in 960 ms	Burst On Time (ms)	Dwell Time (ms) (Burst Time * No. of Burst * 10)	Dwell Time limit (ms)
7	0.442	30.94	400

The 20-dB bandwidth of the hopping channel is greater than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of the number of channels (24) multiplied by 0.4 second (9.6 seconds).

*Burst Time*

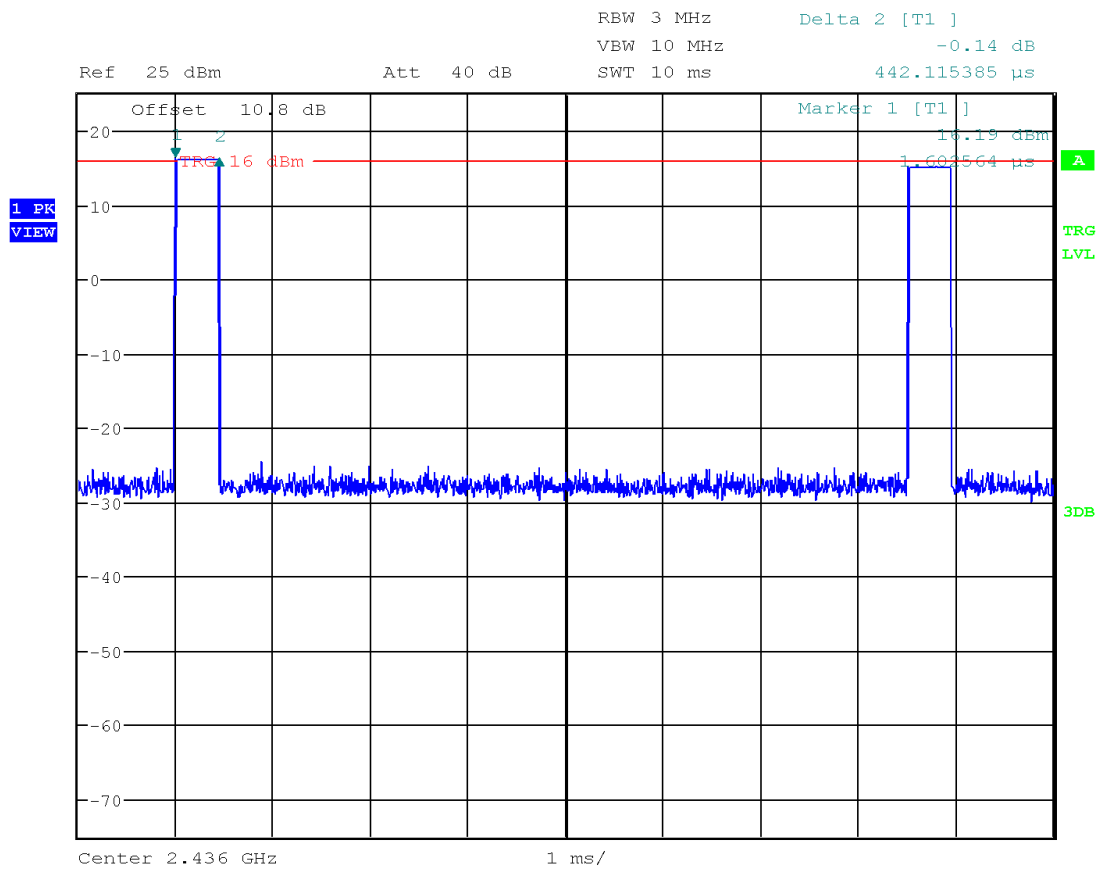


Date: 27.NOV.2019 09:37:24



4.5.3 Test Results (Continued)

*Number of Burst in 960 ms*

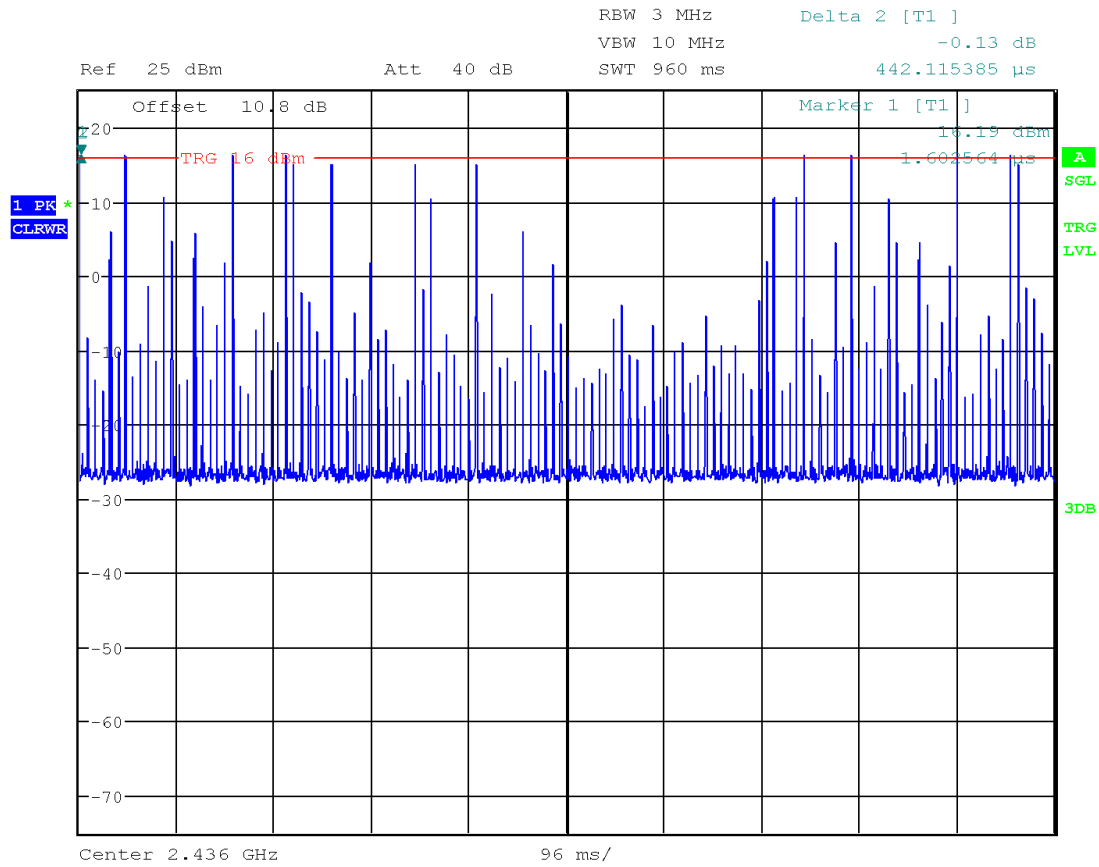

Date: 27.NOV.2019 09:40:48

**Results**      **Complies**

4.6 Out-of-Band Conducted Emissions  
FCC 15.247(d)

4.6.1 Requirement

In any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.6.2 Procedure

The procedure described in FCC Publication 558074 D01 Meas Guidance v05r02 was used. Specifically, Section 7.8.8 of ANSI C63.10:2013 for Frequency Hopping Spread Spectrum Systems was used to determine the Out-of-Band Conducted Emissions.

- Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
- RBW = 100 kHz
- VBW = 3 x RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

A spectrum analyzer was connected to the antenna port of the transmitter. Analyzer Resolution Bandwidth was set to 100 kHz. For each channel investigated, the in-band and out-of-band emission measurements were performed. The out-of-band emissions were measured from 30 MHz to 26 GHz.

Tested By	Test Date
Anderson Soungpanya	November 27, 2019

4.6.3 Test Result

Refer to the following plots and out-of-band conducted spurious emissions at the Band-Edge, Table 4.1 & 4.2 for the test results:

Table 4.1


Frequency MHz	Description	Plot #
2436.000000	Scan 30 MHz – 26 GHz	4.1
2450.567868	Scan 30 MHz – 26 GHz	4.2
2463.921747	Scan 30 MHz – 26 GHz	4.3

**Out-of-Band Conducted Spurious Emissions at the Band-Edge:**


Table 4.2

Channel	Frequency MHz	Out-band emissions margin to In-band emissions	Plot #
0	2436.000000	Complies, Greater than 20dB	4.4
Hopping	Low Band Edge	Complies, Greater than 20dB	4.5
23	2463.921747	Complies, Greater than 20dB	4.6
Hopping	High Band Edge	Complies, Greater than 20dB	4.7


Plot 4.1  
*Transmitter Spurious, Low Channel*

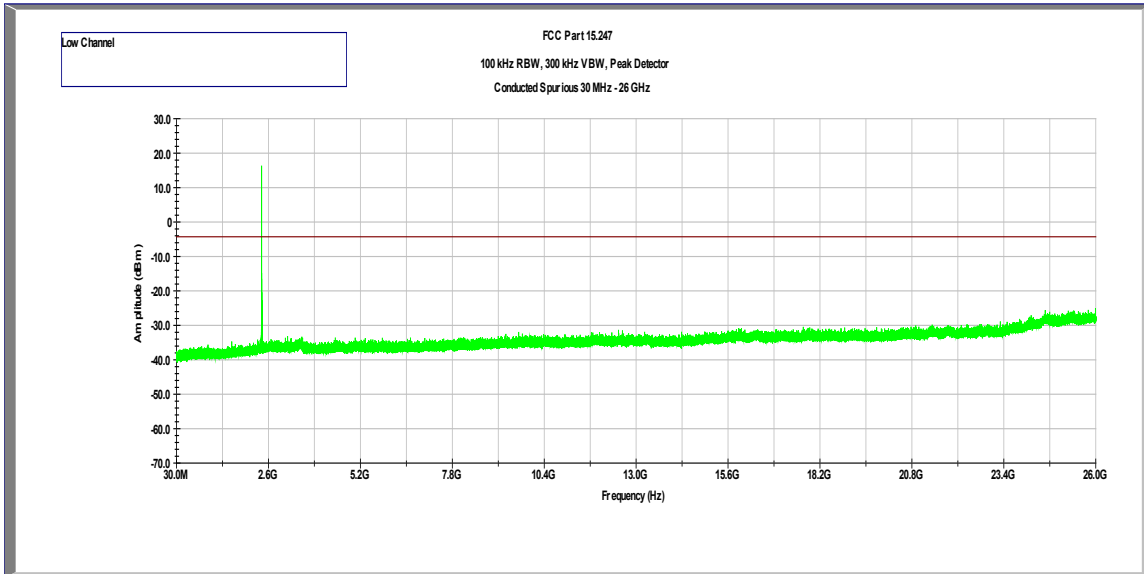


Plot 4.2  
*Transmitter Spurious, Middle Channel*

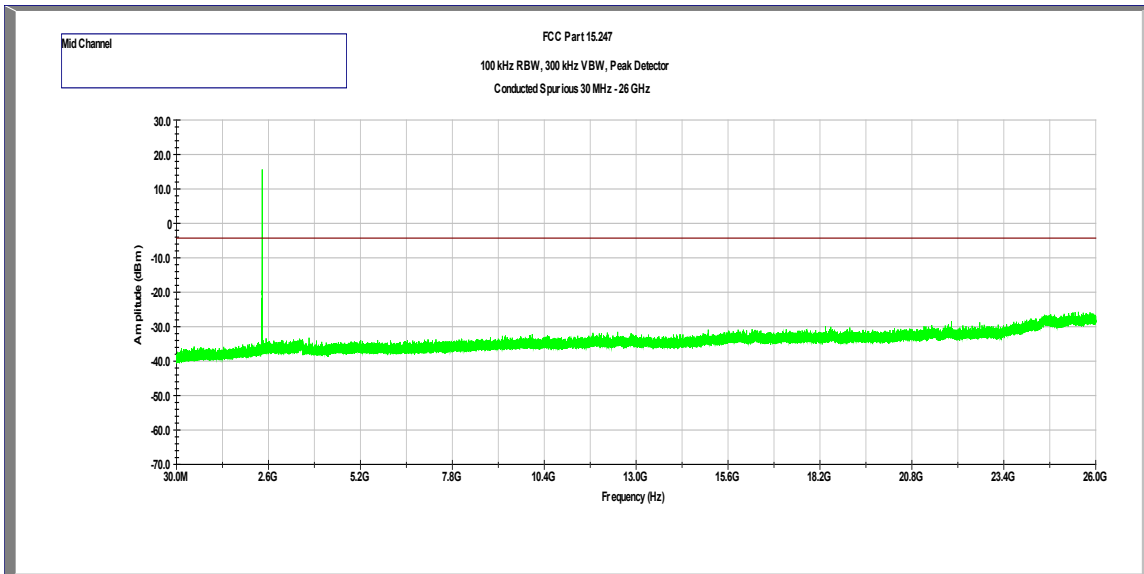

Plot 4.3  
*Transmitter Spurious, High Channel*

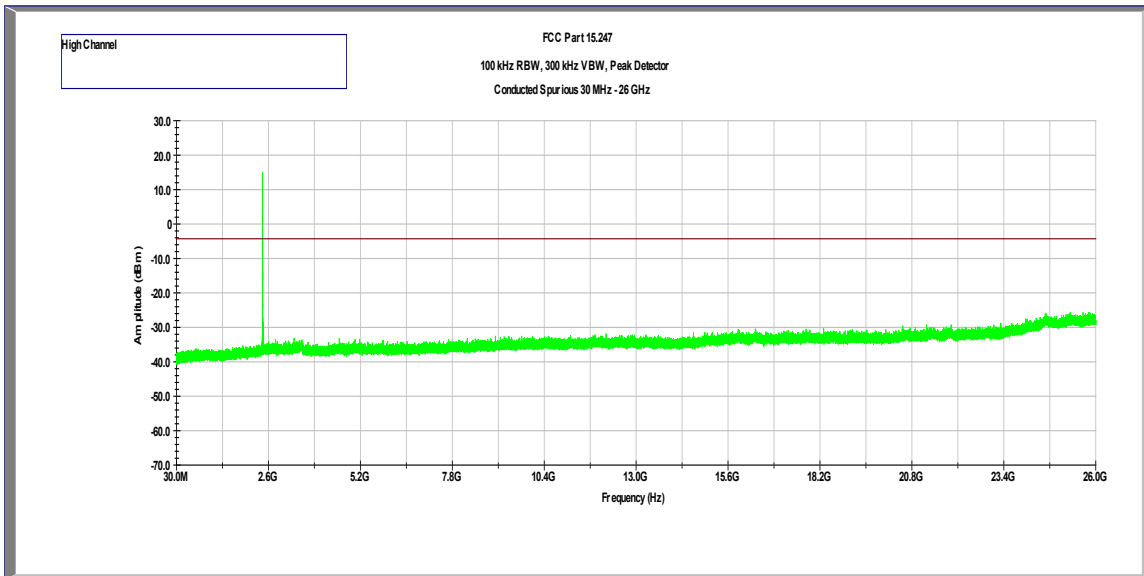


**Plot 4.4**  
*Conducted Band Edge, Low Channel*

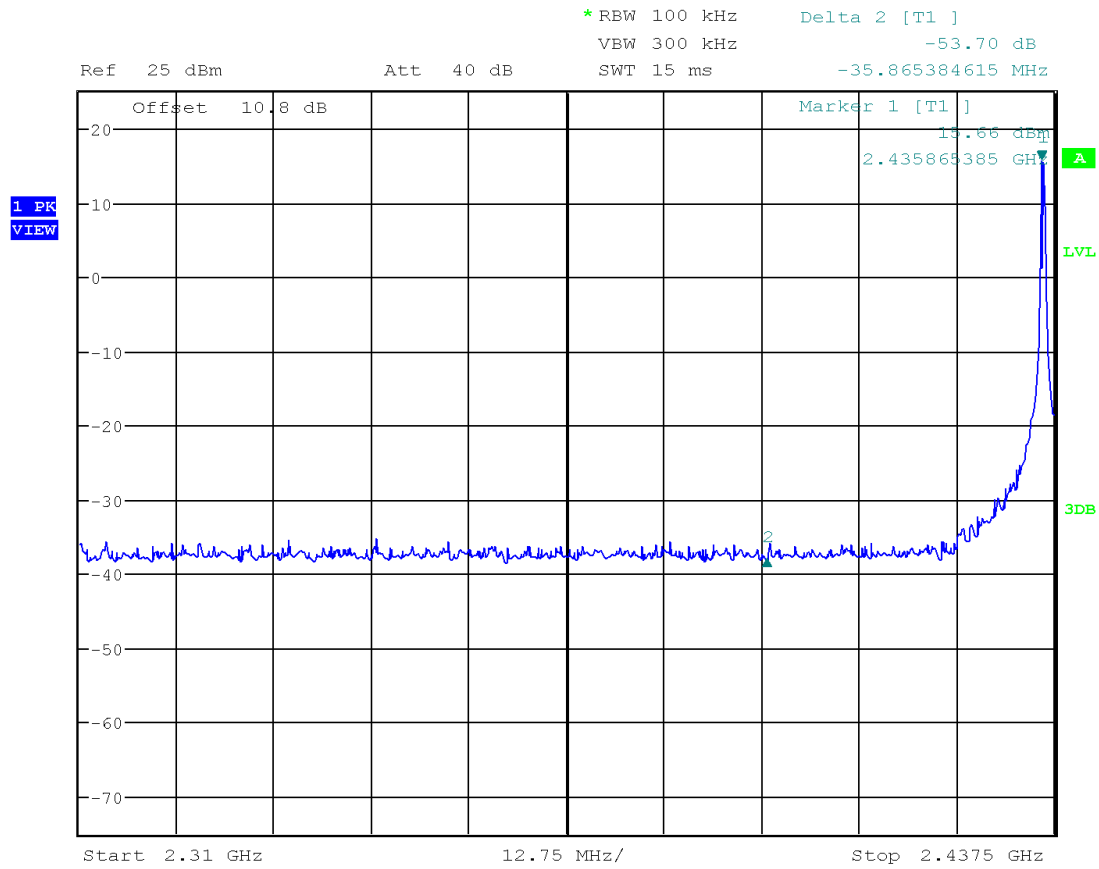


Date: 27.NOV.2019 08:55:35

**Plot 4.11**  
*Conducted Band Edge (Hopping)*

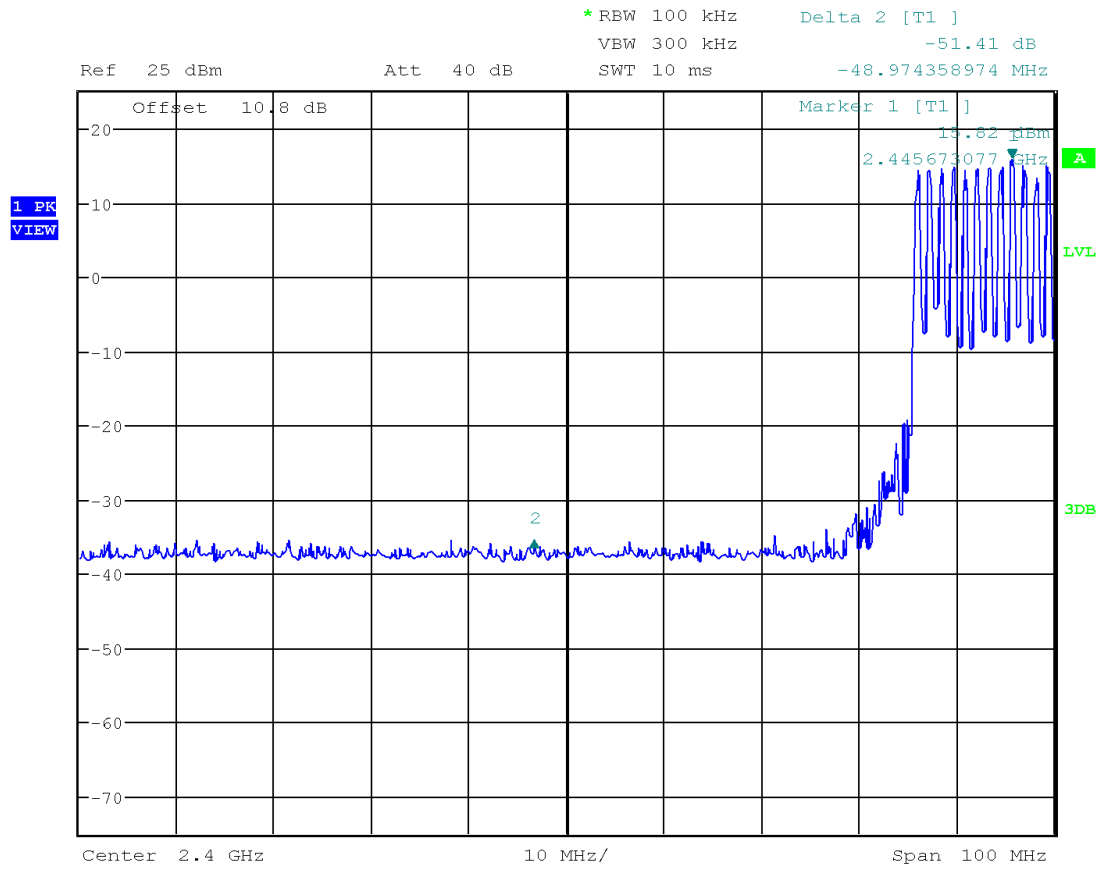

Date: 27.NOV.2019 09:15:53


**Plot 4.12**  
*Conducted Band Edge, High Channel*

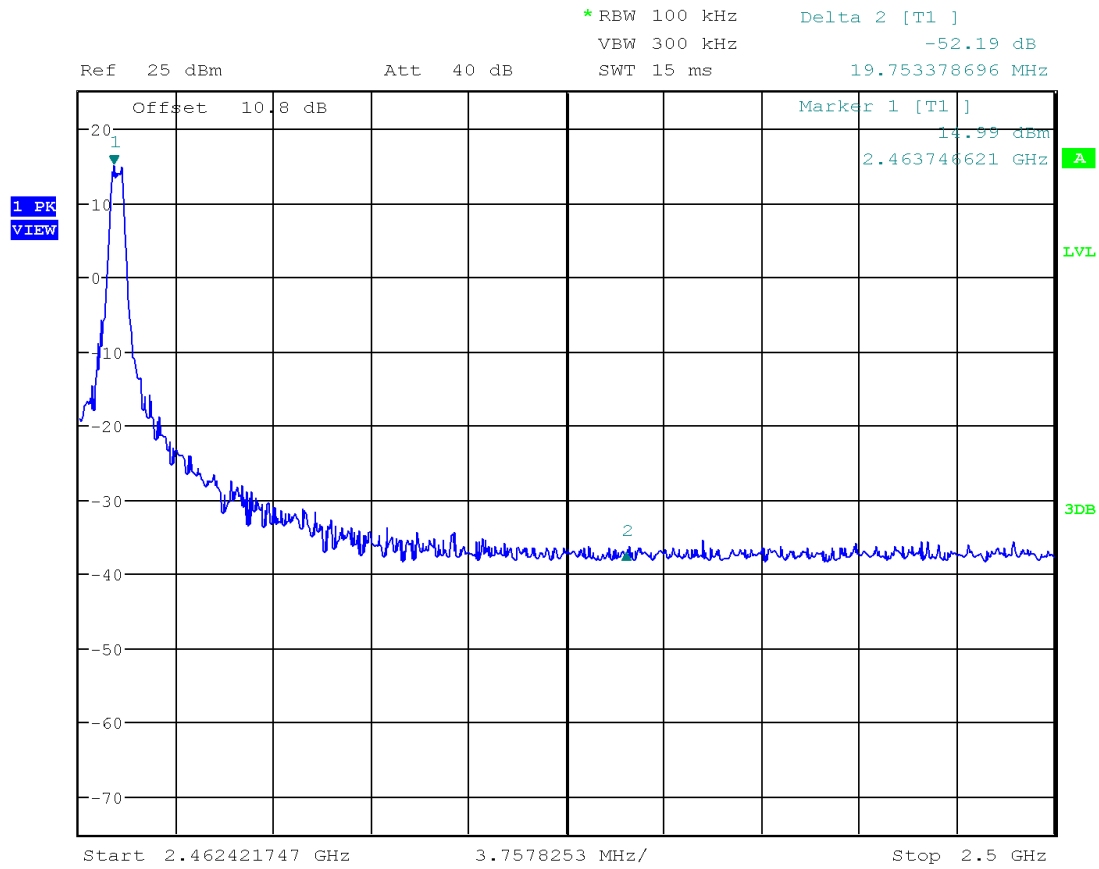

Date: 27.NOV.2019 08:58:38



**Plot 4.13**  
*Conducted Band Edge (Hopping)*

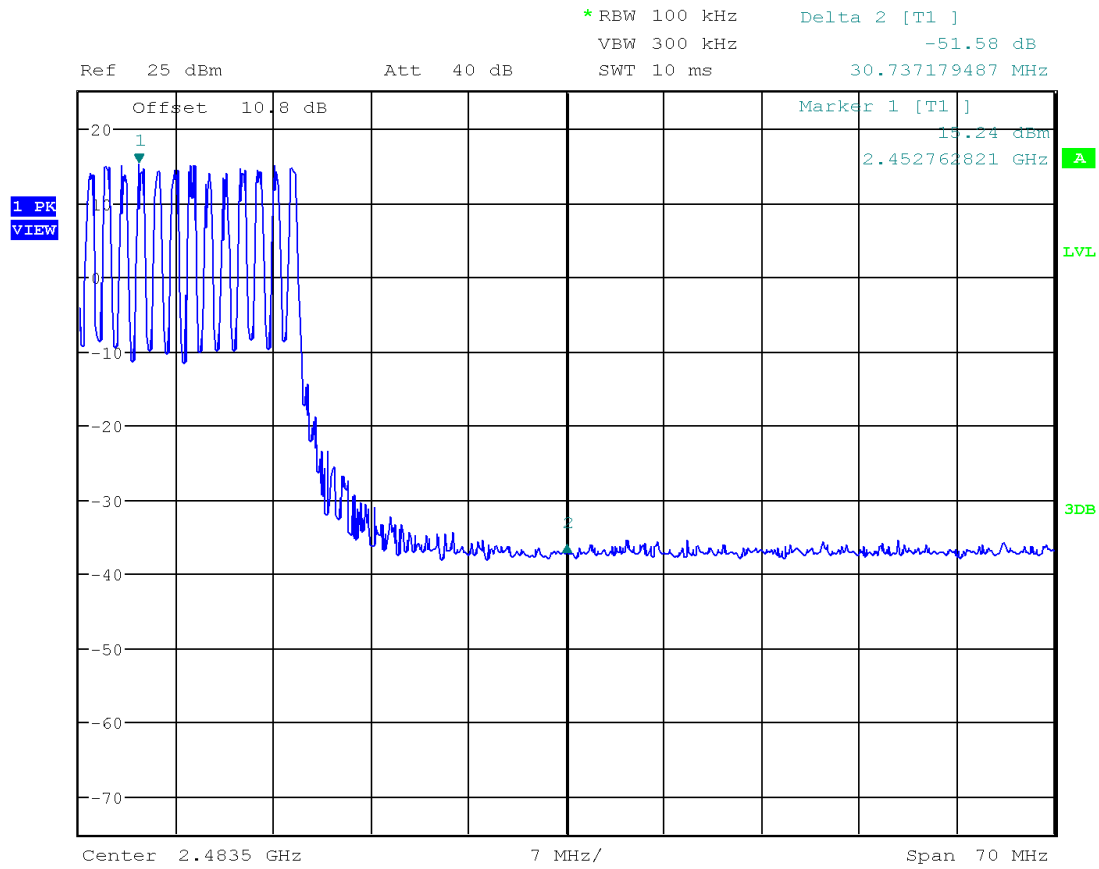

Date: 27.NOV.2019 09:13:03

**Results**      **Complies**

4.7 Transmitter Radiated Emissions  
FCC Rule 15.247(d), 15.209, 15.205

4.7.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.7.2 Procedure

Radiated emission measurements were performed from 30 MHz to 10,000 MHz. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz.

If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements are made with a preamp from 30 MHz to 26 GHz.

Measurements may be made with a Peak Detector and compared to QP limits for 30 MHz – 1 GHz and Average limits for 1 GHz – 26 GHz.

Radiated measurements were performed in the nominal orientation of the EUT. Out-of-Band Radiated Spurious Emissions Measurements were performed with a 50-ohm load on the antenna port.

#### 4.7.3 Field Strength Calculation

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$ ; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB( $\mu$ V/m)

RA = Receiver Amplitude (including preamplifier) in dB( $\mu$ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB( $\mu$ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB( $\mu$ V/m). This value in dB( $\mu$ V/m) was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB( $\mu$ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32$  dB( $\mu$ V/m).

Level in  $\mu$ V/m = Common Antilogarithm [(32 dB $\mu$ V/m)/20] = 39.8  $\mu$ V/m.

4.7.4 Antenna-port conducted measurements

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

4.7.5 General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified for determining quasi-peak, peak, and average conducted output power, respectively.
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:  
 $E = \text{EIRP} - 20\log D + 104.8 + \text{DCF}$  (DCF for Average measurements)  
 where:  
 E = electric field strength in dB $\mu$ V/m,  
 EIRP = equivalent isotropic radiated power in dBm  
 D = specified measurement distance in meters.  
 DCF = Duty Cycle Correction Factor
- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test

4.7.6 Test Results


Tested By	Test Date
Anderson Soungpanya	December 2 – 10, 2019

These measurements were performed with the consideration of path losses and the addition of a 4.42 dBi Antenna.

4.7.6 Test Results (Continued)

**Test Results: 15.209/15.205 Radiated Restricted Band Emissions**


Conducted Out-of-Band Spurious Emissions at the Band Edge – Tx @ Low Channel, Peak

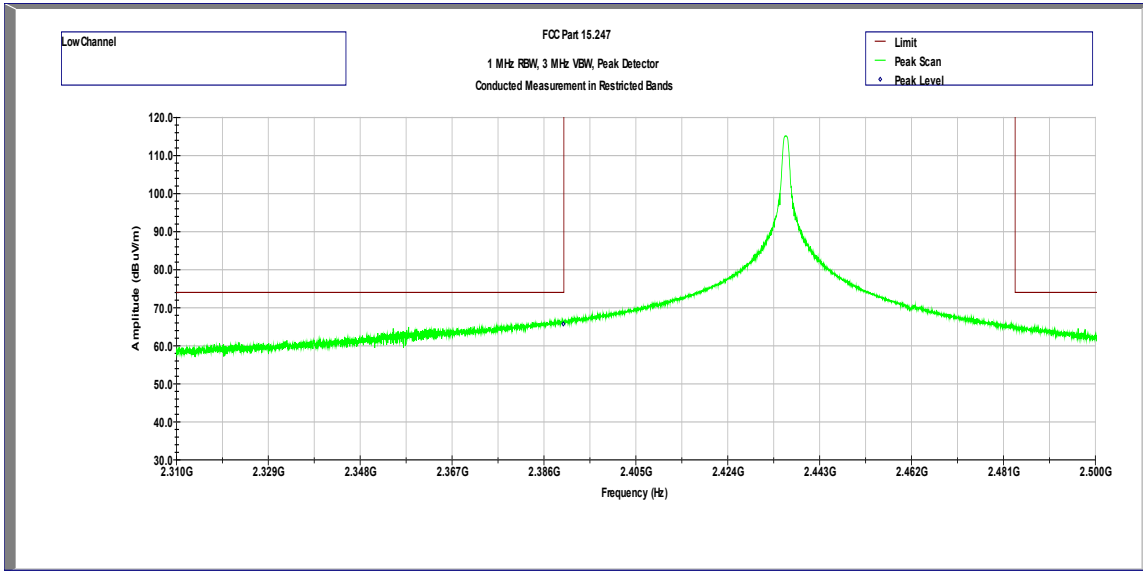

Frequency	Corrected Peak Amplitude	Peak Limit	Duty Cycle Correction Factor	Corrected Avg Amplitude	Avg Limit	Results
GHz	dB(μV/m)	dB(μV/m)	dB	dB(μV/m)	dB(μV/m)	
2.390	64.71	74.0	-20.0	44.71	54.0	Pass

Note: The spurious identified in table above are compliant with 15.209 Average limit (54dBuV/m) by subtracting the Duty Cycle Correction Factor of 20dB to the Peak Amplitude (See Annex A for Duty Cycle calculation).


Conducted Out-of-Band Spurious Emissions at the Band Edge – Tx @ High Channel, Peak

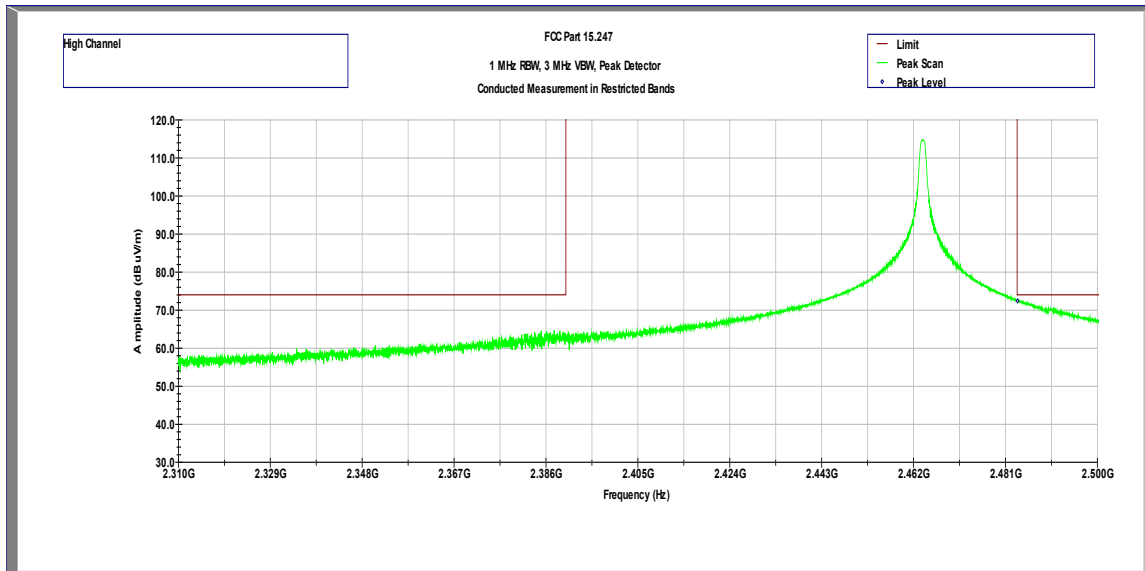


Frequency	Corrected Peak Amplitude	Peak Limit	Duty Cycle Correction Factor	Corrected Avg Amplitude	Avg Limit	Results
GHz	dB(μV/m)	dB(μV/m)	dB	dB(μV/m)	dB(μV/m)	
2.4835	72.42	74.0	-20.0	52.42	54.0	Pass

Note: The spurious identified in table above are compliant with 15.209 Average limit (54dBuV/m) by subtracting the Duty Cycle Correction Factor of 20dB to the Peak Amplitude (See Annex A for Duty Cycle calculation).

Out-of-Band Spurious Emissions at Antenna Port: 30 MHz - 1 GHz; Low Channel

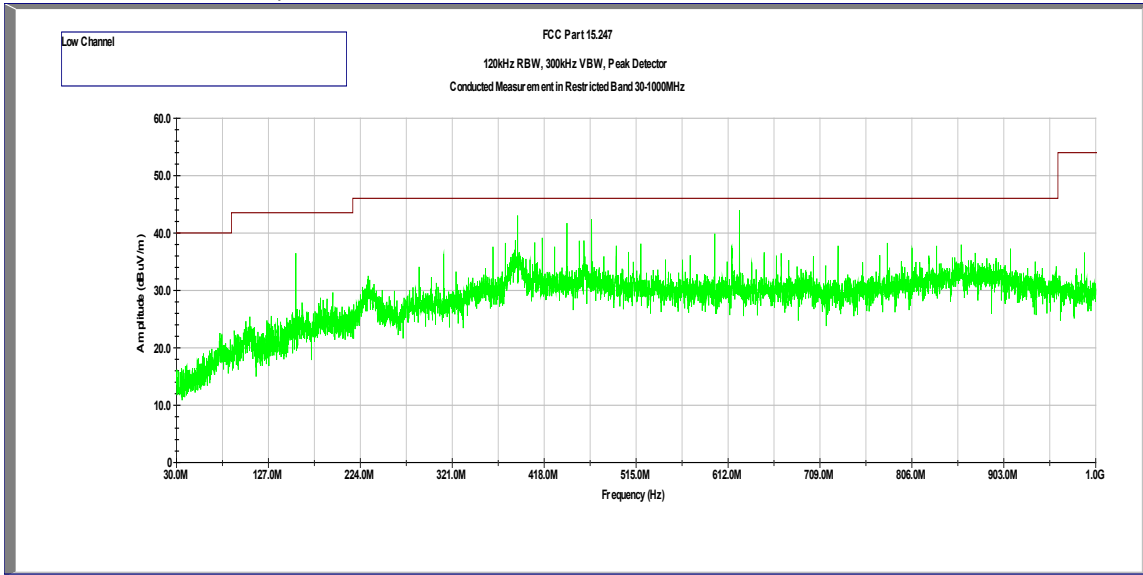


Out-of-Band Spurious Emissions at Antenna Port: 1 - 25 GHz; Low Channel

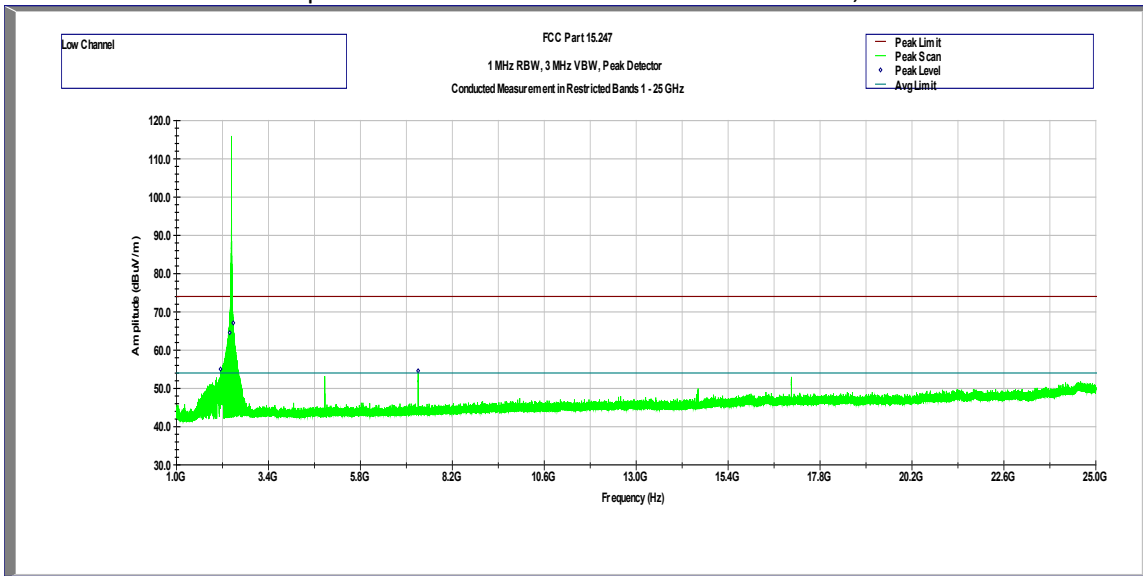


Frequency	Peak Amplitude	Peak Limit	Duty Cycle Correction	Avg Amplitude	Avg Limit	Results
GHz	dB(μV/m)	dB(μV/m)	dB	dB(μV/m)	dB(μV/m)	
2.1493	55.00	74.0	-20.0	35.00	54.0	Pass
2.3900	64.71	74.0	-20.0	44.71	54.0	Pass
2.4835	67.08	74.0	-20.0	47.08	54.0	Pass
7.3084	54.56	74.0	-20.0	34.56	54.0	Pass

Note: The spurious identified in table above are compliant with 15.209 Average limit (54dBuV/m) by subtracting the Duty Cycle Correction Factor of 20dB to the Peak Amplitude (See Annex A for Duty Cycle calculation).

Out-of-Band Spurious Emissions at Antenna Port: 30 MHz - 1 GHz; Mid Channel

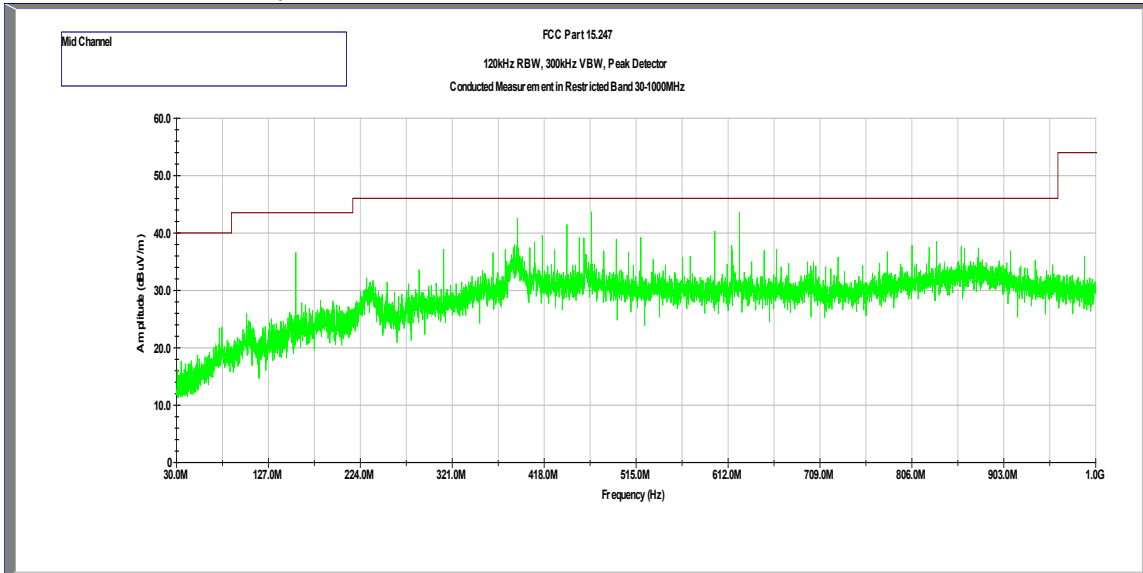

Out-of-Band Spurious Emissions at Antenna Port: 1 - 25 GHz; Mid Channel

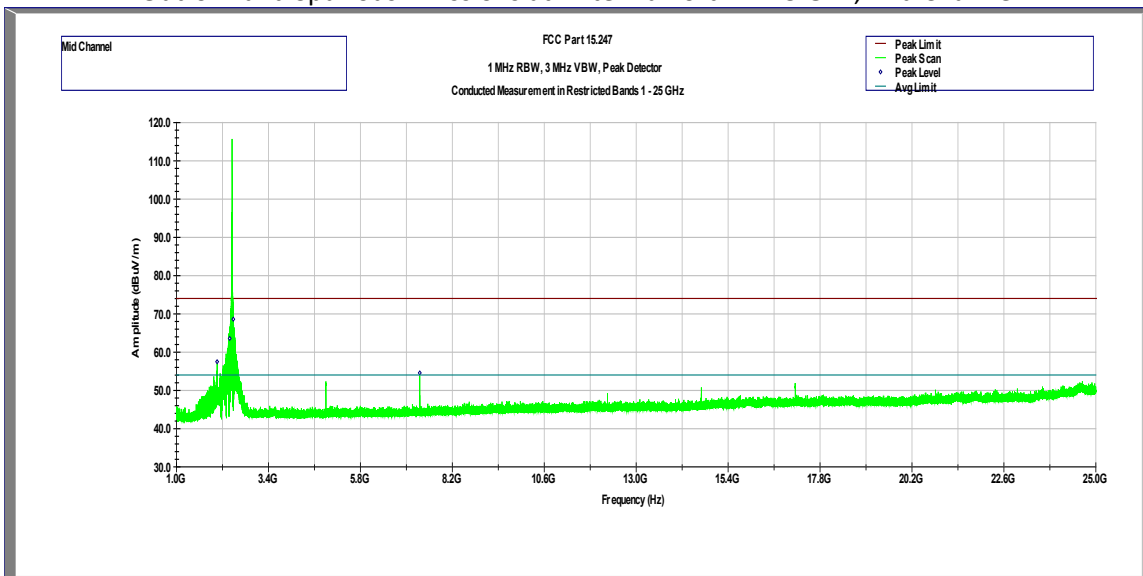


Frequency	Peak Amplitude	Peak Limit	Duty Cycle Correction	Avg Amplitude	Avg Limit	Results
GHz	dB(μV/m)	dB(μV/m)	dB	dB(μV/m)	dB(μV/m)	
2.0605	57.48	74.0	-20.0	37.48	54.0	Pass
2.3900	63.55	74.0	-20.0	43.55	54.0	Pass
2.4835	68.57	74.0	-20.0	48.57	54.0	Pass
7.3522	54.55	74.0	-20.0	34.55	54.0	Pass


Note: The spurious identified in table above are compliant with 15.209 Average limit (54dBuV/m) by subtracting the Duty Cycle Correction Factor of 20dB to the Peak Amplitude (See Annex A for Duty Cycle calculation).



Out-of-Band Spurious Emissions at Antenna Port: 30 MHz - 1 GHz; High Channel

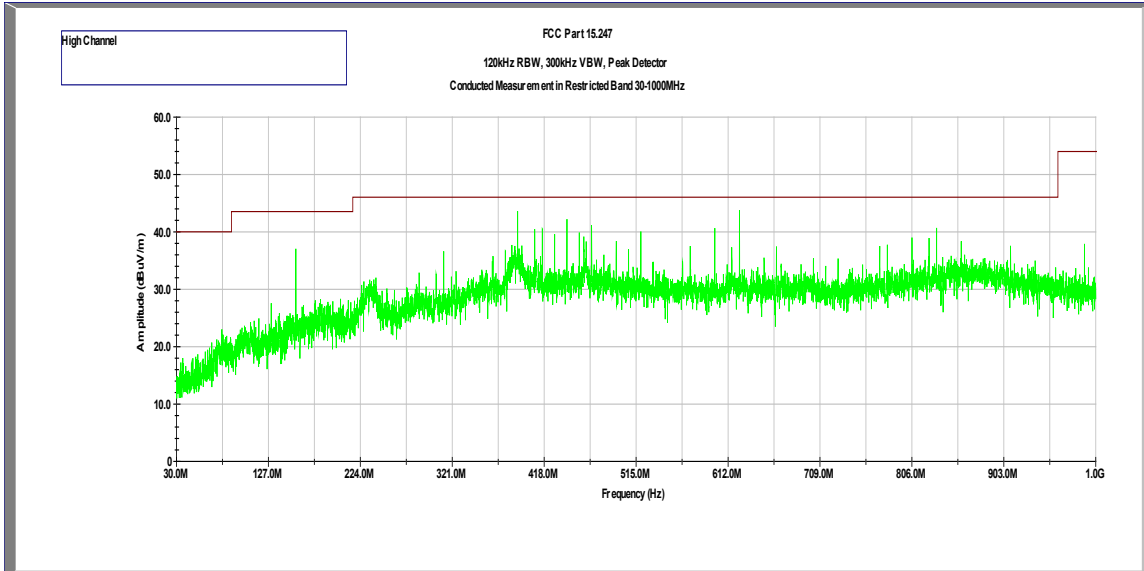

Out-of-Band Spurious Emissions at Antenna Port: 1 - 25 GHz; High Channel

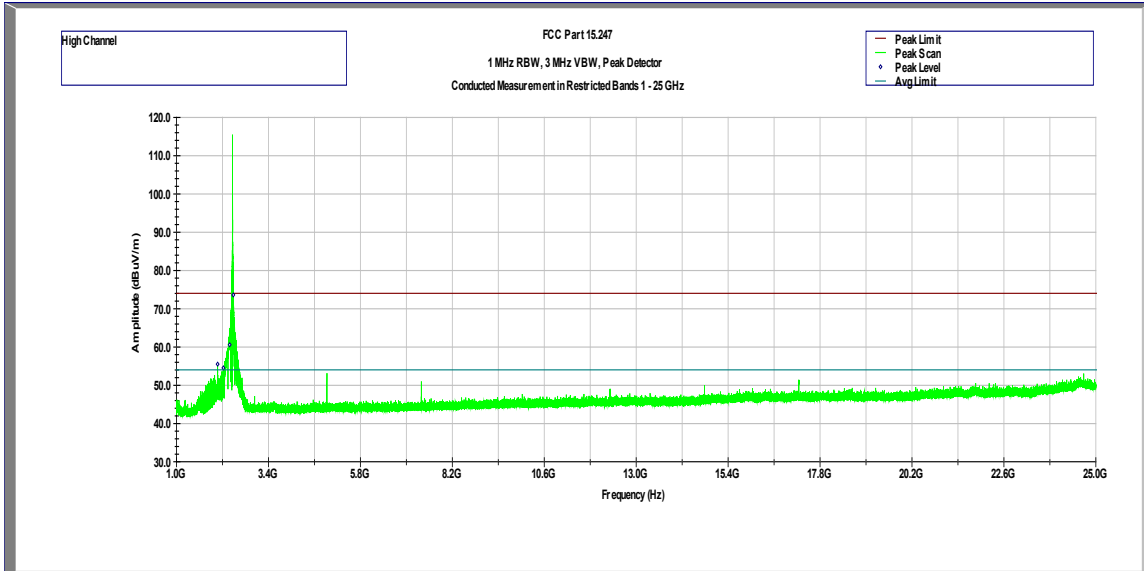


Frequency	Peak Amplitude	Peak Limit	Duty Cycle Correction	Avg Amplitude	Avg Limit	Results
GHz	dB(µV/m)	dB(µV/m)	dB	dB(µV/m)	dB(µV/m)	
2.0734	55.48	74.0	-20.0	35.48	54.0	Pass
2.2249	54.52	74.0	-20.0	34.52	54.0	Pass
2.3900	60.55	74.0	-20.0	40.55	54.0	Pass
2.4835	72.42	74.0	-20.0	52.42	54.0	Pass

Note: The spurious identified in table above are compliant with 15.209 Average limit (54dBuV/m) by subtracting the Duty Cycle Correction Factor of 20dB to the Peak Amplitude (See Annex A for Duty Cycle calculation).


**Out-of-Band Radiated Spurious Emissions**

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2436 MHz

**Radiated Spurious Emissions 30 MHz - 1000 MHz**

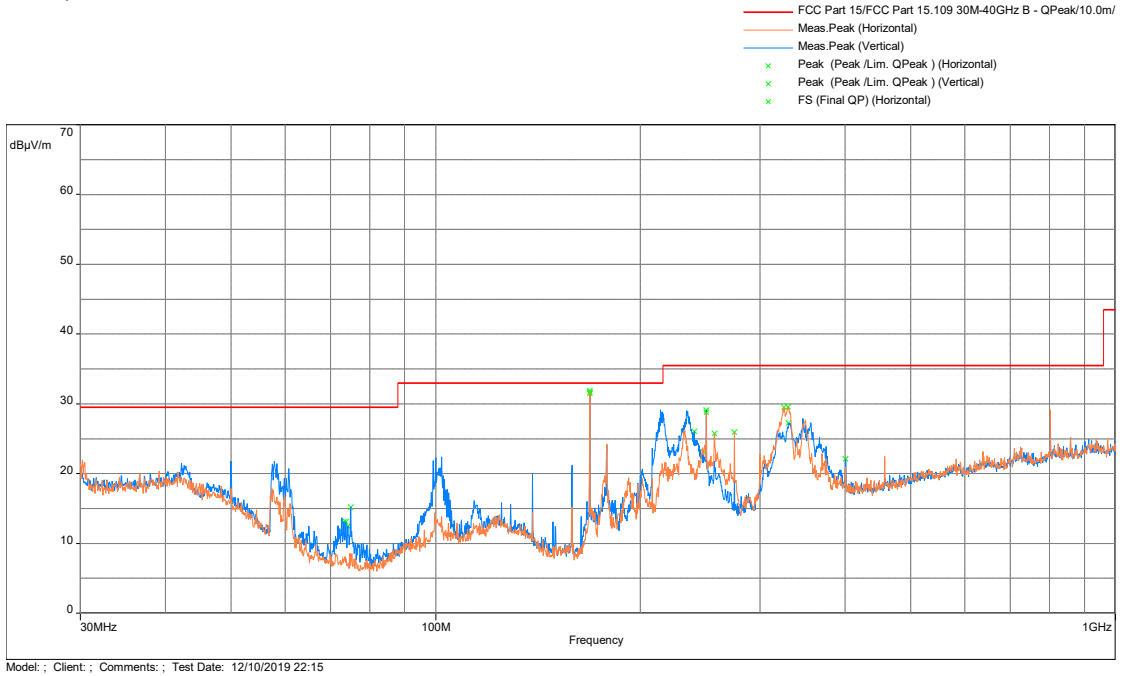

**Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Avg & Limit**

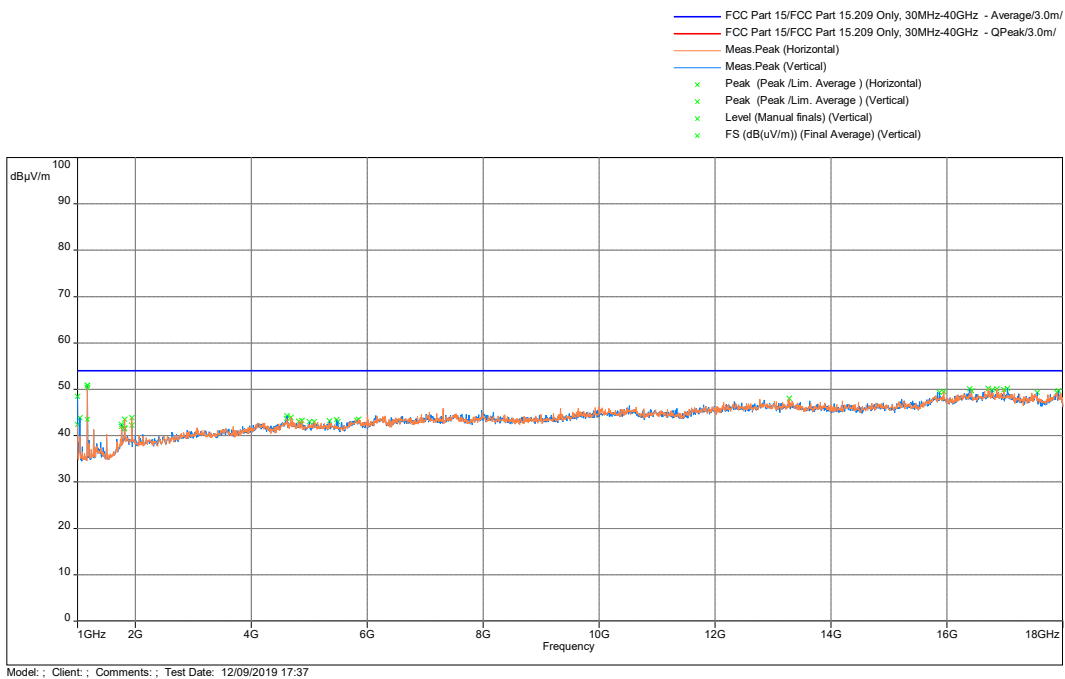

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2436 MHz

Frequency	FS @10m	Limit@10m	Margin	Height	Angle	Polarization	Correction
MHz	(dBµV/m)	(dBµV/m)	(dB)	(m)	(°)		(dB)
168.578	31.89	33.00	-1.11	3.92	359	Horizontal	-15.17
249.996	29.09	35.50	-6.41	4.00	38	Vertical	-11.83
249.996	28.77	35.50	-6.73	4.00	40	Horizontal	-11.83
325.042	29.49	35.50	-6.01	4.00	64	Horizontal	-9.4
330.053	29.58	35.50	-5.92	4.00	72	Horizontal	-9.2
330.344	27.27	35.50	-8.23	2.50	1	Vertical	-9.2
Frequency	FS @3m	Limit@3m	Margin	Height	Angle	Polarization	Correction
MHz	(dBµV/m)	(dBµV/m)	(dB)	(m)	(°)		(dB)
1000.000	48.51	54.00	-5.49	1.01	134	Vertical	-17.98
1172.501	43.55	54.00	-10.45	2.04	90	Vertical	-18.78


<b>Results</b>	Complies
----------------	----------

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz


Note: Raw Amplitude = FS - Correction (Antenna Factor + Cable Factor – Preamp Factor)

Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2450.567868 MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

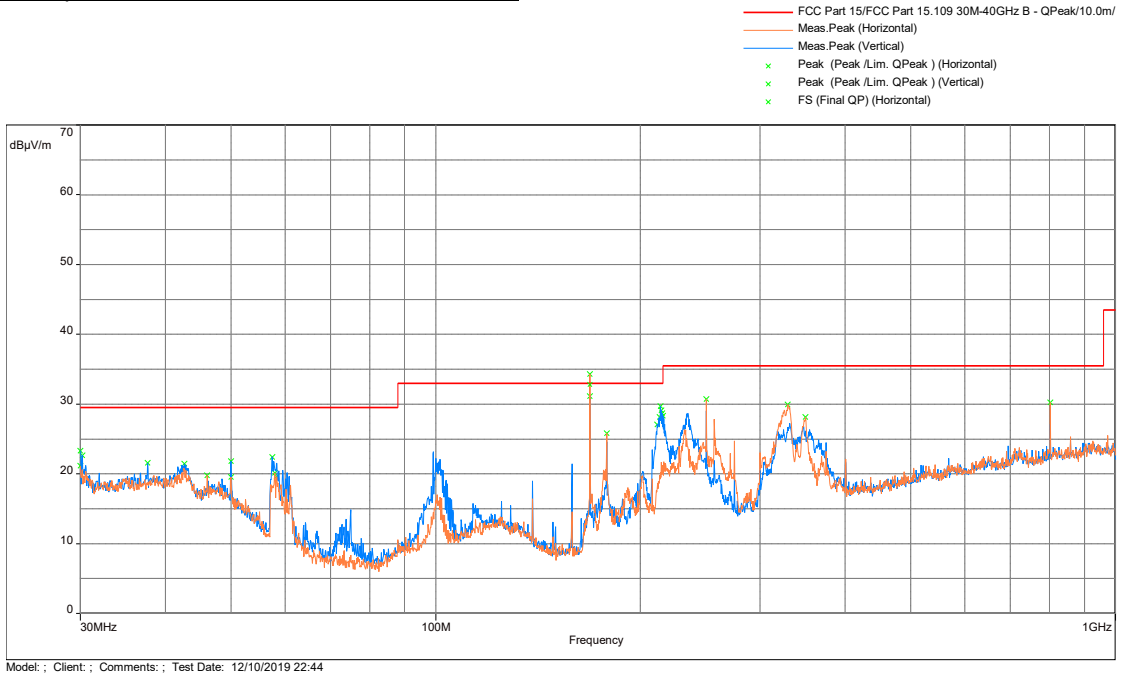

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Avg & Limit

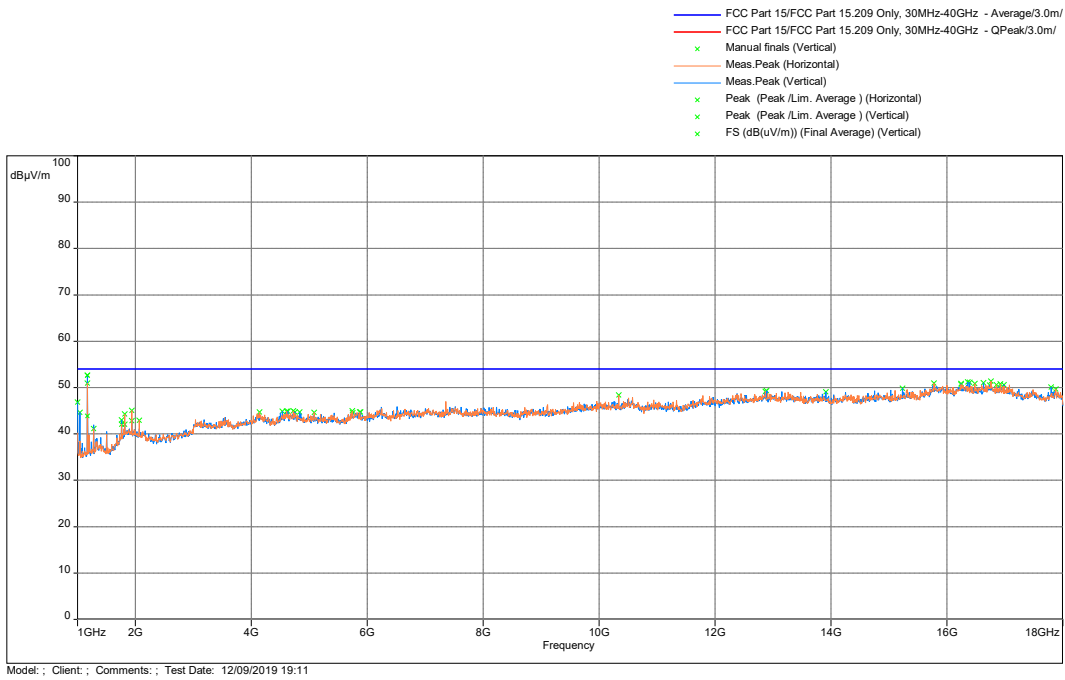

Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2450.567868 MHz

Frequency	FS @10m	Limit@10m	Margin	Height	Angle	Polarization	Correction
MHz	(dBμV/m)	(dBμV/m)	(dB)	(m)	(°)		(dB)
168.581	32.78	33.00	-0.22	4.00	13	Horizontal	15.17
214.138	29.68	33.00	-3.32	0.99	270	Vertical	-13.24
249.996	30.72	35.50	-4.78	2.52	39	Horizontal	-11.83
329.342	29.91	35.50	-5.59	3.98	353	Horizontal	-9.26
350.003	28.12	35.50	-7.38	3.98	248	Horizontal	-9.02
801.829	30.22	35.50	-5.28	1.02	42	Horizontal	-1.64
Frequency	FS @3m	Limit@3m	Margin	Height	Angle	Polarization	Correction
MHz	(dBμV/m)	(dBμV/m)	(dB)	(m)	(°)		(dB)
1000.000	46.89	54.00	-7.11	1.01	338.75	Vertical	-17.52
1172.491	43.88	54.00	-10.12	2.04	90	Vertical	-18.16


<b>Results</b>	Complies
----------------	----------

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz


Note: Raw Amplitude = FS - Correction (Antenna Factor + Cable Factor – Preamp Factor)

Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2463.921747 MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

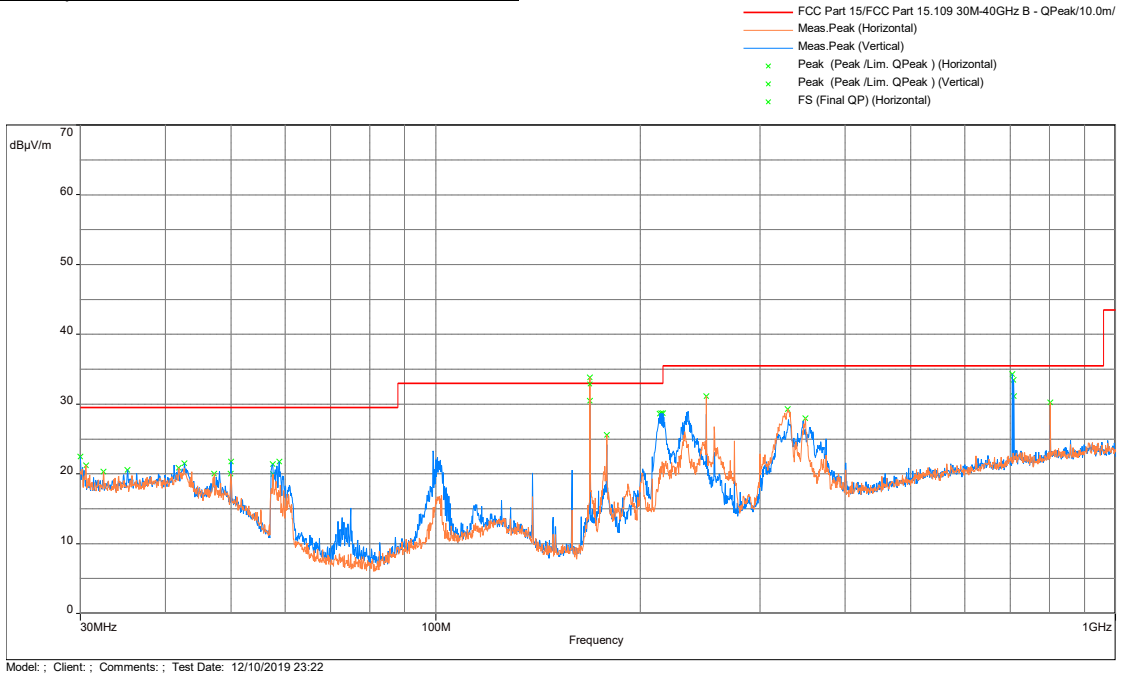

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Avg & Limit

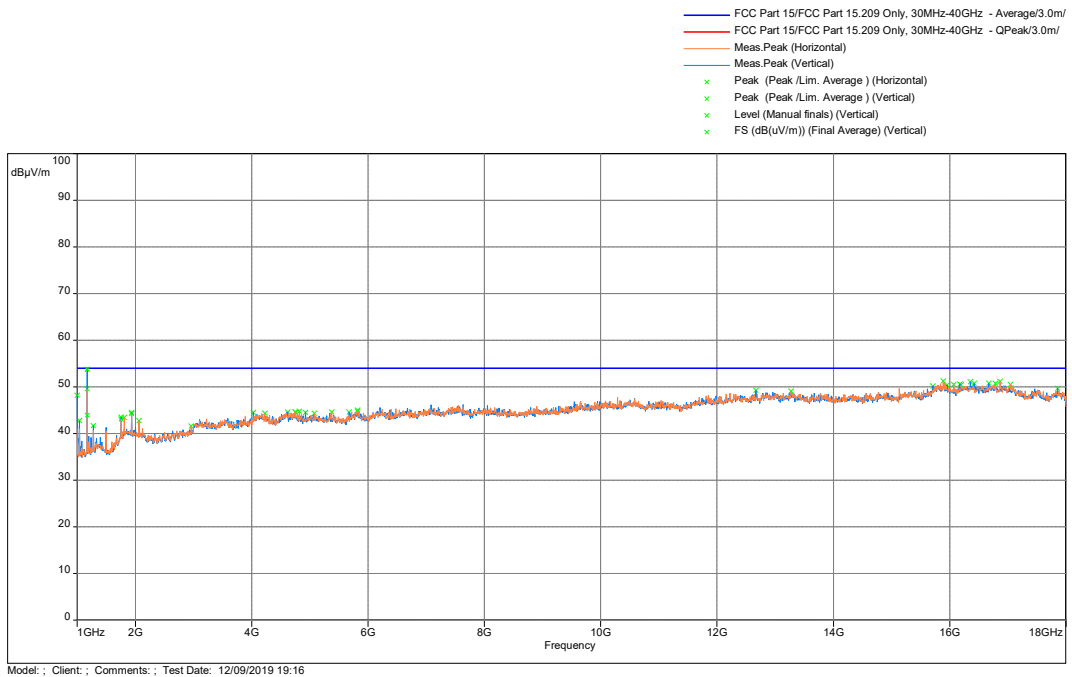

Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2463.921747 MHz

Frequency	FS @10m	Limit@10m	Margin	Height	Angle	Polarization	Correction
MHz	(dBμV/m)	(dBμV/m)	(dB)	(m)	(°)		(dB)
168.594	32.83	33.00	-0.17	3.63	27	Horizontal	-15.17
214.138	29.68	33.00	-3.32	0.99	270	Vertical	-13.24
249.996	30.72	35.50	-4.78	2.52	39	Horizontal	-11.83
329.342	29.91	35.50	-5.59	3.98	353	Horizontal	-9.26
350.003	28.12	35.50	-7.38	3.98	248	Horizontal	-9.02
801.829	30.22	35.50	-5.28	1.02	42	Horizontal	-1.64
Frequency	FS @3m	Limit@3m	Margin	Height	Angle	Polarization	Correction
MHz	(dBμV/m)	(dBμV/m)	(dB)	(m)	(°)		(dB)
1000.000	46.89	54.00	-7.11	1.01	338.75	Vertical	-17.52
1172.520	43.96	54.00	-10.04	2.01	90	Vertical	-18.16

**Results** Complies

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Note: Raw Amplitude = FS - Correction (Antenna Factor + Cable Factor – Preamp Factor)


#### 4.7.7 Test Setup Photographs

The following photographs show the testing configurations used.





4.7.5 Test Setup Photographs (Continued)

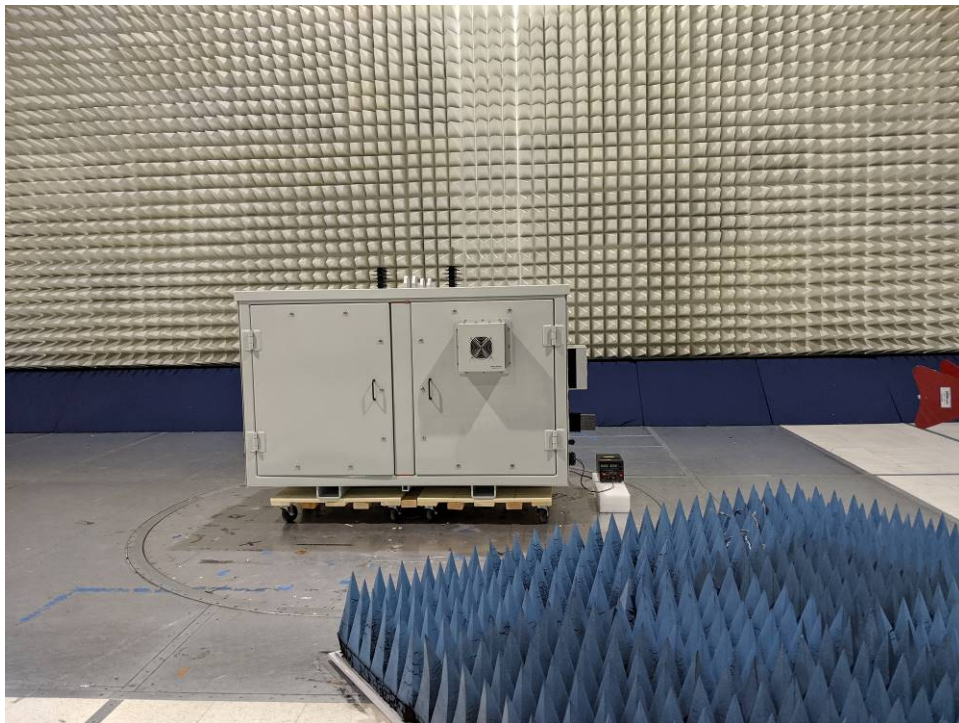

4.8 AC Line Conducted Emission  
FCC: 15.207

4.8.1 Requirement

Frequency Band MHz	Class B Limit dB( $\mu$ V)		Class A Limit dB( $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: \*Decreases linearly with the logarithm of the frequency  
At the transition frequency the lower limit applies.*

#### 4.8.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.


Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4:2014 and ANSI C63.10:2013.

#### 4.8.3 Test Results


Tested By	Test Date
Anderson Soungpanya	December 10, 2019

Conducted Emissions 120VAC 60Hz, FCC Part 15.207

**Phase 1**

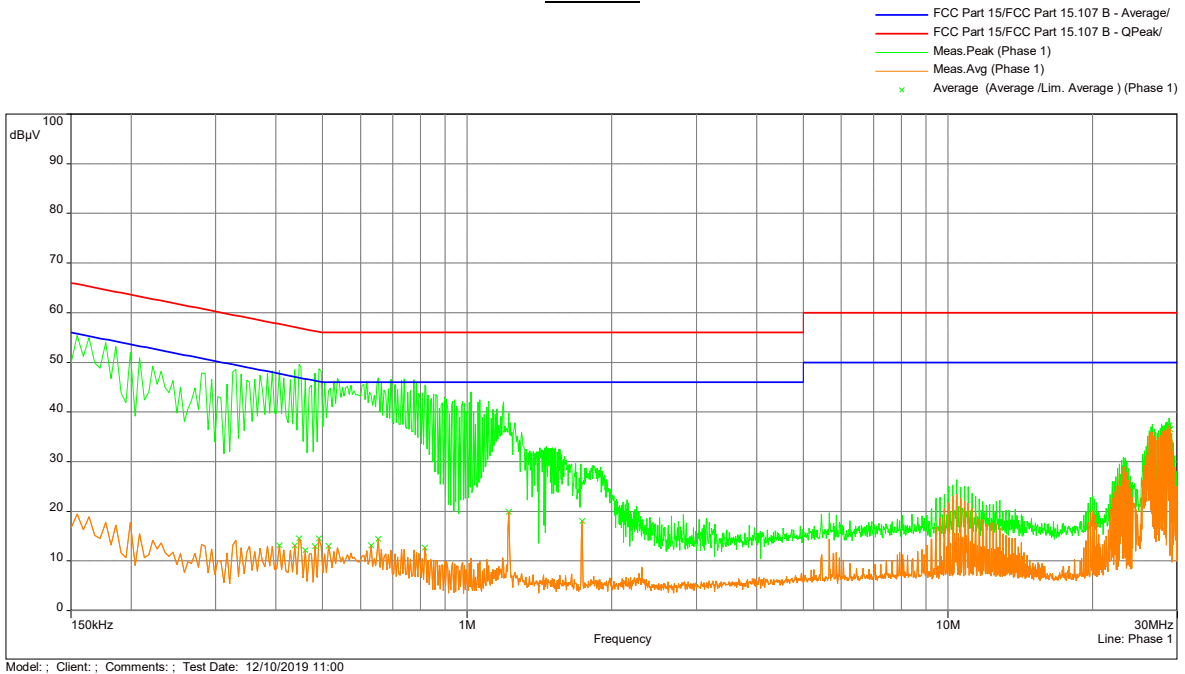

**Phase 2**

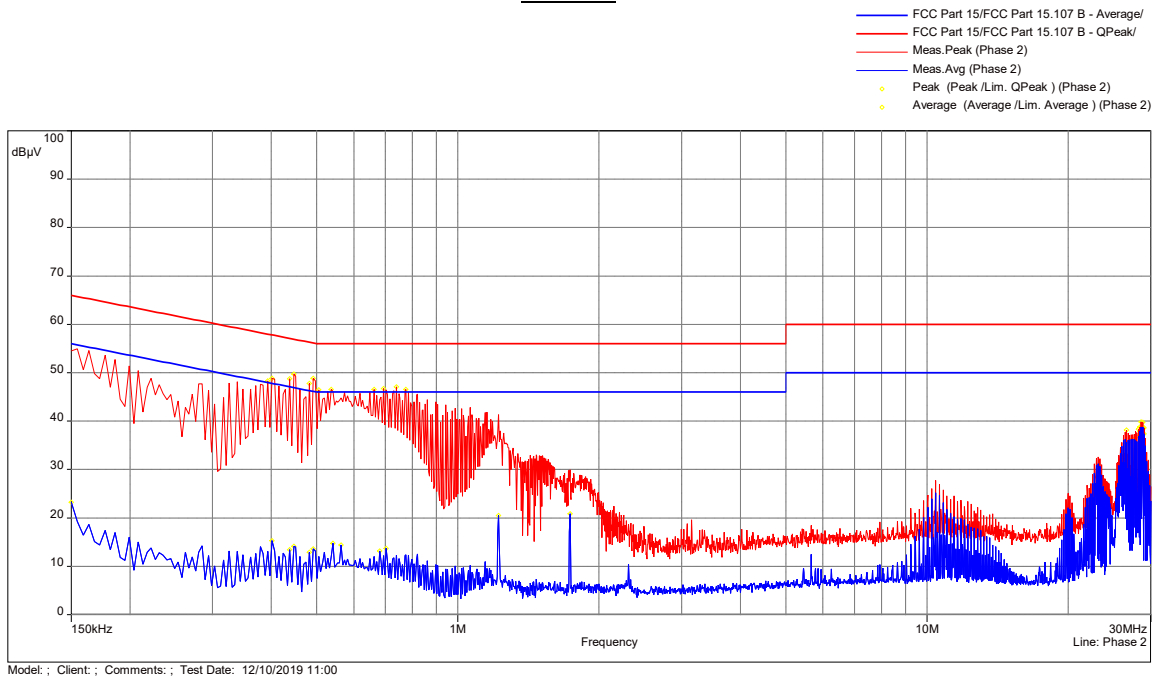

4.9.3 Test Results (Continued)



Quasi Peak Table					
Frequency (MHz)	QPeak (dBμV)	Lim. QPeak (dBμV)	QPeak-Lim (dB)	Phase	Correction (dB)
0.393	48.32	58.00	-9.68	Phase 1	10.68
0.393	48.29	58.00	-9.71	Phase 2	10.68
0.402	48.83	57.81	-8.98	Phase 2	10.67
0.407	48.34	57.72	-9.37	Phase 1	10.68
0.438	48.56	57.10	-8.53	Phase 1	10.68
0.438	48.79	57.10	-8.31	Phase 2	10.68
0.447	49.59	56.93	-7.34	Phase 1	10.68
0.447	49.76	56.93	-7.17	Phase 2	10.68
0.483	47.84	56.29	-8.45	Phase 1	10.69
0.483	47.77	56.29	-8.52	Phase 2	10.69
0.492	48.75	56.13	-7.38	Phase 1	10.69
0.492	48.83	56.13	-7.30	Phase 2	10.69
0.506	46.50	56.00	-9.50	Phase 2	10.67
0.537	46.55	56.00	-9.45	Phase 2	10.68
0.537	46.80	56.00	-9.20	Phase 1	10.68
0.654	46.87	56.00	-9.13	Phase 1	10.70
0.663	46.60	56.00	-9.40	Phase 2	10.70
0.695	46.62	56.00	-9.38	Phase 1	10.70
0.695	46.77	56.00	-9.23	Phase 2	10.70
0.731	46.47	56.00	-9.53	Phase 1	10.71
0.740	46.71	56.00	-9.29	Phase 1	10.71
0.740	47.06	56.00	-8.94	Phase 2	10.71
0.776	46.50	56.00	-9.50	Phase 1	10.70
0.776	46.54	56.00	-9.46	Phase 2	10.70
26.619	38.15	60.00	-21.85	Phase 2	11.67
26.619	37.60	60.00	-22.40	Phase 1	11.67
27.812	37.55	60.00	-22.45	Phase 1	11.69
28.208	38.35	60.00	-21.65	Phase 2	11.70
28.406	38.79	60.00	-21.21	Phase 2	11.70
28.406	37.89	60.00	-22.11	Phase 1	11.70
28.604	39.83	60.00	-20.17	Phase 2	11.70

4.9.3 Test Results (Continued)

Average Table					
Frequency (MHz)	AVG (dBμV)	Lim. Average (dBμV)	AVG-Lim (dB)	Phase	Correction (dB)
0.150	23.21	56.00	-32.79	Phase 2	10.73
0.483	12.94	46.29	-33.35	Phase 1	10.69
0.483	12.94	46.29	-33.35	Phase 2	10.69
0.492	13.58	46.13	-32.55	Phase 2	10.69
0.492	14.56	46.13	-31.58	Phase 1	10.69
0.515	13.06	46.00	-32.94	Phase 1	10.67
0.542	14.74	46.00	-31.26	Phase 2	10.67
0.564	14.37	46.00	-31.63	Phase 2	10.67
0.632	13.12	46.00	-32.88	Phase 1	10.68
0.654	14.43	46.00	-31.57	Phase 1	10.70
0.681	13.15	46.00	-32.85	Phase 2	10.71
0.704	13.71	46.00	-32.29	Phase 2	10.71
0.816	12.64	46.00	-33.36	Phase 1	10.70
1.221	19.85	46.00	-26.15	Phase 1	10.71
1.221	20.46	46.00	-25.54	Phase 2	10.71
1.734	18.03	46.00	-27.97	Phase 1	10.75
1.734	20.89	46.00	-25.11	Phase 2	10.75
27.411	36.31	50.00	-13.69	Phase 2	11.68
28.010	36.17	50.00	-13.83	Phase 1	11.70
28.208	36.82	50.00	-13.18	Phase 2	11.70
28.208	36.22	50.00	-13.78	Phase 1	11.70
28.406	36.06	50.00	-13.94	Phase 1	11.70
28.406	37.89	50.00	-12.11	Phase 2	11.70
28.604	38.79	50.00	-11.21	Phase 2	11.70
28.608	36.76	50.00	-13.24	Phase 1	11.70
28.802	38.81	50.00	-11.19	Phase 2	11.70
28.806	37.34	50.00	-12.66	Phase 1	11.70
29.000	37.41	50.00	-12.59	Phase 2	11.70
29.004	36.51	50.00	-13.49	Phase 1	11.70

**Results:** Complies by 7.17 dB

#### 4.8.4 Test Configuration Photographs

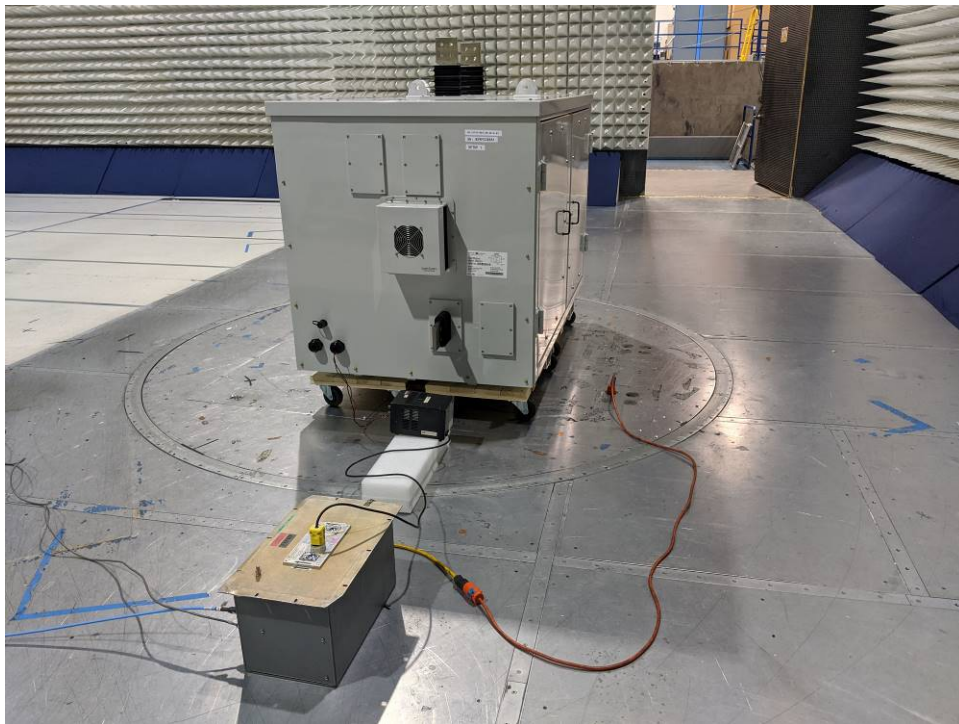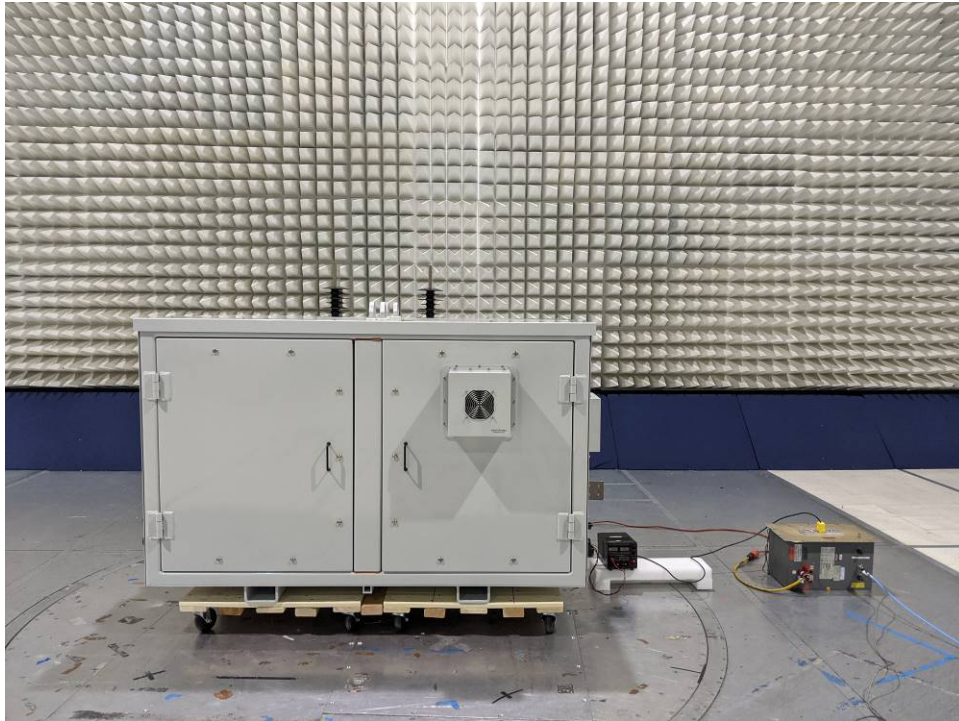

## 5.0 List of Test Equipment and Software

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment Description	Manufacturer	Model/ Type	Asset No.	Monthly Cal Interval	Cal Due
EMI Receiver	Rohde and Schwarz	ESR	ITS 01607	12	10/23/20
EMI Receiver	Rohde and Schwarz	ESU40	ITS 00961	12	11/07/20
Spectrum Analyzer	Rohde and Schwarz	FSU	ITS 00913	12	03/26/20
Active Horn Antenna	ETS-Lindgren	3117-PA	ITS 01636	12	01/17/20
BI-Log Antenna	Antenna Research	LPB-2513	ITS 00355	12	04/24/20
Pre-Amplifier	Sonoma Instrument	310N	ITS 00415	12	04/104/20
Horn Antenna (10-40 GHz)	ETS-Lindgren	3116C	ITS 01376	12	02/15/20
Pre-Amplifier (18-40GHz)	Miteq	TTA1840-35-S-M	ITS 01393	12	02/08/20
LISN	FCC	FCC-LISN-PA-NEMA-5-15	ITS 00551	12	11/13/20
RF Cable	Megaphase	TM40-K1K1-59	ITS 01657	12	11/11/20
RF Cable	Megaphase	EMC1-K1K1-236	ITS 01537	12	02/20/20
RF Cable	TRU Corporation	TRU CORE 300	ITS 01330	12	05/09/20
RE Cable	TRU Corporation	TRU CORE 300	ITS 01465	12	08/27/20
RE Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	08/27/20
Transient Limiter	COM-POWER	LIT-153A	ITS 01452	12	08/30/20
Notch Filter	Micro-Tronics	BRM50702	ITS 01166	12	05/14/20
Attenuator	Mini Circuits	FSCM99899	ITS 01582	12	10/07/20

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
Tile	Quantum Change	3.4.K.22	Conducted Spurious_30M-26GHz Conducted Restricted Band Edge_Avg Conducted Restricted Band Edge_Peak Conducted Restricted Band_30M-1GHz Conducted Restricted Band_1-26GHz
BAT-EMC	Nexio	3.16.0.64	Smartwires_Bypass_G103948971.bpp
RS Commander	Rohde Schwarz	1.6.4	Not Applicable (Screen grabber)



**6.0 Document History**

<b>Revision/ Job Number</b>	<b>Writer Initials</b>	<b>Reviewers Initials</b>	<b>Date</b>	<b>Change</b>
1.0 / G103948971	AS	KV	December 29, 2019	Original Document
1.1 / G103948971	AS	KV	January 10, 2020	Added additional tabular data into section 4.7.6

## Annex A - Duty Cycle Measurement

### A.1 Procedure

#### ANSI C63.10:2013; Section 7.5

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval. The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in Equation:

$$\delta \text{ (dB)} = 20 \log (\Delta)$$

where


$\delta$  is the duty cycle correction factor (dB)

$\Delta$  is the duty cycle (dimensionless)

This correction factor may then be subtracted from the peak pulse amplitude (in dB) to find the average emission. This correction may be applied to all emissions that demonstrate the same pulse timing characteristics as the fundamental emission (e.g., the fundamental and harmonic emissions). In cases where the pulse train is truly random or pseudo random, some regulatory agencies may accept a declaration by the manufacturer of the worst-case value of  $t_{ON}$ .

When the duty cycle correction factor is calculated to be less than -20.0 dB, -20.0 dB is used to find the average emission.

A.2 Test Results

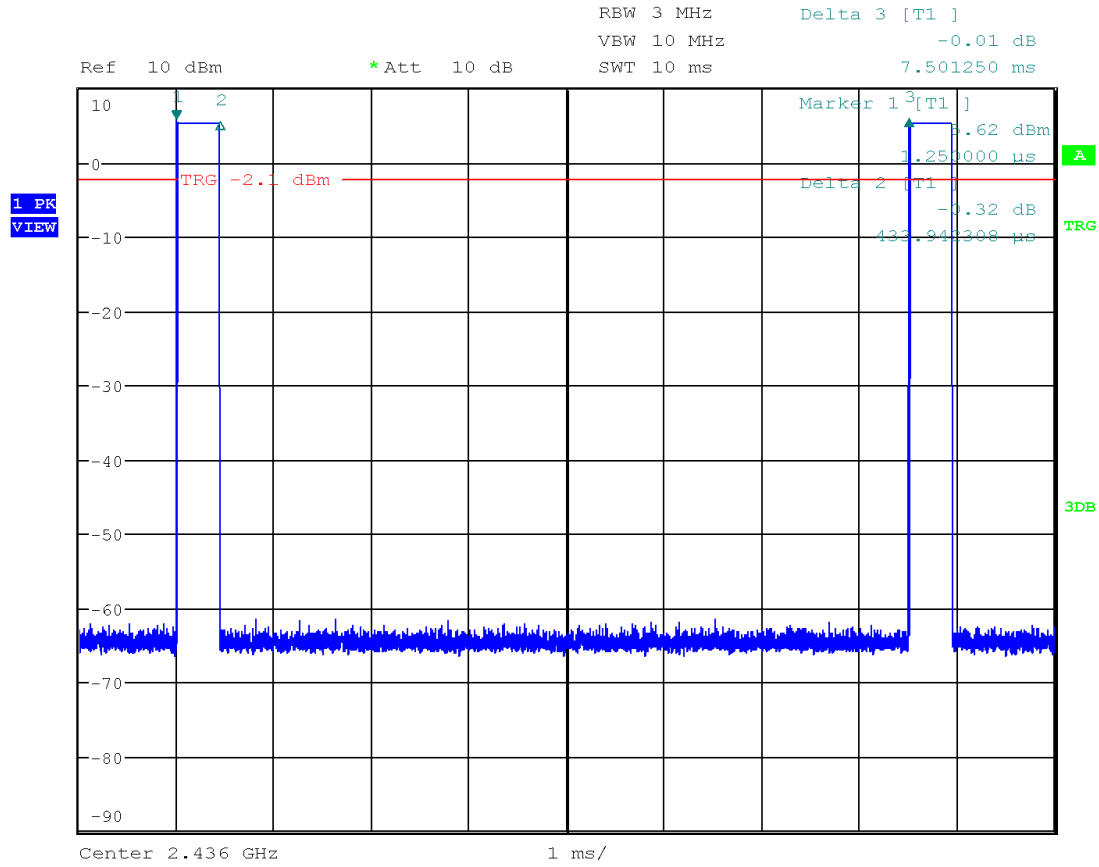

Date: 2.DEC.2019 08:02:16

Duty Cycle:  $DC = 0.434/7.50 = 0.0579$  or 5.79%  
 Duty Cycle Correction Factor  $\delta$  (dB) =  $20 \log(0.0579) = -24.77$  dB

**END OF REPORT**