


	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							24 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Cheek/Touch Position - Channel 6 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTVC03Q5H055

Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%

Communication System: DSSS WLAN
 RF Output Power: 14.7 dBm (Conducted)
 Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Cheek/Touch Position - Mid Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.31 V/m; Power Drift = 0.0101 dB
 Peak SAR (extrapolated) = 0.357 W/kg
SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.090 mW/g

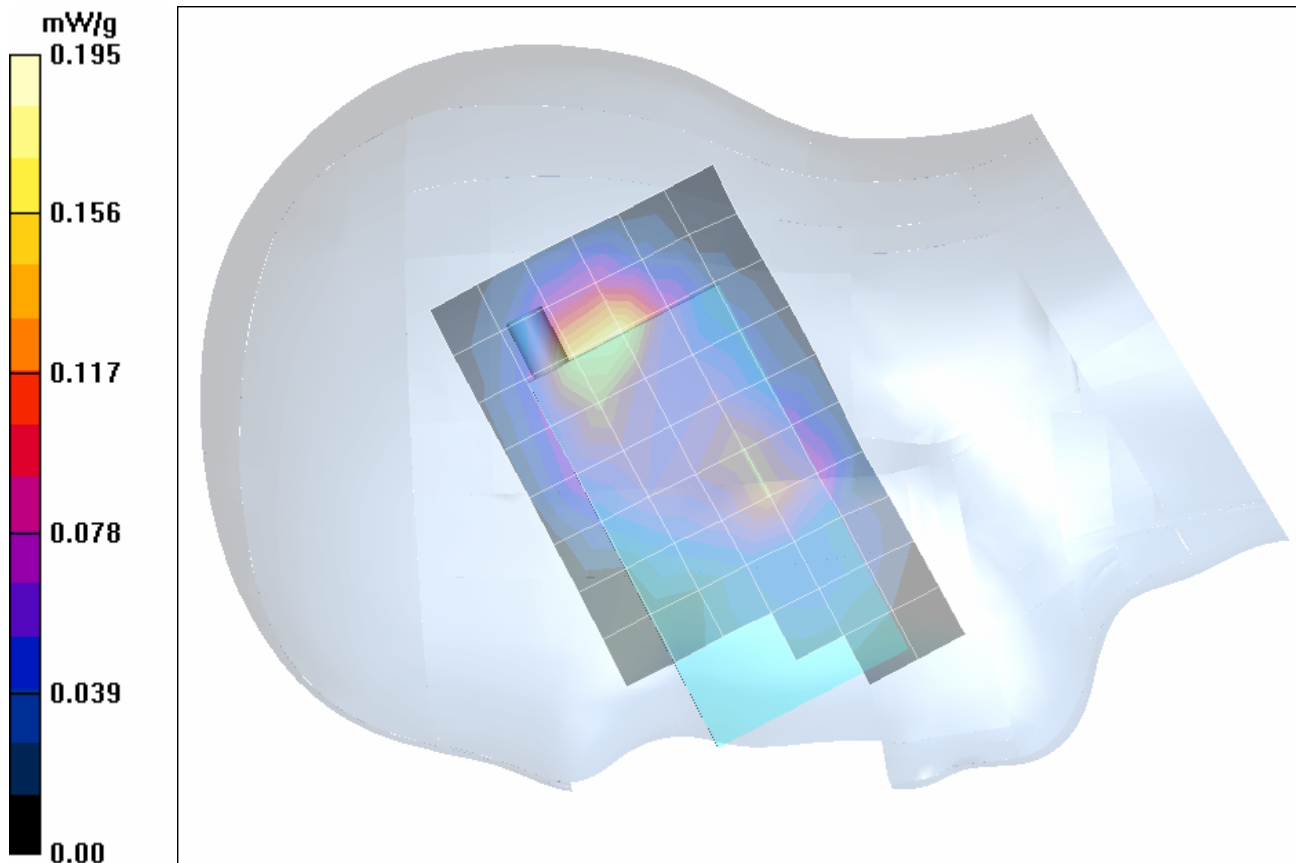

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						25 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Cheek/Touch Position - Channel 1 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTVC03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 15.2 dBm (Conducted)
 Frequency: 2412 MHz; Channel 1; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Cheek/Touch Position - Low Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Cheek/Touch Position - Low Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.82 V/m; Power Drift = -0.0254 dB
 Peak SAR (extrapolated) = 0.361 W/kg
SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.095 mW/g

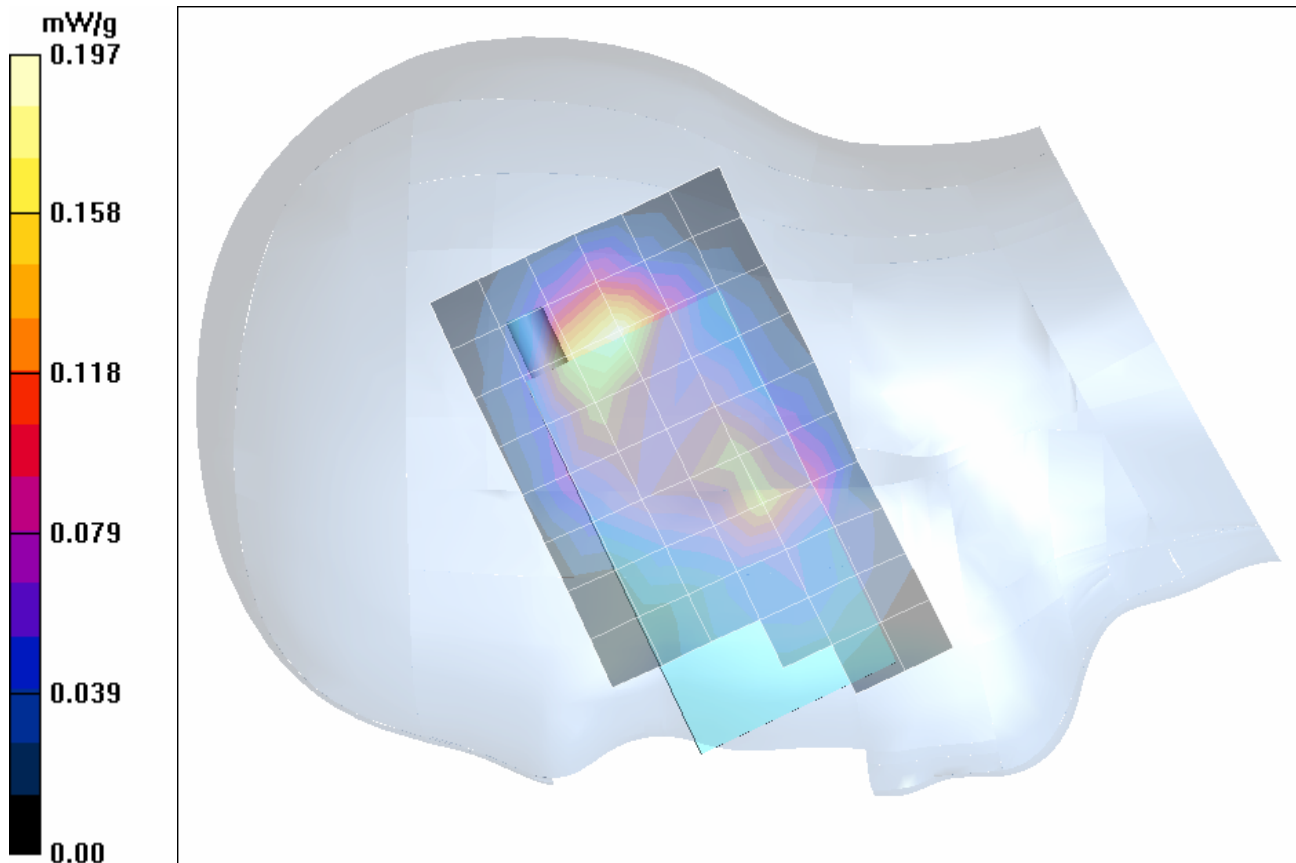

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						26 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Cheek/Touch Position - Channel 11 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 14.2 dBm (Conducted)
 Frequency: 2462 MHz; Channel 11; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Cheek/Touch Position - High Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Cheek/Touch Position - High Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.04 V/m; Power Drift = -0.177 dB
 Peak SAR (extrapolated) = 0.178 W/kg
SAR(1 g) = 0.0869 mW/g; SAR(10 g) = 0.045 mW/g

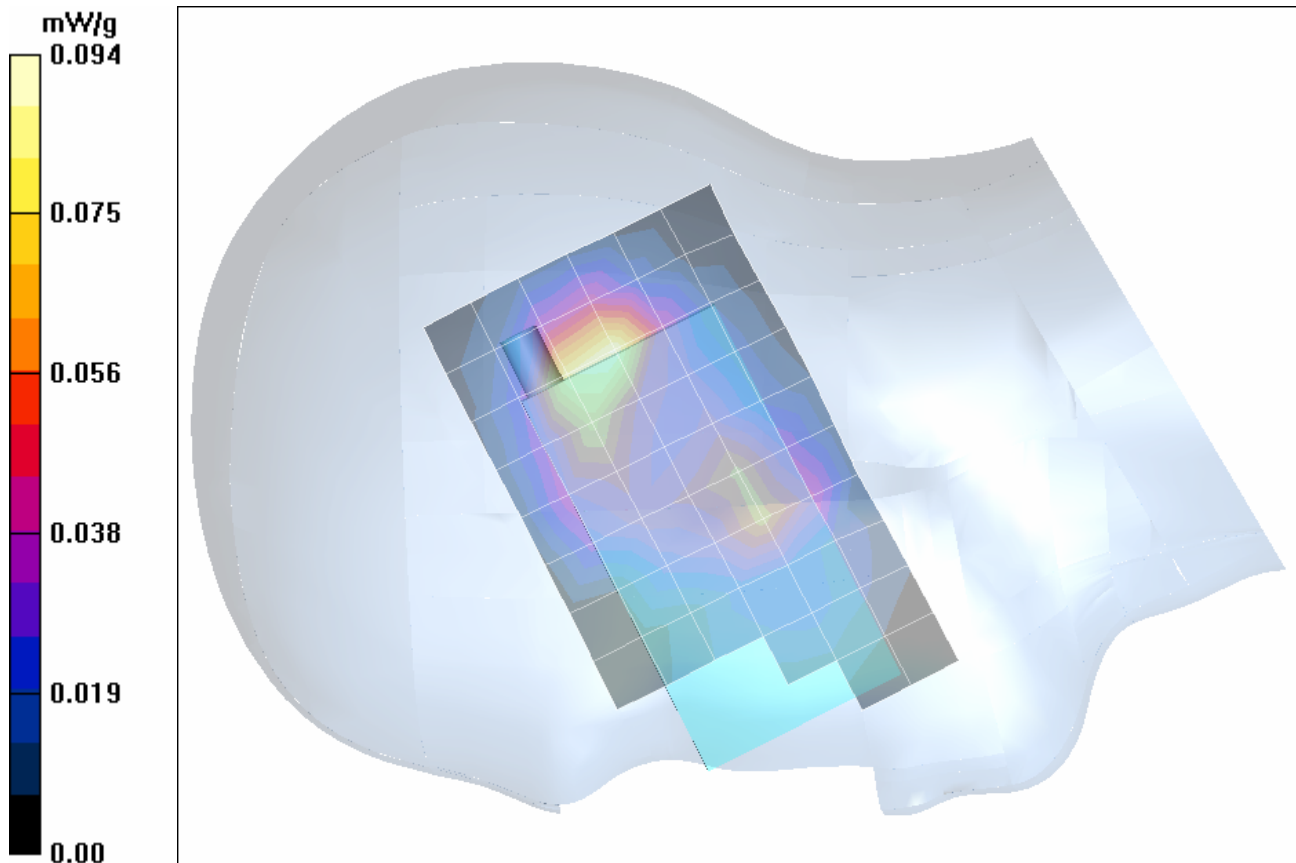

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						27 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Cheek/Touch Position - Channel 1 - Volume Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 15.2 dBm (Conducted)
 Frequency: 2412 MHz; Channel 1; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Cheek/Touch Position - Low Channel/Volume Scan (9x13x7):

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 8.46 V/m; Power Drift = 0.0475 dB
 Peak SAR (extrapolated) = 0.367 W/kg
SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.095 mW/g
 Total Absorbed Power = 0.00629559 W

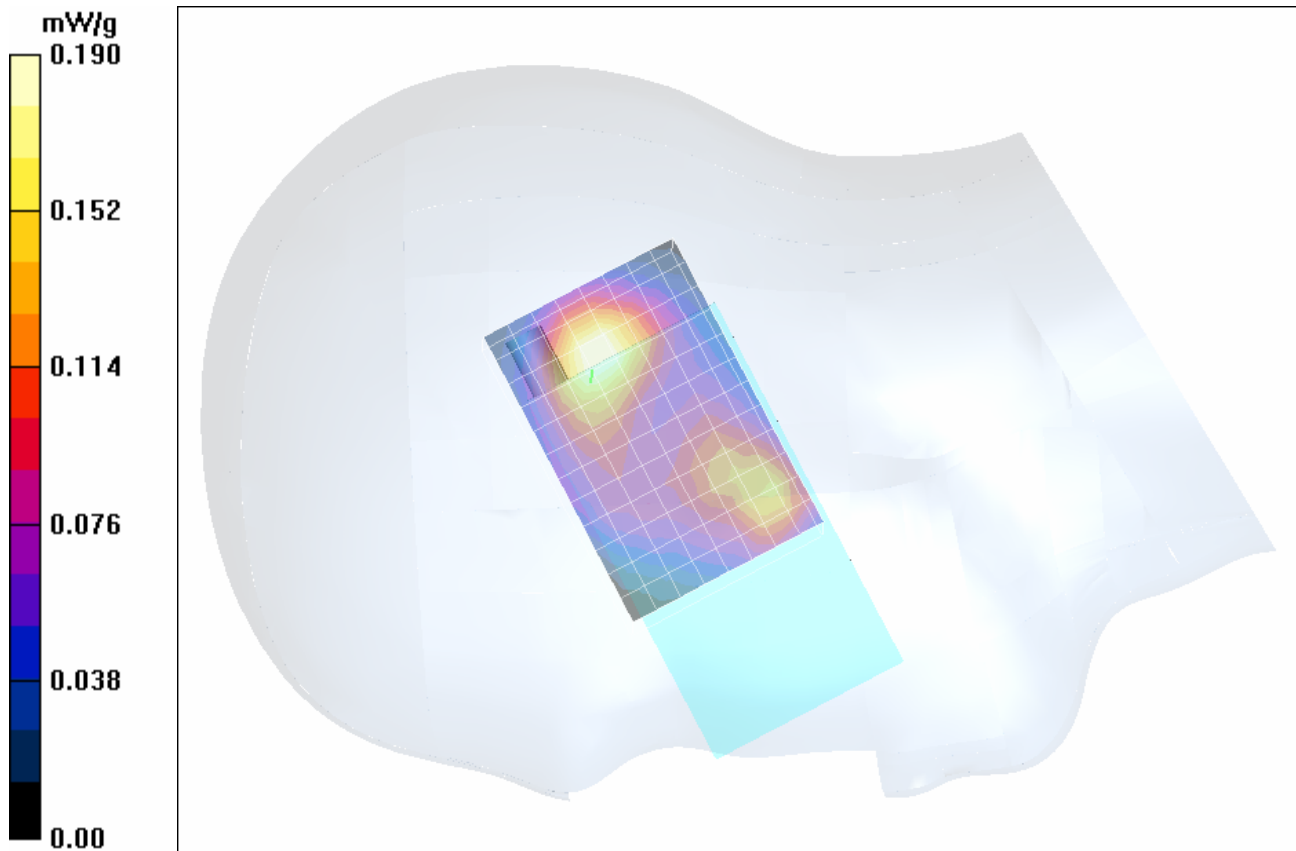

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						28 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Tilt Position (15°) - Channel 6 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 14.7 dBm (Conducted)
 Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Tilt Position (15°) - Mid Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.18 V/m; Power Drift = -0.0402 dB
 Peak SAR (extrapolated) = 0.584 W/kg
SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.143 mW/g

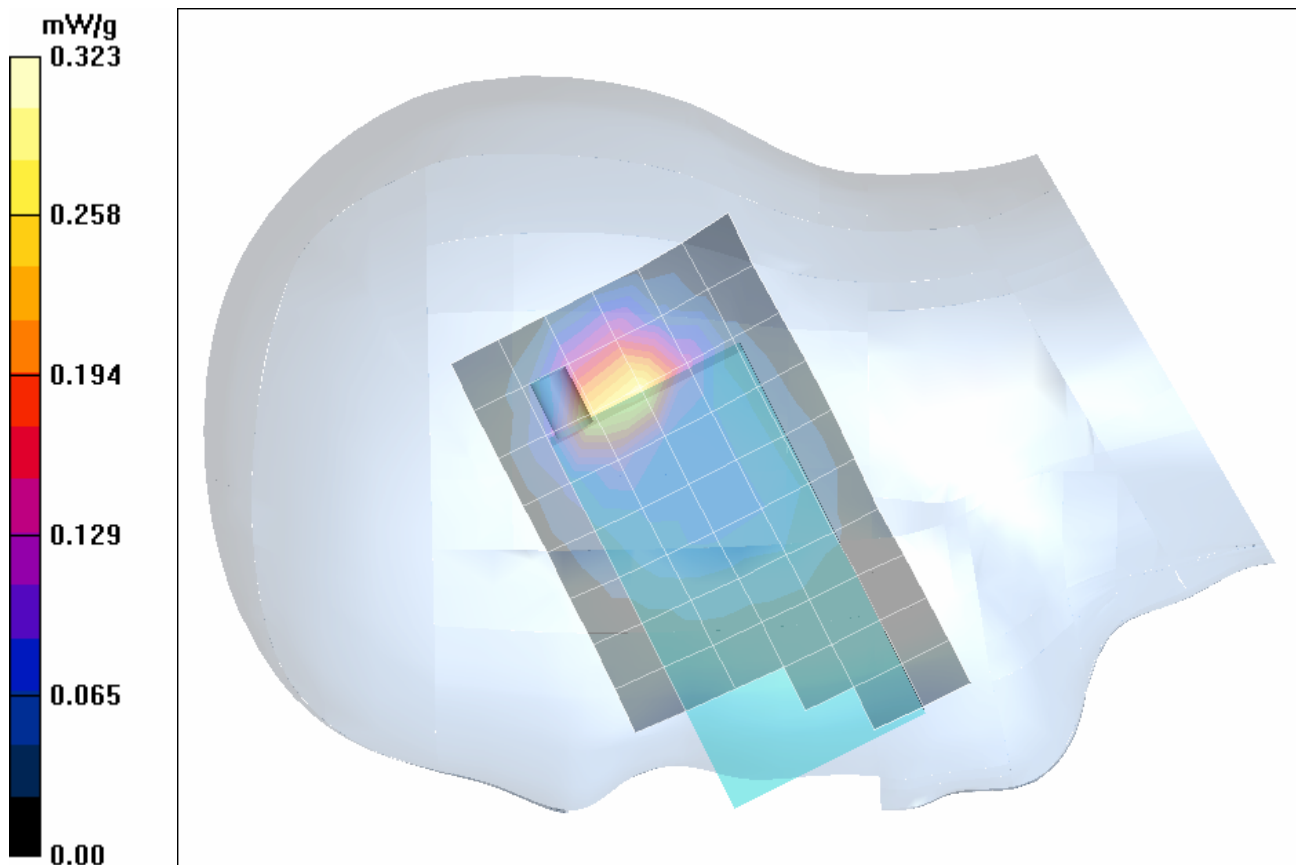

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						29 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Tilt Position (15°) - Channel 1 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 15.2 dBm (Conducted)
 Frequency: 2412 MHz; Channel 1; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Tilt Position (15°) - Low Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Tilt Position (15°) - Low Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.34 V/m; Power Drift = -0.0158 dB
 Peak SAR (extrapolated) = 0.582 W/kg
SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.146 mW/g

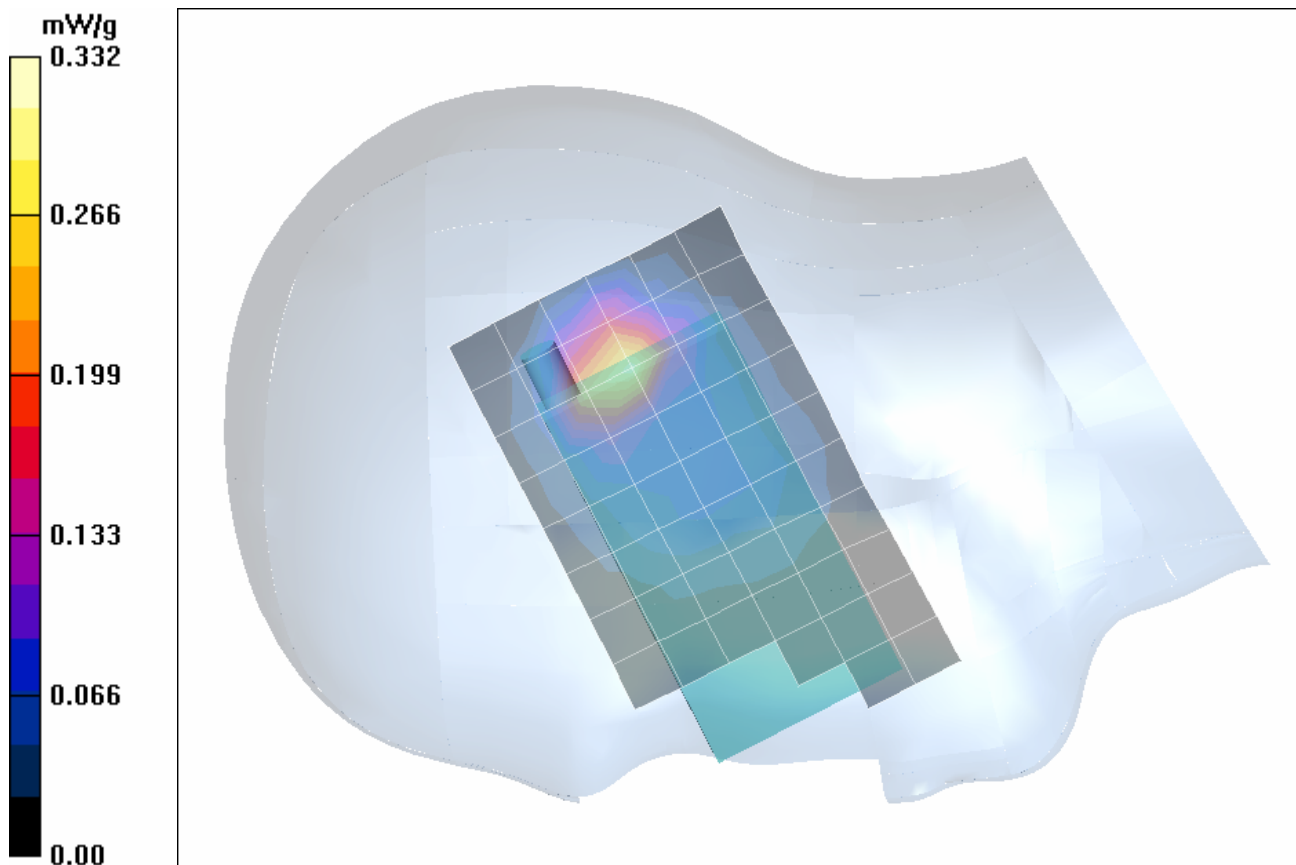

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							30 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Tilt Position (15°) - Channel 11 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 14.2 dBm (Conducted)
 Frequency: 2462 MHz; Channel 11; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Tilt Position (15°) - High Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Tilt Position (15°) - High Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.52 V/m; Power Drift = -0.0641 dB
 Peak SAR (extrapolated) = 0.287 W/kg
SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.070 mW/g

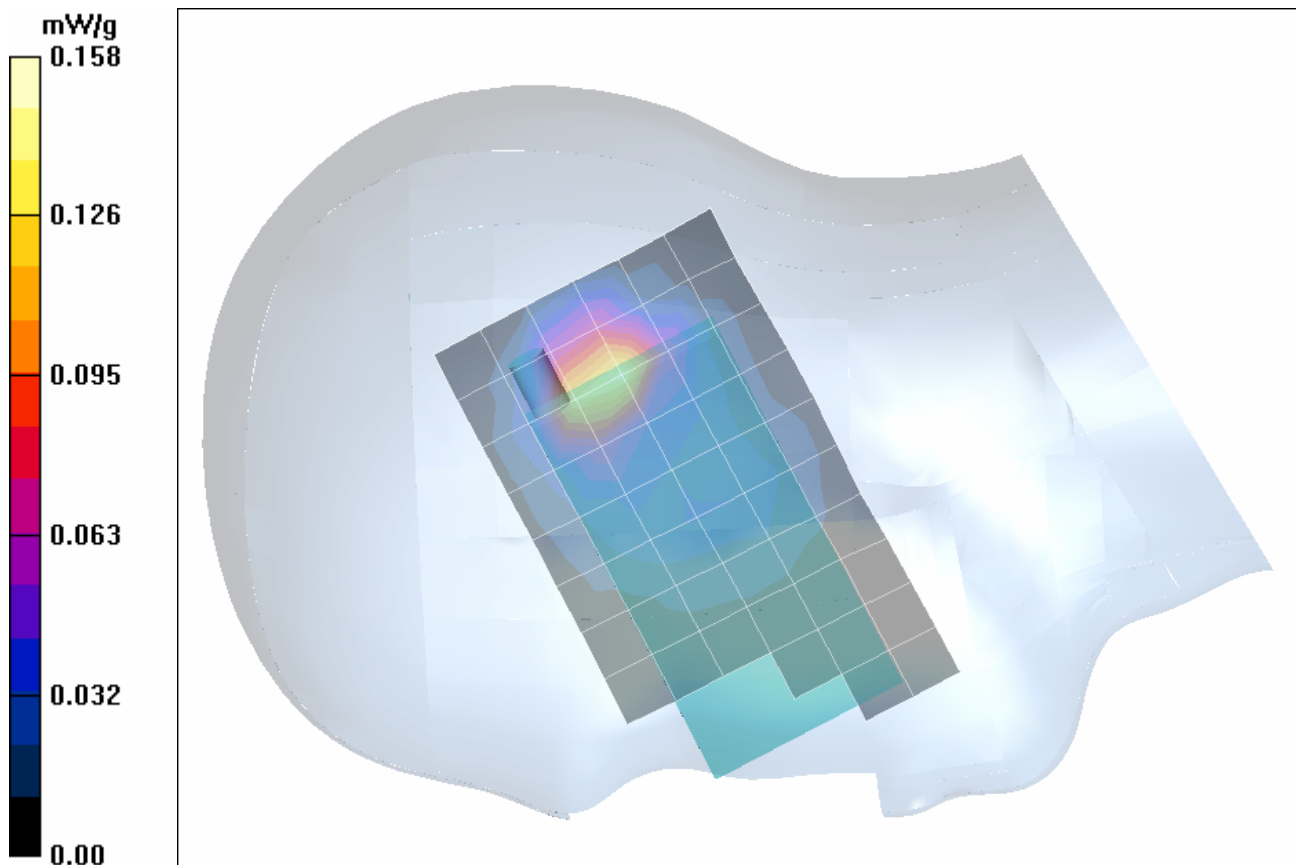

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						31 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Right Ear - Tilt Position (15°) - Channel 1 - Volume Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 15.2 dBm (Conducted)
 Frequency: 2412 MHz; Channel 1; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Right Ear - Tilt Position (15°) - Low Channel/Volume Scan (9x13x7):


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 9.70 V/m; Power Drift = -0.127 dB
 Peak SAR (extrapolated) = 0.639 W/kg
SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.151 mW/g
 Total Absorbed Power = 0.00614085 W

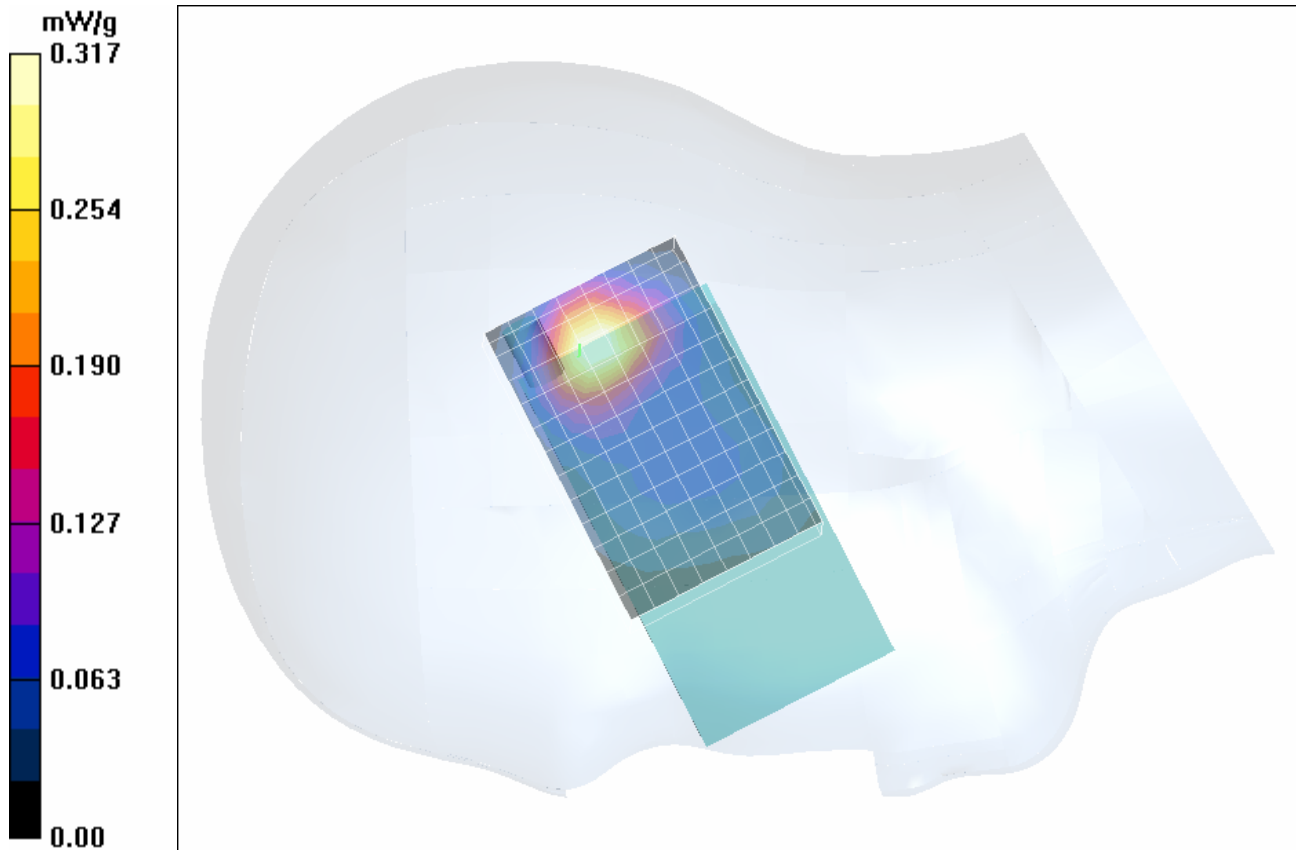


Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						32 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Z-Axis Scan

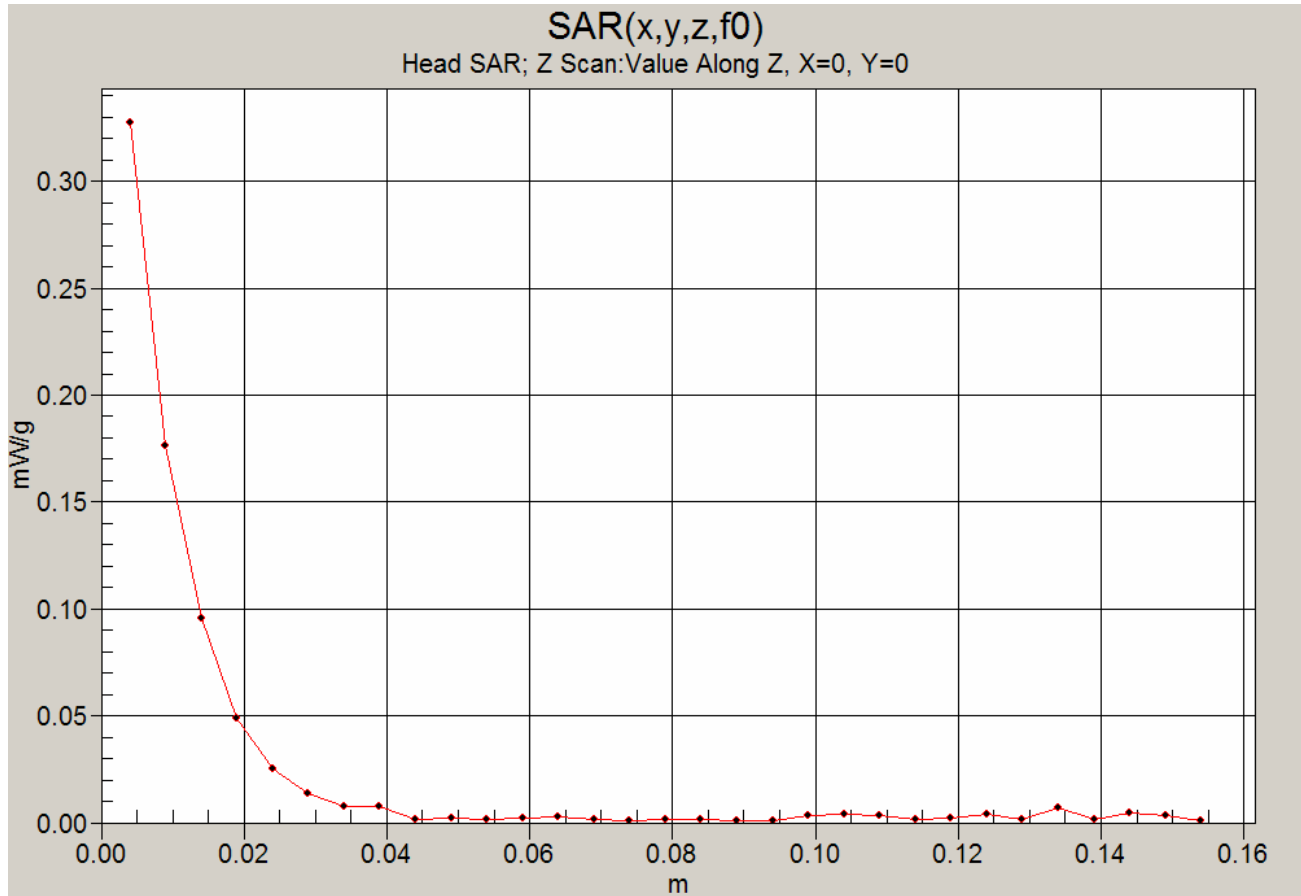

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX		
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card								
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						33 of 132	

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Left Ear - Cheek/Touch Position - Channel 6 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 14.7 dBm (Conducted)
 Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Cheek/Touch Position - Mid Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.18 V/m; Power Drift = -0.0749 dB
 Peak SAR (extrapolated) = 0.290 W/kg
SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.080 mW/g

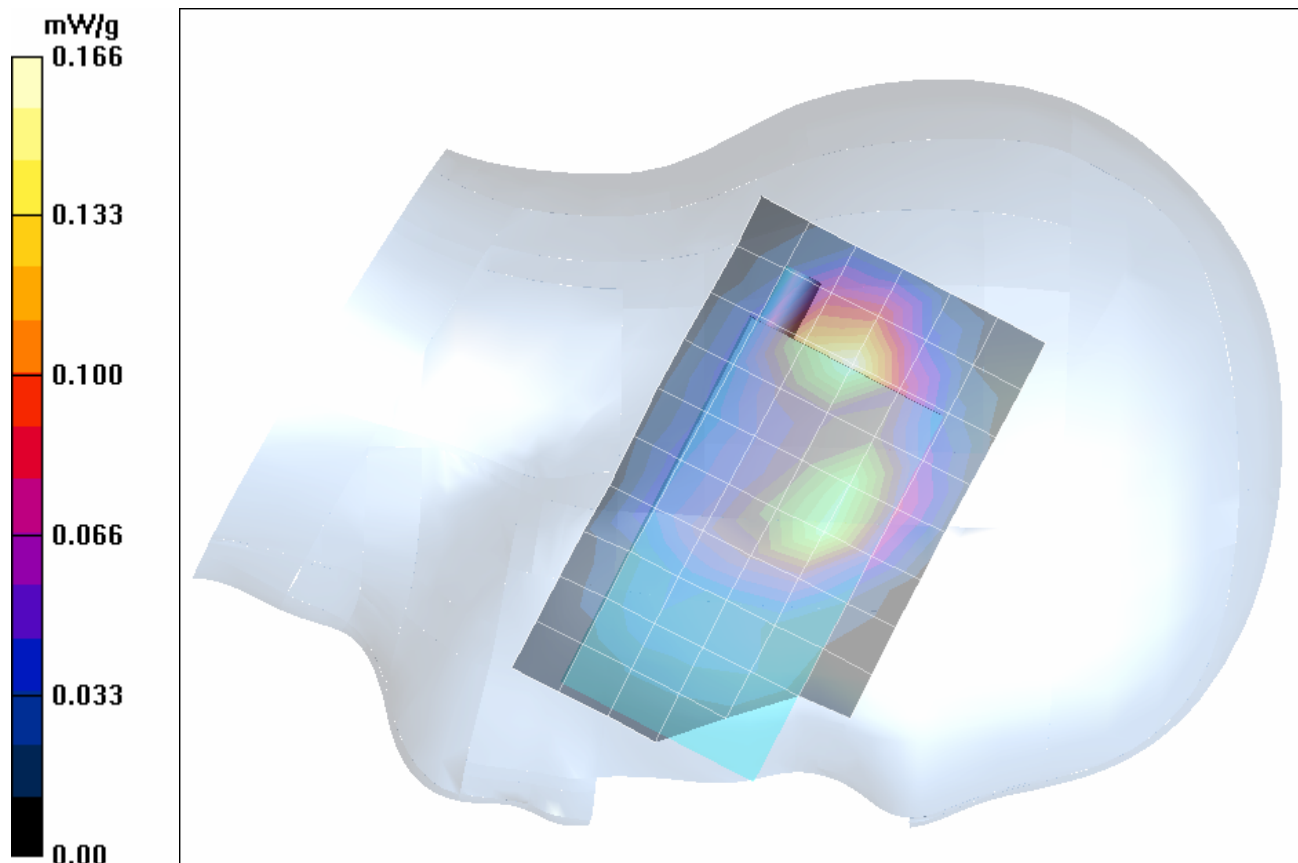

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						34 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Left Ear - Cheek/Touch Position - Channel 1 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055

Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%

Communication System: DSSS WLAN
 RF Output Power: 15.2 dBm (Conducted)
 Frequency: 2412 MHz; Channel 1; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Cheek/Touch Position - Low Channel/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Cheek/Touch Position - Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.44 V/m; Power Drift = -0.0342 dB
 Peak SAR (extrapolated) = 0.259 W/kg
SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.088 mW/g

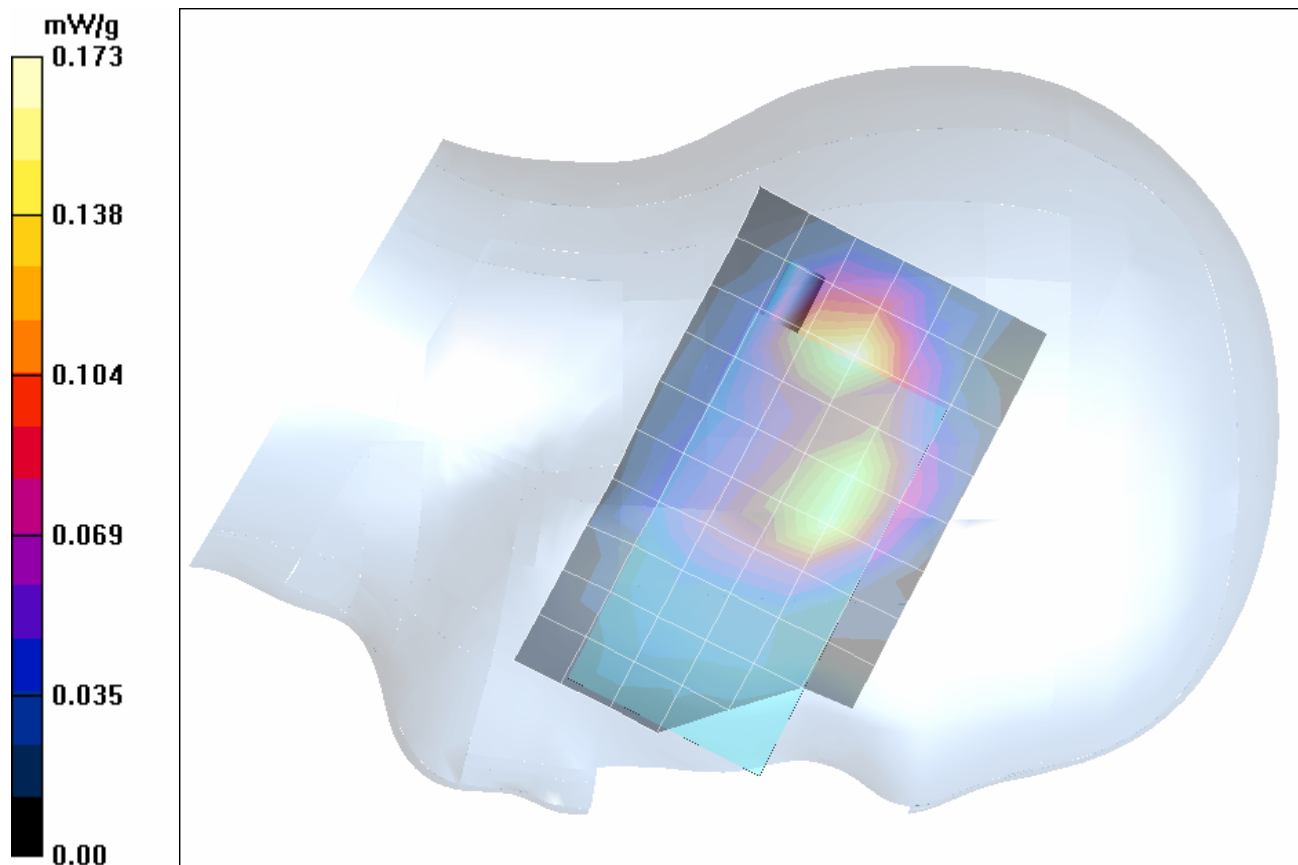

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						35 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Left Ear - Cheek/Touch Position - Channel 11 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTVC03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 14.2 dBm (Conducted)
 Frequency: 2462 MHz; Channel 11; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Cheek/Touch Position - High Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Cheek/Touch Position - High Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.72 V/m; Power Drift = -0.0664 dB
 Peak SAR (extrapolated) = 0.115 W/kg
SAR(1 g) = 0.0677 mW/g; SAR(10 g) = 0.035 mW/g

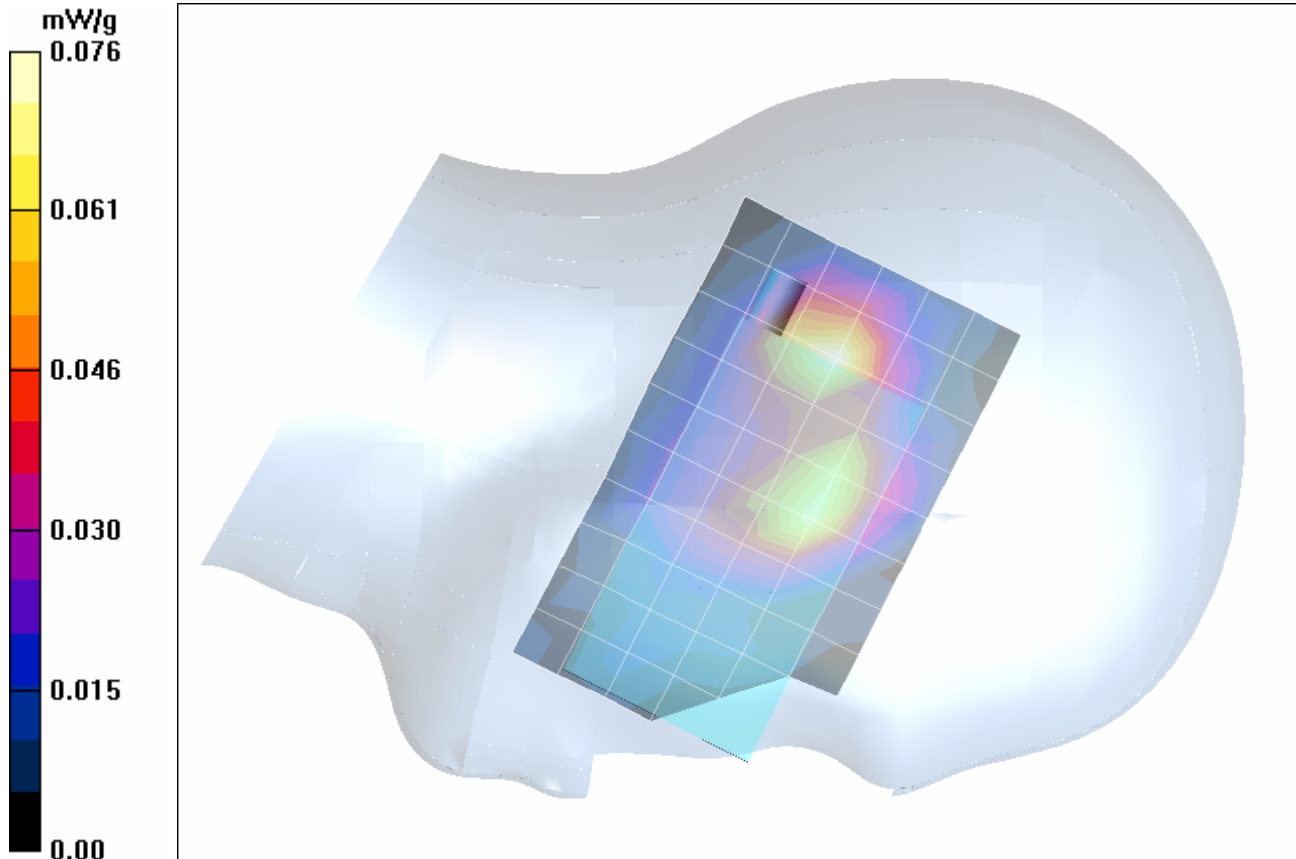

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						36 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Left Ear - Cheek/Touch Position - Channel 1 - Volume Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTV03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 15.2 dBm (Conducted)
 Frequency: 2412 MHz; Channel 1; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Cheek/Touch Position - Low Channel/Volume Scan (9x13x7):

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 8.24 V/m; Power Drift = -0.102 dB
 Peak SAR (extrapolated) = 0.272 W/kg
SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.095 mW/g
 Total Absorbed Power = 0.00582471 W

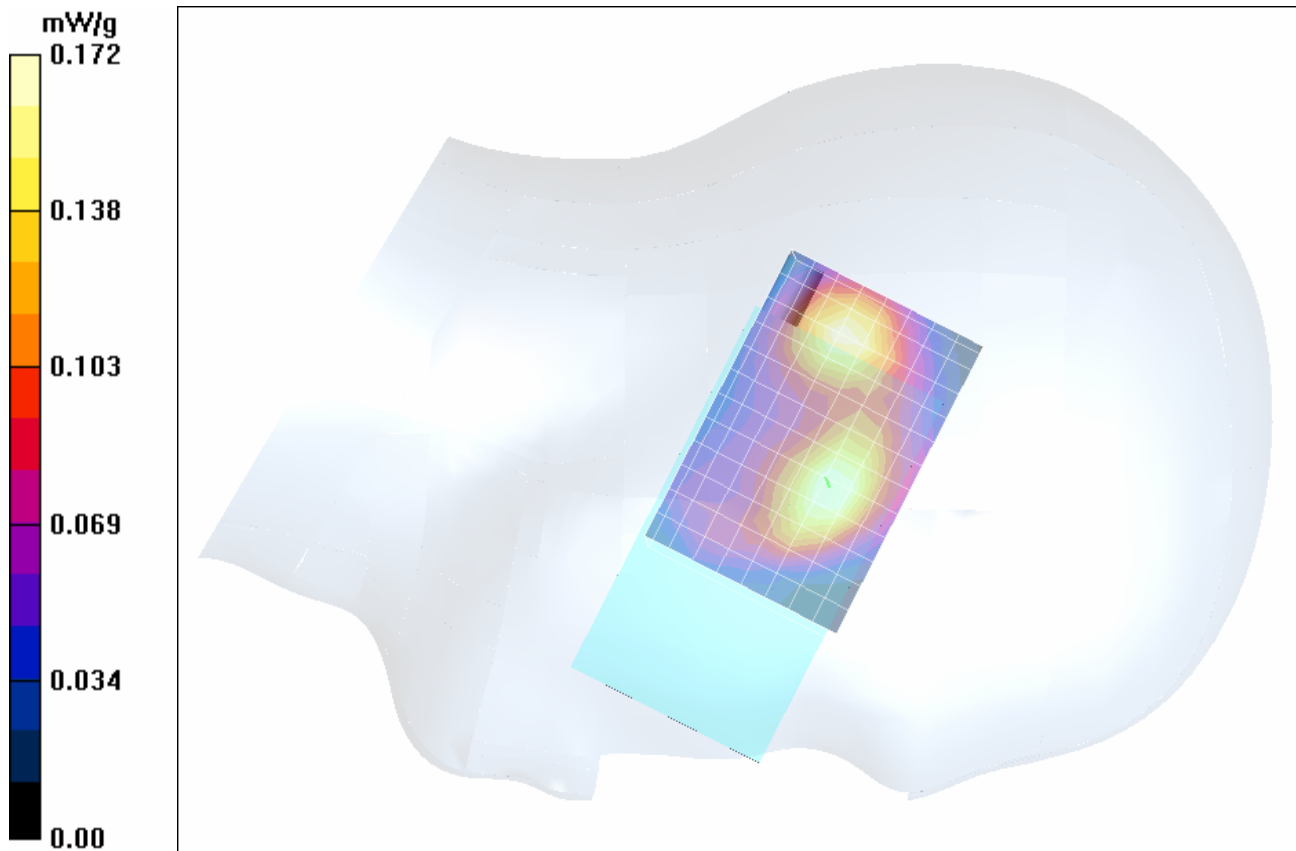

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							37 of 132

	Test Report Serial No.:	08220508F-T664-S24CW	Report Rev. No.:	Revision 0
	Report Issue Date:	Oct. 01, 2005	Test Date(s):	May 26, August 22-26 & 30, 2005
	Description of Test:	RF Exposure	SAR	FCC §2.1093 IC RSS-102

Date Tested: 05/26/2005

Head SAR - 802.11b WLAN SDIO - Left Ear - Tilt Position (15°) - Channel 6 - Area/Zoom Scan

DUT: Palm Inc. Model: Treo XXX; Type: Portable Dual-Band CDMA 2000 Phone with 802.11b & Bluetooth; Serial: PTVC03Q5H055


Ambient Temp: 24.8 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.9 kPa; Humidity: 31%


Communication System: DSSS WLAN
 RF Output Power: 14.7 dBm (Conducted)
 Frequency: 2437 MHz; Channel 6; Duty Cycle: 1:1
 Power: Li-ion Battery Pack in Treo Phone (P/N: 157-10014-00)
 Medium: HSL2450 ($\sigma = 1.85 \text{ mho/m}$, $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(4.56, 4.56, 4.56); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 06/07/2004
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Tilt Position (15°) - Mid Channel/Area Scan (7x11x1):
 Measurement grid: dx=15mm, dy=15mm

Head SAR - 802.11b SDIO in Treo XXX Phone - Left Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.08 V/m; Power Drift = -0.0294 dB
 Peak SAR (extrapolated) = 0.474 W/kg
SAR(1 g) = 0.250 mW/g; SAR(10 g) = 0.127 mW/g

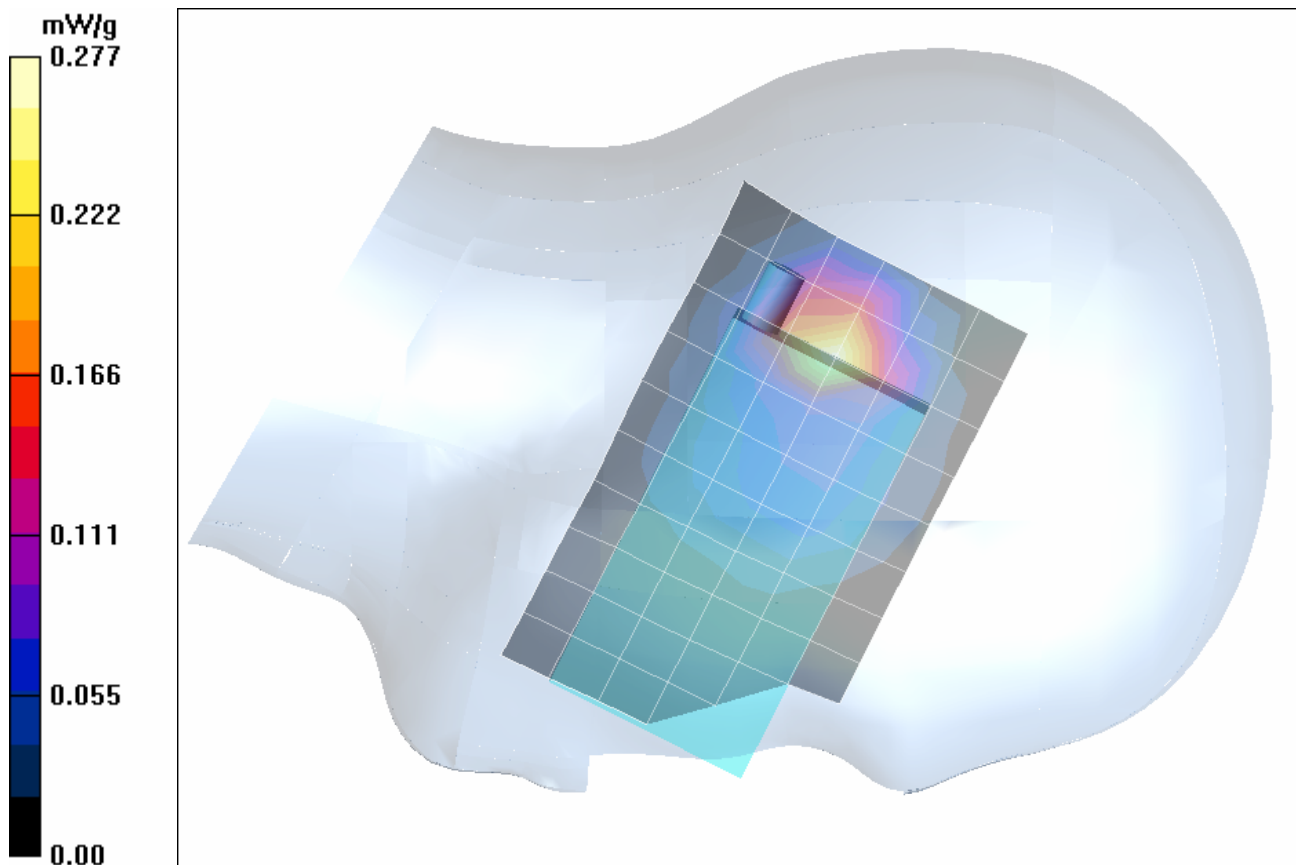

Applicant:	Palm, Inc.	FCC ID:	O8FJIMI	IC ID:	3905A-JIMI	Model:	Treo XXX	
DUT Type:	Portable Dual-Band PCS/Cellular CDMA 2000 Phone with Bluetooth and 802.11b WLAN SDIO Card							
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						38 of 132