

REV	Δ	Description	Sheet Effected	Date	Drawn	Checked
A				12.12.04	D.Lanuel	S.Cohen
B	Δ1	Error in the calculation	10,11	23.12.04	D.Lanuel	S.Cohen
	Δ2	Correction-905&925 instead 912 &918	8,10	23.12.04	D.Lanuel	S.Cohen

EMC Laboratory

GigAccess 900Q

Manufactured by
WaveIP Ltd.

EMC Test Report

According FCC Part 15 Requirements
NOV 2004




	Function/Title	Name	Signature	Date
Prepared by	Test Engineer	D.Lanuel		12.12.04
Checked by	Test Engineer	D.Lanuel		12.12.04
Approved by	EMC Lab. Manager	S.Cohen		12.12.04

Table of Contents

Para	Page
1 GENERAL INFORMATION	3
2 TEST SUMMARY AND SIGNATURES	4
3 EUT DESCRIPTION	5
4 OCCUPIED BANDWIDTH FOR DSSS SYSTEM ACCORDING TO 15.247(A) (2)	8
5 MAXIMUM PEAK OUTPUT POWER TEST ACCORDING 15.247(B)(3)	10
6 OUT OF BAND CONDUCTED EMISSION TEST ACCORDING TO 15.247(C)	13
7 RADIATED EMISSION IN RESTRICTED BANDS TEST ACCORDING 15.247(C), 15.205 AND 15.209	15
8 PEAK POWER SPECTRAL DENSITY OF DSSS ACCORDING 15.247D	23
9 UNINTENTIONAL RADIATED EMISSION TEST ACCORDING TO 15.109	25
10 CONDUCTED EMISSION TEST ACCORDING TO 15.207.15.107	27
11 PLOTS	30
12 PICTURES	79
13 CORRECTION FACTORS	81
14 ABBREVIATIONS AND ACRONYMS	83

1 GENERAL Information

a. Description of equipment under test.

Equipment Under Test:	GigAccess 900Q
FCCID	QQ2-GA900Q
Manufacturer:	WaveIP.
Serial Numbers:	00-50-C2-1C
Mode of Operation:	TX MODE
Operating frequency:	902-928MHZ
Year of Manufacture:	2004

b. Applicant Information:

Applicant:	WaveIP Ltd.
Applicant Address	TAVOR Building YOKNEAM
Telephone:	+972-4-9937333
FAX:	+972-4-9592614
The testing was observed by:	Yoram Singer
following applicant's personnel:	Yoram Singer

c. Test Performance:

Date of reception for testing:	10.11.04
Dates of testing	11.11.04-20.11.04
Test Laboratory Location	TADIRAN EMC LAB , Hashoftim 26 Holon 58102 ISRAEL Tel: 972-3-5574476 Fax: 972-3- 5575320

Applicable EMC Specification:

Federal Communication Commission (FCC), Code of Federal Regulations 47, FCC Docket 89-103, Part 15: Radio Frequency Devices, Sections 15.109, 15.209 & 15.207, 15.205, 15.247.

2 Test Summary and Signatures.

TADIRAN EMC Laboratory has completed testing of E.U.T in accordance with the requirements of the FCC 15.247

The E.U.T was found to comply with the requirements of the FCC Part 15.247 Regulations given below

Test Description	Specification Reference	Date of Testing	Test Report Paragraph	Compliance PASS/FAIL
Occupied 6db bandwidth	15.247 (a) (2)	10/11/04	4	PASS
Max peak output power	15.247 (b) (3)	10/11/04	5	PASS
Out of band Conducted emission	15.247 (c)	10/11/04	6	PASS
Spurious emission radiated In Restricted band	15.209 15.205(a ,c)	13.11/04- 20.11.04	7	PASS
Peak power spectral density	15.247 (d)	10/11/04	8	PASS
Unintentional radiated emission	15.109	13/11/04	9	PASS
Power leads Conducted emission	15.207, 15.107	12/11/04	10	PASS


a. Test performed by:

Mr. D. Lanuel Test Engineer



b. Test Report prepared by:

Mr. D. Lanuel Test Engineer



c. Test Report Approved by:

Mr. Samuel Cohen EMC Lab. Manager



3 EUT Description

a. General

Model Number(s): GigAccess 900Q

Brief Description (Purpose of Device):

GigAccess™ 900 is WaveIP's wireless point-to-point and point-to-multipoint broadband communication system. The basic subsystem is composed of a single sector, which consists of an AU (Access Unit) and up to 128 SUs (Subscriber Units). Each sector is a stand-alone communication network operating on a star topology with a gateway to the WAN, which allows two-way communication between the SUs and the WAN via the AU. A Sector may be divided into sub sectors, which are consecutive to the SUs within the sector. GigAccess™ 900 system allows operators that provide IP services using GigAccess™ (at 2.4 GHz band) to extend the reach of their system and provide services to clusters of customers that cannot otherwise be reached due to being obstructed by heavy foliage or other obstacles existing in rural areas.

For detailed description see GigAccess™ 900Q User Guide.


b. General Information:

- (1) Intended Environment: Outdoor
- (2) Operating Temperature Range: -20°C - +55°C
- (3) Physical Dimensions of Unit: 190 x 190 x 30 mm (with 6.5 dBi integrated antenna)

Table 1 EUT ports and lines

Port type	Port description	Connector type	Quantity	Cable type description	Cable length, m	Connected to
GigAccess Data input	Ethernet 802.3	RJ45	2	CAT 5 Shielded	Up to 100m	Indoor Outlet output
GigAccess Power input	48V DC	RJ45	2	CAT 5 Shielded	Up to 100m	Indoor Outlet output
Indoor Outlet data input	Ethernet 802.3	RJ45	1	CAT 5 Shielded	Up to 100m	Computer NIC
Indoor Outlet power input	48V DC	DC Jack	1	DC standard	2m	AC/DC Unit output
AC/DC Unit input	90-264V AC	AC Jack	1	AC standard	2m	Power Wall Socket

Figure 1 EUT test configuration

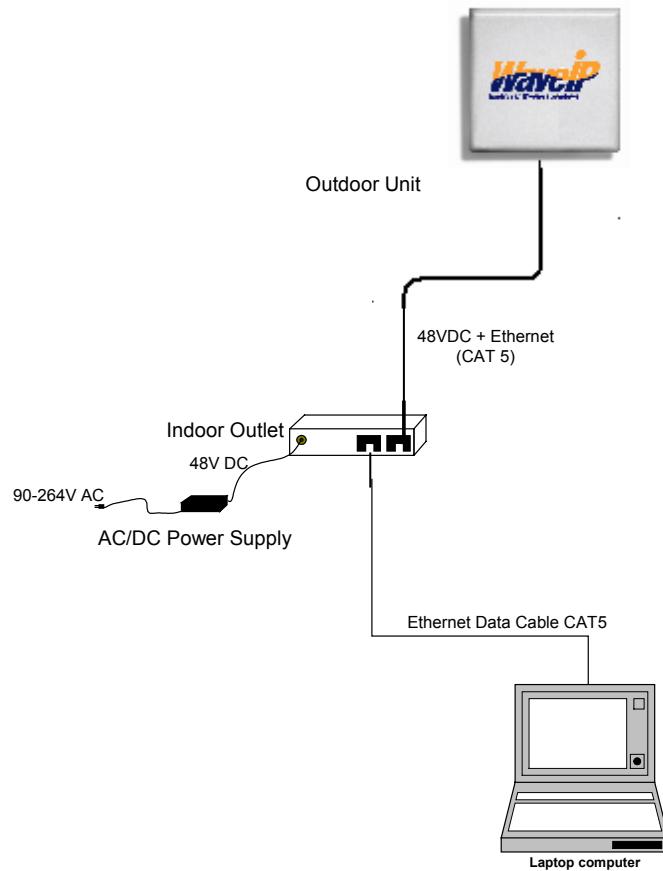

c. RF Software Version: PCB-V6

d. Transmitter description

(1) Radio Specifications

Operating Frequency	902-928MHz ISM band
Output Power	Up to 30dbm (at antenna port)
RF Waveform	Direct Sequence Spread spectrum(DSSS)
Number of Channel	21
RF Cannel Spacing	1MHz
Type of modulation	DQOSK, 16CCK1, 256 CCK
Data Rate	2.75 Mbps, 1.37 Mbps


(2) External, Integrated Antennas Technical characteristics

Antenna Type	Model	Gain (db)
Flat Panel Integrated	MTI-262002/C/A	6.5
Flat Panel	MTI-263006/N	12.5

(3) Transmitter Power Source
 Adapter 220VAC/12VDC

e. E.U.T Test Configuration

EUT test configuration is shown in figure bellow

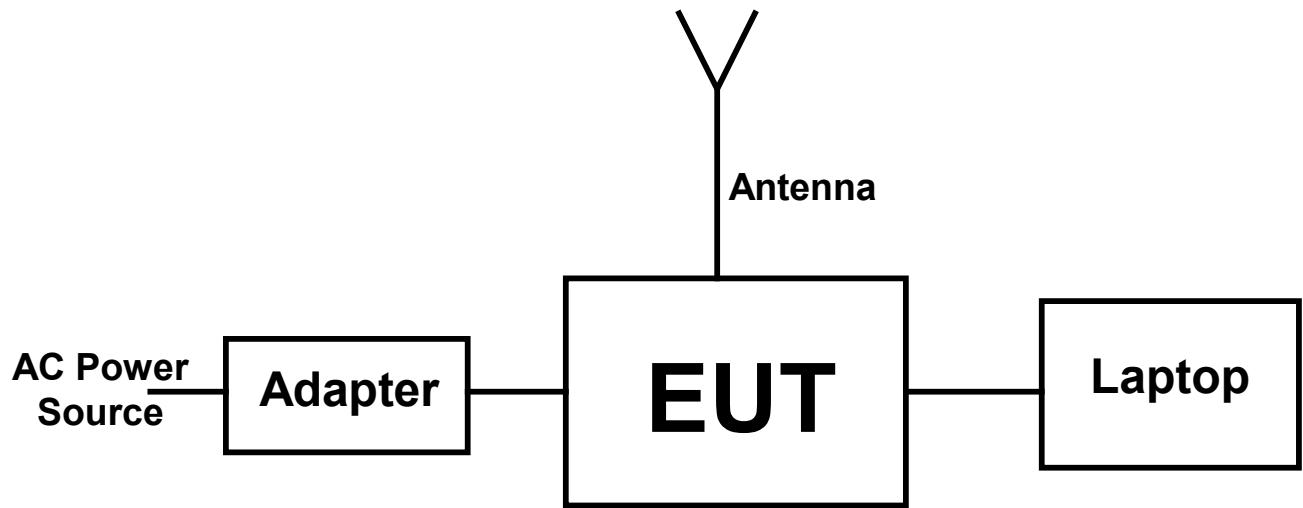
**f. E.U.T Mode of Operation description**

- (1) Transmit 30dbm-905MHz
- (2) Transmit 30dbm-915MHz
- (3) Transmit 30dbm-925MHz
- (4) Standby

4 Occupied Bandwidth for DSSS System According to 15.247(a) (2)

E.U.T: GigAccess 900Q S/N:00-50C2-1C-
 Test Method: ANSI 63.4
 Date: 10/11/04
 Relative Humidity: 26%
 Ambient Temperature: 22c
 Air Pressure: 1047hpa

Testing Engineer: D.Lanuel



Date 13/11/04

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with OCCUPIED BANDWIDTH

b. Limits of bandwidth

The test unit shall meet the limits of Table 4.b

Table 4.b Limits For Bandwidth

Operating Frequency (MHz)	Minimum allowed bandwidth
902 - 928	$\geq 500\text{KHz}$ for 6dbc

c. Test Results

Table 4.c Bandwidth Test Result

Frequency (MHz)	Bandwidth (MHz)	Bandwidth Max Limit(KHz)	Plot Results	PASS/FAIL
905 Δ2	4.95	$\geq 500\text{KHz}$	Plot-1	PASS
915	5.05		Plot-2	PASS
925 Δ2	5.51		Plot-3	PASS

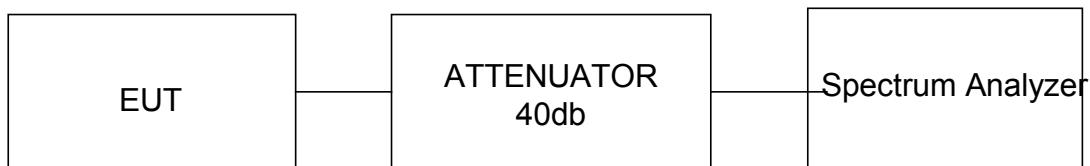
d. Test Instrumentation and Equipment

Table 4.d Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	31/01/05
Broadband Antenna	BTA-L	FRANKONIA	10.04.06
20db attenuator	2525-200	ATM	18.03.06

e. Test Procedure


The EUT output was connected to the spectrum analyzer through 40db attenuator,
The test set up are shown in figure 4e bellow

**Figure 4e Test Setup for Occupied Bandwidth test**

5 Maximum peak output power test according 15.247(b)(3)

E.U.T: GigAccess 900Q S/N:00-50C2-1C
 Test Method: ANSI 63.4
 Date: 10/11/04
 Relative Humidity: 26%
 Ambient Temperature: 22c
 Air Pressure: 1047hpa
 Test Setup: Figure 5e

Testing Engineer: D.Lanuel



Date 13/11/04

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with peak output power requirement

b. Limits

The test unit shall meet the limits of Table 5.b.

Table 5.b Limits For Fundamental

Operating frequency range (MHz)	Peak Max Limits(dBm)
902 - 928	30 (1W)

c. Test Results

Table 5.c Peak output power Result

Frequency (MHz)	Peak Result	peak Limits	Margine (dB)	Plots Result	Pass/ Fail
905MHz Δ2	29.87* Δ1	30dbm (1W)	0.12	Plot-4	PASS
915MHz	29.89*		0.46	Plot-5	PASS
925MHz Δ2	29.74*		0.33	Plot-6	PASS

*See calculation bellow-based on test procedure paragraph 5e

(1) 905MHz peak power calculation –based on plot-7

- a) BW correction factor is: $10\log 6db$ BW of emission/analyser RBW
- b) $10\log 5.65/3=2.75 \Delta 1$
- c) Output power: $27.12+2.75=29.87 \Delta 1$

(2) 915MHz peak power calculation –based on plot-8

- a) BW correction factor is: $10\log 6db$ BW of emission/analyser RBW
- b) $10\log 5.60/3=2.71$
- c) Output power: $27.18+2.71=29.89$

(3) 925MHz peak power calculation –based on plot-9

- a) BW correction factor is: $10\log 6db$ BW of emission/analyser RBW
- b) $10\log 5.55/3=2.67$
- c) Output power: $27.07+2.67=29.74$

d. Test Instrumentation and Equipment

Table5.d Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	31/01/05
Broadband Antenna	BTA-L	FRANKONIA	10.04.06
20db attenuator	2525-200	ATM	18.03.06

e. Test Procedure

- (1) Spectrum analyzer measured the transmitter peak output power while the RBW of analyzer is 3MHz and the RBW of transmitter is 20MHz.
- (2) When the analyzer RBW is not large enough as required. the peak output power procedure is as follows:
 - a) Set the RBW and VBW to the maximum available.
 - b) Set the band limit to 6db
 - c) Set sweep to automatic
 - d) Set the span just enough to capture the emission
 - e) Use the peak detector on max hold
 - f) Set the analyzer on linear mode display
 - g) Let the emission stabilize before making a final reading

BW correction factor is: $10\log \frac{6\text{db}}{\text{RBW}}$ BW of emission/analyizer


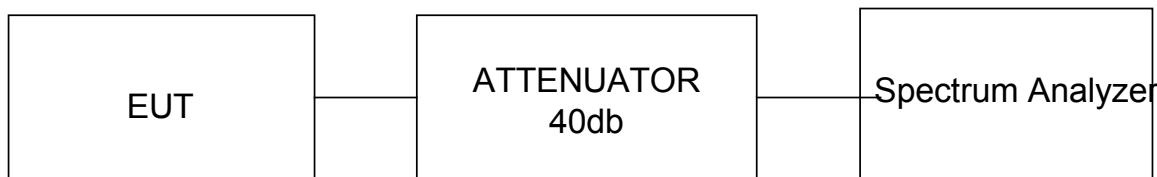


Figure 5e Test Setup for Peak output power

6 Out of band conducted emission test according to 15.247(c)

E.U.T: GigAccess 900Q S/N:00-50C2-1C
 Test Method: ANSI 63.4
 Date: 10/11/04
 Relative Humidity: 26%
 Ambient Temperature: 22c
 Air Pressure: 1047hpa
 Test Setup: Figure 6.e

Testing Engineer: D.Lanuel



Date 13/11/04

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with Out of band conducted emission test according to 15.247(c)

b. Limits of out of band conducted emission according to 15.247 (c)

The test unit shall meet the limits of Table 6.b.

Table 6.b Limits For 15.231(b)

Frequency range(MHz)	Limits (dB μ V/m)
0.009 – 9200	110 (20db bellow peak power)

c. Test Results

Table 6.c Results For 15.231(b)

Operating Frequency (MHz)	Frequency range (MHz)	Results (dB μ V/m)	Plots Result
915MHz	0.009 – 9200	All emission were found Min 30db below the specified limits	7 - 16

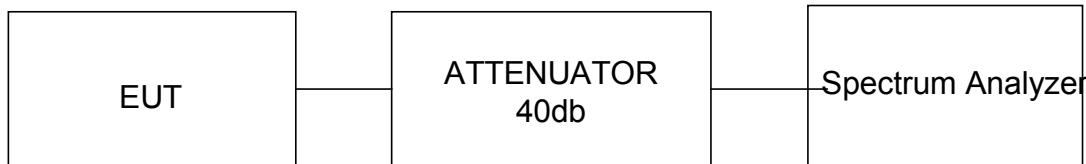
d. Test Instrumentation and Equipment

Table 6.d Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	31/01/05
20db attenuator	2525-200	ATM	18.03.06

e. Test Procedure


The EUT output was connected to the spectrum analyzer through 40db attenuator.
 The test set up is shown in figure 6e bellow.


Figure 6e Test Setup for Conducted emission

7 Radiated emission in restricted bands test according 15.247(c), 15.205 and 15.209

E.U.T: GigAccess 900Q S/N:00-50C2-1C
 Test Method: ANSI 63.4
 Date: 13/11/04
 Relative Humidity: 26%
 Ambient Temperature: 22c
 Air Pressure: 1047hpa
 Test Setup: Figure 7.e.1 – 7.e.10

Testing Engineer: D.Lanuel



Date 20/11/04

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with radiated emission restricted band test

b. **Limit:** Radiated emission, which fall in the restricted bandwidth must comply with 15.209(a) Limits. See limits in table 8c below.

Table 7.b Limits For 15.209 Class B equipment

Frequency Range (MHz)	Quasi-peak Limits (dB μ V/m)
0.009 – 1.705	128 - 70
1.705 - 30	70
30 - 88	40
88 - 216	43
216 - 960	46
960 - 2000	54

c. Results
(1) Preliminary Results
Table 7.c1 Preliminary test results

Configuration	Transmitting Frequency	Frequency Range	Plots Results	PASS/FAIL
6dbi antenna Integrated	905MHz	9KHz-9.2GHz	17 - 29	PASS
	915MHz		30 - 42	PASS
	925MHz		43 - 55	PASS
12.5dbi Flat Panel Antenna	905MHz	9KHz-9.2GHz	56 - 68	PASS
	915MHz		69 - 81	PASS
	925MHz		82 - 94	PASS

(2) Final Test Results
Table 7c2 Six Highest

Freq. (MHz)	Transmitting Frequency	Q P Reading (db μ V/m)	Q.P Limit (db μ V/m)	Margin (db)	Polarity Ver/Hor	Height m
*40.15	905MHz 6dbi Ant	40.4	110	-69.6	V	1.65
*32.055	905MHz 6dbi Ant	37.7	110	-72.3	V	1.65
126.985	905MHz 6dbi Ant	26.9	43.5	-16.6	V	1
409.685	905MHz 6dbi Ant	32.4	46	-13.6	H	1
960.387	925MHz 6dbi Ant	45.1	54	-8.9	V	1.65
960.001	925MHz 12.5dbi Ant	47.8	54	-6.2	V	1.65

*Not Restricted

d. Test Instrumentation and Equipment

Table 7.d

Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	31/01/05
Double Ridge Guide Antenna(1-18GHz)	3105	EMCO	24.04.05
Broadband Antenna	BTA-L	FRANKONIA	10.04.05
Low Noise Amplifier (0-1GHz)	AM-1300-N	MITEQ	14.01.05
Low Noise Amplifier (1-4GHz)	AMM 003N	AVANTEK	14.01.05
Low Noise Amplifier (2-6GHz)	MWA-02060	ELISRA	14.01.05
Low Noise Amplifier (6-18GHz)	MWA-06180	ELISRA	14.01.05
Low pass filter 100MHz	LD110	FSY	17.04.05
Low pass filter 700MHz	360A	HP	18.05.05
Band reject filter 902 – 928MHz	BRF 900	TADIRAN	20.05.05
Attenuator 20db	2525-20	ATW	18.03.06
Attenuator 3db	AN9146	WEINSCHEL	23.06.05
Attenuator 6db	AP2542	WEINSCHEL	23.06.05

e. Test Procedure
(1) -General

a) The test was performed with transmitter operating 3-carrier frequency, F_{min} -905MHz, F_{center} -915MHz, F_{max} -925MHz.

b) The test was performed according tests setup in paragraph 7e(4)

(2) Preliminary test procedure

a) The measuring system block diagram is shown in Figure 7.a.1.

b) E.U.T orientation and antenna position shown in Figure 7.a.2

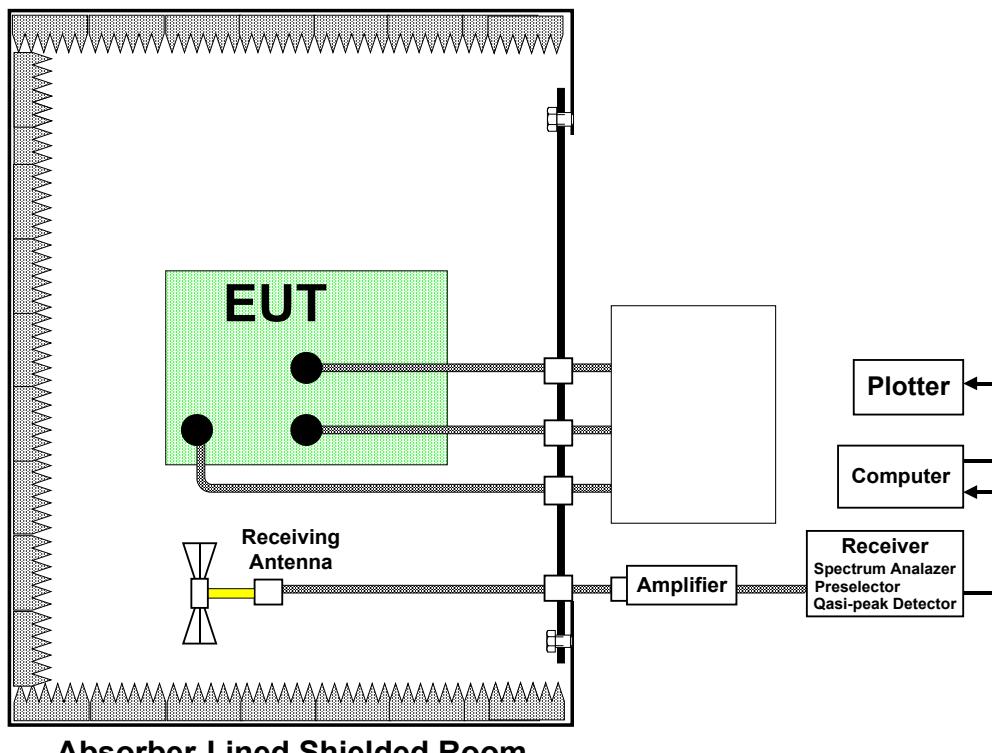


Figure 7.e.1



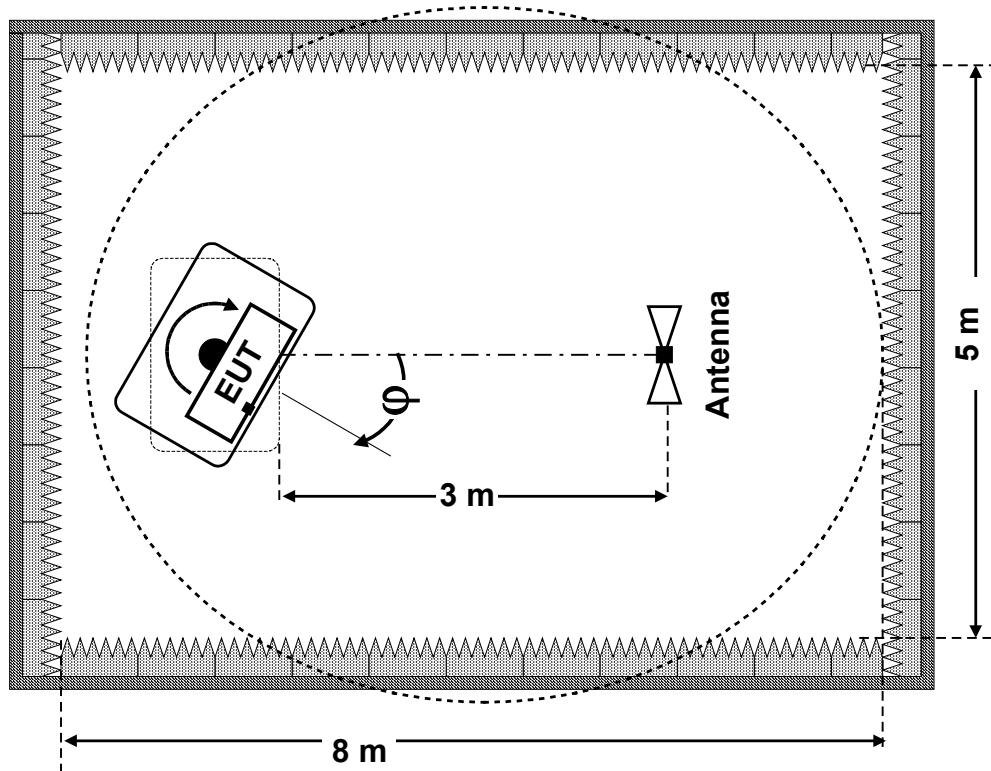


Figure 7.e.2

- c) Maintain setup in absorber-lined shielded room as shown in Figures 4.a.1, 4.a.2
- d) Turn on the E.U.T and allow sufficient time for stabilization.
- e) Monitor the frequency range of interest at a fixed antenna height and E.U.T azimuth.
- f) Rotate the E.U.T 360° to maximize the suspected highest amplitude signal.
- g) Move the antenna over its full-allowed range of travel to maximize the suspected highest amplitude signal.
- h) Change the polarity of the antenna and repeat step d and e. compare the result suspected highest amplitude signal with that found for the other polarity. Select and note the higher of the two signals. The signal is termed the highest observed signal with the respect to the limit.
- i) Repeat testing for each operational mode of the E.U.T.
- j) Choose six highest emissions relative to limit and record antenna heights and polarities, E.U.T configuration for each emission frequency.
- k) Perform measurements for selected frequencies using quasi-peak detector.

(3) Final test procedure

- a) The measuring system block diagram shown in Figure 7.e.3
- b) E.U.T orientation and antenna position shown in Figure 7.e.4

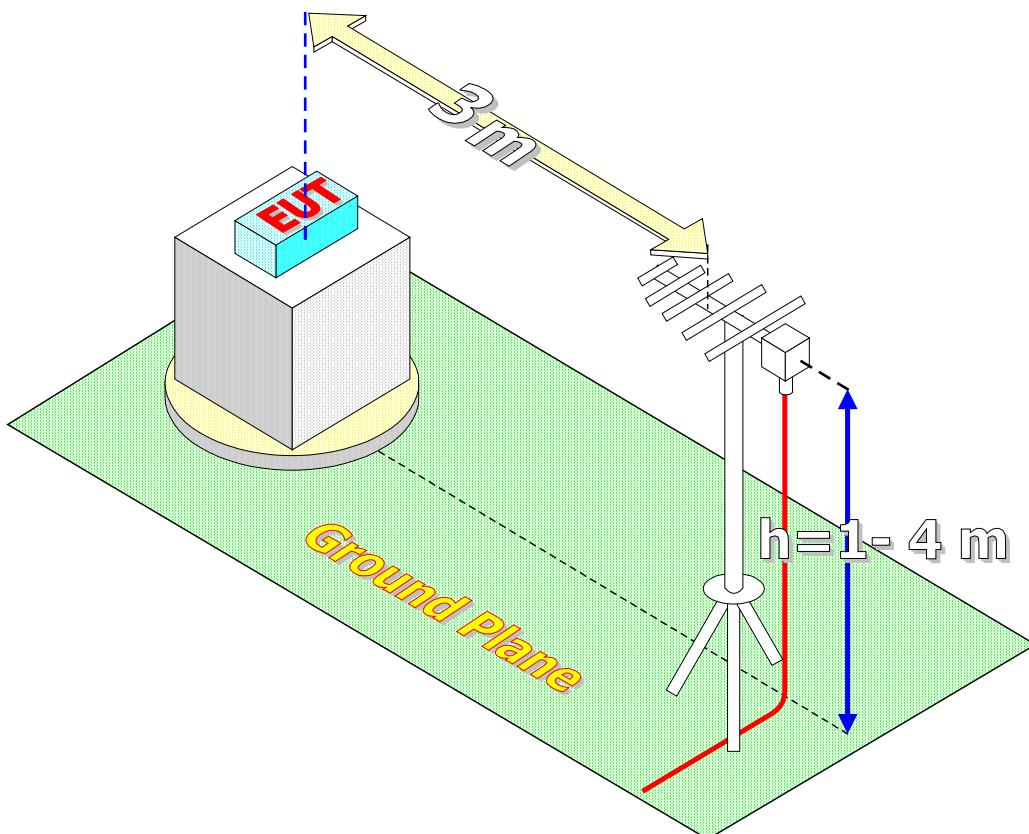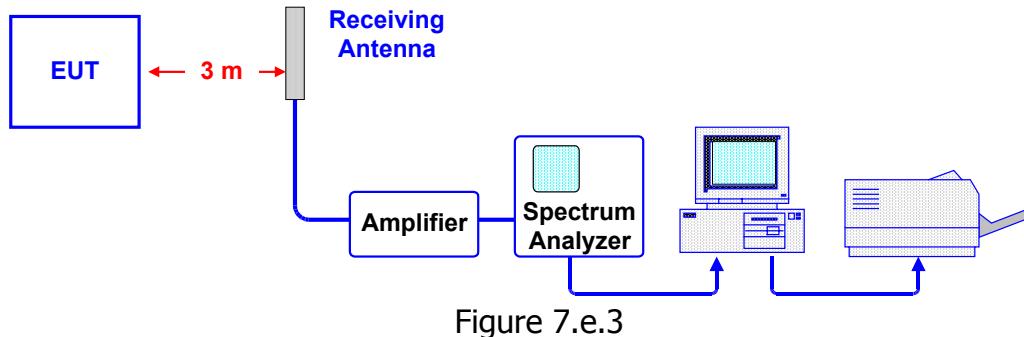

(4) Tests Setup

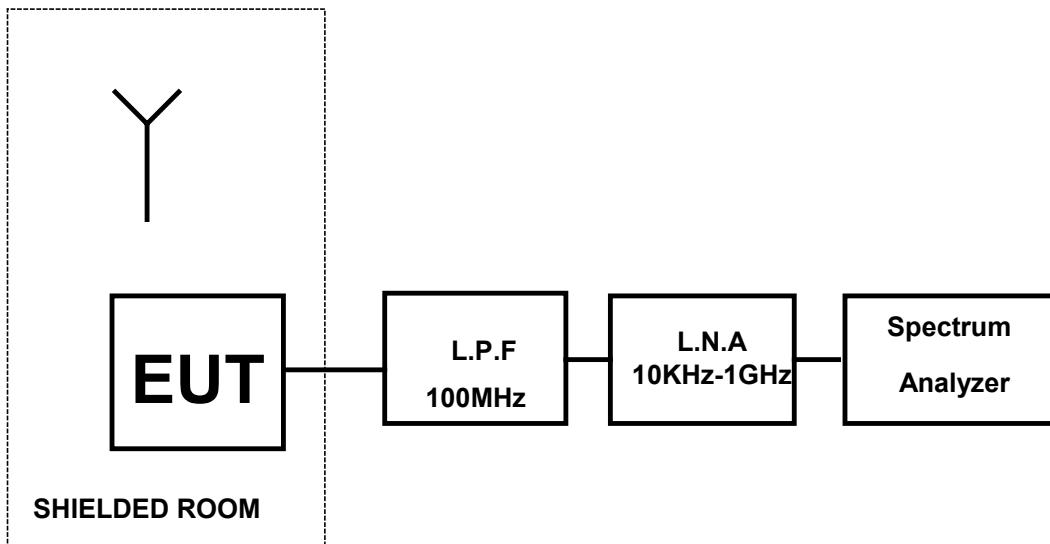


Figure 7.e.5 Radiated emission Test setup for freq range of 10KHz – 100MHz

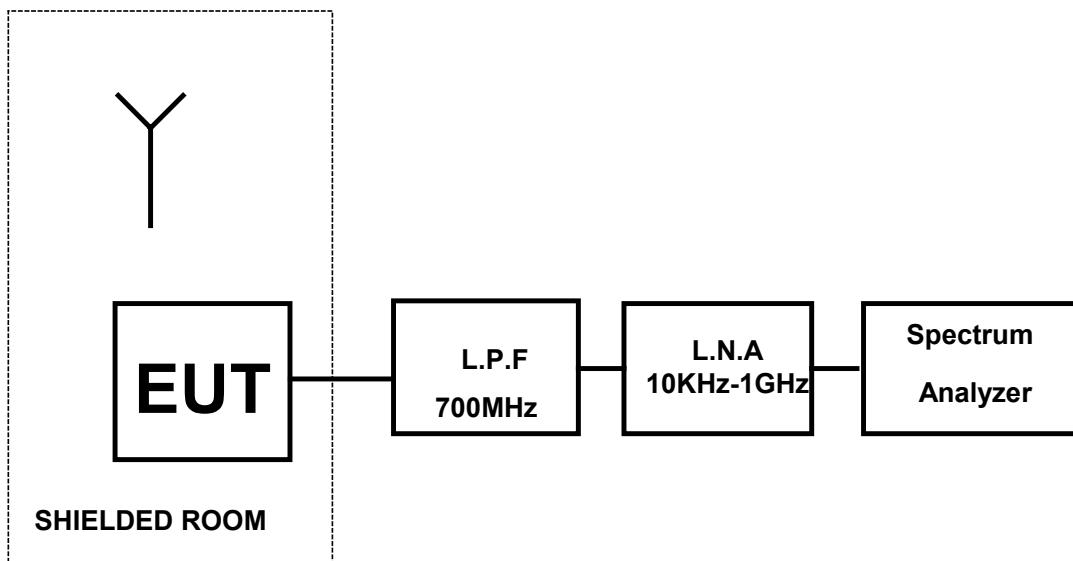


Figure 7.e.6 Radiated emission Test setup for freq range of 100MHz – 700MHz

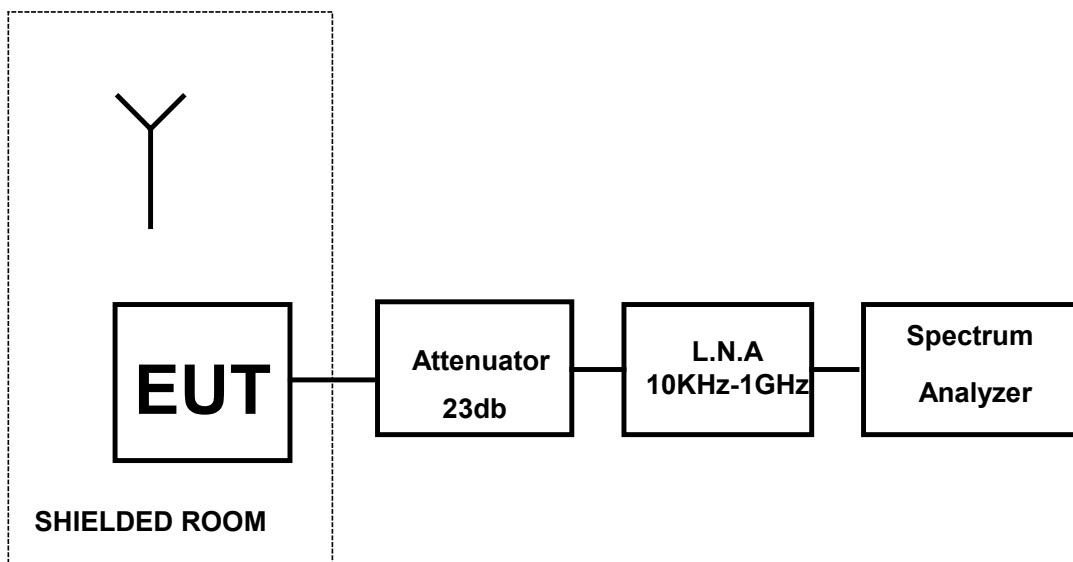


Figure 7.e.7 Radiated emission Test setup for freq range of 960MHz – 1GHz

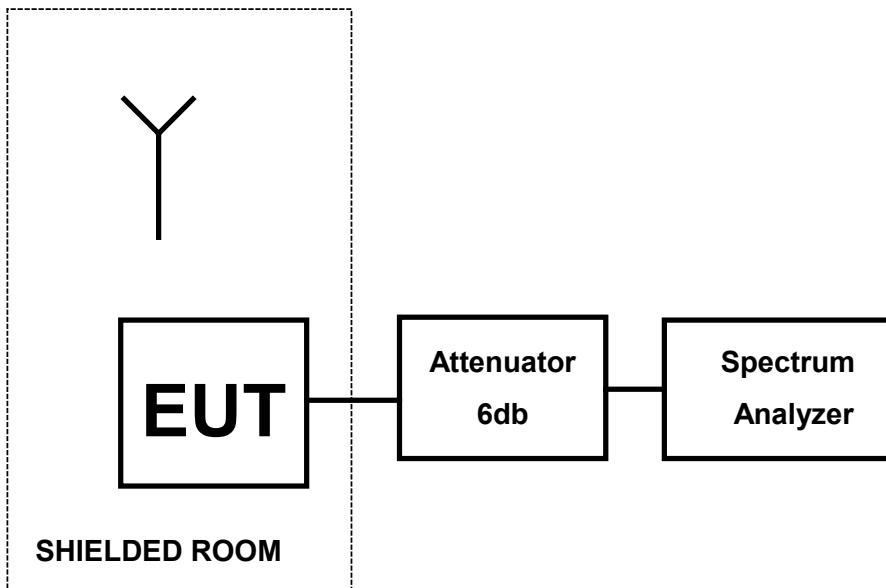


Figure 7.e.8 Radiated emission Test setup for freq range of 1GHz – 2GHz

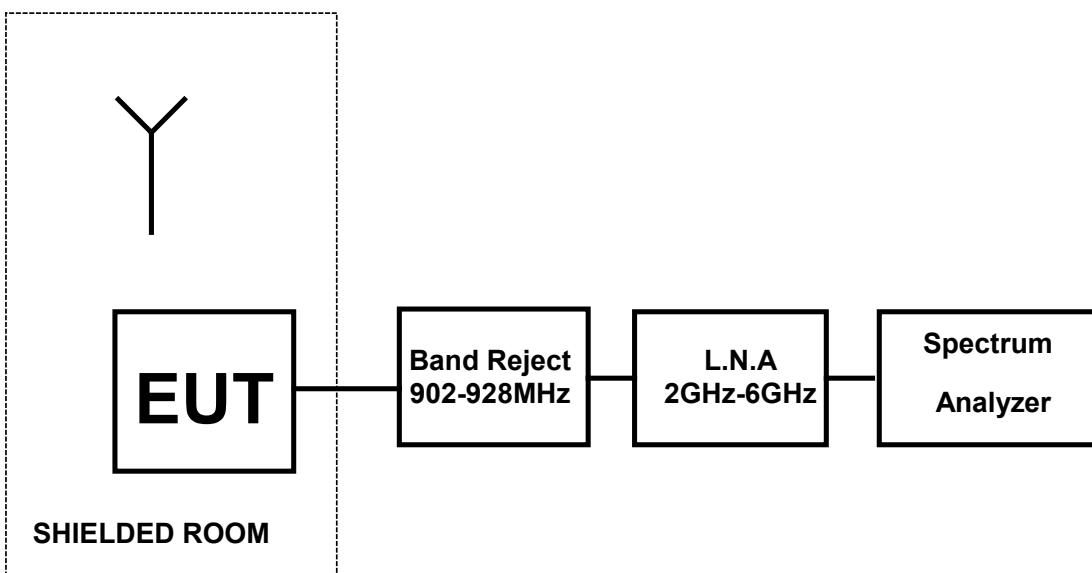


Figure 7.e.9 Radiated emission Test setup for freq range of 2GHz – 6GHz

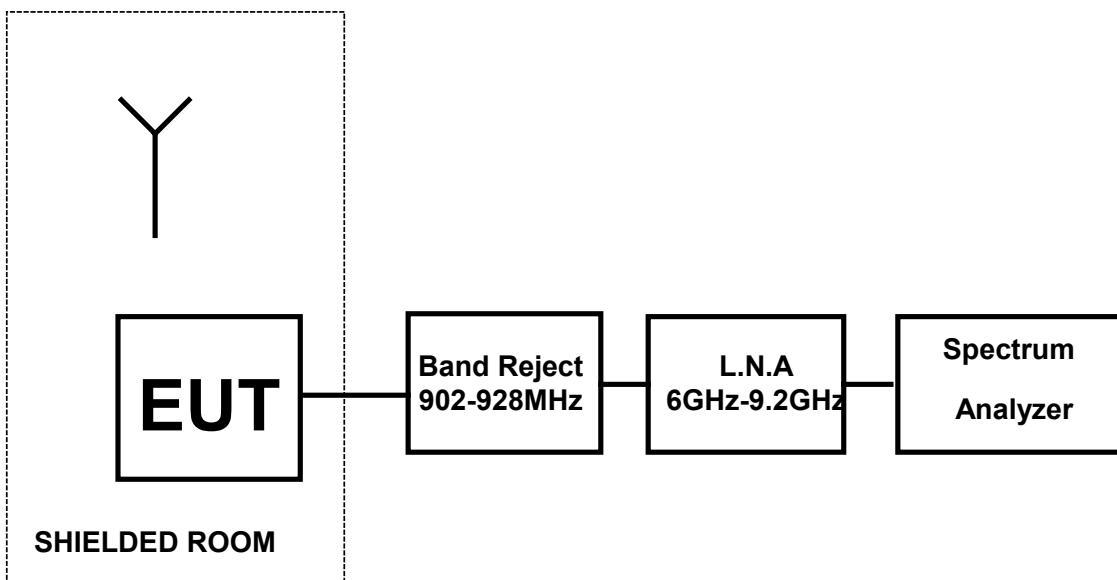


Figure 7.e.10 Radiated emission Test setup for freq range of 6Hz – 9.2GHz

8 Peak power spectral density of DSSS according 15.247d

E.U.T: GigAccess 900Q S/N:00-50C2-1C
 Test Method: ANSI 63.4
 Date: 10/11/04
 Relative Humidity: 26%
 Ambient Temperature: 22c
 Air Pressure: 1047hpa
 Test Setup: Figure 8.e

Testing Engineer: D.Lanuel



Date 13/11/04

a. Test Results Summary & Conclusions

The E.U.T was found in compliance peak power spectral density test

b. Limit

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dbm in any 3 KHz band during any time interval of continuous transmission

c. Test Results

Carrier Frequency(MHz)	Measured peak power spectral density (dbm)	Plots
912	6.99	95, 96
915	6.75	97,98
918	7.14	99,100

d. Test Instrumentation and Equipment

Table 8.d

Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	31/01/05
Broadband Antenna	BTA-L	FRANKONIA	10.04.06
20db attenuator	2525-200	ATM	18.03.06

e. Procedure

The EUT RF output was connected to the spectrum analyzer through 40db attenuator according to test setup bellow.

The test was performed with transmitter operating 3-carrier frequency, Fmin-912MHz, Fcenter-915MHz, Fmax-918MHz.

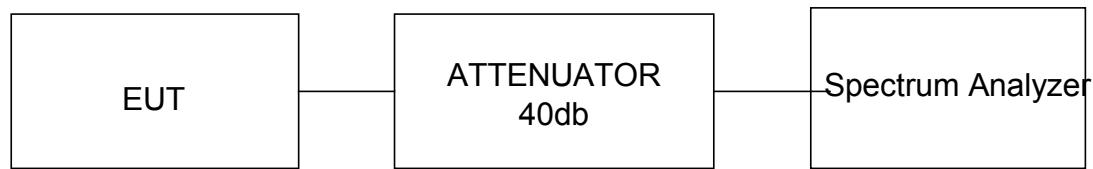


Figure 8e Test Setup for peak power spectral density

9 Unintentional radiated emission test according to 15.109

E.U.T: GigAccess 900Q S/N:00-50C2-1C
 Test Method: ANSI 63.4
 Date: 13/11/04
 Relative Humidity: 26%
 Ambient Temperature: 22c
 Air Pressure: 1047hpa

Testing Engineer: D.Lanuel



Date 13/11/04

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with unintentional radiated emission requirements.

b. Limit:

Unintentional radiated emission must comply with 15.109 Limits. See limits in table 10c below.

Table 9.B Limits For 15.109 Class B equipment

Frequency Range (MHz)	Quasi-peak Limits (dB μ V/m)
30 - 88	40
88 - 216	43
216 - 960	46
960 - 2000	54

c. Test Results

Table 9.c1 .Preliminary test results

Configuration	Antenna Polarization	Frequency Range(MHz)	Plots Results	PASS/FAIL
6dbi antenna Integrated	Both	30-1000	101	PASS
		1-2.8GHz	102	PASS
		2.8 - 6GHz	103	PASS
		6GHz - 6.5GHz	104	PASS
		6.5GHz - 9.2GHz	105	PASS

Table 10.C Six Highest 15.109

Freq. (MHz)	QP Reading (dB μ V/m)	QP Limit (dB μ V/m)	Margin (db)	Compliance PASS/FAIL	Plots
35.029	37.0	40	-3	PASS	101
30	22.7	40	-17.3	PASS	
37.275	27.3	40	-12.7	PASS	
49.4	21.1	40	-18.9	PASS	

d. Test Instrumentation and Equipment

Table 10.d

Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	31/01/05
Double Ridge Guide Antenna(1-18GHz)	3105	EMCO	24.04.05
Broadband Antenna(30-1000MHz)	BTA-L	FRANKONIA	10.04.05
Low Noise Amplifier (0-1GHz)	AM-1300-N	MITEQ	14.01.05
Low Noise Amplifier (1-4GHz)	SMC-09	MITEQ	14.01.05
Low Noise Amplifier (2-6GHz)	SMC-09	MITEQ	14.01.05
Low Noise Amplifier (6-10GHz)	SMC-09	MITEQ	14.01.05


e. Procedure

The EUT output was connected to the spectrum analyzer through appropriate low noise amplifier while the EUT is in STBY mode.

10 Conducted emission test according to 15.207.15.107

E.U.T: GigAccess 900Q S/N:00-50C2-1C-C3-3D
 Test Method: ANSI 63.4
 Date: 12/11/04
 Relative Humidity: 26%
 Ambient Temperature: 22c
 Air Pressure: 1047hpa
 Test Setup: Figure CE-2

Testing Engineer: D.Lanuel



Date 13/11/04

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with conducted emission power leads requirements.

b. Limit:

Conducted emission must comply with 15.107 Limits. See limits in table 10b bellow.

Table 10.b Limits For 15.209 Class B equipment

Frequency (MHz)	Quasi-peak Limits (dB μ V/m)
0.15 – 0.5	66-56
0.5 - 5	56
5 - 30	60

c. Test Results –P LOTS 122,123

Table 10.c test results

Frequency Range(MHz)	Tested Line	Plots Results	PASS/FAIL
0.15 - 30	PHASE	106	PASS
0.15 - 30	NEUTRAL	107	PASS

Table 10.C1 Six Highest 15.107

Freq. MHz	QP Reading (dB μ V/m)	Limit (dB μ V/m)	Margin (db)	Plots
1.527	54.5	56	-1.5	133,134

d. Test Instrumentation and Equipment

Table 10.d

Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	31/01/05
LISN	DC-AC-20A/01	TADIRAN	N.P.C.R
20DB attenuator	2525	ATM	18.03.06

e. Procedure
(1) -General

The AC adapter of EUT was connected to the AC power through the LISN.

The procedure was performed according the "test procedure" paragraph

(2) set up

- a) *Calibration setup shown in Figure CE-1.*
- b) *The testing setup shown in Figure CE-2.*
- c) *configurations for Equipment and cable are shown in Figure CE-3.*

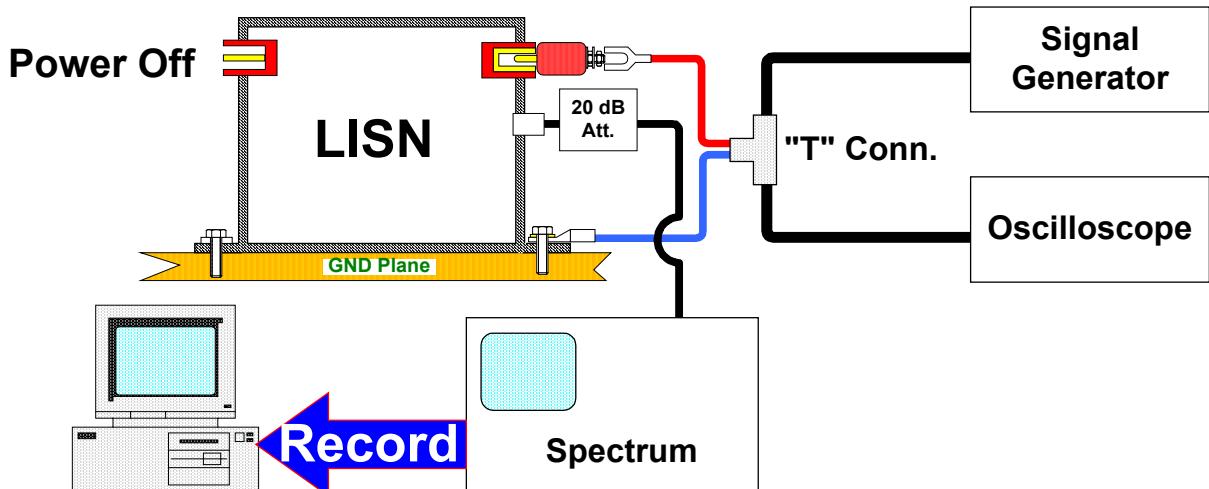


Figure CE-1

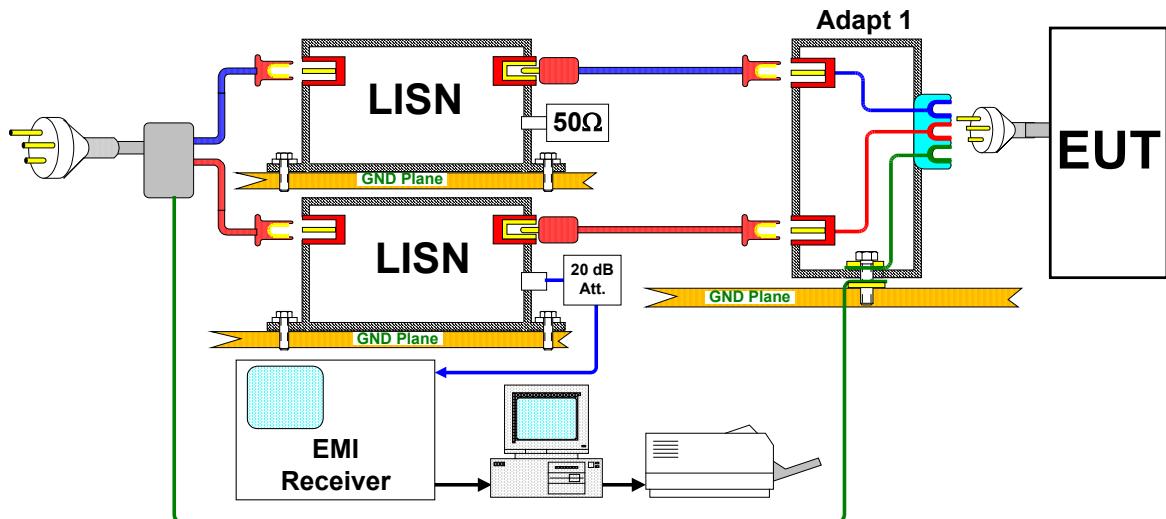


Figure CE-2

(3) Test Procedure

The test procedure shall be as follows:

(4) Calibration.

Perform the measured system check using the calibration setup shown in Figure CE-1.


- a) Turn on the measurement equipment and allow sufficient time for stabilization.
- b) Apply the calibrated signal level, which is 6 dB below the limit given in Table 1 at 500kHz and 29 MHz to the power output terminal of LISN.
- c) Scan the spectrum analyzer for each frequency in the same manner as a normal data scan. Verify that the spectrum analyzer indicates a level within ± 3 dB of injected level. Correction factor shall be applied for LISN and 20 dB for attenuator.

(5) E.U.T Testing. Perform emission data scan using the measurement setup shown in Figures CE-2


- a) Turn on the E.U.T to operational mode and allow sufficient time for stabilization.
- b) Select (Phase) lead for testing.
- c) Scan the spectrum analyzer over the applicable frequency range
- d) Repeat (2) and (3) for (Neutral) lead.
- e) Choose six highest emissions relative to limit and feel Table CE-3.
- f) Perform measurements for selected frequencies using quasi-peak detector.

11 Plots


a. Occupied bandwidth plots 1-3

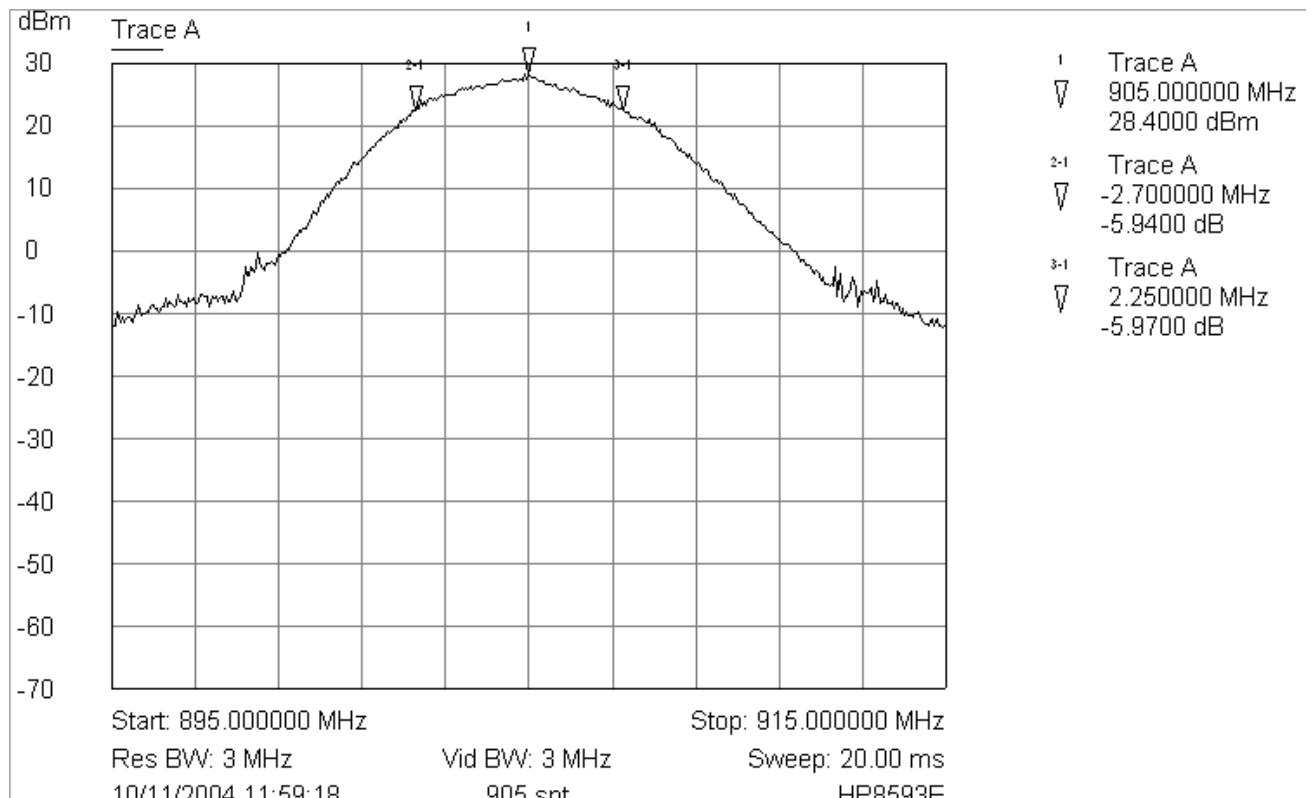



Plot / 1

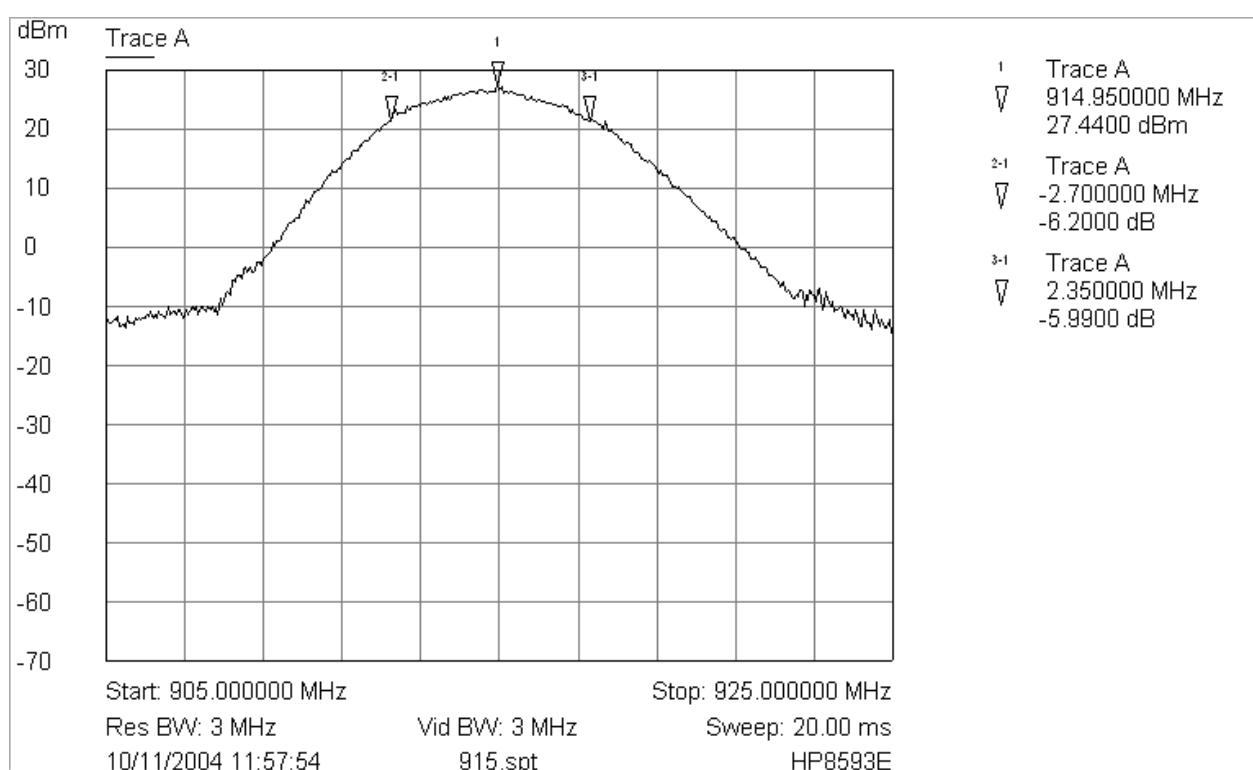




Plot / 2


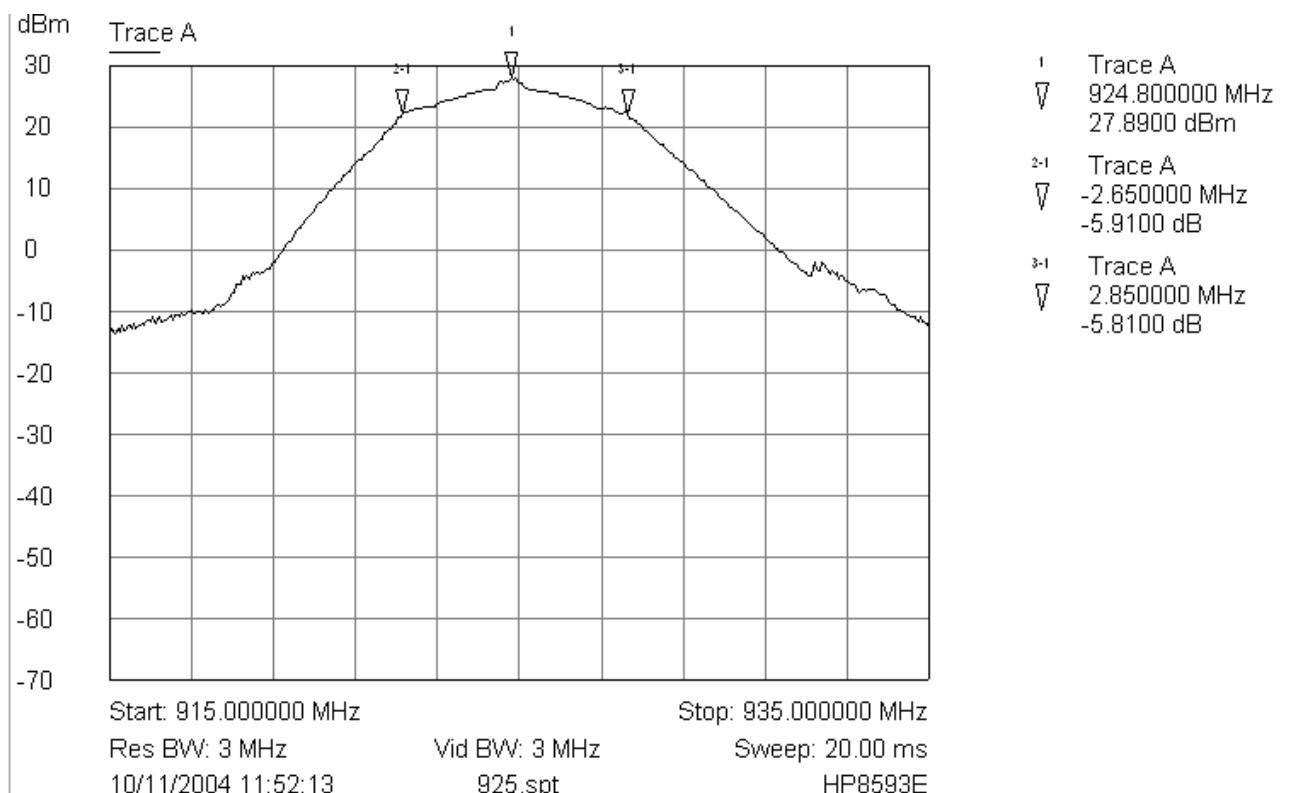



Plot / 3

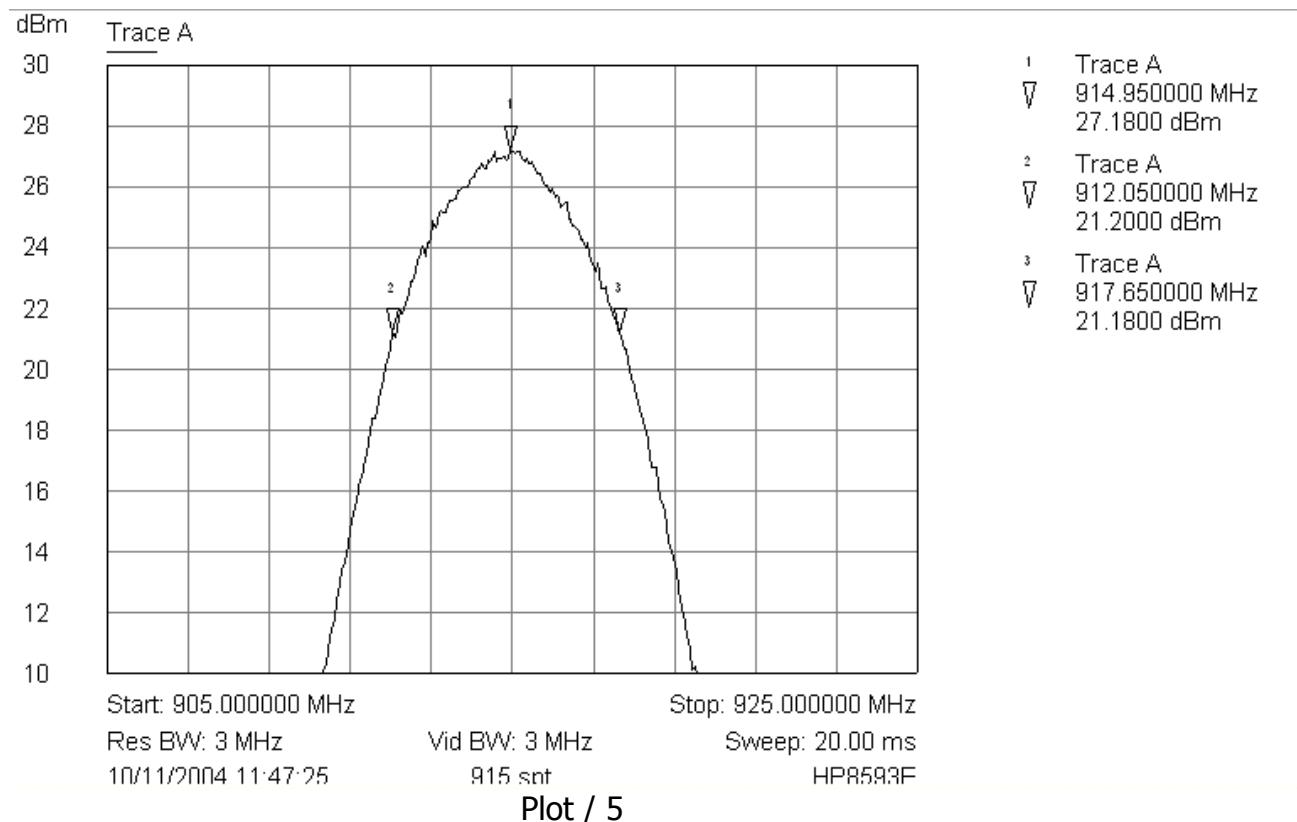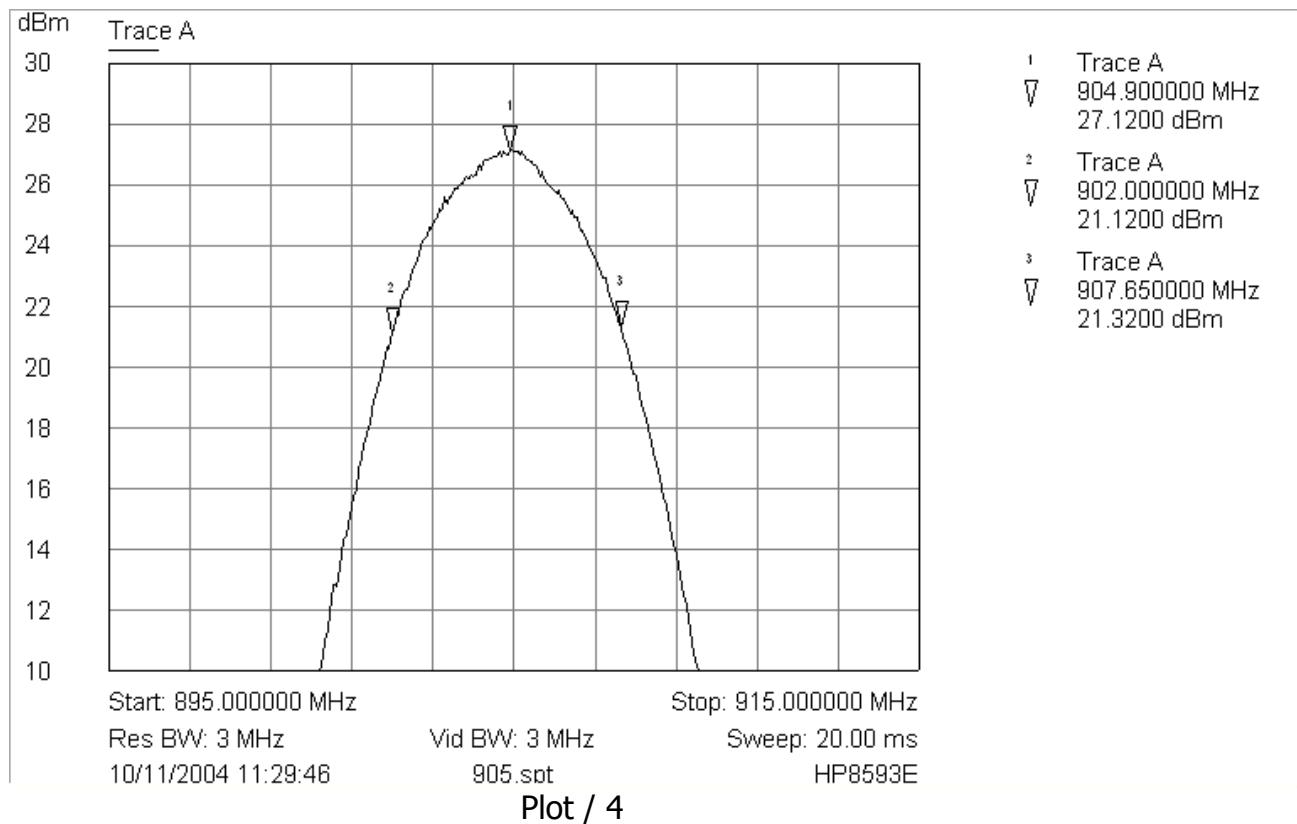b. Maximum peak output power plots 4-6

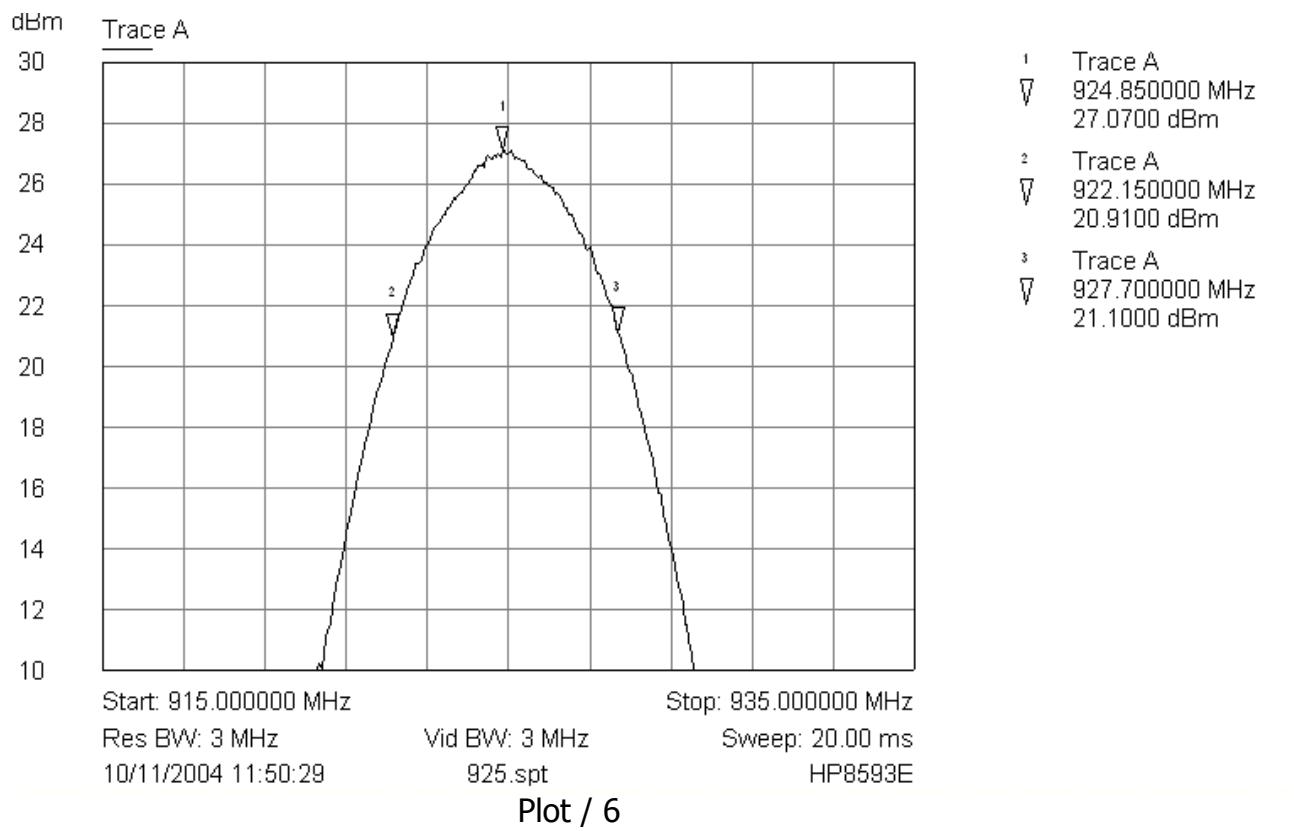
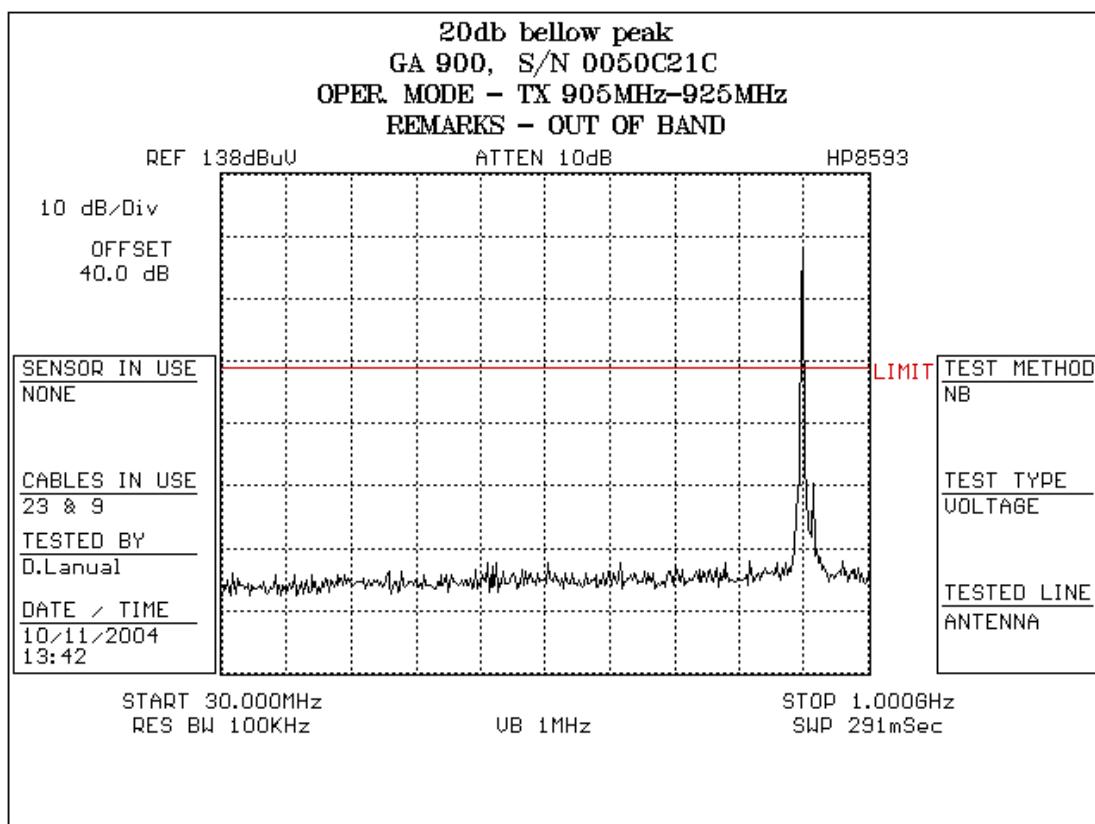


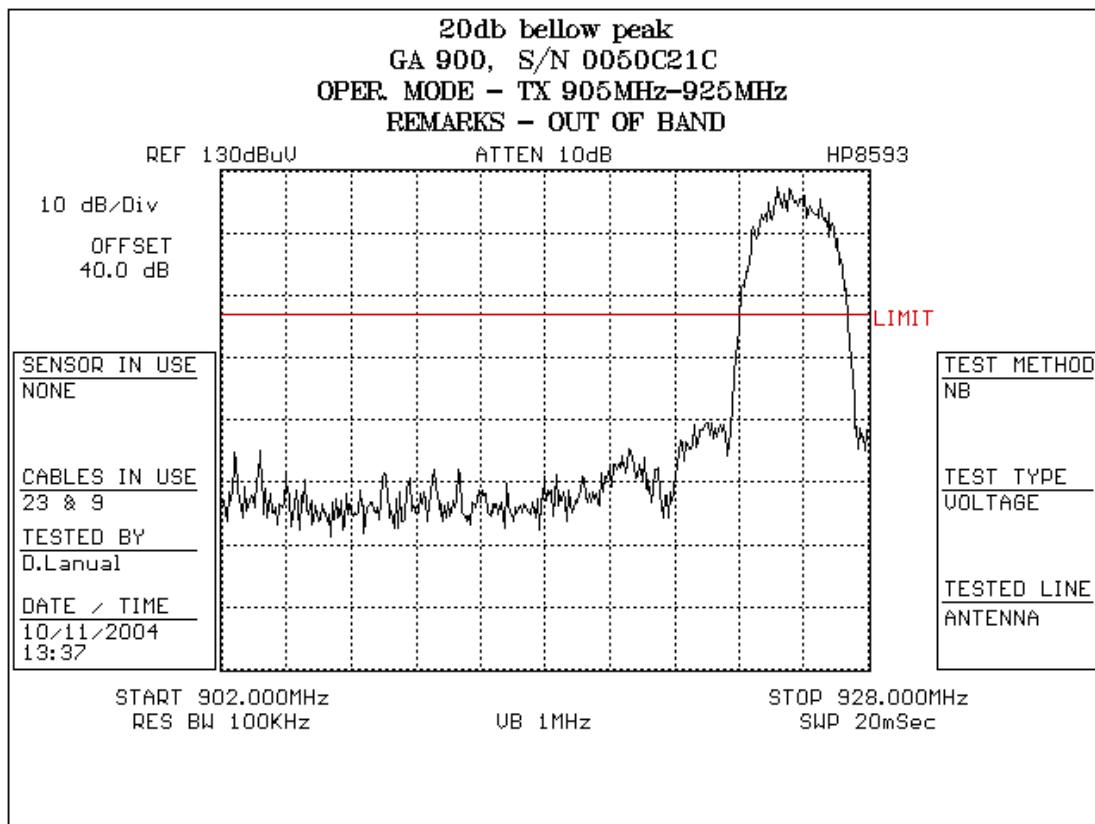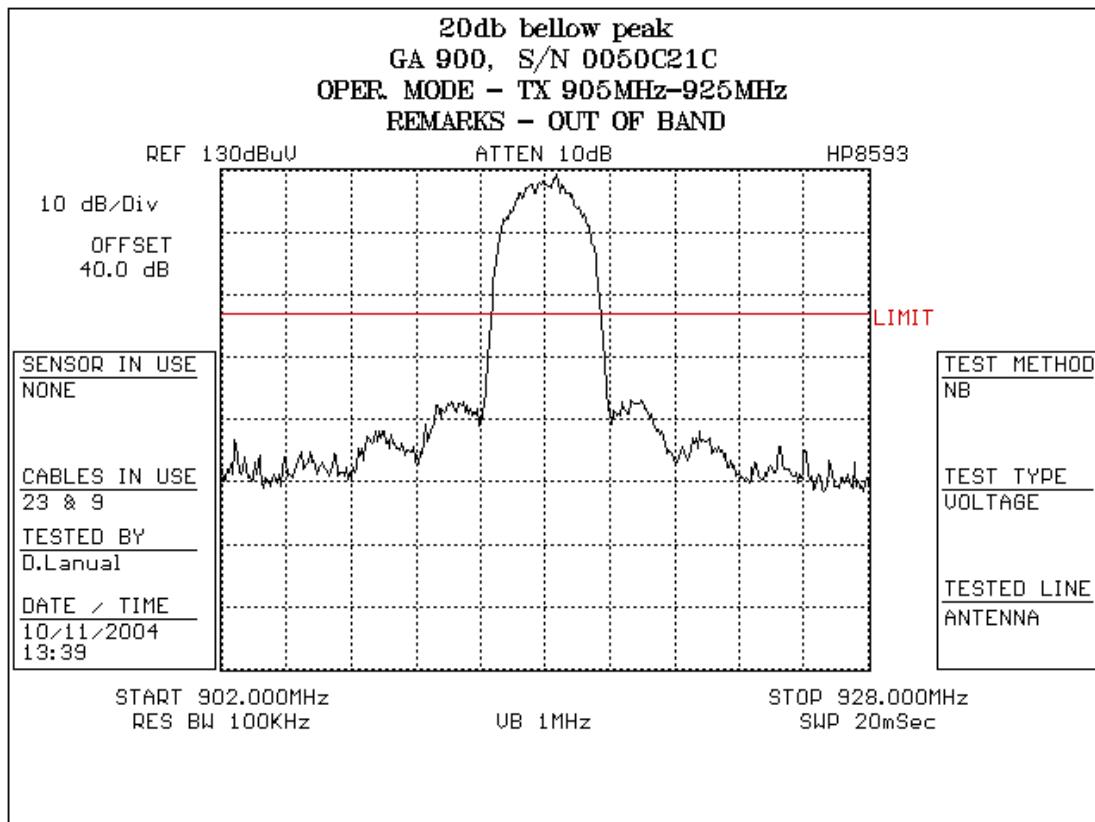C. Out of band emission 7 - 16

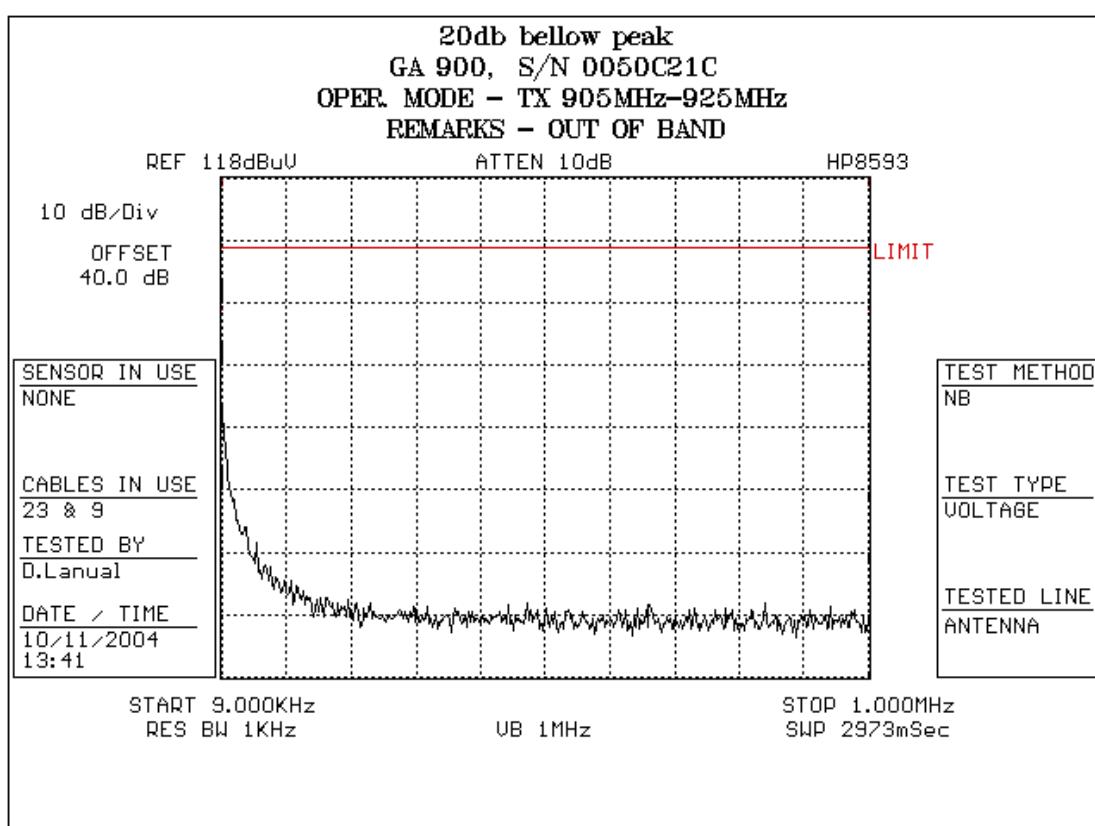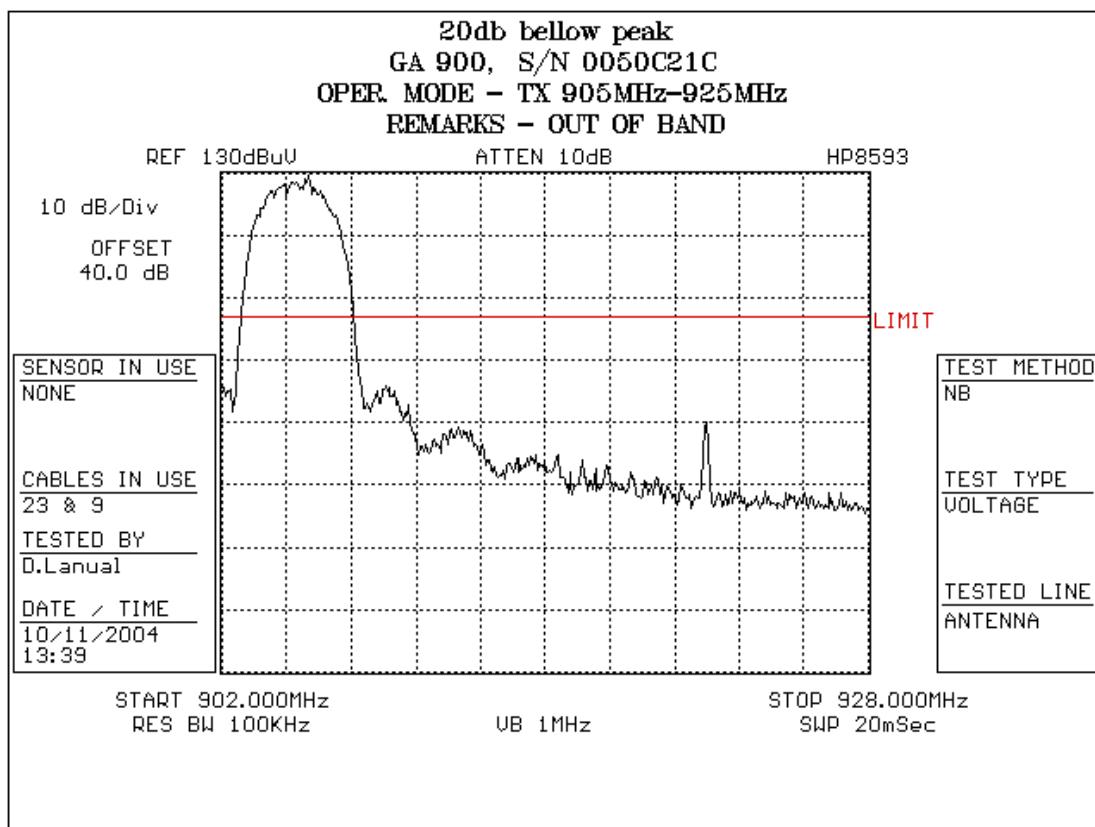Plot / 7

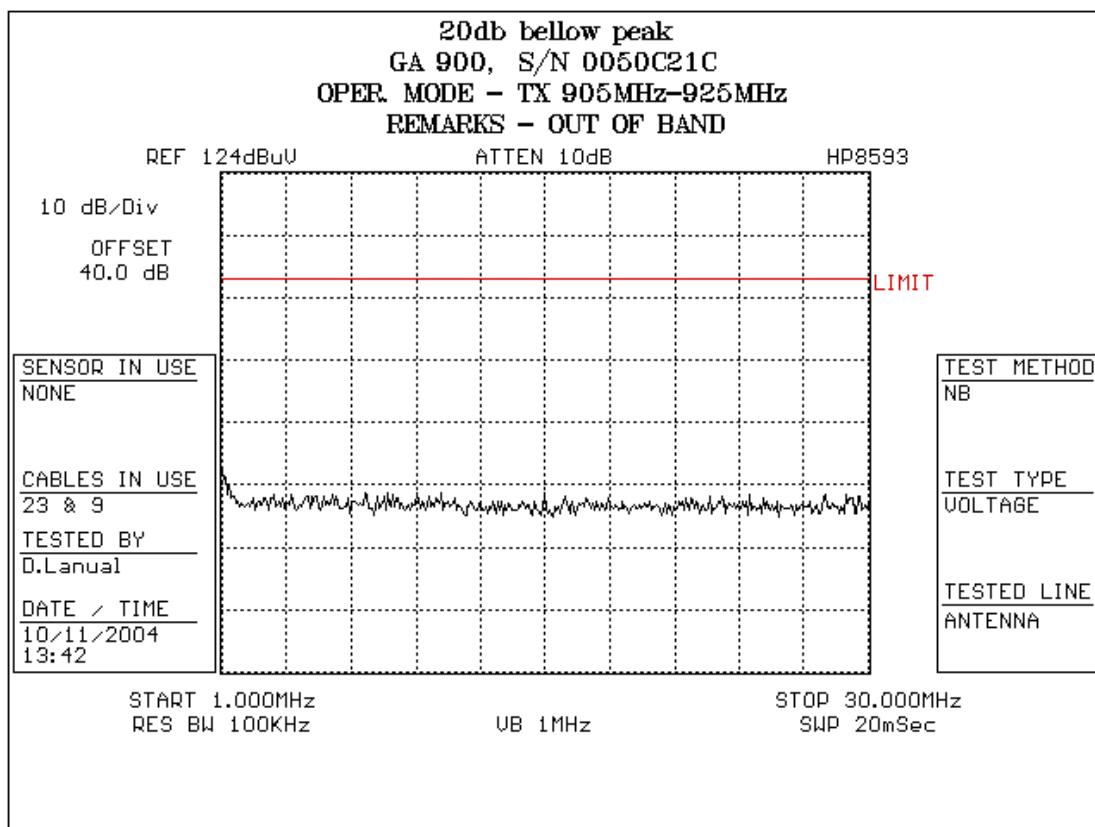Plot / 8







Plot / 11




Plot / 12

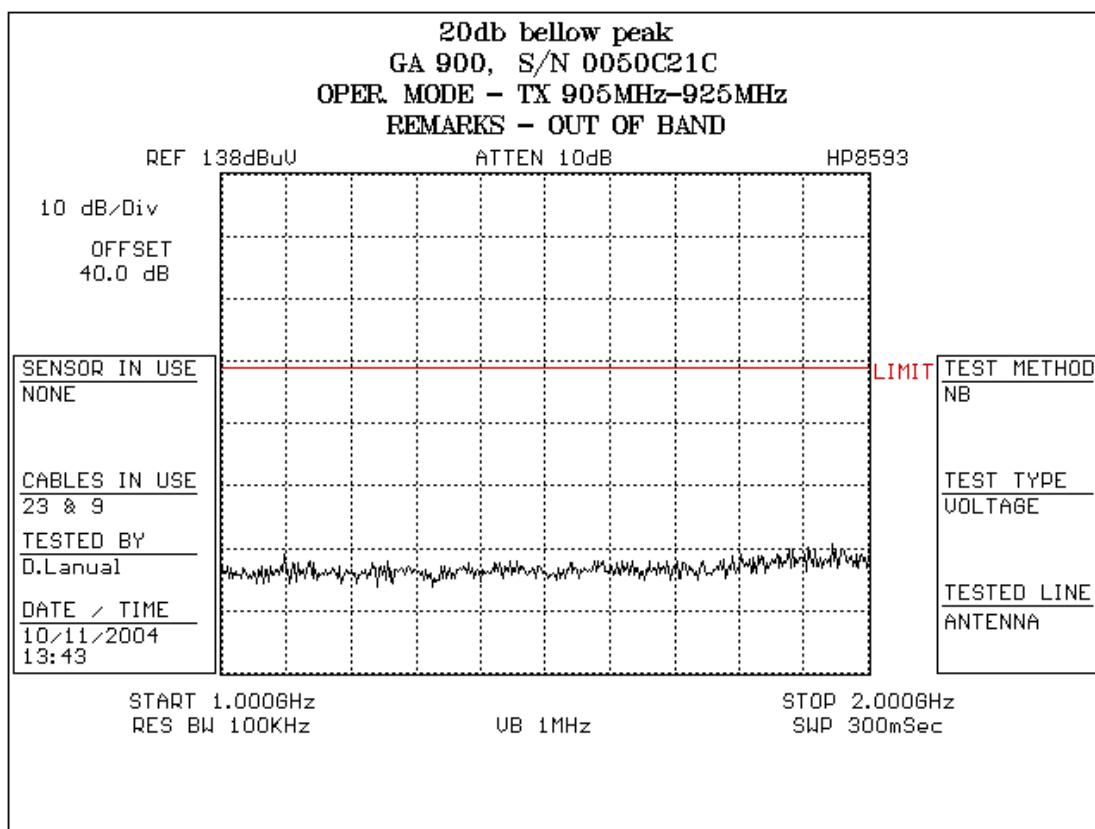


Plot / 13

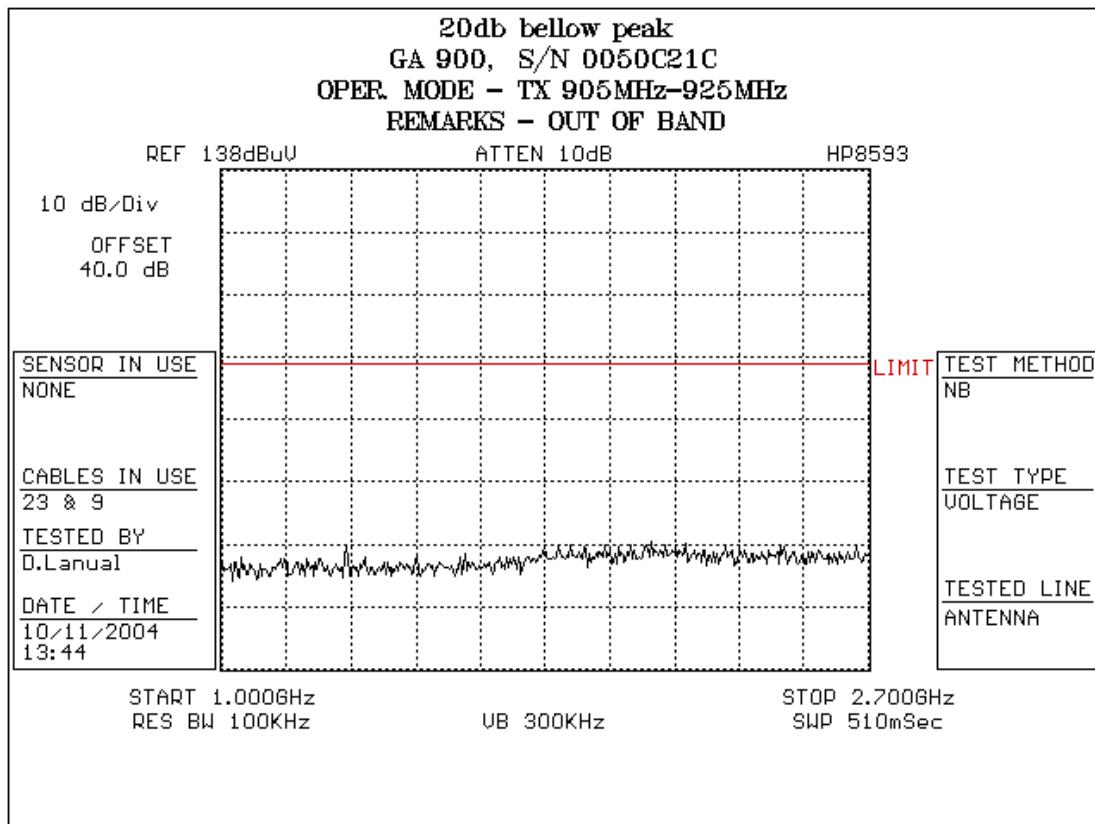

Plot / 14

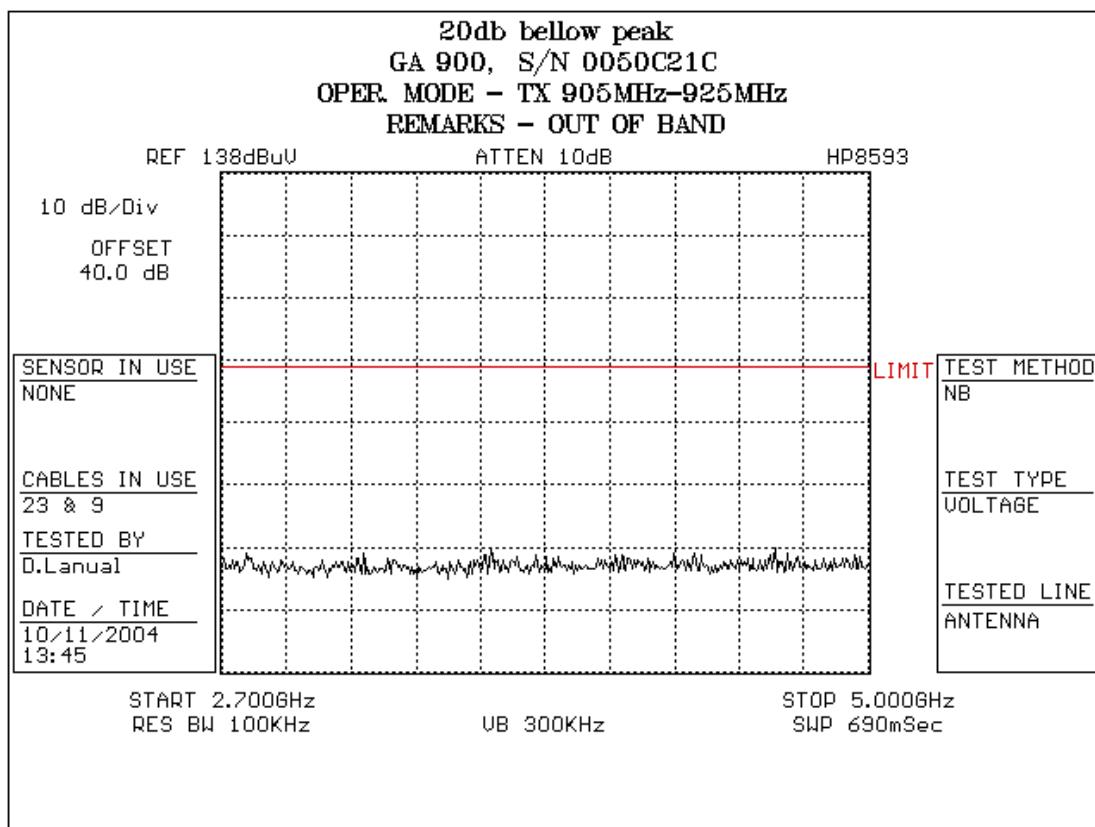

Plot / 15

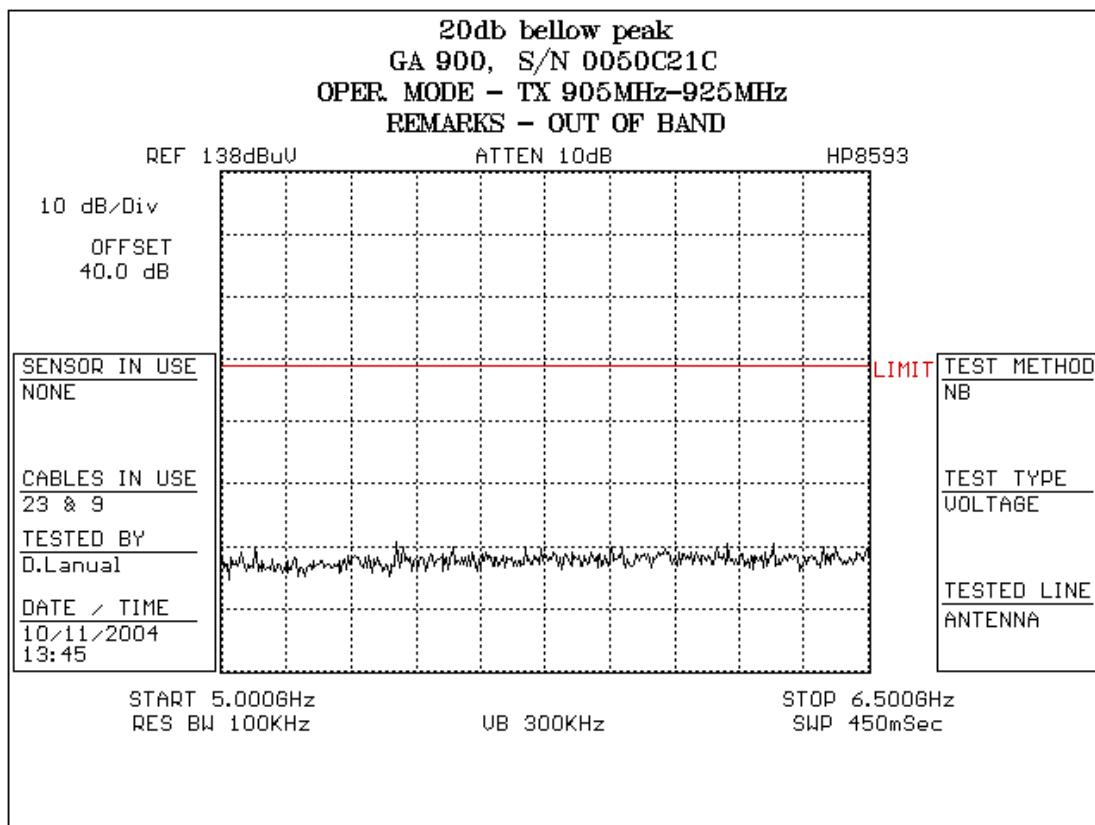


Plot / 16


d. Radiated spurious Emission in restricted band

(1) Transmit Frequency 905 MHz Antenna-Integrated 6dbi plots 17 - 29


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

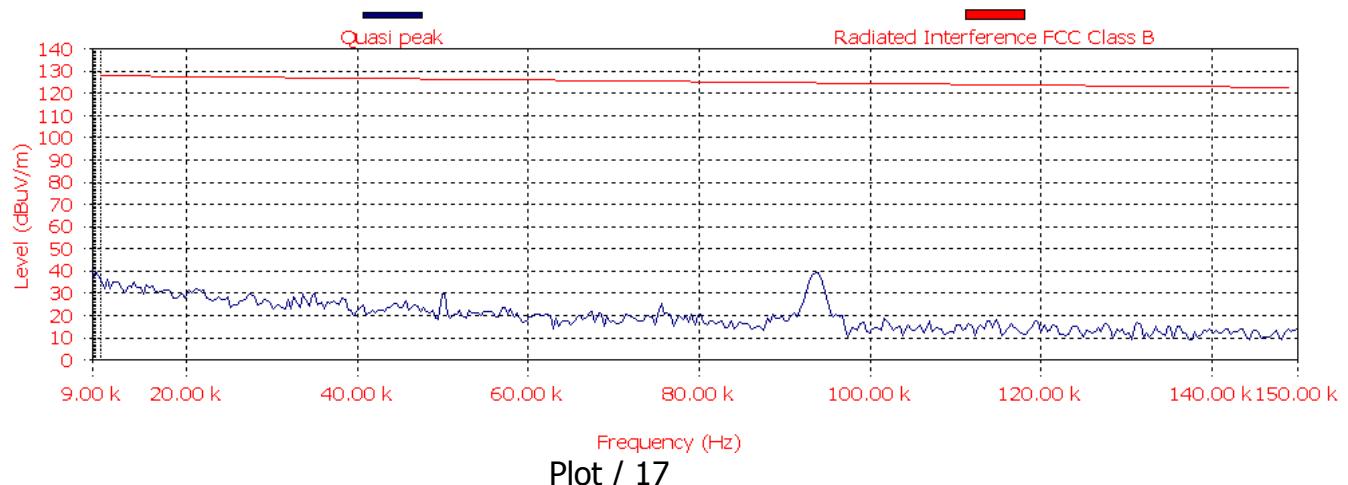


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

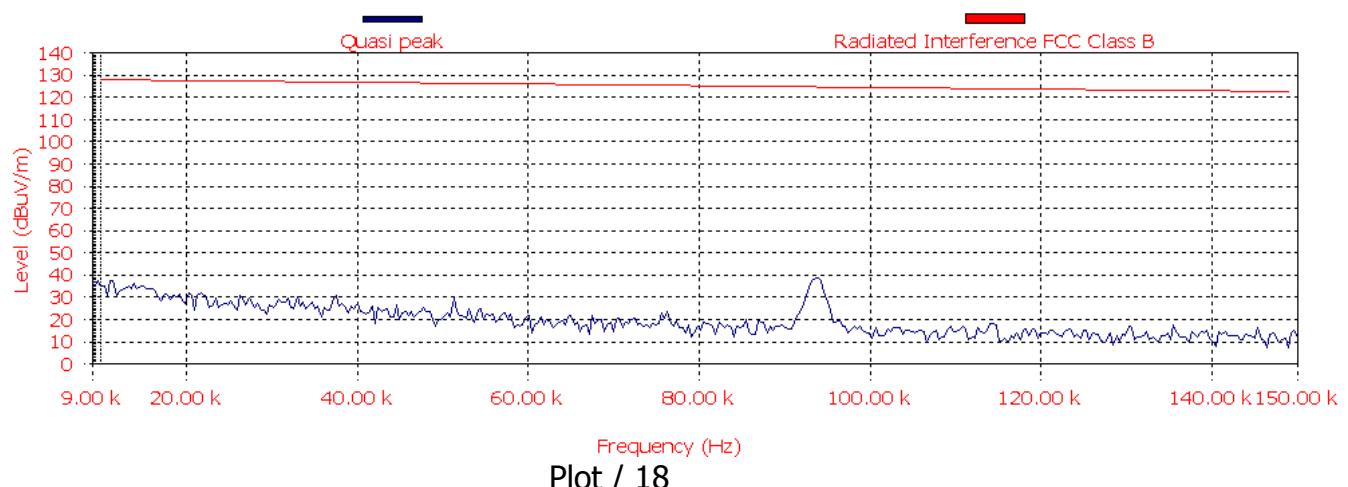

Analyzer setting: RBW-9K, VBW-1MHz, QP detector

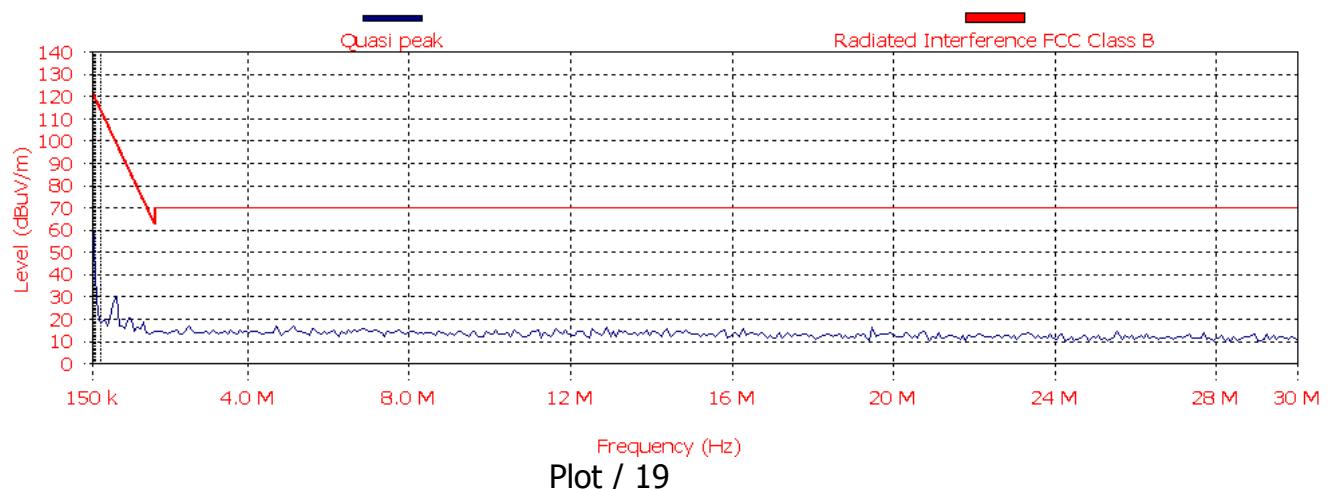

Analyzer setting: RBW-9K, VBW-1MHz, QP detector

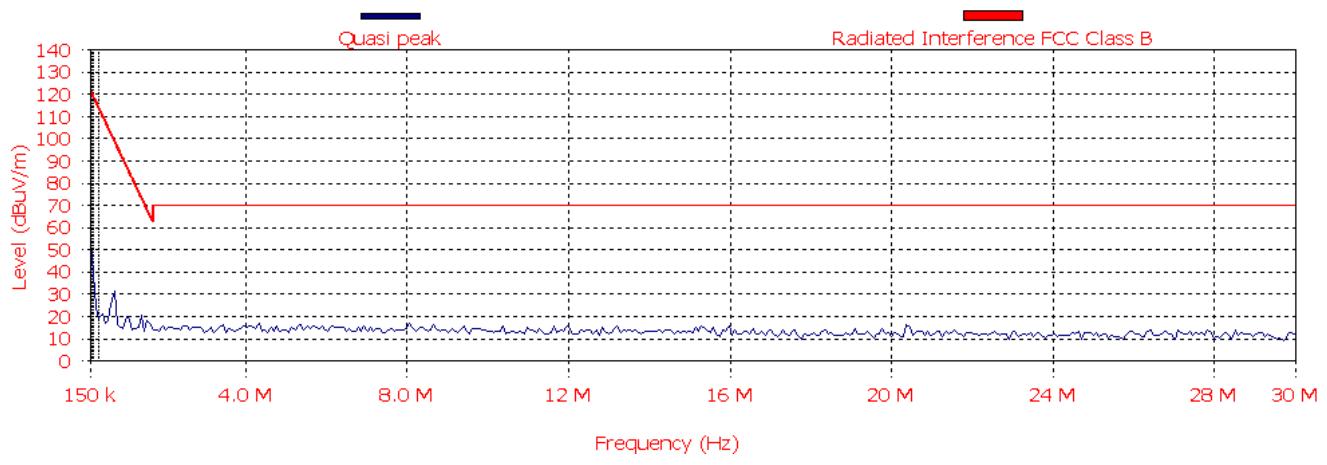

Plot / 20

EUT File:
 N:\COMMON\WAVE-IP-n\GA_900Q\900Q.EUT
Order Number:


EUT
 Name: QQ2-GA900 UPDATE TO 1/4
 Serial Number: 0050C21CC7FF

Client
 Name: Wavelp
 Contact Person: yoram singer

Radiated Emission

Description: 13) FCC 15.205 RESTRICTED 30-100MHz 905 6dbi integral
 From 30 MHz to 100 MHz

Graph:

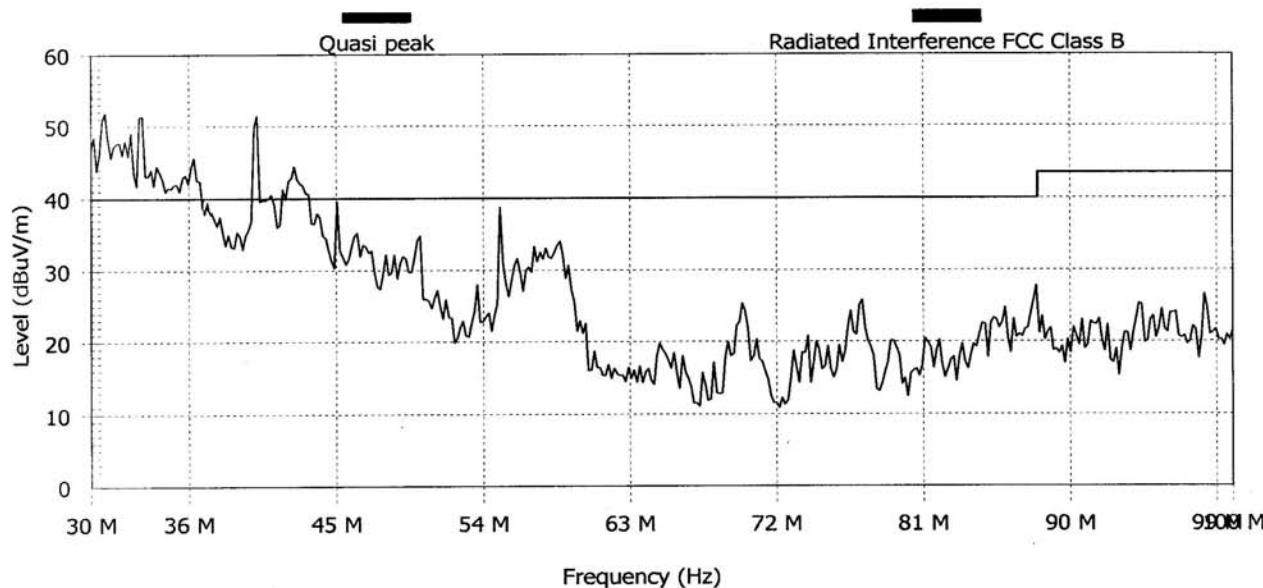

Detected Peaks:

Nr	Frequency (MHz)	Type	PK (dBuV/m)	QP (dBuV/m)	QP Limit (dBuV/m)	QP Diff (dBuV/m)	QP Pass	Pass	Angle (degrees)	Height (m)	H/V
1	40.15	Disc. BB	51.4	40.4	40.0	0.4	Fail	Fail	288	1.65	V
2	31.416	Disc.	39.3	35.9	40.0	-4.1	Pass	Pass	288	1.65	V
3	32.055	Disc.	41.1	37.7	40.0	-2.3	Pass	Pass	283	1.65	V
4	32.59	Disc. NB	41.1	37.9	40.0	-2.1	Pass	Pass	288	1.65	V
5	35.484	Disc. NB	37.4	32.9	40.0	-7.1	Pass	Pass	288	1.65	V
6	42.049	Disc. NB	39.4	35.9	40.0	-4.1	Pass	Pass	288	1.65	V

Settings:

Antenna: Both Polarizations at 3.0 m
 Ref. Level: 90.0 dBuV/m Att: 0 dB. RBW: 120 kHz. VBW: 1000 kHz. Sweep time: 20 ms.
 Detect all peaks above 6 dB below the limit lines with a maximum of 6 peaks.
 Measure the peaks with the quasi-peak detector

Note:

Plot / 21

Analyzer setting: VBW-1M, RBW-3MHz, peak detector

EUT File:
 N:\COMMON\WAVE-IP-n\GA_900Q\900Q.EUT
Order Number:


EUT
 Name: QQ2-GA900 UPDATE TO 1/4
 Serial Number: 0050C21CC7FF

Client
 Name: Wavelp
 Contact Person: yoram singer

Radiated Emission

Description: 18) FCC 15.205 RESTRICTED 100-600MHz 905 6dbi integral
 From 100 MHz to 614 MHz

Graph:

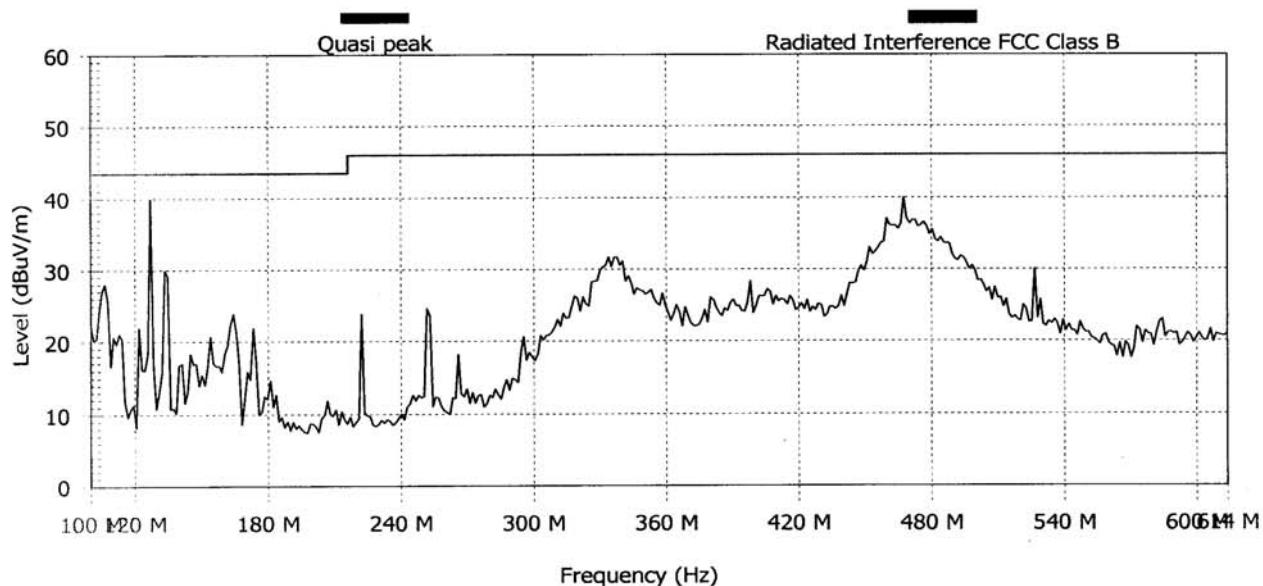

Detected Peaks:


Nr	Frequency (MHz)	Type	PK (dBuV/m)	QP (dBuV/m)	QP Limit (dBuV/m)	QP Diff (dBuV/m)	QP Pass	Pass	Angle (degrees)	Height (m)	H/V
1	126.985	Cont. BB	40.0	26.9	43.5	-16.6	Pass	Pass	120	1	V
2	409.685	Cont. BB	41.7	32.4	46.0	-13.6	Pass	Pass	120	1	H

Settings:


Antenna: Both Polarizations at 3.0 m
 Ref. Level: 90.0 dBuV/m Att: 0 dB. RBW: 120 kHz. VBW: 1000 kHz. Sweep time: 107.08300018
 Detect all peaks above 6 dB below the limit lines with a maximum of 6 peaks.
 Measure the peaks with the quasi-peak detector

Note:


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

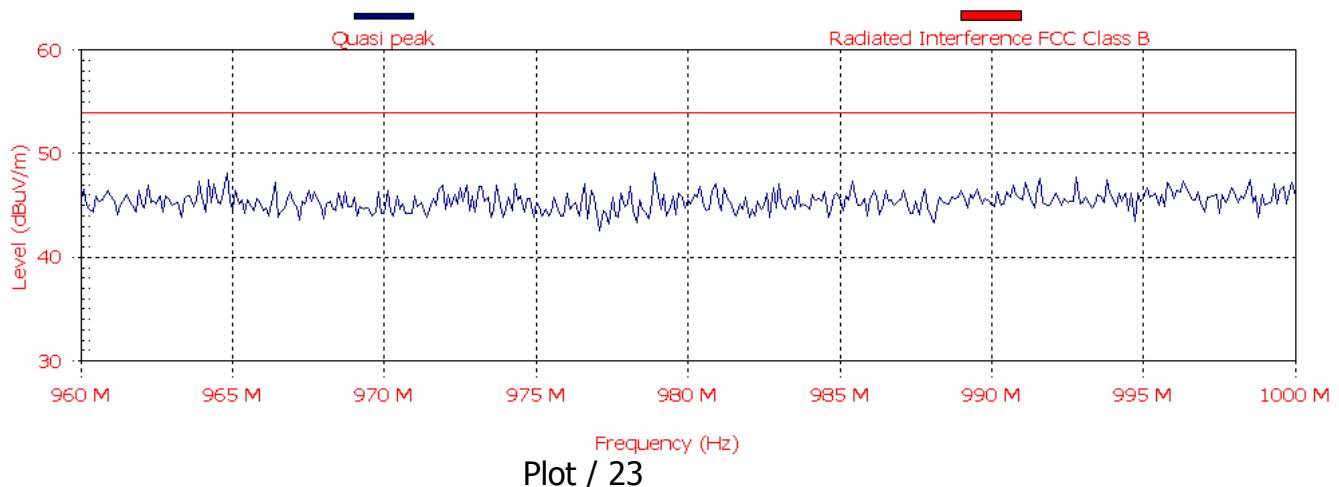


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

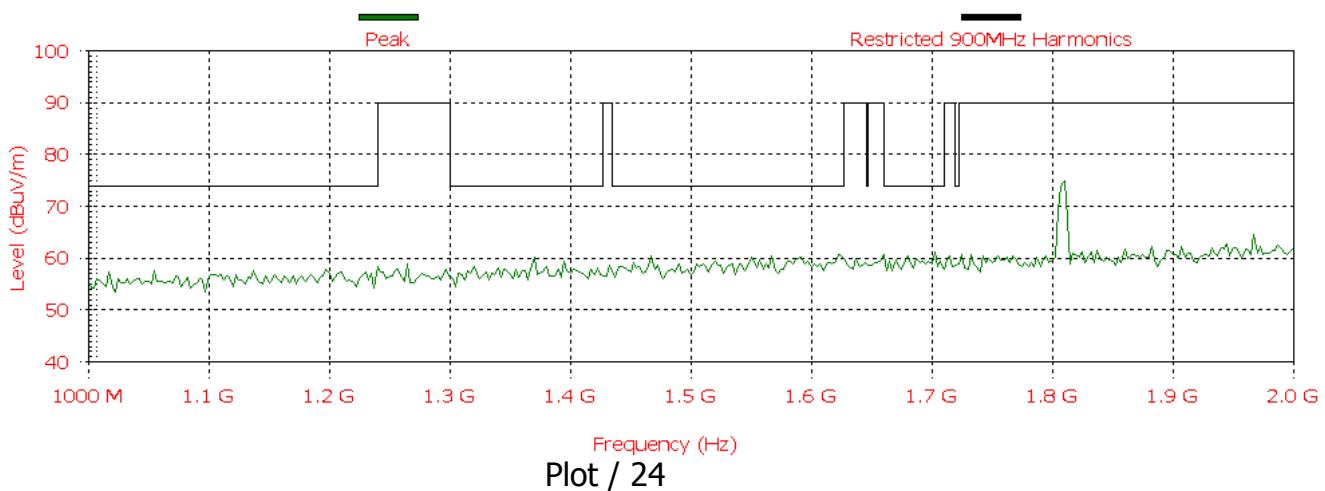


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

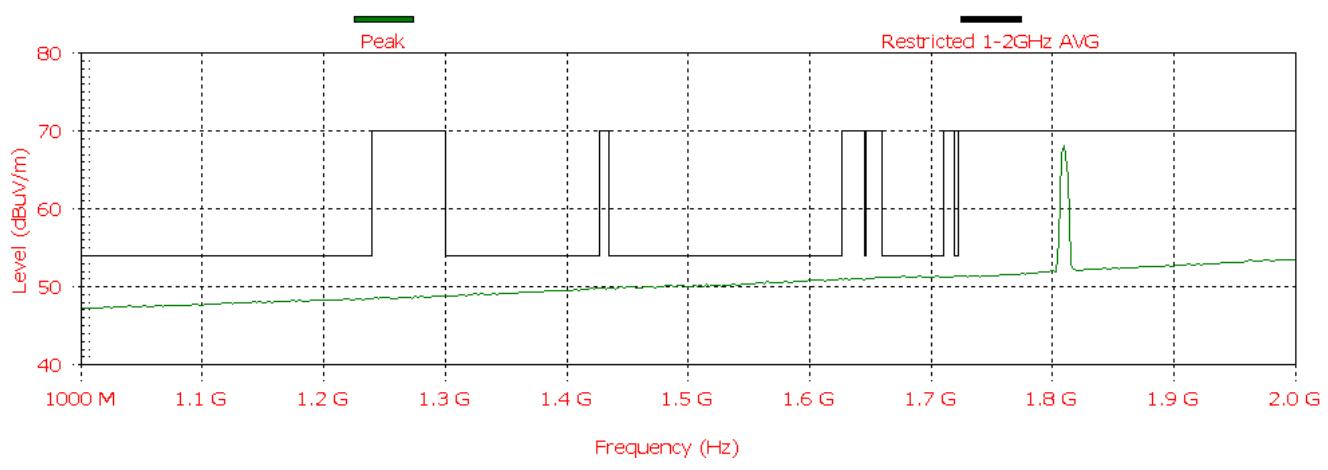


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

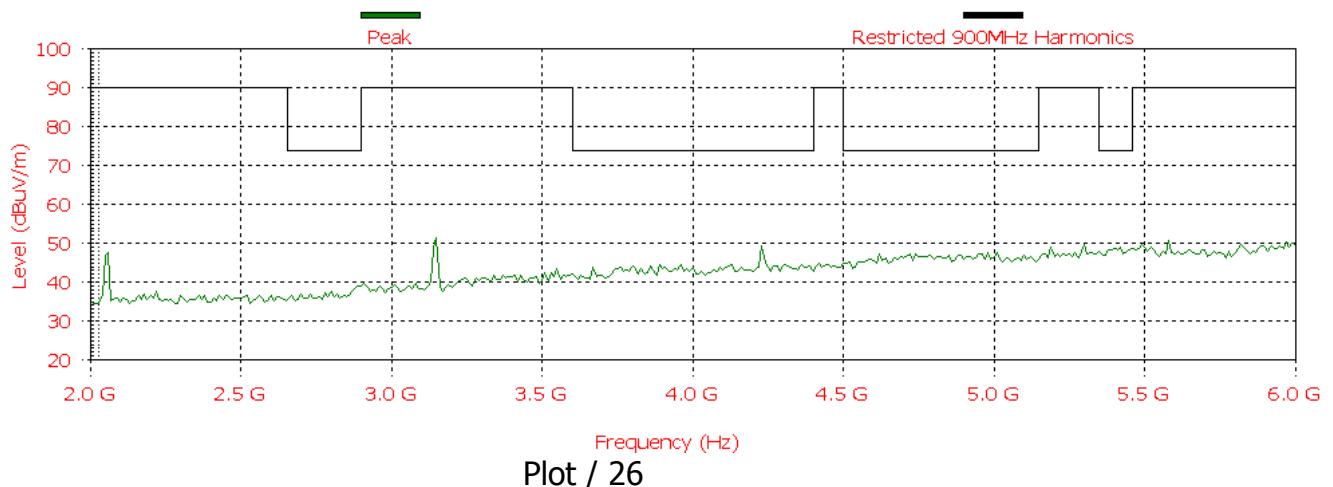


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

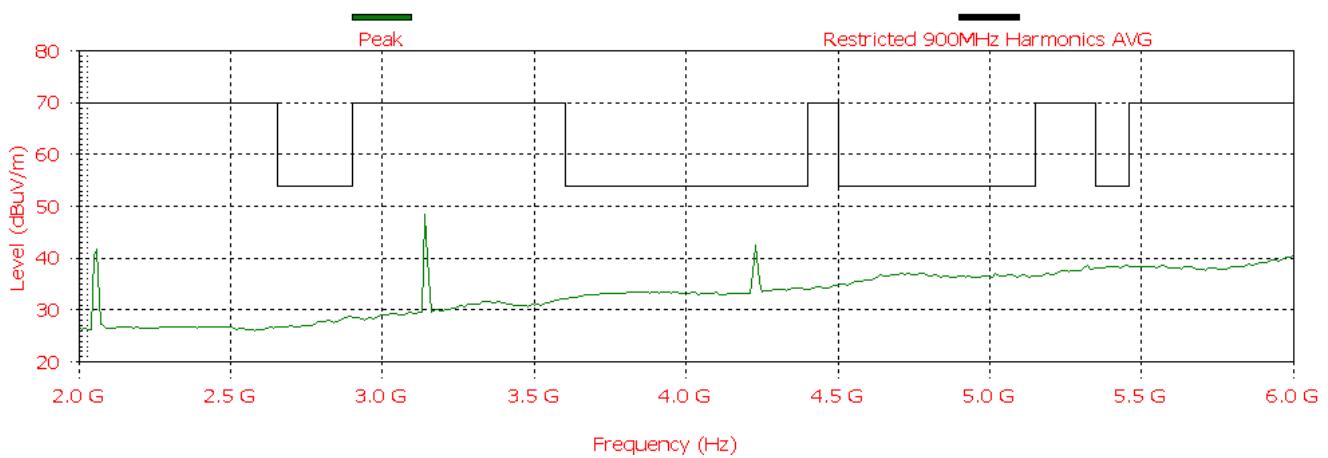

Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

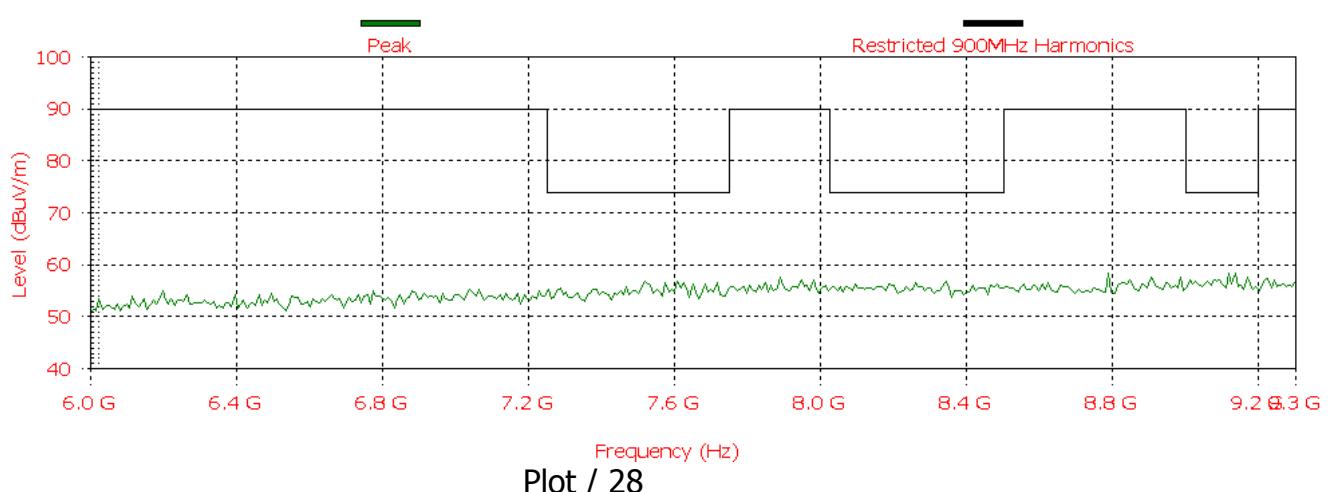


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

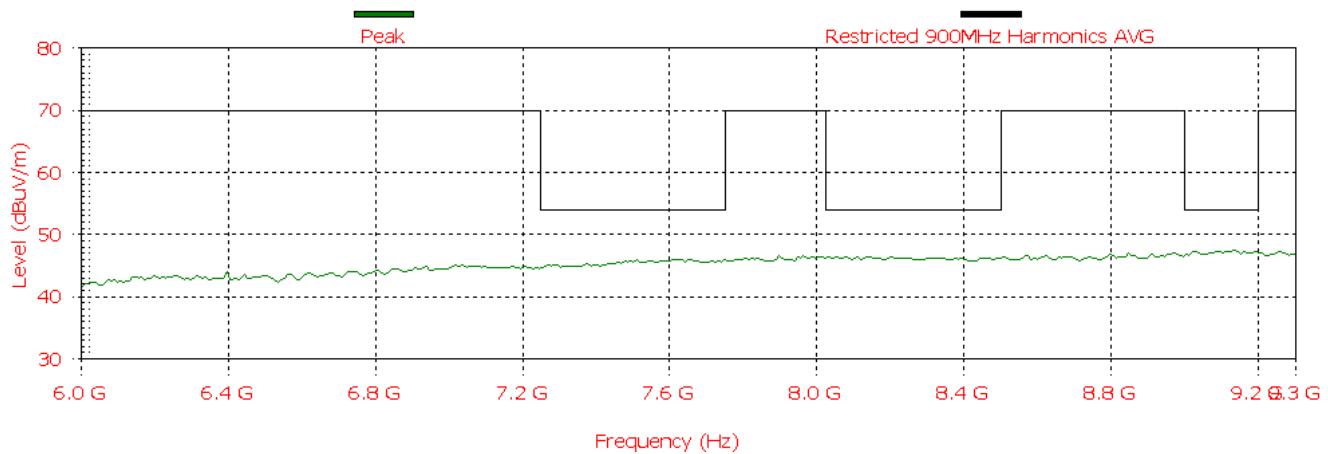


Plot / 29

(2) Radiated spurious Emission in restricted band Transmit Frequency **915 MHz Antenna-Integrated 6dbi plots 30 - 42**


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

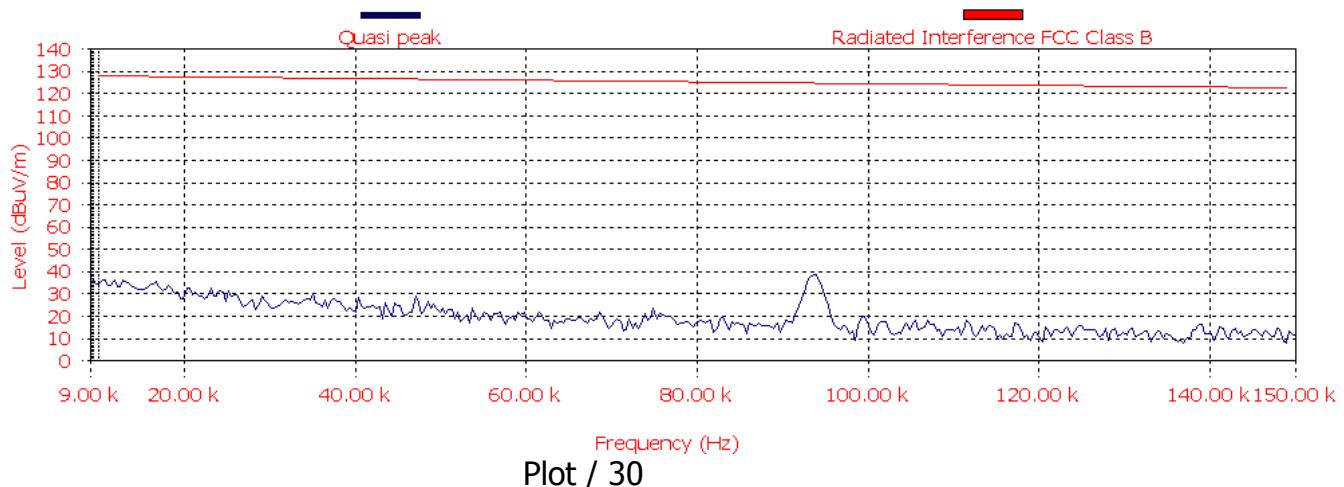


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

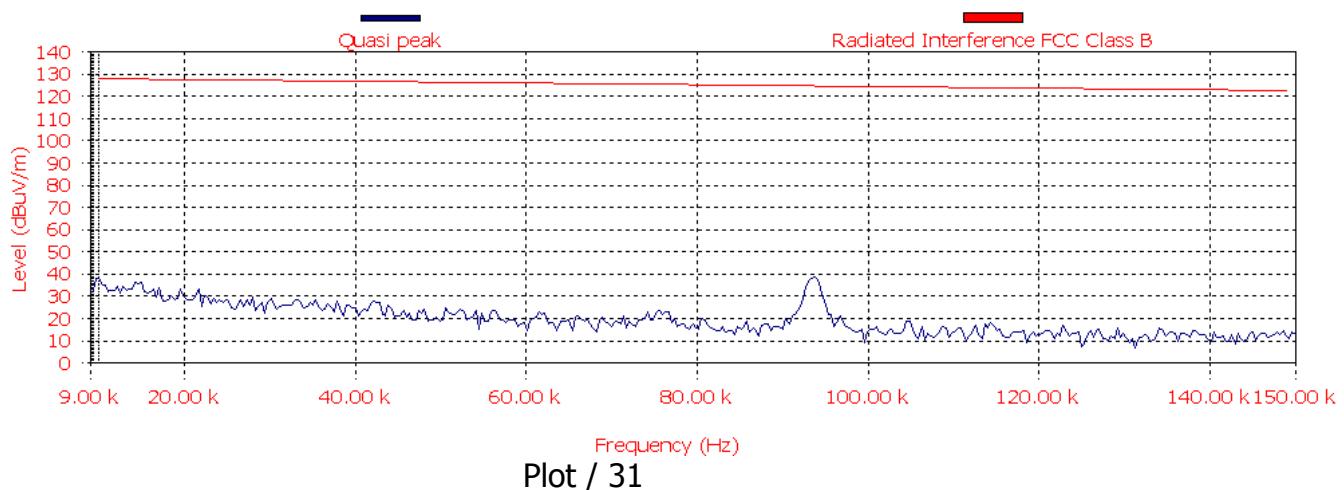


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

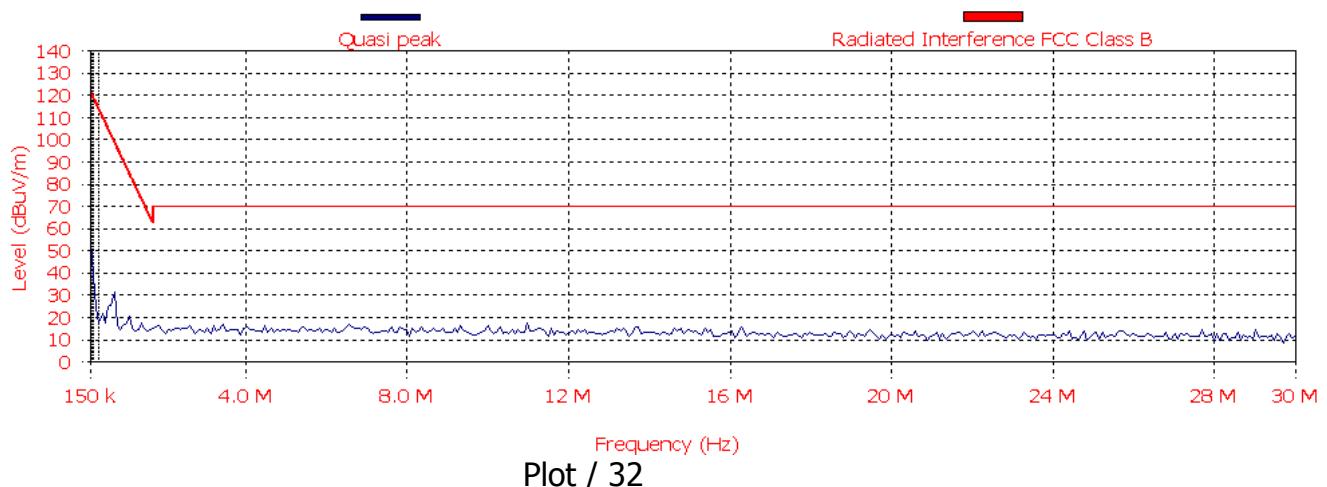


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

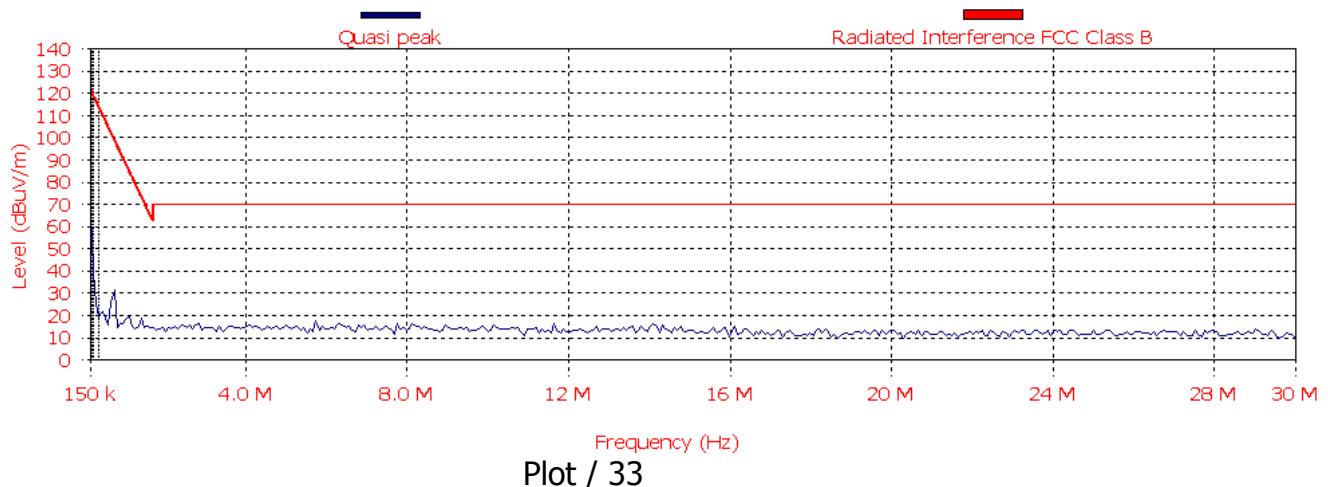


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

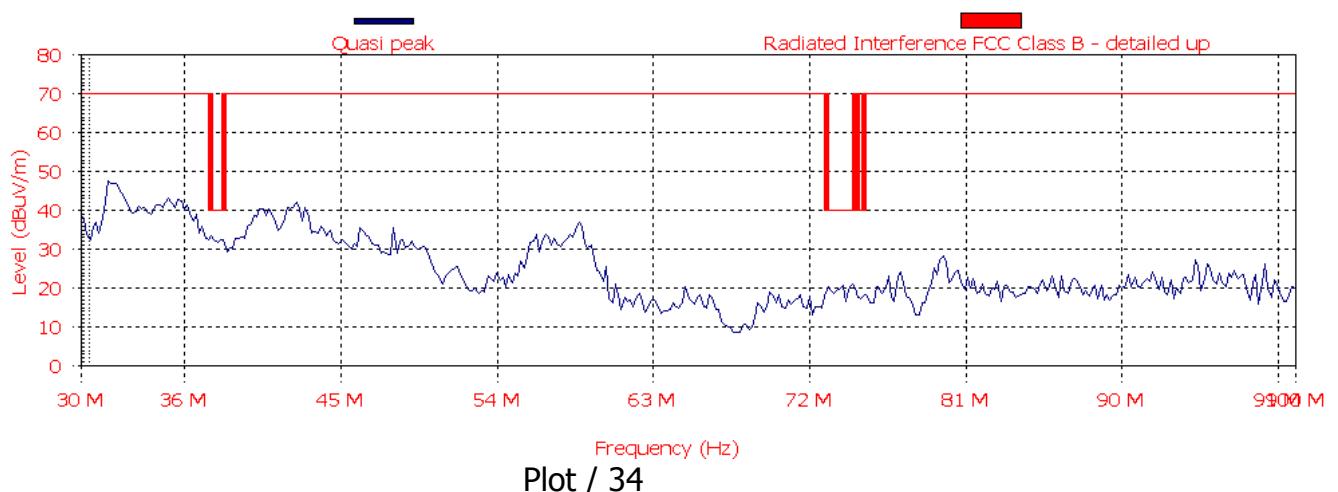


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

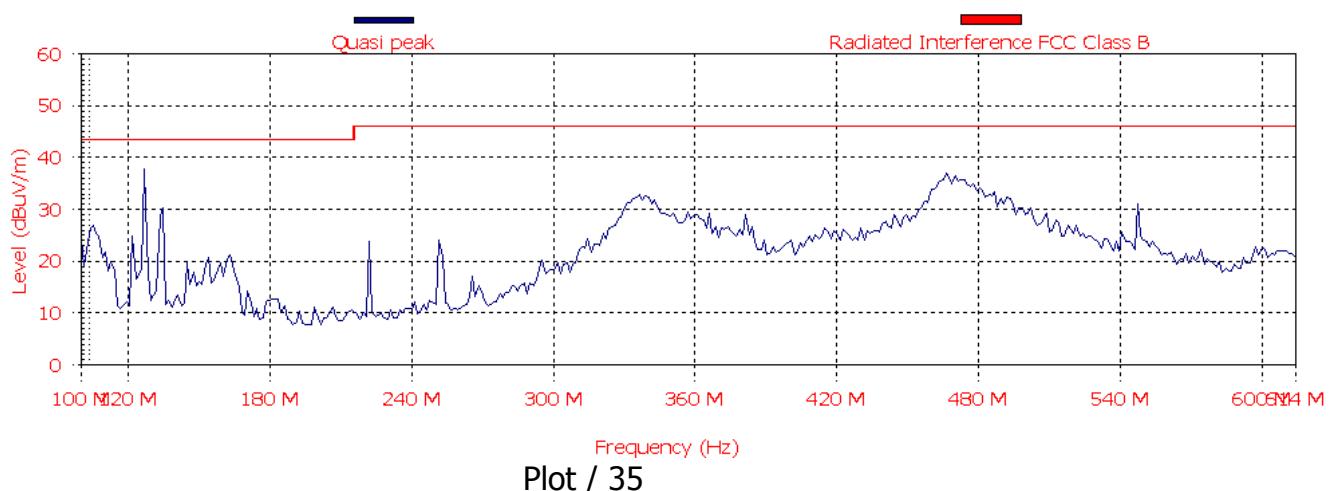


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

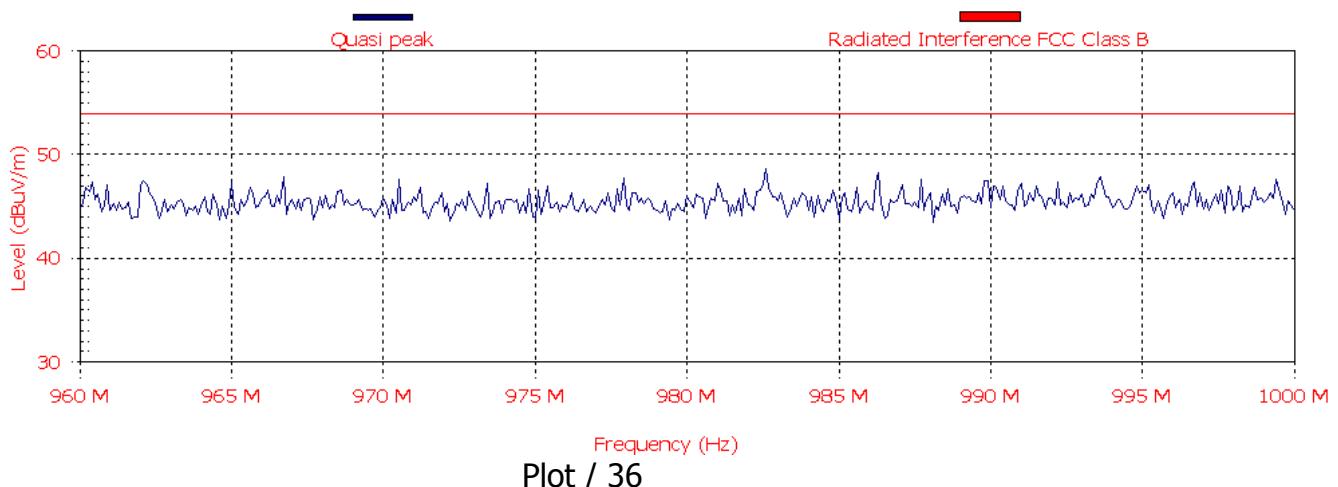


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

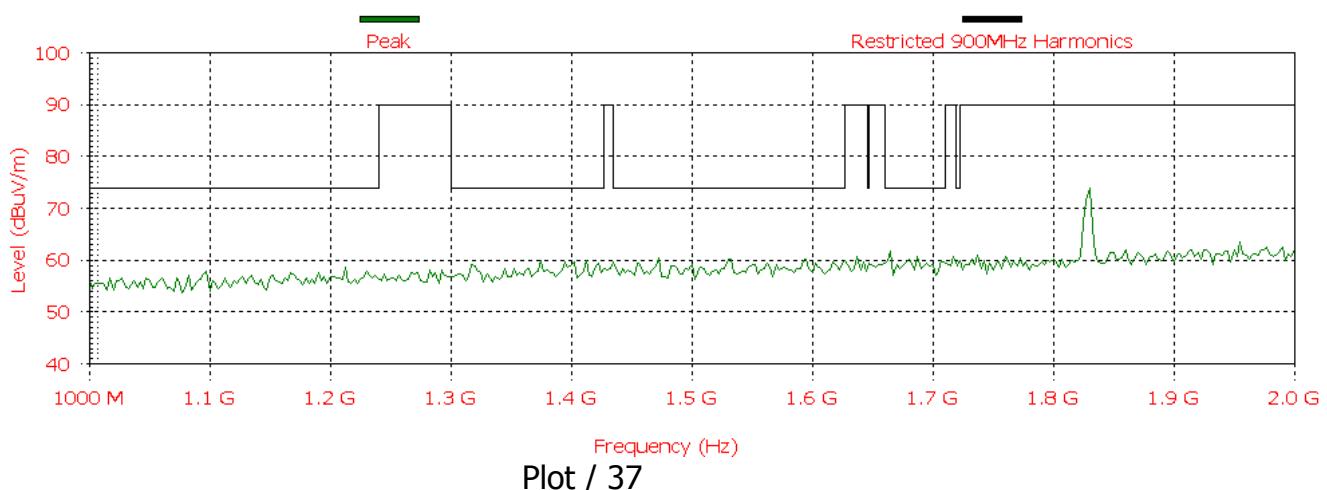


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

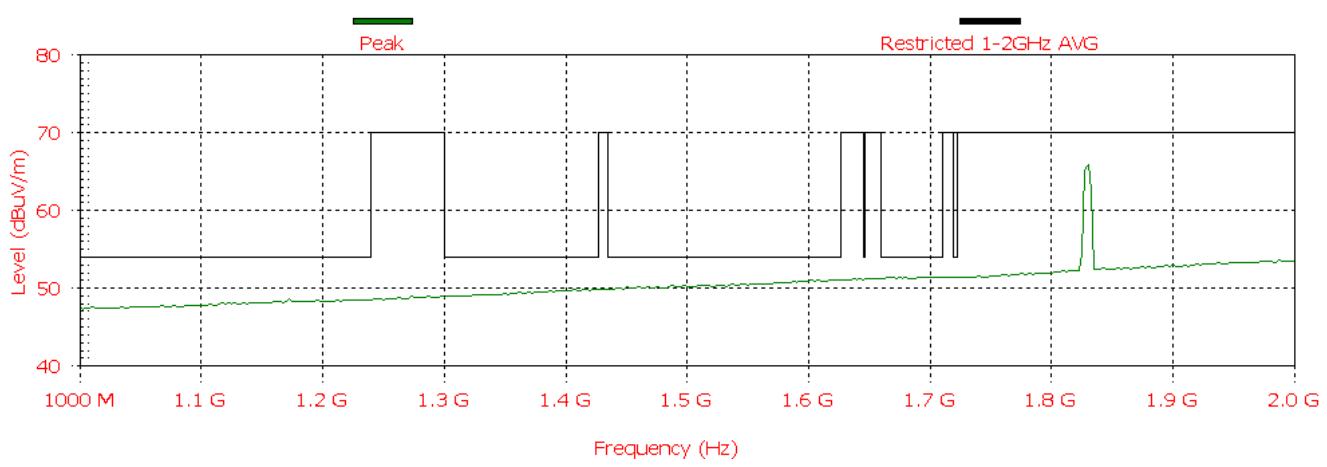


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

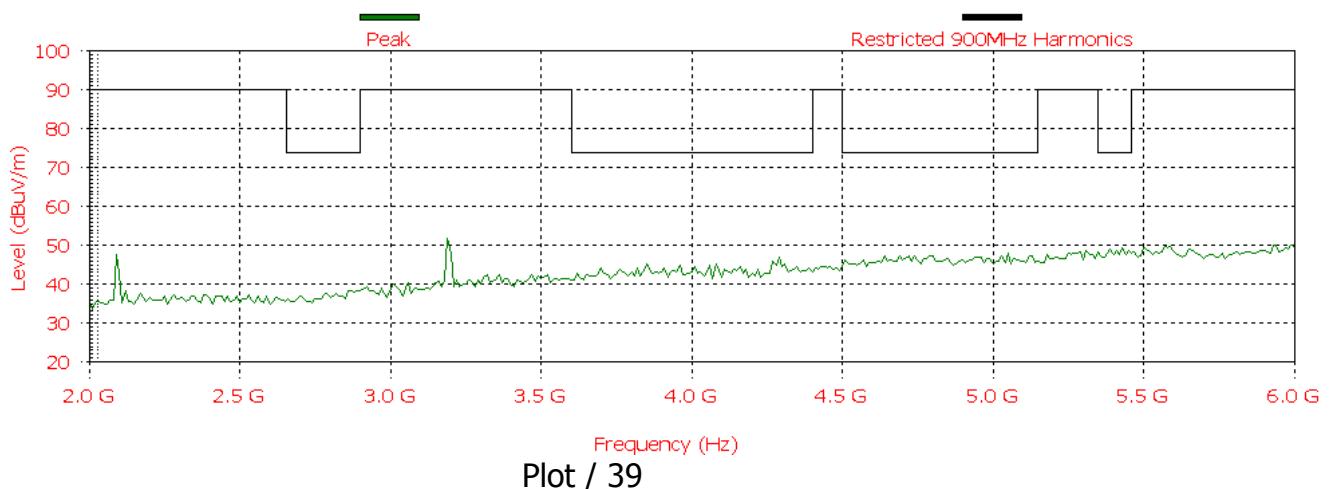


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

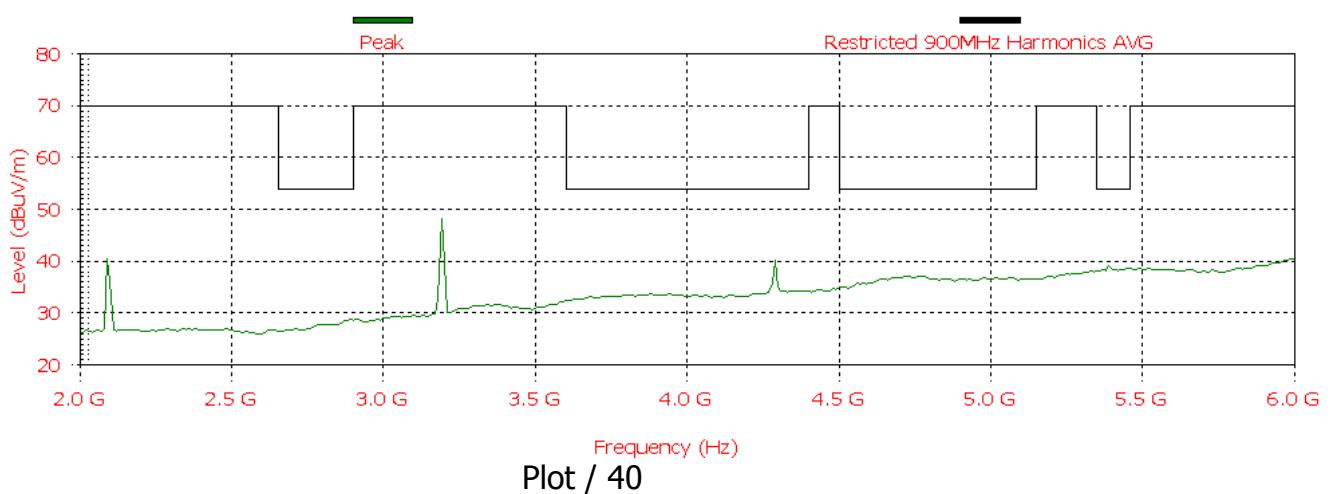

Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

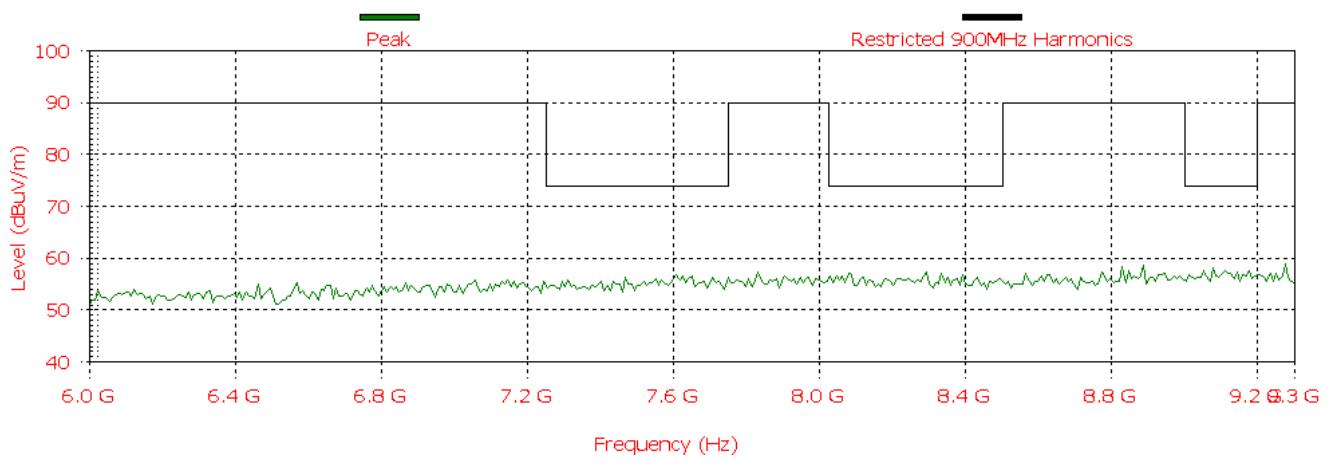


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

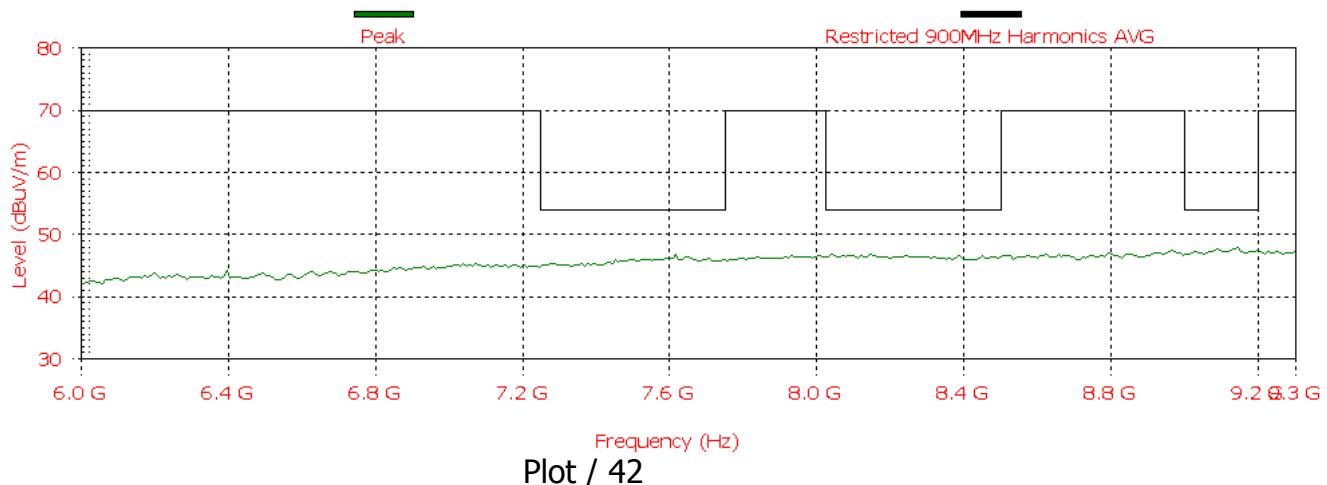


(3) Radiated spurious Emission in restricted band Transmit Frequency **925MHz Antenna-Sect Extern 6dbi plots 43 - 55**


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

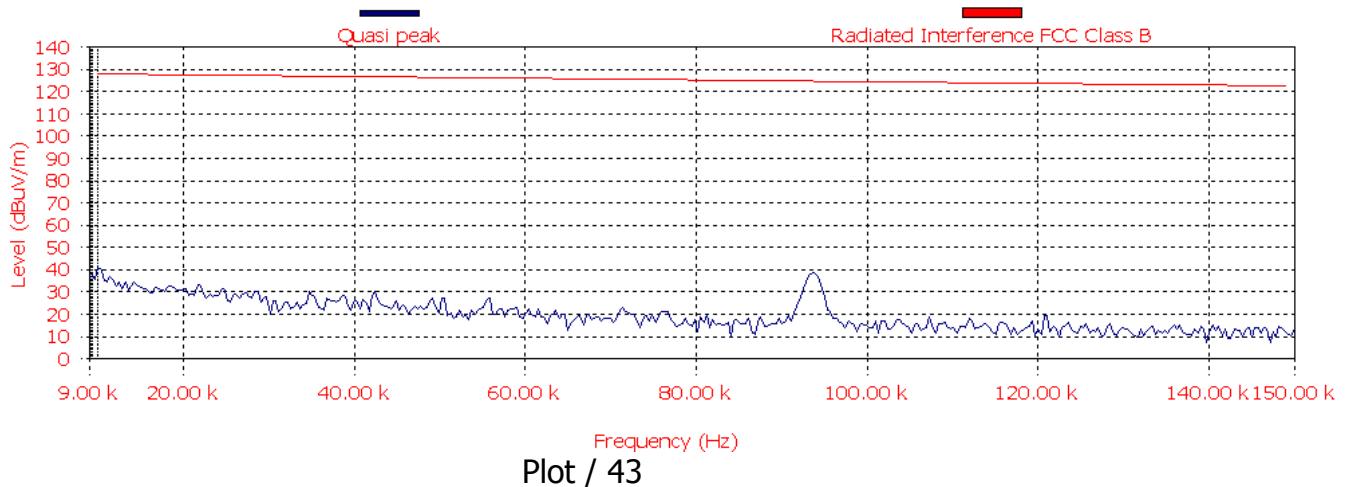


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

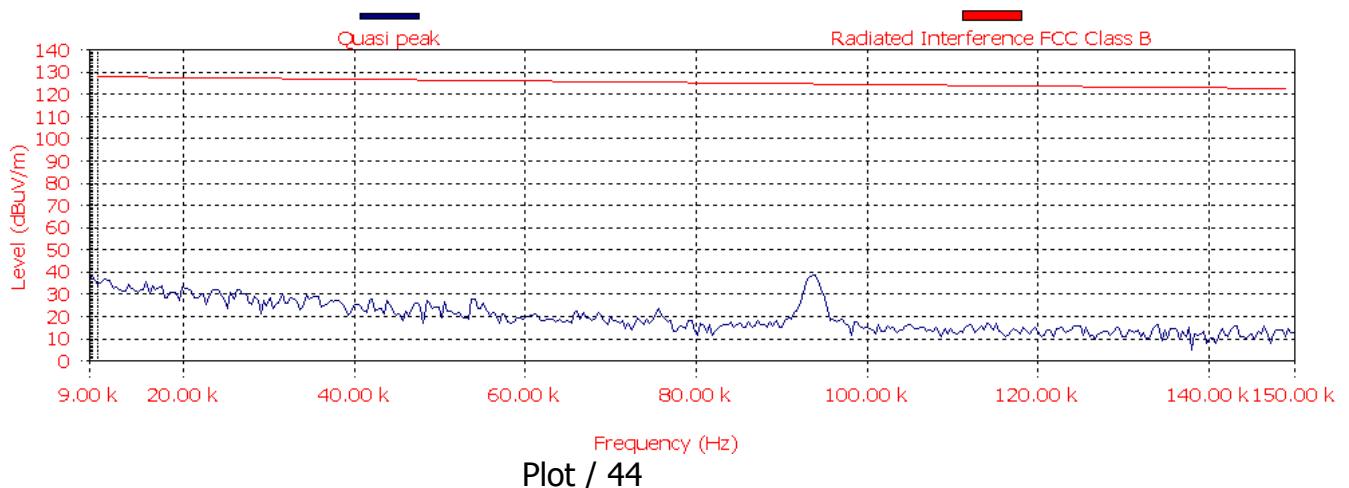


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

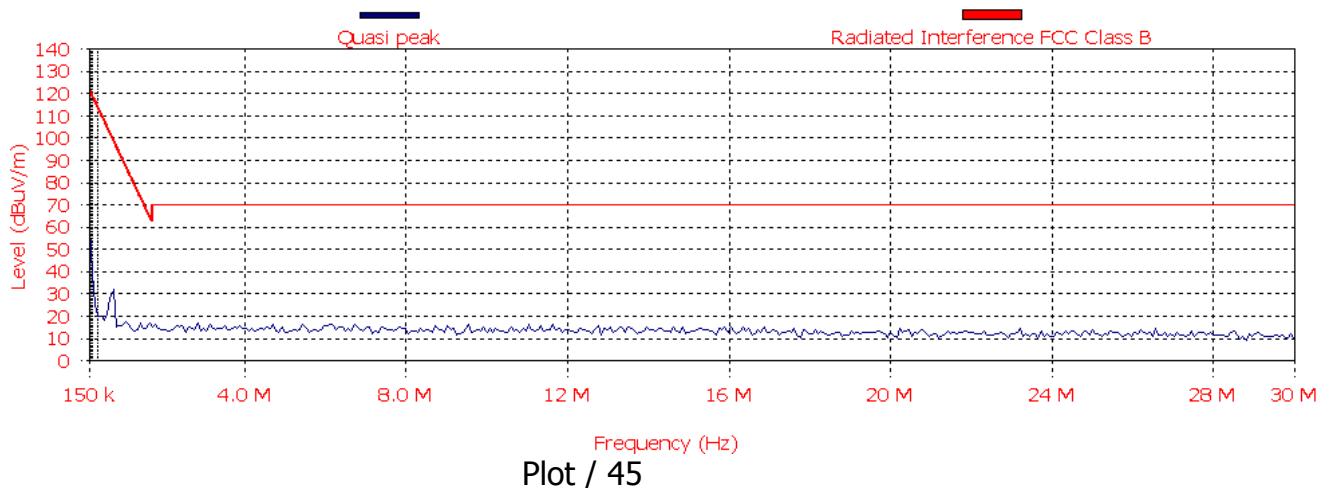


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

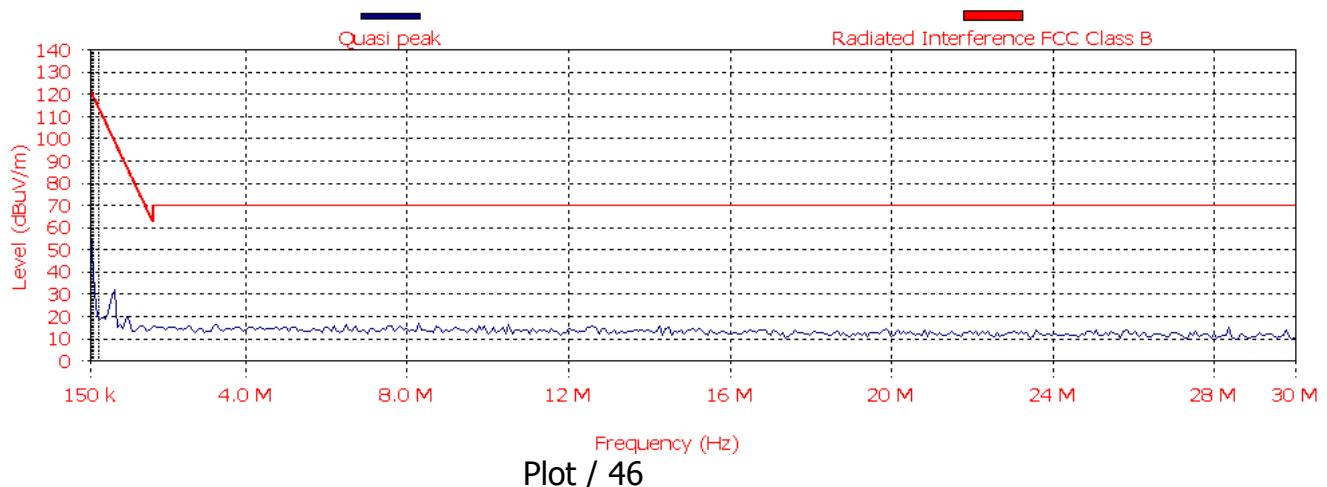

Analyzer setting: RBW-120K, VBW-1MHz, QP detector

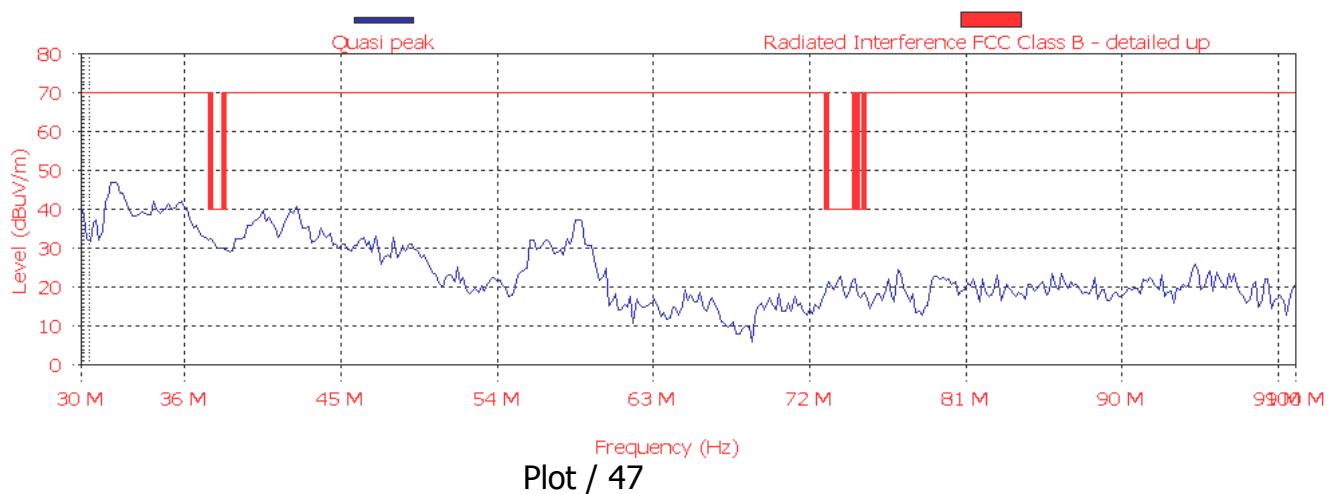

Analyzer setting: RBW-120K, VBW-1MHz, QP detector

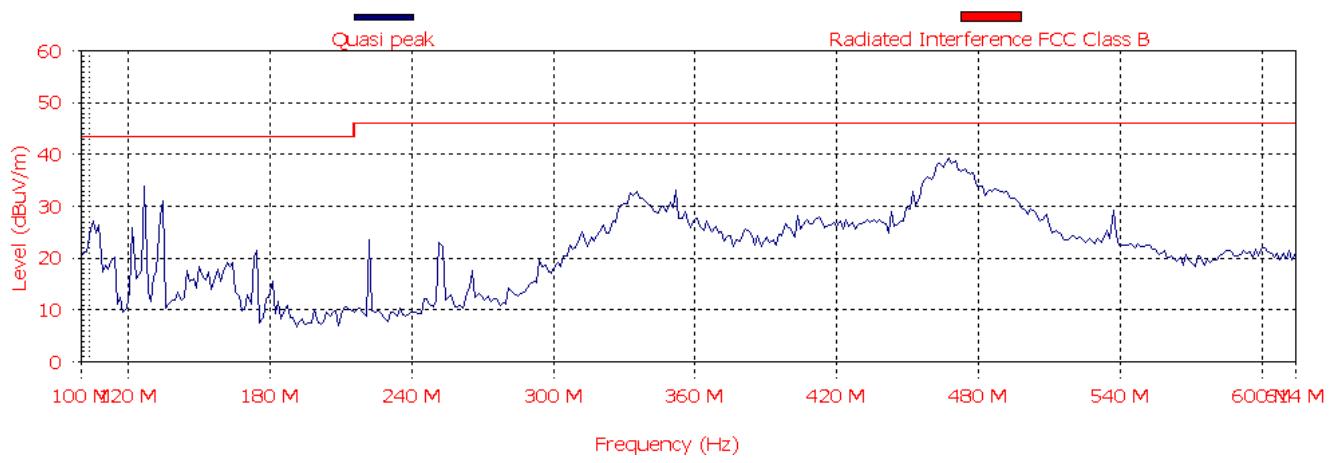

Plot / 48

EUT File:
 N:\COMMON\WAVE-IP-n\GA_900Q\900Q.EUT
Order Number:


EUT
 Name: QQ2-GA900 UPDATE TO 1/4
 Serial Number: 0050C21CC7FF

Client
 Name: Wavelp
 Contact Person: yoram singer

Radiated Emission

Description: 21) FCC 15.205 RESTRICTED 900-1GHz 925 6dbi integral
 From 960 MHz to 1000 MHz

Graph:

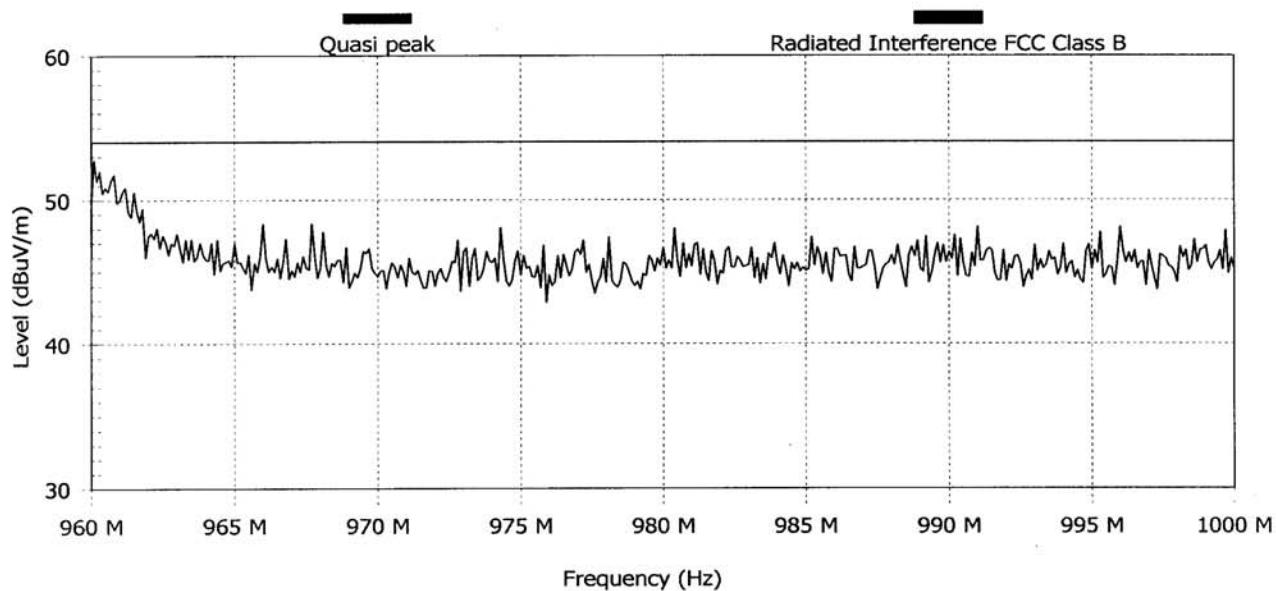

Detected Peaks:


Nr	Frequency (MHz)	Type	PK (dBuV/m)	QP (dBuV/m)	QP Limit (dBuV/m)	QP Diff (dBuV/m)	QP Pass	Pass	Angle (degrees)	Height (m)	H/V
1	962.383	Disc. NB	48.9	42.1	54.0	-11.9	Pass	Pass	0	1.65	V
2	960.259	Disc. NB	48.7	44.7	54.0	-9.3	Pass	Pass	0	1.65	V
3	960.387	Disc. NB	49.3	45.1	54.0	-8.9	Pass	Pass	0	1.65	V
4	961.426	Disc.	51.3	43.7	54.0	-10.3	Pass	Pass	0	1.65	V
5	962.66	Disc.	48.1	40.5	54.0	-13.5	Pass	Pass	0	1.65	V
6	967.7	Cont. BB	48.4	40.0	54.0	-14.0	Pass	Pass	0	1.325	V

Settings:


Antenna: Both Polarizations at 3.0 m
 Ref. Level: 90.0 dBuV/m Att: 0 dB. RBW: 120 kHz. VBW: 1000 kHz. Sweep time: 20 ms.
 Detect all peaks above 6 dB below the limit lines with a maximum of 6 peaks.
 Measure the peaks with the quasi-peak detector

Note:


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

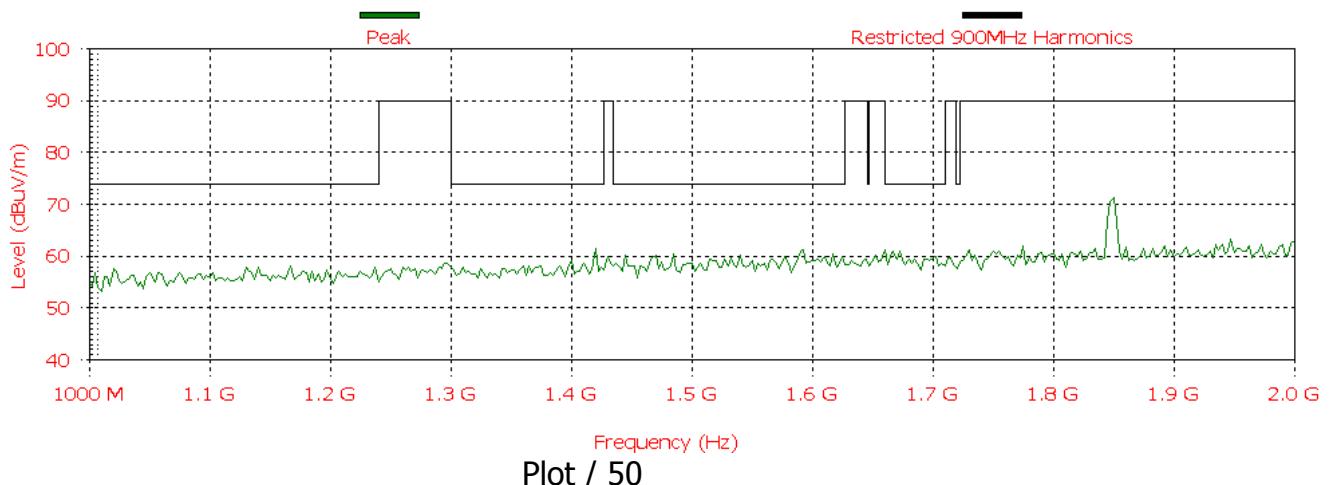


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

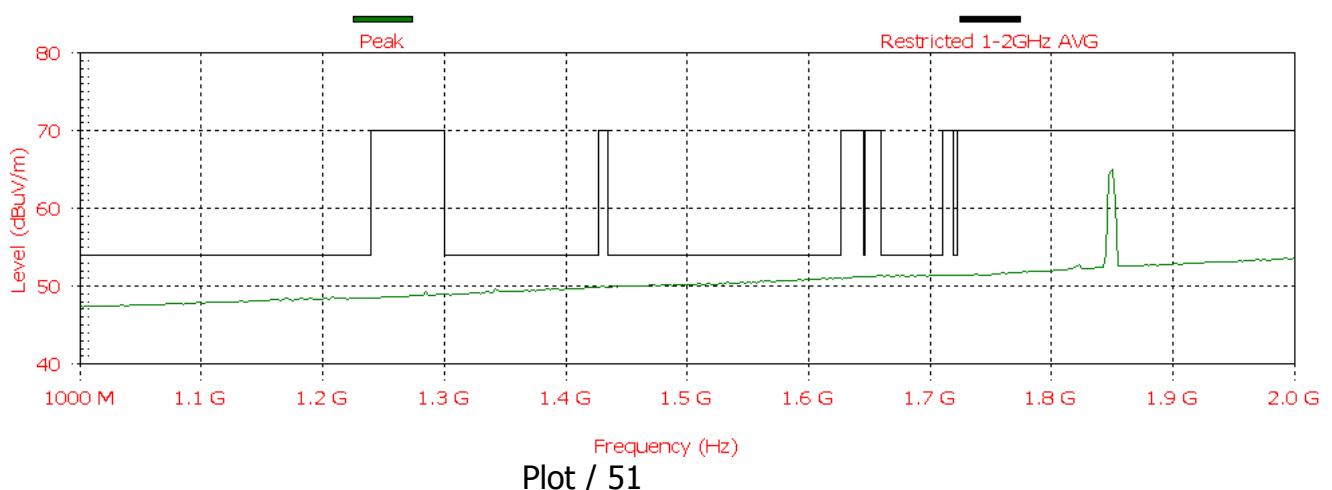


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

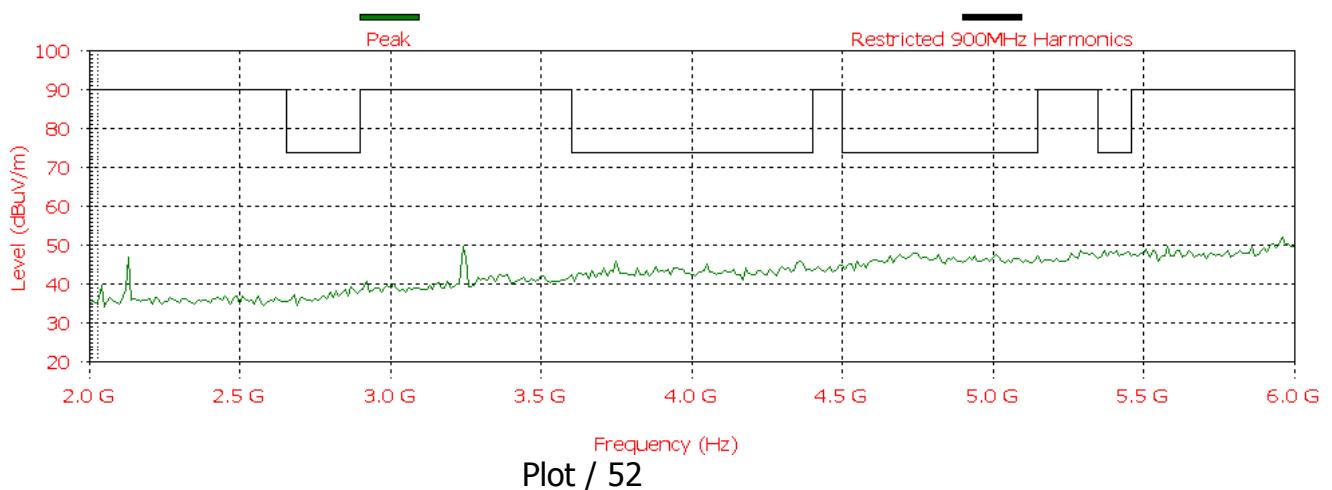

Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

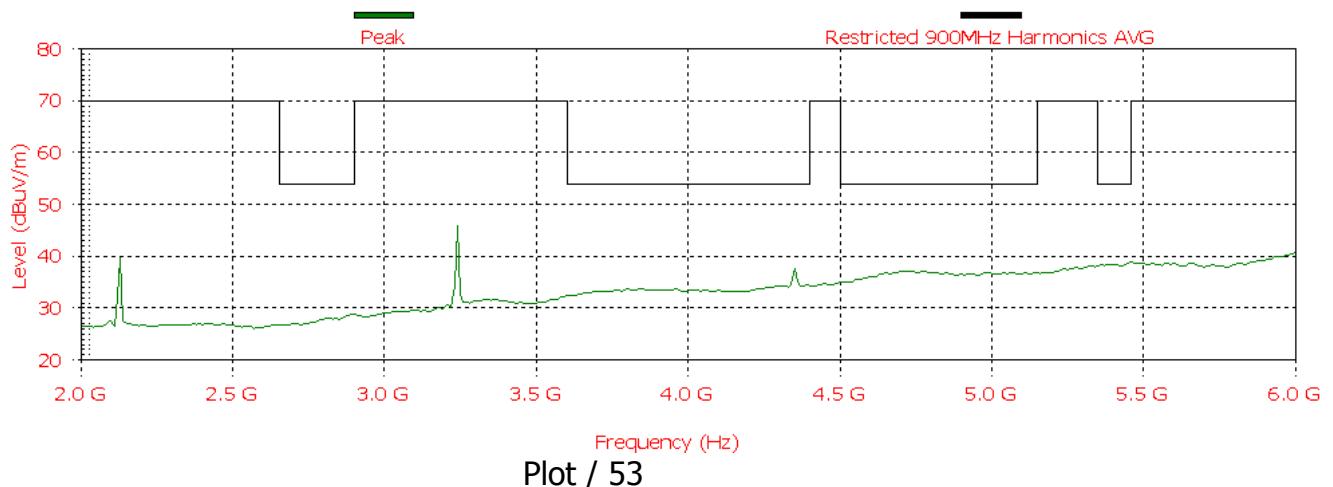

Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

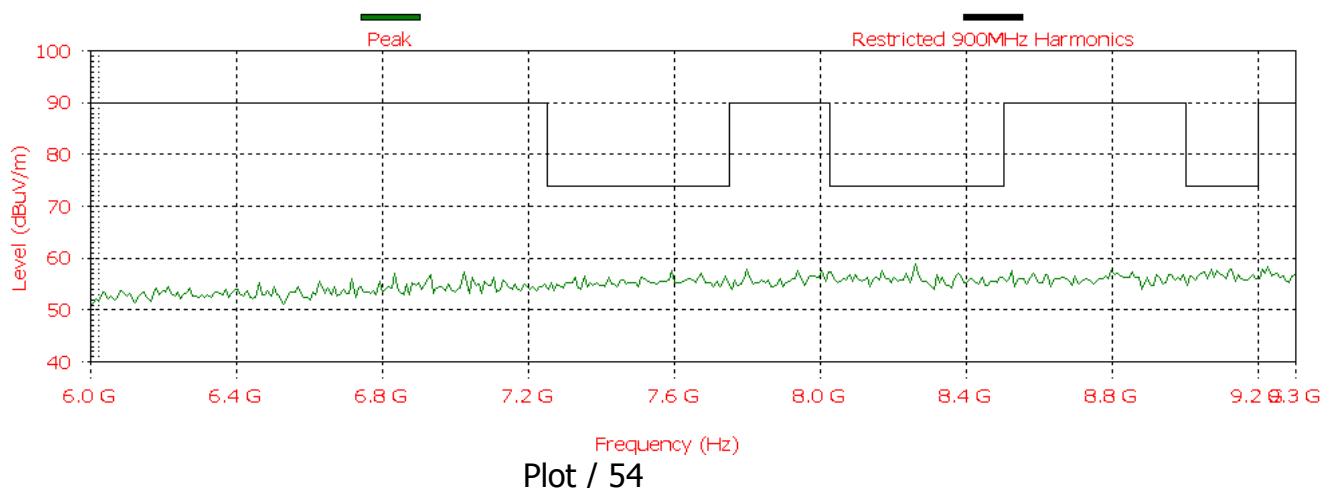


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector




(4) Radiated spurious Emission in restricted band Transmit Frequency 905 MHz
 Antenna-Sect Extern 12.5dbi plots 56 -68


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

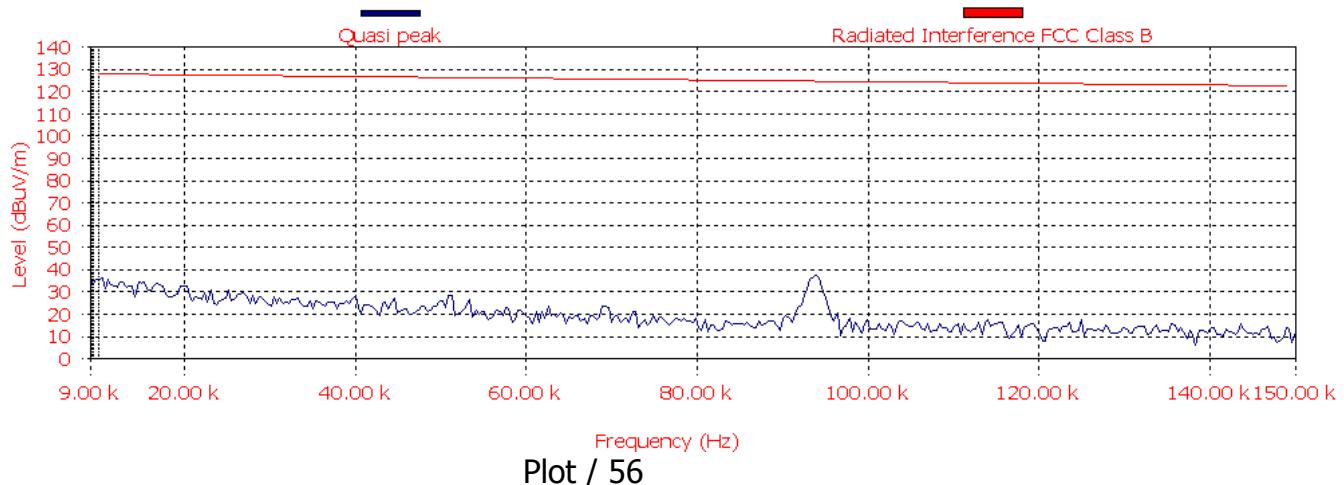


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

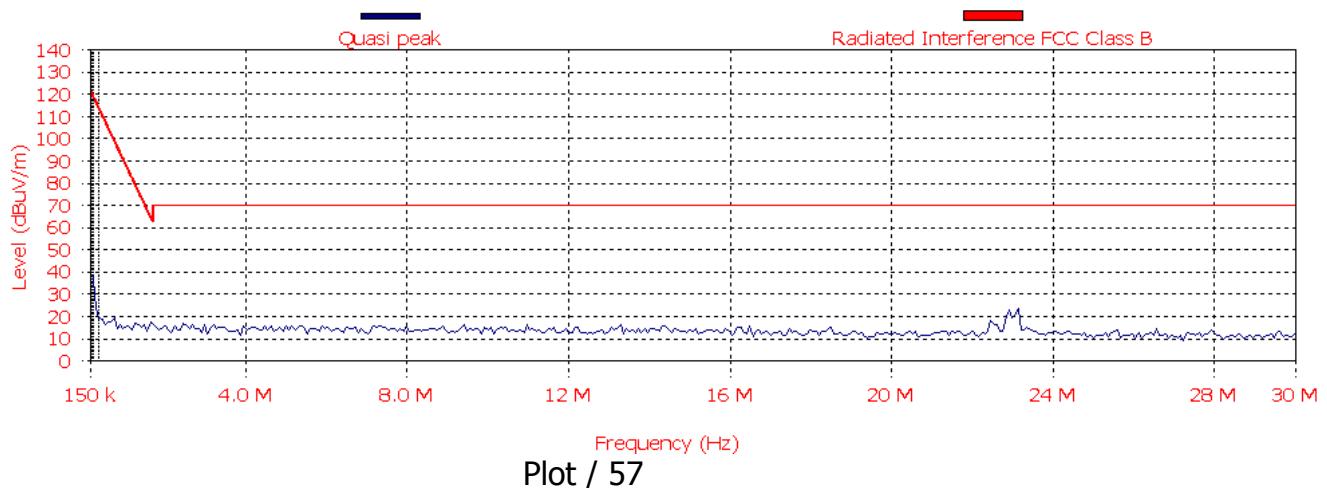


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

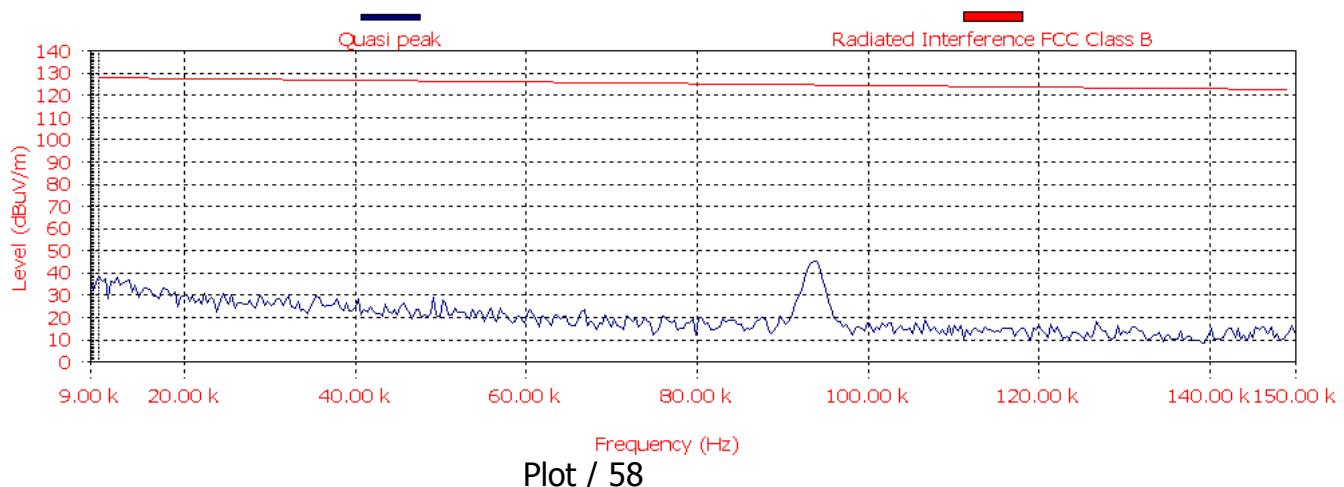


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

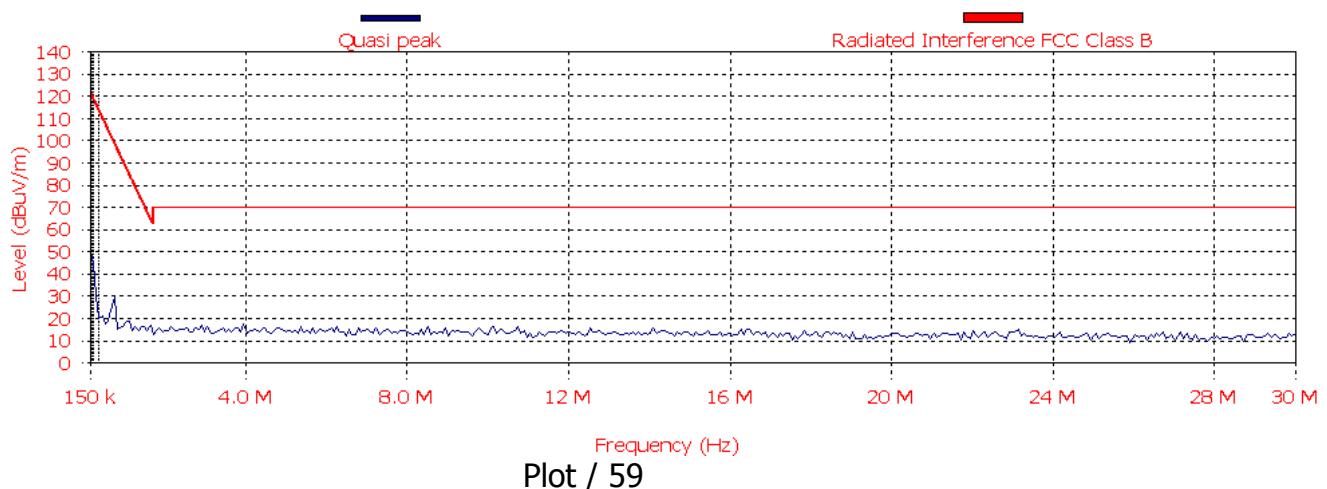


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

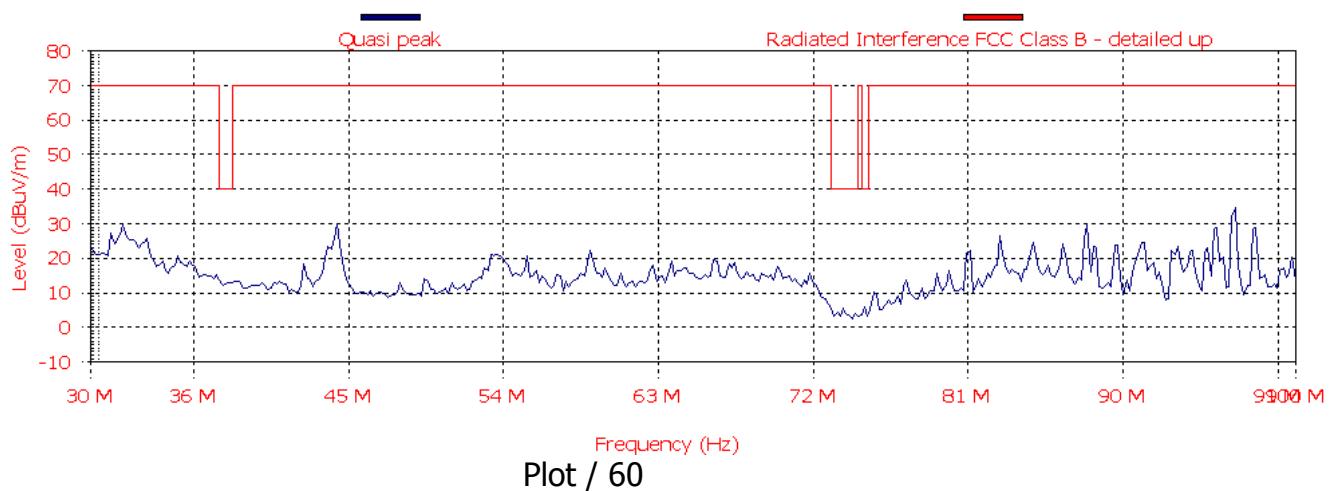


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

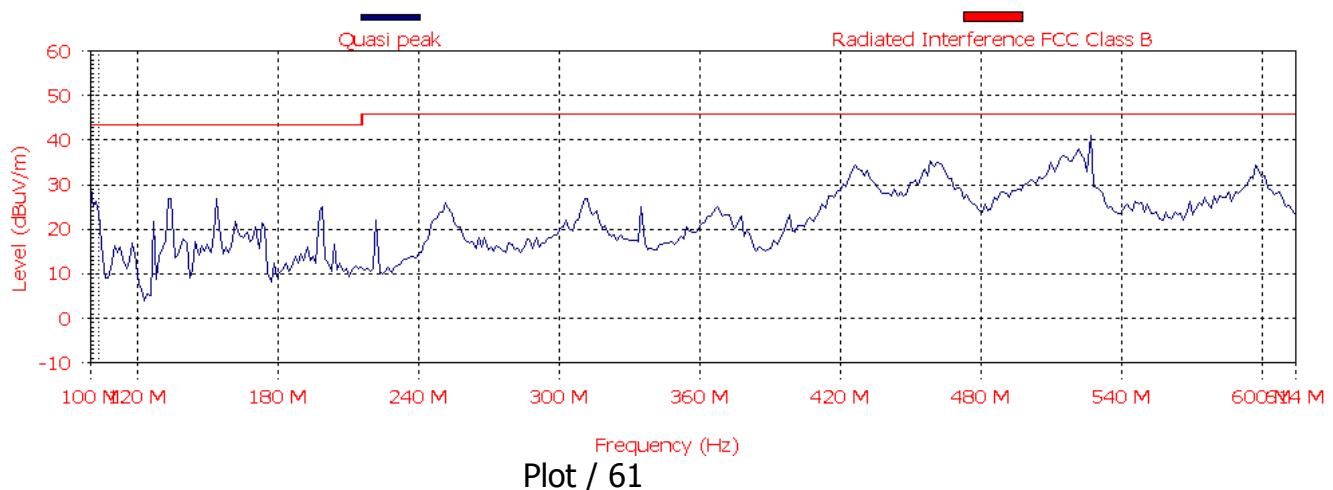


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

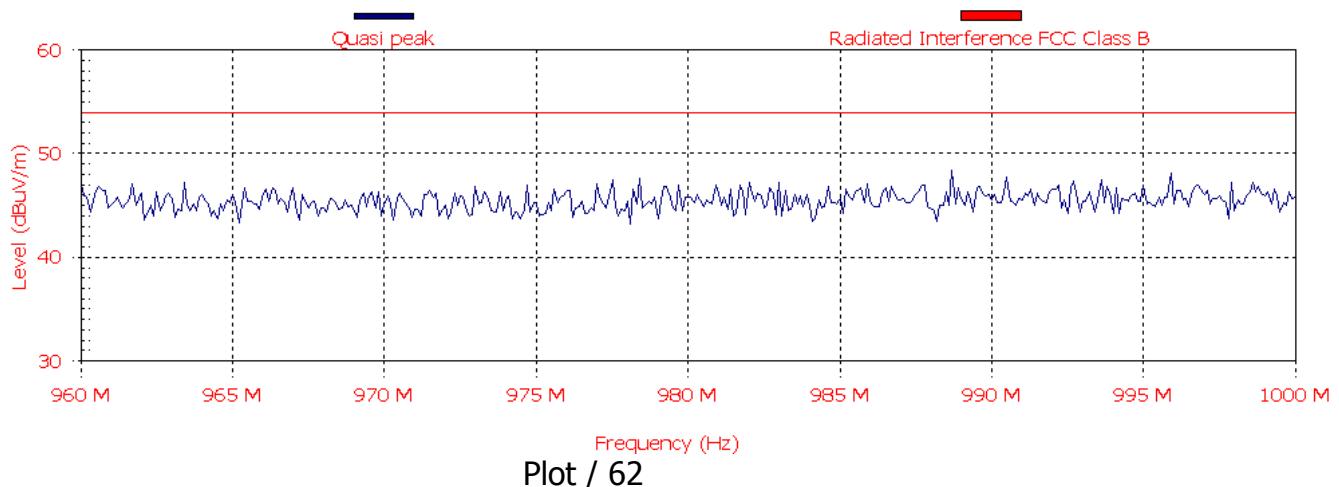


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

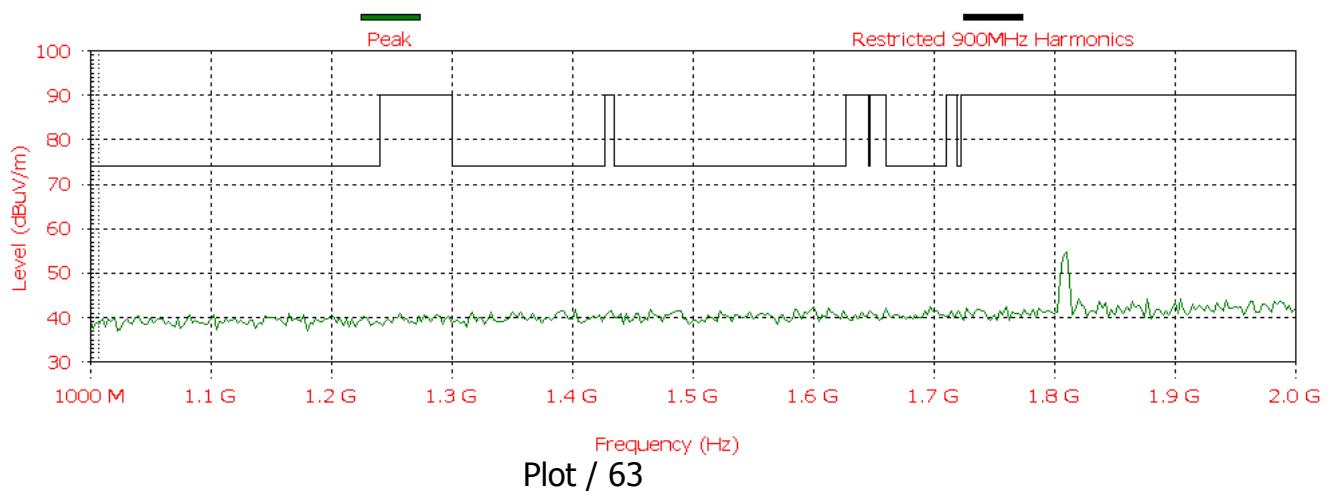

Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

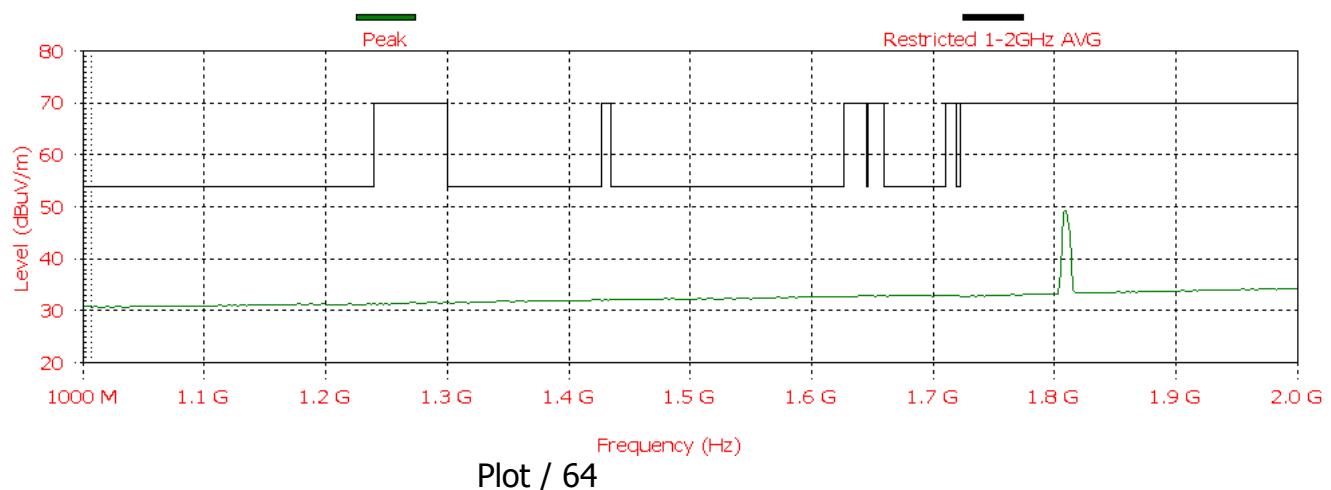


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

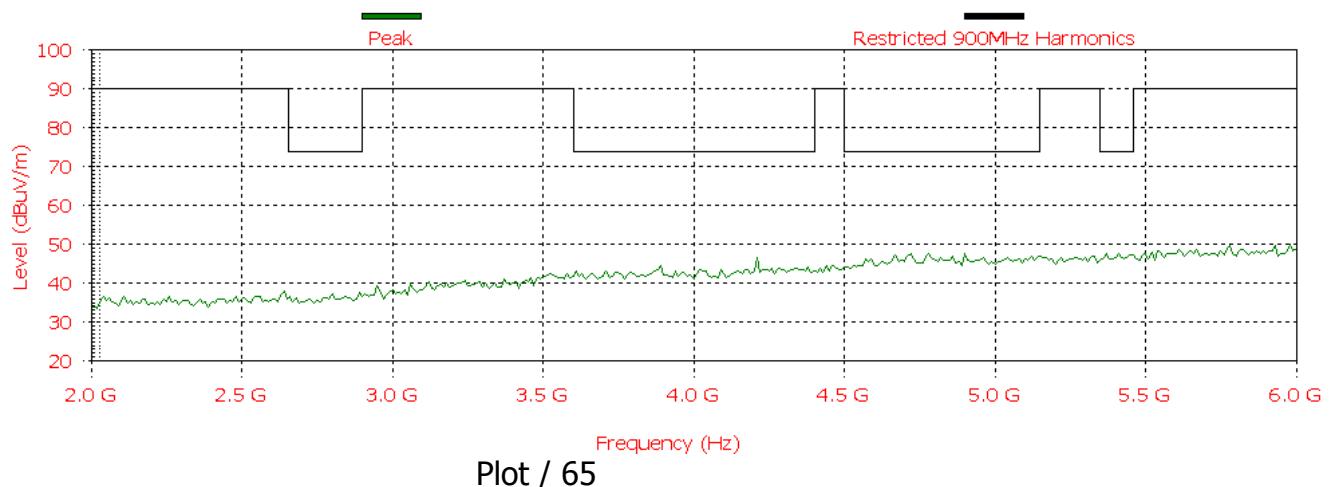


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector



Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

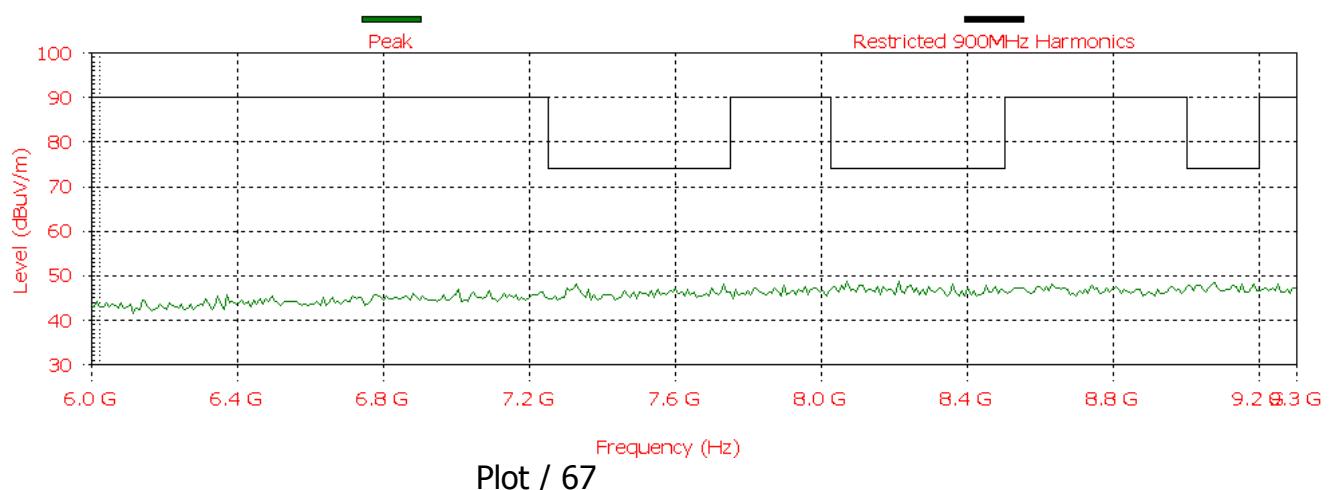


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

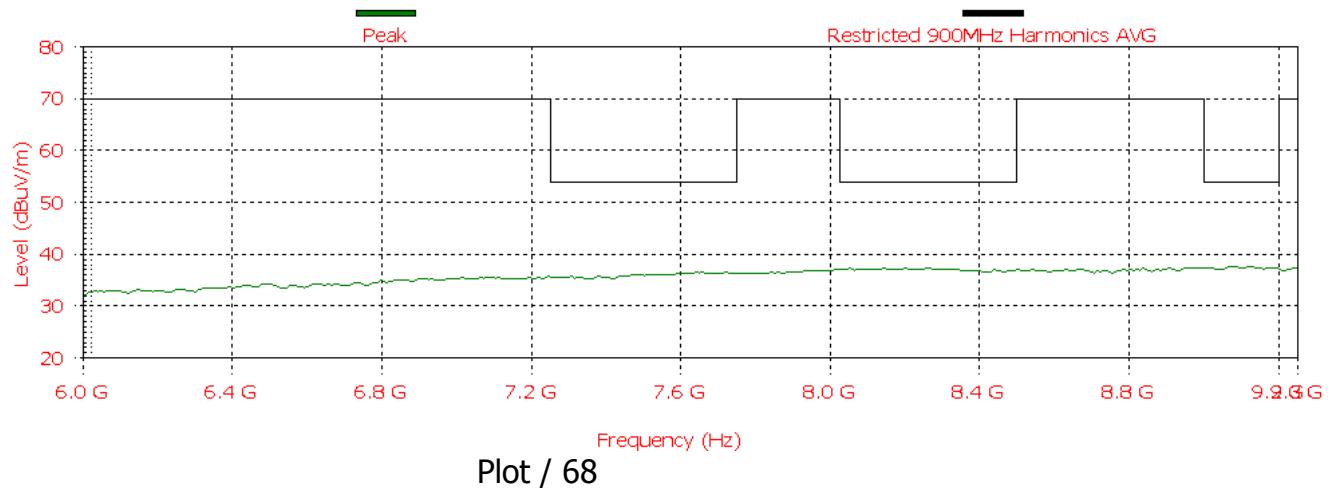


(5) Radiated spurious Emission in restricted band Transmit Frequency **915MHz Antenna-Sq**
Extern 12.5dbi plots 69 -81


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

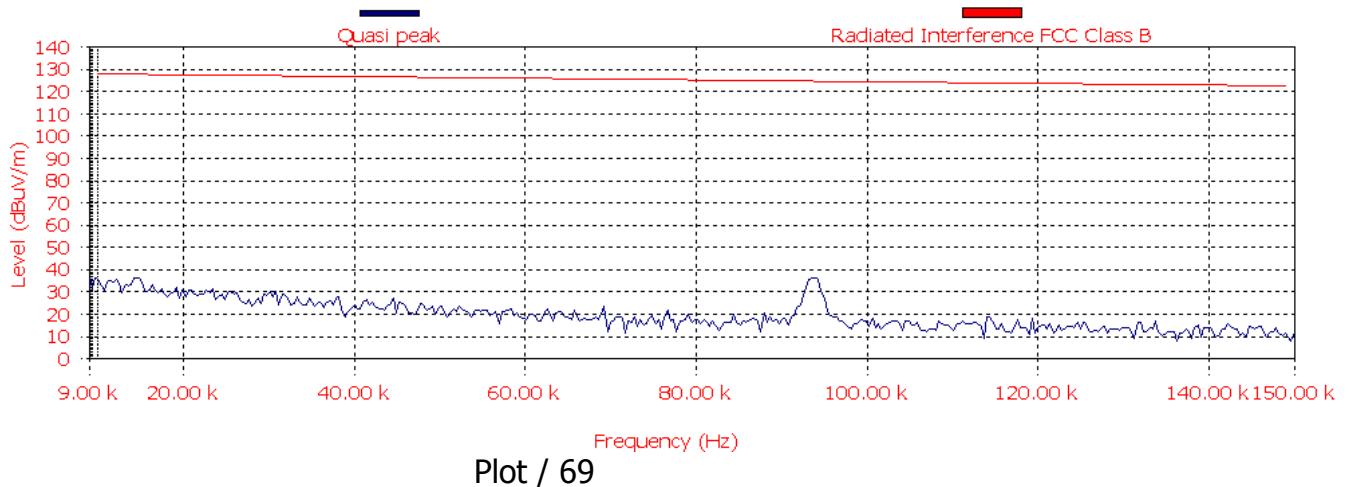


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

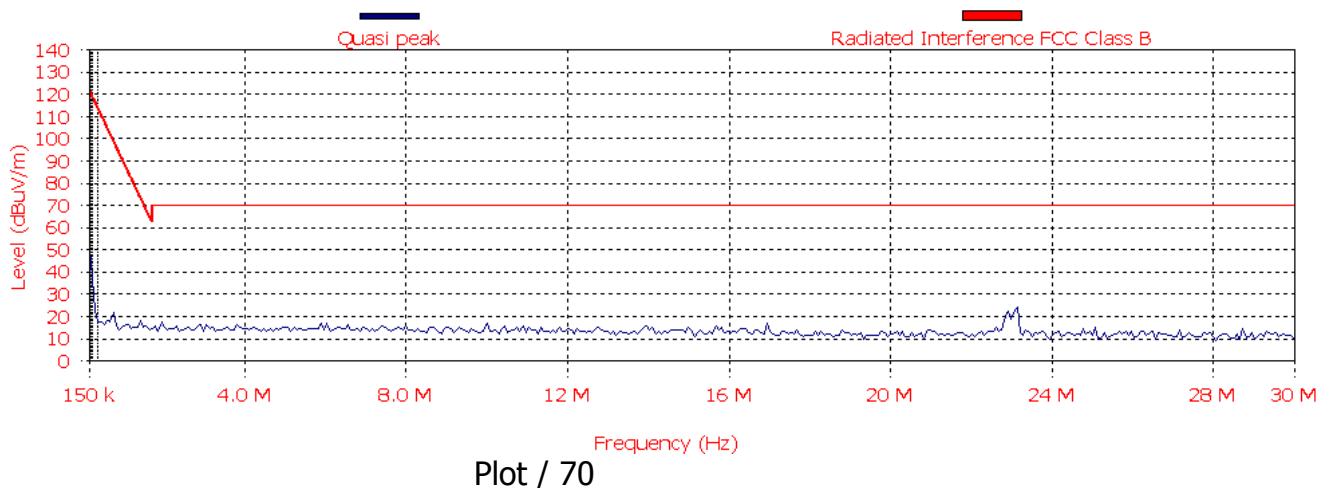


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

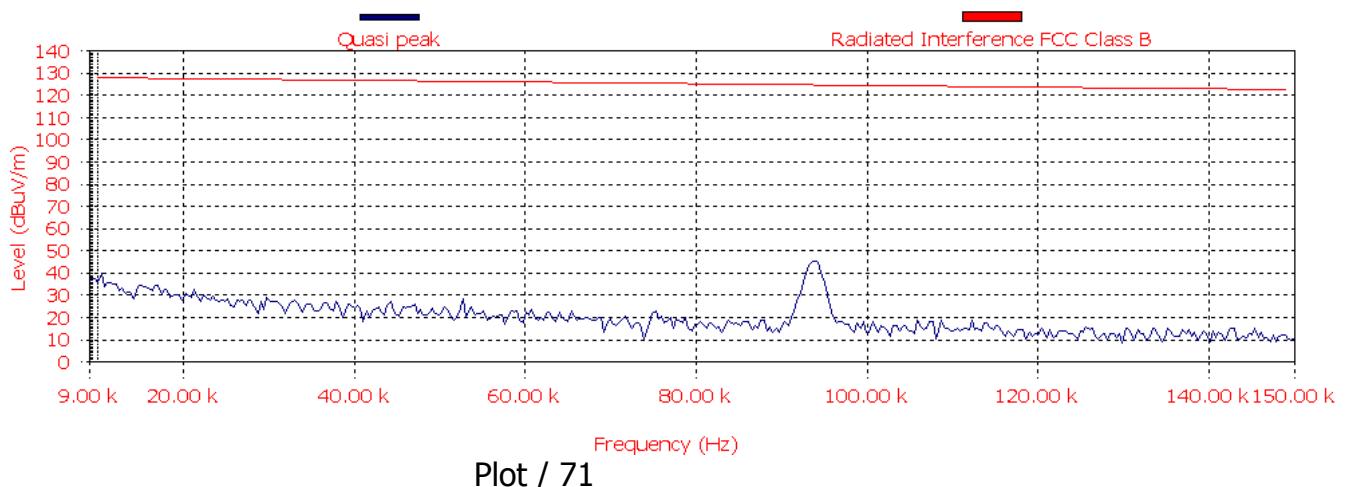


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

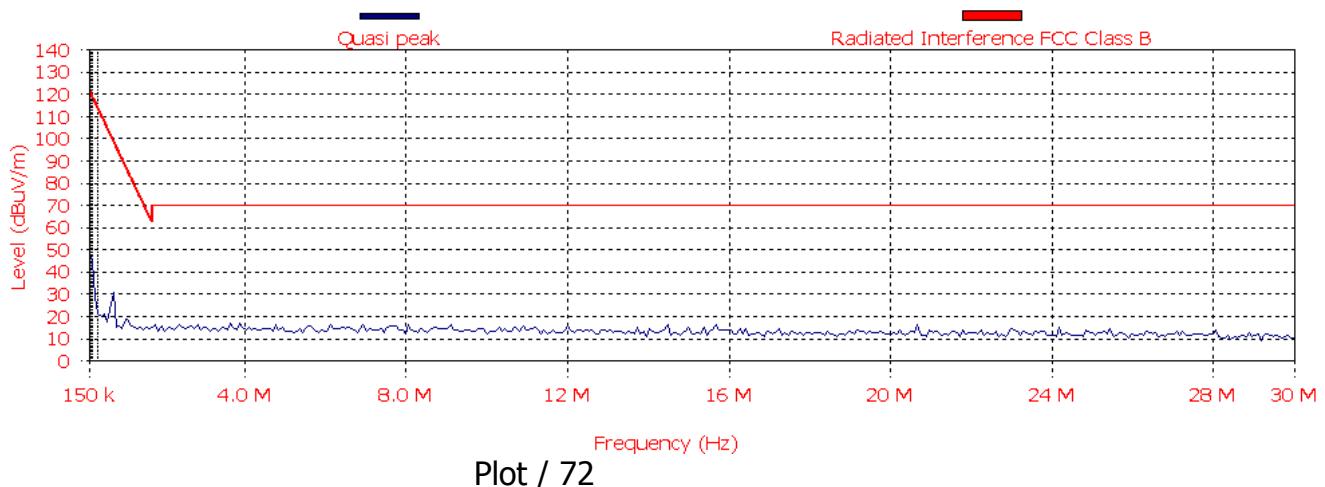


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

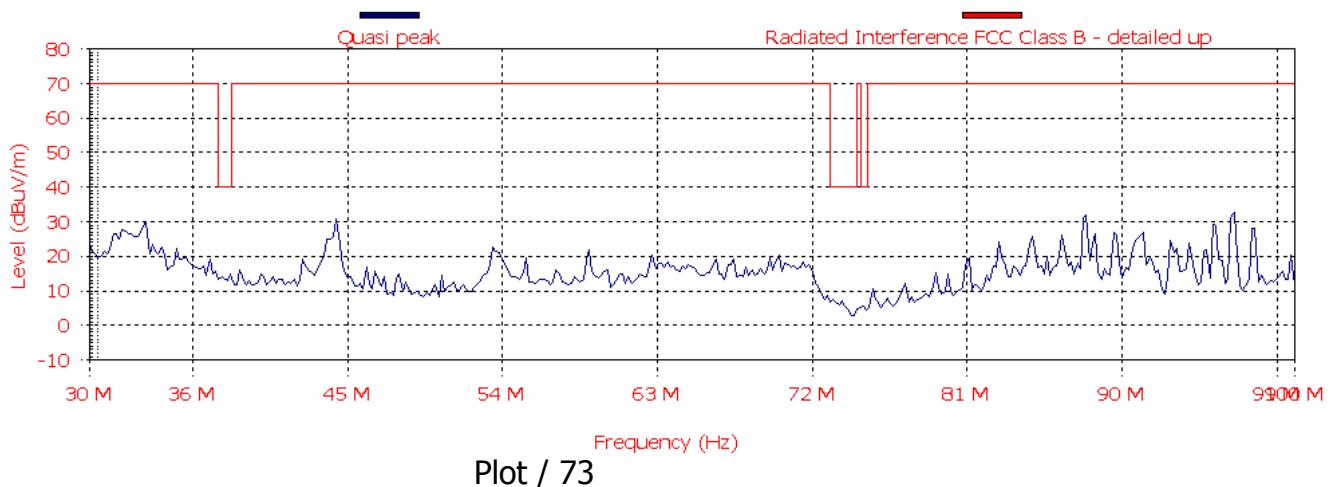


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

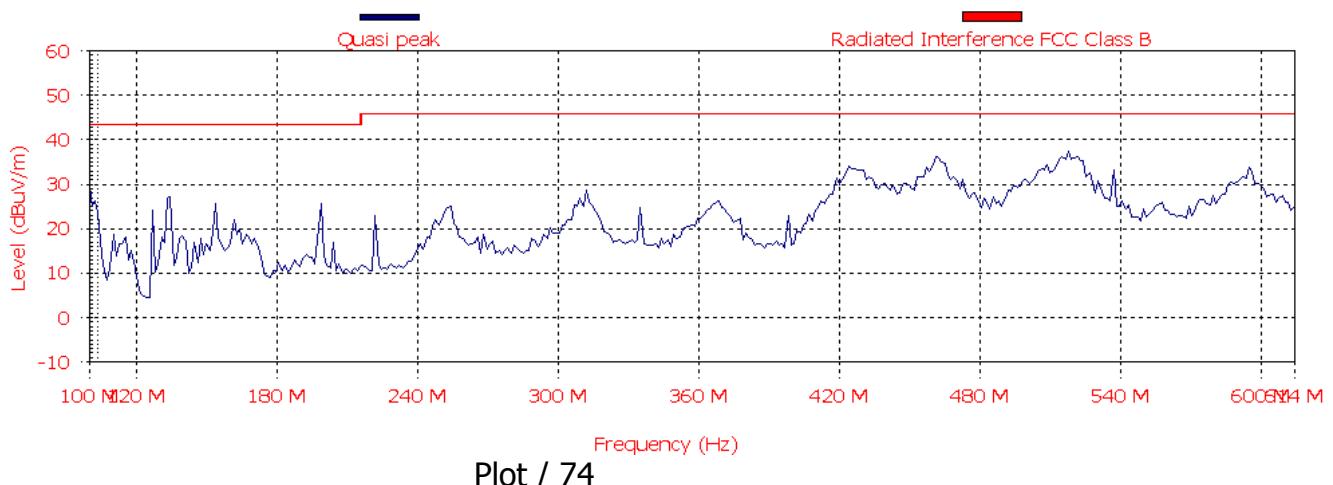


Analyzer setting: RBW-120K, VBW-1MHz, QP detector

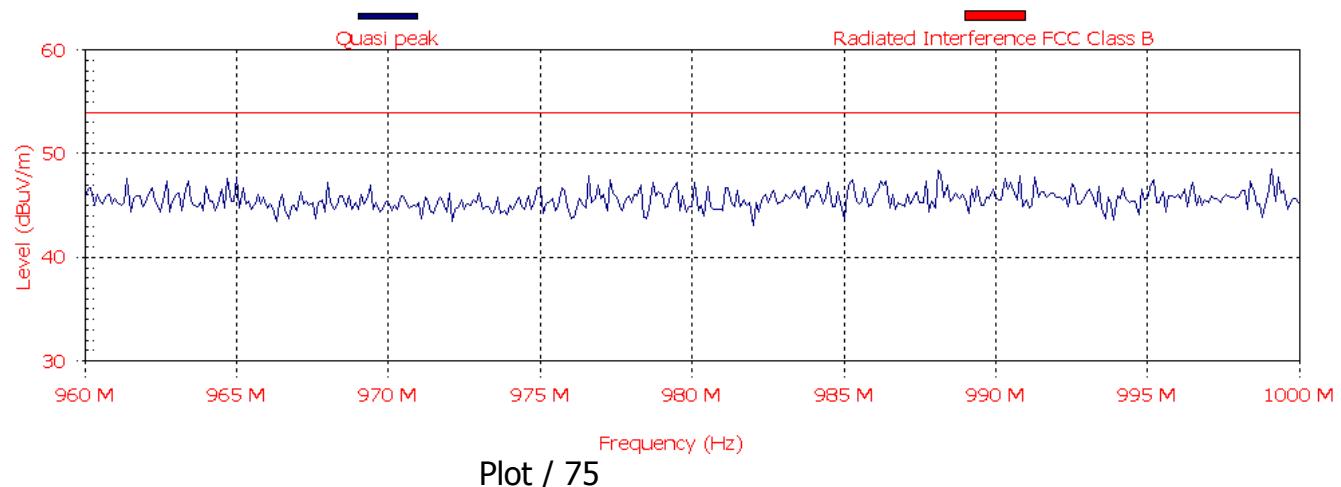


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

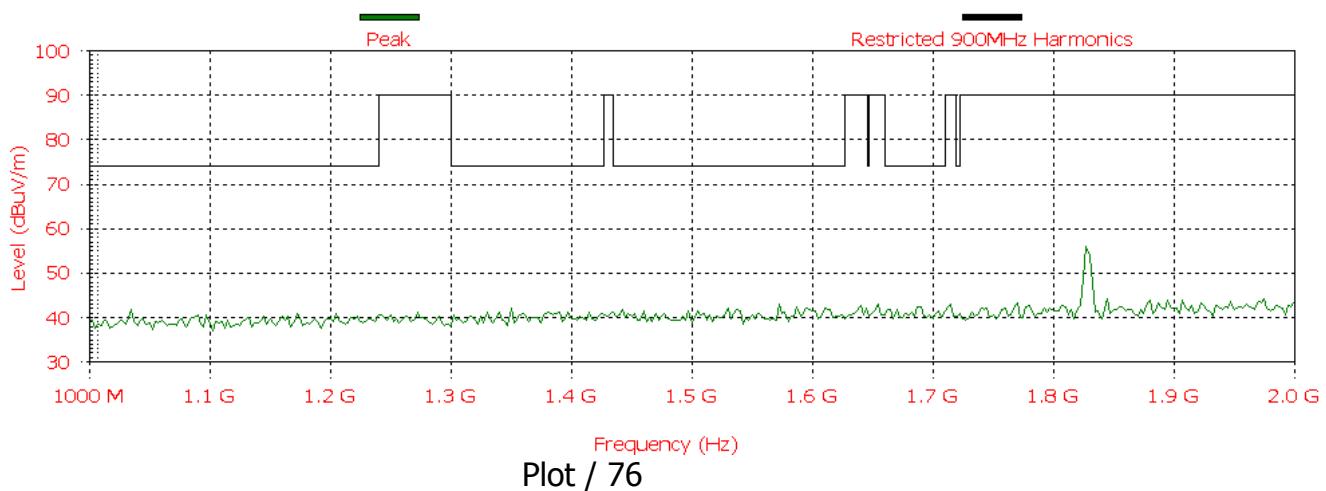


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

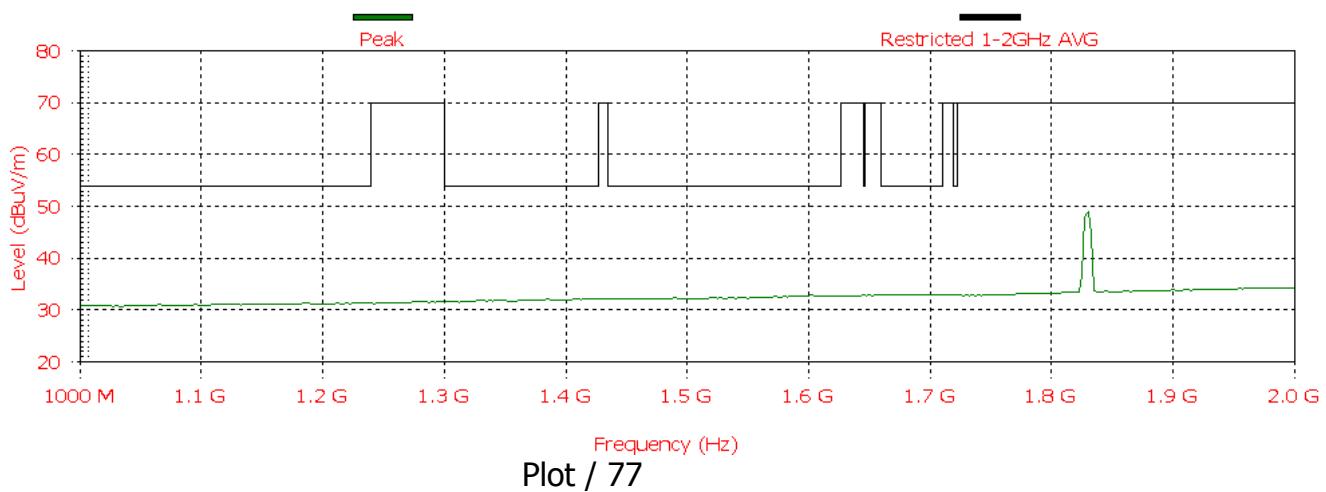


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

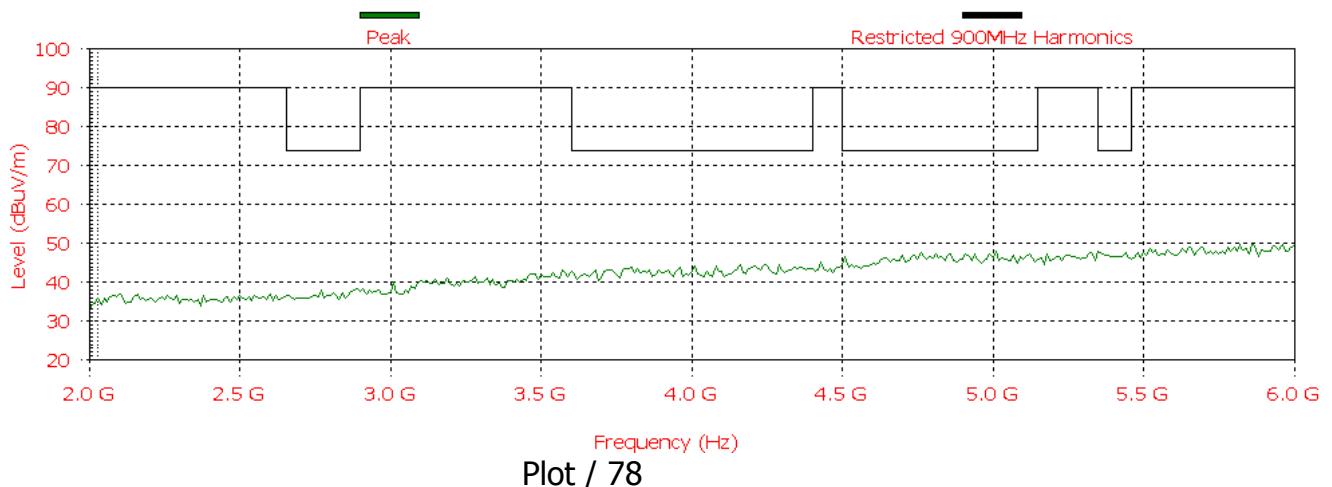


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

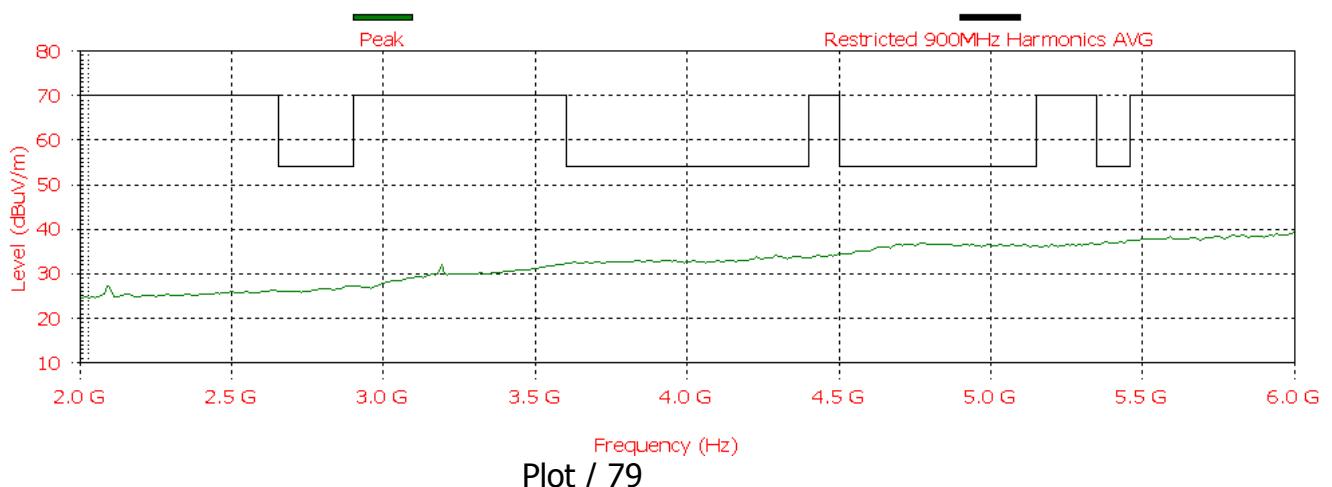

Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

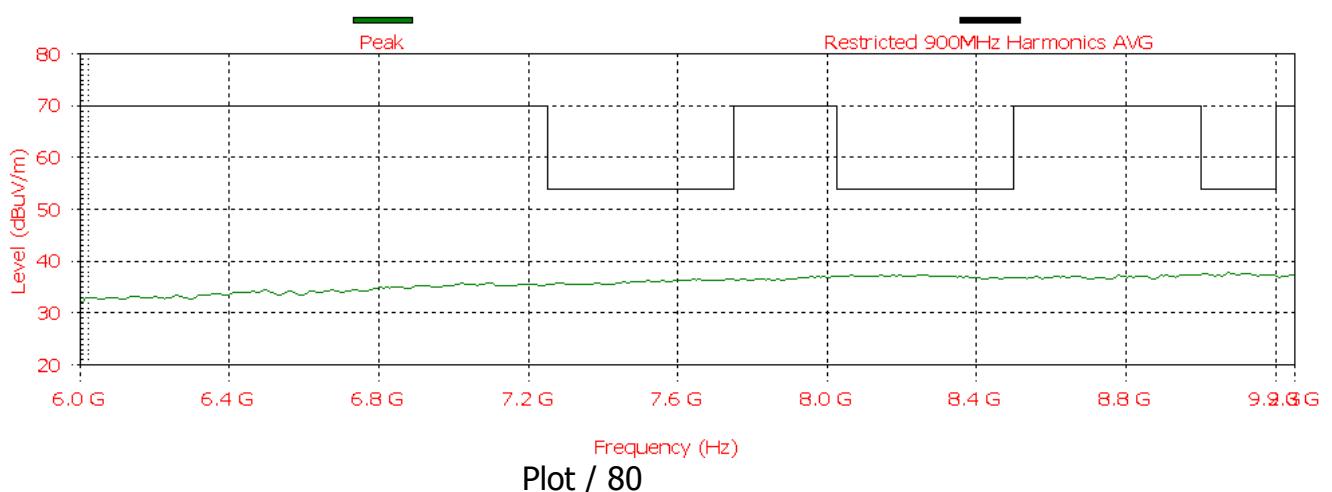


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

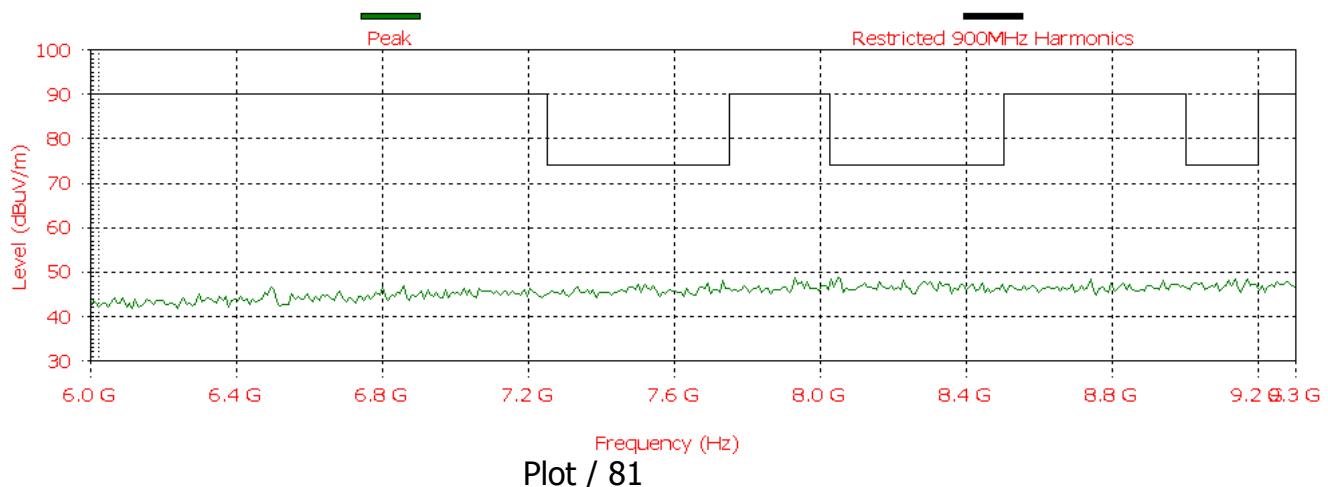


(6) Radiated spurious Emission in restricted band Transmit Frequency **925MHz Antenna- Omni 12.5dbi plots 82 -94**


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

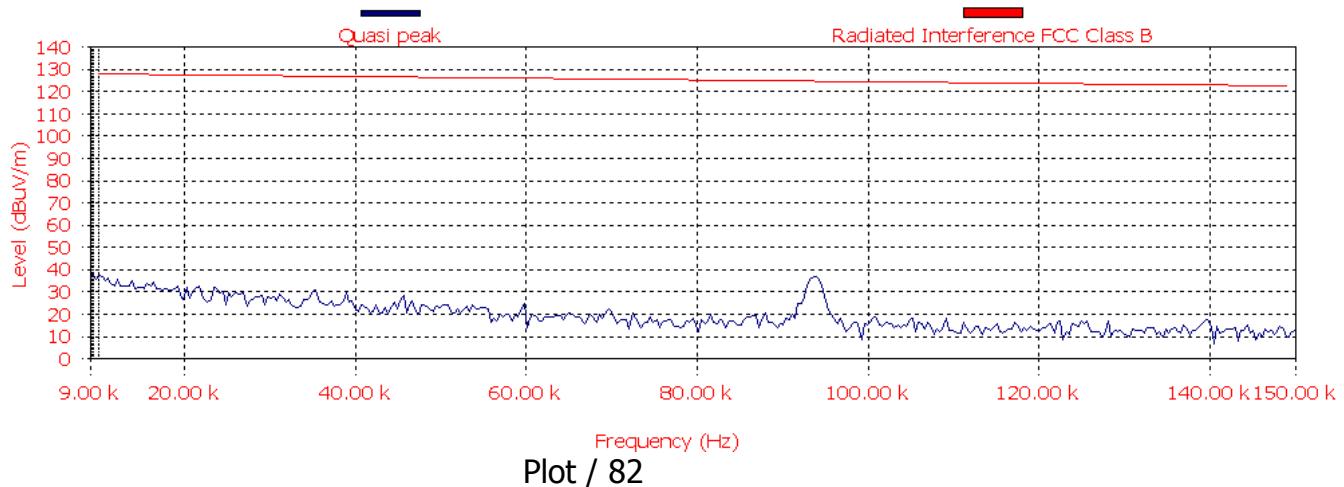


Analyzer setting: RBW-1K, VBW-1MHz, QP detector

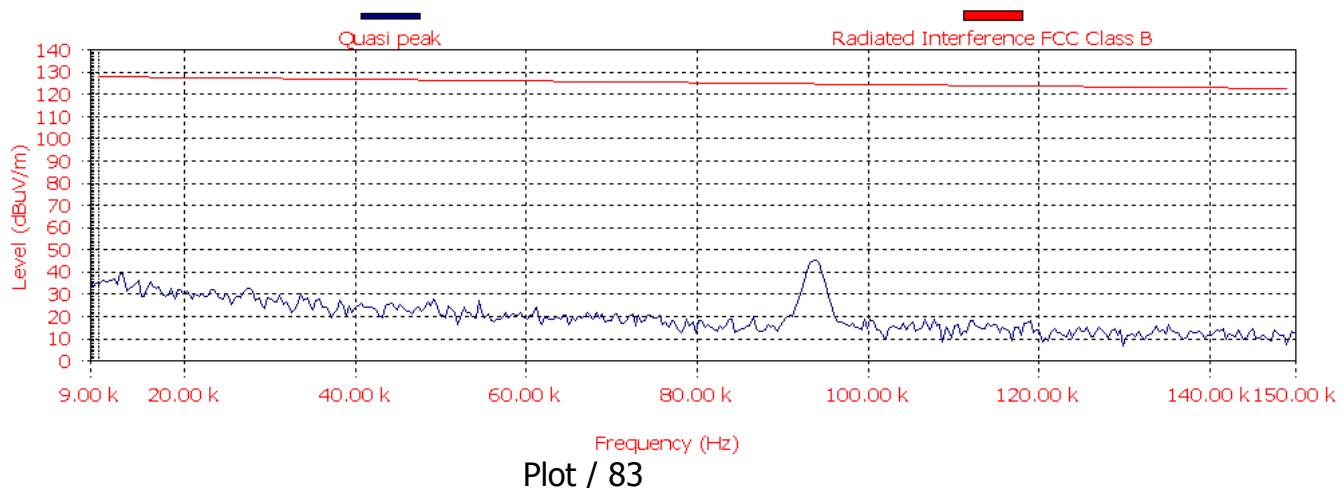


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

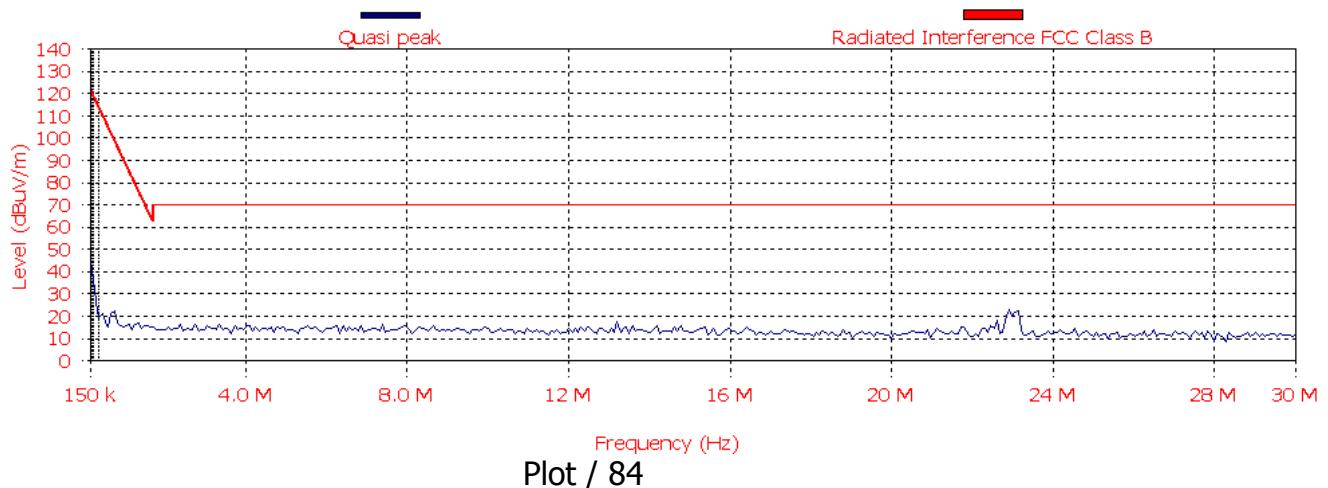


Analyzer setting: RBW-9K, VBW-1MHz, QP detector

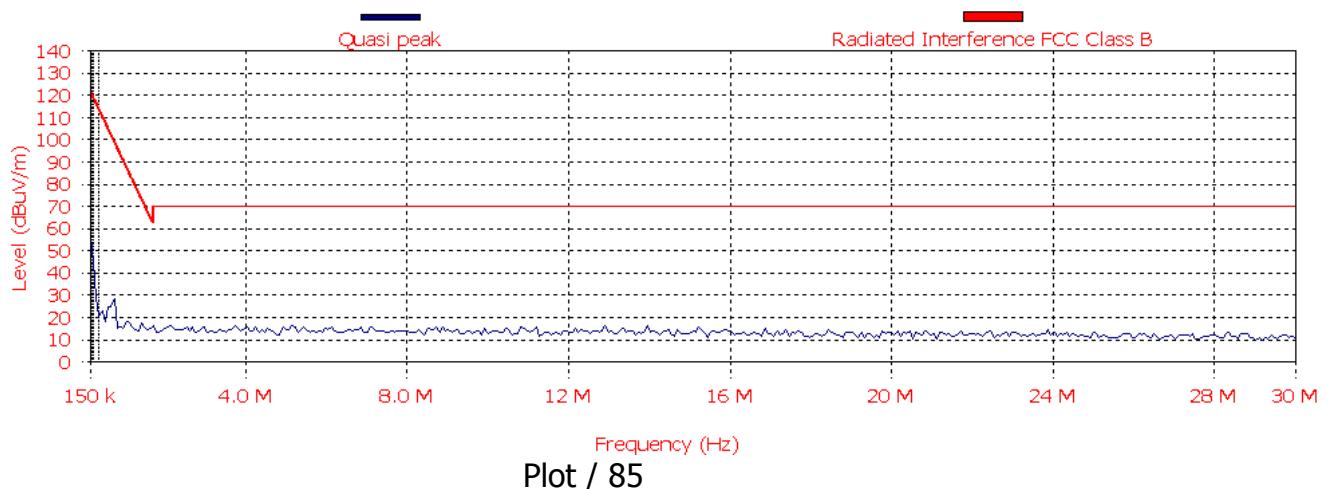

Analyzer setting: RBW-120K, VRBW-1MHz, QP detector

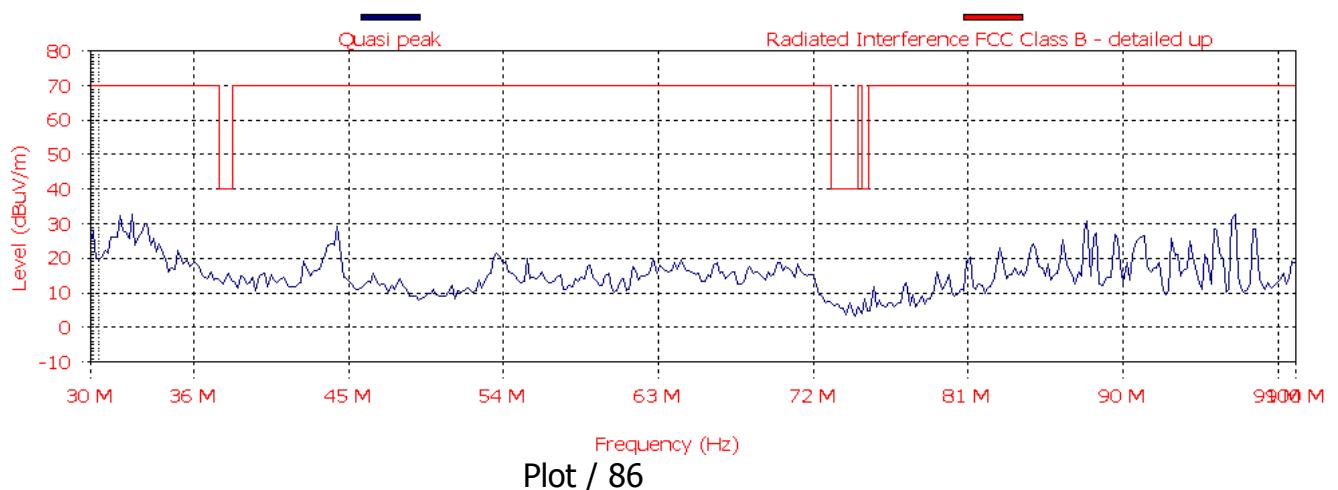

Analyzer setting: RBW-120K, VBW-1MHz, QP detector

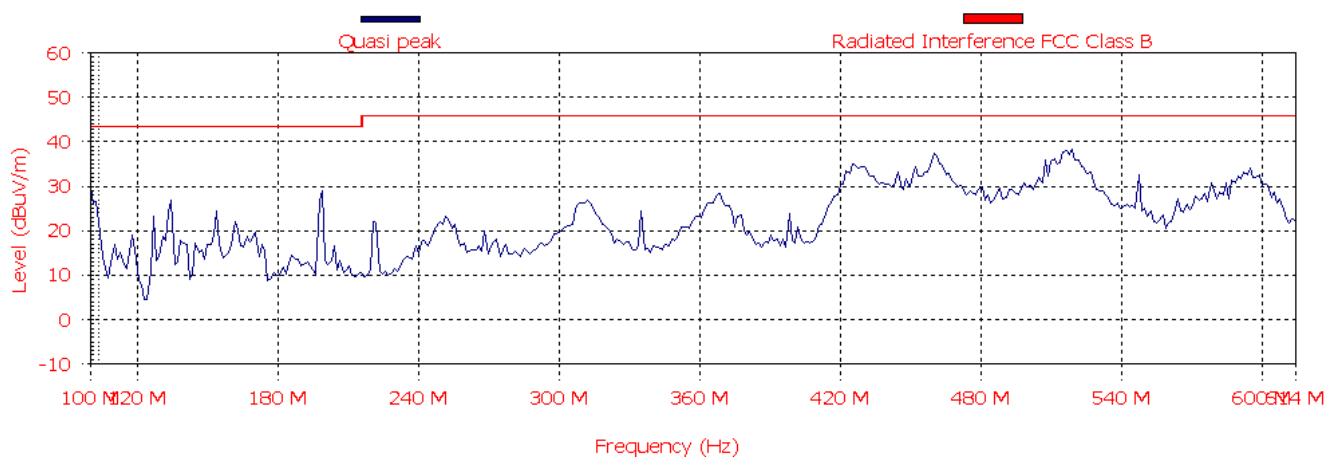

EUT File:
 N:\COMMON\WAVE-IP-n\GA_900Q\900Q.EUT
Order Number:


EUT
 Name: QQ2-GA900 UPDATE TO 1/4
 Serial Number: 0050C21CC7FF

Client
 Name: Wavelp
 Contact Person: yoram singer

Radiated Emission

Description: 87) FCC 15.205 RESTRICTED 900-1GHz 925 12.5dbi sq extern
 From 960 MHz to 1000 MHz

Graph:

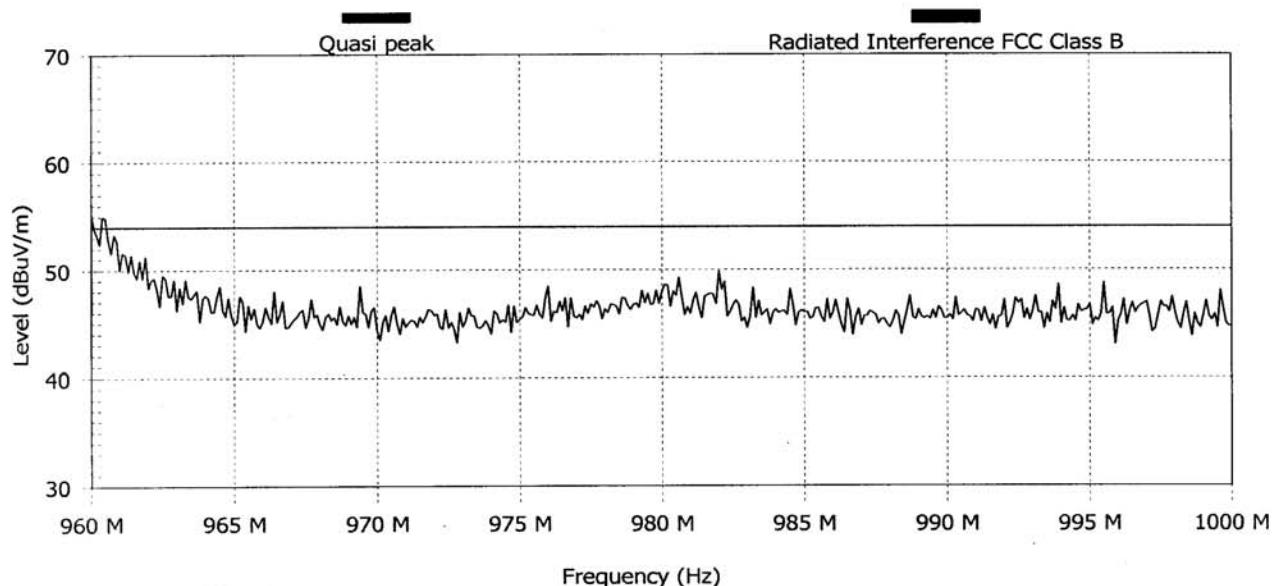

Detected Peaks:


Nr	Frequency (MHz)	Type	PK (dBuV/m)	QP (dBuV/m)	QP Limit (dBuV/m)	QP Diff (dBuV/m)	QP Pass	Pass	Angle (degrees)	Height (m)	H/V
1	961.789	Disc. BB	49.6	42.9	54.0	-11.1	Pass	Pass	0	1.65	V
2	960.001	Cont. BB	53.2	47.8	54.0	-6.2	Pass	Pass	0	1.65	V
3	960.284	Disc.	51.0	46.7	54.0	-7.3	Pass	Pass	0	1.65	V
4	960.461	Disc. NB	50.5	45.6	54.0	-8.4	Pass	Pass	0	1.65	V
5	961.452	Cont.	51.3	44.0	54.0	-10.0	Pass	Pass	0	1.65	V
6	962.667	Disc. BB	48.2	41.3	54.0	-12.7	Pass	Pass	0	1.65	V

Settings:


Antenna: Both Polarizations at 3.0 m
 Ref. Level: 90.0 dBuV/m Att: 0 dB. RBW: 120 kHz. VBW: 1000 kHz. Sweep time: 20 ms.
 Detect all peaks above 6 dB below the limit lines with a maximum of 6 peaks.
 Measure the peaks with the quasi-peak detector

Note:


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

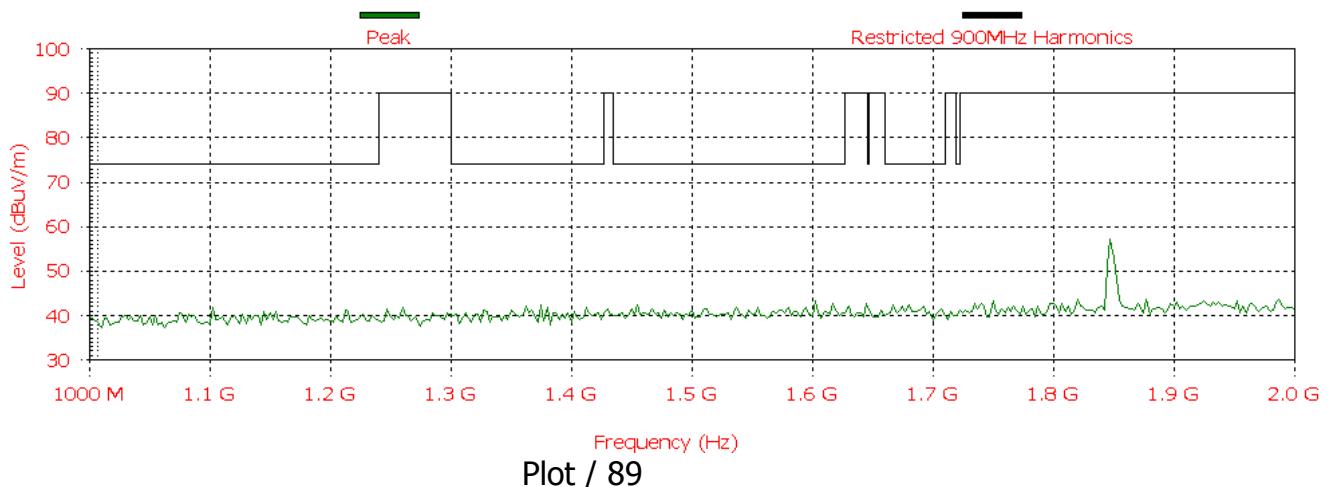


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

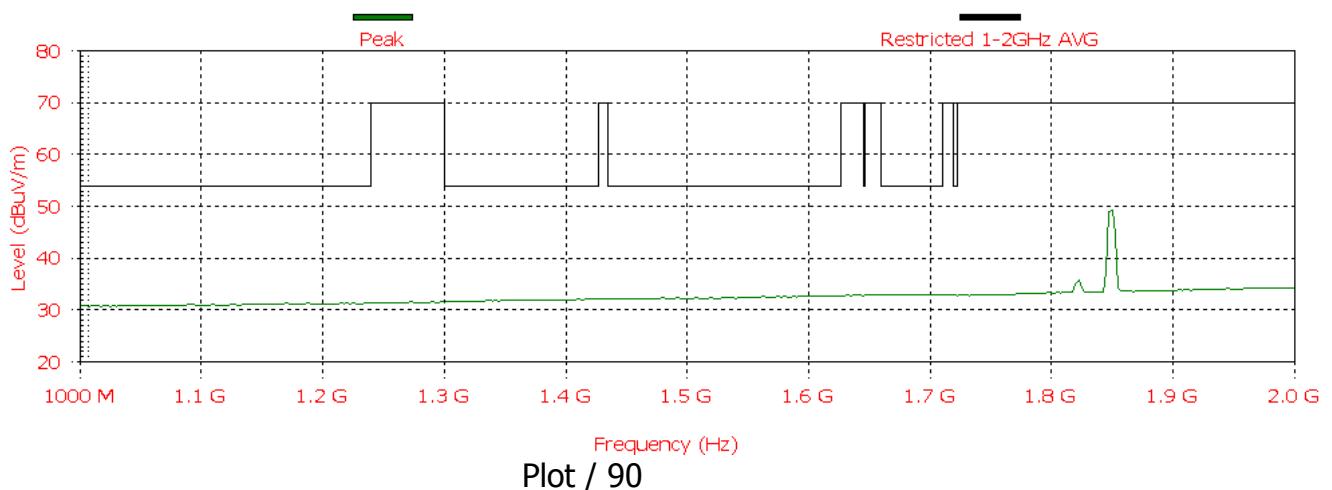


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

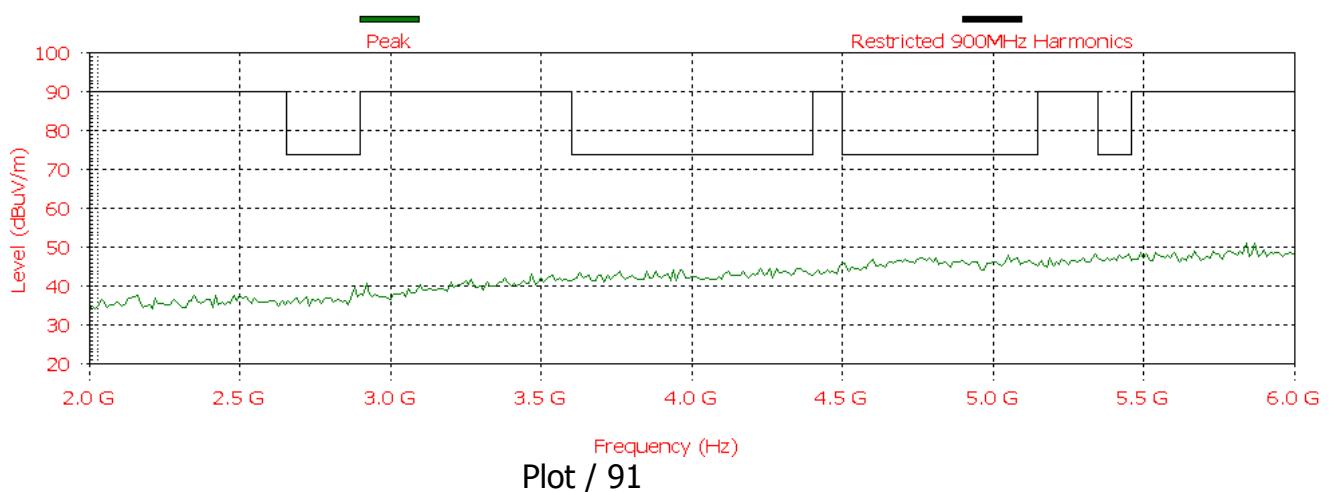


Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

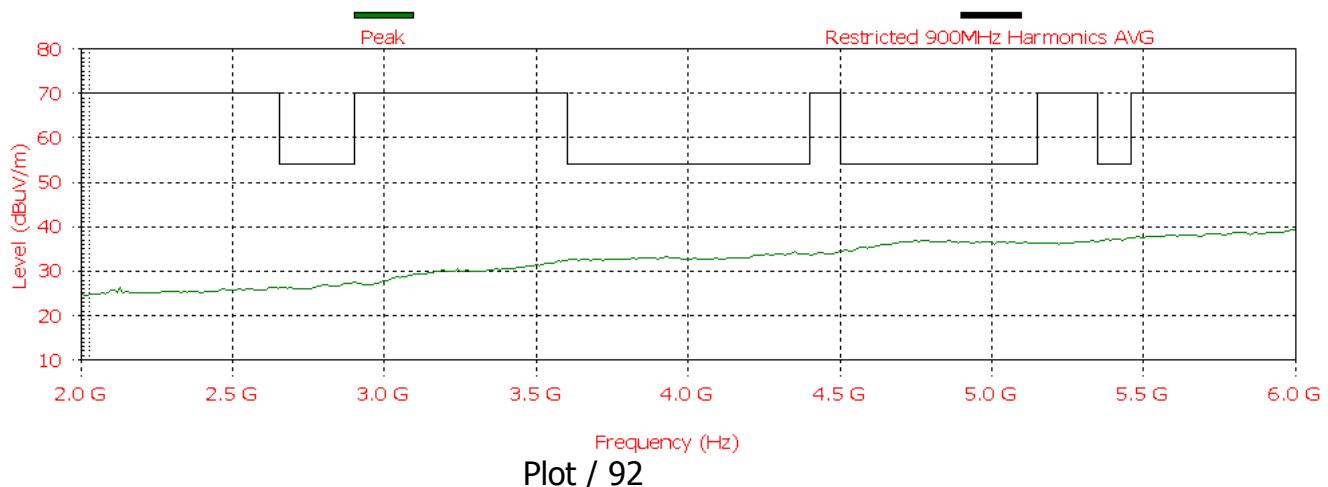



Analyzer setting: RBW-1M, VBW-3MHz, Peak detector


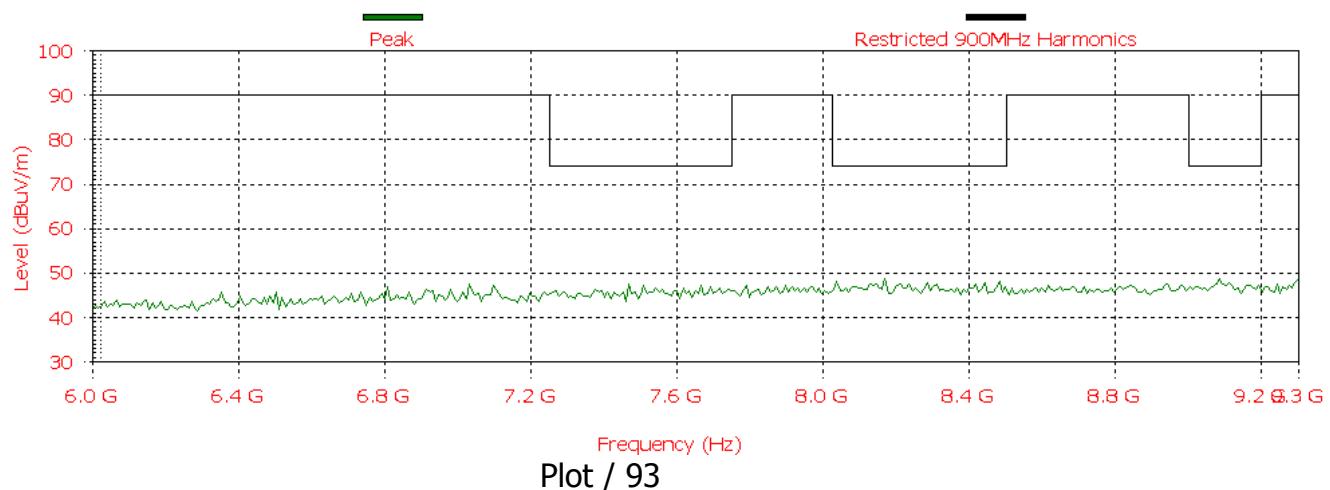




Analyzer setting: RBW-1M, VBW-3MHz, Peak detector

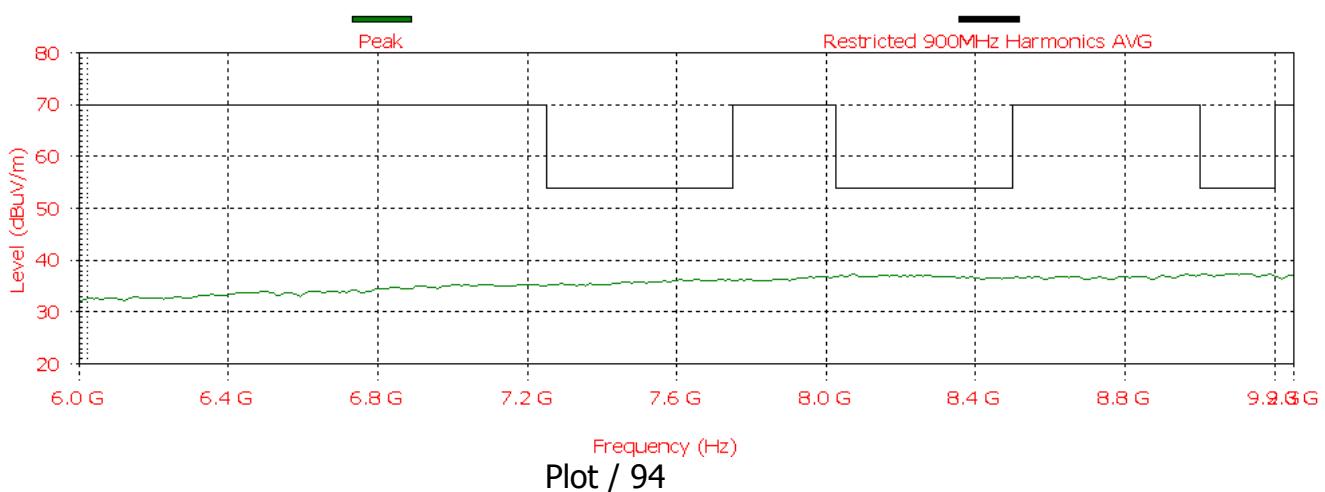

e. Peak power spectral density of DSSS according 15.247d plots 95 - 100

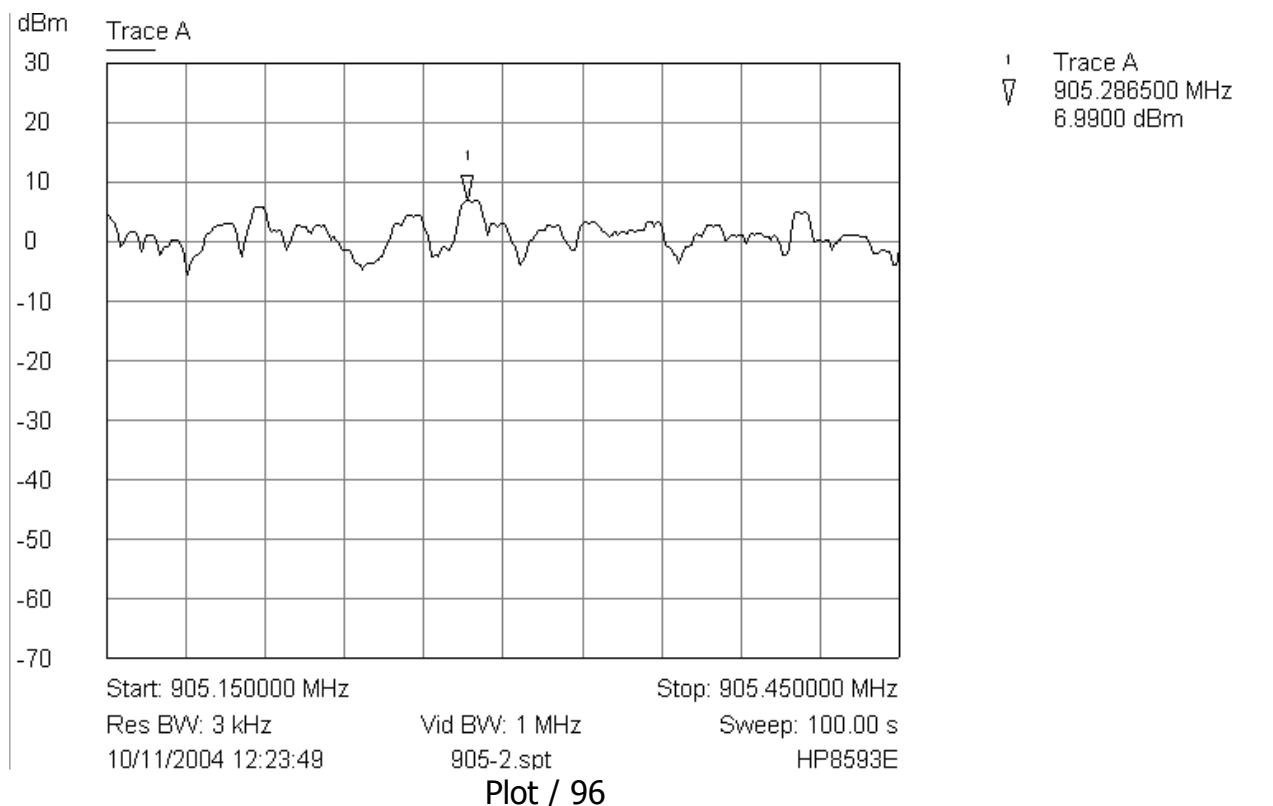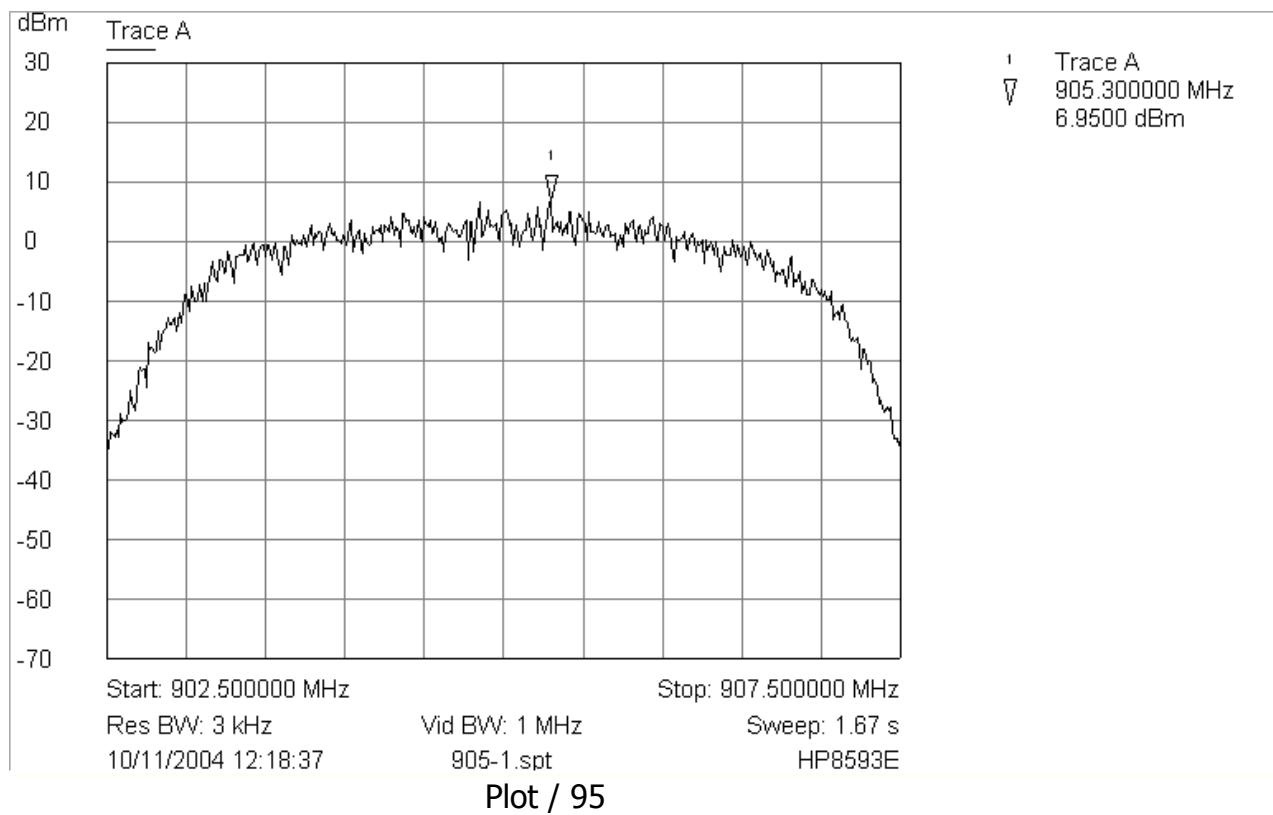

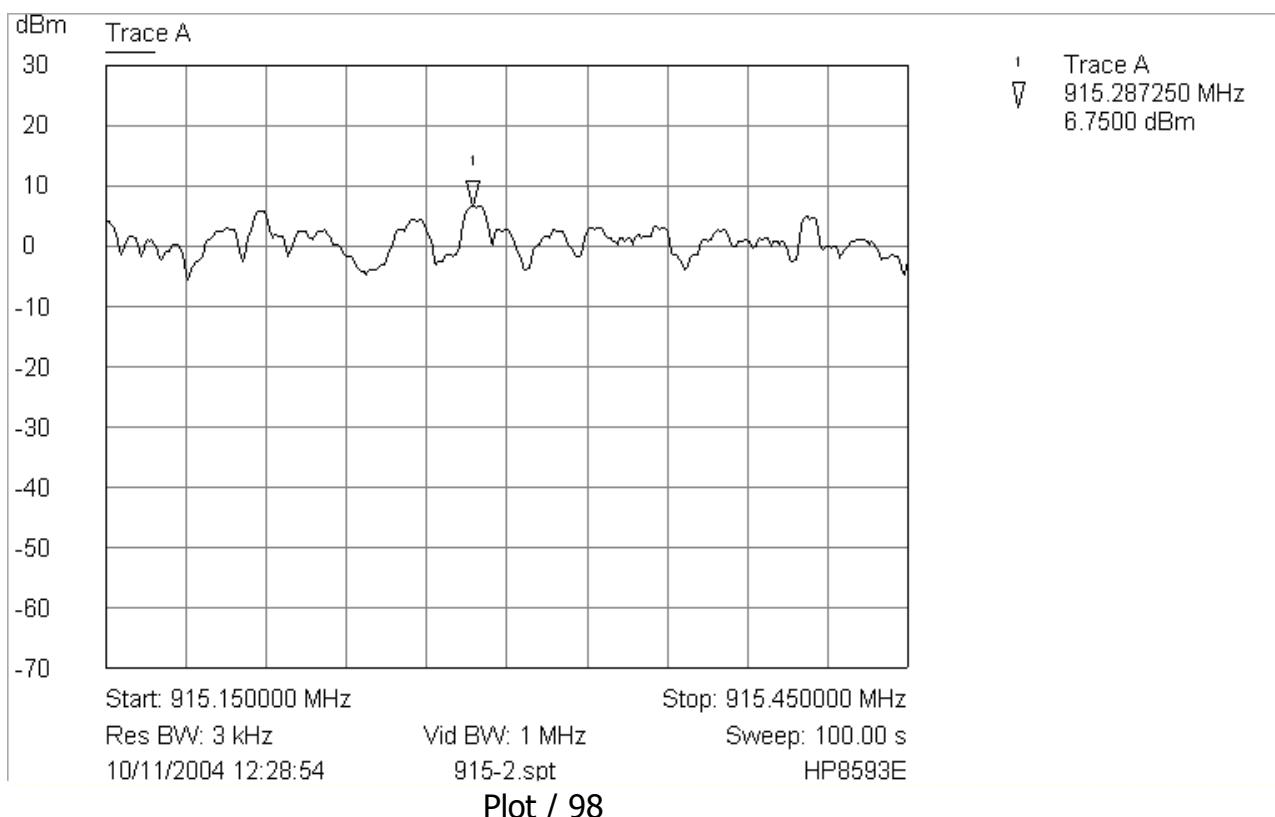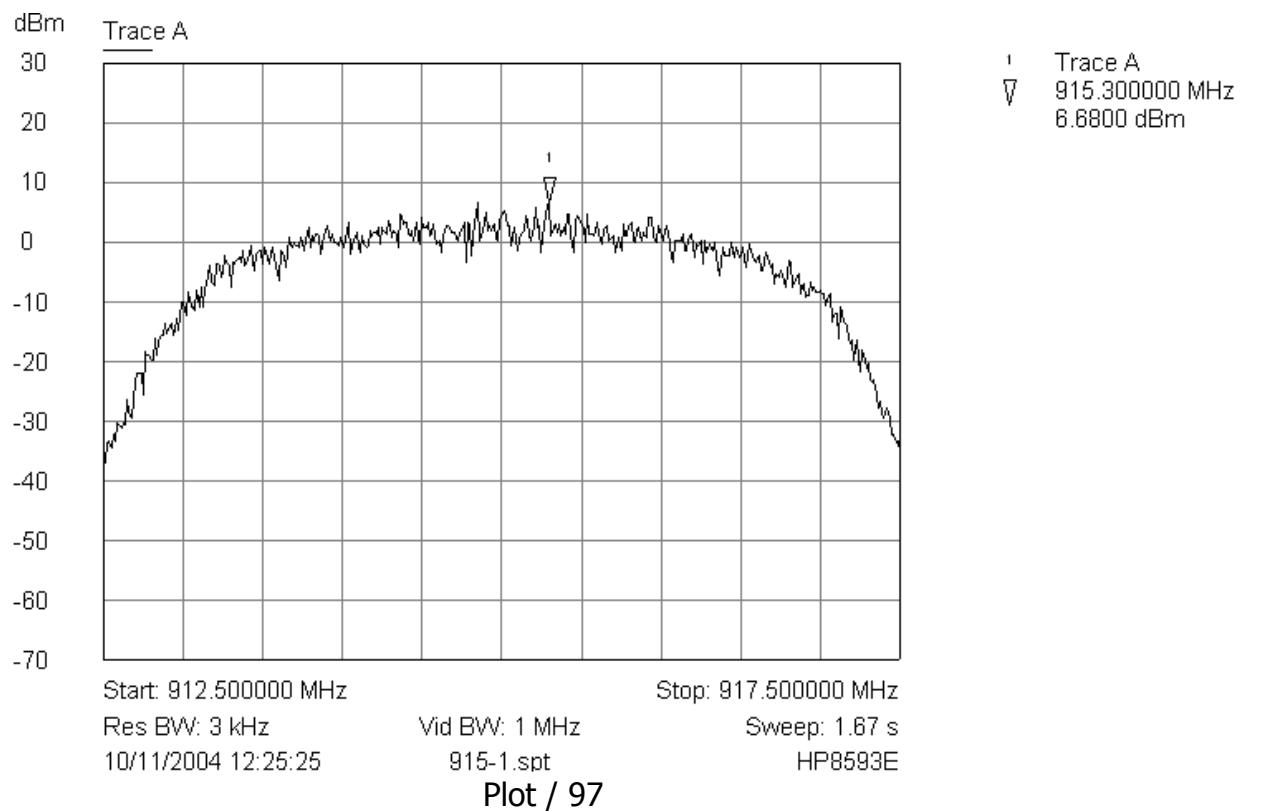

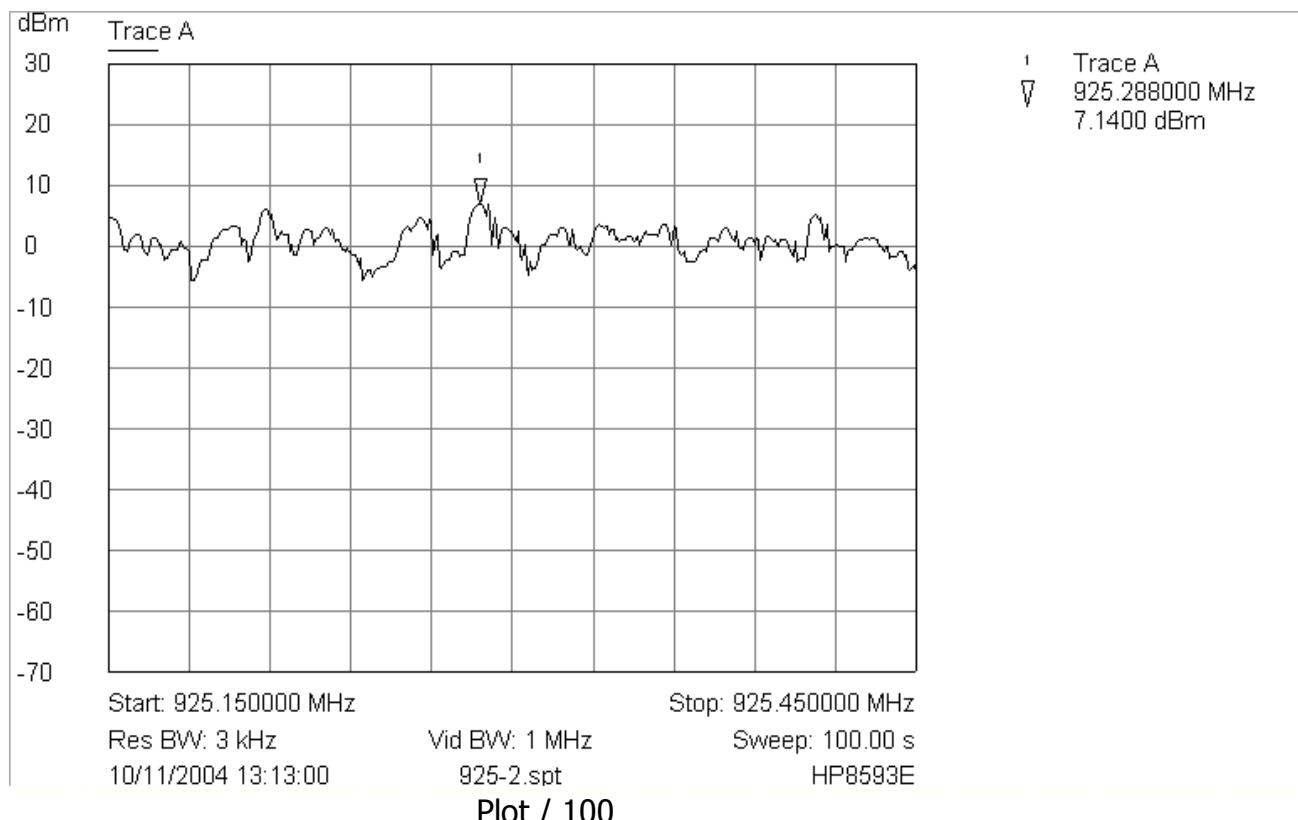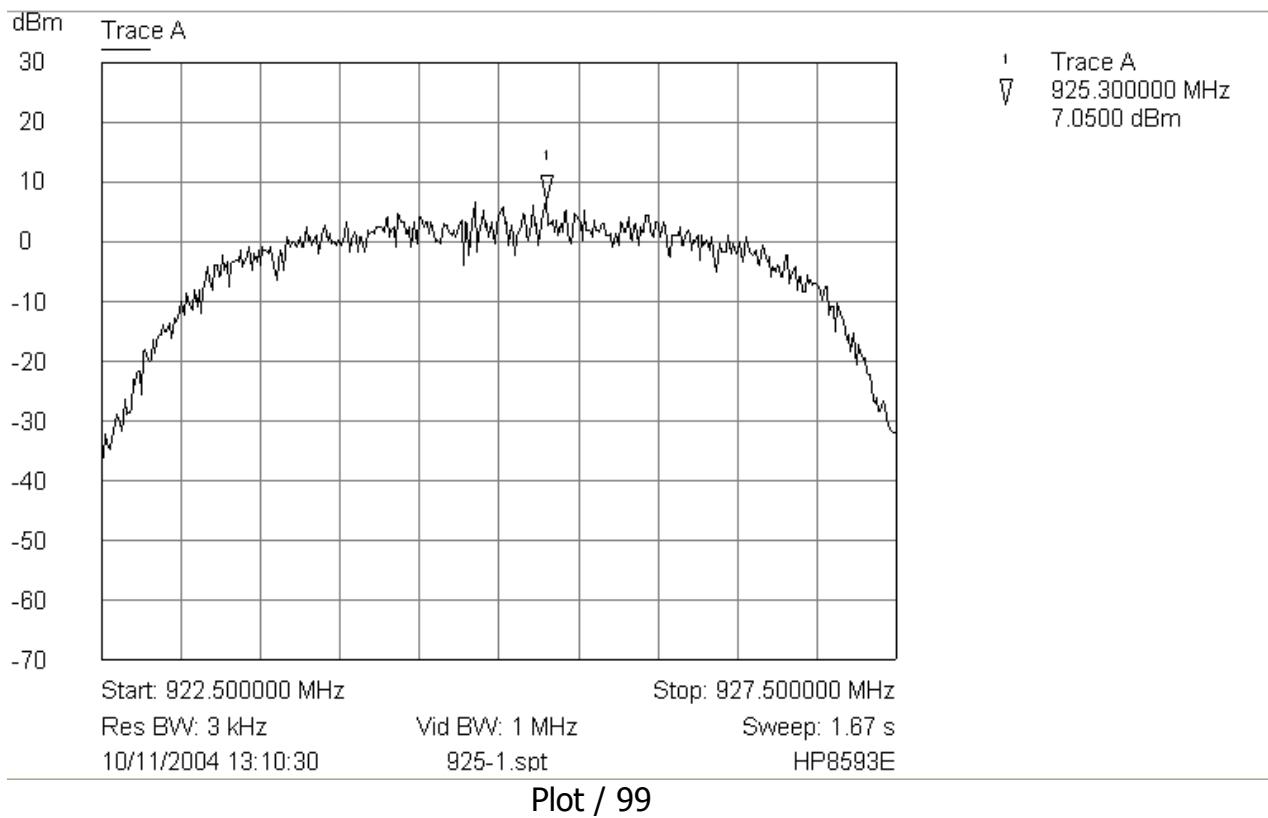

f. Unintentional Radiated Emission Plots 101 - 105


EUT File:
 N:\COMMONWAVE-IP-n\GA_900Q\900Q.EUT
Order Number:

EUT
 Name: QQ2-GA900 UPDATE TO 1/4
 Serial Number: 0050C21CC7FF

Client
 Name: Wavelp
 Contact Person: yoram singer

Radiated Emission

Description: 53) FCC 30-1000MHz STBY
 From 30 MHz to 1000 MHz

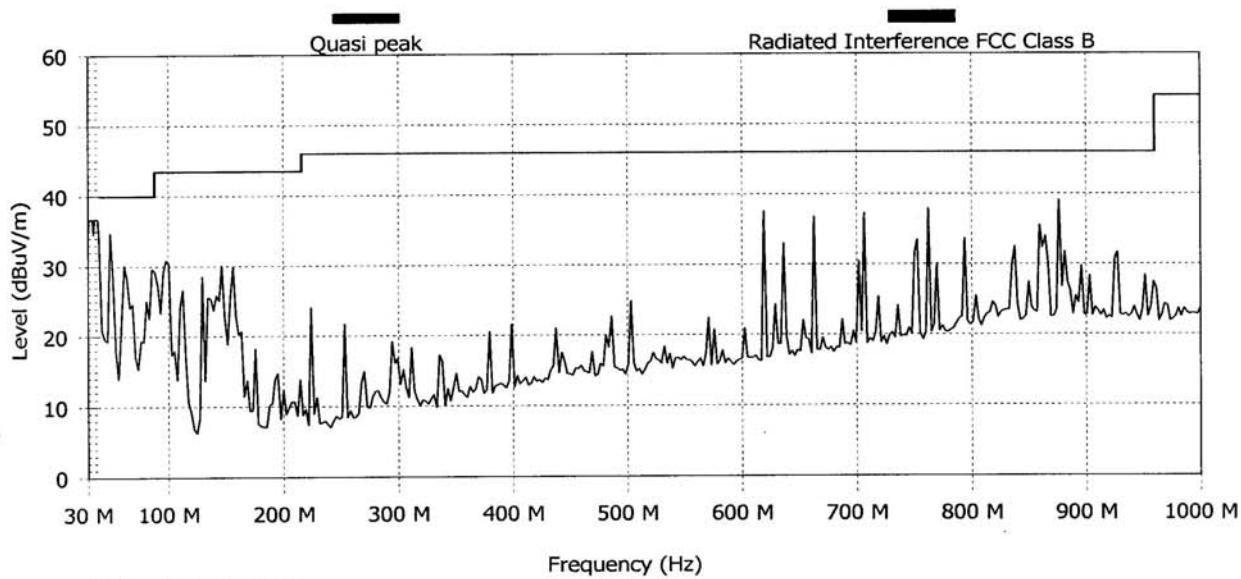Graph:

Detected Peaks:

Nr	Frequency (MHz)	Type	PK (dBuV/m)	QP (dBuV/m)	QP Limit (dBuV/m)	QP Diff (dBuV/m)	QP Pass	Pass	Angle (degrees)	Height (m)	H/V
1	35.029	Disc. NB	37.1	37.0	40.0	-3.0	Pass	Pass	221	1.65	V
2	30	Disc. BB	34.7	22.7	40.0	-17.3	Pass	Pass	288	1.65	H
3	37.275	Disc. BB	39.9	27.3	40.0	-12.7	Pass	Pass	72	1.325	V
4	49.4	Disc. BB	34.8	21.1	40.0	-18.9	Pass	Pass	216	1.65	V

Settings:




Antenna: Both Polarizations at 3.0 m

Ref. Level: 70.0 dBuV/m Att: 0 dB. RBW: 120 kHz. VBW: 1000 kHz. Sweep time: 202.0830078

Detect all peaks above 6 dB below the limit lines with a maximum of 10 peaks.

Measure the peaks with the quasi-peak detector

Note:

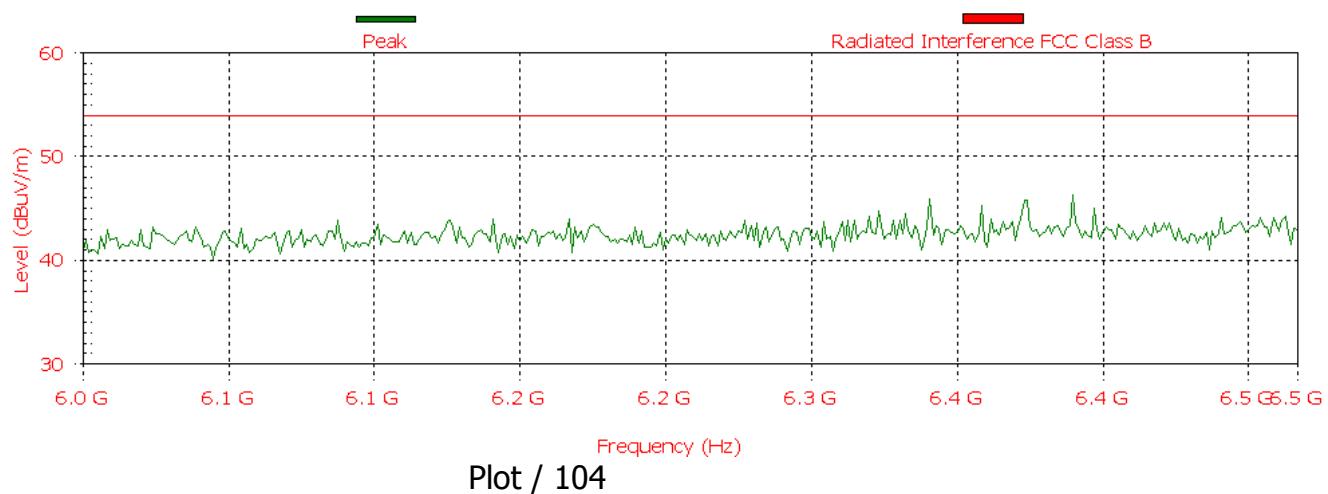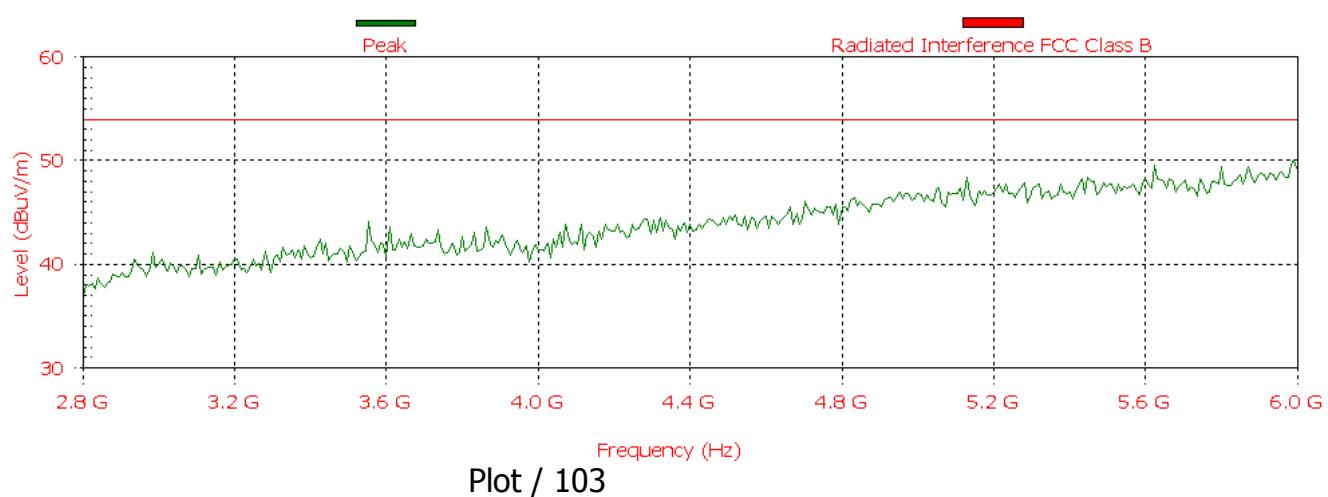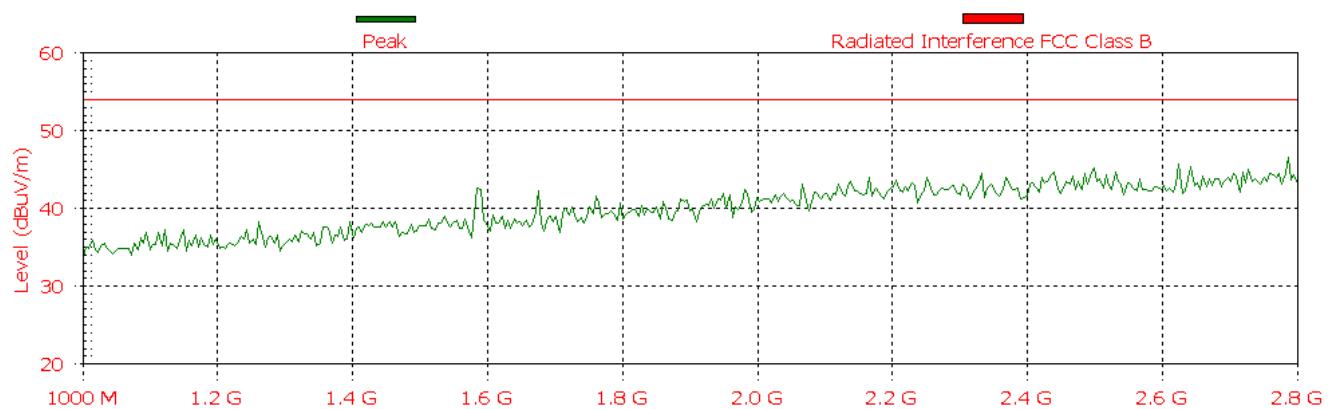



g. Conducted Emission

(1) Neutral lead RBW-9KHz VBW-1000KHz QP Detector

EUT File:

N:\COMMON\WAVE-IP-n\GA_900Q\900Q.EUT

Order Number:
EUT

Name: QQ2-GA900 UPDATE TO 1/4

Serial Number: 0050C21CC7FF

Client


Name: Wavelp

Contact Person: yoram singer

Conducted Emission LISN

Description: 109) CE FCC 15.207 150K-30MHz PHASE

From 100 kHz to 30 MHz

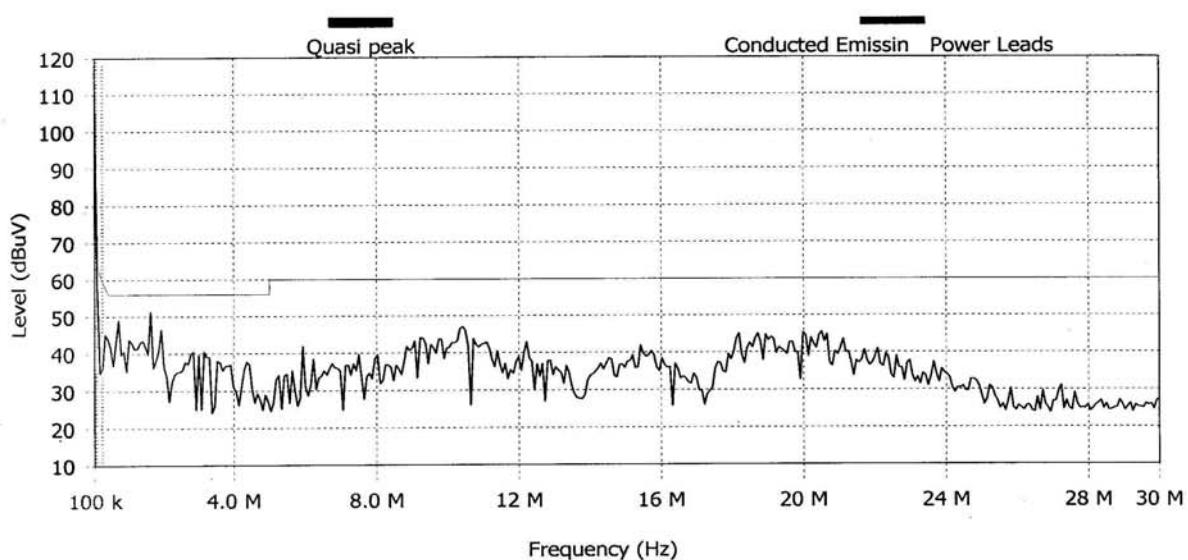Graph:

Detected Peaks:

Nr	Frequency (MHz)	Type	PK (dBuV)	QP (dBuV)	QP Limit (dBuV)	QP Diff (dBuV)	QP Pass	Pass	Line
1	1.527	Cont. BB	55.1	54.5	56.0	-1.5	Pass	Pass	Line 1

Settings:


Ref. Level: 80.0 dBuV Att: 0 dB. RBW: 9 kHz. VBW: 1000 kHz. Sweep time: 500 " ms. Step freq

Detect all peaks above 6 dB, below the limit lines with a maximum of 6 peaks.


Measure the peaks with the quasi-peak detector


Note:

(2) Phase lead RBW-9KHz VBW-1000KHz QP Detector

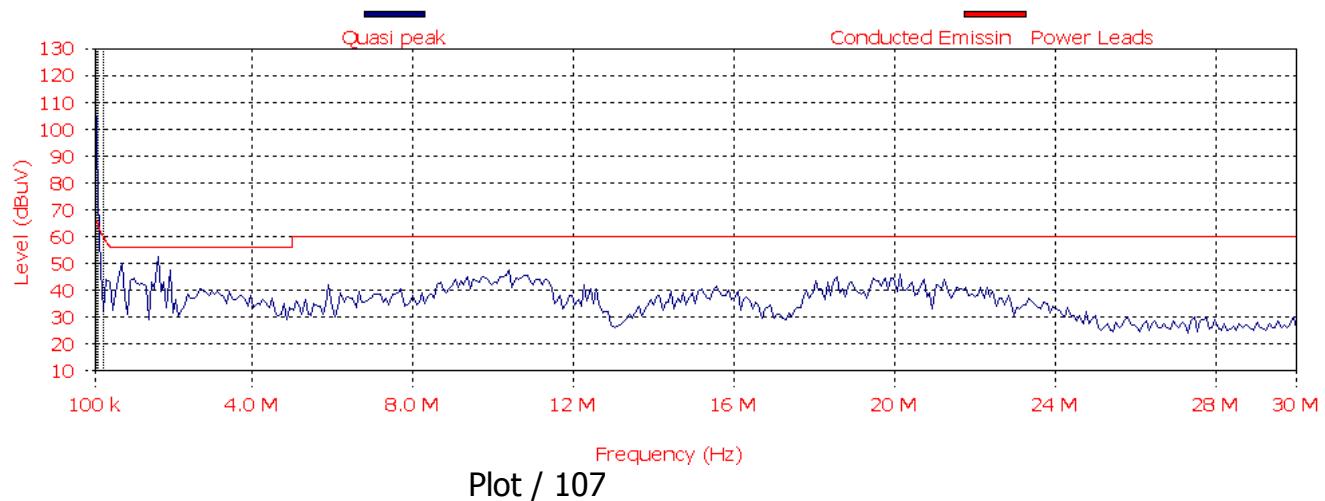

12 PICTURES

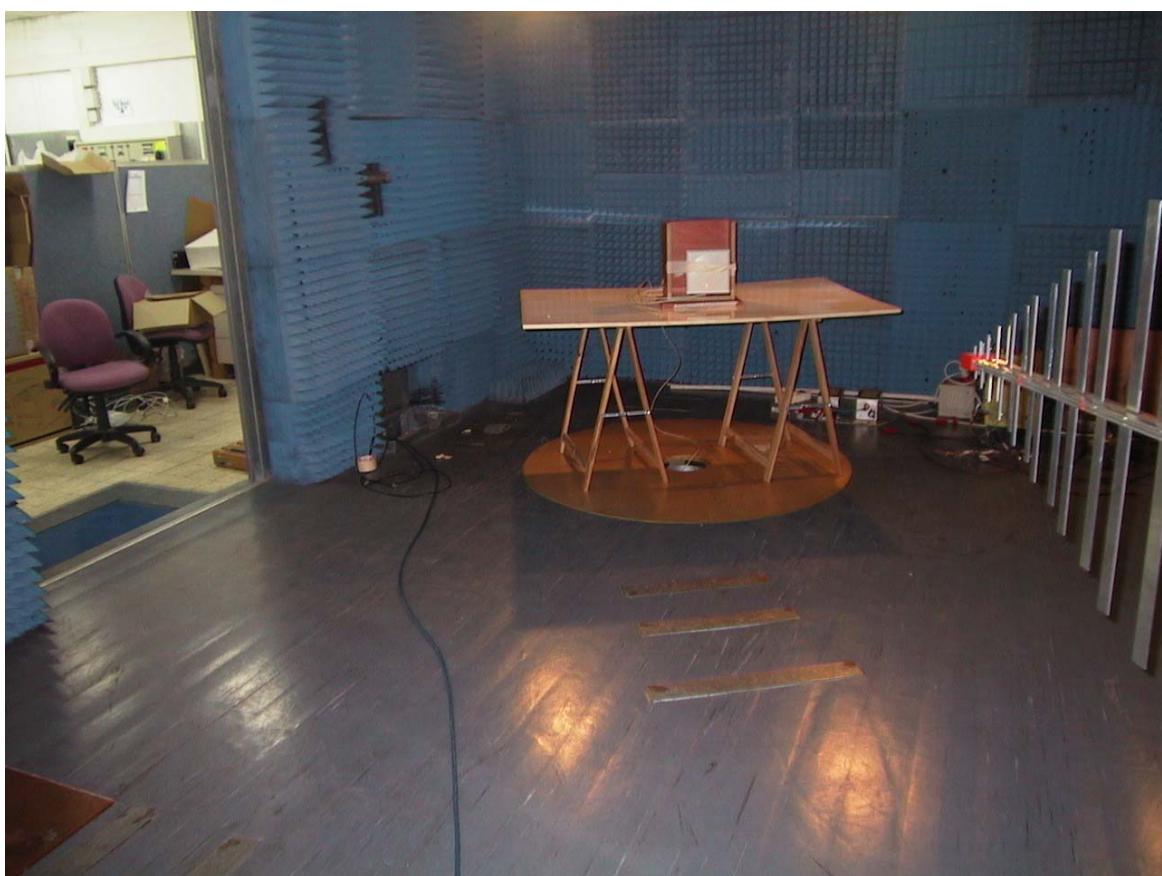

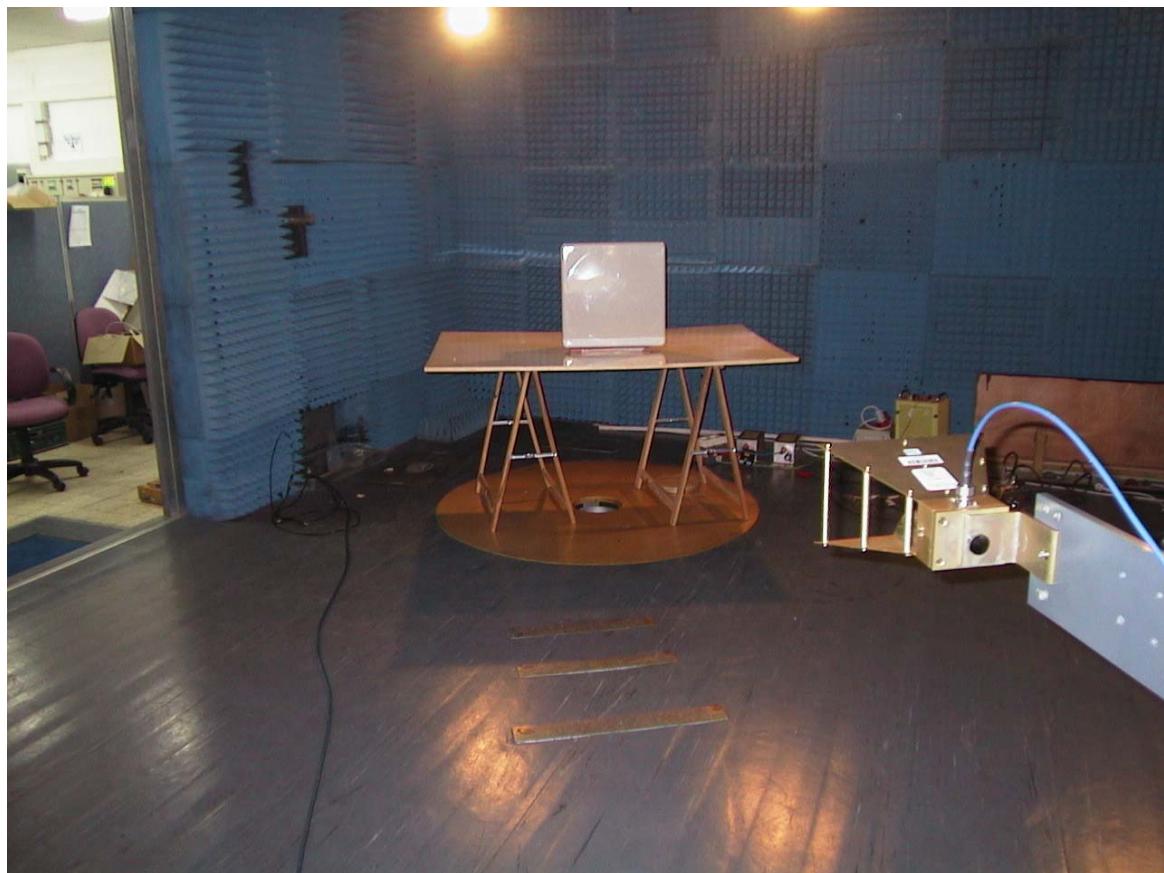

13 CORRECTION FACTORS

Correction Factor for **line impedance stabilization network** model DC-AC-20A-01

Frequency (KHz)	Correction Factor (db)
10	4.4
20	1.6
30	0.8
40	0.4
50	0.3
60	0.25
70	0.15
100	0.1
200	0

DOUBLE RIDGE HORN Model 3105 S/N:00-50C2-1C-C3-3D 2052 Antenna Factor

Frequency (MHz)	Ant. Factor (db/m)
1000	24.4
2000	26.2
3000	30
4000	32.6
5000	33.8
6000	34.9
7000	36.2
8000	36.9
9000	37.8
10000	38.4
11000	39.1
12000	40.1
13000	42
14000	40.6
15000	39.3
16000	40.3

Antenna Factor for broadband antenna model BTA-L S/N:00-50C2-1C-C3-3D 980045L

Frequency (KHz)	Ant. Factor (db/m)	Frequency (KHz)	Ant. Factor (db/m)
30	19.05	300	14.35
32	19.13	310	14.28
34	18.74	320	14.43
36	18.03	330	14.13
38	16.61	340	14.48
40	15.44	350	14.89
45	13.66	360	15.12
50	11.52	370	15.70
55	10.04	380	15.78
60	7.68	390	16.22
65	6.11	400	16.45
70	5.47	425	16.99
75	5.98	450	17.59
80	6.86	475	17.28
85	7.20	500	17.69
90	7.47	525	18.91
95	7.23	550	19.06
100	7.20	575	18.20
105	7.30	600	18.87
110	7.37	625	18.81
115	7.02	650	19.64
120	6.82	675	19.92
125	7.05	700	20.66
130	7.83	725	21.08
135	9.61	750	21.53
140	7.93	775	22.39
145	8.03	800	22.66
150	8.29	825	22.87
160	8.72	850	22.65
170	9.18	875	23.12
180	9.05	900	23.70
190	9.80	925	23.40
200	10.61	950	23.43
210	10.34	975	23.30
220	11.21	1000	24.02
230	11.69		
240	11.62		
250	11.85		
260	12.45		
270	13.16		
280	13.48		
290	13.74		

14 Abbreviations and Acronyms

The following abbreviations and acronyms are applicable in this document

BW	Bandwidth
Db	Decibel
EMI	Electromagnetic interference
E.U.T	Equipment under test
LISN	Line impedance stabilization network
RBW	Resolution band width
S/N	Serial number
VBW	Video bandwidth

a.