

**Nemko-CCL, Inc.**  
1940 West Alexander Street  
Salt Lake City, UT 84119  
801-972-6146

## Test Report

Certification

Test Of:  
CR2611\_01 and CR2612\_01

FCC ID: QQ6-BTR11

Test Specification:

FCC PART 15, Subpart C

Test Report Serial No: 212321-5.4

Applicant:  
Code Corporation  
14870 South Pony Express Rd., Suite 200  
Bluffdale, UT 84065

Dates of Test: June 25, 26 & 28, 2012

Original Report Issue Date: August 22, 2012

Report Re-Issue Date: November 26, 2012

Accredited Testing Laboratory By:



NVLAP Lab Code 100272-0

## CERTIFICATION OF ENGINEERING REPORT

This report has been prepared by Nemko-CCL, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant:                   Code Corporation
- Manufacturer:               Technocom Systems Sdn. Bhd.
- Brand Name:                 Code
- Model Number:               CR2611\_01 and CR2612\_01
- FCC ID Number:             QQ6-BTR11


On this 26<sup>th</sup> day of November 2012, I, individually and for Nemko-CCL, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has recognized that the Nemko-CCL, Inc. EMC testing facilities are in good standing, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Nemko-CCL, Inc.



Tested by: Norman P. Hansen  
Test Technician



Reviewed by: Thomas C. Jackson  
General Manager

**TABLE OF CONTENTS**

	<b>PAGE</b>
<b><u>SECTION 1.0 CLIENT INFORMATION</u></b> .....	<b>4</b>
<b><u>SECTION 2.0 EQUIPMENT UNDER TEST (EUT)</u></b> .....	<b>5</b>
<b><u>SECTION 3.0 TEST SPECIFICATION, METHODS &amp; PROCEDURES</u></b> .....	<b>9</b>
<b><u>SECTION 4.0 OPERATION OF EUT DURING TESTING</u></b> .....	<b>15</b>
<b><u>SECTION 5.0 SUMMARY OF TEST RESULTS</u></b> .....	<b>16</b>
<b><u>SECTION 6.0 MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS</u></b> .....	<b>17</b>
<b><u>APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT</u></b> .....	<b>36</b>
<b><u>APPENDIX 2 PHOTOGRAPHS</u></b> .....	<b>42</b>

## **SECTION 1.0 CLIENT INFORMATION**

### **1.1 Applicant:**

Company Name: Code Corporation  
14870 South Pony Express Rd., Suite 200  
Bluffdale, UT 84065

Contact Name: Ryan Hoobler  
Title: Director of Engineering

### **1.2 Manufacturer:**

Company Name: Technocom Systems Sdn. Bhd.  
NO. 2, Jalan Kempas  
5/2, Tampoli 81200  
Johor Bahru, Johor


Contact Name: TS Wong  
Title: Program Manager

**SECTION 2.0 EQUIPMENT UNDER TEST (EUT)****2.1 Identification of EUT:**


Brand Name: Code Corporation  
 Model Number: CR2611\_01 and CR2612\_01  
 Serial Number: Engineering Unit  
 Dimensions: 12.7 cm x 5.08 cm x 1.9 cm, handle/trigger extends 10.8 cm  
 Country of Manufacture: Malaysia

**2.2 Description of EUT:**

The CR2611\_01 and CR2612\_01 are handheld barcode scanners. The CR2611\_01 is a handheld scanner with a button on top for scanning. The CR2612\_01 is identical except it has a handle with a trigger. Both units are powered by a CRA-B5\_01 3.7 volt, 1300 mAH battery. The battery is recharged by inserting the CR2611\_01 or CR2612\_01 into a CRA-A104 or CRA-105 charging base. A Bluetooth transceiver is incorporated to transfer scan data to a host system. The Bluetooth transceiver uses 79 channels in the 2400 to 2483.5 MHz frequency band. The antenna is an Antenova A5839, 2.1 dBi chip antenna. Plots of the channels are shown below.

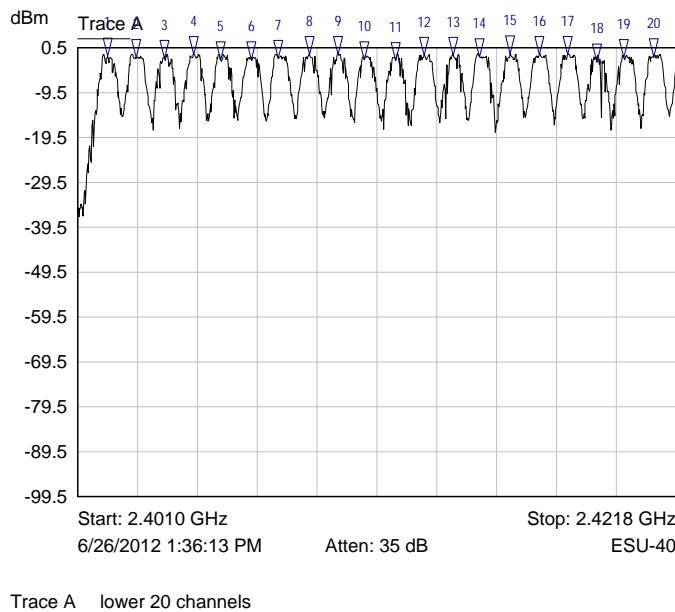


Mkr	Trace	X-Axis	Value
1 ▽	Trace A	2.4020 GHz	-1.33 dBm
2 ▽	Trace A	2.4030 GHz	-1.72 dBm
3 ▽	Trace A	2.4040 GHz	-1.78 dBm
4 ▽	Trace A	2.4050 GHz	-0.98 dBm
5 ▽	Trace A	2.4060 GHz	-2.11 dBm
6 ▽	Trace A	2.4070 GHz	-2.14 dBm
7 ▽	Trace A	2.4080 GHz	-1.77 dBm
8 ▽	Trace A	2.4090 GHz	-0.98 dBm
9 ▽	Trace A	2.4100 GHz	-0.95 dBm
10 ▽	Trace A	2.4110 GHz	-2.12 dBm
11 ▽	Trace A	2.4120 GHz	-2.26 dBm
12 ▽	Trace A	2.4130 GHz	-1.24 dBm
13 ▽	Trace A	2.4140 GHz	-1.12 dBm
14 ▽	Trace A	2.4150 GHz	-1.55 dBm
15 ▽	Trace A	2.4160 GHz	-0.91 dBm
16 ▽	Trace A	2.4170 GHz	-1.03 dBm
17 ▽	Trace A	2.4180 GHz	-1.01 dBm
18 ▽	Trace A	2.4190 GHz	-2.62 dBm
19 ▽	Trace A	2.4200 GHz	-1.66 dBm
20 ▽	Trace A	2.4210 GHz	-1.57 dBm

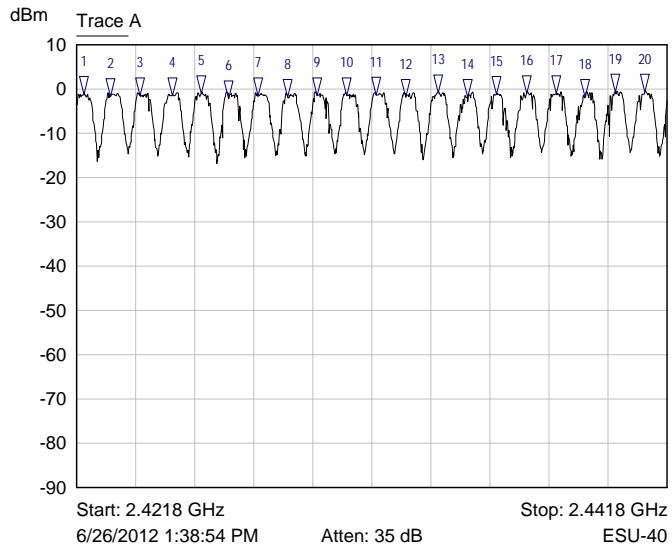


Trace A middle lower 20 channels

Mkr	Trace	X-Axis	Value
1	Trace A	2.4220 GHz	-1.16 dBm
2	Trace A	2.4230 GHz	-1.61 dBm
3	Trace A	2.4240 GHz	-1.57 dBm
4	Trace A	2.4250 GHz	-1.42 dBm
5	Trace A	2.4260 GHz	-0.94 dBm
6	Trace A	2.4270 GHz	-2.19 dBm
7	Trace A	2.4280 GHz	-1.47 dBm
8	Trace A	2.4290 GHz	-1.83 dBm
9	Trace A	2.4300 GHz	-1.53 dBm
10	Trace A	2.4310 GHz	-1.46 dBm
11	Trace A	2.4320 GHz	-1.31 dBm
12	Trace A	2.4330 GHz	-1.76 dBm
13	Trace A	2.4340 GHz	-0.78 dBm
14	Trace A	2.4350 GHz	-1.77 dBm
15	Trace A	2.4360 GHz	-1.18 dBm
16	Trace A	2.4370 GHz	-0.97 dBm
17	Trace A	2.4380 GHz	-1.01 dBm
18	Trace A	2.4390 GHz	-1.77 dBm
19	Trace A	2.4400 GHz	-0.61 dBm
20	Trace A	2.4410 GHz	-0.64 dBm

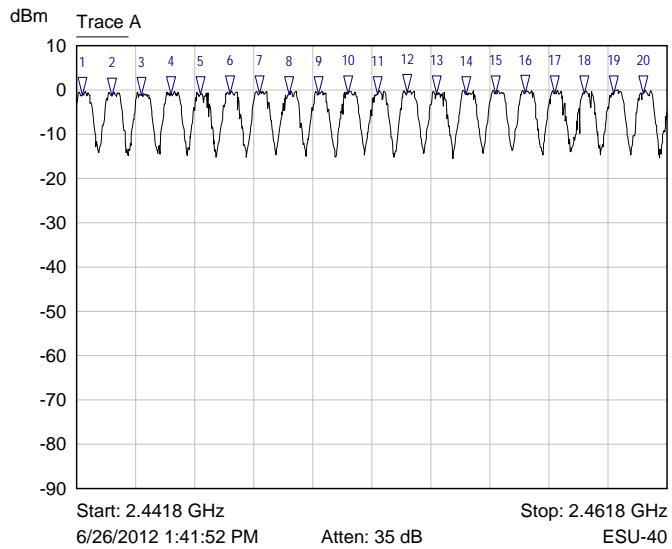

Trace A middle upper 20 channels

Mkr	Trace	X-Axis	Value
1	Trace A	2.4420 GHz	-1.11 dBm
2	Trace A	2.4430 GHz	-1.28 dBm
3	Trace A	2.4440 GHz	-1.17 dBm
4	Trace A	2.4450 GHz	-1.01 dBm
5	Trace A	2.4460 GHz	-1.05 dBm
6	Trace A	2.4470 GHz	-0.82 dBm
7	Trace A	2.4480 GHz	-0.83 dBm
8	Trace A	2.4490 GHz	-0.98 dBm
9	Trace A	2.4500 GHz	-0.94 dBm
10	Trace A	2.4510 GHz	-0.91 dBm
11	Trace A	2.4520 GHz	-0.99 dBm
12	Trace A	2.4530 GHz	-0.49 dBm
13	Trace A	2.4540 GHz	-0.80 dBm
14	Trace A	2.4550 GHz	-0.97 dBm
15	Trace A	2.4560 GHz	-0.79 dBm
16	Trace A	2.4570 GHz	-0.73 dBm
17	Trace A	2.4580 GHz	-0.88 dBm
18	Trace A	2.4590 GHz	-0.85 dBm
19	Trace A	2.4600 GHz	-0.83 dBm
20	Trace A	2.4610 GHz	-0.90 dBm

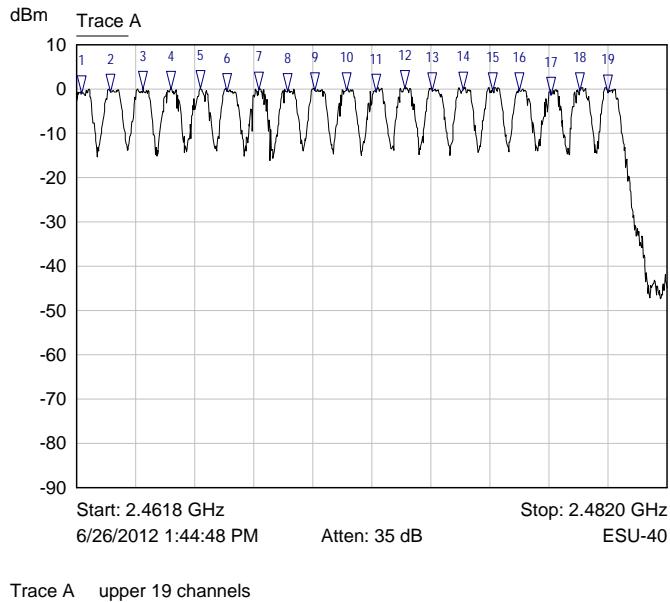

Mkr	Trace	X-Axis	Value
1 ▽	Trace A	2.4620 GHz	-1.06 dBm
2 ▽	Trace A	2.4630 GHz	-0.66 dBm
3 ▽	Trace A	2.4641 GHz	-0.01 dBm
4 ▽	Trace A	2.4650 GHz	-0.02 dBm
5 ▽	Trace A	2.4660 GHz	0.10 dBm
6 ▽	Trace A	2.4670 GHz	-0.46 dBm
7 ▽	Trace A	2.4680 GHz	-0.19 dBm
8 ▽	Trace A	2.4690 GHz	-0.44 dBm
9 ▽	Trace A	2.4700 GHz	-0.34 dBm
10 ▽	Trace A	2.4710 GHz	-0.26 dBm
11 ▽	Trace A	2.4720 GHz	-0.66 dBm
12 ▽	Trace A	2.4730 GHz	0.18 dBm
13 ▽	Trace A	2.4740 GHz	-0.37 dBm
14 ▽	Trace A	2.4750 GHz	-0.22 dBm
15 ▽	Trace A	2.4760 GHz	-0.33 dBm
16 ▽	Trace A	2.4770 GHz	-0.26 dBm
17 ▽	Trace A	2.4780 GHz	-1.39 dBm
18 ▽	Trace A	2.4790 GHz	-0.37 dBm
19 ▽	Trace A	2.4800 GHz	-0.77 dBm

This report covers the circuitry of the devices subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Part 15, Subpart B has been tested to FCC Subpart B and found to comply. Compliance is shown Nemko-CCL report #212321-2.

### **2.3 EUT and Support Equipment:**

The FCC ID numbers for the EUT and support equipment used during the test are listed below:

Brand Name	FCC ID Number	Description	Name of Interface Ports / Interface Cables
Model Number			
Serial No.			
BN: Code MN: CR2611_01 (Note 1) SN: Engineering Unit	QQ6-BTR11	Handheld barcode scanner	See Section 2.4

Brand Name Model Number Serial No.	FCC ID Number	Description	Name of Interface Ports / Interface Cables
BN: Code MN: CR2612_01 (Note 1) SN: Engineering Unit	QQ6-BTR11	Handheld barcode scanner	See Section 2.4
BN: Code MN: CRA-A104 SN: Engineering Unit	QQ6-BTC01	Charging Base	USB/USB cable
BN: Samsung MN: N130 SN: LCM93HS900480X	DoC	Netbook computer	USB/USB cables Ethernet/Cat 5e cable
BN: Microsoft MN: Wheelmouse Optical 1.1A USB	DoC	Mouse	USB/USB cable (Note 3)

Note: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

(3) Cable permanently attached and includes manufacturer molded on ferrite

The support equipment listed above was not modified in order to achieve compliance with this standard.

#### **2.4 Interface Ports on EUT:**

Name of Ports	No. of Ports Fitted to EUT	Cable Descriptions/Length
Interface/charger	1	No cable/Direct connection to charging base

#### **2.5 Modification Incorporated/Special Accessories on EUT:**

There were no modifications or special accessories required to comply with the specification.

**SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES****3.1 Test Specification:**

Title: FCC PART 15, Subpart C (47 CFR 15)  
15.203, 15.207, and 15.247

Limits and methods of measurement of radio interference characteristics of radio frequency devices

Purpose of Test: The tests were performed to demonstrate initial compliance

**3.2 Methods & Procedures:****3.2.1 §15.203 Antenna Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

**3.2.2 §15.207 Conducted Limits**

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5*	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	60	50

\*Decreases with the logarithm of the frequency.

### **3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz**

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any

channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

(2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of  $10 \log$  (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient

evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the

transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

### **3.3 Test Procedure**

The conducted disturbance at mains ports and radiated disturbance testing was performed according to the procedures in ANSI C63.4: 2003 and using the guidance, DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems, dated March 30, 2000. Testing was performed at Nemko-CCL, Inc. Wanship open area test site #2, located at 29145 Old Lincoln Highway, Wanship, UT. This site has been registered with the FCC, and was renewed February 15, 2012 (90504). This registration is valid for three years.

Nemko-CCL, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2013.

## **SECTION 4.0 OPERATION OF EUT DURING TESTING**

### **4.1 Operating Environment:**

Power Supply: 3.7 VDC from CRA-B5\_01 battery or 5 VDC from CRA-A104 charging base

### **4.2 Operating Modes:**

The transmitter was tested while in a constant transmit mode at the maximum power setting (setting = 63) at the desired frequency, using either the upper, middle, or lower channel. Tests, when required, were made with the EUT hopping between channels. The AC mains voltage to the CRA-B5 charging base was varied as required by §15.31(e) with no change seen in the voltage supplied to the transmitter or in transmitter characteristics. Fully charged batteries were used for testing with the EUT powered by batteries. The worst-case emissions were seen with the CR2612 placed horizontally on the EUT table. See Appendix 1 Photograph 2.

### **4.3 EUT Exercise Software:**

Code Corporation and BlueCore test software was used to exercise the transmitter.

**SECTION 5.0 SUMMARY OF TEST RESULTS****5.1 FCC Part 15, Subpart C****5.1.1 Summary of Tests:**

Section	Environmental Phenomena	Frequency Range (MHz)	Result
15.203	Antenna Requirements	Structural requirement	Complied
15.207	Conducted Disturbance at Mains Ports	0.15 to 30	Complied
15.247(a)	Channel Separation	2400 to 2483.5	Complied
15.247(a)	20 dB Bandwidth	2400 to 2483.5	Complied
15.247(a)	Time of Occupancy	2400 to 2483.5	Complied
15.247(b)	Peak Output Power	2400 to 2483.5	Complied
15.247(c)	Operation with Antennas with Directional Gains >6 dBi	N/A	Not Applicable
15.247(d)	Spurious Emissions	2.4 to 2483.5	Complied
15.247(e)	Peak Power Spectral Density	2400 to 2483.5	Not Applicable
15.247(f)	Hybrid System Requirements	N/A	Not Applicable
15.247(g)	Channel Usage	2400 to 2483.5	Complied (Note 1)
15.247(h)	Channel Intelligence/Avoidance	2400 to 2483.5	Complied (Note 1)
15.247(i)	RF Safety	2400 to 2483.5	Complied (Note 1)

Note 1: Compliance with these requirements is shown in documents filed with the FCC at the time of Certification.

**5.2 Result**

In the configuration tested, the EUT complied with the requirements of the specification.

**SECTION 6.0 MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS****6.1 General Comments:**

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Appendix 1 of this report.

**6.2 Test Results:****6.2.1 §15.203 Antenna Requirements**

The EUT uses an Antenova A5839 chip antenna that is soldered to the PCB.

**6.2.2 §15.207 Conducted Disturbance at the AC Mains Ports**

Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
0.17	Hot Lead	Peak (Note 1)	51.1	54.8	-3.7
0.43	Hot Lead	Peak (Note 1)	36.0	52.2	-16.2
0.53	Hot Lead	Peak (Note 1)	34.4	46.0	-11.6
9.23	Hot Lead	Peak (Note 1)	38.7	50.0	-11.3
9.70	Hot Lead	Peak (Note 1)	39.9	50.0	-10.1
10.60	Hot Lead	Peak (Note 1)	38.1	50.0	-11.9
0.17	Neutral Lead	Peak (Note 1)	51.4	55.0	-3.6
0.50	Neutral Lead	Peak (Note 1)	34.1	46.0	-11.9
2.67	Neutral Lead	Peak (Note 1)	36.9	46.0	-9.1
4.30	Neutral Lead	Peak (Note 1)	35.8	46.0	-10.2
9.58	Neutral Lead	Peak (Note 1)	37.7	50.0	-12.3
10.35	Neutral Lead	Peak (Note 1)	39.8	50.0	-10.2


Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.

**RESULT**

The EUT complied with the specification by 3.6 dB.

**6.2.3 §15.247(a)(1) Channel Separation**

The EUT must have the hopping channel carrier frequencies separated by 25 kHz or the 20 dB bandwidth, whichever is greater. A plot showing a 1.00 MHz channel separation is shown below. The 20 dB bandwidth is 930.0 kHz and is shown in section 6.2.4.

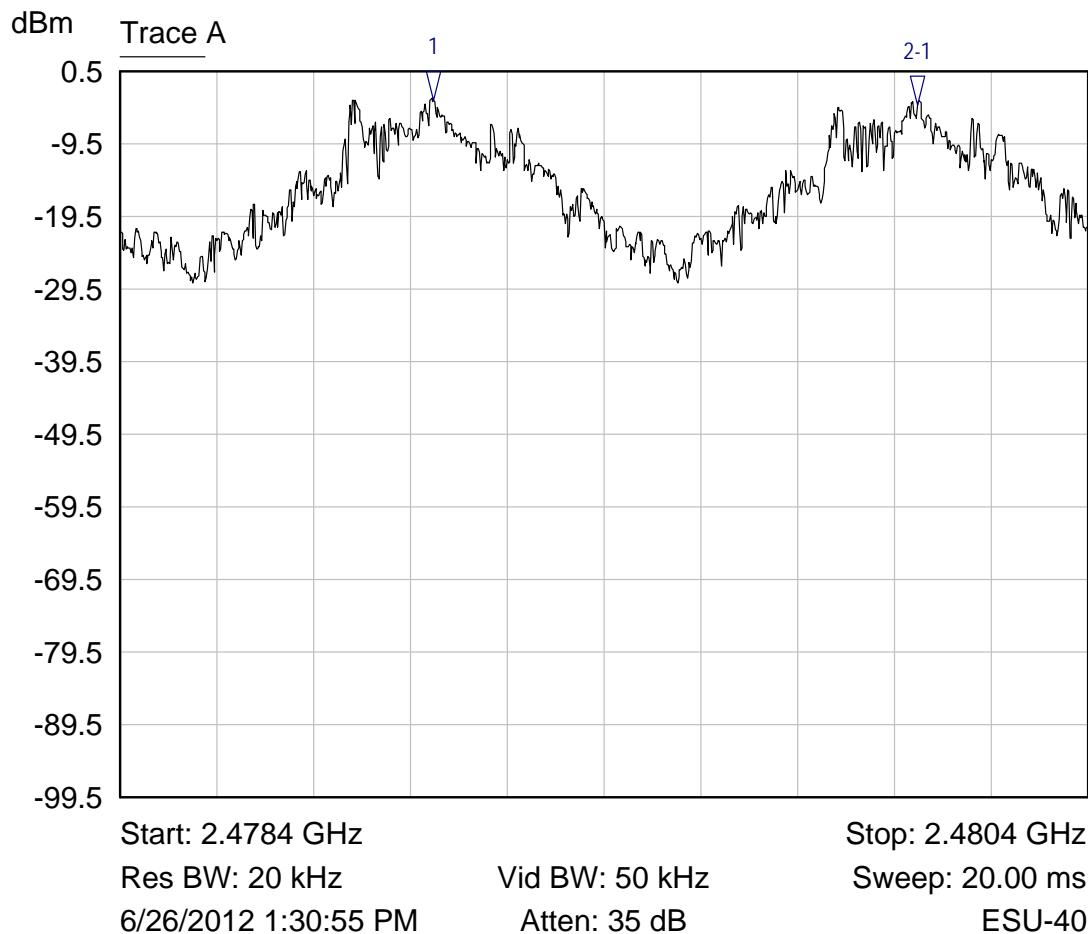

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	2.4790 GHz	-3.52 dBm	
2-1	Trace A	1.0000 MHz	-0.65 dB	

Trace A channel separation

## RESULT


The channel carrier frequency separation is 1.00 MHz, which is greater than the 20 dB bandwidth of 930.0 kHz; therefore, the EUT complies with the specification.

### **6.2.4 §15.247(a)(1)(i) Channel Bandwidth**

The 20 dB bandwidth of the hopping channels is shown in the table and plots below.

Frequency (MHz)	Emission 20 dB bandwidth (kHz)
2402.00	928.0
2439.00	928.0
2480.00	930.0


Lowest Channel Bandwidth

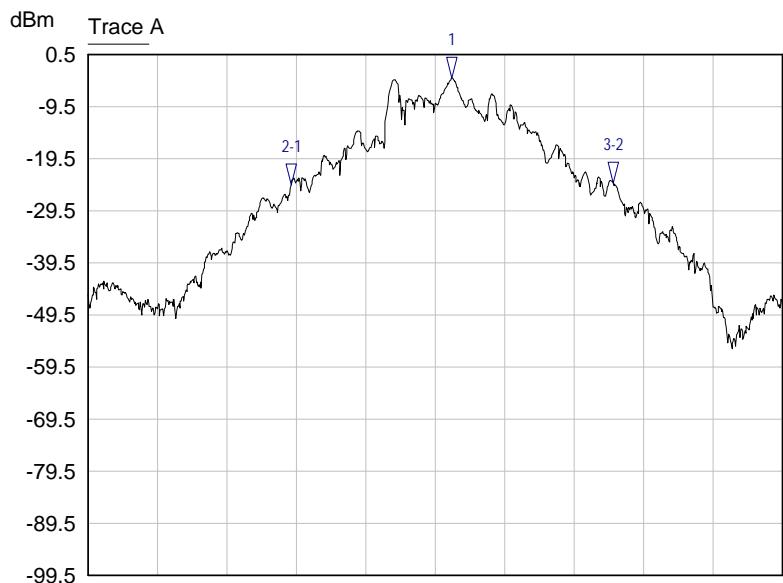

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	2.4020 GHz	-4.01 dBm	
2-1	Trace A	-464.0000 kHz	-20.42 dB	
3-2	Trace A	928.0000 kHz	0.30 dB	

Trace A lower band width

## Middle Channel Bandwidth

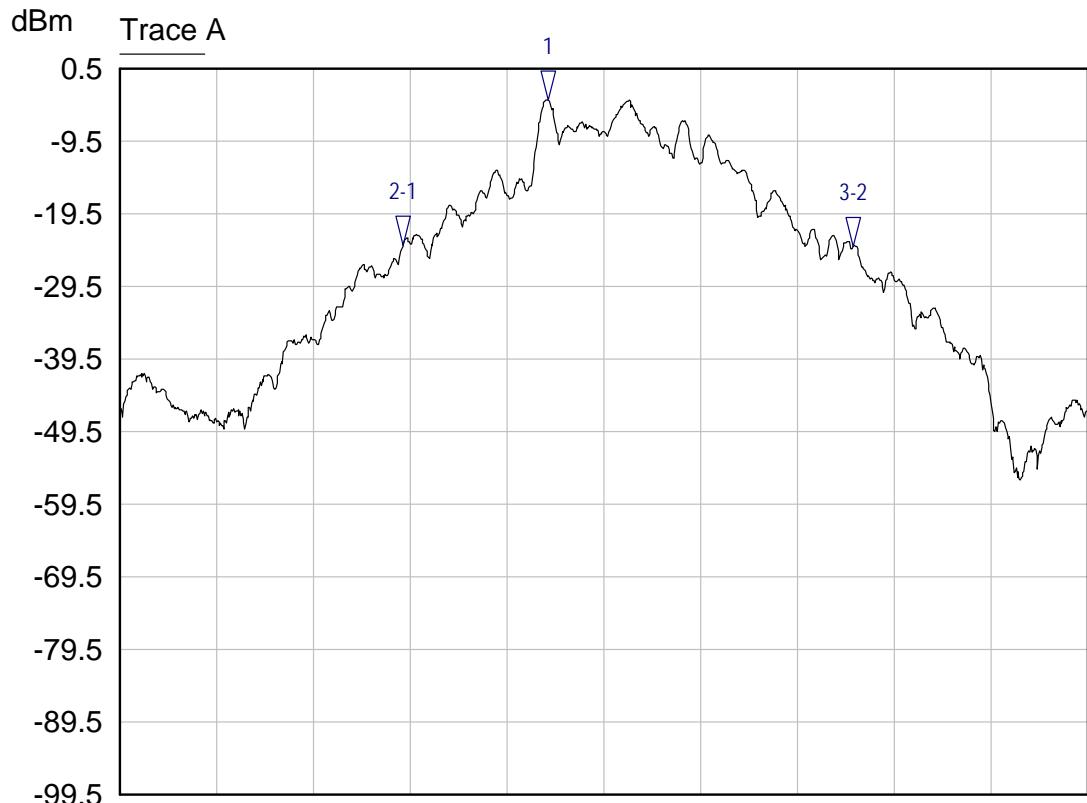

Start: 2.4380 GHz

Stop: 2.4400 GHz

Res BW: 20 kHz

Vid BW: 50 kHz

Sweep: 20.00 ms

6/26/2012 1:10:31 PM


Atten: 35 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	2.4389 GHz	-3.77 dBm	
2-1	Trace A	-298.0000 kHz	-20.12 dB	
3-2	Trace A	928.0000 kHz	-0.09 dB	

Trace A Middle bandwidth

## Upper Channel Bandwidth

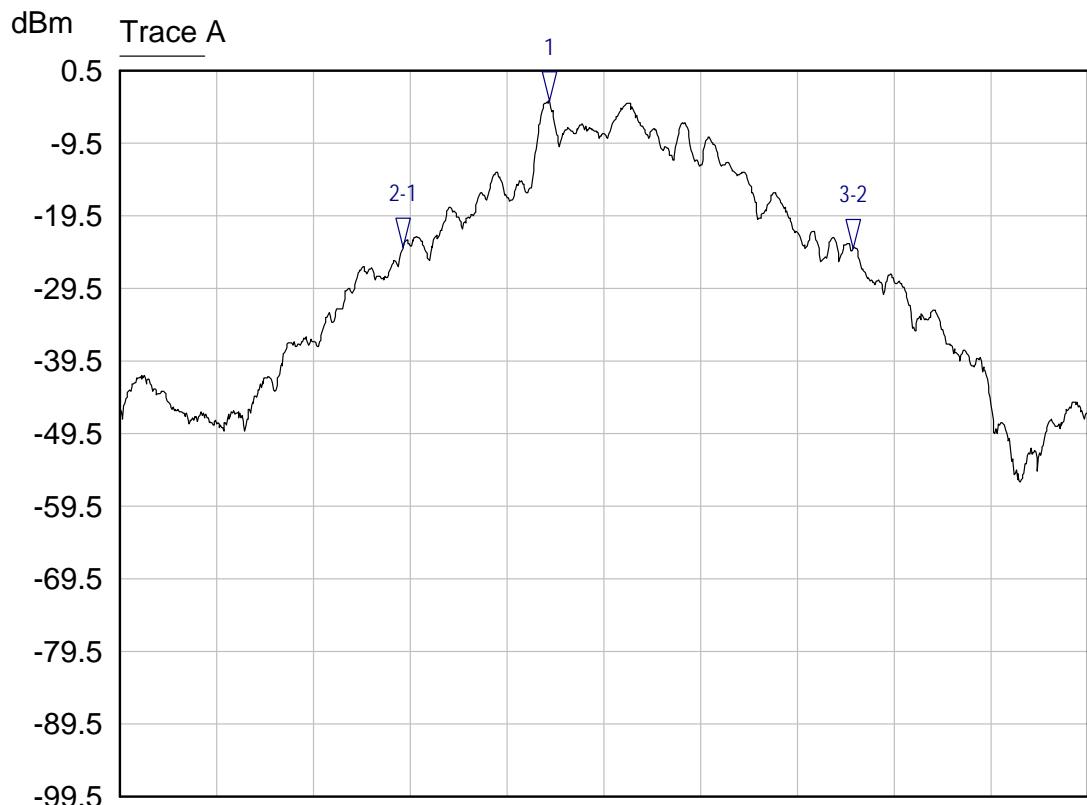

Mkr	Trace	X-Axis	Value	Notes
1	Trace A	2.4799 GHz	-3.66 dBm	
2-1	Trace A	-302.0000 kHz	-20.23 dB	
3-2	Trace A	930.0000 kHz	-0.09 dB	


Trace A Upper bandwidth

**RESULT**


In the configuration tested, the channel separation was greater than the emission bandwidth kHz; therefore, the EUT complied with the requirements of the specification.

### 6.2.5 §15.247(a)(1)(i) Channel Occupancy

The EUT uses 79 channels that have a bandwidth greater than 250 kHz; therefore, the EUT must have an average time of occupancy on any frequency that is not greater than 0.4 seconds in a period of 31.6 seconds ( 0.4 seconds x 79 channels). See the plots and calculations below.

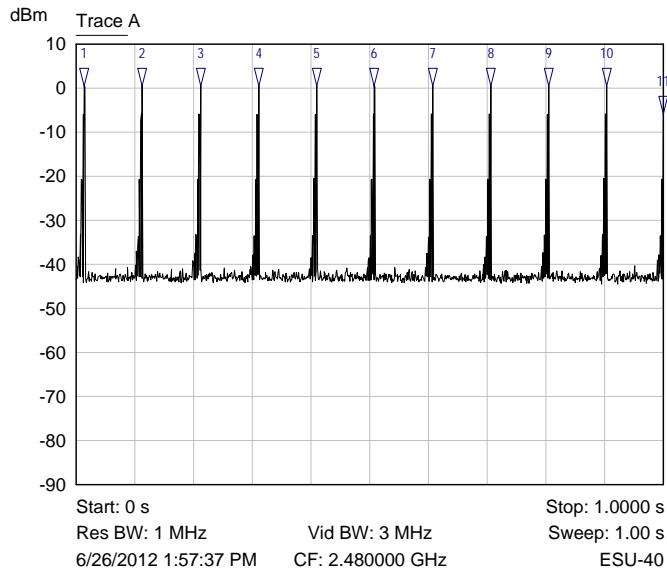

Mkr	Trace	X-Axis	Value
1 ▽	Trace A	14.0000 ms	0.45 dBm
2 ▽	Trace A	113.0000 ms	0.47 dBm
3 ▽	Trace A	212.0000 ms	0.46 dBm
4 ▽	Trace A	311.0000 ms	0.48 dBm
5 ▽	Trace A	410.0000 ms	0.49 dBm
6 ▽	Trace A	508.0000 ms	0.50 dBm
7 ▽	Trace A	607.0000 ms	0.49 dBm
8 ▽	Trace A	706.0000 ms	0.48 dBm
9 ▽	Trace A	805.0000 ms	0.50 dBm
10 ▽	Trace A	904.0000 ms	0.49 dBm
11 ▽	Trace A	1.0000 s	-5.91 dBm

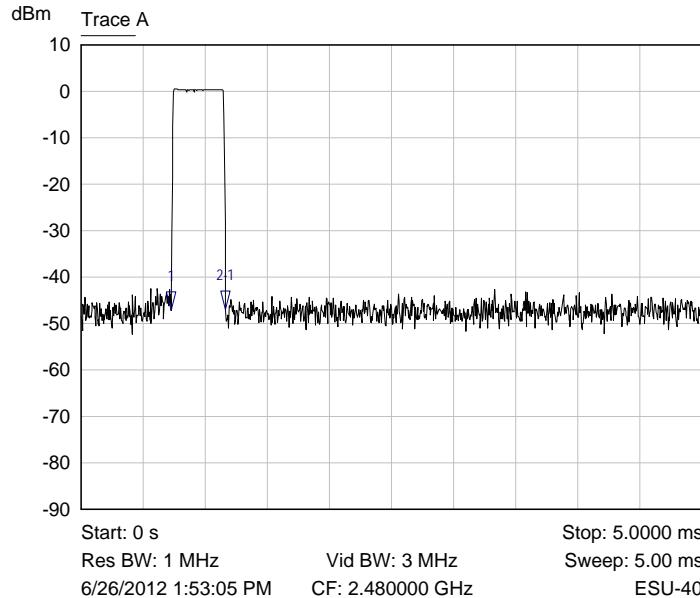

Mkr	Trace	X-Axis	Value
1 ▽	Trace A	725.0000 us	-47.15 dBm
2-1 ▽	Trace A	440.0000 us	0.21 dB

From the plot, the EUT transmits up to 11 times per second for 440  $\mu$ s at each transmission.

Dwell time = 31.6 seconds x 11 hits/second x 440  $\mu$ s = 152.9 ms

## RESULT

The EUT complies with the specification as the EUT transmits on an individual channel for 152.9 milliseconds, less than the 0.4 seconds allowed by the specification.


### **6.2.6 §15.247(b)(2) Peak Output Power**

The antenna used with the EUT has a gain of 2.1 dBi. The EUT uses 79 hopping channels. The limit for this device is 30 dBm or 1 Watt. Plots are shown below and the results of this testing are summarized in the table.

Frequency (MHz)	Measurement (dBm)	Output Power (mW)
2402.0	-0.87	0.82
2439.0	-0.30	0.93
2480.0	0.59	1.15

## Lowest Channel

dBm Trace A

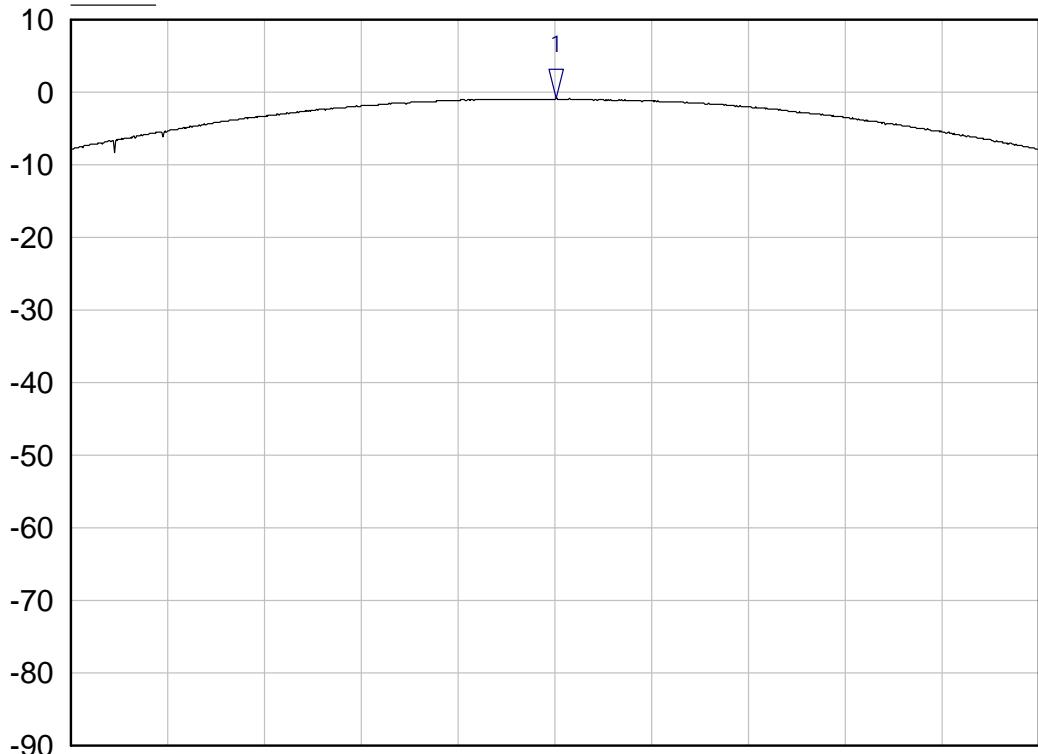

Start: 2.3995 GHz

Stop: 2.4045 GHz

Res BW: 3 MHz

Vid BW: 10 MHz

Sweep: 5.00 ms

6/26/2012 1:19:38 PM


Atten: 35 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4020 GHz	-0.87 dBm	

## Middle Channel

dBm Trace A

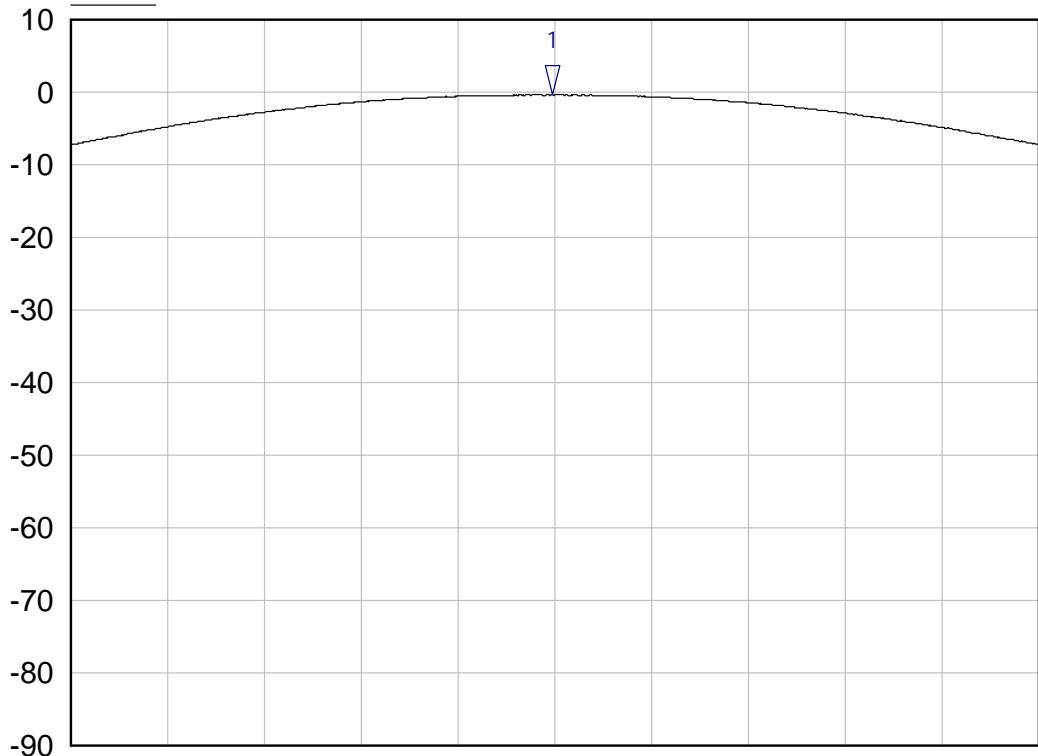

Start: 2.4365 GHz

Stop: 2.4415 GHz

Res BW: 3 MHz

Vid BW: 10 MHz

Sweep: 5.00 ms

6/26/2012 1:13:17 PM


Atten: 35 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4390 GHz	-0.30 dBm	

## Upper Channel

dBm Trace A

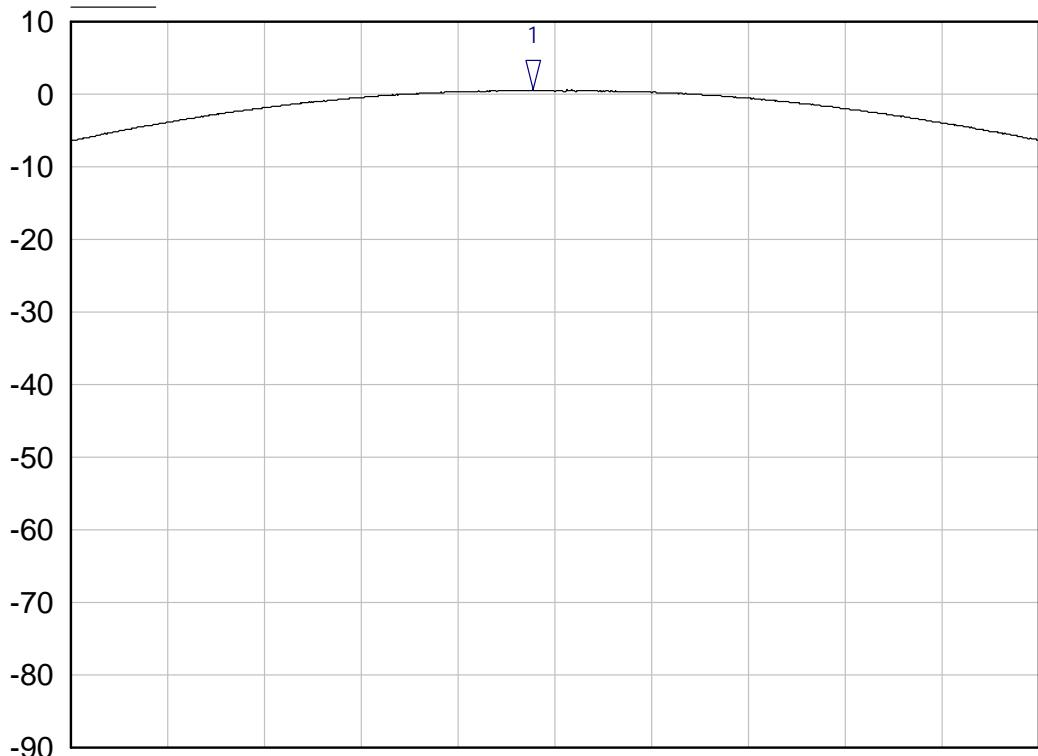

Start: 2.4775 GHz

Stop: 2.4825 GHz

Res BW: 3 MHz

Vid BW: 10 MHz

Sweep: 5.00 ms

6/26/2012 1:03:56 PM

Atten: 35 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1 ▽	Trace A	2.4799 GHz	0.59 dBm	

## RESULT

In the configuration tested, the RF peak output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification.

### **6.2.7 §15.247(d) Spurious Emissions**

#### **6.2.7.1 Conducted Spurious Emissions**

The frequency range from 2.4 MHz to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. Shown below are plots with the EUT tuned to the upper and lower channels. Band edge plots are also shown with the EUT hopping. These plots demonstrate compliance with the provisions of this section at the band edges. The tables show the measurement data from spurious emissions in the restricted bands across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency.

The emissions must be attenuated 20 dB below the highest power level measured within the authorized band as measured with a 100 kHz RBW; the highest level measured was -0.16 dBm; therefore, the criteria is  $-0.16 - 20.0 = -20.16$  dBm.

#### Transmitting on the Lowest Channel (2402 MHz)

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)
4804.0	-63.3	-20.2
7206.0	-71.3	-20.2
9608.0	-68.7	-20.2
12010.0	-71.9	-20.2
14412.0	-71.4	-20.2
16814.0	-71.4	-20.2
19216.0	-70.9	-20.2
21618.0	-69.8	-20.2
24020.0	-68.1	-20.2


## Transmitting on the Middle Channel (2439 MHz)

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)
4878.0	-64.9	-20.2
7317.0	-72.3	-20.2
9756.0	-69.0	-20.2
12195.0	-71.8	-20.2
14634.0	-70.8	-20.2
17073.0	-71.3	-20.2
19512.0	-71.5	-20.2
21951.0	-69.7	-20.2
24390.0	-68.8	-20.2


## Transmitting on the Highest Channel (2480 MHz)

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)
4960.0	-65.9	-20.2
7440.0	-72.6	-20.2
9920.0	-70.2	-20.2
12400.0	-71.9	-20.2
14880.0	-71.2	-20.2
17360.0	-69.6	-20.2
19840.0	-69.5	-20.2
22320.0	-70.9	-20.2
24800.0	-67.8	-20.2


## Lowest Channel Band Edge

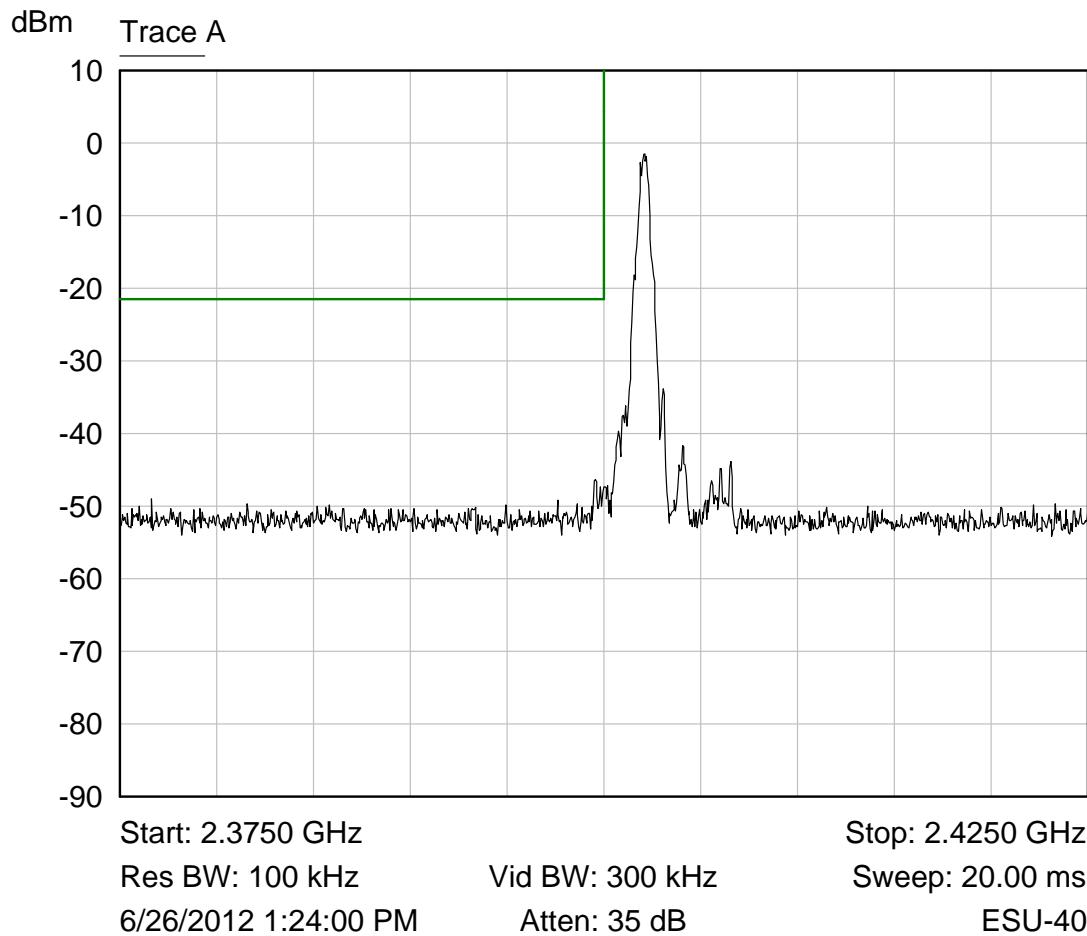

## Highest Channel Band Edge

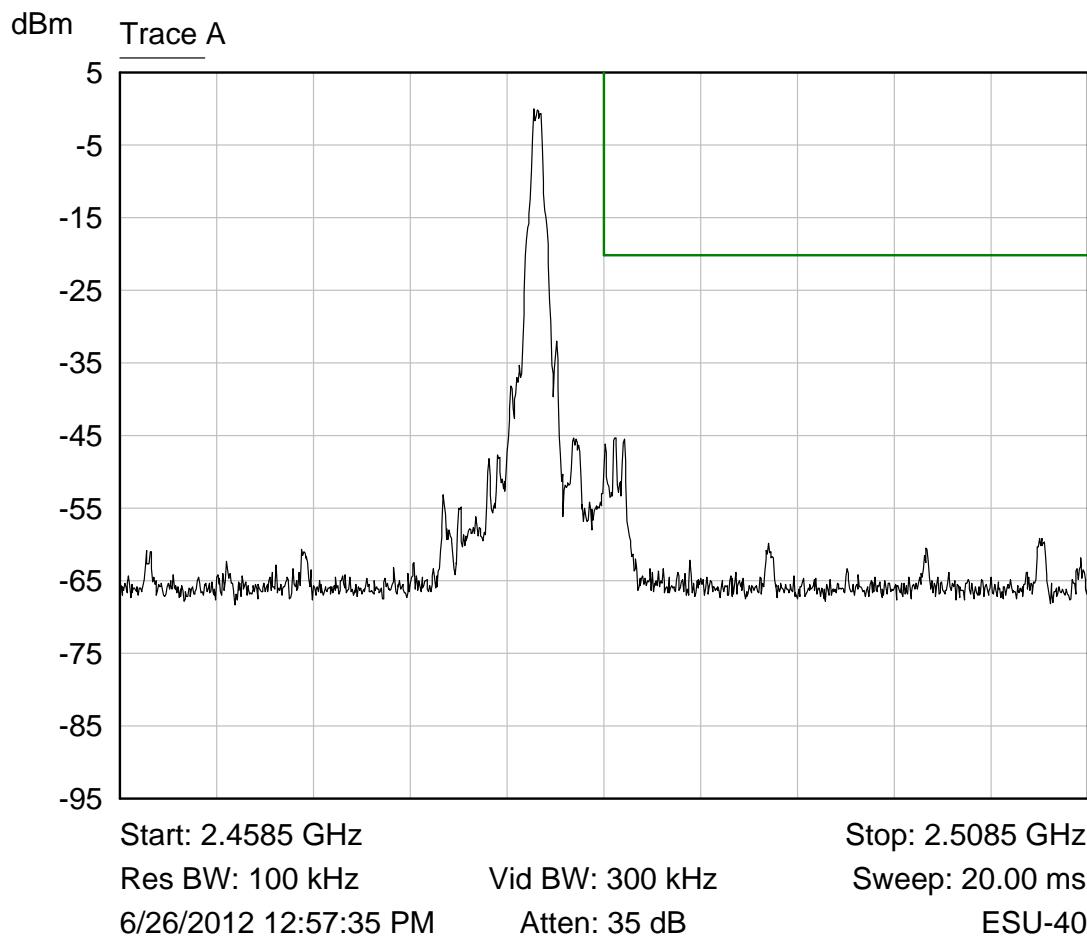

## Operating Band Shown with Hopping Enabled

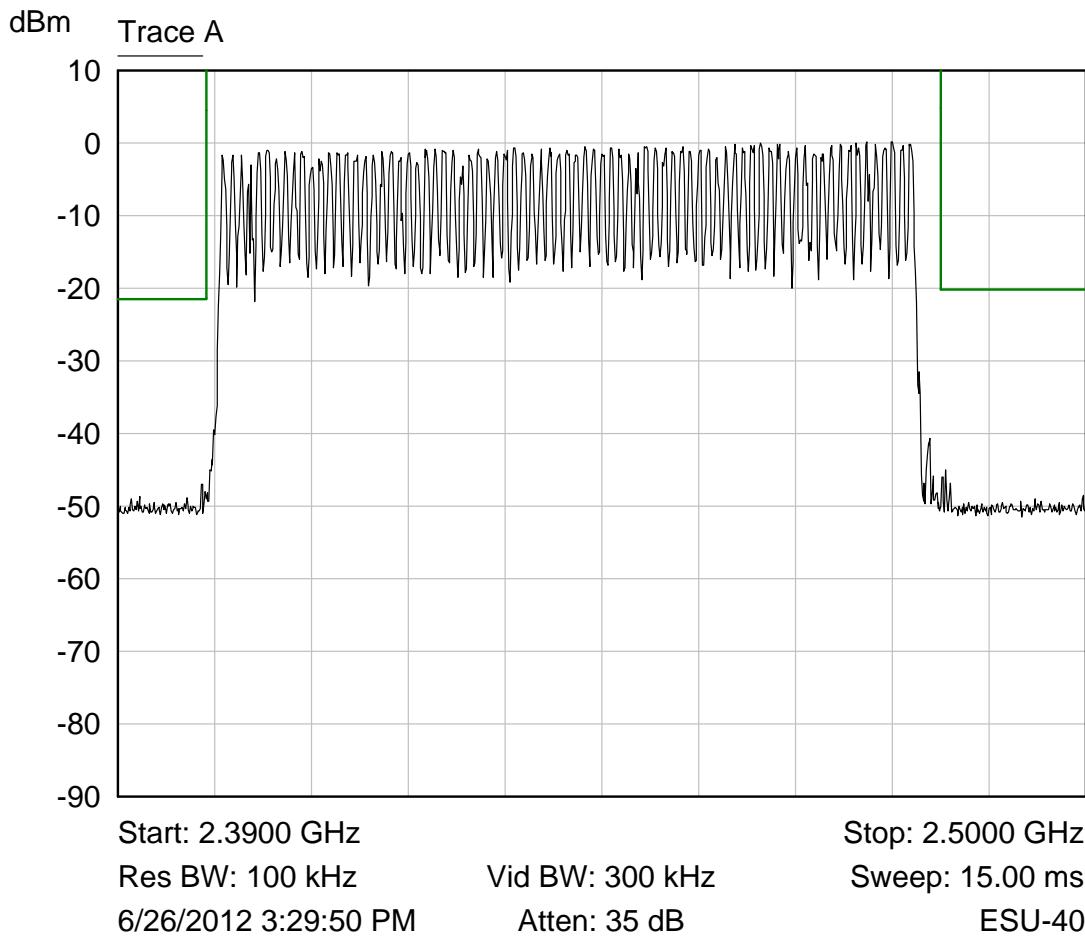

## RESULT

The spurious conducted emissions were attenuated by at least 20 dB and the emissions remain in the allowed band of operation; therefore, the EUT complies with the specification.

### 6.2.5.2 Radiated Emissions

The frequency range from 2.4 MHz to 9280 MHz was investigated to measure any radiated emissions in the restricted bands. Any emissions in the restricted bands must meet the limits specified in §15.209. No averaging factor was applied.

## Transmitting at the Lowest Frequency (2402 MHz)

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4804.0	Peak	Vertical	10.5	37.7	0.0	48.2	74.0	-25.8
4804.0	Average	Vertical	1.5	37.7	0.0	39.2	54.0	-14.8
4804.0	Peak	Horizontal	11.0	37.7	0.0	48.7	74.0	-25.3
4804.0	Average	Horizontal	2.9	37.7	0.0	40.6	54.0	-13.4
7206.0	Peak	Vertical	2.9	42.1	0.0	45.0	74.0	-29.0
7206.0	Average	Vertical	-7.8	42.1	0.0	34.3	54.0	-19.7
7206.0	Peak	Horizontal	2.4	42.1	0.0	44.5	74.0	-29.5
7206.0	Average	Horizontal	-7.9	42.1	0.0	34.2	54.0	-19.8
12010.0	Peak	Vertical	0.8	47.2	0.0	48.0	74.0	-26.0
12010.0	Average	Vertical	-9.5	47.2	0.0	37.7	54.0	-16.3
12010.0	Peak	Horizontal	0.5	47.2	0.0	47.7	74.0	-26.3
12010.0	Average	Horizontal	-9.6	47.2	0.0	37.6	54.0	-16.4

## Transmitting at the Middle Frequency (2439 MHz)

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4878.0	Peak	Vertical	11.6	37.9	0.0	49.5	74.0	-24.5
4878.0	Average	Vertical	5.0	37.9	0.0	42.9	54.0	-11.1
4878.0	Peak	Horizontal	9.5	37.9	0.0	47.4	74.0	-26.6
4878.0	Average	Horizontal	2.6	37.9	0.0	40.5	54.0	-13.5
7317.0	Peak	Vertical	2.1	42.3	0.0	44.4	74.0	-29.6
7317.0	Average	Vertical	-8.2	42.3	0.0	34.1	54.0	-19.9
7317.0	Peak	Horizontal	2.6	42.3	0.0	44.9	74.0	-29.1
7317.0	Average	Horizontal	-7.9	42.3	0.0	34.4	54.0	-19.6
12195.0	Peak	Vertical	1.0	47.1	0.0	48.1	74.0	-25.9


Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
12195.0	Average	Vertical	-9.5	47.1	0.0	37.6	54.0	-16.4
12195.0	Peak	Horizontal	0.5	47.1	0.0	47.6	74.0	-26.4
12195.0	Average	Horizontal	-9.5	47.1	0.0	38.6	54.0	-15.4

Transmitting at the Highest Frequency (2480 MHz)

Frequency (MHz)	Detection Mode	Antenna Polarity	Receiver Reading (dB $\mu$ V)	Correction Factor (dB)	Averaging Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960.0	Peak	Vertical	12.7	38.0	0.0	50.7	74.0	-23.3
4960.0	Average	Vertical	6.7	38.0	0.0	44.7	54.0	-9.3
4960.0	Peak	Horizontal	12.7	38.0	0.0	50.7	74.0	-23.3
4960.0	Average	Horizontal	5.8	38.0	0.0	43.8	54.0	-10.2
7440.0	Peak	Vertical	2.4	42.7	0.0	45.1	74.0	-28.9
7440.0	Average	Vertical	-7.5	42.7	0.0	35.2	54.0	-18.8
7440.0	Peak	Horizontal	2.8	42.7	0.0	45.5	74.0	-28.5
7440.0	Average	Horizontal	-7.5	42.7	0.0	35.2	54.0	-18.8
12400.0	Peak	Vertical	0.6	47.0	0.0	47.6	74.0	-26.4
12400.0	Average	Vertical	-9.8	47.0	0.0	37.2	54.0	-16.8
12400.0	Peak	Horizontal	1.12	47.0	0.0	48.1	74.0	-25.9
12400.0	Average	Horizontal	-9.7	47.0	0.0	37.3	54.0	-16.7


No other emissions were seen in the restricted bands. Noise floor was greater than 6 dB below the limit. At frequencies above 12.5 GHz, a 1 meter measurement distance was used.

## Lower Band Edge

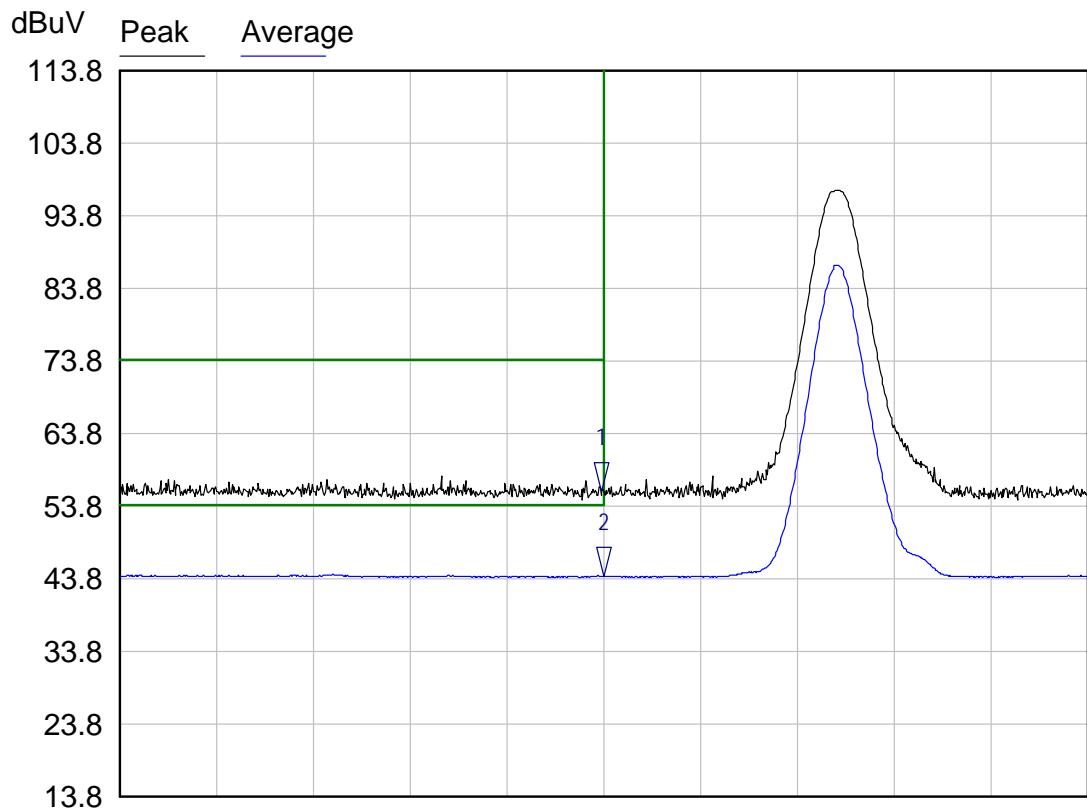

Mkr	Trace	X-Axis	Value	Notes
1	Peak	2.3899 GHz	55.87 dBuV	
2	Average	2.3900 GHz	44.15 dBuV	

## Upper Band Edge

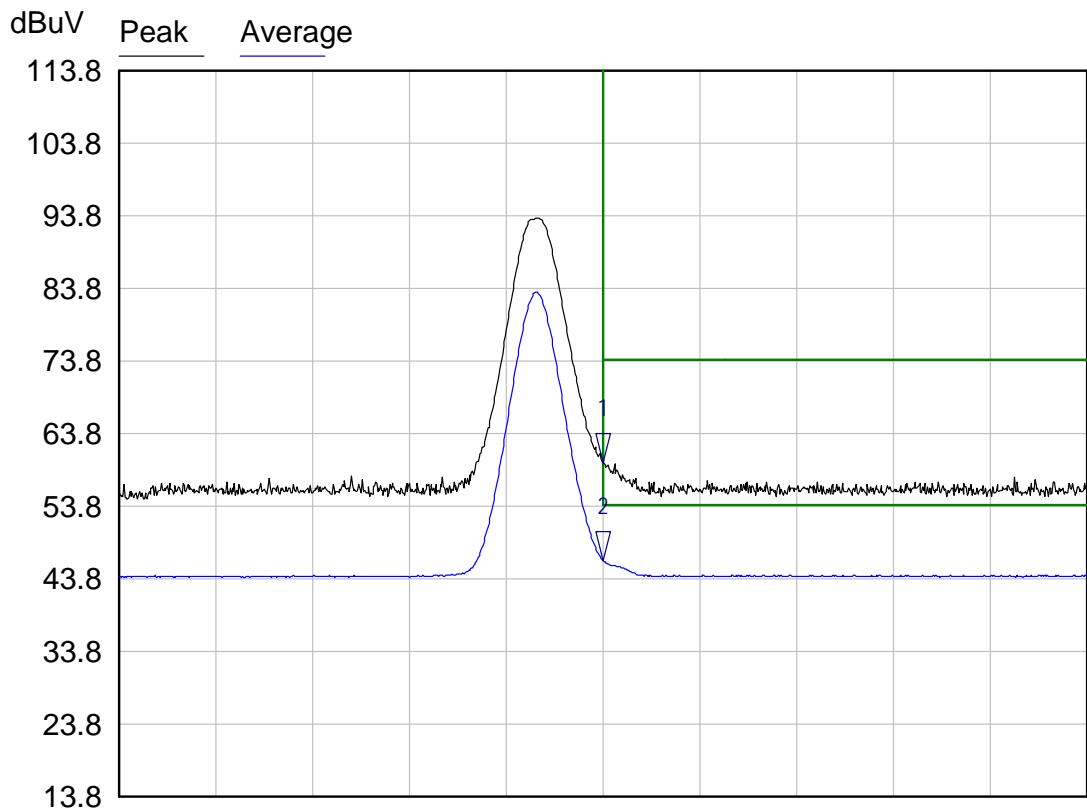

Start: 2.4585 GHz

Stop: 2.5085 GHz

Res BW: 1 MHz

Vid BW: 10 MHz

Sweep: 5.00 s

6/26/2012 9:35:24 AM

Atten: 15 dB

ESU-40

Mkr	Trace	X-Axis	Value	Notes
1	Peak	2.4835 GHz	59.83 dBuV	
2	Average	2.4835 GHz	46.34 dBuV	

**RESULT**

The emissions in the restricted bands met the limits specified in §15.209; therefore, the EUT complies with the specification.

## APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT

### A1.1 §15.207 Conducted Disturbance at the AC Mains

The conducted disturbance at mains ports from the EUT was measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted disturbance at mains ports measurements are performed in a screen room using a (50 Ω/50 μH) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of devices with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- (a) Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- (b) Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- (c) Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- (d) Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- (e) When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.


For AC mains port testing, desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor and placed 40 cm from the vertical coupling plane (copper plating in the wall behind EUT table). Floor standing equipment is placed directly on the earth grounded floor.

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Wanship Open Area Test Site #2	Nemko-CCL, Inc.	N/A	N/A	11/16/2011	11/16/2012
Test Software	Nemko-CCL, Inc.	Conducted Emissions	Revision 1.2	N/A	N/A
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711	01/17/2012	01/17/2013

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Quasi-Peak Detector	Hewlett Packard	85650A	2043A00137	01/18/2012	01/18/2013
LISN	EMCO	3825/2	9305-2099	03/12/2012	03/12/2013
Conductance Cable Wanship Site #2	Nemko-CCL, Inc.	Cable J	N/A	12/14/2011	12/14/2012
Transient Limiter	Hewlett Packard	11947A	3107A02266	12/14/2011	12/14/2012

An independent calibration laboratory or Nemko-CCL Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

## Conducted Emissions Test Setup

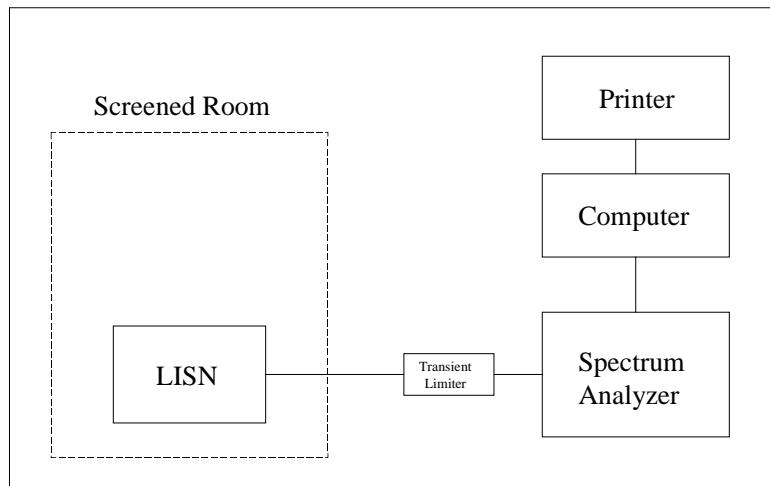

### **A1.2 §15.247 Radiated Measurements**

The radiated emissions from the intentional radiator were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A loop antenna was used to measure emissions below 30 MHz. Emission readings more than 20 dB below the limit at any frequency may not be listed in the reported data. For frequencies between 9 kHz and 30 MHz, or the lowest frequency generated or used in the device greater than 9 kHz, and less than 30 MHz, the spectrum analyzer resolution bandwidth was set to 9 kHz and the video bandwidth was set to 30 kHz. For average measurements, the spectrum analyzer average detector was used.

For frequencies above 30 MHz, an amplifier and preamplifier were used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For peak emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 3 MHz. For average measurements above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the average detector of the analyzer was used.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range of 1 GHz to 18 GHz, and a Pyramidal Horn antenna was used to measure the frequency range of 18 GHz to 25 GHz, at a distance of 3 meters and/or 1 meter from the EUT. The readings obtained by the antenna are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated disturbance. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.


Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emission testing at 30 MHz or above that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Due Date of Calibration
Wanship Open Area Test Site #2	Nemko-CCL, Inc.	N/A	N/A	11/16/2011	11/16/2012
Test Software	Nemko-CCL, Inc.	Radiated Emissions	Revision 1.3	N/A	N/A
Spectrum Analyzer/Receiver	Rhode & Schwarz	1302.6005.40	100064	07/28/2011	07/28/2012
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711	01/17/2012	01/17/2013
Quasi-Peak Detector	Hewlett Packard	85650A	2043A00137	01/18/2012	01/18/2013
Loop Antenna	EMCO	6502	2011	03/11/2011	03/11/2013
Biconilog Antenna	EMCO	3142	9601-1009	04/21/2011	04/21/2013
Double Ridged Guide Antenna	EMCO	3115	9604-4779	03/10/2011	03/10/2013
Pyramidal Standard Gain Horn	EMC Test System	3160-09	0003-1197	04/04/09	ICO
High Frequency Amplifier	Miteq	AFS4-01001800-43-10P-4	1096455	06/26/2012	06/26/2013
6' High Frequency Cable	Microcoax	UFB197C-0-0720-000000	1296	05/14/2012	05/14/2013
20' High Frequency Cable	Microcoax	UFB197C-1-3120-000000	1297	05/14/2012	05/14/2013
3 Meter Radiated Emissions Cable Wanship Site #2	Microcoax	UFB205A-0-4700-000000	1295	05/10/2011	05/10/2013
Pre/Power-Amplifier	Hewlett Packard	8447F	3113A05161	08/27/2012	08/27/2013
6 dB Attenuator	Hewlett Packard	8491A	32835	12/14/2011	12/14/2012

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.


Radiated Emissions Test Setup

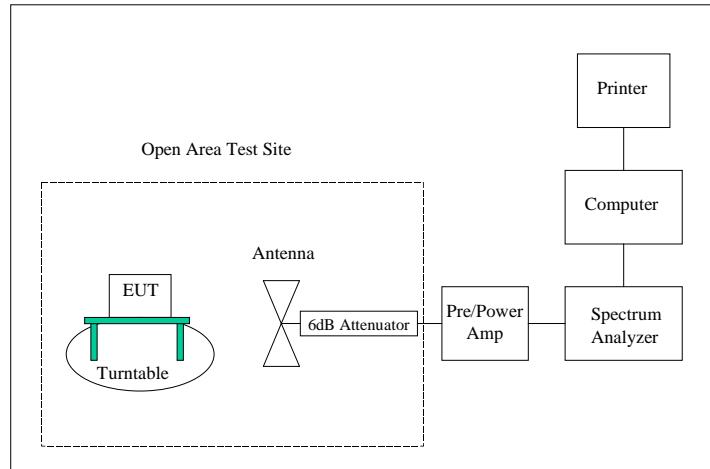

**A1.2 §15.247 Conducted Measurements at the Antenna**

Type of Equipment	Manufacturer	Model Number	Serial Number
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711
Quasi-Peak Detector	Hewlett Packard	85650A	2043A00137
Spectrum Analyzer/Receiver	Rohde & Schwarz	1302.6005.40	100064
Low Loss Cable (1 dB)	N/A	N/A	N/A

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

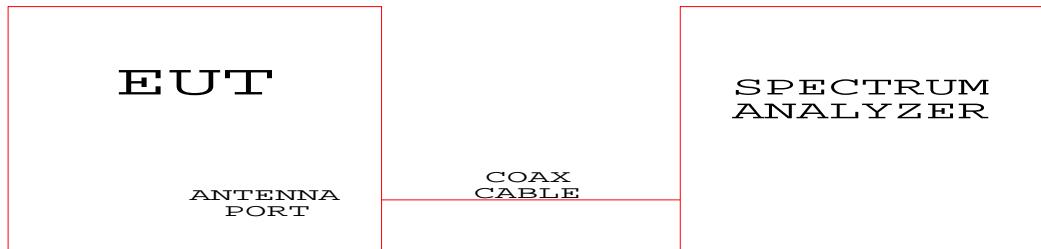**Test Configuration Block Diagram**

**APPENDIX 2 PHOTOGRAPHS**

Photograph 1 – Front View CR2612\_01 Radiated Emissions Setup – Vertical Configuration




Photograph 2 – Front View CR2612\_01 Radiated Emissions Setup – On Side Configuration



Photograph 3 – Front View CR2612\_01 Radiated Emissions Setup – Horizontal Configuration



Photograph 4 – Front View CR2611\_01 Radiated Emissions Setup – Horizontal Configuration

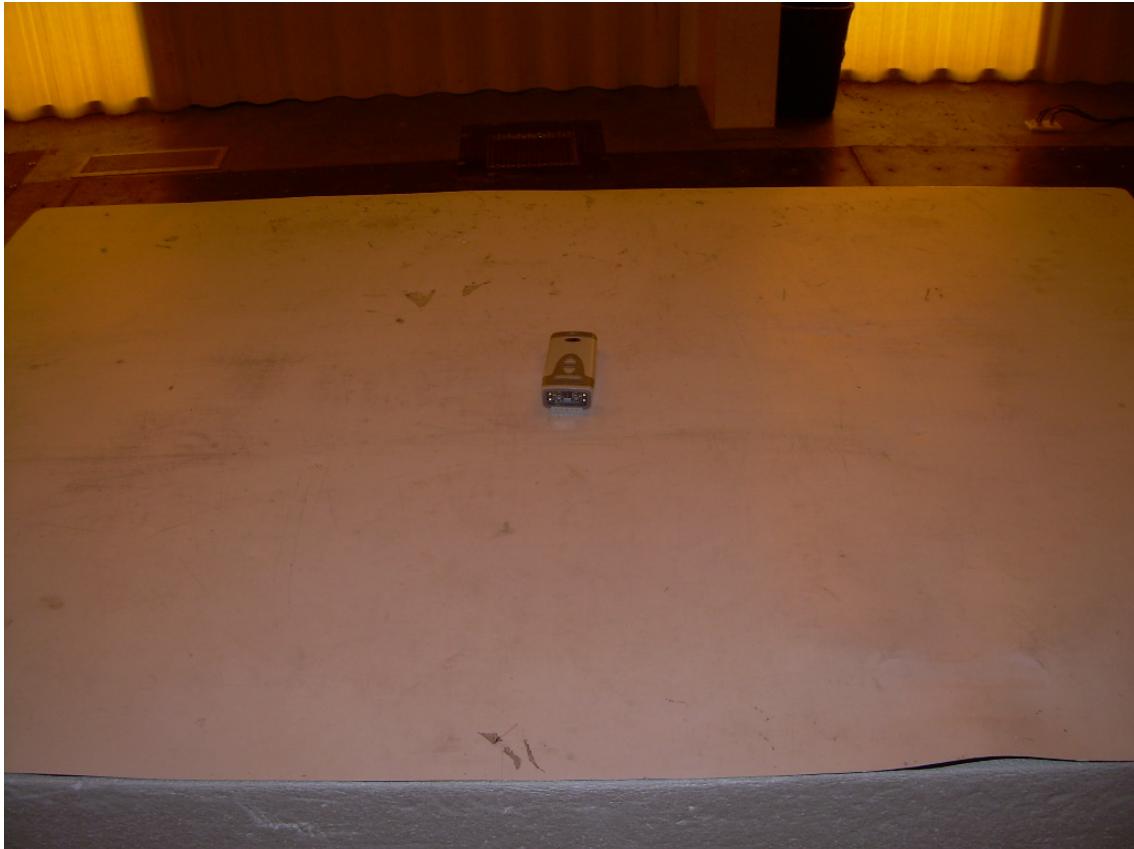


Photograph 5 – Front View CR2611\_01 Radiated Emissions Setup – On Edge Configuration



Photograph 6 – Front View CR2611\_01 Radiated Emissions Setup – Vertical Configuration



Photograph 7 – Front View CR2611\_01 Radiated Emissions Setup – Charging Base Configuration

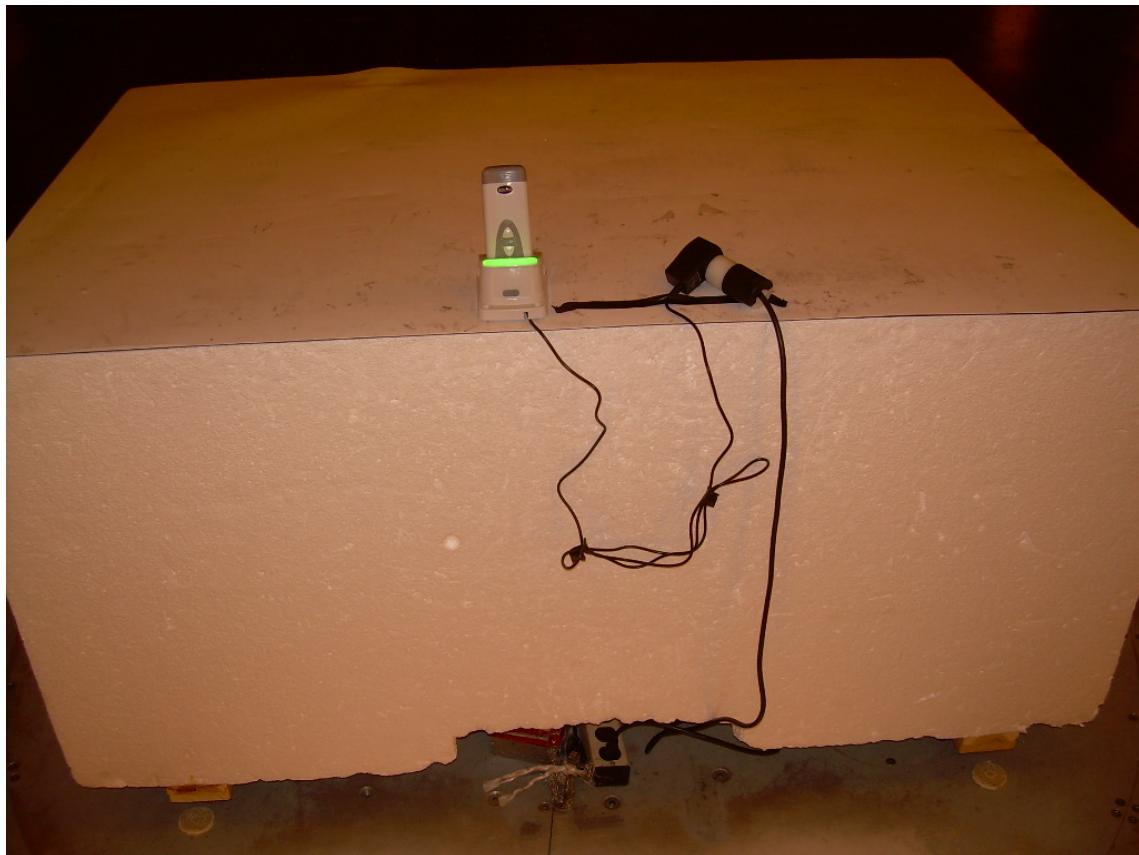

Photograph 8 – Front View Conducted Disturbance Worst Case Configuration



Photograph 9 – Back View Conducted Disturbance Worst Case Configuration



Photograph 10 – Top View of the CR2611\_01



Photograph 11 – Bottom View of the CR2611\_01



Photograph 12 – Front View Front of the CR2611\_01



Photograph 13 – View of the Back of the CR2611\_01 with Battery Removed




Photograph 14 – View of the CR2612\_01




Photograph 15 – View of the Battery




Photograph 16 – View with the Housing Opened Showing PCB Placement

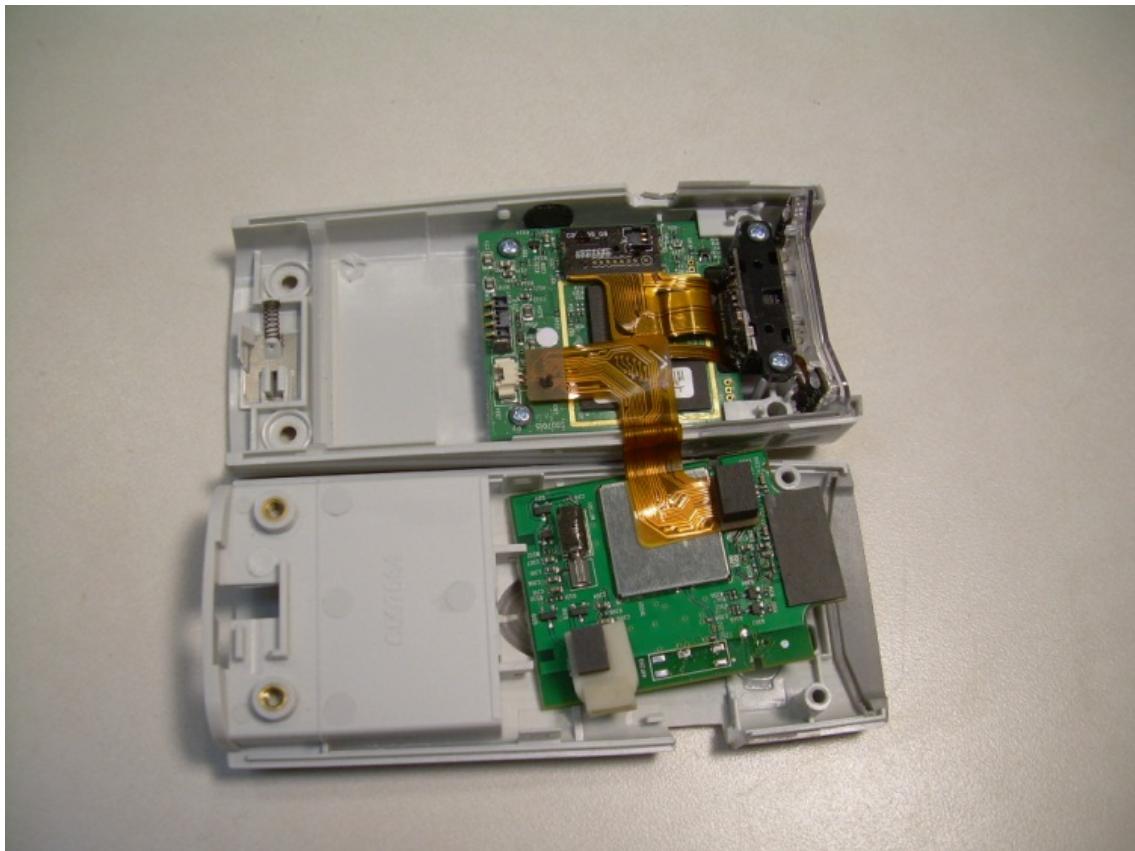

Photograph 17 – Components Removed from Housing

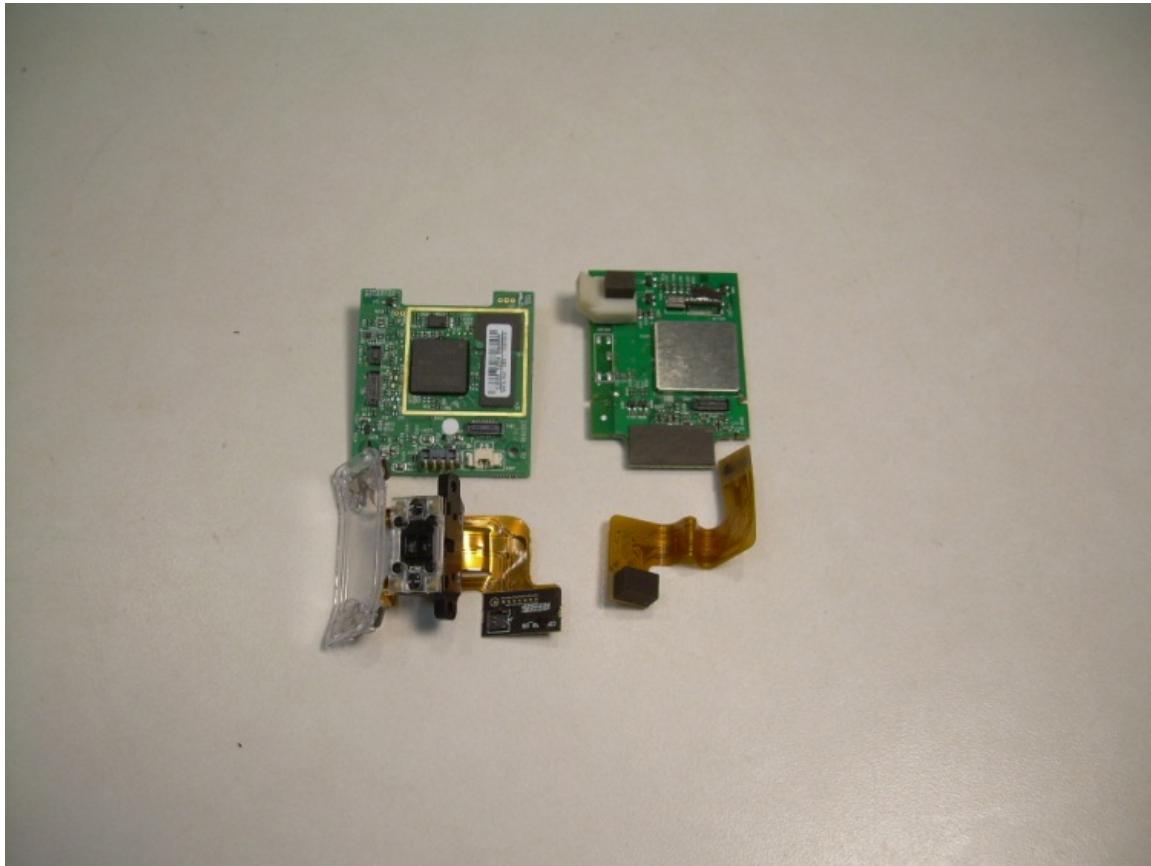

Photograph 18 – View of the Bottom of the Top PCB

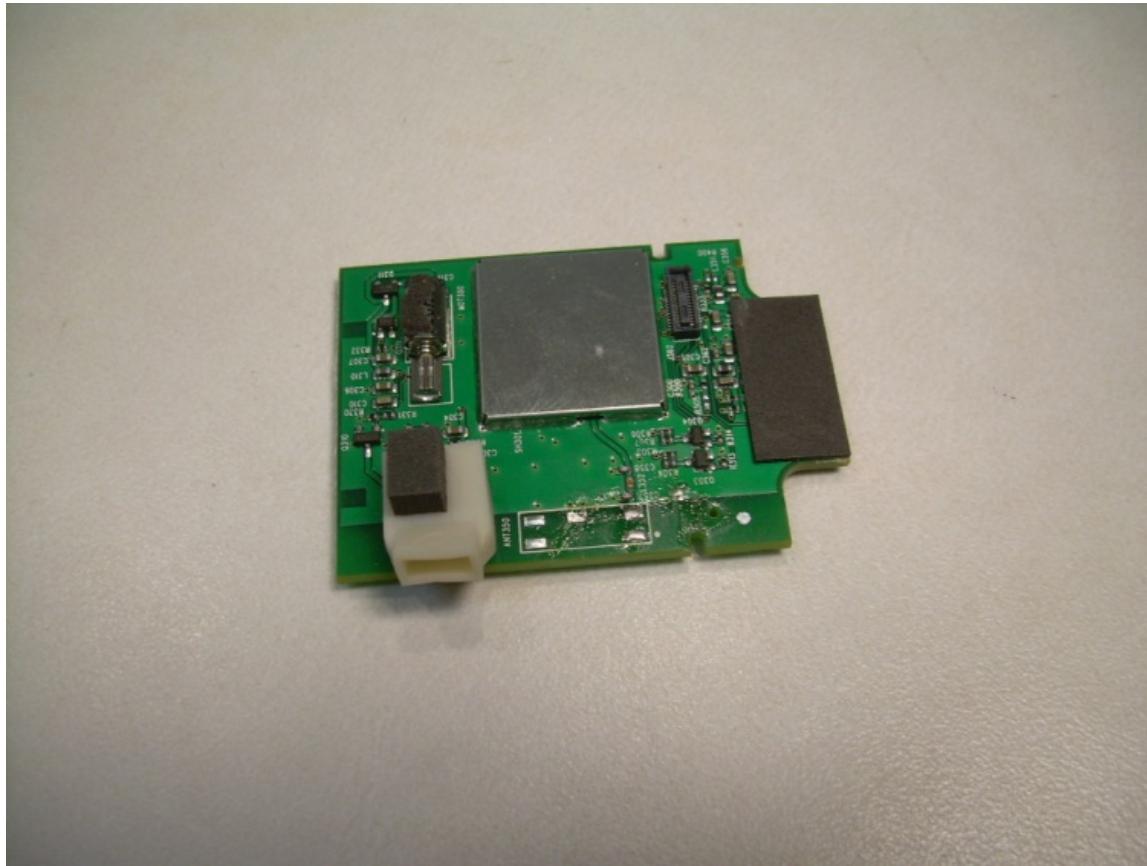


Photograph 19 – View of the Switch Side of the Top PCB




Photograph 20 – View of the Top Side of the Lower PCB



Photograph 21 – View of the Bottom Side of the Lower PCB

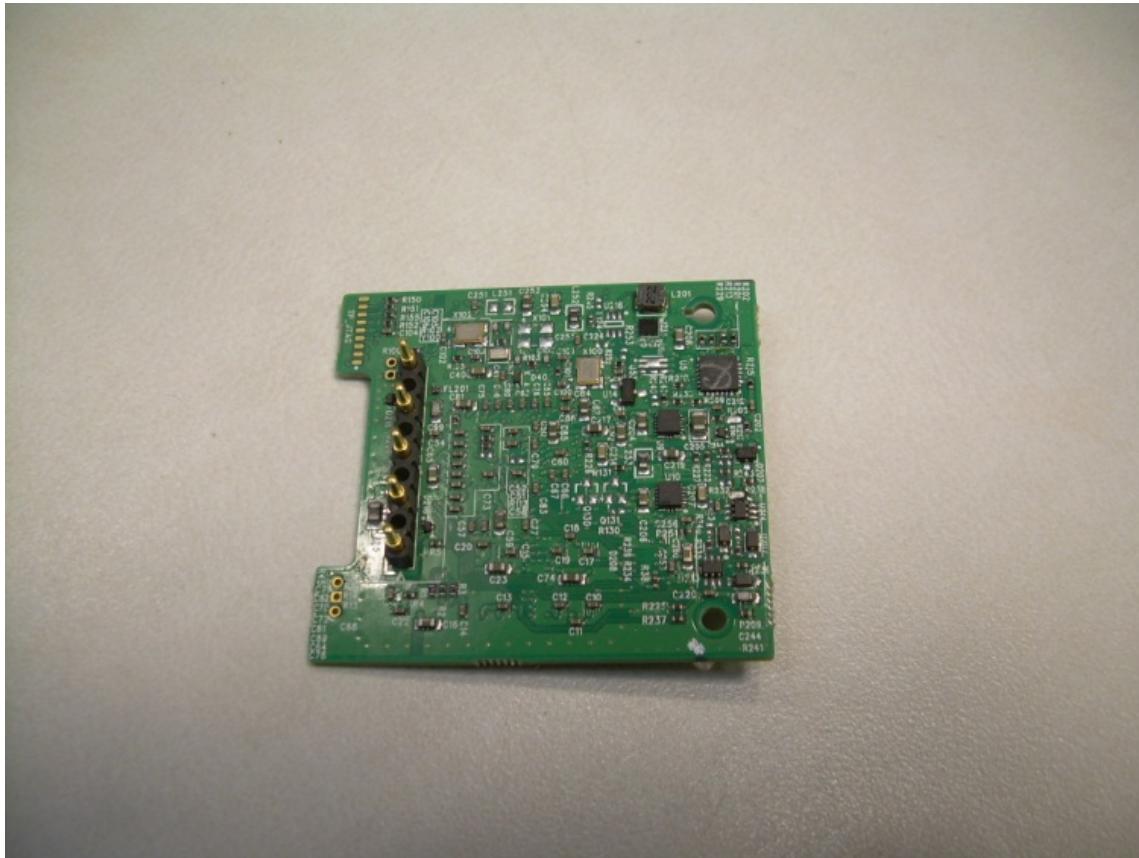

Photograph 22 – View of the LED Interface

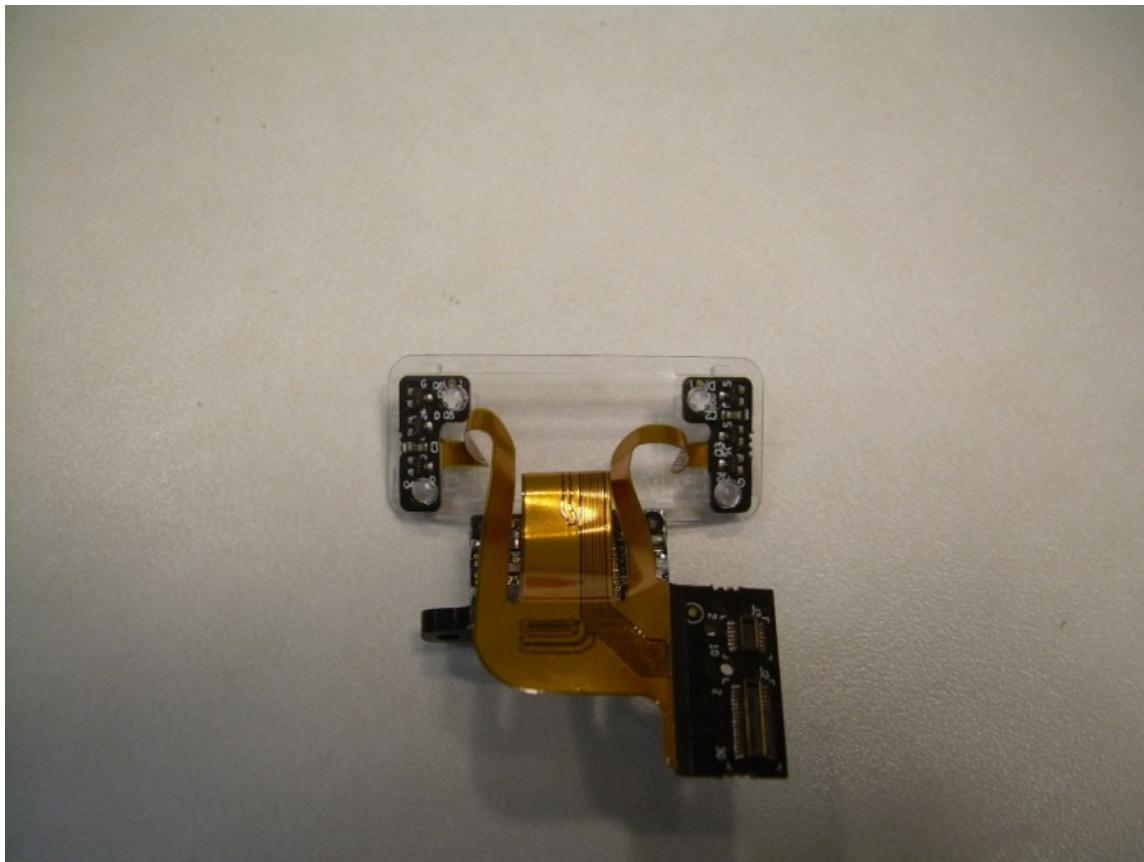

Photograph 23 – View with the Trigger Assembly Connected

