

FCC PART 15.223

TEST REPORT

For

Shenzhen Ronghua Electronic Co., Ltd.

Building 1, Quanyuan Industrial Park, Huafan Road, Dalang Sub-district, Longhua,
Bao'an District, Shenzhen

FCC ID: QQ7EGUARD7600

Report Type: Original Report	Product Type: Commodity protector
Test Engineer: Simon Wang	<i>Simon wang</i>
Report Number: RSZ141023003-00	
Report Date: 2014-12-29	
Reviewed By: RF Engineer	<i>Jimmy xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION.....	5
EUT EXERCISE SOFTWARE.....	5
EQUIPMENT MODIFICATIONS.....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP.....	5
SUMMARY OF TEST RESULTS.....	6
FCC§15.203 - ANTENNA REQUIREMENT.....	7
APPLICABLE STANDARD.....	7
ANTENNA CONNECTED CONSTRUCTION.....	7
FCC §15.207 – AC LINE CONDUCTED EMISSION.....	8
APPLICABLE STANDARD.....	8
MEASUREMENT UNCERTAINTY.....	8
EUT SETUP.....	8
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE.....	9
CORRECTED FACTOR & MARGIN CALCULATION.....	10
TEST RESULTS SUMMARY.....	10
TEST DATA.....	10
FCC§15.223, §15.205 & §15.209 - RADIATED EMISSIONS TEST.....	13
APPLICABLE STANDARD.....	13
MEASUREMENT UNCERTAINTY.....	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST RESULTS SUMMARY.....	15
TEST DATA.....	15
§15.223(A) (B), §15.31(F) FIELD STRENGTH AND 6 DB EMISSION BANDWIDTH.....	18
APPLICABLE STANDARD.....	18
MEASUREMENT UNCERTAINTY.....	18
TEST EQUIPMENT SETUP.....	18
EUT SETUP.....	19
TEST PROCEDURE.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA.....	20

FCC§15.215(C) - 20DB EMISSION BANDWIDTH22
REQUIREMENT22
TEST PROCEDURE22
TEST EQUIPMENT LIST AND DETAILS.....22
TEST DATA22

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Ronghua Electronic Co., Ltd.*'s product, model number: *TR7600 (FCC ID: QQ7EGUARD7600)* the "EUT" in this report is a *commodity protector*. The EUT was measured approximately: 38.5 cm(L) x 12 cm(W) x 157.5 cm(H). Rated with input voltage: DC 24.0V from DC Power.

** All measurement and test data in this report was gathered from production sample serial number: 1410181 (Assigned by the applicant). The EUT supplied by applicant was received on 2014-10-23.*

Objective

This Type approval report is prepared on behalf of *Shenzhen Ronghua Electronic Co., Ltd.* in accordance with Part 2- Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.223.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

No modifications were made to the unit tested.


Equipment Modifications

No modification on the EUT.

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Detachable AC Power Cable	1.0	Socket	LISN
Un-shielding Un-detachable AC Power Cable	0.5	AC Power	Socket
Un-shielding Un-detachable DC Power Cable	0.8	EUT	AC Power

Block Diagram of Test Setup

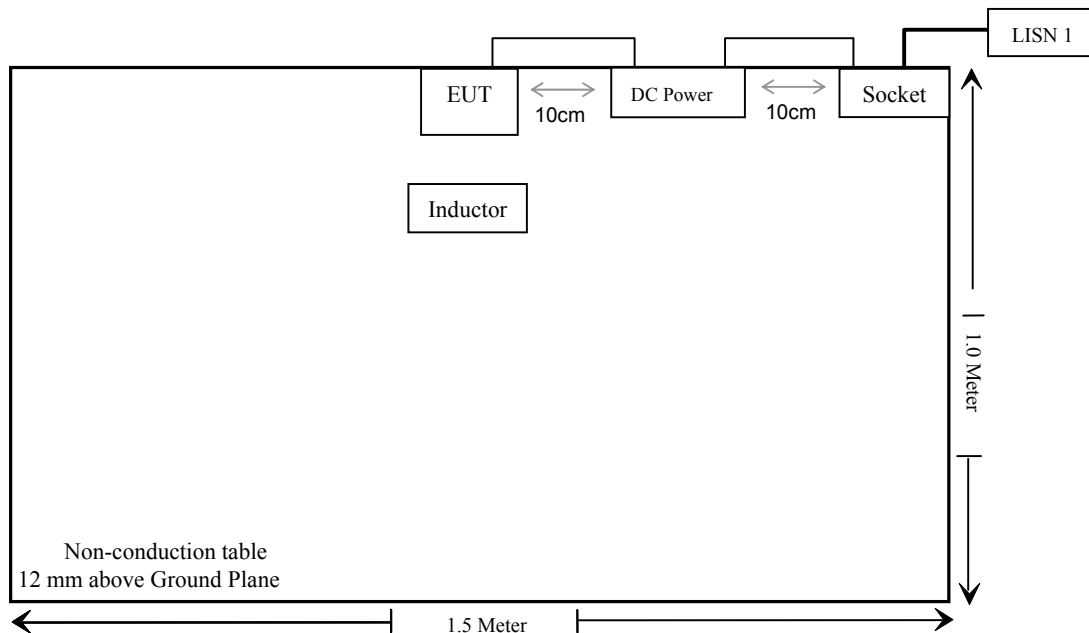

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emission	Compliance
§15.223 §15.209 §15.205	Radiated Emission Test	Compliance
§15.223(a) (b), §15.31(f)	Field strength and 6 dB Emission Bandwidth	Compliance
§15.215(c)	20 dB Emission Bandwidth	Compliance

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has an integrated antenna which was permanently attached, fulfill the requirement of this section. Please see EUT photo for details.

Result: Compliant.

FCC §15.207 – AC LINE CONDUCTED EMISSION

Applicable Standard

FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

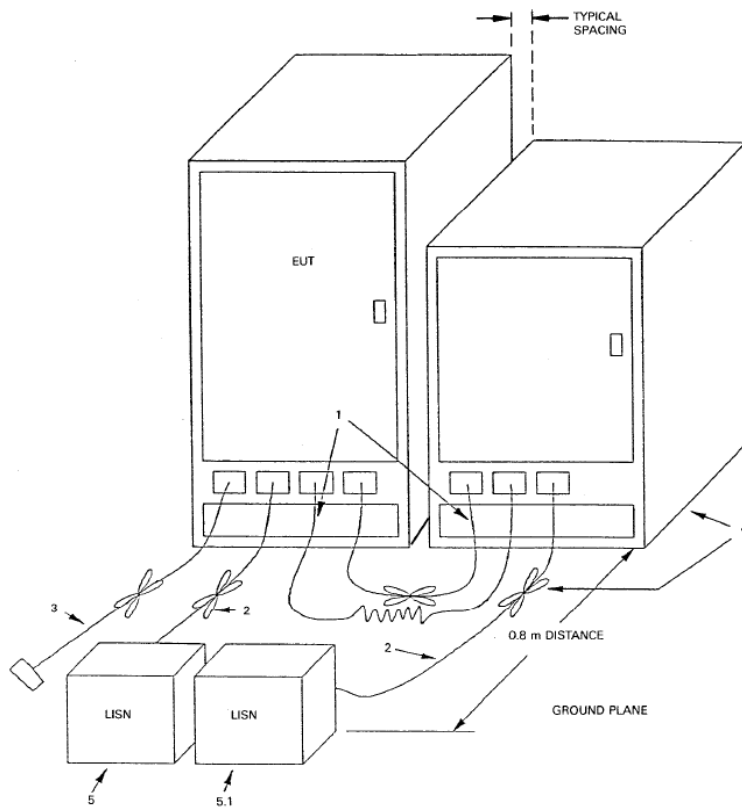

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2014-06-03	2015-06-03
Rohde & Schwarz	1st LISN	ENV216	3560.6650.12-101613-Yb	2014-06-09	2015-06-09
Rohde & Schwarz	2nd LISN	ESH2-Z5	892107/021	2014-06-09	2015-06-09
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2014-05-14	2015-05-14
Rohde & Schwarz	CE Test software	EMC 32	V8.53	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the host PC was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

4.7 dB at 16.226550 MHz in the Neutral conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL., $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2014-11-20.

Test Mode: Transmitting

AC 120V/60 Hz, Line:


EMI Auto Test L

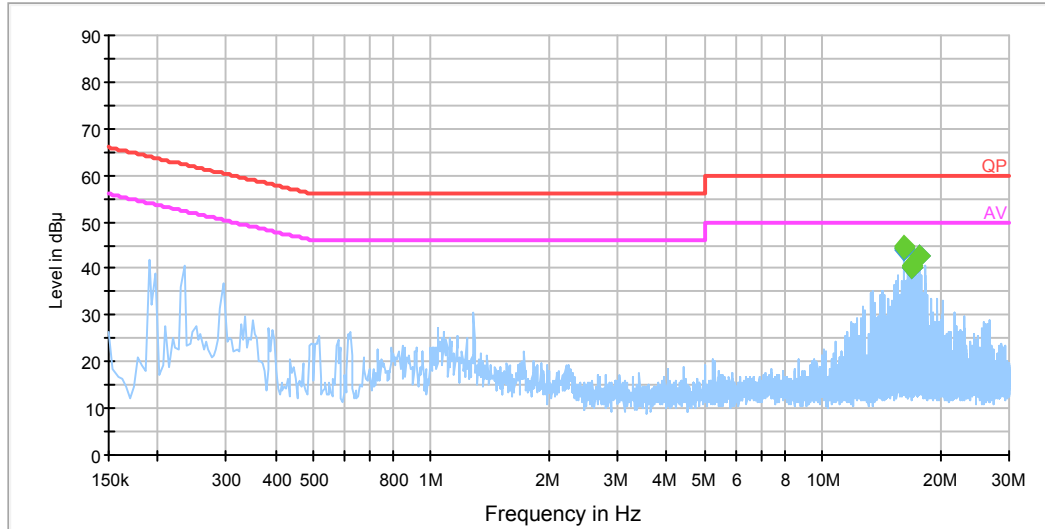

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
16.226610	45.0	19.9	60.0	15.0	QP
16.226610	44.4	19.9	50.0	5.6	Ave.
16.227510	45.3	19.9	60.0	14.7	QP
16.227510	44.7	19.9	50.0	5.3	Ave.
16.837770	41.2	19.9	60.0	18.8	QP
16.837770	40.5	19.9	50.0	9.5	Ave.
16.900530	41.3	19.9	60.0	18.7	QP
16.900530	40.6	19.9	50.0	9.4	Ave.
16.901430	41.2	19.9	60.0	18.8	QP
16.901430	40.1	19.9	50.0	9.9	Ave.
17.692590	43.5	19.9	60.0	16.5	QP
17.692590	42.7	19.9	50.0	7.3	Ave.

AC 120V/60 Hz, Neutral

EMI Auto Test N

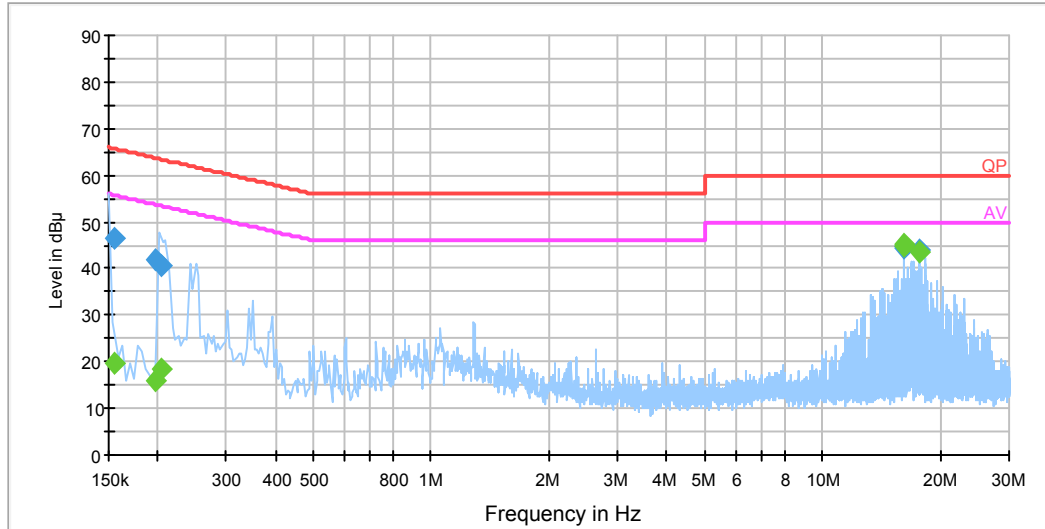

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.154500	46.5	19.2	65.8	19.3	QP
0.154500	19.7	19.2	55.8	36.1	Ave.
0.197500	41.8	19.2	63.7	21.9	QP
0.197500	15.9	19.2	53.7	37.8	Ave.
0.205500	40.7	19.2	63.4	22.7	QP
0.205500	18.5	19.2	53.4	34.9	Ave.
16.226550	45.3	19.6	60.0	4.7	QP
16.226550	44.7	19.6	50.0	5.3	Ave.
16.227510	45.7	19.6	60.0	14.3	QP
16.227510	45.1	19.6	50.0	4.9	Ave.
17.692590	43.9	19.6	60.0	16.1	QP
17.692590	43.7	19.6	50.0	6.3	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC§15.223, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard


FCC §15.223 ; §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz. And it will not be taken into consideration for the test data recorded in the report

EUT Setup

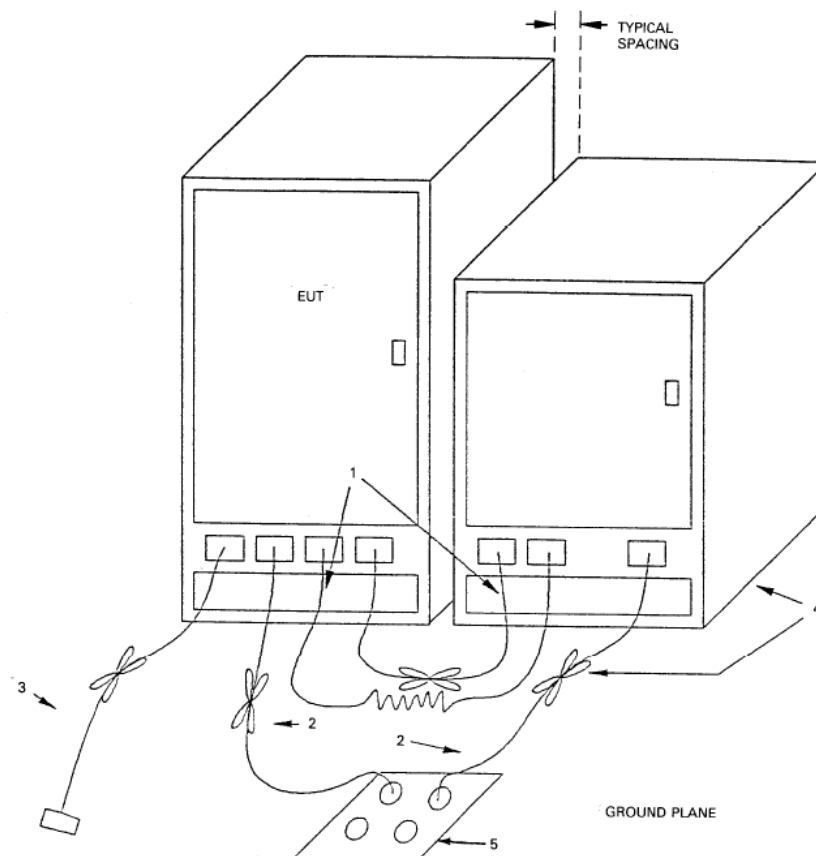

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	300 Hz	1 kHz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	/	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Corrected Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2014-09-25	2015-09-25
HP	Amplifier	8447E	1937A01046	2014-05-06	2015-05-06
Sunol Sciences	Broadband Antenna	JB3	A111513	2014-06-18	2017-06-17
ETS	Passive Loop Antenna	6512	00029604	2014-11-30	2015-11-29
ESPEC	Temperature & HuSmart phoneity Chamber	EL-10KA	09107726	2014-11-01	2015-11-01

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209.

4.20 dB at 150.006000 MHz in the Vertical polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BAACL., $U_{(L_m)}$ is less than $+ U_{cispr}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2014-11-23.

Test mode: Transmitting

30MHz-1GHz:

Full Spectrum

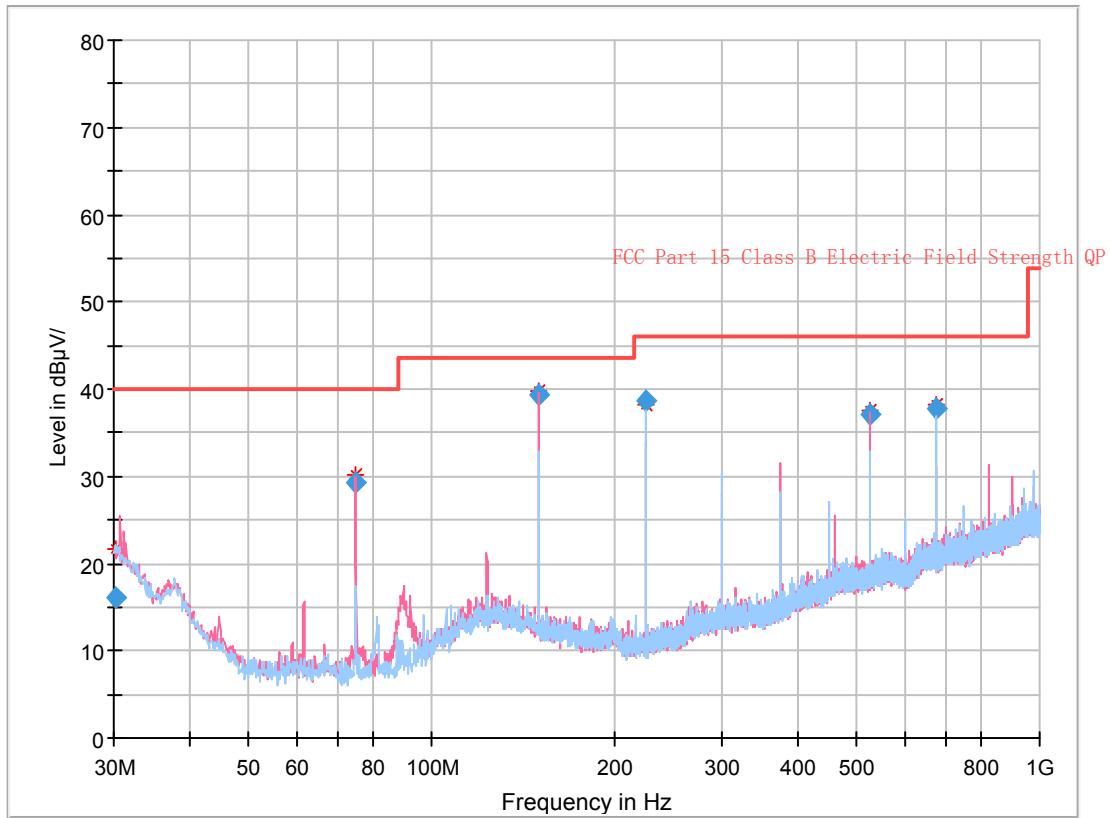

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (deg)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
30.259625	16.17	128.0	V	117.0	-6.1	40.00	23.83
75.006375	29.37	103.0	V	13.0	-19.3	40.00	10.63
150.006000	39.30	302.0	V	42.0	-13.8	43.50	4.20
225.015875	38.56	108.0	H	17.0	-15.4	46.00	7.44
525.021875	37.03	102.0	V	0.0	-8.6	46.00	8.97
675.021500	37.79	135.0	H	132.0	-6.2	46.00	8.21

Below 30MHz:

Indicated		Table Angle Degree	Antenna Height (m)	Detector PK/QP/Ave.	Correction Factor			Corrected Amplitude (dBµV/m) @3m	FCC Part 15.209	
Frequency (MHz)	Maximum Reading (dBµV) @3m				Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)		Limit (dBµV/m) @3m	Result
0.167	0.71	0	1.1	QP	64.8	0.20	0	65.71	103.15	Pass
27.30	7.82	0	1.1	QP	30.4	0.20	0	38.42	69.54	Pass

§15.223(a) (b), §15.31(f) FIELD STRENGTH AND 6 dB EMISSION BANDWIDTH

Applicable Standard

According to FCC§15.223,

(a) The field strength of any emission within the band 1.705-10.0 MHz shall not exceed 100 microvolts/meter at a distance of 30 meters. However, if the bandwidth of the emission is less than 10% of the center frequency, the field strength shall not exceed 15 microvolts/meter or (the bandwidth of the device in kHz) divided by (the center frequency of the device in MHz) microvolts/meter at a distance of 30 meters, whichever is the higher level. For the purposes of this section, bandwidth is determined at the points 6 dB down from the modulated carrier. The emission limits in this paragraph are based on measurement instrumentation employing an average detector. The provisions in §15.35(b) for limiting peak emissions apply.

(b) The field strength of emissions outside of the band 1.705-10.0 MHz shall not exceed the general radiated emission limits in §15.209.

For the purposes of this Section, bandwidth is determined at the points 6 dB down from the modulated carrier.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, 4.92 dB for above 1GHz, and it will not be taken into consideration for the test data recorded in the report


Test Equipment Setup

The spectrum analyzer or receiver is set as:

Below 1000MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

EUT Setup

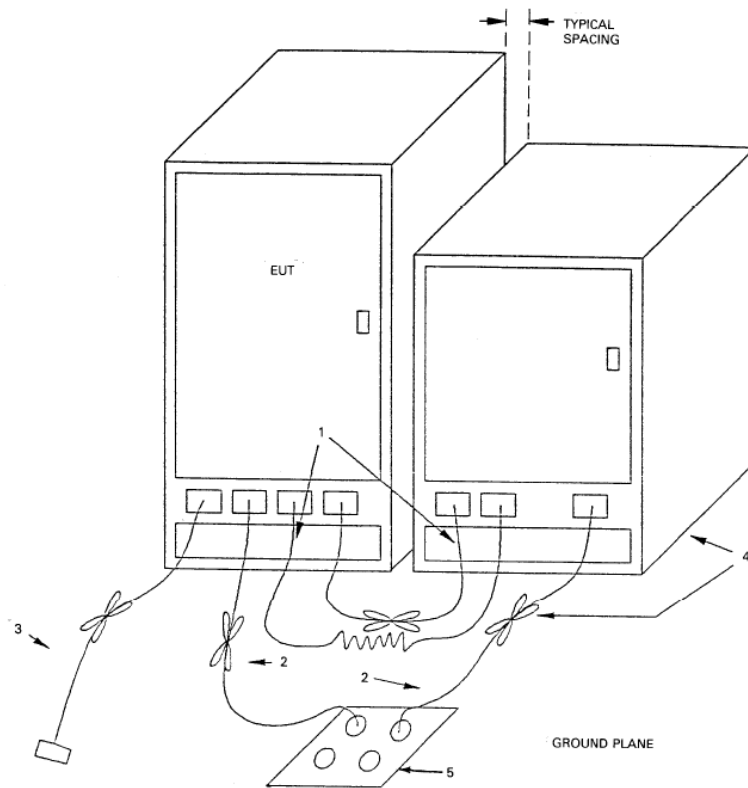

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209/15.205 and FCC 15.237 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS	Passive Loop Antenna	6512	00029604	2014-11-30	2015-11-29
TDK	Chamber	Chamber A	2#	2012-10-15	2015-10-15
R&S	EMI Test Receiver	ESCI	101120	2014-11-12	2015-11-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2014-08-16.

Test Mode: Transmitting

Test Result: Pass

The worst case as below:

Indicated		Table Angle Degree	Antenna Height (m)	Detector PK/QP/Ave.	Correction Factor			Corrected Amplitude (dBµV/m) @3m	FCC 15.223 Limit		Result
Freq. (MHz)	Maximum Reading (dBµV) @3m				Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)		(dBµV/m) @30m	(dBµV/m) @3m	
8.2	39.91	36	1.1	PK	32	0.2	0	72.11	52.25	92.25	pass
8.2	26.91	36	1.1	Ave.	32	0.2	0	59.11	32.25	72.25	pass

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit – Corr. Amplitude

The field strength shall not exceed 15 microvolts/meter or (the bandwidth of the device in kHz) divided by (the center frequency of the device in MHz) microvolts/meter at a distance of 30 meters, whichever is the higher level.

(the bandwidth of the device in kHz) divided by (the center frequency of the device in MHz)=336kHz/8.2MHz
=40.96>15

So the limit is (20lg40.96 microvolts/meter) +40=72.25dBuV/m

6 dB Emission Bandwidth

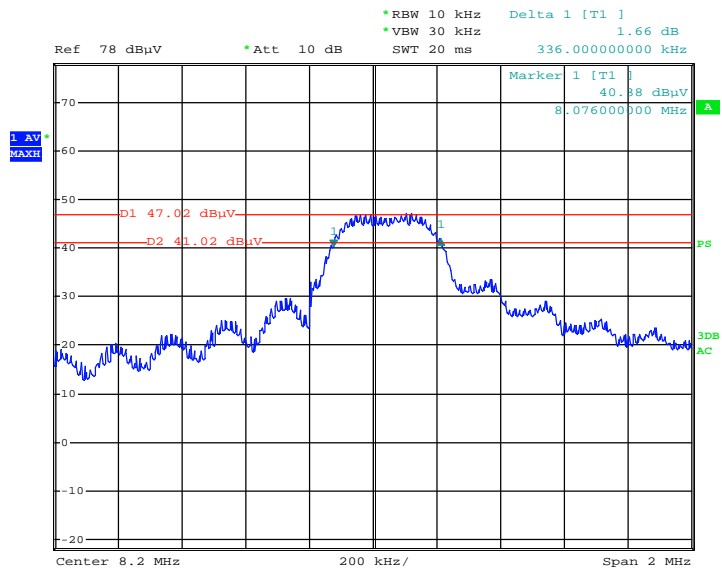

EUT
Date: 23.NOV.2014 15:39:38

FCC§15.215(c) - 20dB EMISSION BANDWIDTH

Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2014-09-25	2015-09-25
ETS	Passive Loop Antenna	6512	00029604	2014-11-30	2015-11-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2014-11-23.

Test Mode: Transmitting

Test Result: Pass

20 dB Emission Bandwidth

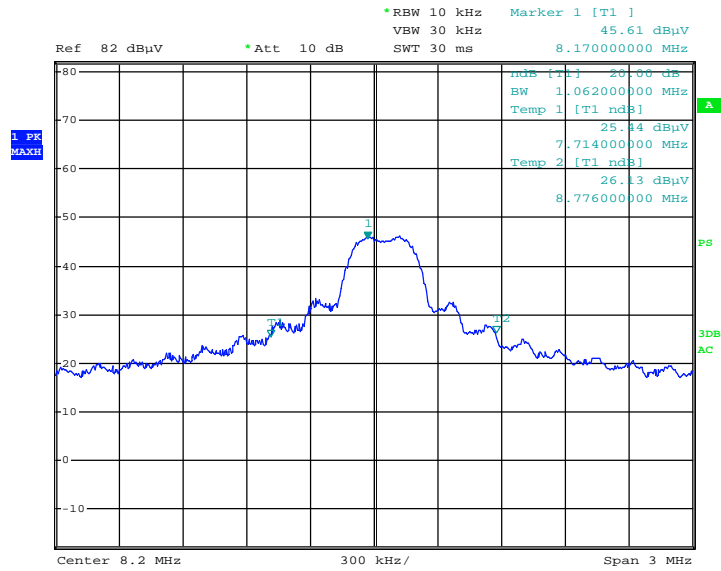

EUT
 Date: 23.NOV.2014 14:27:26

******* END OF REPORT *******