

# ESTECH

## HOT


EUT: SP-1001  
 Manuf: SHIN-OH ELECTRONICS CO., LTD.  
 Op Cond: 220V  
 Operator: JMYang  
 Test Spec: CLASS B  
 Comment:

File: 977i60\_h.dat : SHIN-OH ELECTRONICS CO., LTD.

### Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
150kHz	30MHz	0.8%	10kHz	PK+AV	20msec	Auto	60dB

Final Measurement: X QP / + AV  
 Meas Time: 1sec  
 Subranges: 25  
 Acc Margin: 60 dB

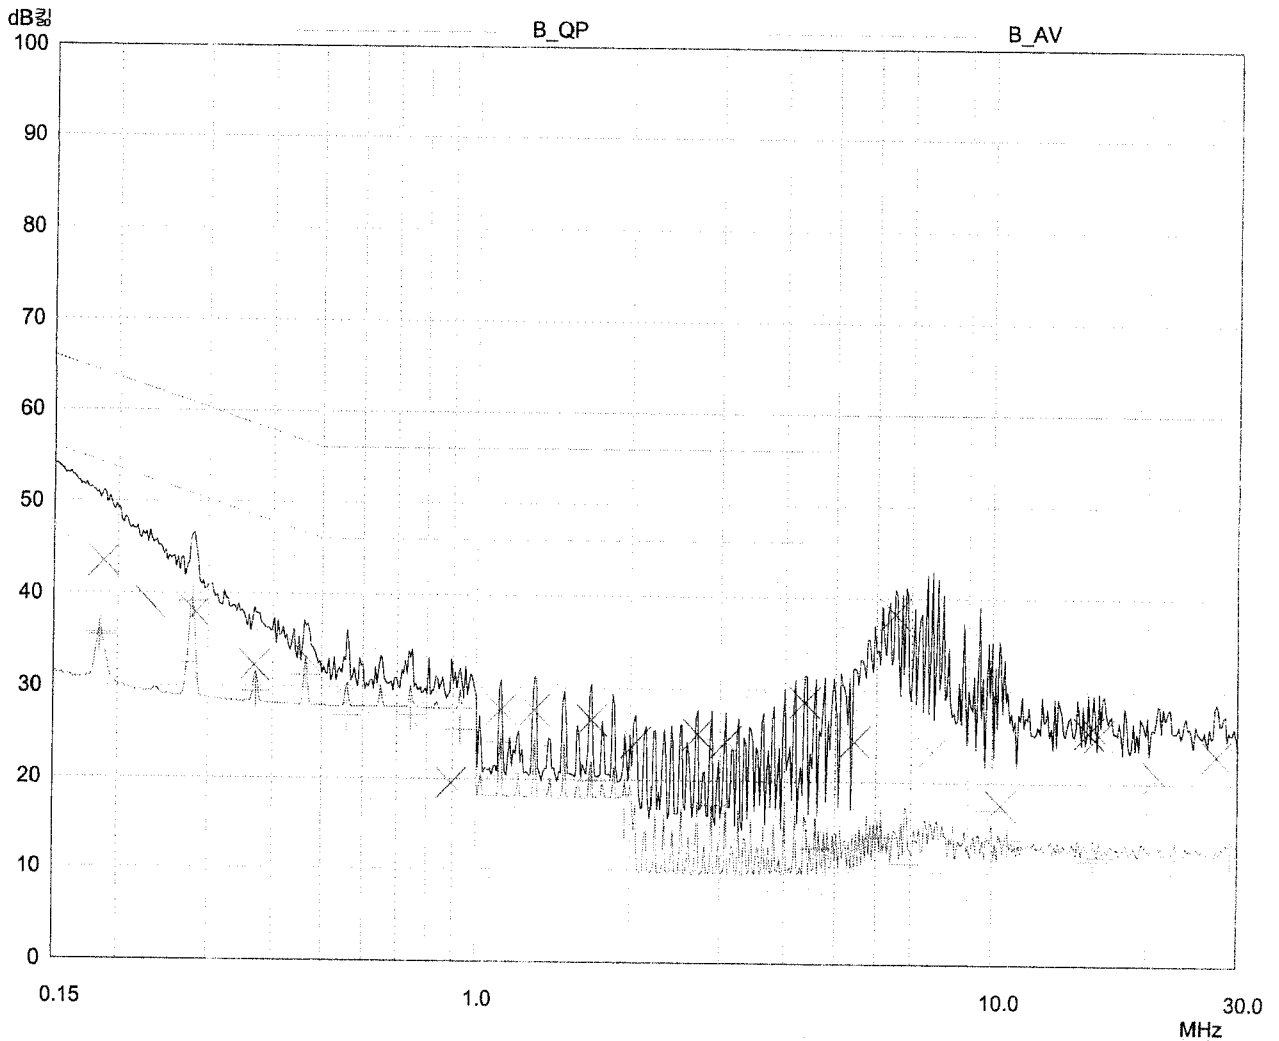

# ESTECH NEUTRAL

EUT: SP-1001  
Manuf: SHIN-OH ELECTRONICS CO., LTD.  
Op Cond: 220V  
Operator: JMYang  
Test Spec: CLASS B  
Comment:

File: 977t60\_n.dat : SHIN-OH ELECTRONICS CO., LTD.

## Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
150kHz	30MHz	0.8%	10kHz	PK+AV	20msec	Auto	60dB

Final Measurement: X QP / + AV  
Meas Time: 1sec  
Subranges: 25  
Acc Margin: 60 dB

