

ESTECH HOT


EUT: SP-1001
Manuf: SHIN-OH ELECTRONICS CO., LTD.
Op Cond: 220V
Operator: JMYang
Test Spec: CLASS B
Comment:

File: 977r00_h.dat : SHIN-OH ELECTRONICS CO., LTD.

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
150kHz	30MHz	0.8%	10kHz	PK+AV	20msec	Auto	60dB

Final Measurement: X QP / + AV
Meas Time: 1sec
Subranges: 25
Acc Margin: 60 dB

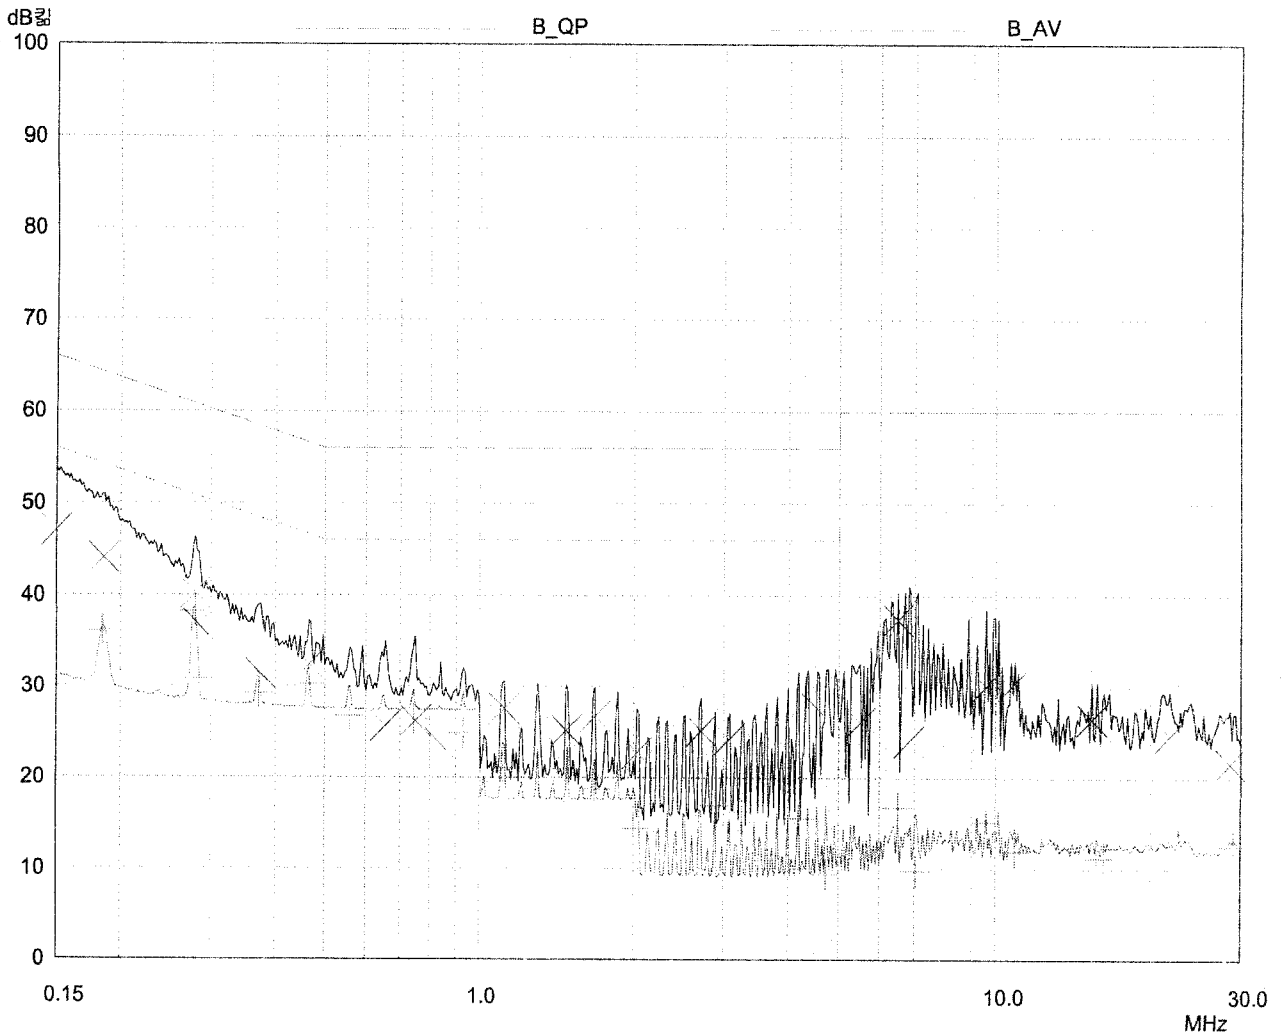

ESTECH NEUTRAL

EUT: SP-1001
Manuf: SHIN-OH ELECTRONICS CO., LTD.
Op Cond: 220V
Operator: JMYang
Test Spec: CLASS B
Comment:

File: 977r00_n.dat : SHIN-OH ELECTRONICS CO., LTD.

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
150kHz	30MHz	0.8%	10kHz	PK+AV	20msec	Auto	60dB

Final Measurement: X QP / + AV
Meas Time: 1sec
Subranges: 25
Acc Margin: 60 dB

