

FCC Test Report

Test report no.: EMC 638FCC22-24 2004 CDMA

FCC Part 22,24 / RSS 129,133

Model: C3111

C3211

C3311

FCC ID: QQL-Q2438 IC ID: 4481A-Q2438







Bluetooth Qualification Test Facility (BQTF)



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • http://www.cetecom.com

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May



Table of Contents

| 1 | | • • • |
|---|---------|-------------|
| 1 | General | information |

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards
- 2 Technical test
- 2.1 Summary of test results
- 2.2 Test report
- 1 General information
- 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

TEST REPORT PREPARED BY: EMC Engineer: Harpreet Sidhu

1.2 Testing laboratory

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com



1.3 Details of applicant

Name : AirLink Communications, Inc.

Street : 3159 Corporate Place City / Zip Code : Fremont, CA 94545

Country : USA

Contact : Jim Baichtal

Telephone : +1 510 264 5401

Tele-fax : +1 510 264 5422

e-mail : jim@airlink.com

1.4 Application details

Date of receipt test item : 2004-04-02

Date of test : 2004-04-02/03/04

1.5 Test item

Manufacturer : Applicant

Marketing Name : Redwing CDMA

Raven CDMA PinPoint CDMA

Model No. : C3111

C3211 C3311

Description : CDMA 850/1900 Data Modems

FCC-ID : QQL-Q2438 IC-ID : 4481A-Q2438

Additional information

Frequency: 825.25MHz – 847.75MHz for Cellular 850,

1851.25MHz - 1908.75MHz for PCS 1900

Type of modulation : CDMA

Number of channels : 833(Cellular)/1199 (PCS)

Antenna : External

Output power : 25.37dBm (344.35mW) max. ERP measured in GSM-850

25.15dBm (327.34mW) max. EIRP measured in PCS-1900

Extreme temp. Tolerance : Lower:-30°C Upper: +50°C

1.6 Test standards

FCC Part 22,24 / RSS129,133 r1

These CDMA modems carry pre-certified Wavecom module model# Q2438F with FCC ID: O9EQ2438F. This test report covers full radiated testing as per FCC 22/24 on all three models. All conducted measurements are covered under test report# 22/24.240428269-R1.09E



2 Technical test

2.1 Summary of test results

| No deviations from the technical specification(s) were ascertained in the course of the tests Performed | |
|--|--------|
| Final Verdict: (only "passed" if all single measurements are "passed") | Passed |

Technical responsibility for area of testing:

| 2004-07-26 | EMC & Radio | Lothar Schmidt (Technical Manager) | ldunida |
|------------|-------------|---------------------------------------|-----------|
| Date | Section | Name | Signature |

Responsible for test report and project leader:

| 2004-07-26 | EMC & Radio | Harpreet Sidhu (EMC Engineer) | |
|------------|-------------|-------------------------------|-----------|
| Date | Section | Name | Signature |



2.2 Test report

TEST REPORT

Test report no.: EMC_638FCC22-24_2004_CDMA



TEST REPORT REFERENCE

| PARAMETER TO BE MEASURED | PARAGRAPH | | PAGE |
|-------------------------------------|----------------------------|---|------|
| POWER OUTPUT | § 22.913(A) / § 24.232 (B) | 7 | |
| EMISSION LIMITS TRANSMITTER | §2.1051 / §24.238 | | 16 |
| RECEIVER RADIATED EMISSIONS | § 2.1053 / RSS-133 | | 70 |
| CONDUCTED EMISSIONS | § 15.107/207 | | 76 |
| TEST EQUIPMENT AND ANCILLARIES USEI | O FOR TESTS | | 77 |
| BLOCK DIAGRAMS | | | 78 |



POWER OUTPUT

§ 22.913(a) / § 24.232 (b)

Summary:

During the process of testing, the EUT was controlled via Rhode & Schwarz Universal Radio Communication tester (CMU 200) to ensure max. Power transmission and proper modulation.

This paragraph contains peak output power, EIRP & ERP measurements for the EUT. In all cases, the peak output power is within the specified limits.

Method of Measurements:

The EUT was set up for the max. Output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer ESIB 40 (peak)

These measurements were done at 3 frequencies,

825.25 MHz, 836.5 MHz and 847.75 MHz (bottom, middle and top of operational frequency range) for Cellular 850 1851.25 MHz, 1880.0 MHz and 1908.75 MHz (bottom, middle and top of operational frequency range) for PCS 1900



ERP (Cellular-850) §22.913(a)

Limits:

| Burst Peak ERP |
|----------------|
| ≤38.45dBm (7W) |


EIRP

| Frequency (MHz) | Burst Pea (dBm) | nk |
|-------------------------|--------------------|-------|
| (NALL) | EIRP | ERP |
| 825.25 | 27.51 | 25.37 |
| 836.5 | 27.31 | 25.17 |
| 847.75 | 25.83 | 23.69 |
| Measurement uncertainty | ±0.5 dB | |

ANALYZER SETTINGS: RBW = VBW = 3MHz




EIRP (Cellular-850) CHANNEL 8 §22.913(a)

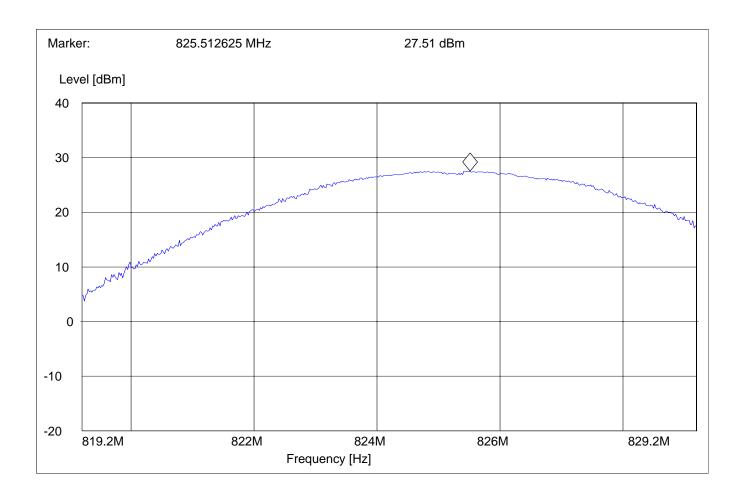




EIRP (Cellular-850) CHANNEL 383 §22.913(a)

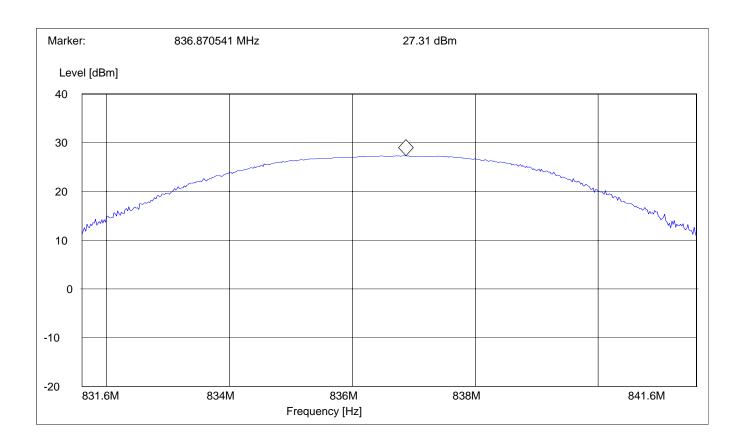



EIRP (Cellular-850) CHANNEL 758 §22.913(a)

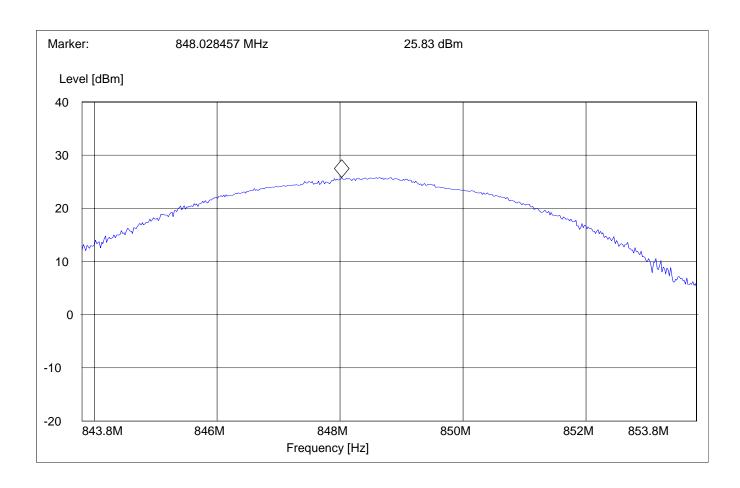



EIRP (PCS-1900) §24.232(b)

Limits:

| Burst Peak EIRP |
|-----------------|
| ≤33dBm (1W) |


EIRP

| Frequency | Burst Peak |
|-------------------------|------------|
| (MHz) | (dBm) |
| | EIRP |
| 1851.25 | 24.94 |
| 1880 | 24.96 |
| 1908.75 | 25.15 |
| Measurement uncertainty | ±0.5 dB |

ANALYZER SETTINGS: RBW = VBW = 3MHz




EIRP (PCS-1900) CHANNEL 25

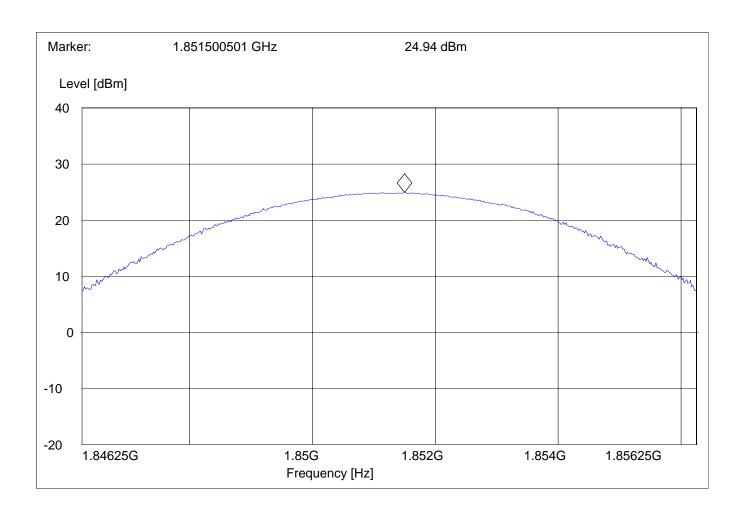




EIRP (PCS-1900) CHANNEL 600 §24.232(b)

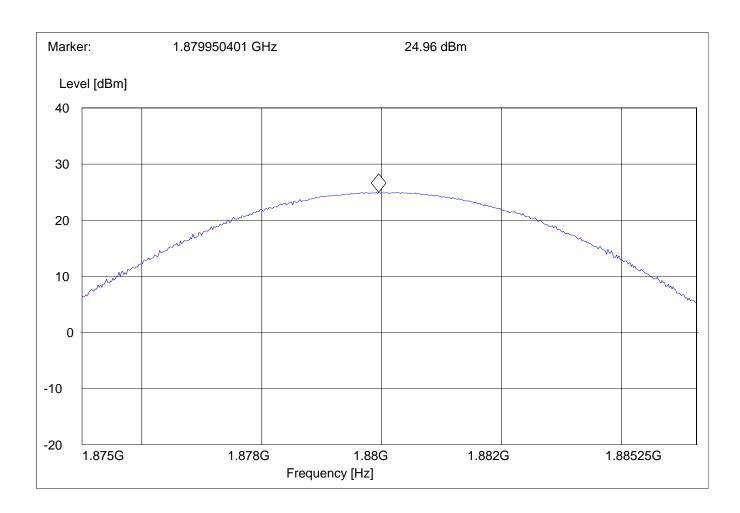



EIRP (PCS-1900) CHANNEL 1175 §24.232(b)

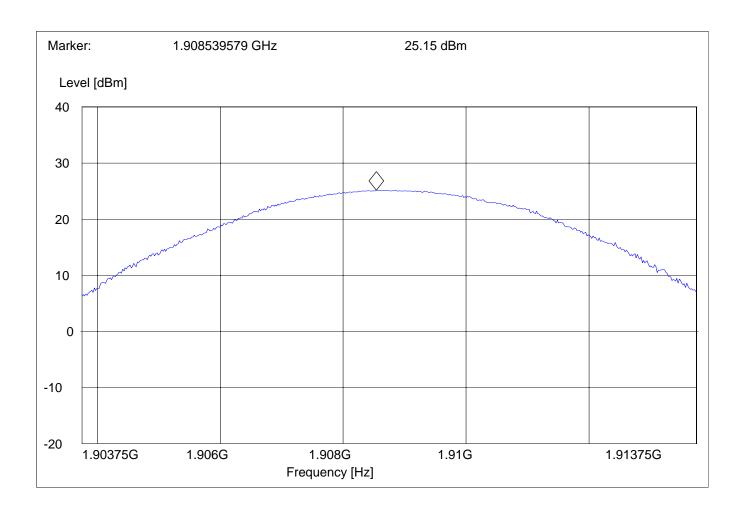



EMISSION LIMITS TRANSMITTER

§2.1051 / §24.238

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 847.75MHz for Cellular-850 & 1908.75MHz for PCS-1900 The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the Cellular-850 & PCS-1900 bands.

The final Radiated emission test procedure is as follows:

- a) The test item was placed on a 0. 8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50-ohm load.
- c) A double-ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was determined by the substitution method described for ERP measurements.

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the Cellular-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the Cellular-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Note: Radiated spurious emissions were done on all three models.

C3111 (Redwing CDMA) C3211 (Raven CDMA) C3311 (PinPoint CDMA)



C3111 (Redwing CDMA)

RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 825.25MHz: 30MHz - 1GHz

Spurious emission limit –13dBm

Antenna: vertical

SWEEP TABLE: "FCC 22 Spur 30M-1G"


Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels of all three models (worst-case plot)

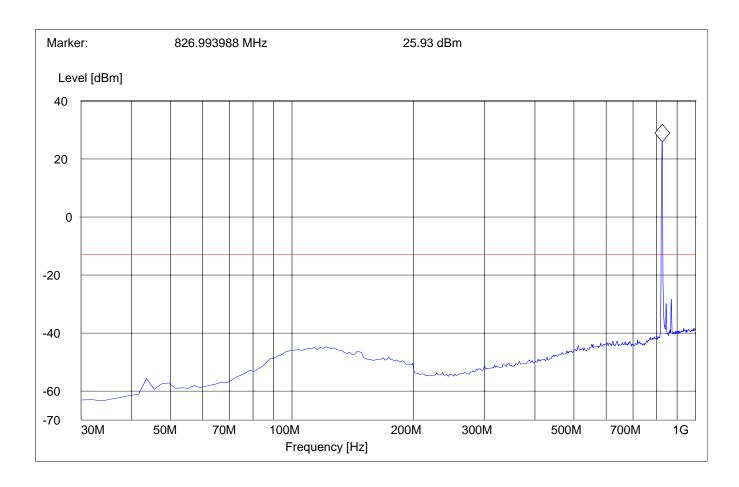



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 825.25MHz: 30MHz - 1GHz

Spurious emission limit -13dBm

Antenna: horizontal

SWEEP TABLE: "FCC 22 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW


Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

Note:

1. The peak above the limit line is the carrier freq.

2. This plot is valid for low, mid & high channels of all three models (worst-case plot)

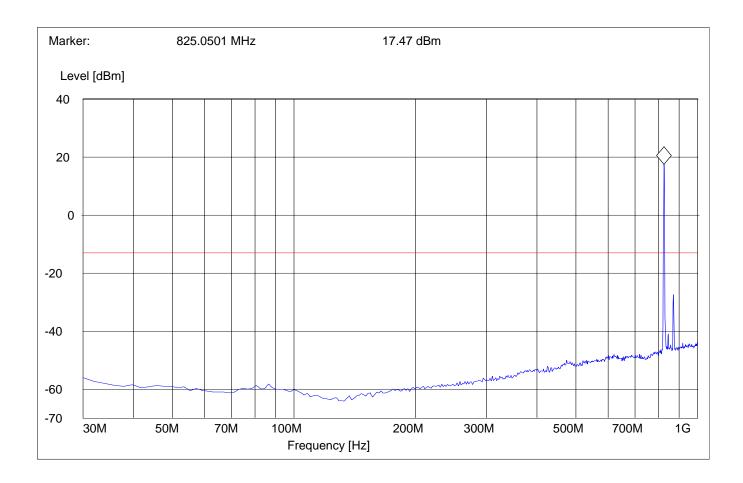



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 825.25MHz: 1GHz – 1.58GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

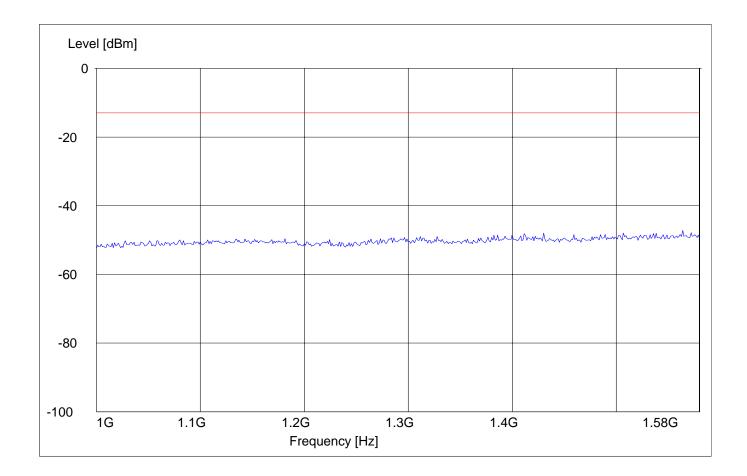



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 825.25MHz: 1.58GHz – 3GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

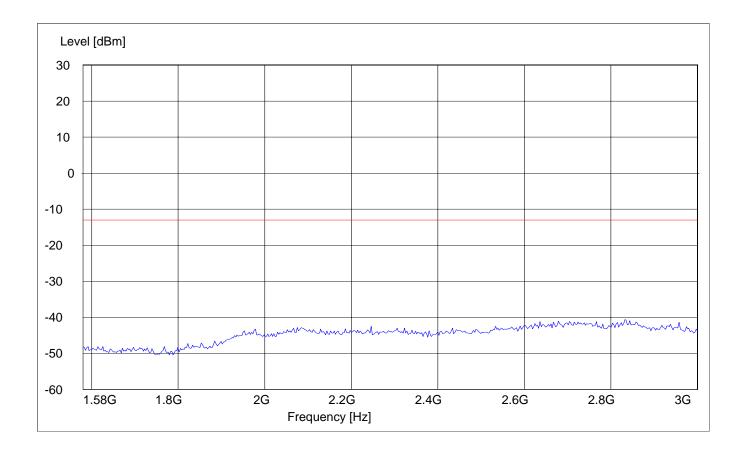



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 825.25MHz: 3GHz – 9GHz


Spurious emission limit –13dBm

This plot is valid for all channels (worst-case plot)

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

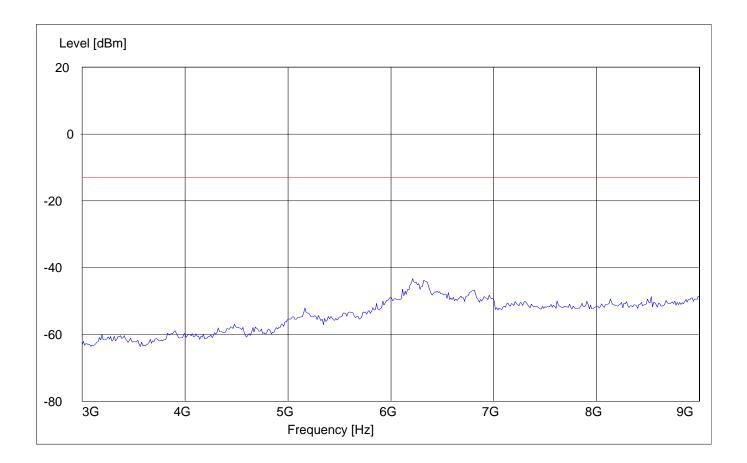



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 836.5MHz: 1GHz – 1.58GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

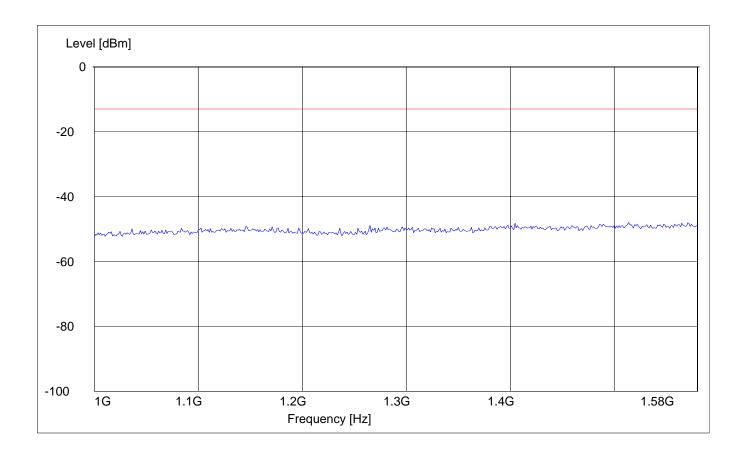



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 836.5MHz: 1.58GHz – 3GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

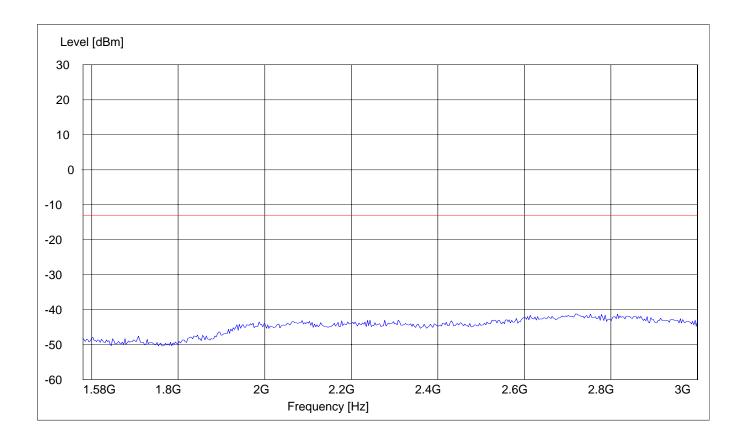



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 847.75MHz: 1GHz – 1.58GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

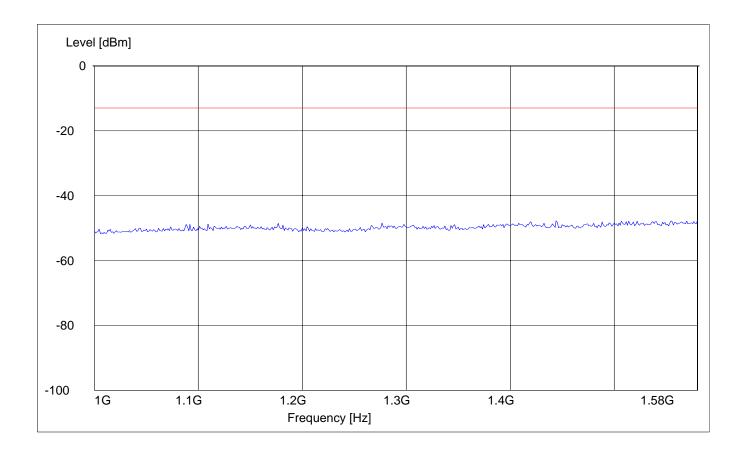



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 847.75MHz: 1.58GHz – 3GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

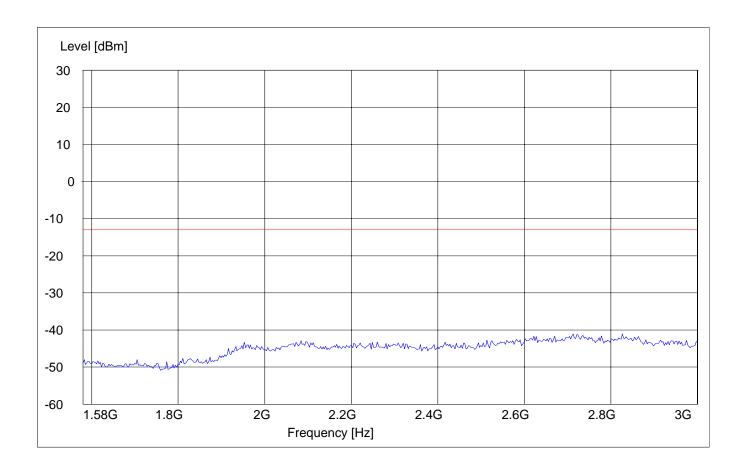



C3211 (Raven CDMA)

RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 825.25MHz: 1GHz – 1.58GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

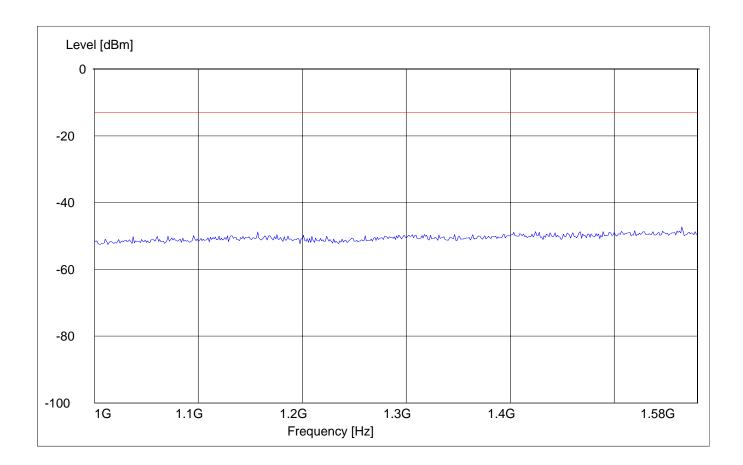



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 825.25MHz: 1.58GHz – 3GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

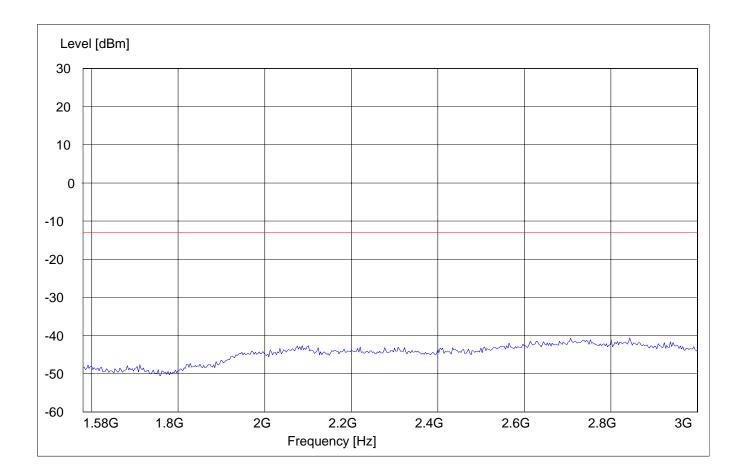



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 825.25MHz: 3GHz – 9GHz


Spurious emission limit –13dBm

This plot is valid for all channels (worst-case plot)

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

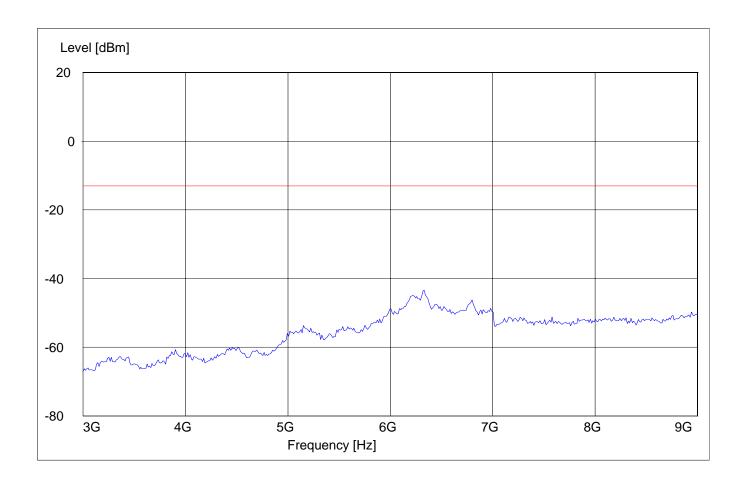



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 836.5MHz: 1GHz – 1.58GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

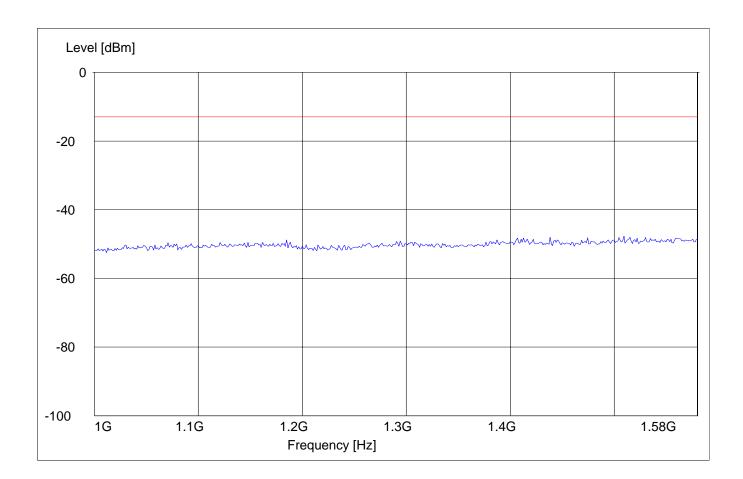



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 836.5MHz: 1.58GHz – 3GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

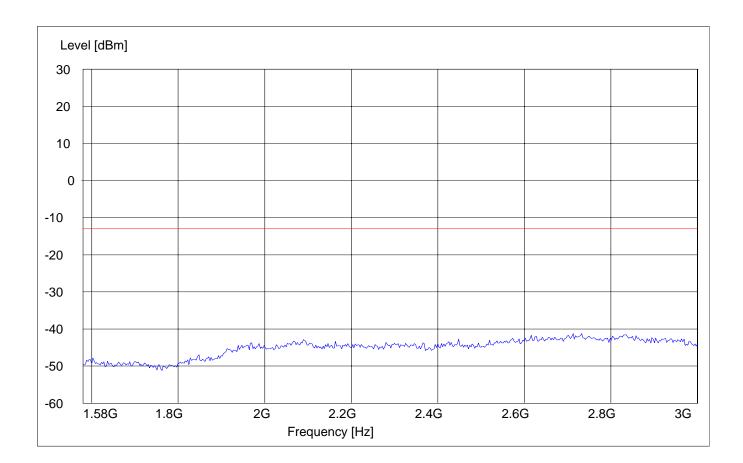



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 847.75MHz: 1GHz – 1.58GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

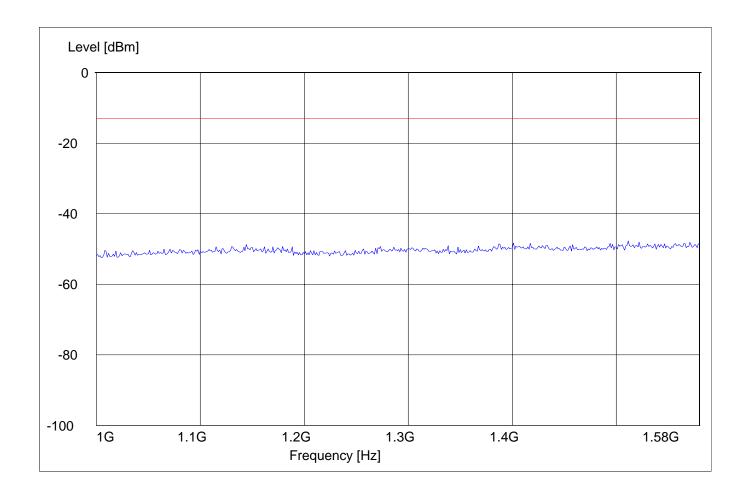



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 847.75MHz: 1.58GHz – 3GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

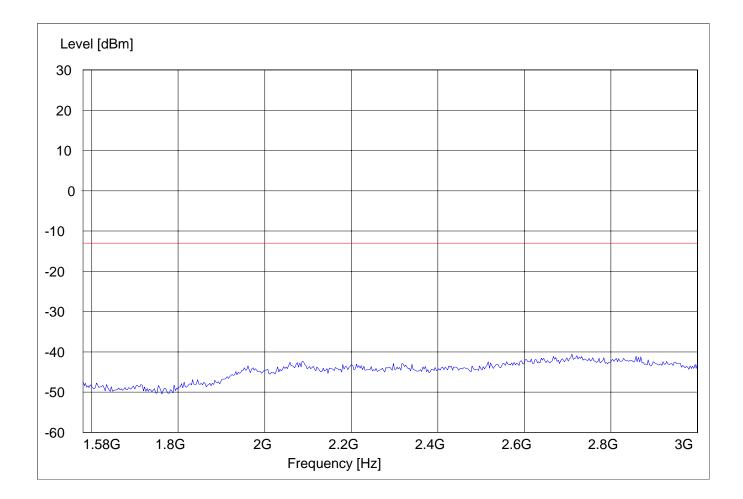



C3311 (PinPoint CDMA)

RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 825.25MHz: 1GHz – 1.58GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

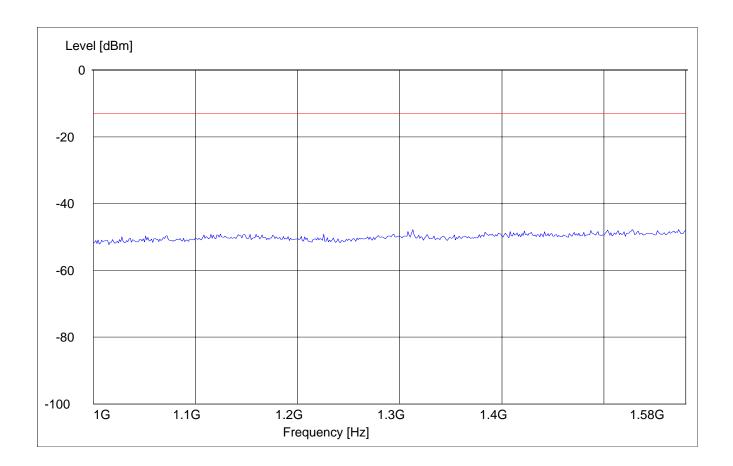



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 825.25MHz: 1.58GHz – 3GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

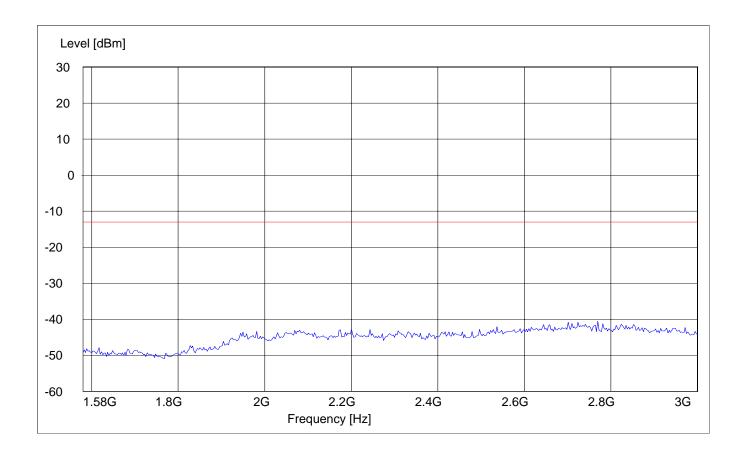



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 825.25MHz: 3GHz – 9GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

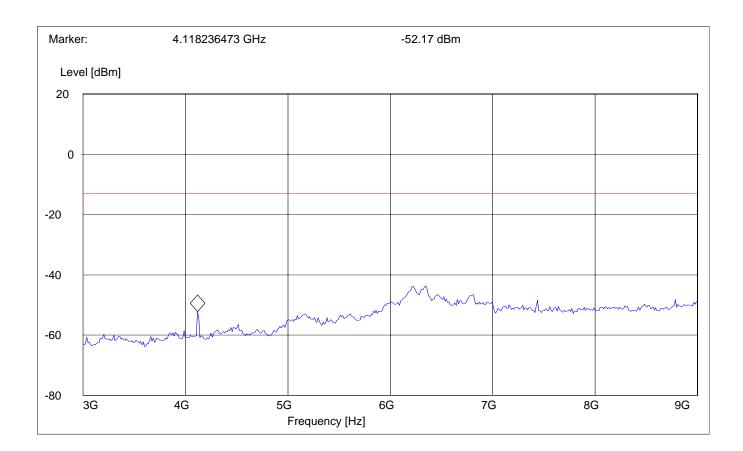



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 836.5MHz: 1GHz – 1.58GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

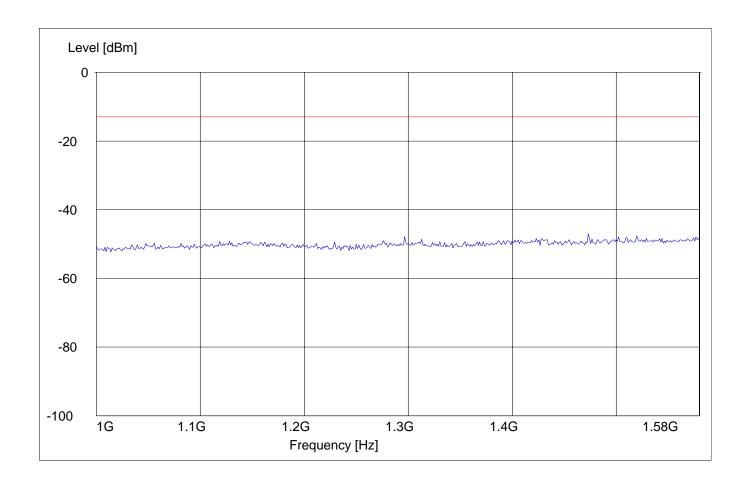



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 836.5MHz: 1.58GHz – 3GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

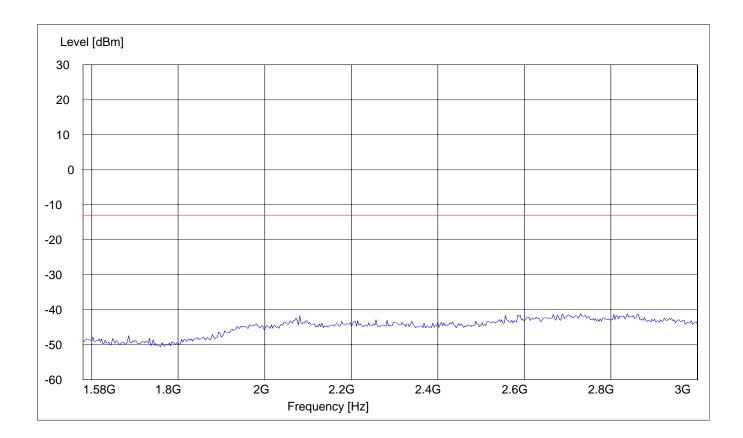



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 836.5MHz: 3GHz – 9GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

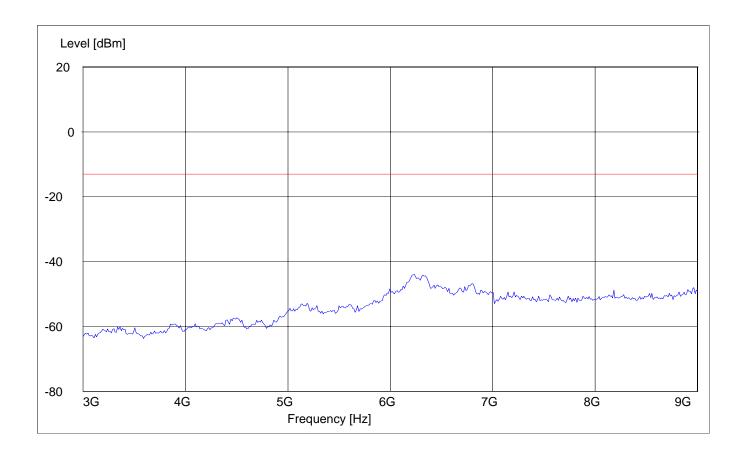



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 847.75MHz: 1GHz – 1.58GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

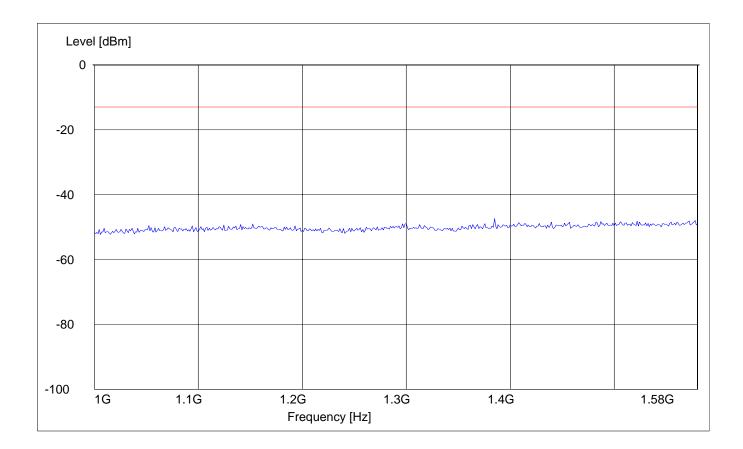



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 847.75MHz: 1.58GHz – 3GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

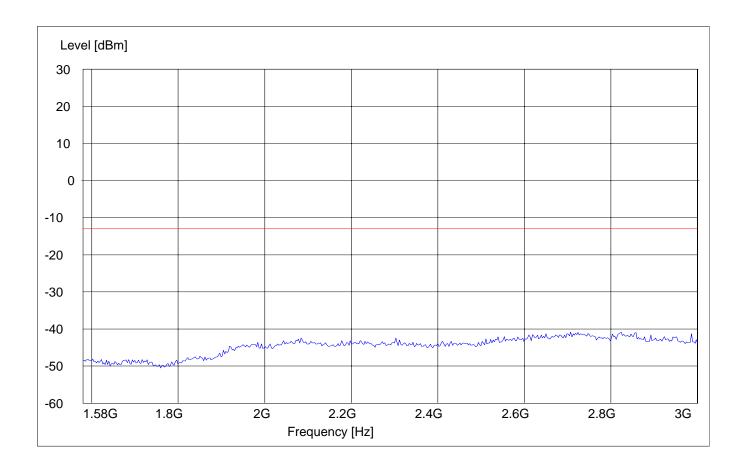



RADIATED SPURIOUS EMISSIONS (GSM-850)


Tx @ 847.75MHz: 3GHz – 9GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

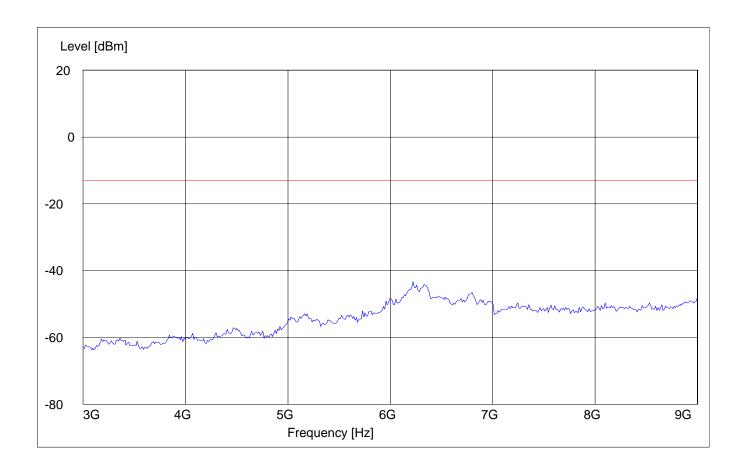



RESULTS OF RADIATED TESTS PCS-1900:

C3111 (Redwing CDMA)

RADIATED SPURIOUS EMISSIONS

Tx @ 1851.25MHz: 30MHz - 1GHz

Spurious emission limit -13dBm

Antenna: vertical


SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels of all three models (worst-case plot)

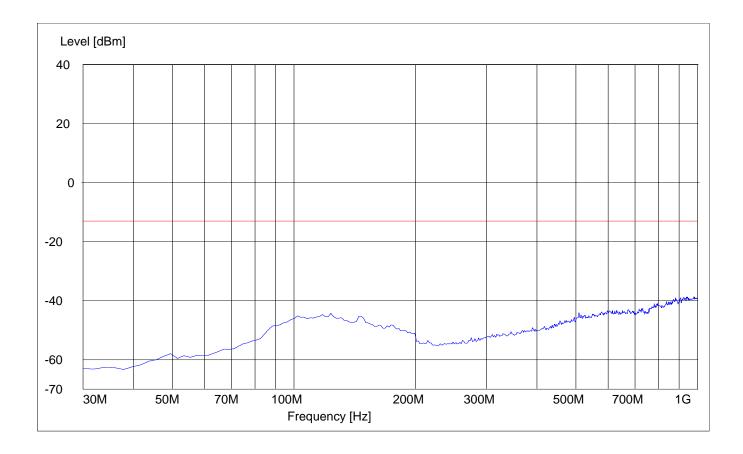



RADIATED SPURIOUS EMISSIONS

Tx @ 1851.25MHz: 30MHz - 1GHz

Spurious emission limit -13dBm

Antenna: horizontal


SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels of all three models (worst-case plot)

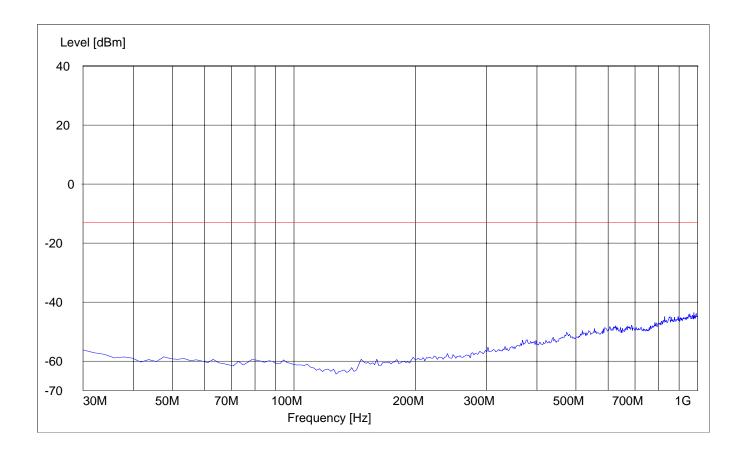



RADIATED SPURIOUS EMISSIONS

Tx @ 1851.25MHz: 1GHz – 3GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 1-3G"


Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

This plot is valid for all three models (worst-case plot)

Note: The peak above the limit line is the carrier freq. at ch-25.

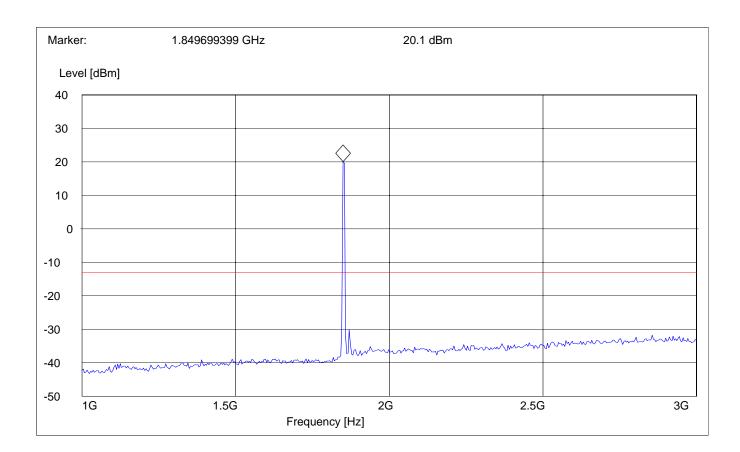



RADIATED SPURIOUS EMISSIONS


Tx @ 1851.25MHz: 3GHz – 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

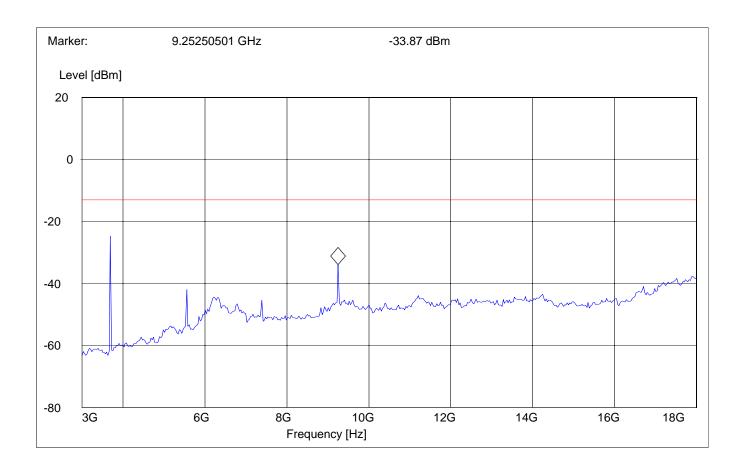



RADIATED SPURIOUS EMISSIONS

Tx @ 1880MHz: 1GHz – 3GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-3G"


Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

This plot is valid for all three models (worst-case plot)

Note: The peak above the limit line is the carrier freq. at ch-600.

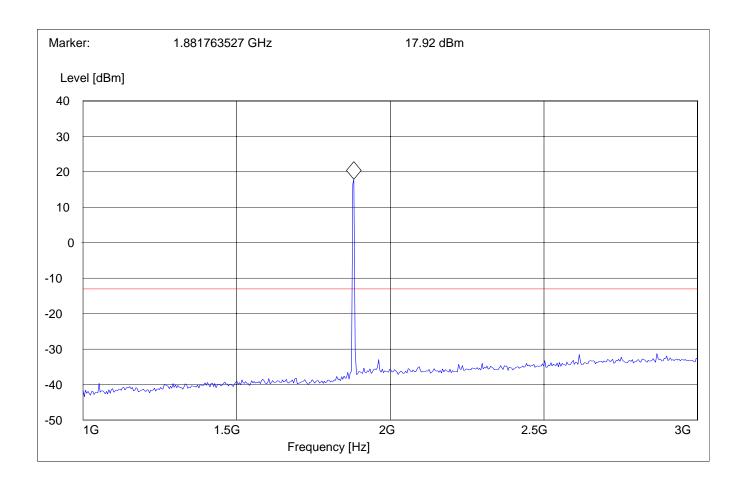



RADIATED SPURIOUS EMISSIONS


Tx @ 1880MHz: 3GHz - 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

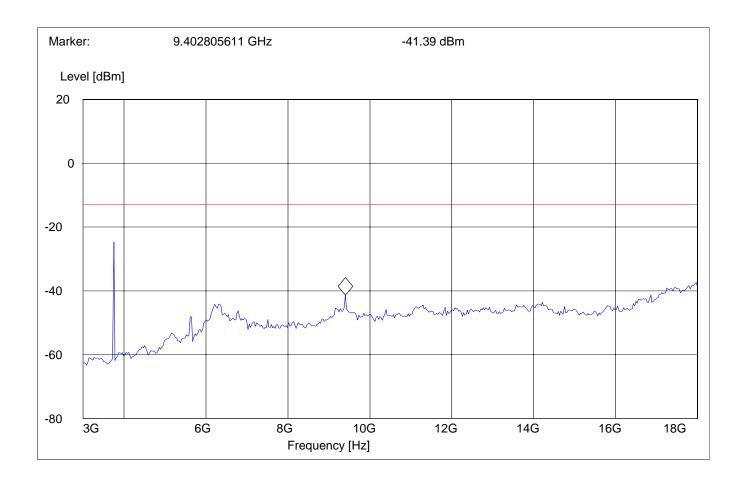



RADIATED SPURIOUS EMISSIONS

Tx @ 1908.75MHz: 1GHz – 3GHz

Spurious emission limit –13dBm


SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

Note: The peak above the limit line is the carrier freq. at ch-1175.

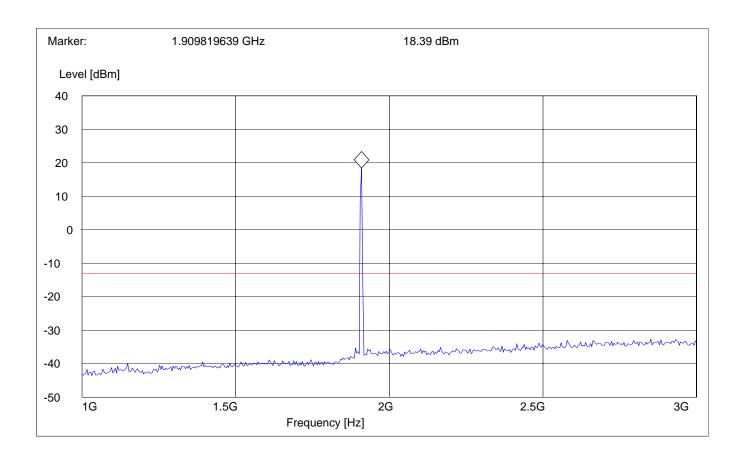



RADIATED SPURIOUS EMISSIONS


Tx @ 1908.75MHz: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

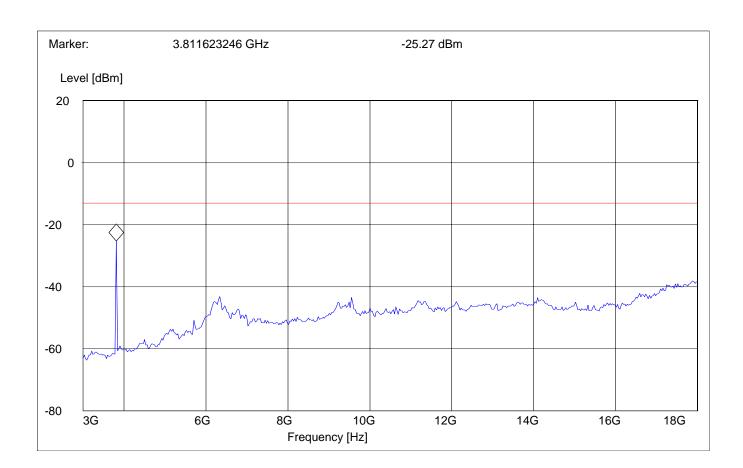



RADIATED SPURIOUS EMISSIONS

18GHz – 19.1GHz

Spurious emission limit –13dBm


SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

18GHz 19.1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

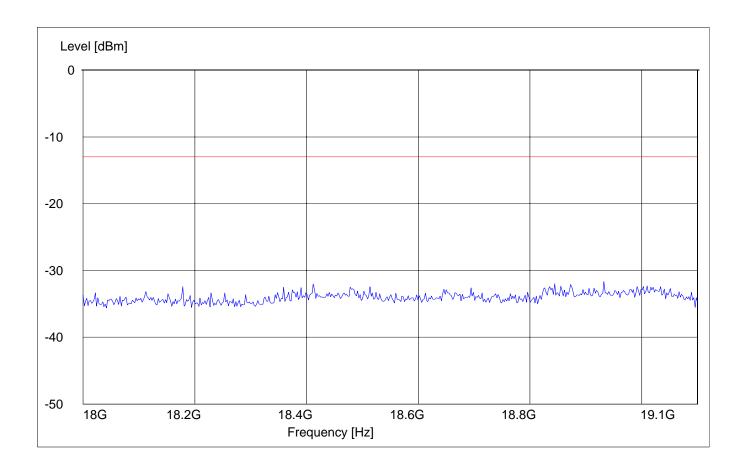



RESULTS OF RADIATED TESTS PCS-1900:

C3211 (Raven CDMA)

RADIATED SPURIOUS EMISSIONS


Tx @ 1851.25MHz: 1GHz – 3GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

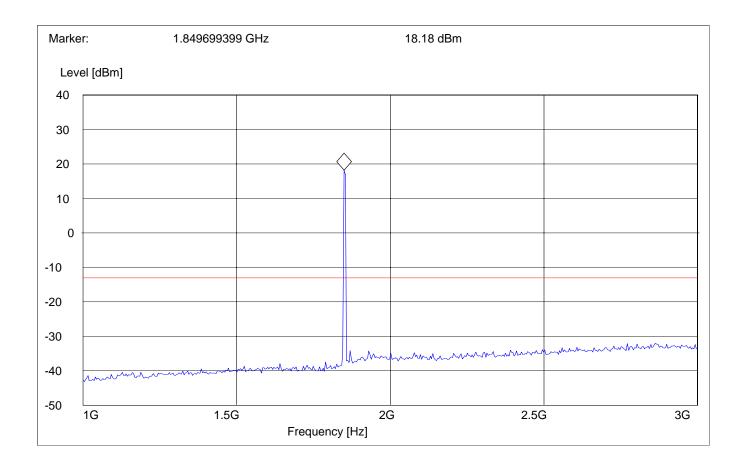



RADIATED SPURIOUS EMISSIONS


Tx @ 1851.25MHz: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

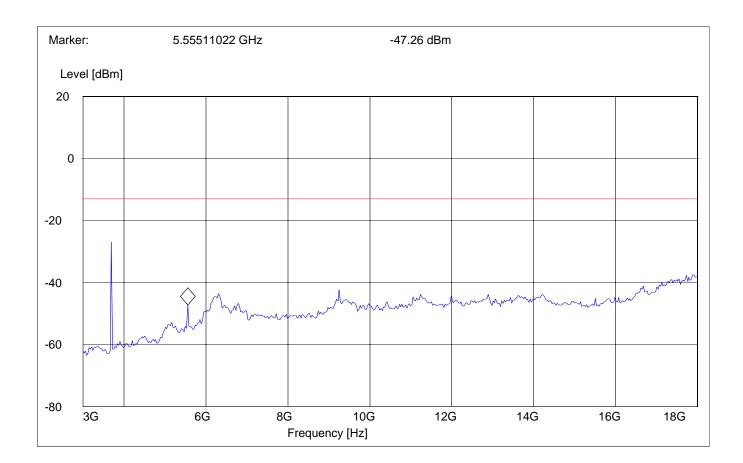




RADIATED SPURIOUS EMISSIONS

Tx @ 1880MHz: 1GHz – 3GHz Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

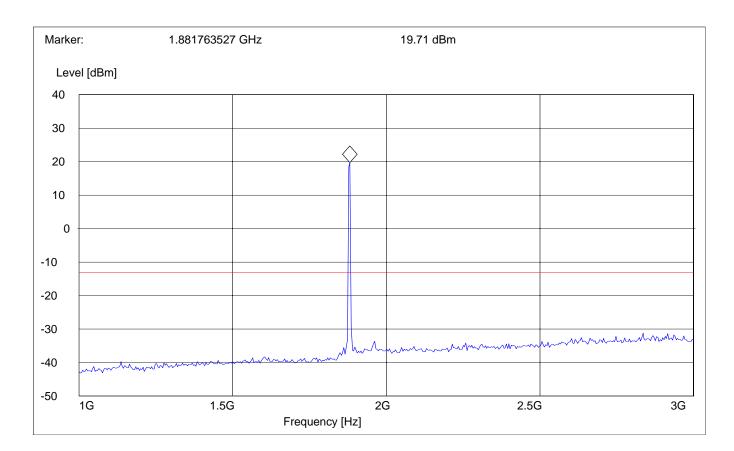



RADIATED SPURIOUS EMISSIONS


Tx @ 1880MHz: 3GHz – 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

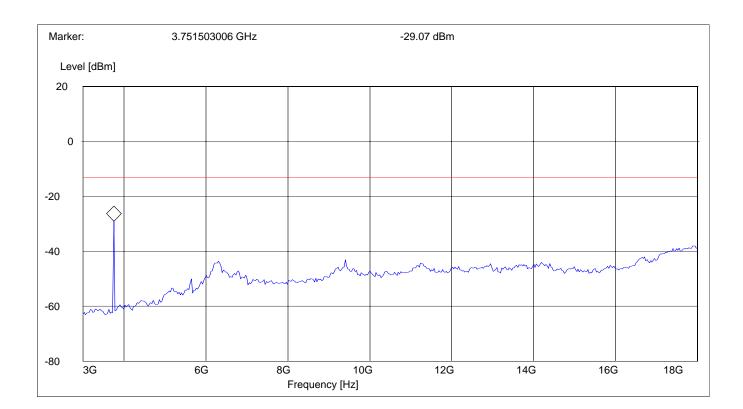



RADIATED SPURIOUS EMISSIONS


Tx @ 1908.75MHz: 1GHz – 3GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

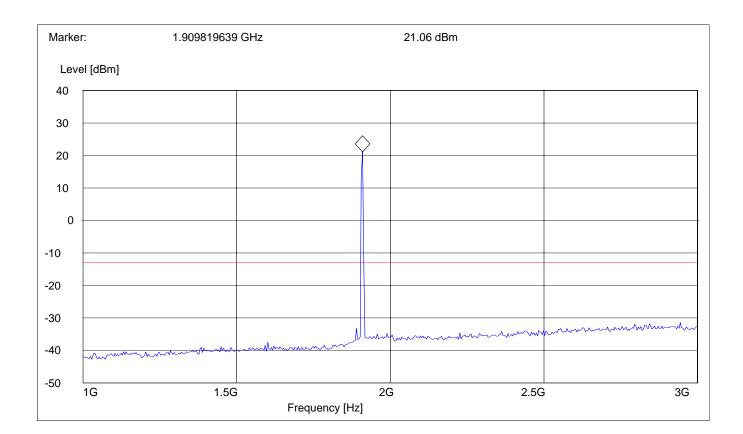



RADIATED SPURIOUS EMISSIONS


Tx @ 1908.75MHz: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

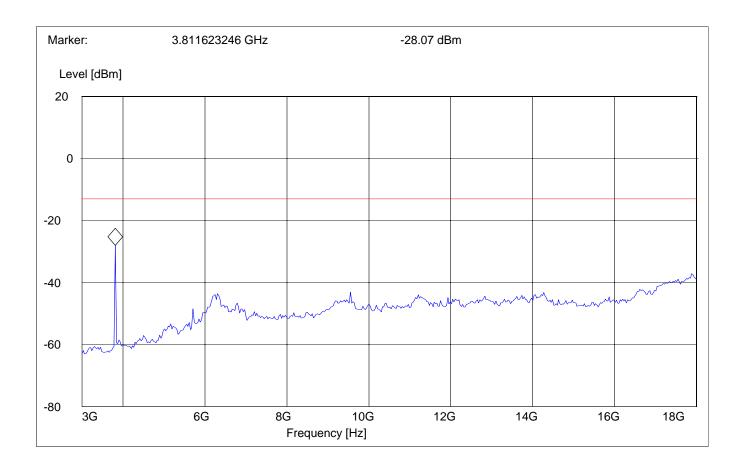



RADIATED SPURIOUS EMISSIONS

18GHz – 19.1GHz

Spurious emission limit -13dBm


SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

18GHz 19.1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

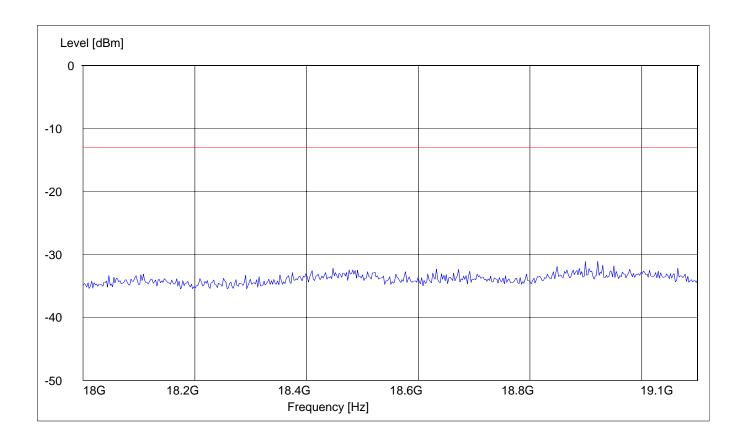



RESULTS OF RADIATED TESTS PCS-1900:

C3311 (PinPoint CDMA)

RADIATED SPURIOUS EMISSIONS

Tx @ 1851.25MHz: 1GHz - 3GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 1-3G"


Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

This plot is valid for all three models (worst-case plot)

Note: The peak above the limit line is the carrier freq. at ch-25.

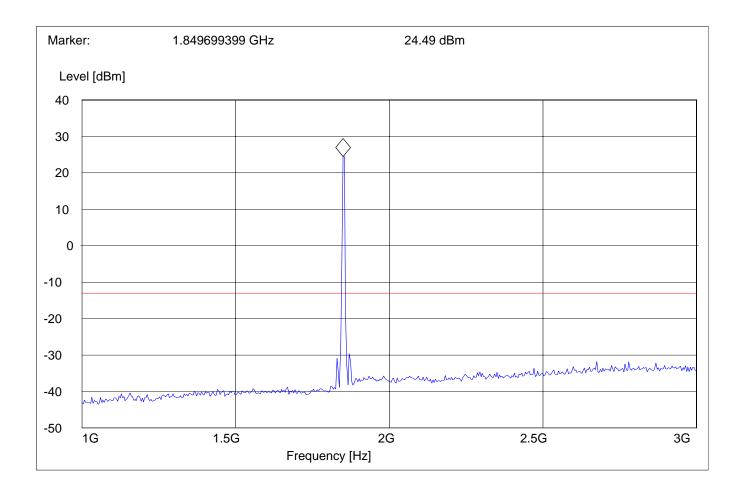



RADIATED SPURIOUS EMISSIONS


Tx @ 1851.25MHz: 3GHz - 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

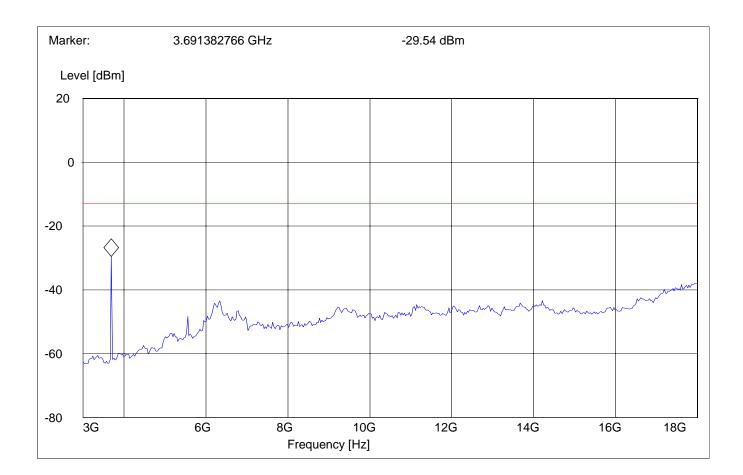



RADIATED SPURIOUS EMISSIONS

Tx @ 1880MHz: 1GHz – 3GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-3G"


Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

This plot is valid for all three models (worst-case plot)

Note: The peak above the limit line is the carrier freq. at ch-600.

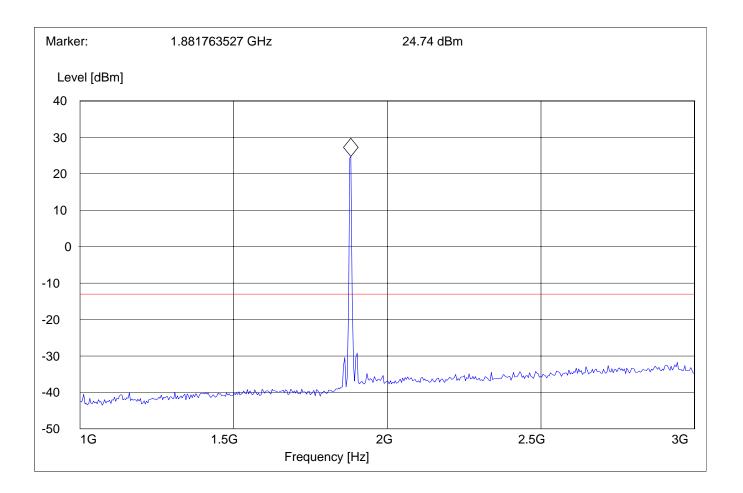



RADIATED SPURIOUS EMISSIONS


Tx @ 1880MHz: 3GHz - 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

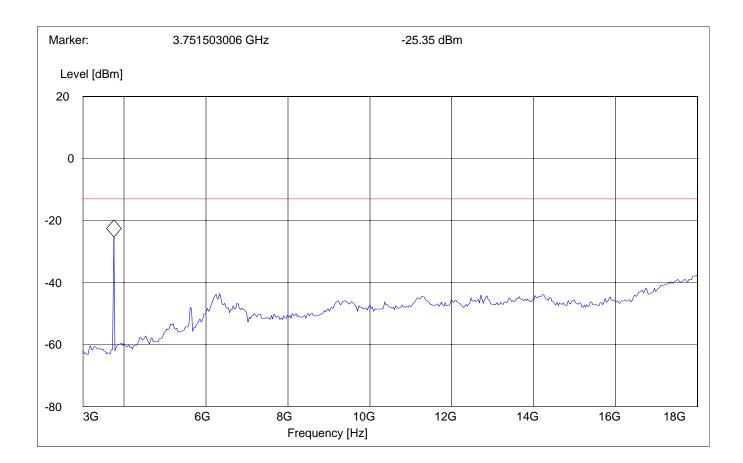



RADIATED SPURIOUS EMISSIONS

Tx @ 1908.75MHz: 1GHz – 3GHz

Spurious emission limit –13dBm


SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

Note: The peak above the limit line is the carrier freq. at ch-1175.

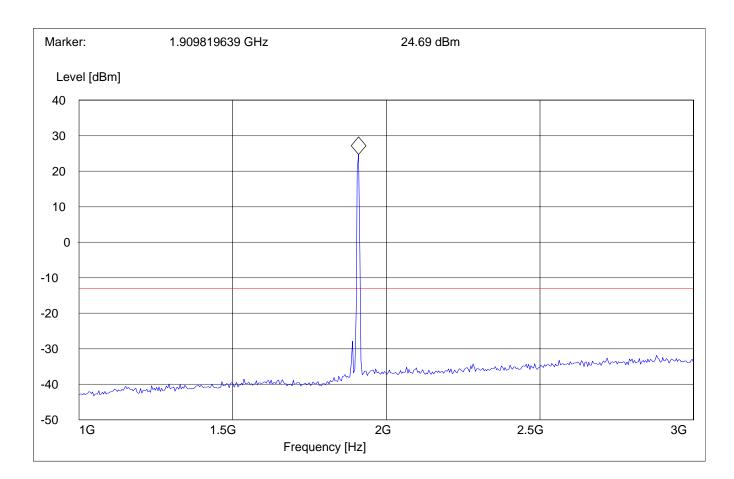



RADIATED SPURIOUS EMISSIONS


Tx @ 1908.75MHz: 3GHz - 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

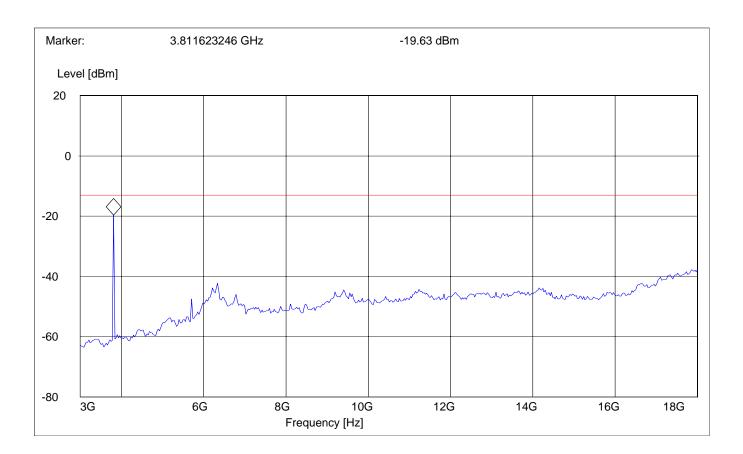



RADIATED SPURIOUS EMISSIONS

18GHz – 19.1GHz

Spurious emission limit –13dBm


SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

18GHz 19.1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

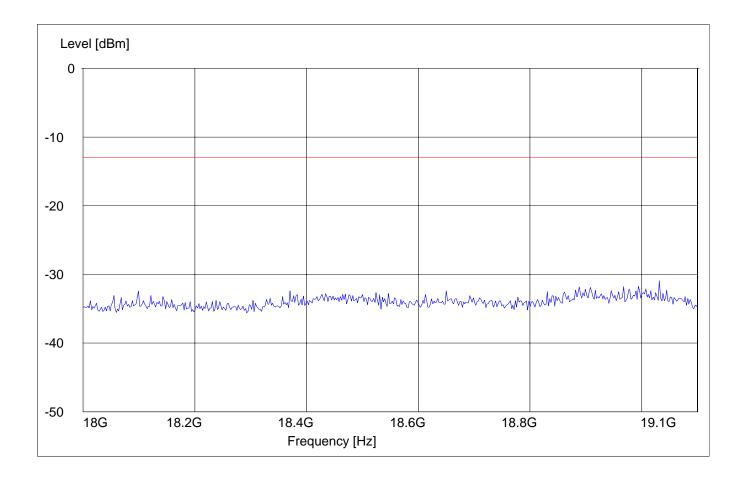



RADIATED SPURIOUS EMISSIONS (IDLE MODE)

Note: Plots under this section are valid for all three models for both 850/1900bands (worst-case

plots)

Antenna: vertical


EUT in Idle Mode: 30MHz - 1GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

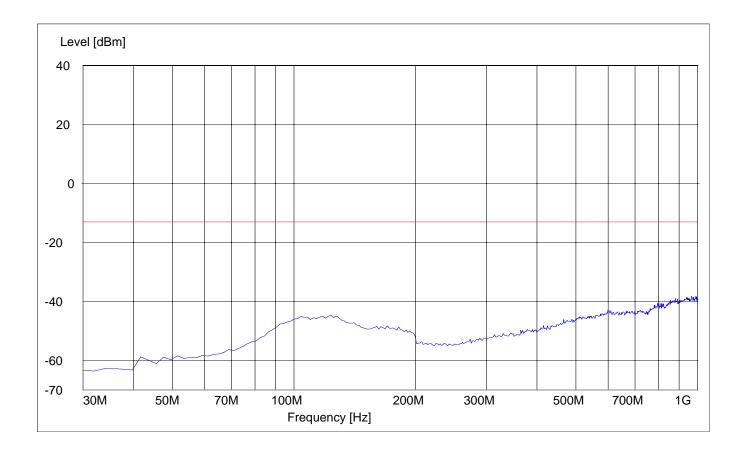



RADIATED SPURIOUS EMISSIONS (IDLE MODE)

Antenna: horizontal


EUT in Idle Mode: 30MHz - 1GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

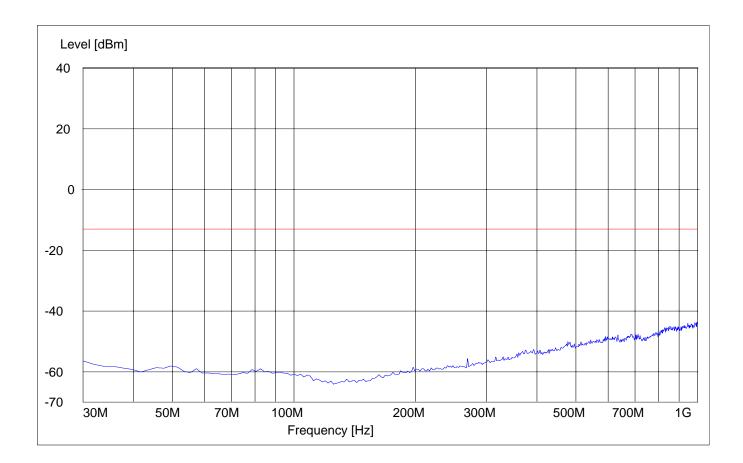



RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 1GHz – 3GHz


Spurious emission limit –13dBm

Marked peak is downlink from the base station

SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

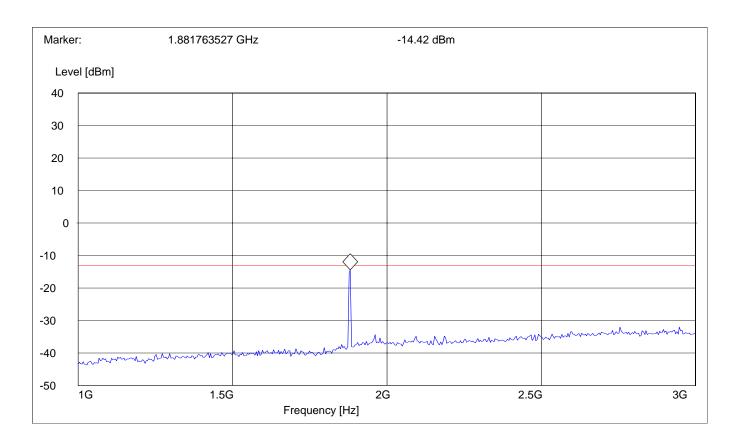



RADIATED SPURIOUS EMISSIONS


EUT in Idle Mode: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

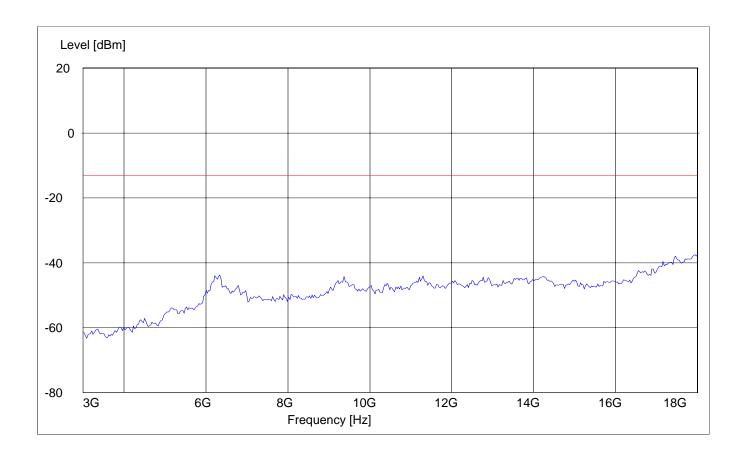




RADIATED SPURIOUS EMISSIONS EUT in Idle Mode: 18GHz – 19.1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

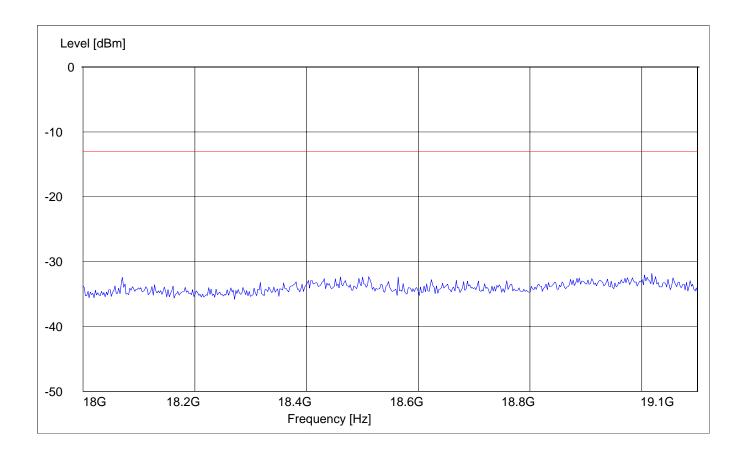



RECEIVER RADIATED EMISSIONS

§ 2.1053 / RSS-133

NOTE:

1) The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 19.1GHz very short cable connections to the antenna was used to minimize the noise level.

2) Plots under this section are valid for all three models (worst-case plots)

Limits

SUBCLAUSE § 15.209

| Frequency (MHz) | Field strength (μV/m) | Measurement distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |



RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 30MHz – 1GHz


Antenna: vertical

SWEEP TABLE: "FCC Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 100KHz

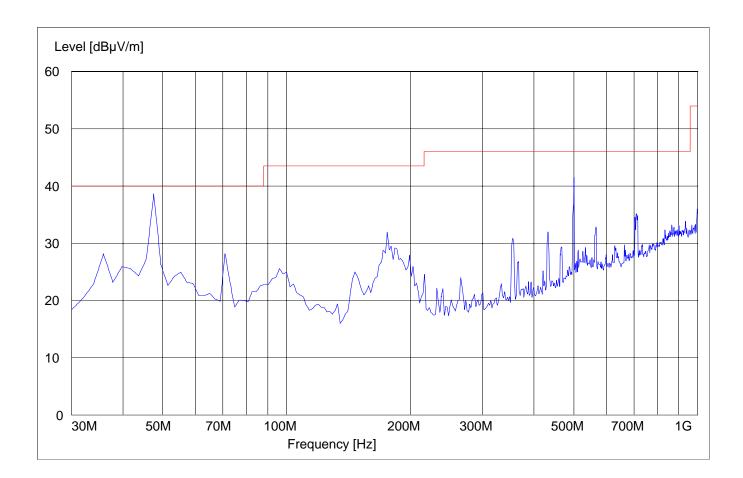



RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 30MHz – 1GHz

Antenna: horizontal


SWEEP TABLE: "FCC Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Time

Frequency Frequency

30MHz 1GHz Max Peak Coupled 100KHz

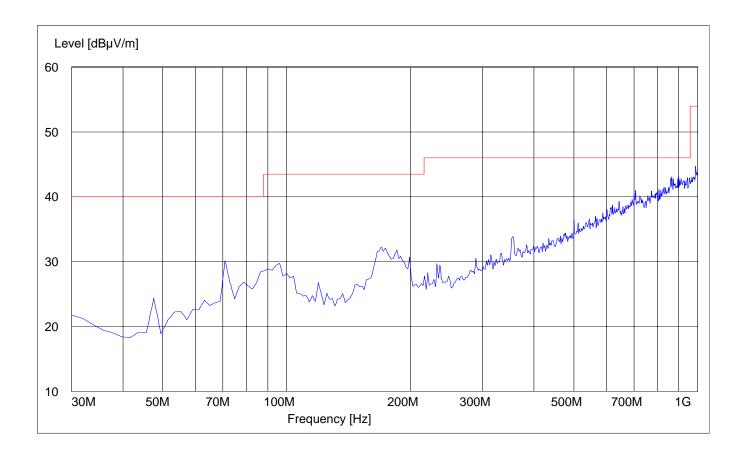



RECEIVER RADIATED EMISSIONS


EUT in Idle Mode: 1GHz – 3GHz

Marked peak is downlink from the base station

SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

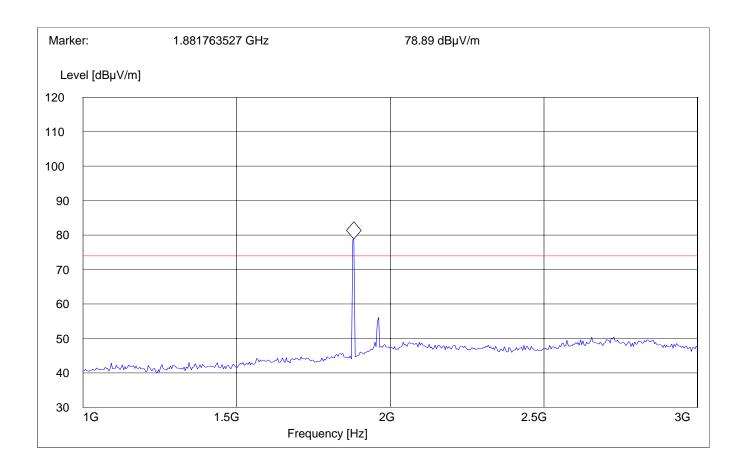




RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 3GHz – 18GHz

SWEEP TABLE: "FCC spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

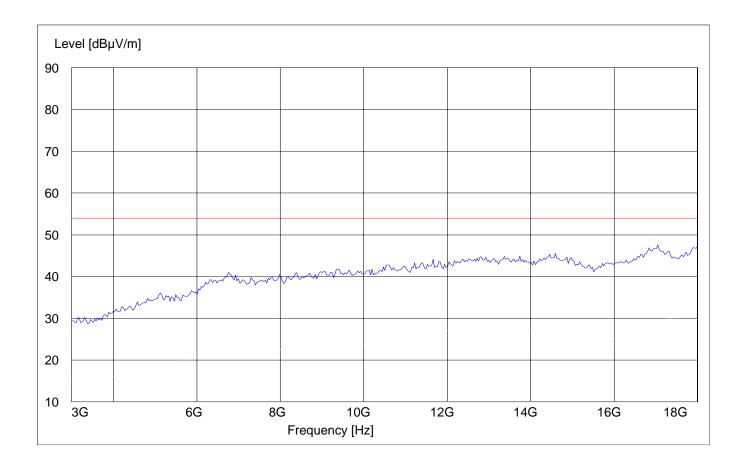




RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 18GHz – 19.1GHz

SWEEP TABLE: "FCC spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

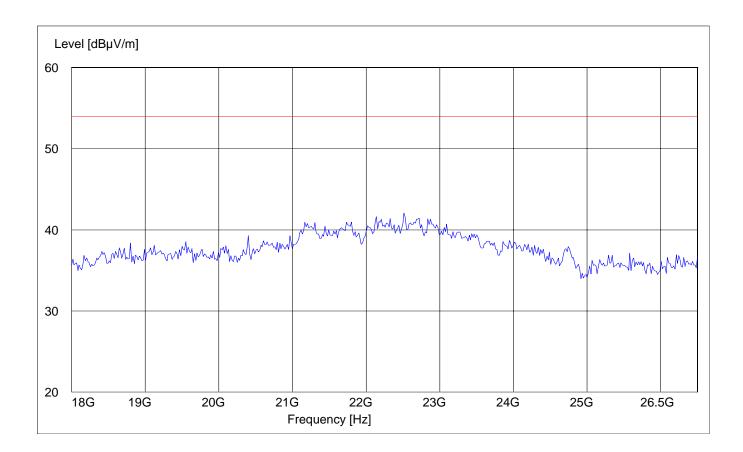



CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter plugged in LISN


Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

| Frequency of Emission (MHz) | Conducted Limit (dBµV) | | | | |
|---|------------------------|-----------|--|--|--|
| | Quasi-Peak | Average | | | |
| 0.15 - 0.5 | 66 to 56* | 56 to 46* | | | |
| 0.5 - 5 | 56 | 46 | | | |
| 5 – 30 | 60 | 50 | | | |
| * Decreases with logarithm of the frequency | | | | | |

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

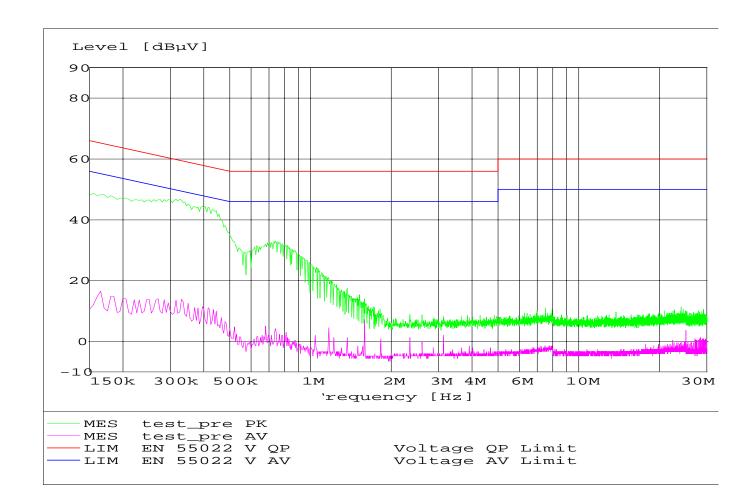



TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

| No | Instrument/Ancillary | Type | Manufacturer | Serial No. |
|----|------------------------------|--------------|-----------------|--------------|
| 01 | Spectrum Analyzer | ESIB 40 | Rohde & Schwarz | 100107 |
| 02 | Spectrum Analyzer | FSEM 30 | Rohde & Schwarz | 826880/010 |
| 03 | Signal Generator | SMY02 | Rohde & Schwarz | 836878/011 |
| 04 | Power-Meter | NRVD | Rohde & Schwarz | 0857.8008.02 |
| 05 | Biconilog Antenna | 3141 | EMCO | 0005-1186 |
| 06 | Horn Antenna (1-18GHz) | SAS-200/571 | AH Systems | 325 |
| 07 | Horn Antenna (18-26.5GHz) | 3160-09 | EMCO | 1240 |
| 08 | Power Splitter | 11667B | Hewlett Packard | 645348 |
| 09 | Climatic Chamber | VT4004 | Voltsch | G1115 |
| 10 | High Pass Filter | 5HC2700 | Trilithic Inc. | 9926013 |
| 11 | High Pass Filter | 4HC1600 | Trilithic Inc. | 9922307 |
| 12 | Pre-Amplifier | JS4-00102600 | Miteq | 00616 |
| 13 | Power Sensor | URV5-Z2 | Rohde & Schwarz | DE30807 |
| 14 | Digital Radio Comm. Tester | CMD-55 | Rohde & Schwarz | 847958/008 |
| 15 | Universal Radio Comm. Tester | CMU 200 | Rohde & Schwarz | 832221/06 |



BLOCK DIAGRAMS Radiated Testing

ANECHOIC CHAMBER

