

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_left_ch661_chek

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.2, 5.2, 5.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 21.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.640 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.634 mW/g

Peak SAR (extrapolated) = 0.907 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.331 mW/g

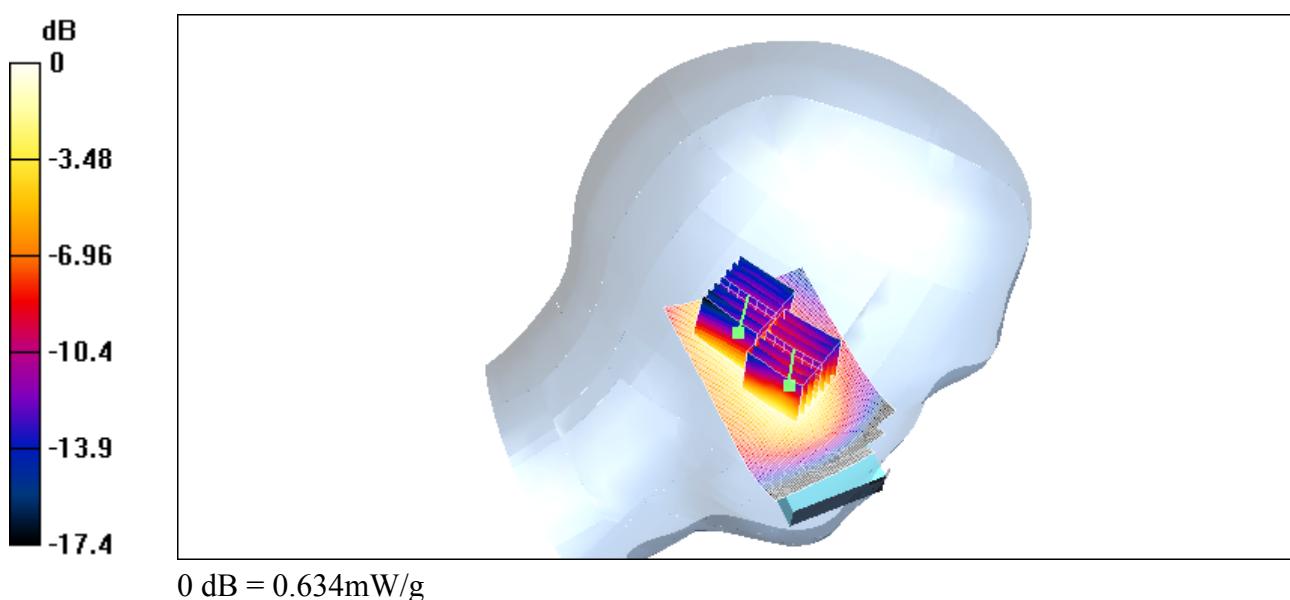

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_left_ch661_tilted

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.2, 5.2, 5.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 20.8 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.570 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.558 mW/g

Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.280 mW/g

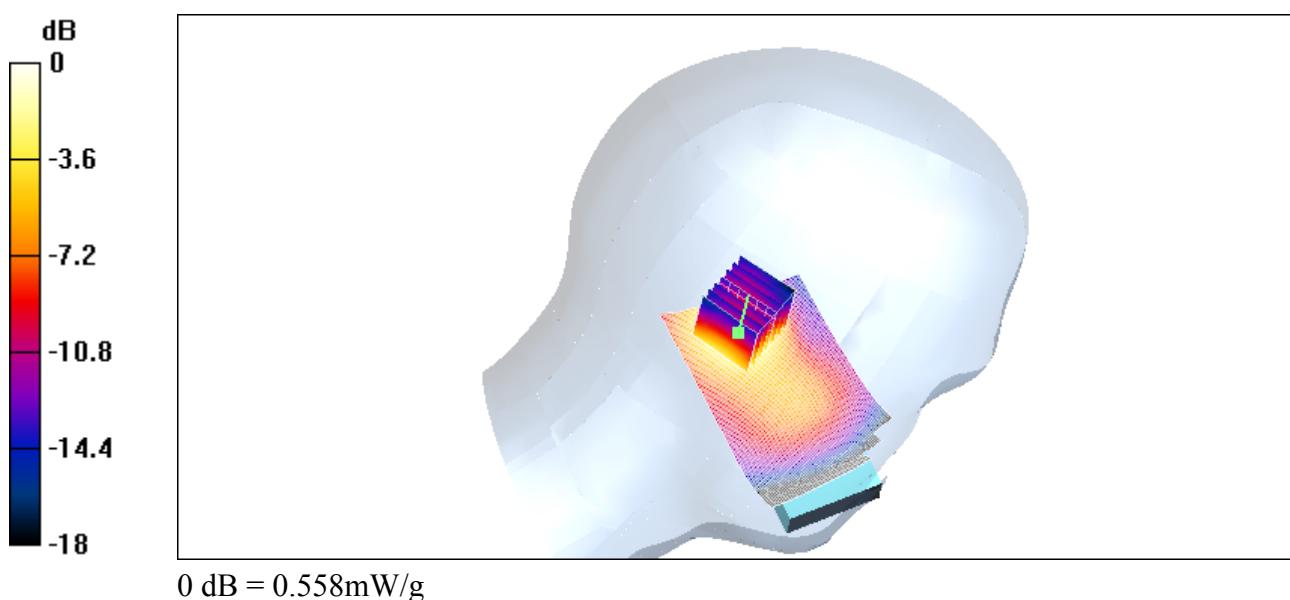

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_right_ch661_cheek

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.2, 5.2, 5.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x111x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 20.4 V/m; Power Drift = -0.02 dB

Maximum value of SAR (interpolated) = 0.733 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.02 dB

Maximum value of SAR (measured) = 0.734 mW/g

Peak SAR (extrapolated) = 1.1 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.353 mW/g

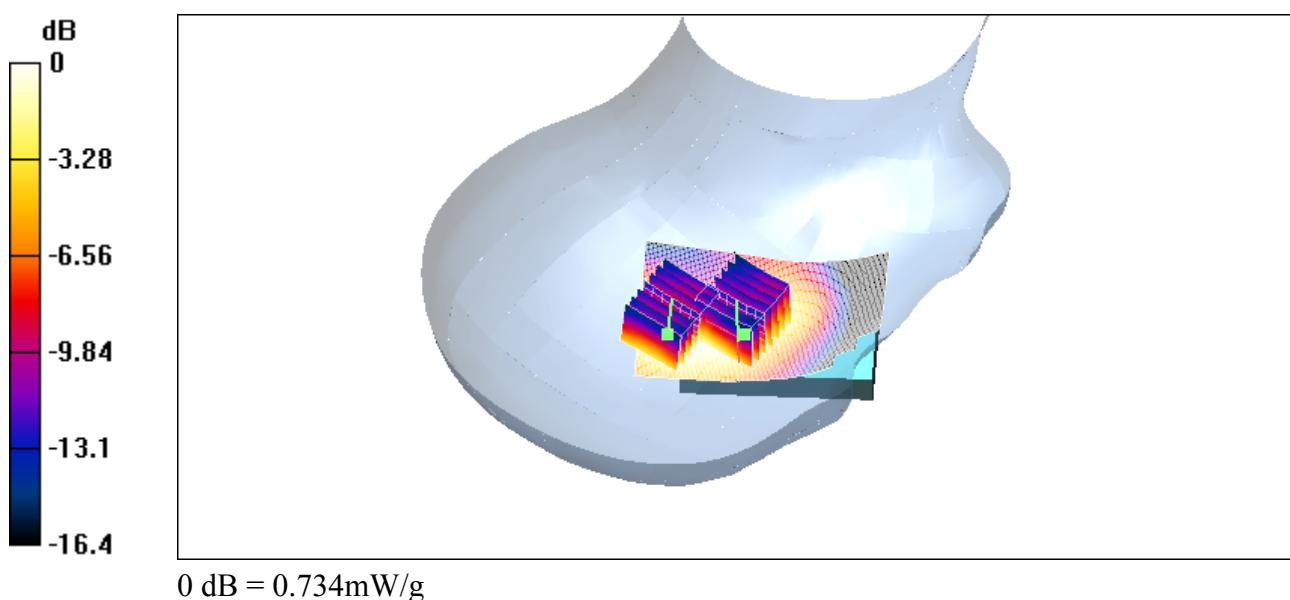

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_right_ch661_tilted

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.2, 5.2, 5.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x111x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 22.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.684 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.662 mW/g

Peak SAR (extrapolated) = 0.941 W/kg

SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.329 mW/g

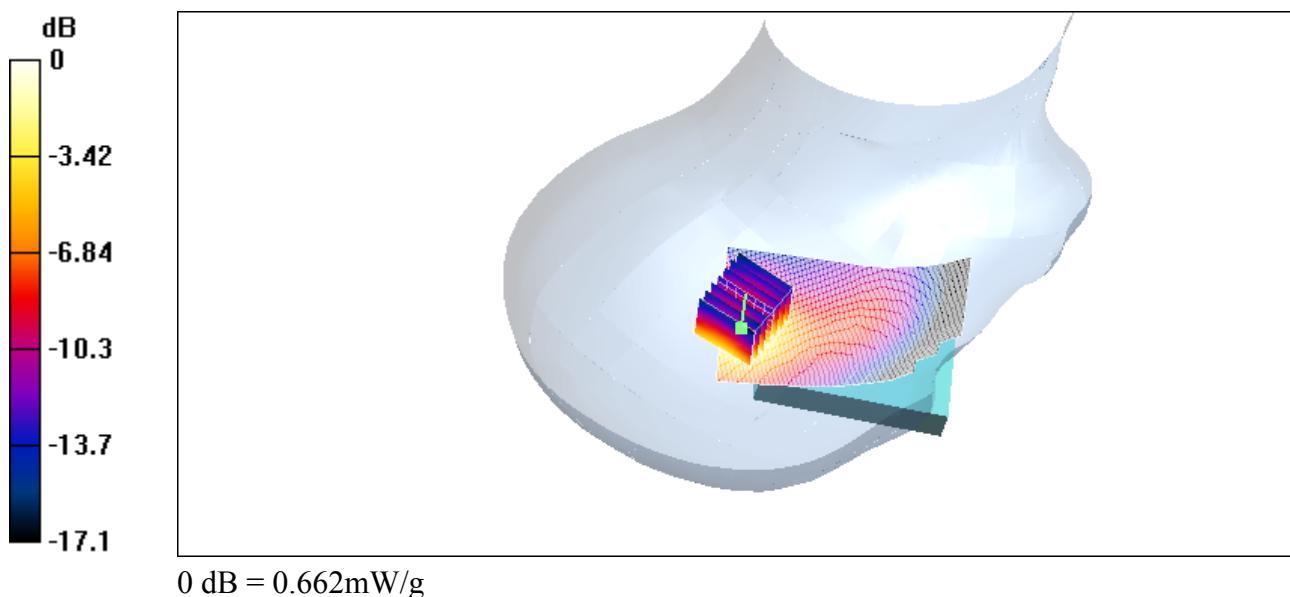

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_right_ch512_cheek

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.2, 5.2, 5.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 18.9 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.665 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.9 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.687 mW/g

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.332 mW/g

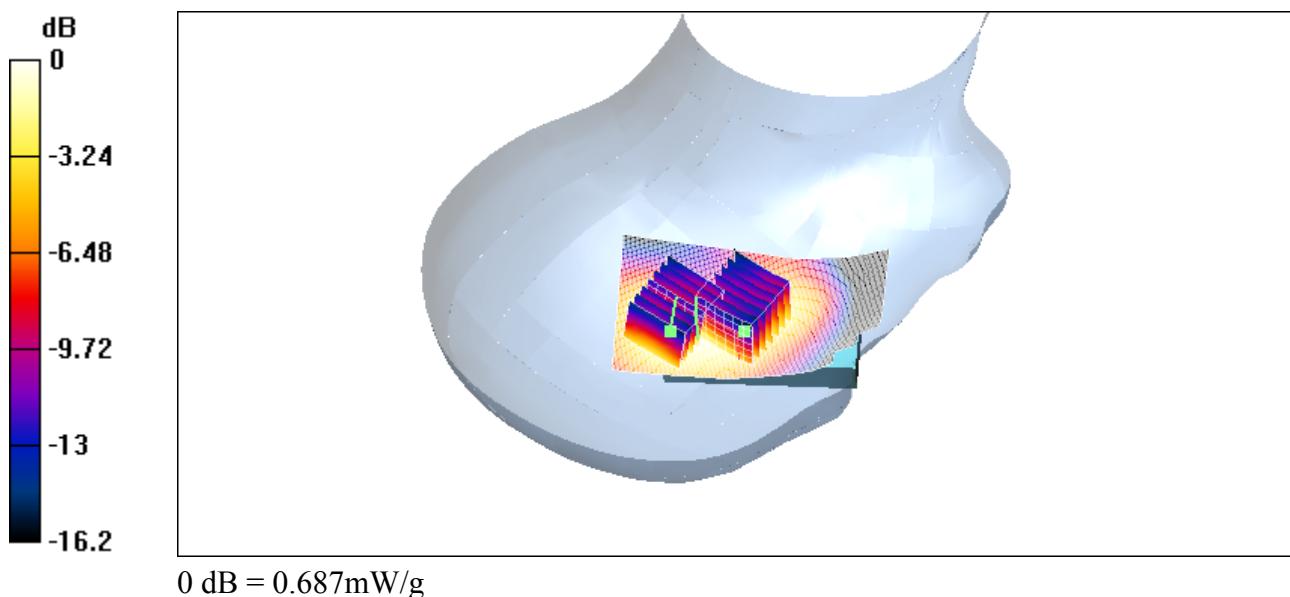

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_right_ch810_cheek

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used (interpolated): $f = 1909.8 \text{ MHz}$; $\sigma = 1.43$

mho/m ; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.2, 5.2, 5.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 17.4 V/m; Power Drift = -0.02 dB

Maximum value of SAR (interpolated) = 0.562 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.4 V/m; Power Drift = -0.02 dB

Maximum value of SAR (measured) = 0.576 mW/g

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.281 mW/g

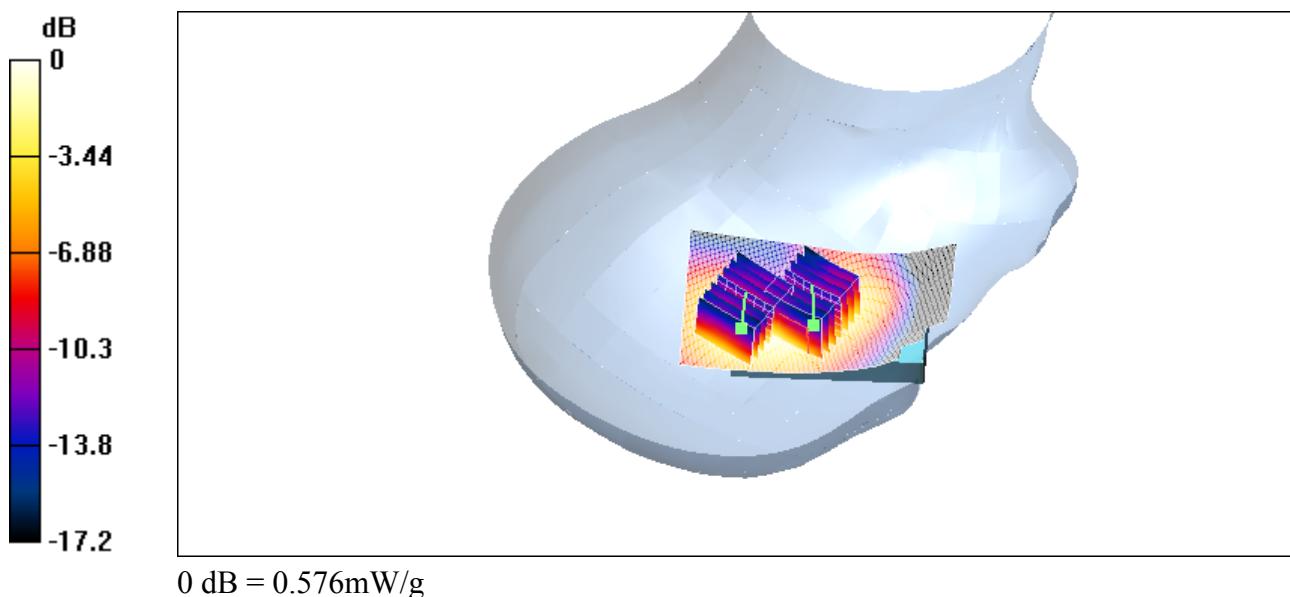

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch661_front

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.6, 4.6, 4.6); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 9.46 V/m; Power Drift = -0.02 dB

Maximum value of SAR (interpolated) = 0.140 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.46 V/m; Power Drift = -0.02 dB

Maximum value of SAR (measured) = 0.137 mW/g

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.126 mW/g; SAR(10 g) = 0.079 mW/g

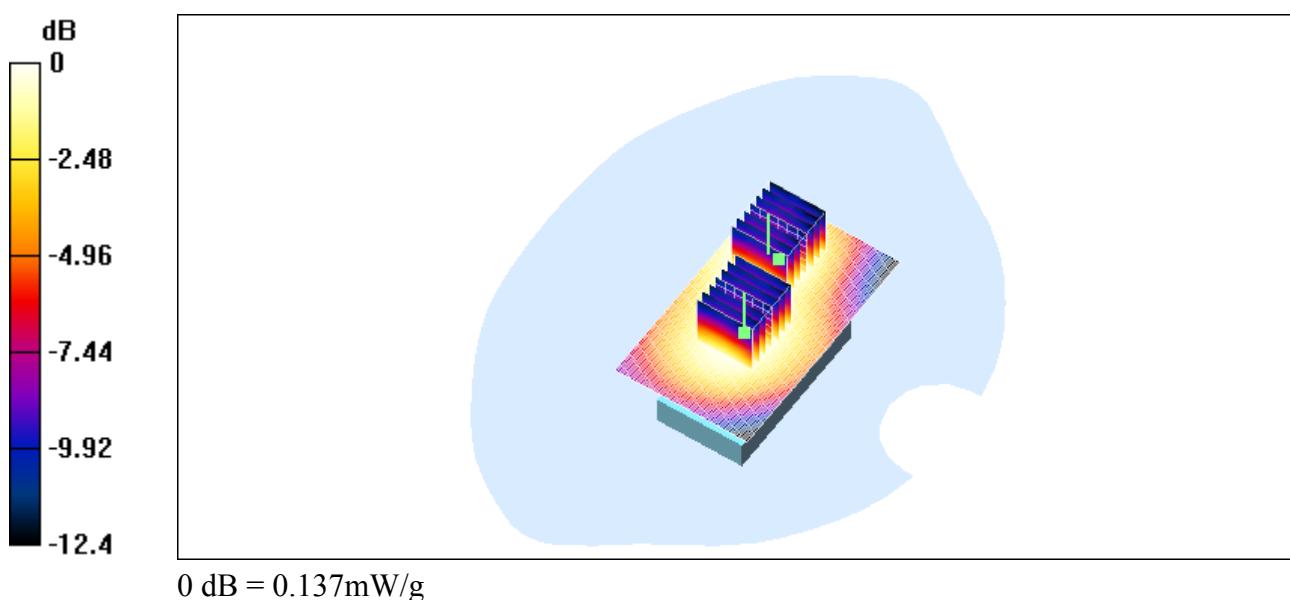

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch661_back

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.6, 4.6, 4.6); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 12.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 1.1 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 1.06 mW/g

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.936 mW/g; SAR(10 g) = 0.501 mW/g

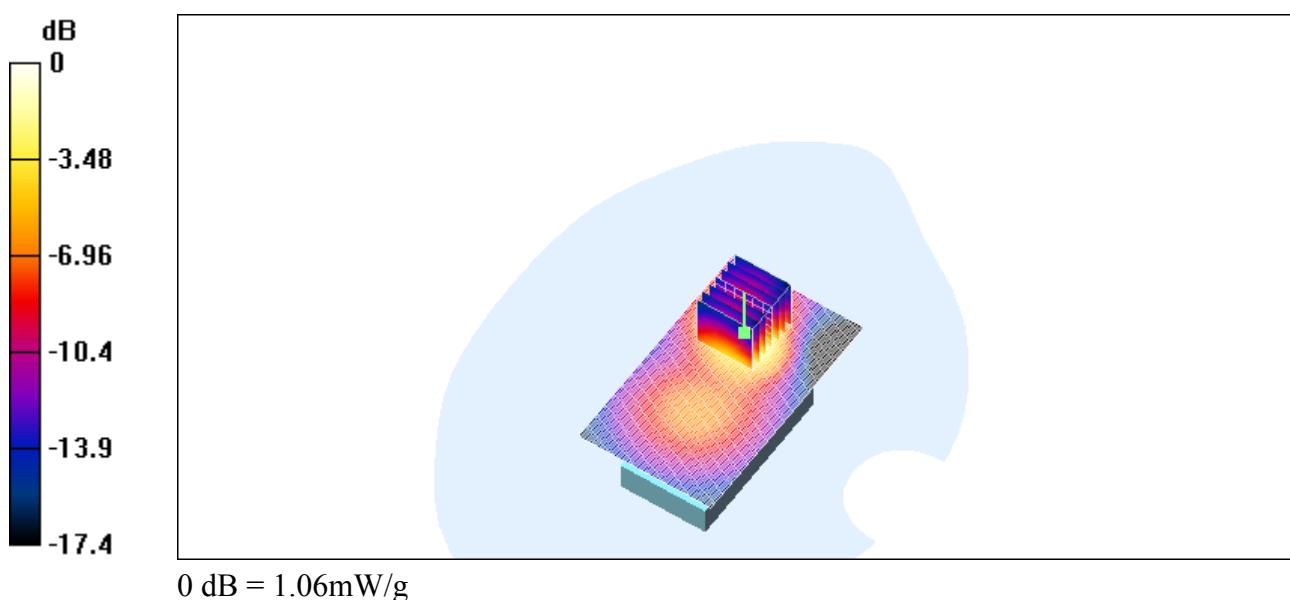

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch512_back

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.6, 4.6, 4.6); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 11.9 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 1.06 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.9 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.02 mW/g

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.917 mW/g; SAR(10 g) = 0.492 mW/g

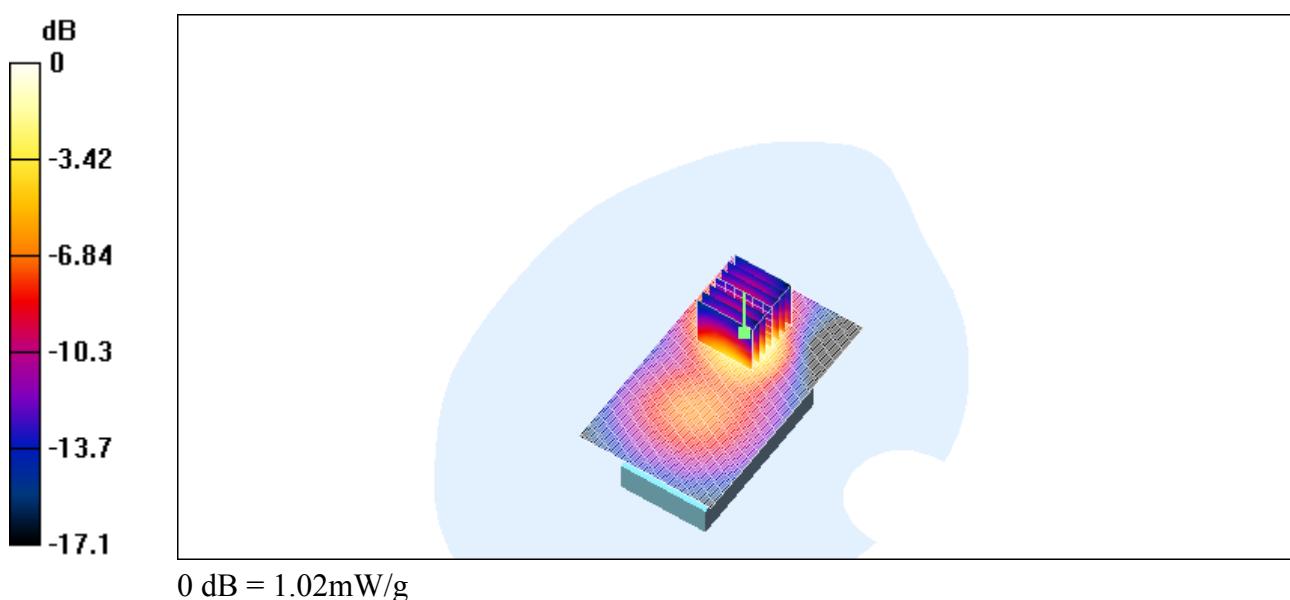

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

1900_flat_ch810_back

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1909.8 \text{ MHz}$; $\sigma = 1.59 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.6, 4.6, 4.6); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 12.3 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 1.05 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.3 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 1.04 mW/g

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.931 mW/g; SAR(10 g) = 0.496 mW/g

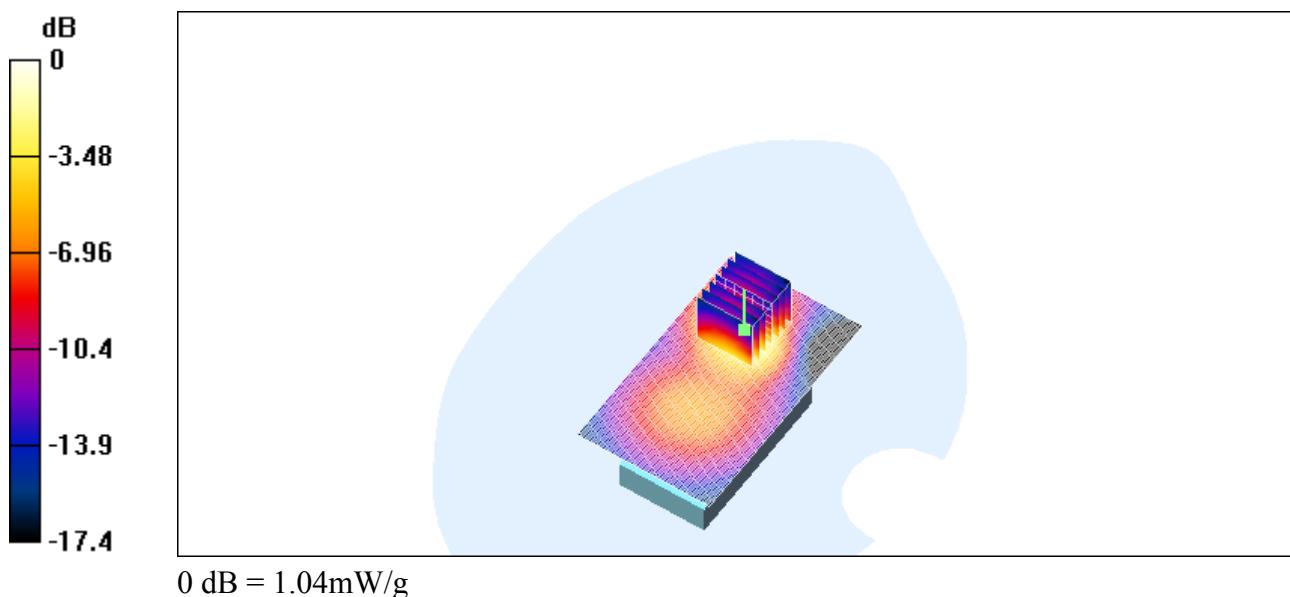

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

Z-axis scan

DUT: GPRS Dual-Band(GSM850/PCS1900)Handset Phase II+; Type: ---; Serial: EB-X100U

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.6, 4.6, 4.6); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

EB_X100U/Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 1.1 mW/g


EB_X100U/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 1.06 mW/g

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.936 mW/g; SAR(10 g) = 0.501 mW/g

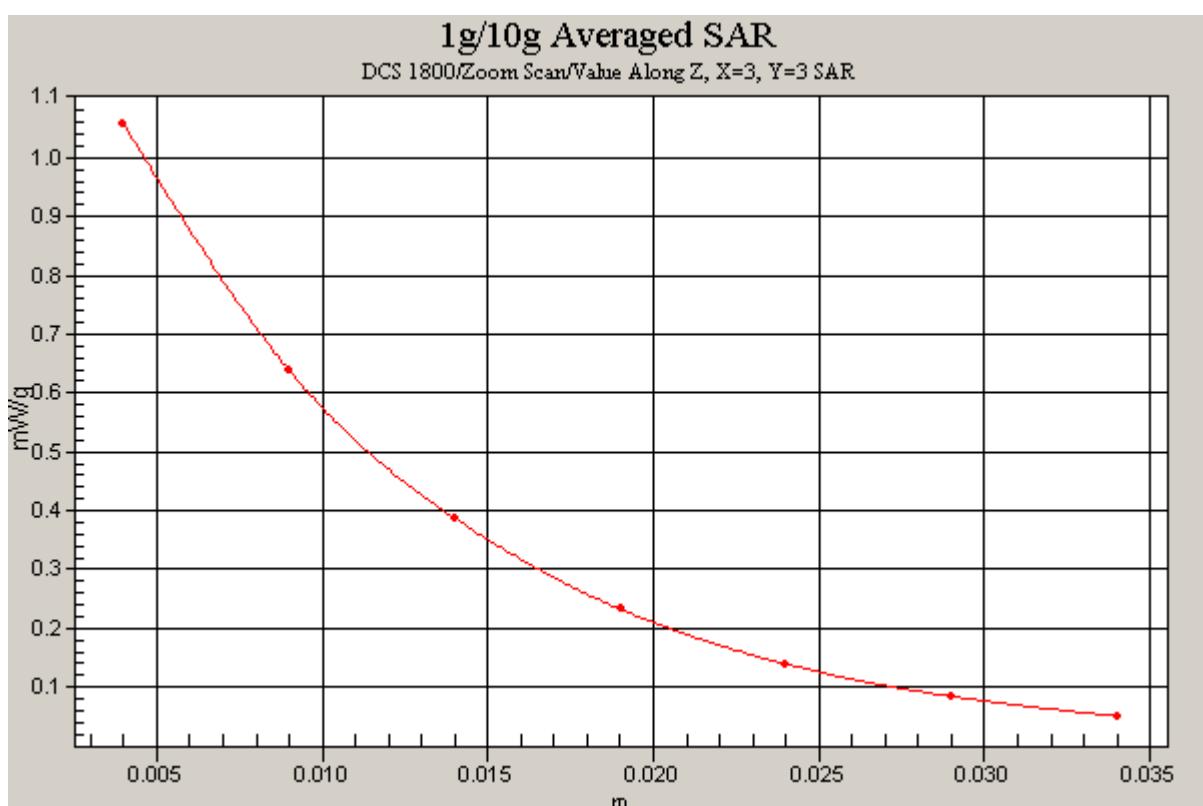

Appendix C


Pictures

Appendix



C. Pictures




ELECTRONIC TECHNOLOGY SYSTEMS DR.GENZ GMBH




ELECTRONIC TECHNOLOGY SYSTEMS DR.GENZ GMBH

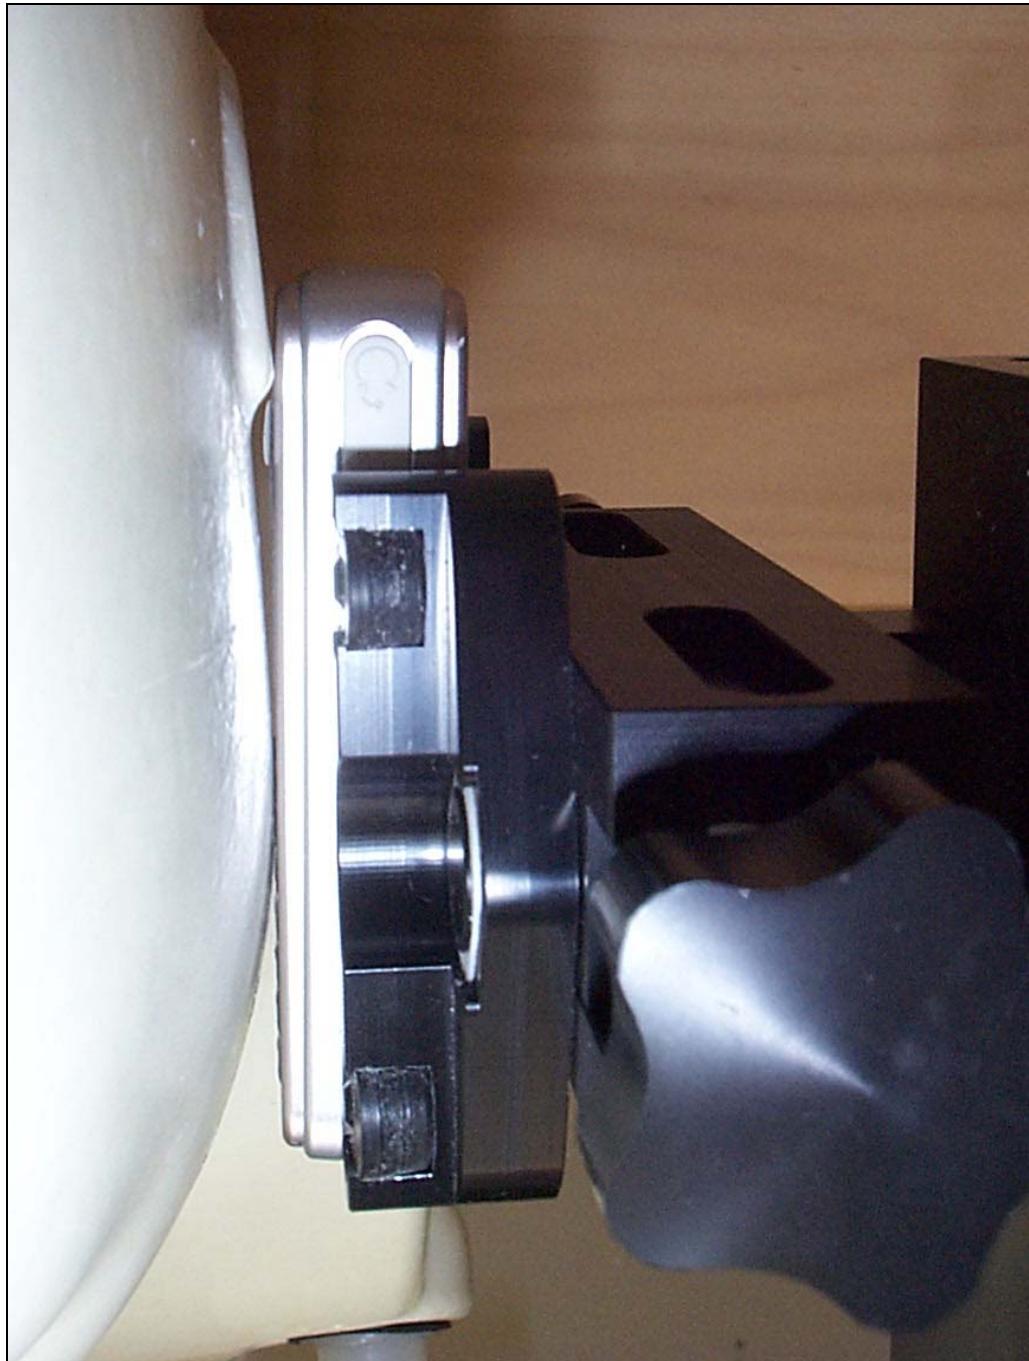


ELECTRONIC TECHNOLOGY SYSTEMS DR.GENZ GMBH



ELECTRONIC TECHNOLOGY SYSTEMS DR.GENZ GMBH



ELECTRONIC TECHNOLOGY SYSTEMS DR.GENZ GMBH






Spacing from flat phantom was adjusted at 1.5 cm.




Spacing from flat phantom was adjusted at 1.5 cm.


Valid 900

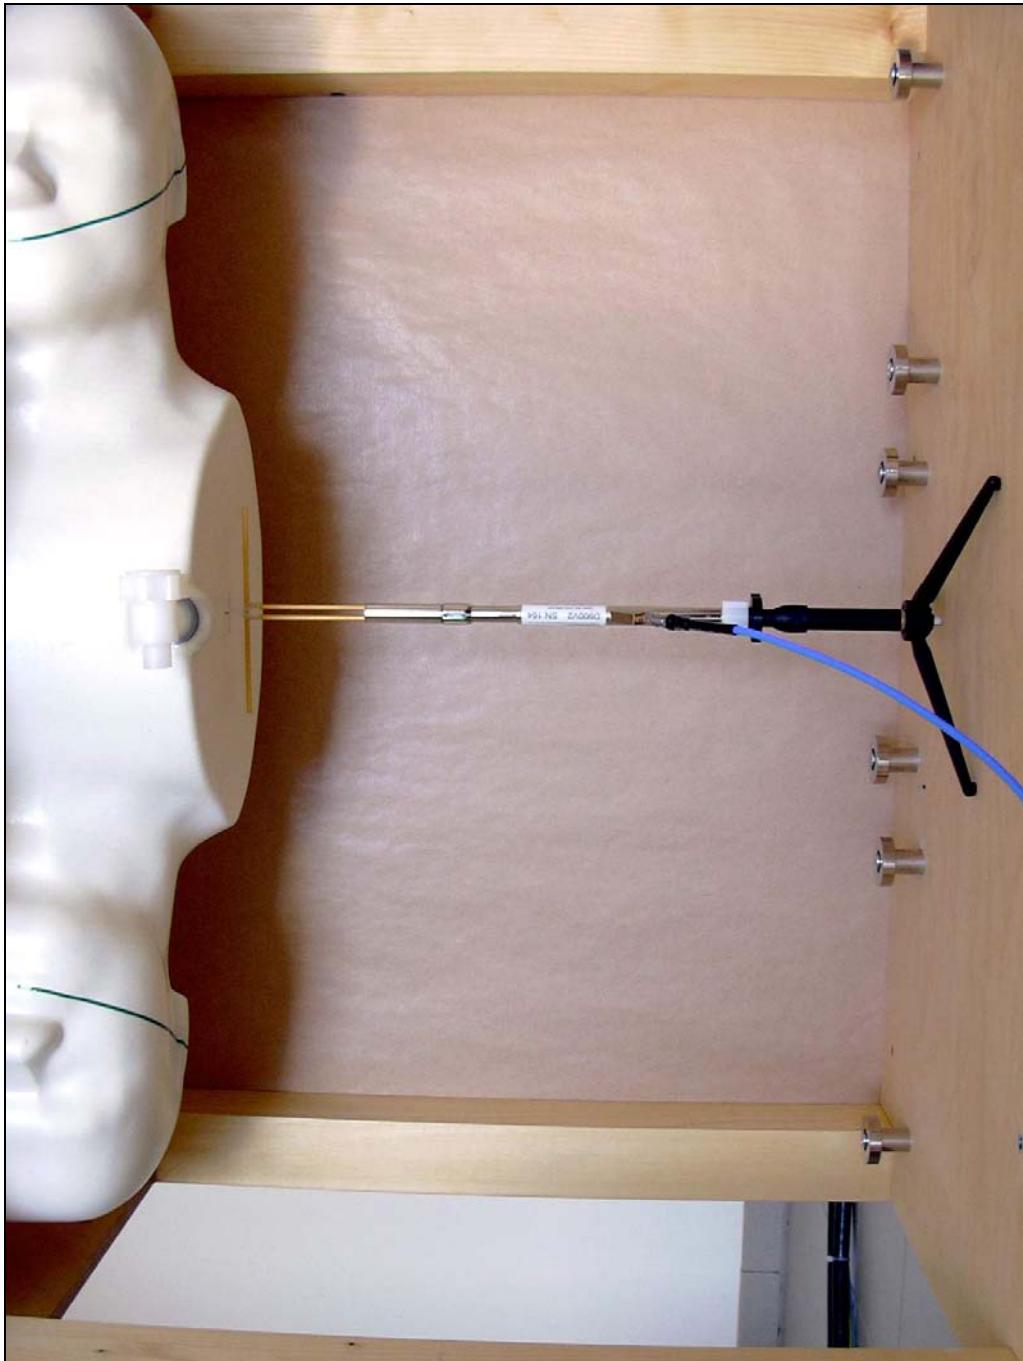

Liquid 900

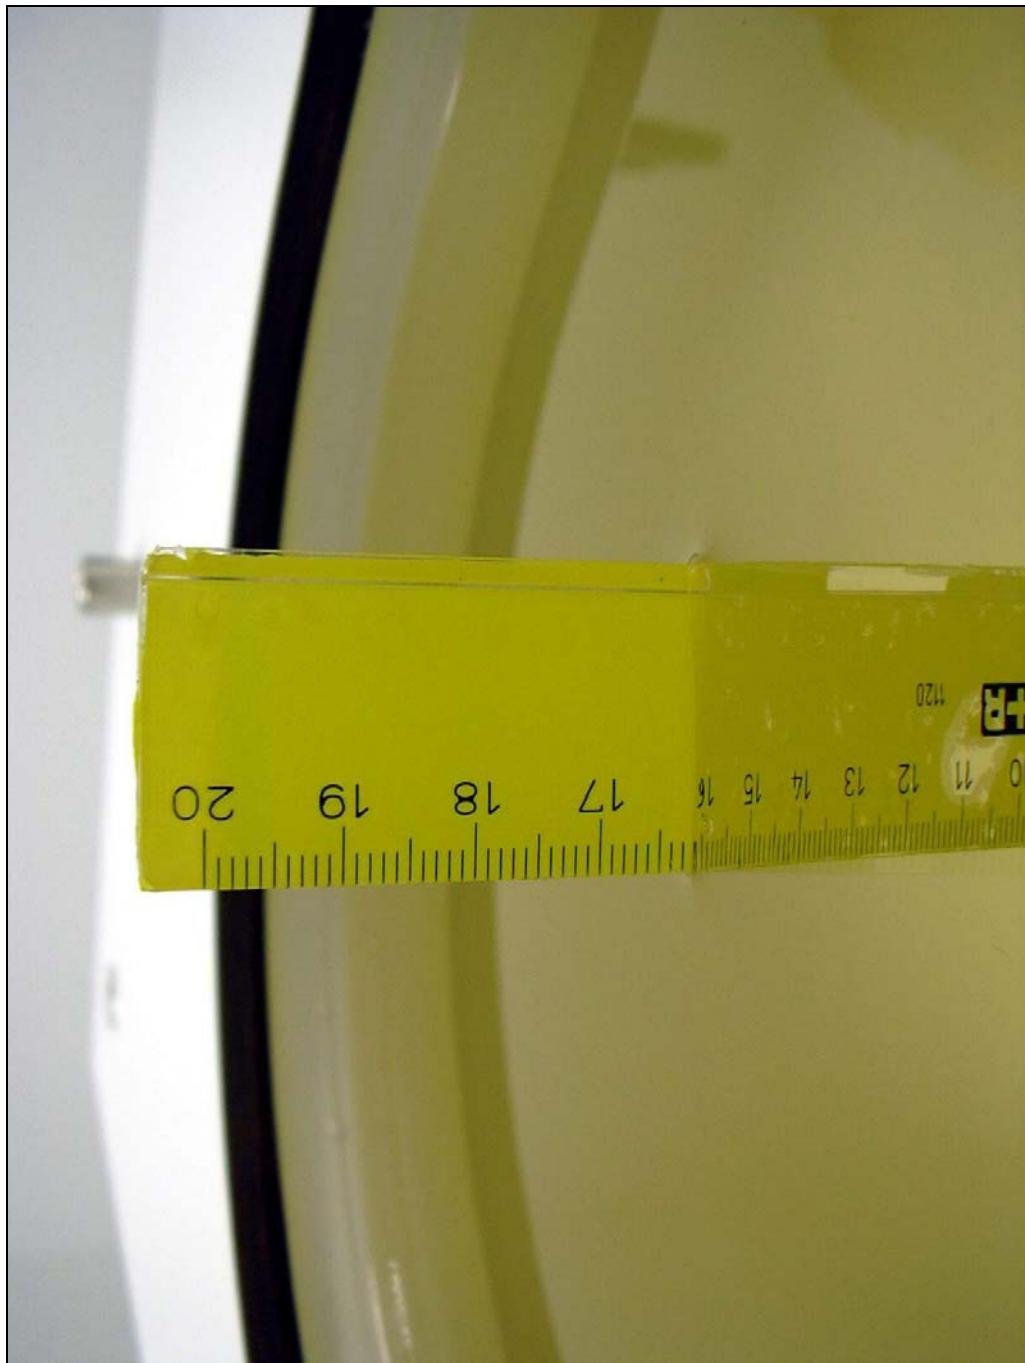

Valid 1900

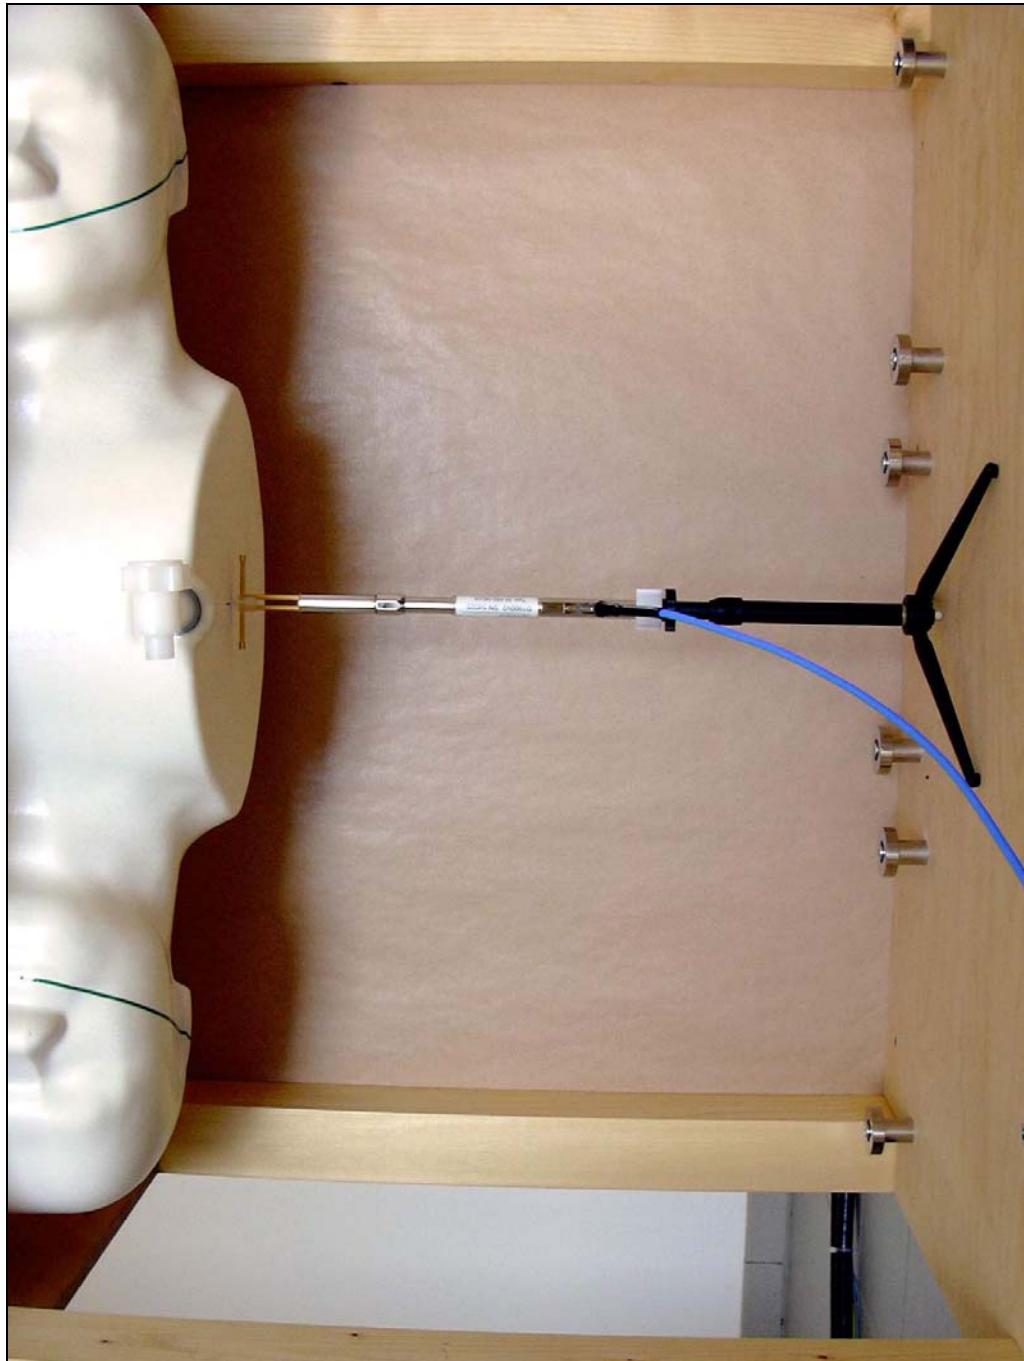

Liquid 1900

