





- Test Mode : Mode 2
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

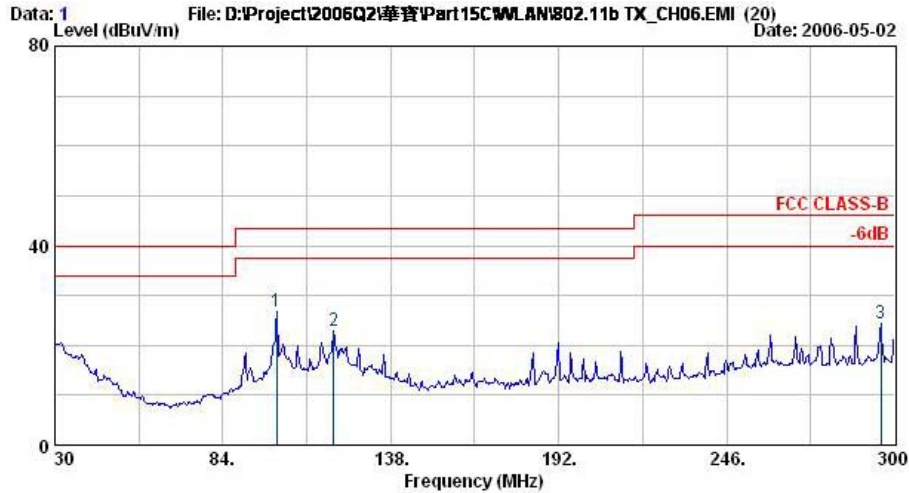


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11b TX CH06\_2437MHz  
 Plane :

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	101.28	26.89	-16.61	43.50	45.95	QP	-19.07
2 @	119.64	23.01	-20.49	43.50	39.99	QP	-16.98
3 @	295.68	24.29	-21.71	46.00	39.19	QP	-14.90

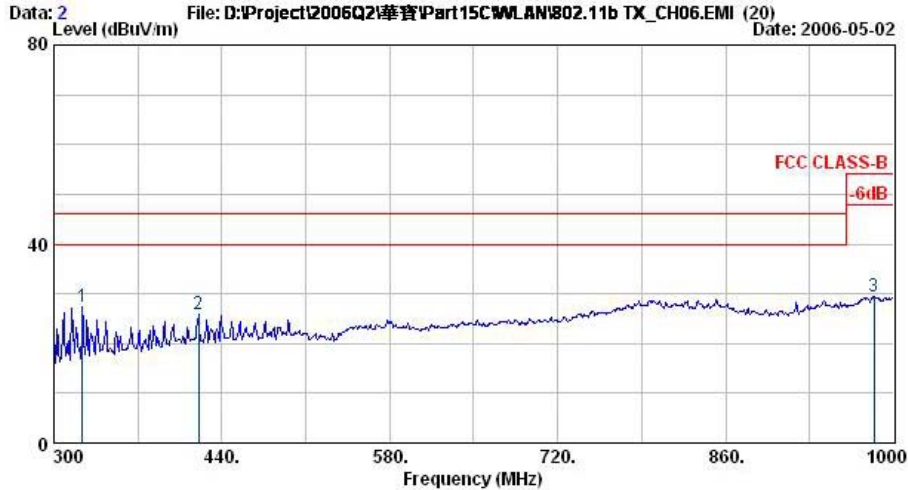

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W/1A)  
 Model : UPA2  
 Memo : 802.11b TX CH06\_2437MHz  
 Plane :


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	323.80	27.30	-18.70	46.00	41.22	QP	-13.92
2 @	420.40	25.93	-20.07	46.00	36.61	QP	-10.69
3 @	983.90	29.48	-24.52	54.00	31.21	QP	-1.73

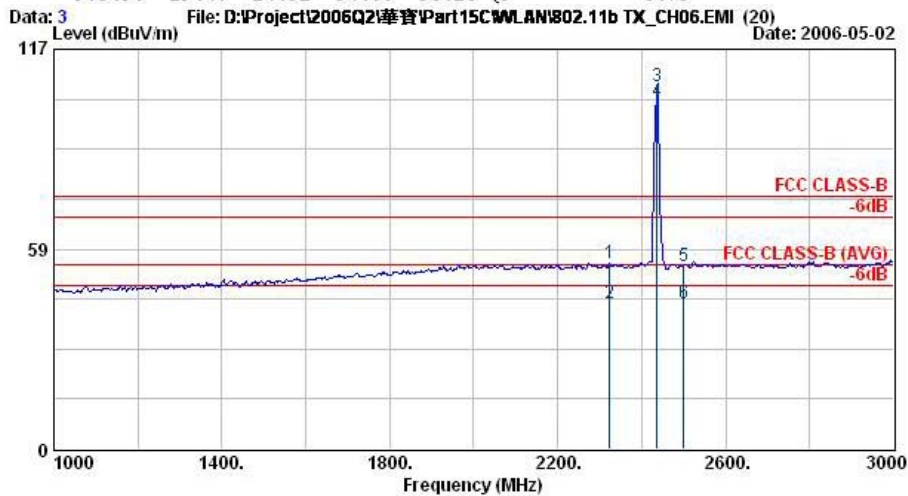


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W/1A)  
 Model : UPA2  
 Memo : 802.11b TX CH06\_2437MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2324.00	54.28	-19.72	74.00	55.28	Peak	-1.00
2 @	2324.00	42.51	-11.49	54.00	43.51	Average	-1.00
3 @	2437.00	106.16			107.07	Peak	-0.91
4 @	2437.00	101.69			102.60	Average	-0.91
5 @	2500.00	53.58	-20.42	74.00	54.42	Peak	-0.84
6 @	2500.00	42.58	-11.42	54.00	43.42	Average	-0.84

Remark: #3 and #4 Fundamental Signal

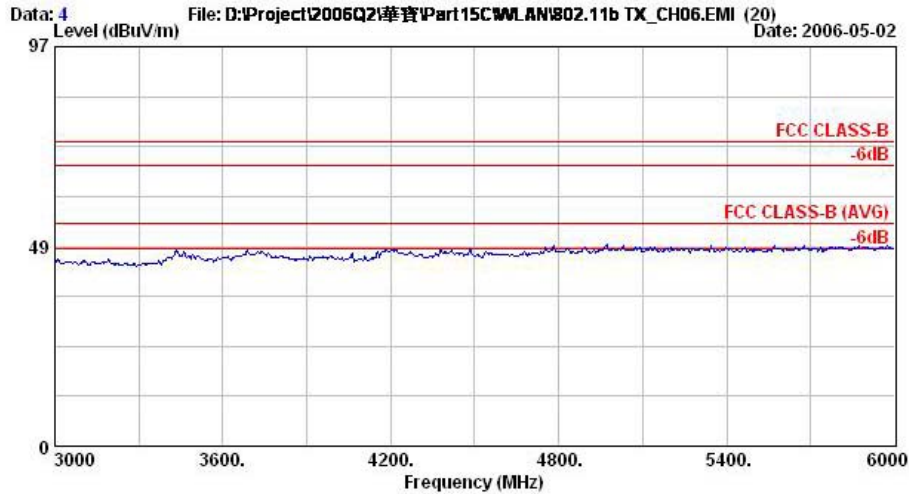

Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
Model : UPA2  
Memo : 802.11b TX CH06\_2437MHz  
Plane : E1

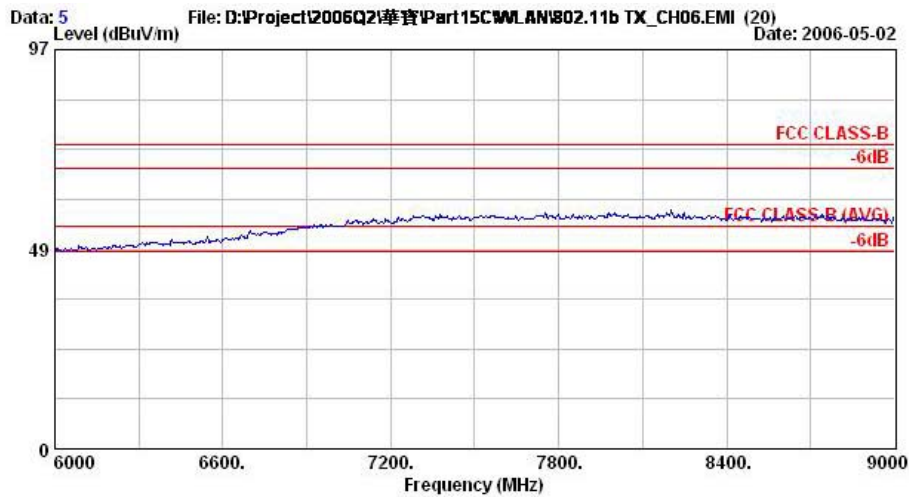


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
Model : UPA2  
Memo : 802.11b TX CH06\_2437MHz  
Plane : E1




• Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

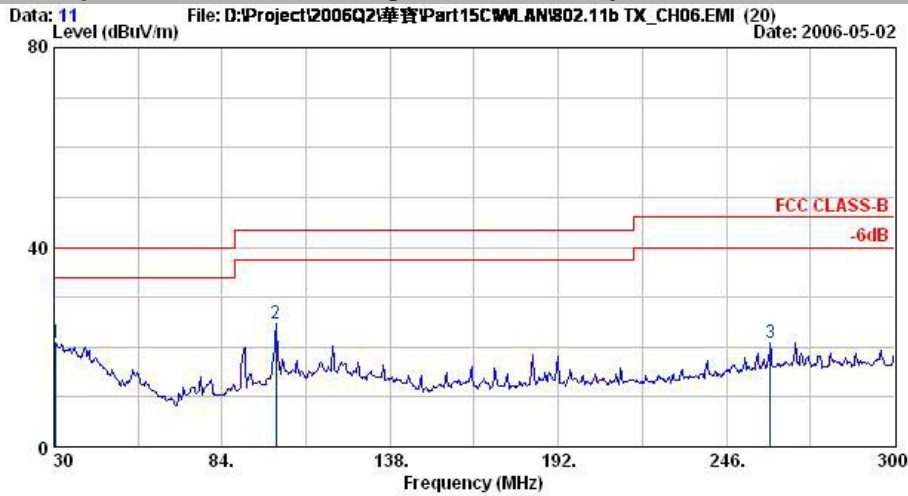


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11b TX CH06\_2437MHz  
 Plane :

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	30.54	20.68	-19.32	40.00	32.87	QP	-12.19
2 @	101.28	24.72	-18.78	43.50	43.78	QP	-19.07
3 @	260.04	20.94	-25.06	46.00	36.23	QP	-15.28

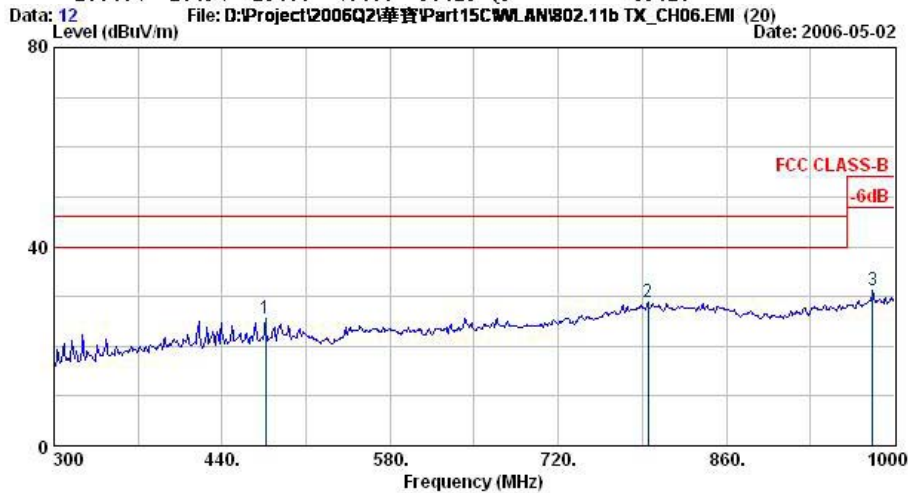

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11b TX CH06\_2437MHz  
 Plane :


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	476.40	25.43	-20.57	46.00	35.25	QP	-9.82
2 @	794.90	28.78	-17.22	46.00	31.61	QP	-2.83
3 @	981.80	31.26	-22.74	54.00	33.06	QP	-1.80

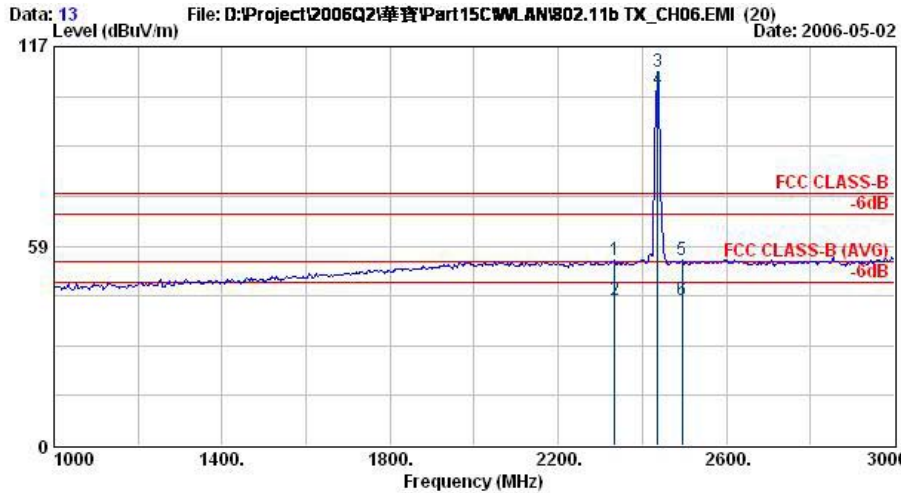


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11b TX CH06\_2437MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
1 @	2334.00	54.30	-19.70	74.00	55.30	Peak	-1.00
2 @	2334.00	42.53	-11.47	54.00	43.53	Average	-1.00
3 @	2437.00	109.69			110.60	Peak	-0.91
4 @	2437.00	104.49			105.40	Average	-0.91
5 @	2494.00	54.17	-19.83	74.00	55.00	Peak	-0.84
6 @	2494.00	42.63	-11.37	54.00	43.47	Average	-0.84

Remark: #3 and #4 Fundamental Signal

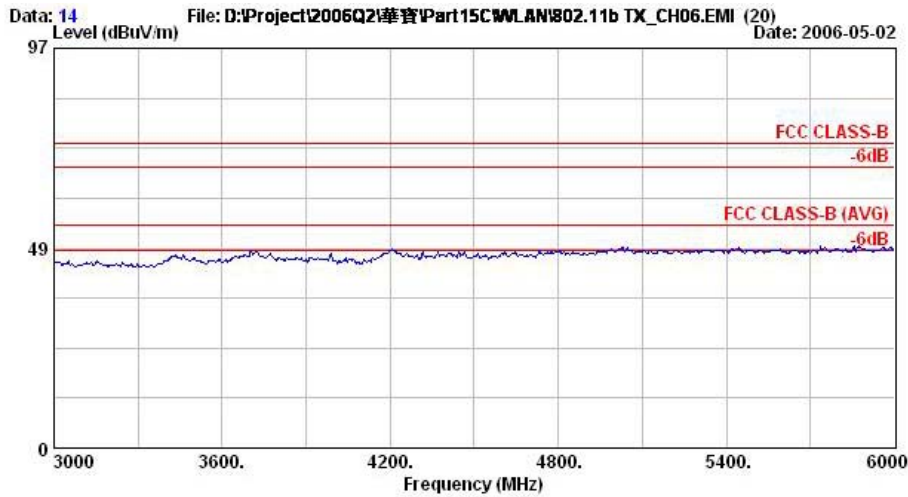

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11b TX CH06\_2437MHz  
 Plane : E1

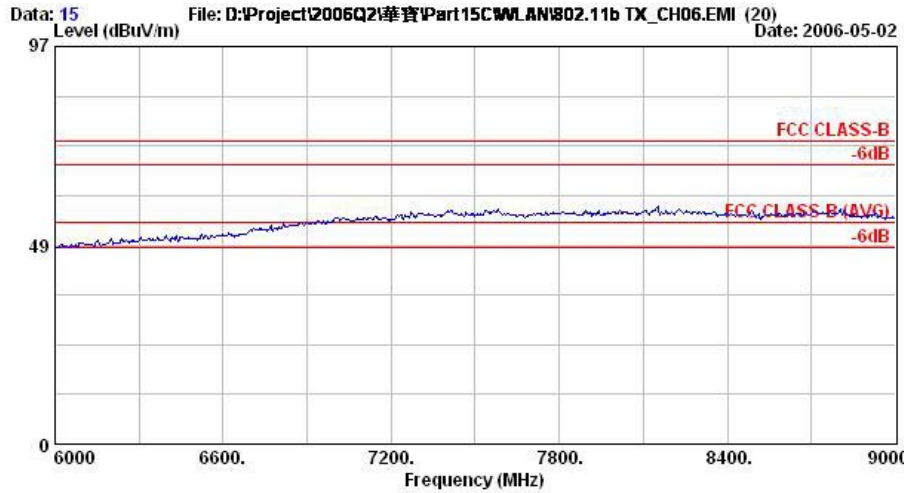


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
Model : UPA2  
Memo : 802.11b TX CH06\_2437MHz  
Plane : E1



- Test Mode : Mode 3
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

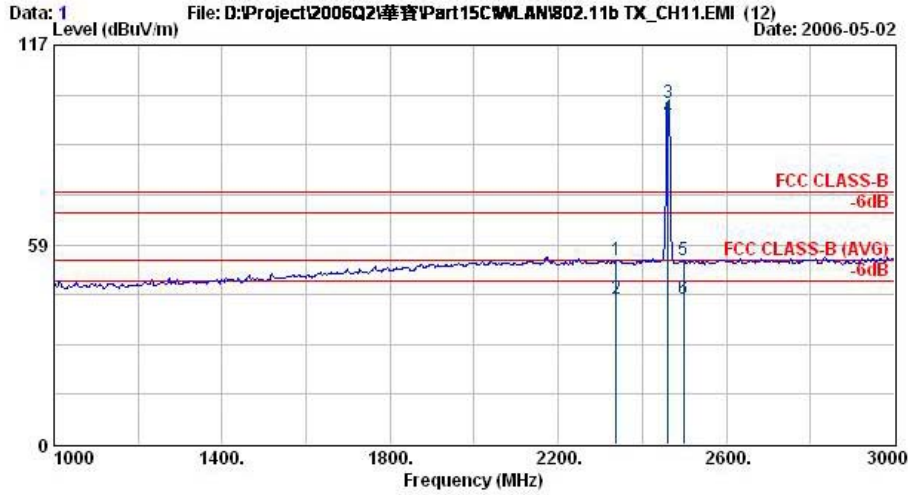


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11b TX CH11\_2462MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2338.00	53.98	-20.02	74.00	54.98	Peak	-1.00
2 @	2338.00	42.53	-11.47	54.00	43.53	Average	-1.00
3 @	2462.00	100.09			100.97	Peak	-0.88
4 @	2462.00	95.73			96.61	Average	-0.88
5 @	2498.00	53.85	-20.15	74.00	54.69	Peak	-0.84
6 @	2498.00	42.68	-11.32	54.00	43.52	Average	-0.84

Remark: #3 and #4 Fundamental Signal

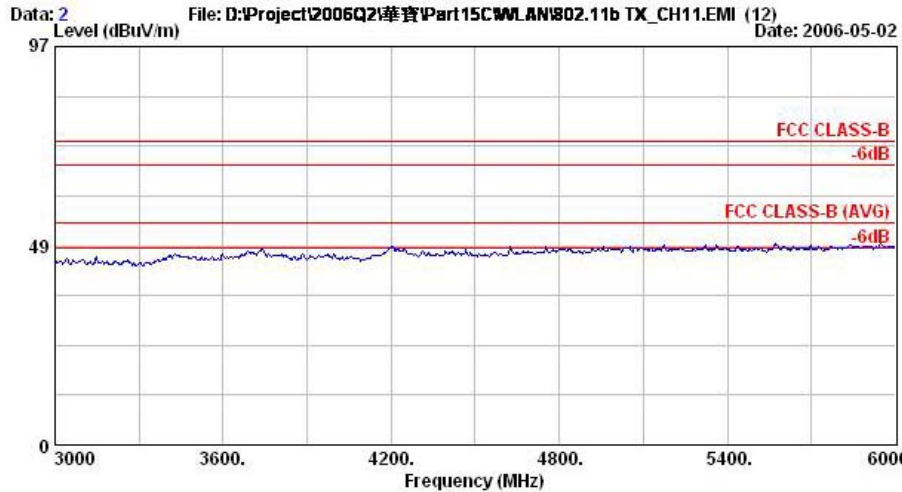

Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11b TX CH11\_2462MHz  
Plane : E1

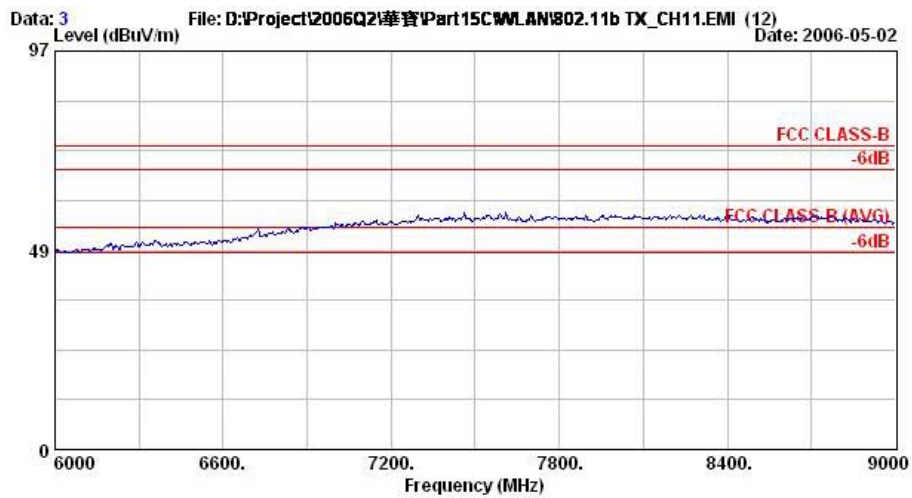


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11b TX CH11\_2462MHz  
Plane : E1





- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

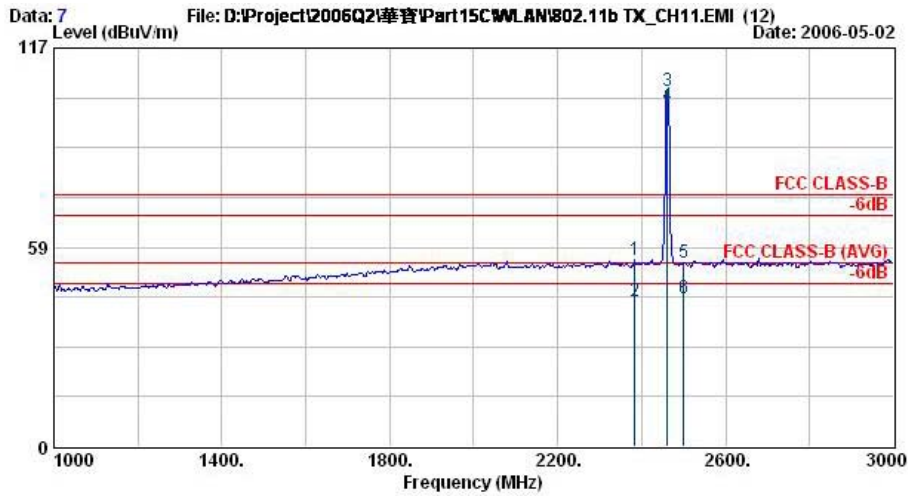


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
 Model : UPA2  
 Memo : 802.11b TX CH11\_2462MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2384.00	54.59	-19.41	74.00	55.55	Peak	-0.96
2 @	2384.00	42.49	-11.51	54.00	43.45	Average	-0.96
3 @	2462.00	104.59			105.47	Peak	-0.88
4 @	2462.00	100.02			100.90	Average	-0.88
5 @	2500.00	53.74	-20.26	74.00	54.58	Peak	-0.84
6 @	2500.00	43.45	-10.55	54.00	44.29	Average	-0.84

Remark: #3 and #4 Fundamental Signal

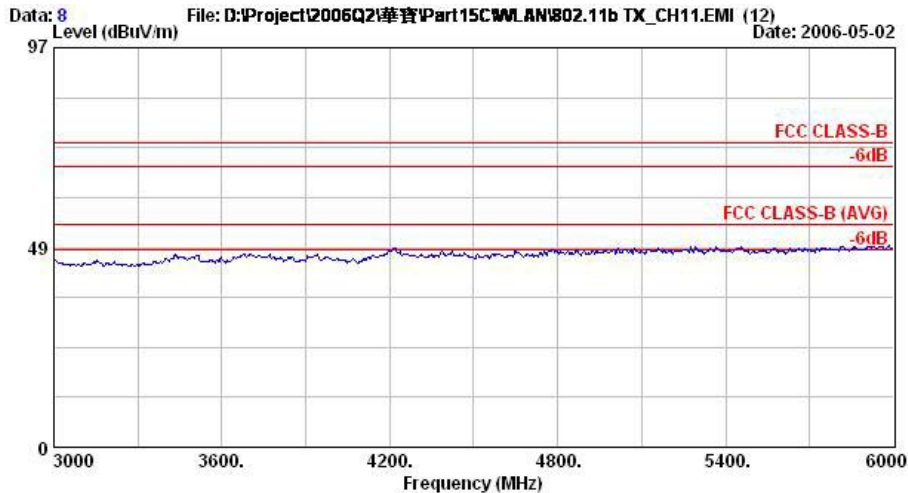

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
 Model : UPA2  
 Memo : 802.11b TX CH11\_2462MHz  
 Plane : E1

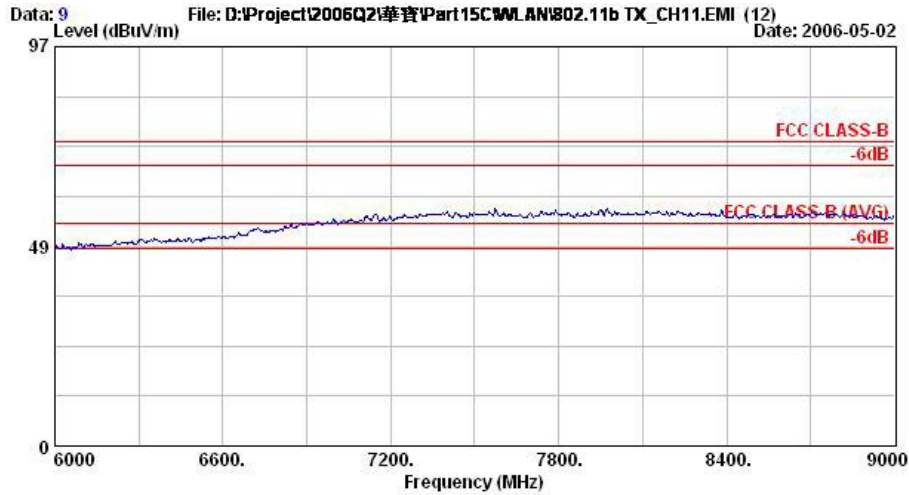


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W/1A)  
Model : UPA2  
Memo : 802.11b TX CH11\_2462MHz  
Plane : E1



- Test Mode : Mode 4
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

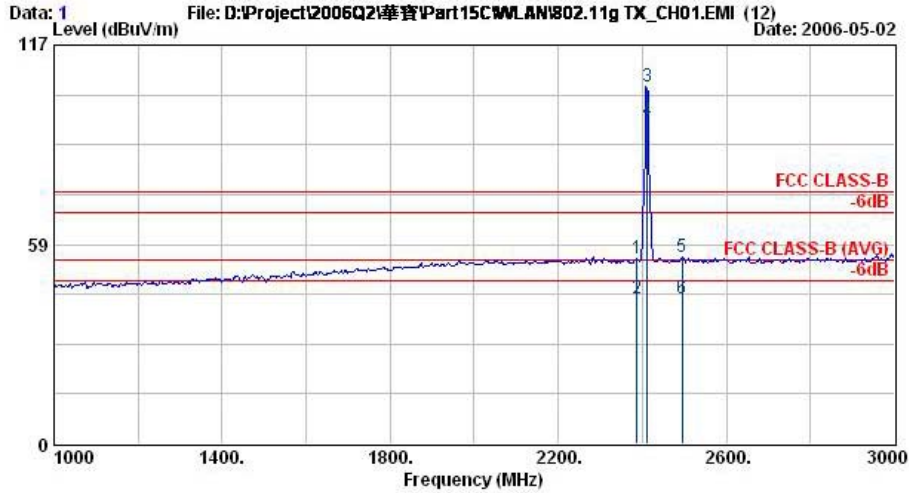


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH01\_2412MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2388.00	54.20	-19.80	74.00	55.14	Peak	-0.95
2 @	2388.00	42.72	-11.28	54.00	43.67	Average	-0.95
3 @	2412.00	104.92			105.85	Peak	-0.93
4 @	2412.00	94.97			95.90	Average	-0.93
5 @	2494.00	54.66	-19.34	74.00	55.50	Peak	-0.84
6 @	2494.00	42.67	-11.33	54.00	43.51	Average	-0.84

Remark: #3 and #4 Fundamental Signal




Data: 2 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX\_CH01.EMI (12) Date: 2006-05-02

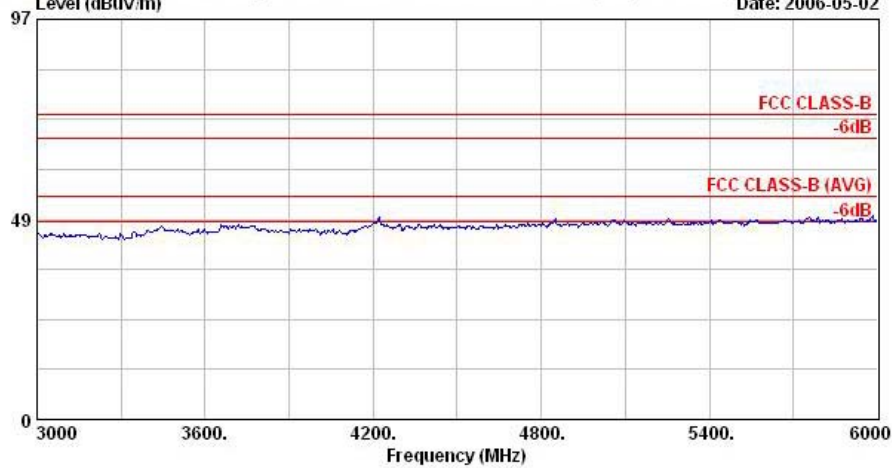

Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH01\_2412MHz  
Plane : E1

Data: 3 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX\_CH01.EMI (12) Date: 2006-05-02

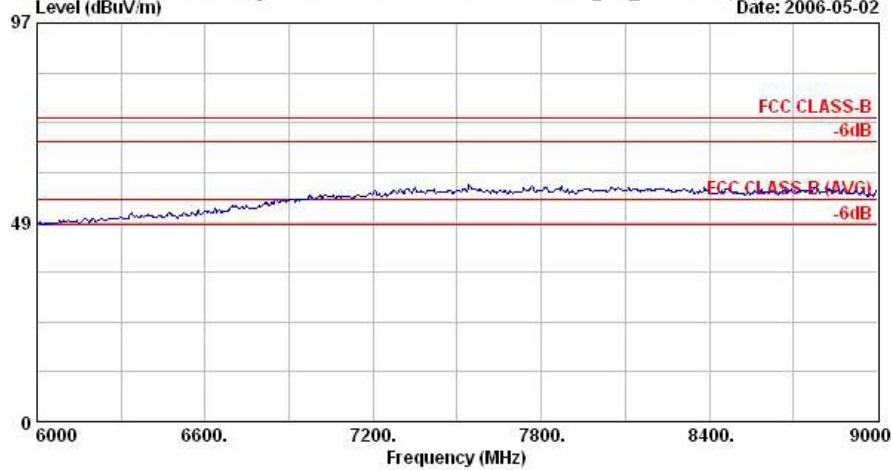


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH01\_2412MHz  
Plane : E1



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

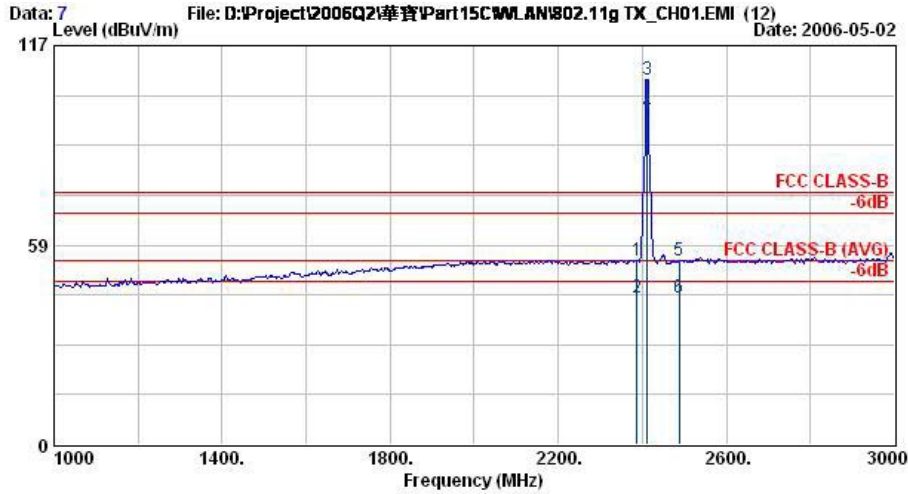


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH01\_2412MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2388.00	54.06	-19.94	74.00	55.01	Peak	-0.95
2 @	2388.00	42.94	-11.06	54.00	43.89	Average	-0.95
3 @	2412.00	106.91			107.83	Peak	-0.93
4 @	2412.00	97.41			98.34	Average	-0.93
5 @	2488.00	53.97	-20.03	74.00	54.82	Peak	-0.85
6 @	2488.00	42.97	-11.03	54.00	43.82	Average	-0.85

Remark: #3 and #4 Fundamental Signal

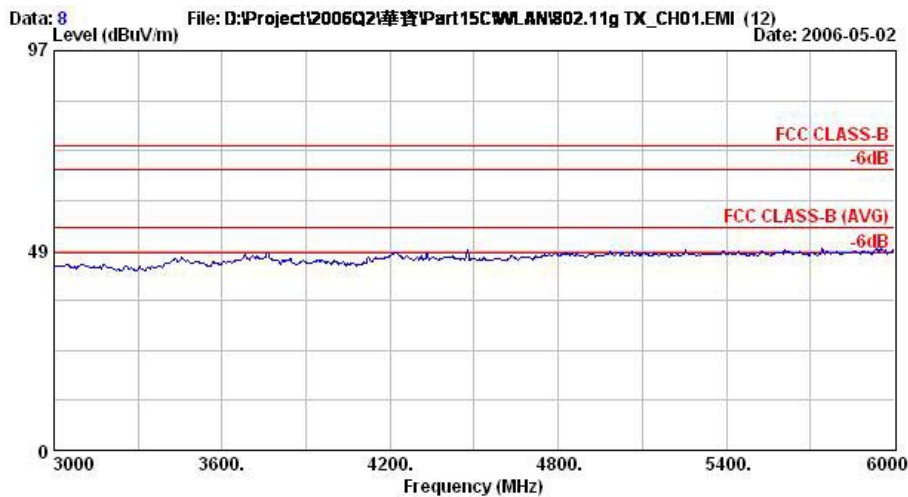

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH01\_2412MHz  
 Plane : E1

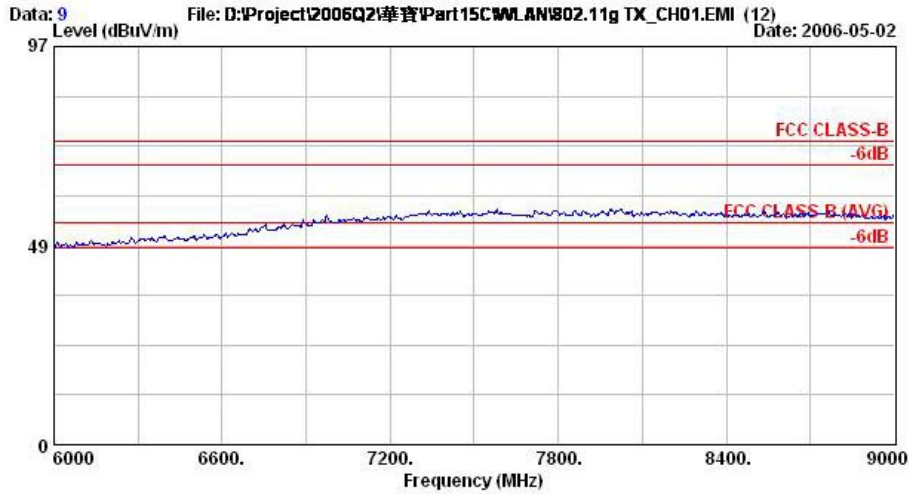


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05V1A)  
Model : UPA2  
Memo : 802.11g TX CH01\_2412MHz  
Plane : E1




- Test Mode : Mode 5
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

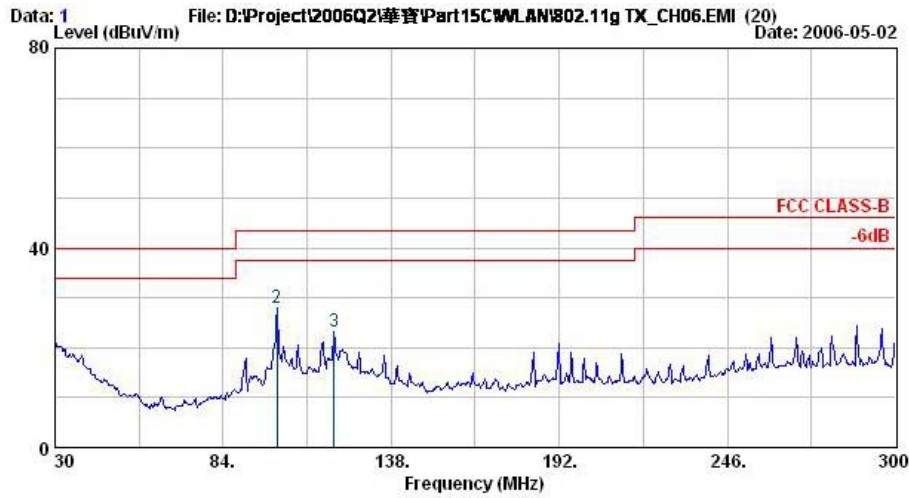

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH06\_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	30.00	21.13	-18.87	40.00	32.99	QP	-11.86
2 @	101.28	28.07	-15.43	43.50	47.14	QP	-19.07
3 @	119.64	23.28	-20.22	43.50	40.26	QP	-16.98

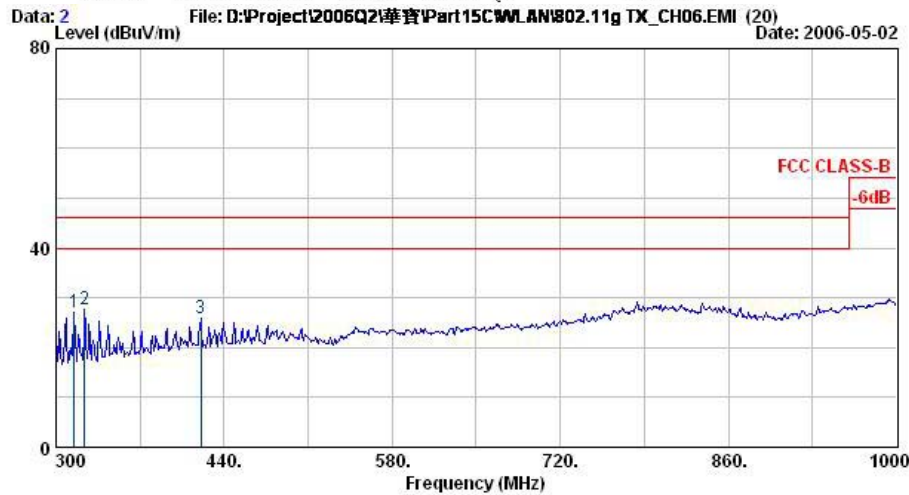


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH06\_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	315.40	27.07	-18.93	46.00	41.18	QP	-14.11
2 @	323.80	27.57	-18.43	46.00	41.49	QP	-13.92
3 @	420.40	25.77	-20.23	46.00	36.46	QP	-10.69



Data: 3 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX\_CH06.EMI (20) Level (dBuV/m) Date: 2006-05-02

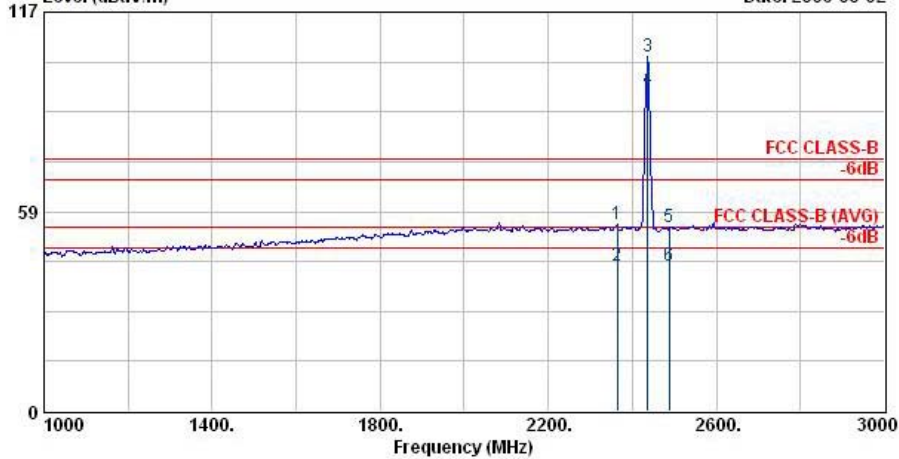


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH06\_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2364.00	54.63	-19.37	74.00	55.61	Peak	-0.98
2 @	2364.00	42.46	-11.54	54.00	43.44	Average	-0.98
3 @	2437.00	103.77			104.68	Peak	-0.91
4 @	2437.00	94.44			95.35	Average	-0.91
5 @	2488.00	53.80	-20.20	74.00	54.65	Peak	-0.85
6 @	2488.00	42.60	-11.40	54.00	43.45	Average	-0.85

Remark: #3 and #4 Fundamental Signal

Data: 4 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX\_CH06.EMI (20) Level (dBuV/m) Date: 2006-05-02

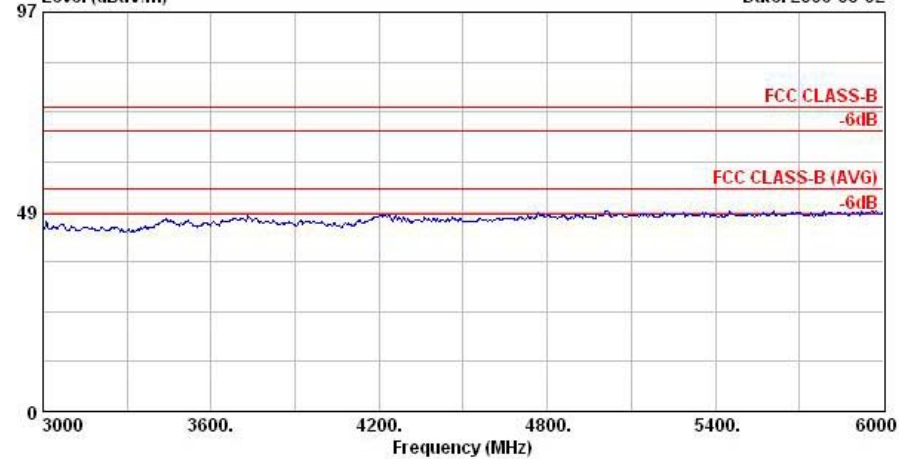


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH06\_2437MHz





Data: 5 File: D:\Project\2006Q2\華寶\Part15C\MLAN\802.11g TX\_CH06.EMI (20) Date: 2006-05-02  
Level (dBuV/m)

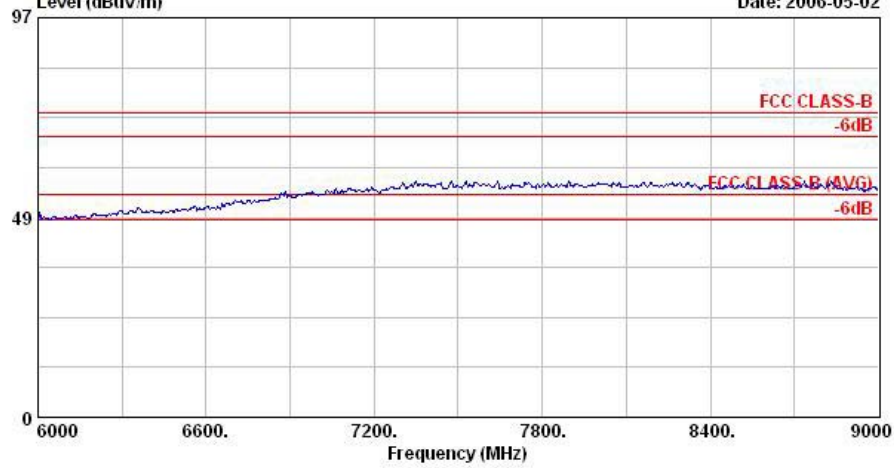


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
Model : UPA2  
Memo : 802.11g TX CH06\_2437MHz




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

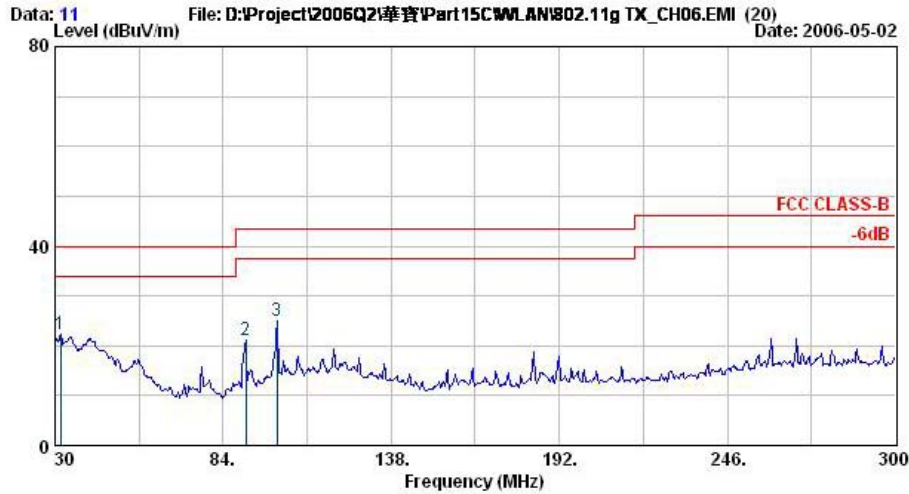

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH06\_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	31.89	22.16	-17.84	40.00	34.67	QP	-12.51
2 @	91.29	21.02	-22.48	43.50	41.68	QP	-20.65
3 @	101.28	24.96	-18.54	43.50	44.02	QP	-19.07

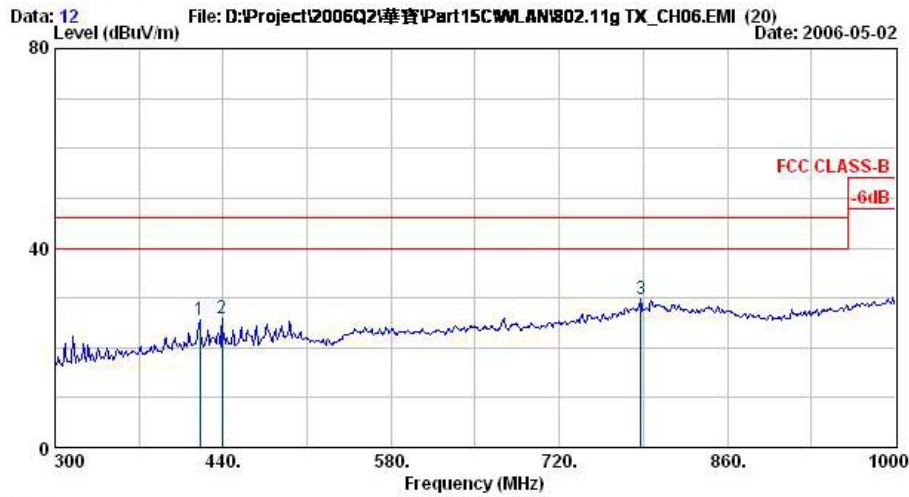


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH06\_2437MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	420.40	25.58	-20.42	46.00	36.27	QP	-10.69
2 @	439.30	25.76	-20.24	46.00	35.99	QP	-10.23
3 @	787.90	29.67	-16.33	46.00	32.81	QP	-3.14



Data: 13 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX\_CH06.EMI (20) Date: 2006-05-02  
Level (dBuV/m)

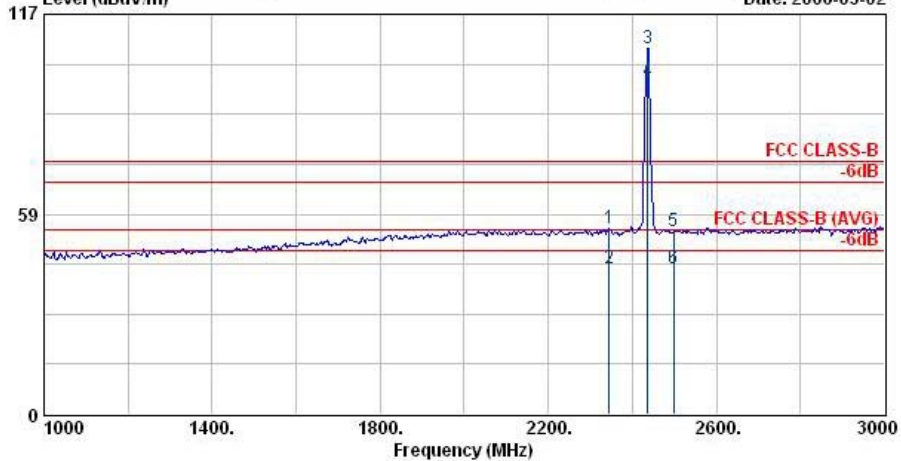


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH06\_2437MHz


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2344.00	54.40	-19.60	74.00	55.38	Peak	-0.98
2 @	2344.00	42.59	-11.41	54.00	43.57	Average	-0.98
3 @	2437.00	106.93			107.83	Peak	-0.90
4 @	2437.00	97.28			98.18	Average	-0.90
5 @	2498.00	53.50	-20.50	74.00	54.34	Peak	-0.84
6 @	2498.00	42.68	-11.32	54.00	43.52	Average	-0.84

Remark: #3 and #4 Fundamental Signal

Data: 14 File: D:\Project\2006Q2\華資\Part15C\WLAN\802.11g TX\_CH06.EMI (20) Date: 2006-05-02  
Level (dBuV/m)

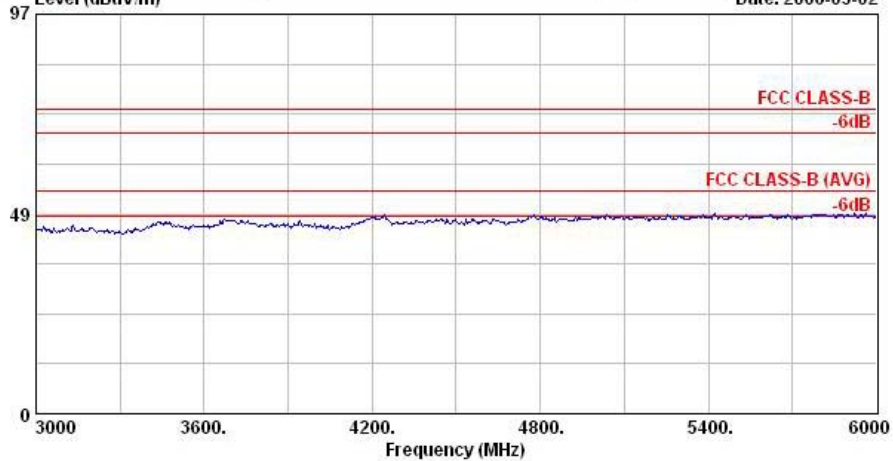

Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH06\_2437MHz

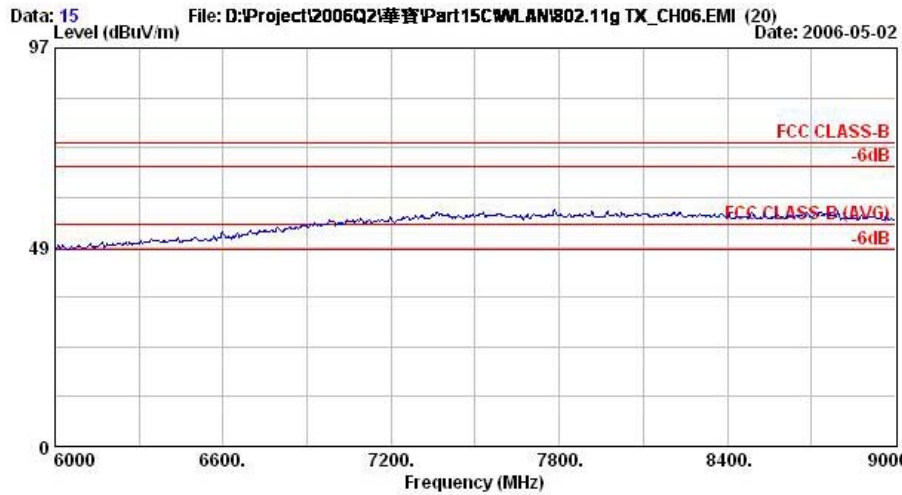


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH06\_2437MHz



- Test Mode : Mode 6
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

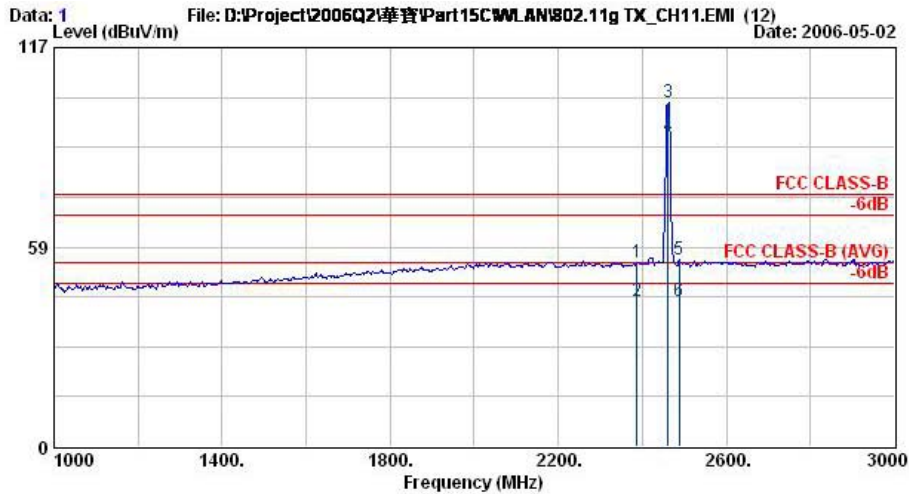


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH11\_2462MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2388.00	53.94	-20.06	74.00	54.89	Peak	-0.95
2 @	2388.00	42.56	-11.44	54.00	43.51	Average	-0.95
3 @	2462.00	100.74			101.62	Peak	-0.88
4 @	2462.00	90.83			91.71	Average	-0.88
5 @	2488.00	54.73	-19.27	74.00	55.58	Peak	-0.85
6 @	2488.00	42.59	-11.41	54.00	43.44	Average	-0.85

Remark: #3 and #4 Fundamental Signal

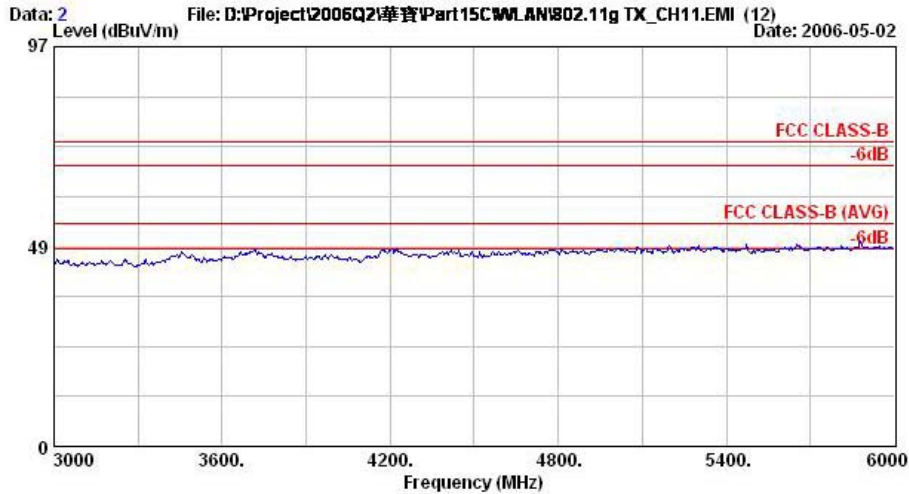

Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH11\_2462MHz  
Plane : E1

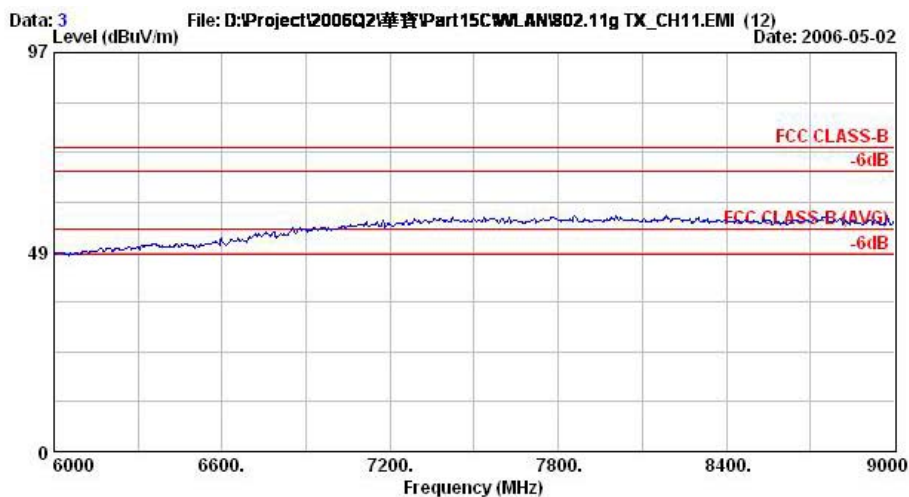


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : 802.11g TX CH11\_2462MHz  
Plane : E1



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

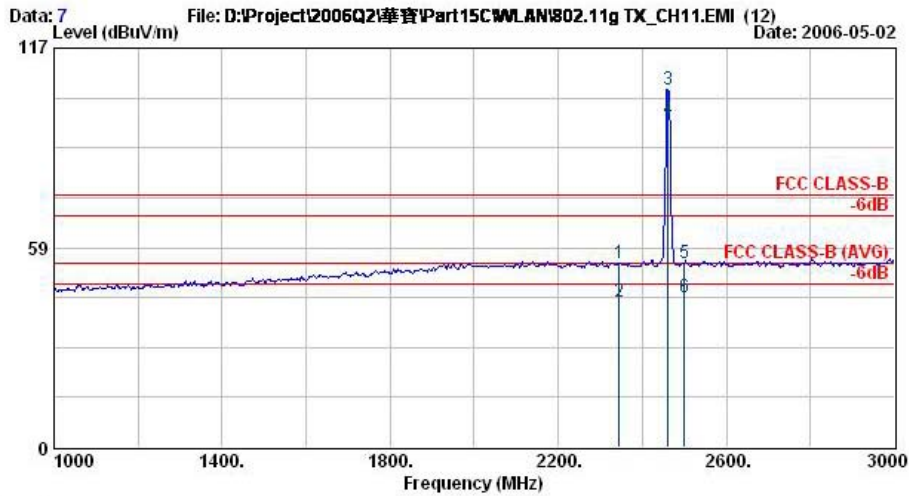


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH11\_2462MHz  
 Plane : E1

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2344.00	54.10	-19.90	74.00	55.08	Peak	-0.98
2 @	2344.00	42.62	-11.38	54.00	43.60	Average	-0.98
3 @	2462.00	105.02			105.90	Peak	-0.88
4 @	2462.00	96.04			96.92	Average	-0.88
5 @	2500.00	54.02	-19.98	74.00	54.86	Peak	-0.84
6 @	2500.00	43.75	-10.25	54.00	44.59	Average	-0.84

Remark: #3 and #4 Fundamental Signal

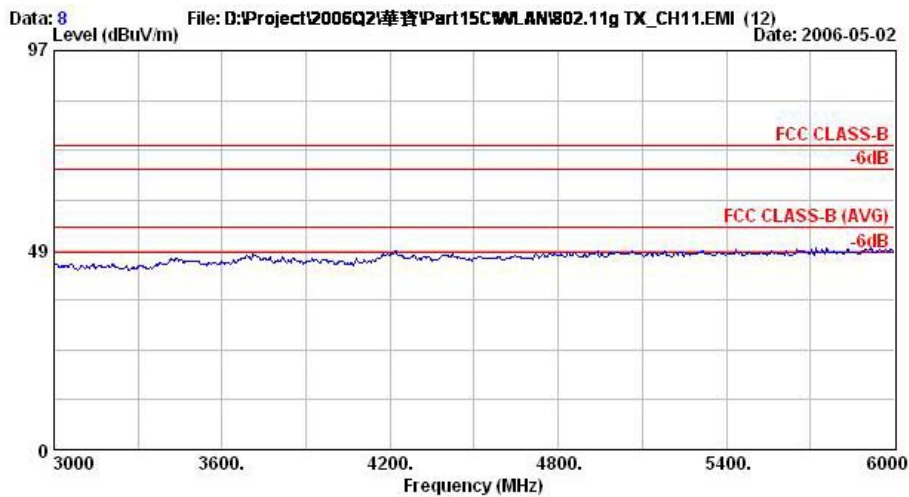

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : 802.11g TX CH11\_2462MHz  
 Plane : E1

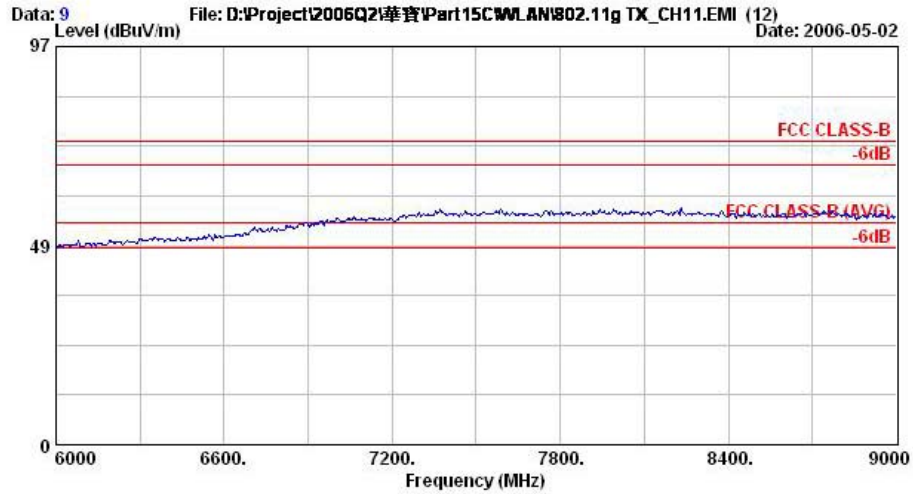


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05V1A)  
Model : UPA2  
Memo : 802.11g TX CH11\_2462MHz  
Plane : E1





- Test Mode : Mode 7
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

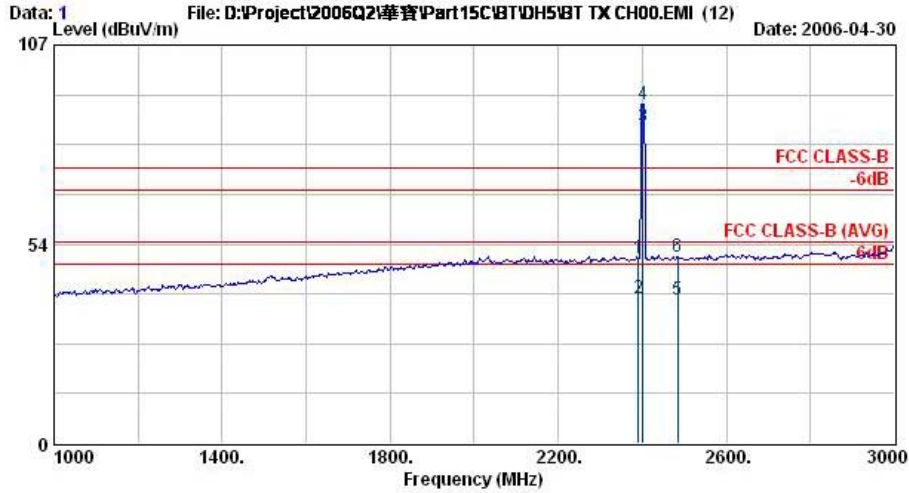


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH00\_2402MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	Limit	Line	Level		dB
			dB	dBuV/m	dBuV		
1	2390.00	49.84	-24.16	74.00	50.78	Peak	-0.94
2 @	2390.00	38.85	-15.15	54.00	39.79	Average	-0.94
3 @	2402.00	85.30			86.24	Average	-0.94
4 @	2402.00	91.21			92.14	Peak	-0.93
5 @	2483.50	38.63	-15.37	54.00	39.49	Average	-0.86
6	2484.00	50.29	-23.71	74.00	51.15	Peak	-0.86

Remark: #3 and #4 Fundamental Signal

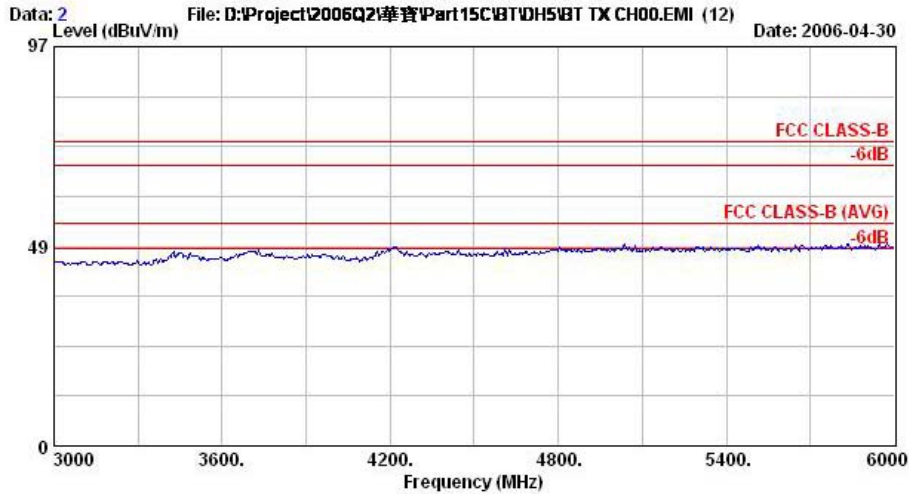

Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH00\_2402MHz

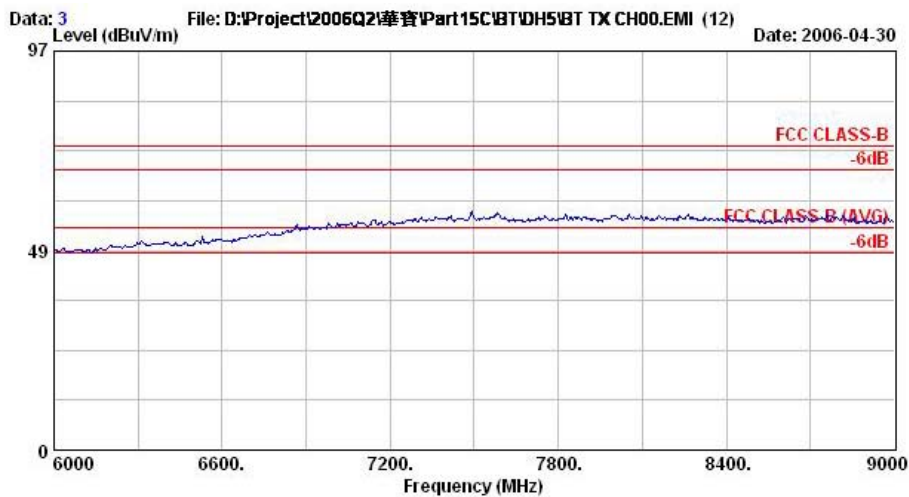


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH00\_2402MHz



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

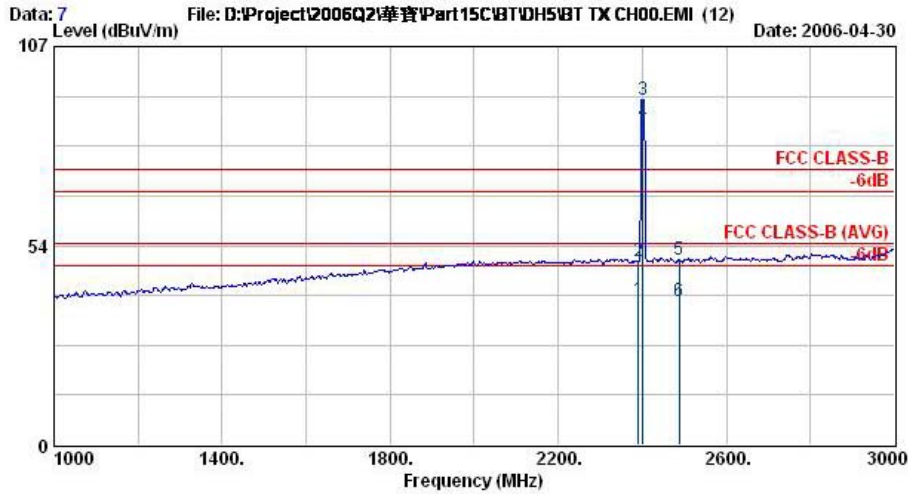


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH00\_2402MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2390.00	39.10	-14.90	54.00	40.04	Average	-0.94
2	2390.00	49.33	-24.67	74.00	50.27	Peak	-0.94
3 @	2402.00	92.53			93.46	Peak	-0.94
4 @	2402.00	86.82			87.76	Average	-0.94
5	2488.00	49.74	-24.26	74.00	50.59	Peak	-0.85
6 @	2488.00	38.69	-15.31	54.00	39.54	Average	-0.85

Remark: #3 and #4 Fundamental Signal

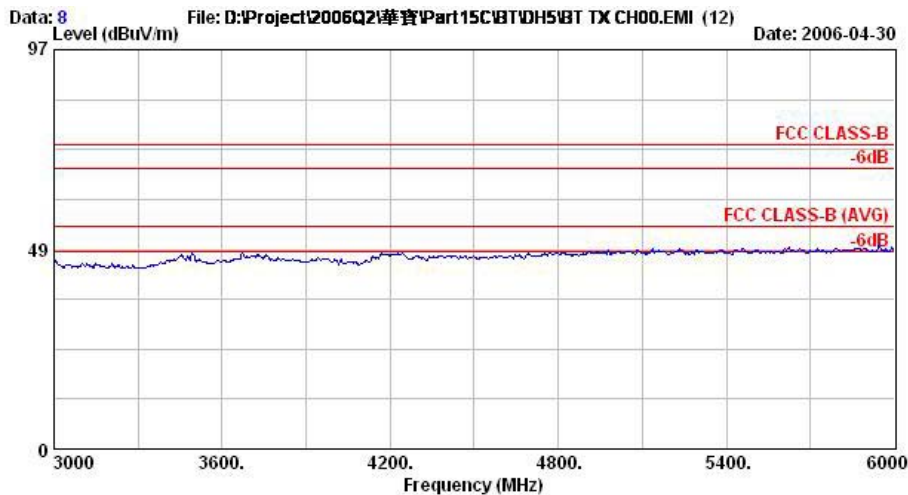

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH00\_2402MHz

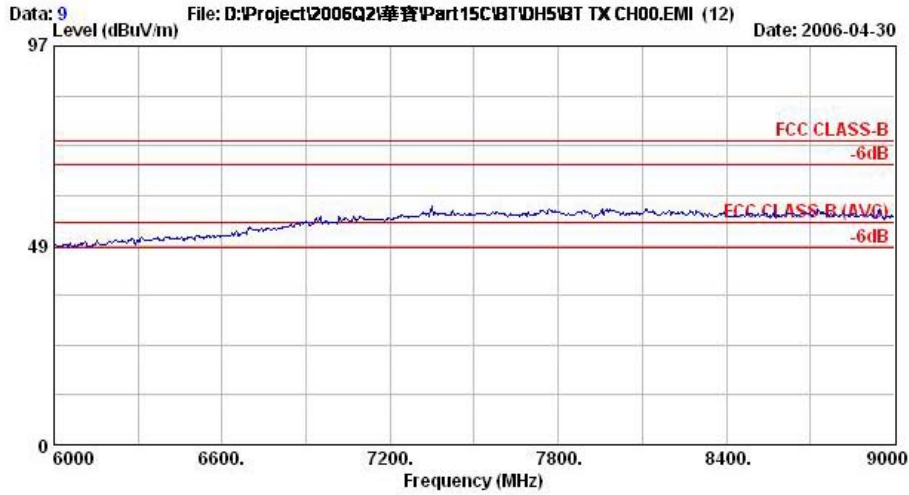


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH00\_2402MHz




- Test Mode : Mode 8
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

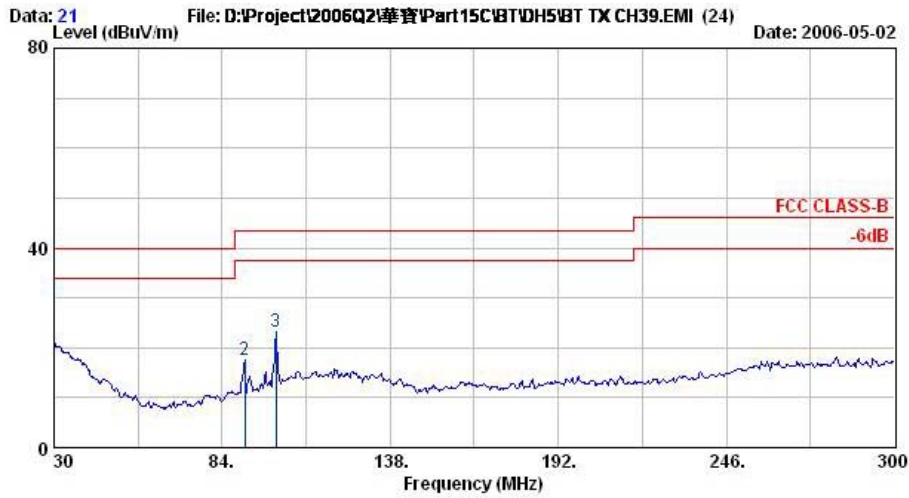

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	30.00	21.19	-18.81	40.00	33.05	QP	-11.86
2 @	91.29	17.59	-25.91	43.50	38.24	QP	-20.65
3 @	101.28	23.23	-20.27	43.50	42.30	QP	-19.07

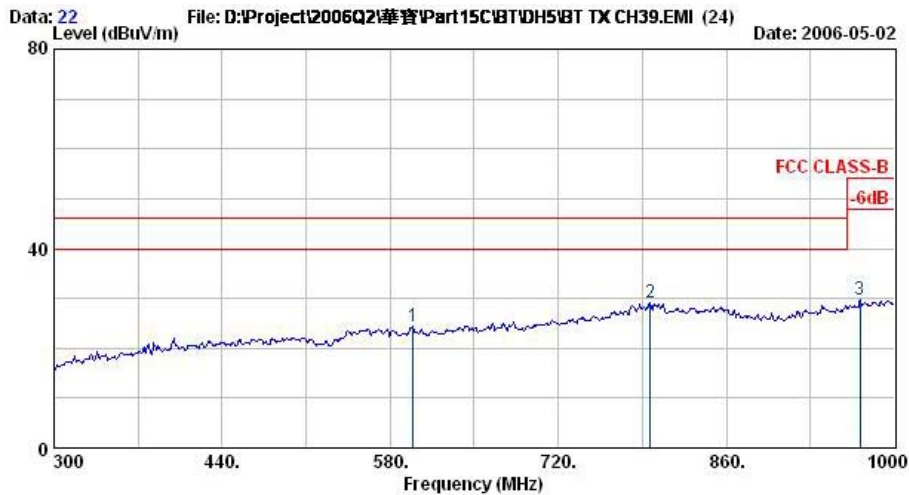


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	598.90	24.37	-21.63	46.00	32.40	QP	-8.02
2 @	796.30	29.06	-16.94	46.00	31.84	QP	-2.78
3 @	971.30	29.66	-24.34	54.00	32.05	QP	-2.39




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

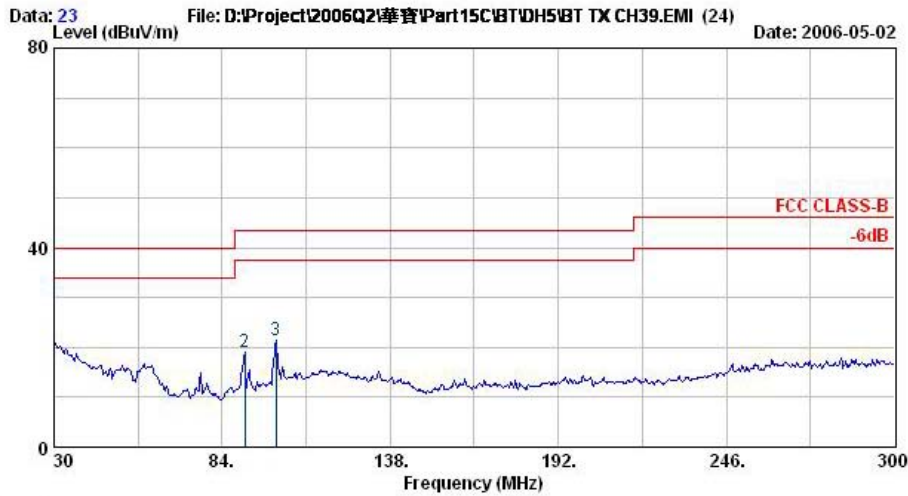

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	30.00	21.18	-18.82	40.00	33.04	QP	-11.86
2 @	91.29	19.08	-24.42	43.50	39.73	QP	-20.65
3 @	101.28	21.44	-22.06	43.50	40.50	QP	-19.07

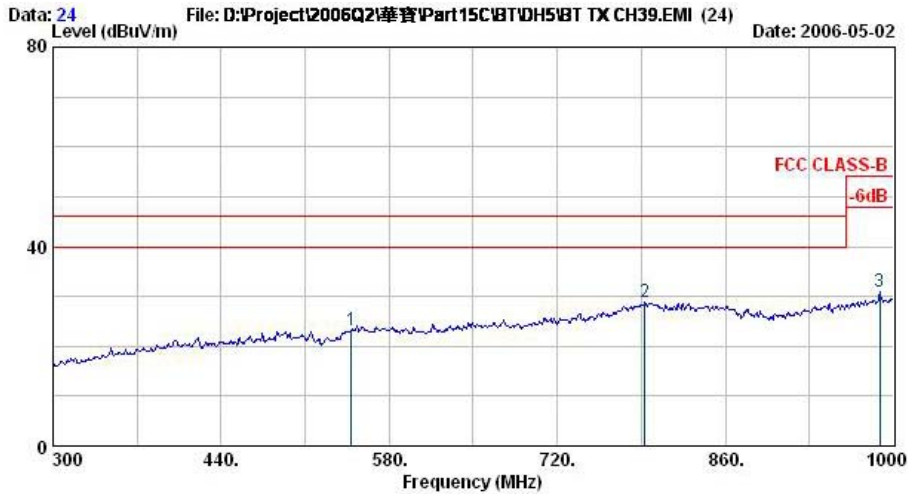


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,PHIHONG(MODEL:PSC05R-050CP)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	548.50	23.07	-22.93	46.00	30.77	QP	-7.70
2 @	792.80	28.89	-17.11	46.00	31.85	QP	-2.96
3 @	988.80	30.98	-23.02	54.00	32.53	QP	-1.56




- Test Mode : Mode 9
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

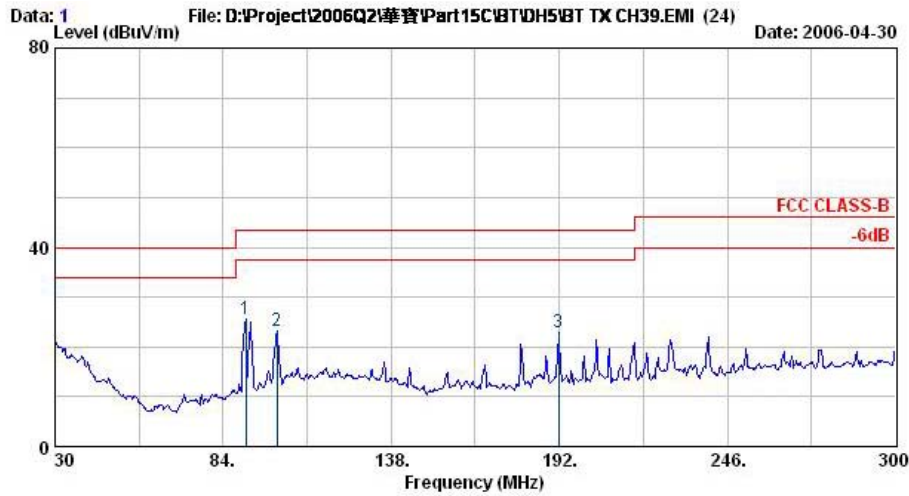

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	91.29	25.69	-17.81	43.50	46.35	QP	-20.65
2 @	101.28	23.14	-20.36	43.50	42.20	QP	-19.07
3 @	191.73	22.75	-20.75	43.50	41.75	QP	-19.00

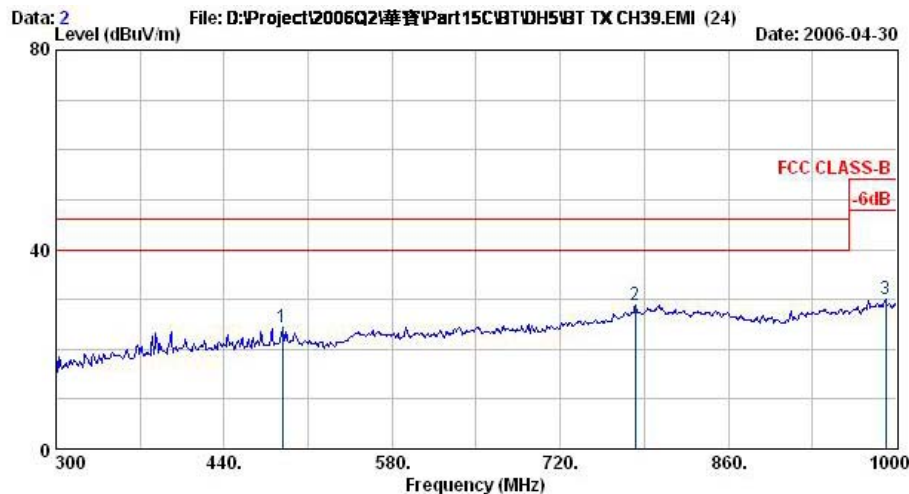


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	488.30	24.36	-21.64	46.00	33.65	QP	-9.29
2 @	782.30	28.95	-17.05	46.00	32.25	QP	-3.30
3 @	990.90	29.93	-24.07	54.00	31.43	QP	-1.50



Data: 3 File: D:\Project\2006Q2\華寶\Part15C\BT\DH5\BT TX CH39.EMI (24) Date: 2006-04-30  
 Level (dBuV/m)

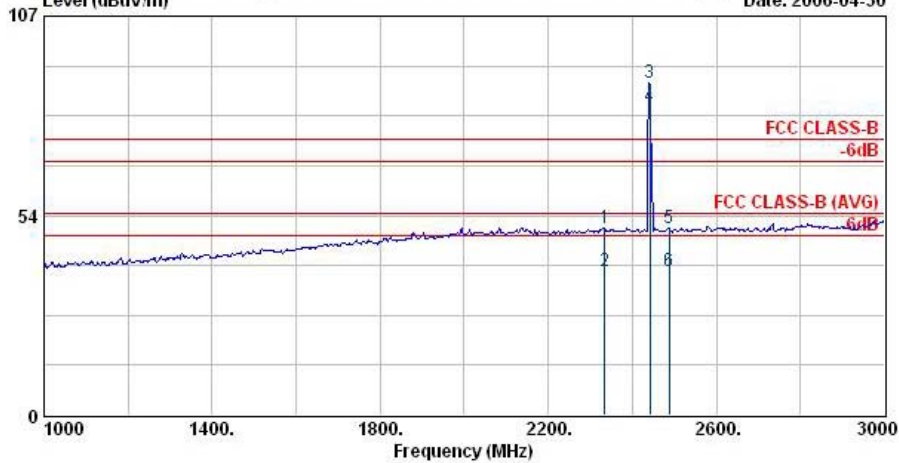


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2334.00	50.24	-23.76	74.00	51.25	Peak	-1.00
2 @	2334.00	38.70	-15.30	54.00	39.70	Average	-1.00
3 @	2441.00	89.11			90.01	Peak	-0.90
4 @	2441.00	82.90			83.79	Average	-0.89
5 @	2488.00	50.11	-23.89	74.00	50.97	Peak	-0.85
6 @	2488.00	38.73	-15.27	54.00	39.58	Average	-0.85


Remark: #3 and #4 Fundamental Signal

Data: 4 File: D:\Project\2006Q2\華寶\Part15C\BT\DH5\BT TX CH39.EMI (24) Date: 2006-04-30  
 Level (dBuV/m)

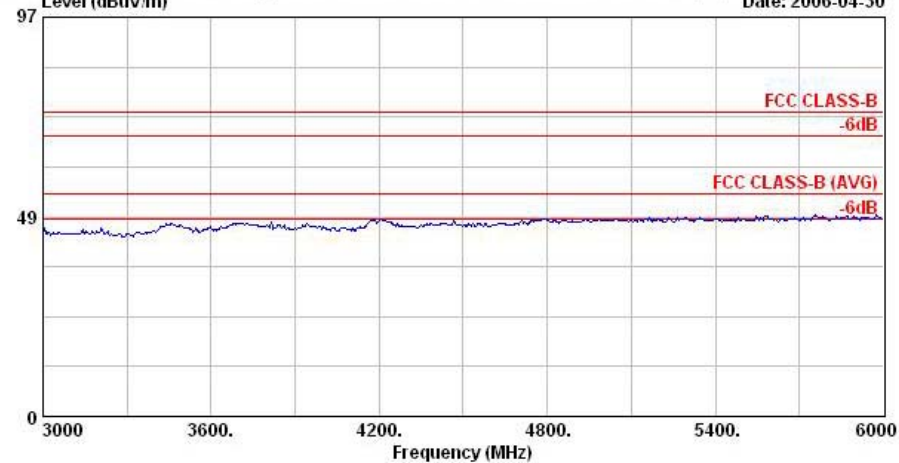

Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz



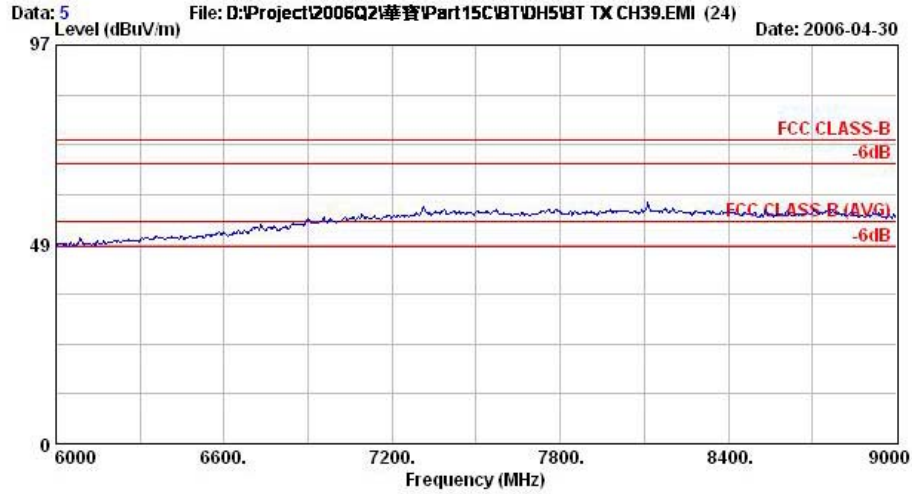


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH39\_2441MHz




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

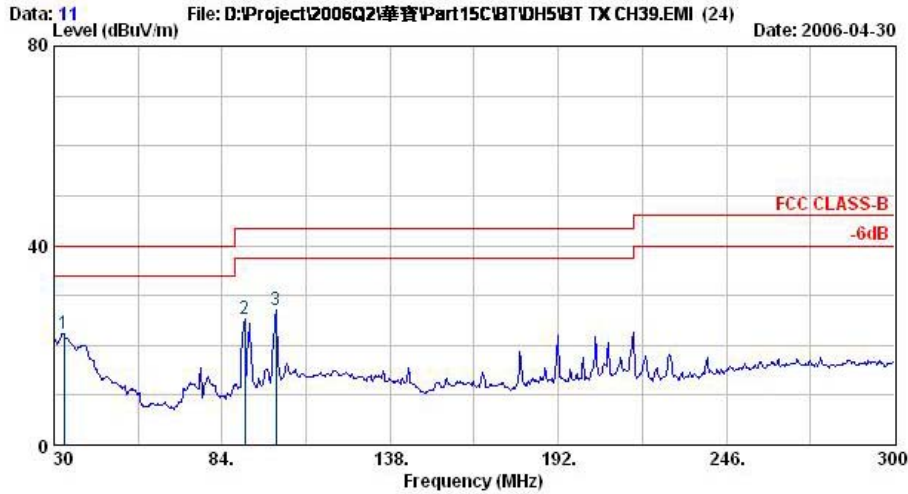


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	33.24	22.27	-17.73	40.00	35.10	QP	-12.84
2 @	91.29	25.38	-18.12	43.50	46.03	QP	-20.65
3 @	101.28	27.17	-16.33	43.50	46.23	QP	-19.07

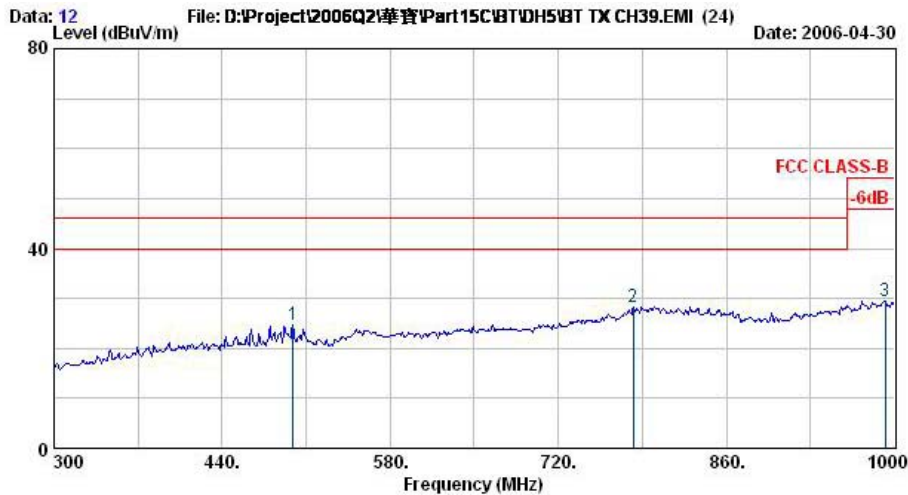

Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05V1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz


	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	498.80	24.83	-21.17	46.00	34.05	QP	-9.23
2 @	782.30	28.37	-17.63	46.00	31.67	QP	-3.30
3 @	992.30	29.50	-24.50	54.00	30.99	QP	-1.49

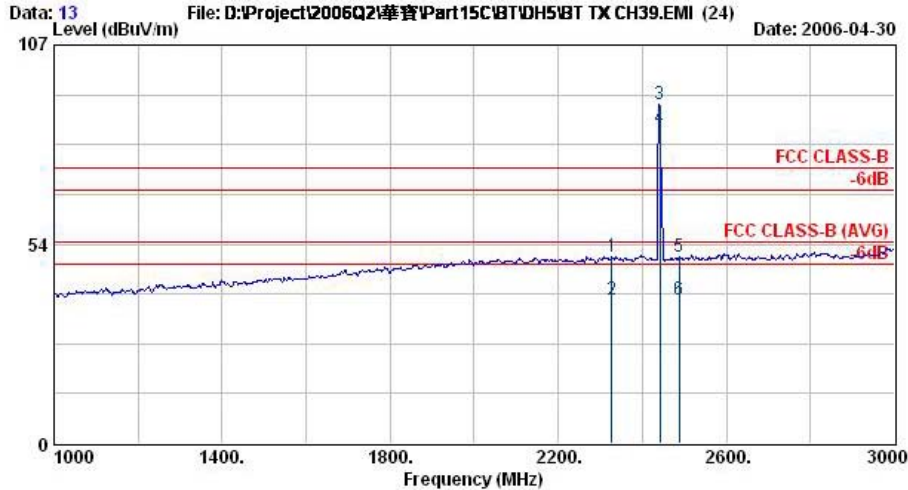


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1 @	2328.00	50.06	-23.94	74.00	51.06	Peak	-1.00
2 @	2328.00	38.50	-15.50	54.00	39.50	Average	-1.00
3 @	2441.00	90.97			91.87	Peak	-0.90
4 @	2441.00	84.89			85.78	Average	-0.89
5 @	2488.00	50.05	-23.95	74.00	50.91	Peak	-0.85
6 @	2488.00	38.75	-15.25	54.00	39.60	Average	-0.85

Remark: #3 and #4 Fundamental Signal

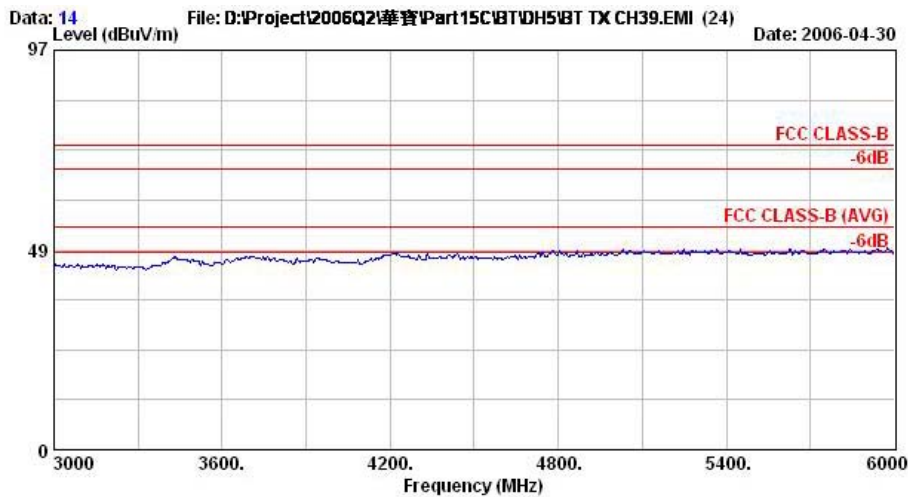

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH39\_2441MHz

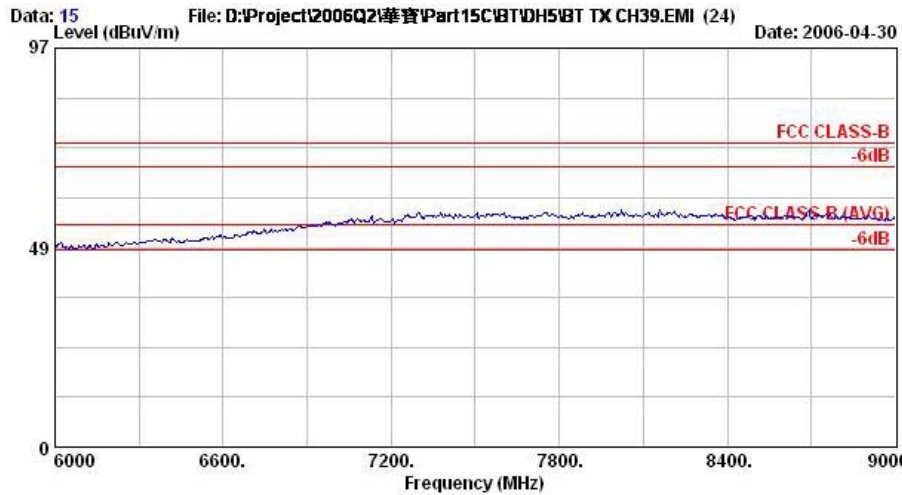


Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH39\_2441MHz



- Test Mode : Mode 10
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

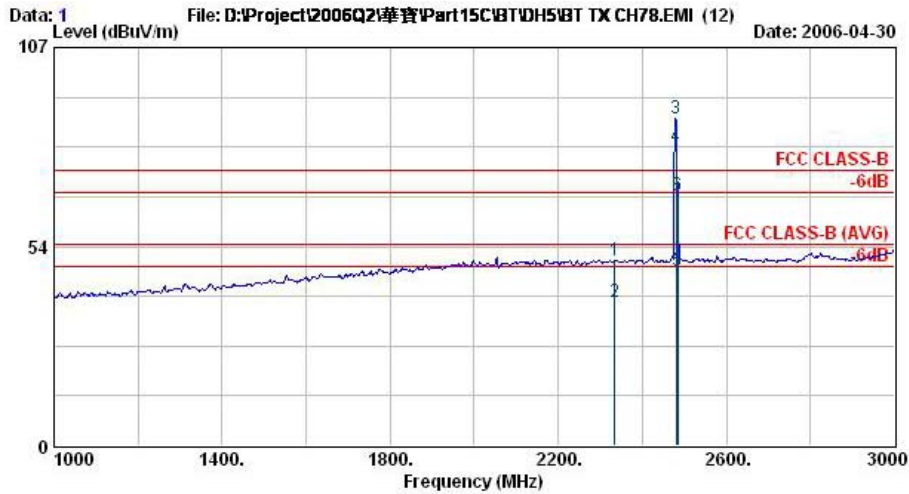


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05V1A)  
 Model : UPA2  
 Memo : BT TX CH78\_2480MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1	2334.00	49.90	-24.10	74.00	50.91	Peak	-1.00
2 @	2334.00	38.56	-15.44	54.00	39.56	Average	-1.00
3 @	2480.00	88.03			88.89	Peak	-0.86
4 @	2480.00	80.30			81.16	Average	-0.86
5 @	2483.50	47.11	-6.89	54.00	47.97	Average	-0.86
6 @	2483.50	67.28	-6.72	74.00	68.14	Peak	-0.86

Remark: #3 and #4 Fundamental Signal

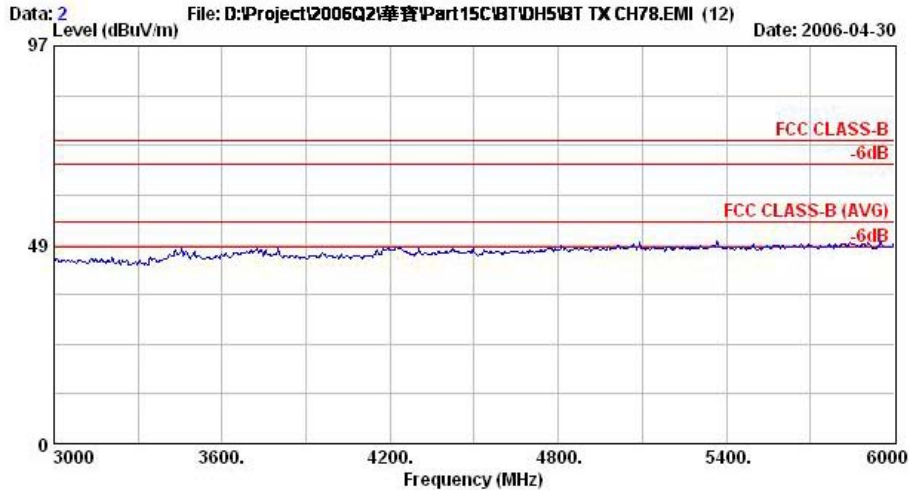

Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH78\_2480MHz

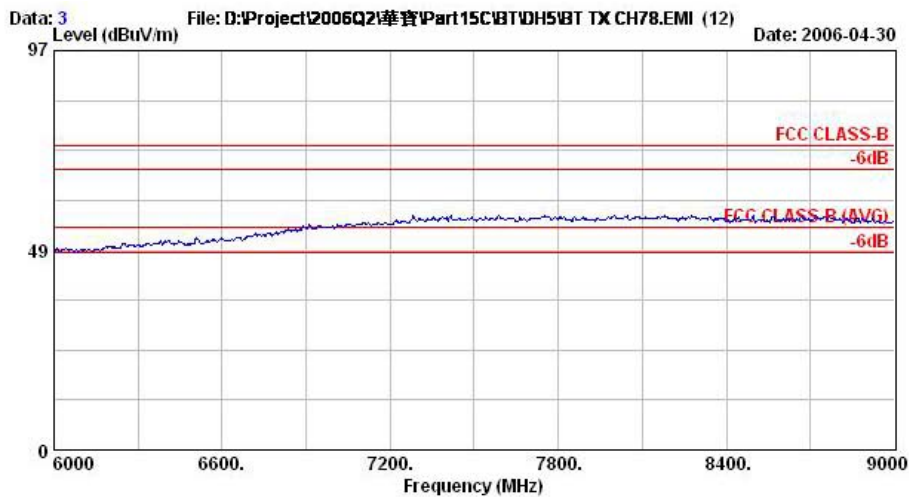


Site : 03CH06-HY  
Condition : HF-ANT-060410 HORIZONTAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH78\_2480MHz



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

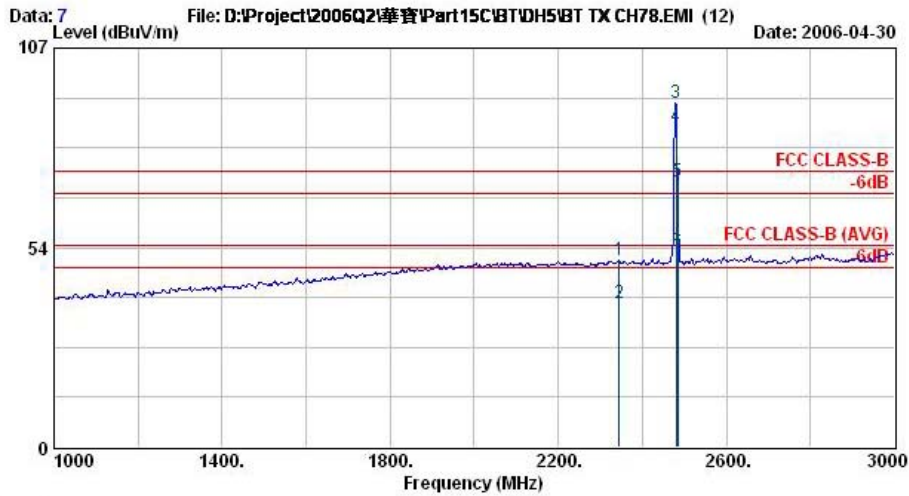


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH78\_2480MHz

	Freq	Level	Over	Limit	Read	Remark	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV		dB
1	2344.00	49.96	-24.04	74.00	50.95	Peak	-0.98
2 @	2344.00	38.44	-15.56	54.00	39.42	Average	-0.98
3 @	2480.00	92.41			93.27	Peak	-0.86
4 @	2480.00	85.76			86.62	Average	-0.86
5 @	2483.50	71.37	-2.63	74.00	72.23	Peak	-0.86
6 @	2483.50	52.66	-1.34	54.00	53.52	Average	-0.86

Remark: #3 and #4 Fundamental Signal

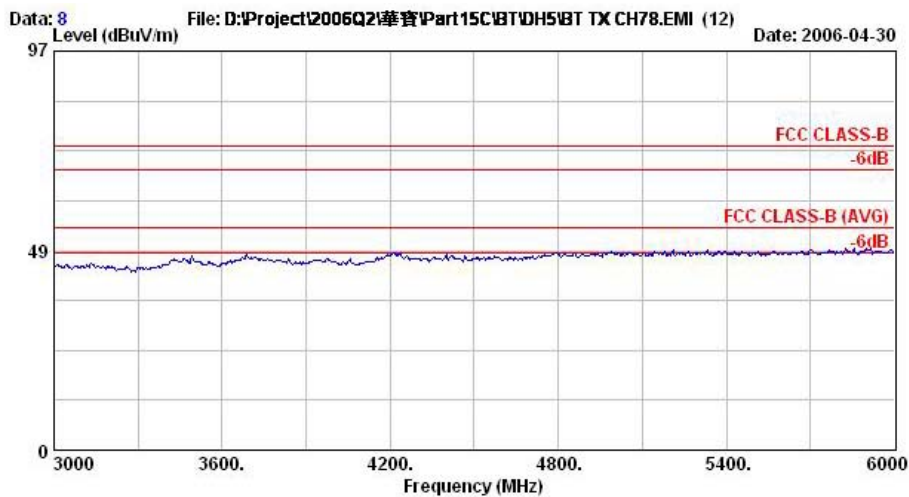

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : PDA Phone  
 Power : 12Vac/60Hz,SUNFONE(MODEL:ACE05W1A)  
 Model : UPA2  
 Memo : BT TX CH78\_2480MHz

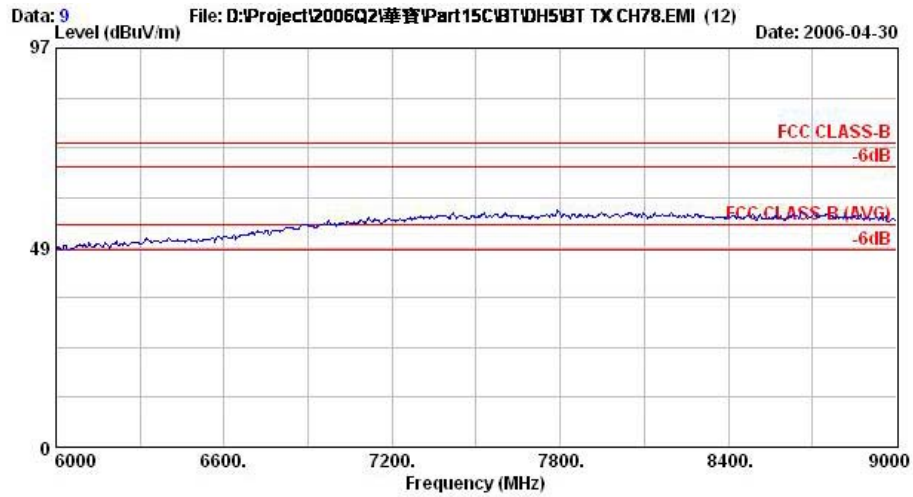

Site : 03CH06-HY  
Condition : HF-ANT-060410 VERTICAL  
EUT : PDA Phone  
Power : 12Vac/60Hz,SUNPHONE(MODEL:ACE05W1A)  
Model : UPA2  
Memo : BT TX CH78\_2480MHz

Remark: Testing was performed to 25GHz. No emissions closer than 20dB of the limit was detected other than those shown in the data above.





## **5.12 Antenna Requirements**

### **5.12.1 Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

### **5.12.2 Antenna Connected Construction**

The antennas used in this product are PIFAs for both WLAN and BT. The connector is Finger on antenna port and it is considered to meet antenna requirement of FCC.

### **5.12.3 Antenna Gain**

The antenna gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



**6. List of Measuring Equipments Used**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Jun. 28, 2005	Jun. 28, 2006	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 29, 2006	Mar. 29, 2007	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Apr. 19, 2006	Apr. 19, 2007	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 22, 2005	Dec. 22, 2006	Conduction (CO01-HY)
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Dec. 22, 2005	Dec. 22, 2006	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 25, 2005	Jul. 24, 2006	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	Jun. 28, 2005	Jun. 27, 2006	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	N/A	N/A	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Nov. 22, 2004	Nov. 22, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Feb. 1, 2005	Feb. 1, 2007	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)



## 7. Uncertainty Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
<b>combined standard uncertainty Uc(y)</b>	<b>1.13</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)**

Contribution	Uncertainty of $x_i$		$u(x_i)$	$C_i$	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% <math>U = 2U_c(y)</math></b>	<b>4.72</b>				