

**ADVANCED
COMPLIANCE LABORATORY**

**6 Randolph Way
Hillsborough, NJ 08876
Tel: (732) 560-9010
Fax: (732) 560-9173**

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

of

RF LOCATOR REMOTE CONTROL

MODEL: 80201(Tx)

FCC ID: QR9-80201T

December 27, 2002

This report concerns (check one): Original grant ☒ Class II change ☐
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CF 0.457(d)(1)(ii)? yes ☐ no ☒
If yes, defer until: _____ (date)
Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Transition Rules Request per 15.37? yes ☐ no ☒
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR
[10-1-90 Edition] provision.

Report prepared for:	ReSource, Inc.
Report prepared by:	Advanced Compliance Lab
Report number:	0048-021216-01T



The test result in this report IS supported and covered by the NVLAP accreditation

Table of Contents

Report Cover Page.....1

Table of Contents2

Figures.....3

1. GENERAL INFORMATION4

 1.1 Verification of Compliance4

 1.2 Equipment Modifications.....5

 1.3 Product Information6

 1.4 Test Methodology.....6

 1.5 Test Facility6

 1.6 Test Equipment6

 1.7 Statement of the Document Use.....7

2. PRODUCT LABELING.....8

3. SYSTEM TEST CONFIGURATION9

 3.1 Justification9

 3.2 Special Accessories.....9

 3.3 Configuration of Tested System9

4. SYSTEM SCHEMATICS12

5. RADIATED EMISSION DATA13

 5.1 Field Strength Calculation13

 5.2 Test Methods and Conditions13

 5.3 Test Data13

 5.4 Occupied Bandwidth14

6. PHOTOS OF TESTED EUT16

Figures

Figure 2.1 FCC ID Label.....8

Figure 2.2 Location of Label on Back of the EUT8

Figure 3.1 Radiated Test Setup, Position 1.....10

Figure 3.2 Radiated Test Setup, Position 2.....10

Figure 3.3 Radiated Test Setup, Position 3.....11

Figure 4.1 EUT Schematics.....12

Figure 5.1 Occupied Bandwidth15

Figure 6.1 Front View.....17

Figure 6.2 Rear View18

Figure 6.2 Inside View, Cover Opened19

Figure 6.3 Component Side.....20

Figure 6.4 Foil Side21

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: RF LOCATOR REMOTE CONTROL

Model: 80201(Tx)

Applicant: ReSource, Inc.
23 Acorn Street, Providence, RI 02903, USA

Test Type: FCC Part 15C CERTIFICATION

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY


Test Date: Dec. 26, 2002

Report Number: 0048-021216-01T

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15, subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	± 2.36	± 2.99	± 1.83



Wei Li
Lab Manager
Advanced Compliance Lab

Date: Dec. 27, 2002

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	FCC ID	CABLE
Product	RF LOCATOR REMOTE CONTROL 80201(Tx) ⁽¹⁾	QR9-80201T	
Housing	PLASTICS		
Power Supply	12V DC Battery		
Clock/OSC Freq.	315 MHz		
Receiver	80201 (Rx) (FCC Part15 Certification Application)	QR9-80201R	

(1) EUT submitted for grant.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-1992 at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at 50 Randolph Road, Somerset, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment

Manufacture	Model	Serial No.	Description	Last Cal dd/mm/y	Cal Due dd/mm/y
Hewlett-Packard	HP8546A	3625A00341	EMI Receiver	23/10/02	23/10/03
Fischer Custom	LISN-2	900-4-008	Line Impedance Stabilization Networks	03/07/02	03/07/03
Fischer Custom	LISN-2	900-4-009	Line Impedance Stabilization Networks	03/07/02	03/07/03
EMCO	3104C	4396	30-200MHz Biconical Antenna	19/09/02	19/09/03
EMCO	3146	2860	200-1000MHz Log-Periodic Antenna	27/09/02	27/09/03
EMCO	3115	4945	1-18GHz Horn Antenna	28/06/02	28/06/03

All Test Equipment Used are Calibrated Traceable to NIST Standards.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

2. PRODUCT LABELING

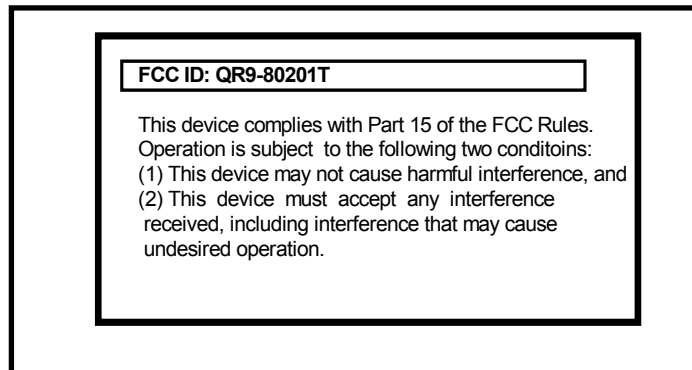


Figure 2.1 FCC ID Label



Figure 2.2 Location of Label on the back of EUT

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). And its antenna was permanently built-in EUT PCB .

This manually operated transmitter will deactivate within 5s after any control switch was released. Testing was performed as EUT was operated at frequency 315 MHz continuously.

.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.1 to Figure 3.3 illustrate this system, which is tested standing along.

Figure 3.1 Radiated Test Setup, position 1

(see the attachment: setup.pdf/rad-1.jpg)

Figure 3.2 Radiated Test Setup, position 2

(see attachment: setup.pdf/rad-2.jpg)

Figure 3.3 Radiated Test Setup, position 3

(see attachment: setup.pdf/rad-3.jpg)

4. SYSTEM SCHEMATICS

Figure 4.1 System Schematics

(see attachment: schematic.jpg)

5. RADIATED EMISSION DATA

5.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

5.2 Test Methods and Conditions


The EUT exercise program was loaded during the radiated emission test (if any). The initial step in collecting radiated data is a EMI Receiver scan of the measurement range 30MHz - 5GHz using peak detector. IF bandwidth is 120kHz and video bandwidth is 300kHz for measuring 30MHz-1GHz. Both bandwidth are 1MHz for above 1GHz measurement.

5.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 5.1.

Test Personnel:

Tester Signature



Typed/Printed Name: David Tu

Date: Dec. 27, 2002

Radiated Test Data

Frequency (MHz)	Polarity [H or V], Position (1)	Height (m)	Azimuth (Degree)	Peak Reading (dB μ V/m)	Calculated Average Reading ⁽⁵⁾ (dB μ V/m)	FCC 3m Limit (dB μ V/m)	Difference from limit (dB)
315.3	H, 1	1	20	73.3		75.6(3)	-2.3
315.3	H, 2	1	40	72.1		75.6	-3.5
315.3	H, 3	1	80	65.2		75.6	-10.4
315.3	V, 1	1	0	73.0		75.6	-2.6
315.3	V, 2	1	90	74.1		75.6	-1.5
315.3	V, 3	1	30	69.5		75.6	-6.1
630.5	H, 1	1	20	50.7		55.6(4)	-4.9
630.5	H, 2	1	30	52.3		55.6	-3.3
630.5	H, 3	1	80	46.3		55.6	-9.3
630.5	V, 1	1	10	54.4		55.6	-1.2
630.5	V, 2	1	90	54.5		55.6	-1.1
630.5	V, 3	1	0	52.3		55.6	-3.3
946.0	V, 2	1	90	49.7		55.6	-5.9
1260.8	H, 1	1	20	47.3		55.6	-8.3
1260.8	H, 2	1	50	49.2		55.6	-6.4
1260.8	V, 1	1	0	48.7		55.6	-6.9
1260.8	V, 2	1	100	50.0		55.6	-5.6
1576.4	V, 2	1	80	49.6		54.0(2)	-4.4

(1) See Figure 3.1, 3.2 and 3.3 for definition of position 1, 2, 3.

(2) Restricted band.

(3) Fundamental limit is 3750-12500 microvolts/meter linear interpolations.

(4) Spurious limit is 375-1250 microvolts/meter linear interpolations.

(5) Because each peak reading is less than the FCC average limit, it is not necessary to show the calculated average reading based on the pulse train characteristic.

5.4 Occupied Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency, in this case, 0.788MHz. Bandwidth is determined at the points 20dB down from the modulated carrier. Figure 5.1 shows the occupied bandwidth plot.

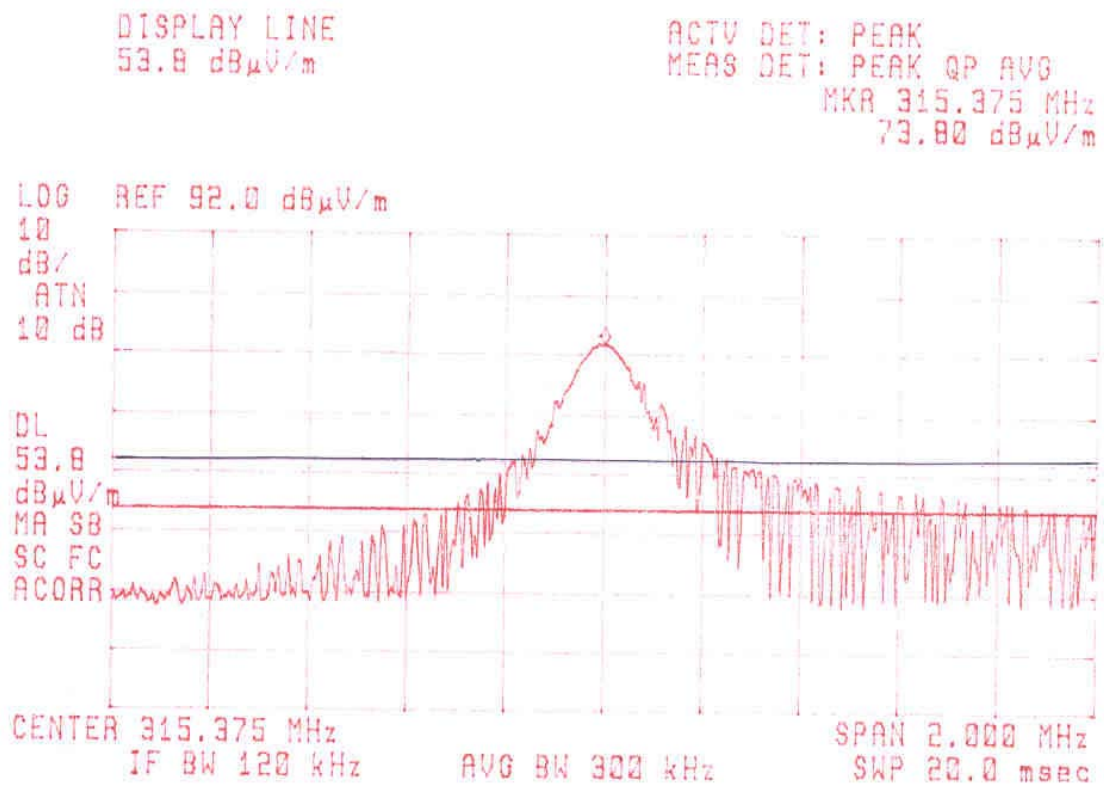


Figure 5.1 Occupied Bandwidth

6. PHOTOS OF TESTED EUT

The following photos show the inside details of the EUT.

See Attachments in the photo files of front.jpg, rear.jpg, inside.jpg, compnt.jpg, foil.jpg