

Tranzeo EMC Labs Inc.  
#2 - 11720 Stewart Crescent  
Maple Ridge, BC  
Canada V2X 9E7

**Tranzeo Wireless Technologies Inc.**  
**TR-6000**  
**EMC Test Report**

12 March 2005

Report Number: TRL120305.1



Bruce Balston, EMC Lab Manager



Andrew Marles, Technical Writer

---

---

---

## Revision History

## Table of Contents

|            |                                                       |           |
|------------|-------------------------------------------------------|-----------|
| <b>1.0</b> | <b>General Information .....</b>                      | <b>4</b>  |
| 1.1        | EUT Description .....                                 | 4         |
| 1.2        | Operational Description .....                         | 5         |
| 1.3        | EUT Testing Configuration .....                       | 5         |
| 1.4        | EUT Modifications .....                               | 5         |
| 1.5        | Test Facilities .....                                 | 6         |
| 1.6        | Test Equipment .....                                  | 6         |
| 1.7        | Test System Details.....                              | 6         |
| 1.8        | Test Results.....                                     | 6         |
| <b>2.0</b> | <b>Conducted Emissions .....</b>                      | <b>7</b>  |
| 2.1        | Test Standard .....                                   | 7         |
| 2.2        | Test Limits .....                                     | 7         |
| 2.3        | Test Setup .....                                      | 7         |
| <b>3.0</b> | <b>Peak Power Output .....</b>                        | <b>10</b> |
| 3.1        | Test Standard .....                                   | 10        |
| 3.2        | Test Limits .....                                     | 11        |
| 3.3        | Test Setup .....                                      | 11        |
| 3.4        | Test Results.....                                     | 12        |
| <b>4.0</b> | <b>Radiated Emissions, General Requirements.....</b>  | <b>13</b> |
| 4.1        | Test Standard .....                                   | 13        |
| 4.2        | Test Limits .....                                     | 13        |
| 4.3        | Test Setup .....                                      | 14        |
| 4.4        | Test Results.....                                     | 15        |
| <b>5.0</b> | <b>Harmonic and Spurious Emissions .....</b>          | <b>16</b> |
| 5.1        | Test Standard .....                                   | 16        |
| 5.2        | Test Limits .....                                     | 16        |
| 5.3        | Test Setup – Conducted Measurements (Harmonics) ..... | 16        |
| 5.4        | Test Results.....                                     | 18        |
| <b>6.0</b> | <b>Band Edge .....</b>                                | <b>20</b> |
| 6.1        | Test Standard .....                                   | 20        |
| 6.2        | Test Limits .....                                     | 20        |
| 6.3        | Test Setup .....                                      | 20        |
| 6.4        | Test Results.....                                     | 22        |
| <b>7.0</b> | <b>Occupied Bandwidth .....</b>                       | <b>23</b> |
| 7.1        | Test Standard .....                                   | 23        |
| 7.2        | Test Limits .....                                     | 23        |
| 7.3        | Test Setup .....                                      | 23        |
| 7.4        | Test Results.....                                     | 24        |
| <b>8.0</b> | <b>Power Spectral Density .....</b>                   | <b>25</b> |
| 8.1        | Test Standard .....                                   | 25        |
| 8.2        | Test Limits .....                                     | 25        |
| 8.3        | Test Setup .....                                      | 25        |
| 8.4        | Test Results 15.247 .....                             | 26        |
| <b>9.0</b> | <b>RF Exposure Evaluation.....</b>                    | <b>27</b> |
| 9.1        | Fries Formula .....                                   | 27        |
| 9.2        | EUT Operating Condition.....                          | 27        |
| 9.3        | RF exposure evaluation distance calculation .....     | 27        |

## 1.0 General Information

### 1.1 EUT Description

|                            |                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------|
| Product Name               | Wireless Access Point                                                                                            |
| Company Name               | Tranzeo Wireless Technologies inc.                                                                               |
| FCC ID                     | QRF-TR-6000                                                                                                      |
| Model No.                  | TR-6000                                                                                                          |
| Frequency Range            | 2400-2483.5 Mhz                                                                                                  |
| Number of Channels         | 11                                                                                                               |
| Transmit Rate              | 11Mbps maximum bit rate specification                                                                            |
| Type of Modulation         | Direct Sequence Spread Spectrum                                                                                  |
| Antenna Type               | External                                                                                                         |
| Antenna Gain               | 2400-2483.5: 24 dBi MAX                                                                                          |
| Product Software           | Tranzeo 2.4 GHz AP Build 19                                                                                      |
| Test Software              | bandwidth test software                                                                                          |
| Operator Channel Selection | By Software                                                                                                      |
| Power Adapter              | Tranzeo Wireless Supplied SP48-181000<br>Input: AC 120V 60Hz, 25.9 W<br>Output: DC 18 V, 1000 mA<br>Serial: 0504 |

Product samples tested:

| Manufacturer     | Model No. | Serial No.   |
|------------------|-----------|--------------|
| Tranzeo Wireless | TR-6000   | TR-6000-EUT3 |

Frequency of each channel:

| Channel   | Frequency | Channel   | Frequency | Channel    | Frequency |
|-----------|-----------|-----------|-----------|------------|-----------|
| Channel 1 | 2412      | Channel 5 | 2432      | Channel 9  | 2452      |
| Channel 2 | 2417      | Channel 6 | 2437      | Channel 10 | 2457      |
| Channel 3 | 2422      | Channel 7 | 2442      | Channel 11 | 2462      |
| Channel 4 | 2437      | Channel 8 | 2447      |            |           |

As an IEEE 802.11b compliant wireless bridge, this device includes a 2.4 GHz receive function and a 2.4 GHz digital modulation transmit function. The unit is fitted with an integrated antenna. There are no user serviceable parts inside the unit. It is factory sealed in a one-time use manner and inaccessible to the end user.

The tests were performed on production sample models to demonstrate compliance with FCC Part 15 Subpart B and Subpart C, as well as Industry Canada RSS-210 Issue 5 for digitally modulated devices.

## 1.2 Operational Description

The TR-6000 series is a wireless network bridge designed specifically for outdoor applications. The device provides a bridge between IEEE802.3 wired Ethernet LANs and IEEE802.11a compliant wireless networks. It uses an external antenna coupled with a 802.11a transceiver to connect to remote wireless clients. The transceiver is connected to N-female and operates in the frequency band 2400-2483.5 MHz. The device transmits digital network data. The unit is mounted externally in fixed point-to-point installations. It is mounted on the exterior of a building or, typically for broadband internet access.

The type of RF modulation is DSSS. The device can transmit data at a bit rate of 11 Mbps or a real-world data rate of approximately 4 Mbps. 64/128 bit Wired Equivalent Protection (WEP) algorithm is used for secure communications. The device's standard compliance ensures that it can communicate with any 802.11b network.

The firmware used with the device prevents the use of channels outside the 2400-2483.5 MHz band.

**The TR-6000 series product is used exclusively in a professionally installed, fixed point-to-point environment.**

## 1.3 EUT Testing Configuration

The unit was tested with the largest gain antenna of each type marketed by the client. These were a 12 dBi dipole antenna; a 17 dBi sector antenna; and a 24 dBi grid antenna. Extensive prescanning for individual tests was performed to determine worst case. Data is presented for worst case measurements only.

The EUT is mounted to a custom non-metallic stand to ease polarization changes and to best represent a typical user installation. The EUT was connected to the host PC so that it could be cycled through the various test modes and channels.

The EUT was tested in the following modes:

- 1) Standby/Receive mode: In this mode the EUT beacons at the lowest possible rate while searching for a client with which to establish communication.
- 2) Data transfer mode: In this mode the EUT is exercised with commercially available bandwidth test software. A link is established between two PCs through the unit and an access point and a transmit rate of 4 Mbps is specified reflecting the worst case data rate of the unit.

## 1.4 EUT Modifications

No modifications were necessary for this unit to comply with FCC Part 15 and Industry Canada RSS-210 Issue 5

## 1.5 Test Facilities

Tranzeo EMC Labs  
 #2-11720 Stewart Cres.  
 Maple Ridge, BC Canada  
 V2X 9E7

Phone: (604) 460-6002

Fax: (604) 460-6005

FCC registration number: 960532

Industry Canada Number: 5238A

## 1.6 Test Equipment

| Manufacturer         | Model            | Description        | Serial Number | Last Cal  |
|----------------------|------------------|--------------------|---------------|-----------|
| Hewlett Packard      | 8560A            | Quasi Peak Adapter | 790142        | 12-Apr-04 |
| Hewlett Packard      | 8566B            | Spectrum Analyzer  | 2937A06114    | 06-Aug-04 |
| Hewlett Packard      | 8568A            | Preselector        | 3010A1095     | 01-Dec-03 |
| Sunol Sciences       | SM46C            | Turntable          | 051204-2      | N/R       |
| Sunol Sciences       | Custom           | Mast Motor         | TREML0001     | N/R       |
| Sunol Sciences       | JB3              | Antenna            | A042004       | 05-May-04 |
| Sunol Sciences       | DRH-118          | Antenna            | A052804       | 02-Jun-04 |
| FCC                  | FCC-LISN-50-25-2 | LISN               | 105           | 02-Jun-04 |
| Wavetek              | 8501             | Power Meter        | 45-00218      | 27-Jul-04 |
| Wavetek              | 17266            | Power Detector     | 1509315       | 27-Jul-04 |
| Hewlett Packard      | 11970A           | Harmonic Mixer     | 2332A00886    | N/R       |
| Hewlett Packard      | 11975A           | Amplifier          | 2517A00949    | N/R       |
| Agilent Technologies | 8563EC           | Spectrum Analyzer  | 4046A00901    | 17-Feb-05 |

## 1.7 Test System Details

The following auxiliary equipment and cables were used for performing the tests:

| Manufacturer | Model   | Description       | S/N         |
|--------------|---------|-------------------|-------------|
| Soyo         | PW-930S | Laptop PC         | 6188        |
| Pheenet      | SW-05P  | 5 port switch     | C0104260954 |
| Tranzeo      | POE-1   | DC injection unit | n/a         |

| Signal Cable Type | Signal Cable Description    | Length |
|-------------------|-----------------------------|--------|
| Cat 5 LAN         | EUT to DC injection unit    | 50m    |
| Cat 5 LAN         | DC Block to Ethernet switch | 2m     |

## 1.8 Test Results

The TR-6000 complies with FCC Part 15 Subparts B and C, as well as Industry Canada RSS-210 Issue 5.

## 2.0 Conducted Emissions

### 2.1 Test Standard

FCC Part 15 Subpart C Section 15.207a

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

### 2.2 Test Limits


| frequency (MHz) | Maximum Level (dBuV)<br>Quasi-Peak | Maximum Level (dBuV)<br>Average |
|-----------------|------------------------------------|---------------------------------|
| 0.15-0.50       | 66-56 (Log Delta)                  | 56-46 (Log Delta)               |
| 0.50-5.00       | 56                                 | 46                              |
| 5.00-30.0       | 60                                 | 50                              |

### 2.3 Test Setup

Both samples were scanned in all modes. Testing was performed over the frequency range of 0.15 MHz to 30 MHz. Only worst case data is shown below.

The unit was exercised using bandwidth test software at a rate of 4 Mbps representing the worst case data rate. Testing was performed using channels 1, 6 and 11. Only worst case data is shown below.

#### 2.3.1 Test Setup Block Diagram

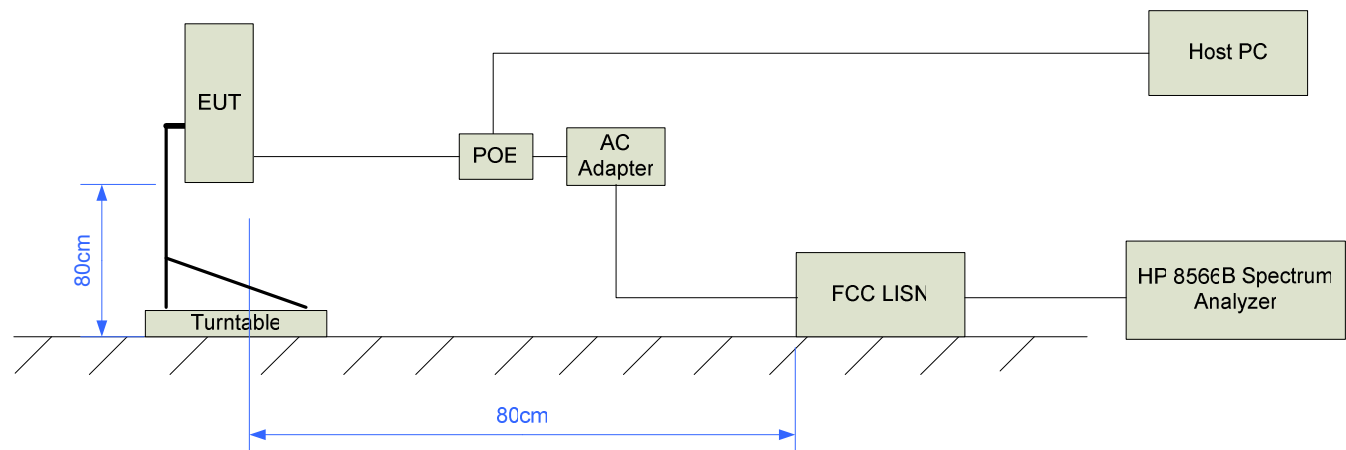


*Note: The unused LISN terminal is terminated with a 50 Ohm terminator.*


## 2.4 Test Results

### 2.5.1 Emissions Plots

#### Line

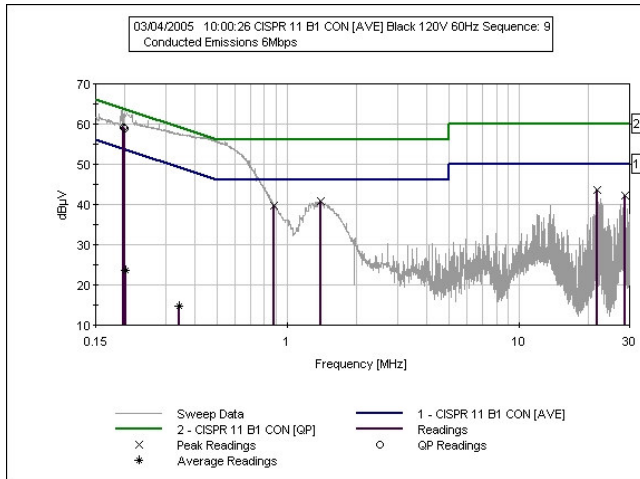

#### Neutral

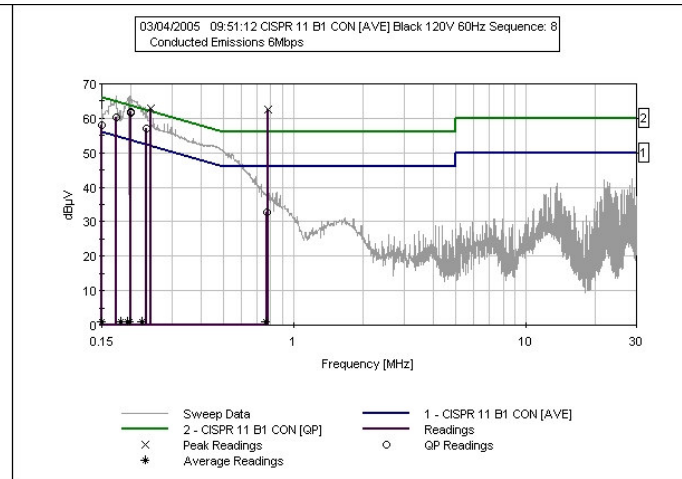

### 2.5.2 Test Data

#### TR-6000 - Line

| Frequency (MHz) | Reading (dBμV) | Correction (dB) | Corr Reading (dBμV) | Limit (dBμV) | Margin (dBμV) | Polarity | Reading type | Result |
|-----------------|----------------|-----------------|---------------------|--------------|---------------|----------|--------------|--------|
| 0.194           | 62.2           | 1.0             | 63.2                | 63.8         | -0.6          | Line     | Peak         | PASS   |
| 0.199           | 58.0           | 1.0             | 59.0                | 63.7         | -4.7          | Line     | QP           | PASS   |
| 0.202           | 22.5           | 1.0             | 23.5                | 53.5         | -30.0         | Line     | Ave          | PASS   |
| 0.205           | 61.8           | 1.0             | 62.8                | 63.4         | -0.6          | Line     | Peak         | PASS   |
| 0.340           | 55.7           | 1.0             | 56.7                | 59.2         | -2.5          | Line     | Peak         | PASS   |
| 0.342           | 13.8           | 1.0             | 14.8                | 49.2         | -34.4         | Line     | Ave          | PASS   |
| 0.877           | 38.7           | 1.0             | 39.7                | 46.0         | -6.3          | Line     | Peak         | PASS   |
| 1.400           | 39.8           | 1.0             | 40.8                | 46.0         | -5.2          | Line     | Peak         | PASS   |
| 21.706          | 42.6           | 1.0             | 43.6                | 50.0         | -6.4          | Line     | Peak         | PASS   |
| 28.705          | 41.2           | 1.0             | 42.2                | 50.0         | -7.8          | Line     | Peak         | PASS   |

**TR-6000 – Neutral**

| Frequency (MHz) | Reading (dBµV) | Correction (dB) | Corr Reading (dBµV) | Limit (dBµV) | Margin (dBµV) | Polarity | Reading type | Result |
|-----------------|----------------|-----------------|---------------------|--------------|---------------|----------|--------------|--------|
| 0.150           | 61.4           | 1.0             | 62.4                | 66.0         | -3.6          | Neutral  | Peak         | PASS   |
| 0.150           | 0.0            | 1.0             | 1.0                 | 56.0         | -55.0         | Neutral  | Ave          | PASS   |
| 0.173           | 65.4           | 1.0             | 66.4                | --           | --            | Neutral  | Peak         | --     |
| 0.174           | 59.4           | 1.0             | 60.4                | 64.8         | -4.4          | Neutral  | QP           | PASS   |
| 0.194           | 0.0            | 1.0             | 1.0                 | 53.9         | -52.9         | Neutral  | Ave          | PASS   |
| 0.196           | 65.1           | 1.0             | 66.1                | --           | --            | Neutral  | Peak         | --     |
| 0.198           | 0.0            | 1.0             | 1.0                 | 53.7         | -52.7         | Neutral  | Ave          | PASS   |
| 0.199           | 65.5           | 1.0             | 66.5                | --           | --            | Neutral  | Peak         | --     |
| 0.200           | 60.8           | 1.0             | 61.8                | 63.6         | -1.8          | Neutral  | QP           | PASS   |
| 0.200           | 60.7           | 1.0             | 61.7                | 63.6         | -1.9          | Neutral  | QP           | PASS   |
| 0.225           | 0.0            | 1.0             | 1.0                 | 52.7         | -51.7         | Neutral  | Ave          | PASS   |
| 0.234           | 56.1           | 1.0             | 57.1                | 62.3         | -5.2          | Neutral  | QP           | PASS   |
| 0.244           | 61.9           | 1.0             | 62.9                | --           | --            | Neutral  | Peak         | --     |
| 0.764           | 0.0            | 1.0             | 1.0                 | 46.0         | -45.0         | Neutral  | Ave          | PASS   |
| 0.774           | 31.7           | 1.0             | 32.7                | 56.0         | -23.3         | Neutral  | QP           | PASS   |
| 0.781           | 61.4           | 1.0             | 62.4                | --           | --            | Neutral  | Peak         | --     |

---

## 3.0 Peak Power Output

### 3.1 Test Standard

FCC CFR47, Part 15, Subpart B 15.247b

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(4)(i) and (c)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

### **3.2 Test Limits**


When used exclusively for fixed, point-to-point operations in the 2400-2483.5 MHz band, the intentional radiator may employ transmitting antennas with directional gain greater than 6 dBi by reducing the maximum output power by 1 dB for every 3 dB of antenna gain beyond 6 dBi. Therefore, with a 19 dBi antenna the maximum conducted output power of the transmitter shall be no greater than 25.5 dBm.

### **3.3 Test Setup**

This test is performed with a modified unit. The antenna is removed and the intentional transmitter fitted with a modified production cable. The only modification to the cable is the addition of an appropriate connector that allows a direct connection to measurement equipment. The output of the EUT is connected directly to the power meter through an attenuator. Prescans using standby (beaconing) mode and data transfer mode were performed. The worst case measurements from standby mode are shown below.

This test is performed on channels 1, 6 and 11.

### 3.3.1 Test Setup Block Diagram

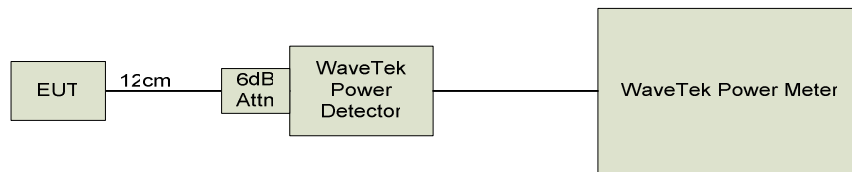

### 3.4 Test Results

#### TR-6000 Beaconing

| Channel | Frequency (MHz) | Measurement (dBm) | Limit (dBm) | Result |
|---------|-----------------|-------------------|-------------|--------|
| 149     | 2412            | 22.31             | 25.5        | PASS   |
| 157     | 2437            | 21.52             | 25.5        | PASS   |
| 165     | 2462            | 21.16             | 25.5        | PASS   |

## 4.0 Radiated Emissions, General Requirements.

### 4.1 Test Standard

FCC Part 15 Subpart C Section 15.209 Radiated emission limits, general requirements.

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 - 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 - 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 - 30.0       | 30                                   | 30                               |
| 30 - 88            | 100 **                               | 3                                |
| 88 - 216           | 150 **                               | 3                                |
| 216 - 960          | 200 **                               | 3                                |
| Above 960          | 500                                  | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.


### 4.2 Test Limits

| Frequency (MHz) | Maximum Field Strength<br>(uV/m @ 3M) | Maximum Field Strength<br>(dBuV/m @ 3m) |
|-----------------|---------------------------------------|-----------------------------------------|
| 30-88           | 100                                   | 40.0                                    |
| 88-216          | 150                                   | 43.5                                    |
| 216-960         | 200                                   | 46.0                                    |
| 960-1000        | 500                                   | 54.0                                    |

### 4.3 Test Setup

The TR-6000 was prescanned in both orientations and at in all frequency bands. The EUT was exercised with bandwidth test software at a rate of 4 Mbps reflecting the worst case data-rate. The EUT was rotated 360 degrees and the receive antenna swept from 1m to 4m to determine the maximum emissions level. The measurement distance was 3m. The TR-6000 with the 24 dBi grid antenna was determined to be worst case. Only the data taken from the worst is shown below.

#### 4.3.1 Test Setup Block Diagram

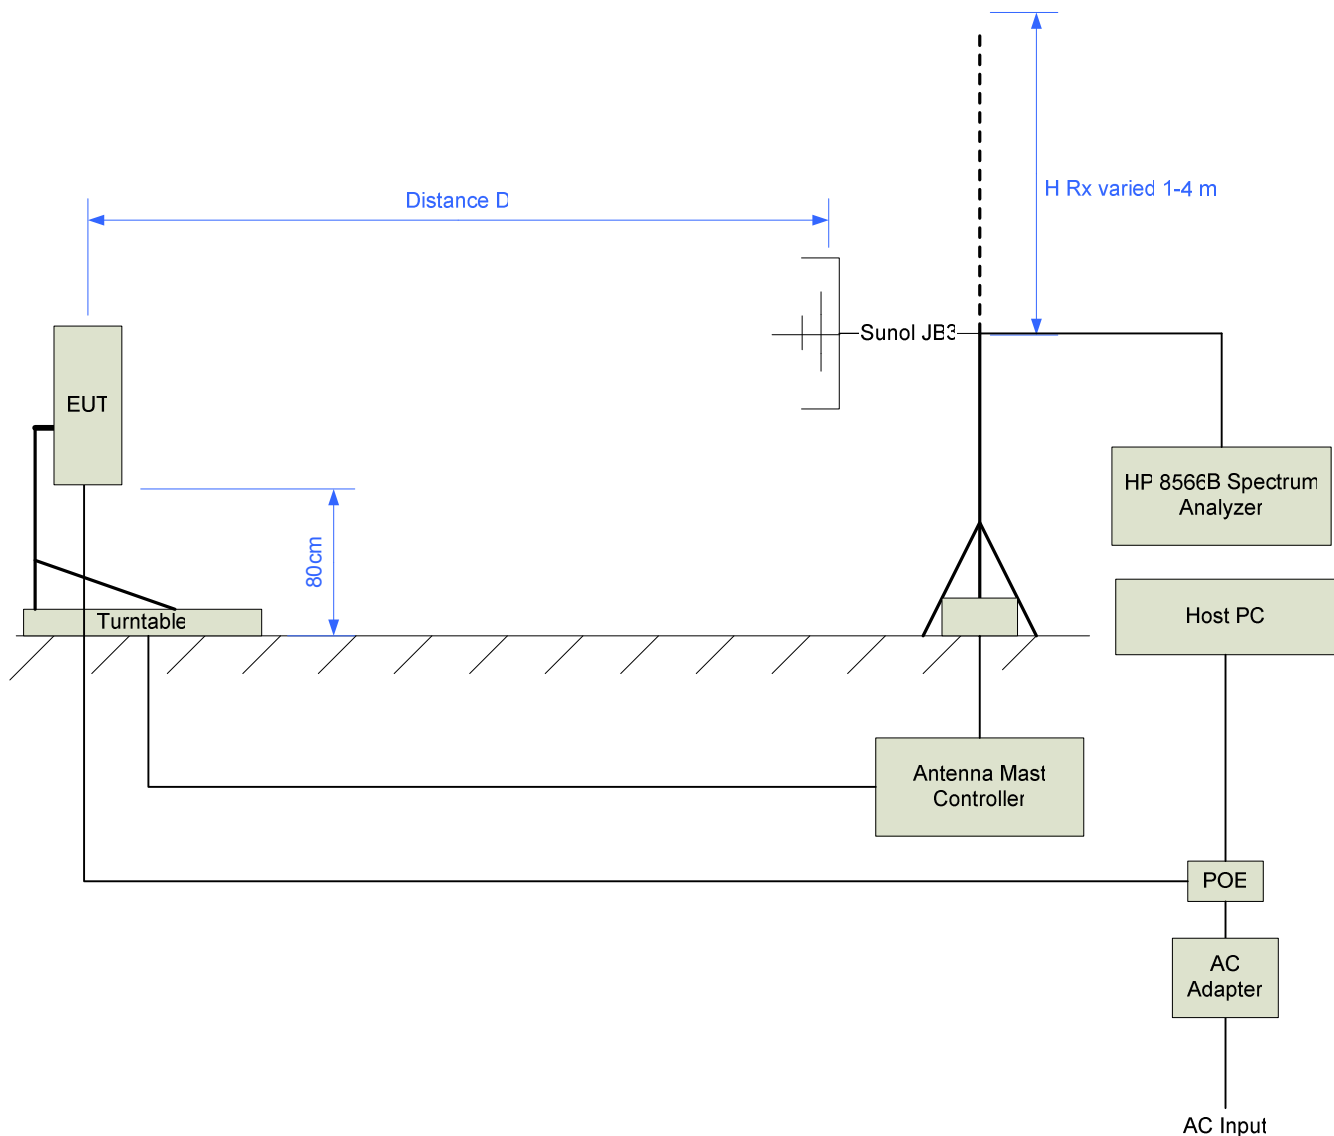

Note: Measurements below 2 GHz were performed with the Sunol JB3 antenna with a measurement distance of 3m. Measurements above 2 GHz were performed with the DRH-118 at a distance of 1m.

#### 4.4 Test Results

| Frequency (MHz) | Meter (dBuV) | Correction (dBuV) | Corr Reading (dBuV) | Limit (dBuV) | Margin (dB) | Polarization | Rtype | Result |
|-----------------|--------------|-------------------|---------------------|--------------|-------------|--------------|-------|--------|
| 31.43           | 16.9         | 21.3              | 38.2                | 40           | -1.8        | Vert         | Peak  | PASS   |
| 32.61           | 14.8         | 20.6              | 35.4                | 40           | -4.6        | Vert         | Peak  | PASS   |
| 33.446          | 5            | 20                | 25                  | 40           | -15         | Vert         | QP    | PASS   |
| 33.49           | 15.9         | 20                | 35.9                | 40           | -4.1        | Vert         | Peak  | PASS   |
| 34.104          | 10.7         | 19.6              | 30.3                | 40           | -9.7        | Vert         | QP    | PASS   |
| 34.106          | 11.4         | 19.6              | 31                  | 40           | -9          | Vert         | QP    | PASS   |
| 34.17           | 18.8         | 19.5              | 38.3                | 40           | -1.7        | Vert         | Peak  | PASS   |
| 34.69           | 19.6         | 19.2              | 38.8                | 40           | -1.2        | Vert         | Peak  | PASS   |
| 38.983          | 10.9         | 16.1              | 27                  | 40           | -13         | Vert         | QP    | PASS   |
| 39.08           | 22.1         | 16.1              | 38.2                | 40           | -1.8        | Vert         | Peak  | PASS   |
| 372.001         | 19.7         | 18.8              | 38.5                | 46           | -7.5        | Horiz        | Peak  | PASS   |
| 450.002         | 15.8         | 20.4              | 36.2                | 46           | -9.8        | Horiz        | Peak  | PASS   |
| 474.986         | 19.7         | 21.5              | 41.2                | 46           | -4.8        | Horiz        | Peak  | PASS   |
| 474.989         | 19.3         | 21.5              | 40.8                | 46           | -5.2        | Horiz        | QP    | PASS   |
| 496.012         | 18.7         | 21.7              | 40.4                | 46           | -5.6        | Vert         | Peak  | PASS   |
| 744.021         | 15.3         | 25.1              | 40.4                | 46           | -5.6        | Horiz        | Peak  | PASS   |
| 992.033         | 17.1         | 28                | 45.1                | 54           | -8.9        | Horiz        | Peak  | PASS   |

## 5.0 Harmonic and Spurious Emissions

### 5.1 Test Standard

FCC CFR 47, Part 15, Subpart B 15.247d

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.2 Test Limits

2400-2483.5 MHz limits:

Fundamental Limit = 137 dBuV

Harmonics and Spurious Emissions = 20 dBc


Restricted Band Emissions = AVG 54 dBuV, PK 74dBuV

### 5.3 Test Setup – Conducted Measurements (Harmonics)


This test is performed with a modified unit. The antenna is removed and the intentional transmitter fitted with a modified production cable. The only modification to the cable is the addition of an appropriate connector that allows a direct connection to measurement equipment. The output of the EUT is connected directly to the spectrum analyzer. The unit is exercised with bandwidth test software at a rate of 4 MBps reflecting the maximum possible transmit rate. This test is performed on channels 1, 6, and 11.

In addition to conducted measurements, extensive radiated pre-testing above 2 GHz is performed. The measurement antenna is scanned around all sides of the EUT to identify signals of interest. Additional measurements at an appropriate measurement distance are performed to ensure that emissions were at maximum. The TR-6000 with the 24 dBi antenna was determined to be worst case.

#### 5.3.1 Test Setup Block Diagram – Conducted Measurements (Harmonics)

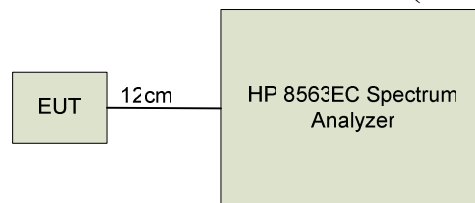

### 5.3.2 Test Setup Block Diagram – Radiated Measurements (Spurious)

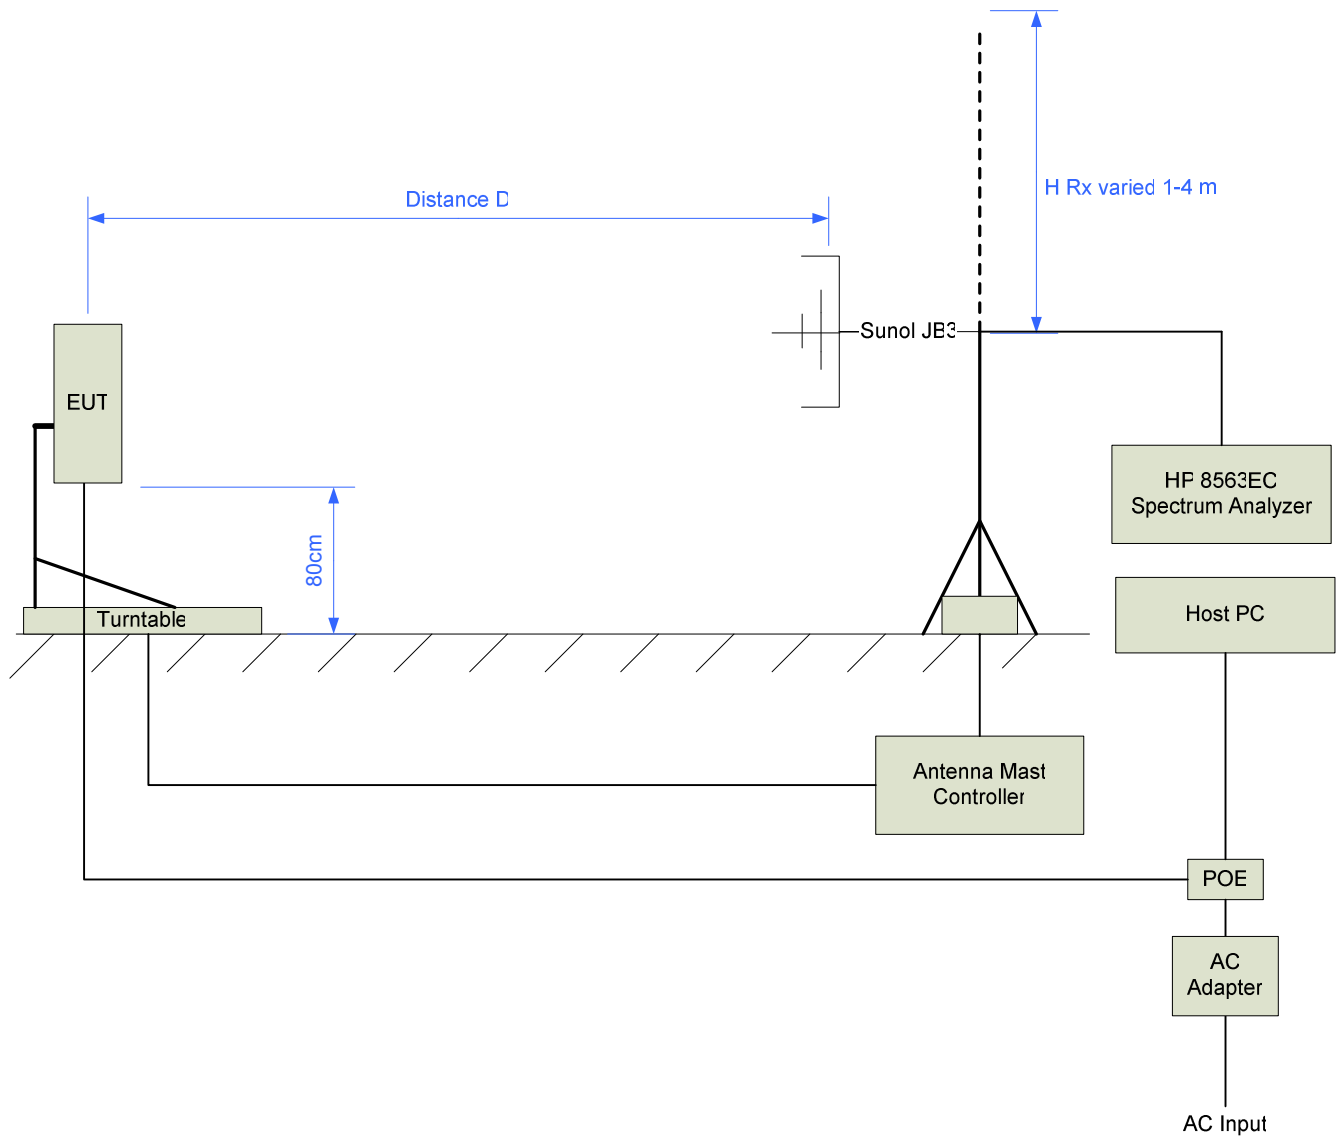

## 5.4 Test Results

### 5.4.1 Test Results 15.247–Harmonics -20 dBc

Channel 1

| Harmonic    | Pol  | Freq (MHz) | Peak Meas TXM (dBuV) | Limit (dBc/ dBuV) | Margin | Result |
|-------------|------|------------|----------------------|-------------------|--------|--------|
| Fundamental | Cond | 2412       | 116.8                | 137.0             | -20.2  | PASS   |
| 2nd         | Cond | 4824       | 61.8                 | 97.3              | -35.5  | PASS   |
| 3rd         | Cond | 7236       | 56.0                 | 97.3              | -41.3  | PASS   |
| 4th         | Cond | 9648       | 54.7                 | 97.3              | -42.6  | PASS   |
| 5th         | Cond | 12060      | 55.7                 | 97.3              | -41.6  | PASS   |
| 6th         | Cond | 14472      | 56.2                 | 97.3              | -41.1  | PASS   |
| 7th         | Cond | 16884      | 55.8                 | 97.3              | -41.5  | PASS   |
| 8th         | Cond | 19296      | 55.7                 | 97.3              | -41.6  | PASS   |
| 9th         | Cond | 21708      | 56.8                 | 97.3              | -40.5  | PASS   |
| 10th        | Cond | 24120      | 57.3                 | 97.3              | -40.0  | PASS   |

Channel 6


| Harmonic    | Pol  | Freq (MHz) | Peak Meas TXM (dBuV) | Limit (dBc/ dBuV) | Margin | Result |
|-------------|------|------------|----------------------|-------------------|--------|--------|
| Fundamental | Cond | 2437       | 117.3                | 137.0             | -19.7  | PASS   |
| 2nd         | Cond | 4874       | 58.7                 | 97.3              | -38.6  | PASS   |
| 3rd         | Cond | 7311       | 55.3                 | 97.3              | -42.0  | PASS   |
| 4th         | Cond | 9748       | 53.3                 | 97.3              | -44.0  | PASS   |
| 5th         | Cond | 12185      | 53.5                 | 97.3              | -43.8  | PASS   |
| 6th         | Cond | 14622      | 56.8                 | 97.3              | -40.5  | PASS   |
| 7th         | Cond | 17059      | 56                   | 97.3              | -41.3  | PASS   |
| 8th         | Cond | 19496      | 55.8                 | 97.3              | -41.5  | PASS   |
| 9th         | Cond | 21933      | 57                   | 97.3              | -40.3  | PASS   |
| 10th        | Cond | 24370      | 57.3                 | 97.3              | -40.0  | PASS   |

Channel 11

| Harmonic    | Pol  | Freq (MHz) | Peak Meas TXM (dBuV) | Limit (dBc/ dBuV) | Margin | Result |
|-------------|------|------------|----------------------|-------------------|--------|--------|
| Fundamental | Cond | 2462       | 116.8                | 137.0             | -20.2  | PASS   |
| 2nd         | Cond | 4924       | 56.2                 | 97.3              | -41.1  | PASS   |
| 3rd         | Cond | 7386       | 57.2                 | 97.3              | -40.1  | PASS   |
| 4th         | Cond | 9848       | 53.5                 | 97.3              | -43.8  | PASS   |
| 5th         | Cond | 12310      | 54.3                 | 97.3              | -43.0  | PASS   |
| 6th         | Cond | 14772      | 56.3                 | 97.3              | -41.0  | PASS   |
| 7th         | Cond | 17234      | 55.8                 | 97.3              | -41.5  | PASS   |
| 8th         | Cond | 19696      | 56                   | 97.3              | -41.3  | PASS   |
| 9th         | Cond | 22158      | 56.7                 | 97.3              | -40.6  | PASS   |
| 10th        | Cond | 24620      | 57.2                 | 97.3              | -40.1  | PASS   |

All conducted harmonics are at least -20 dBc

### 5.4.3 Test Results 15.247– Restricted Bands (Spurious Emissions)

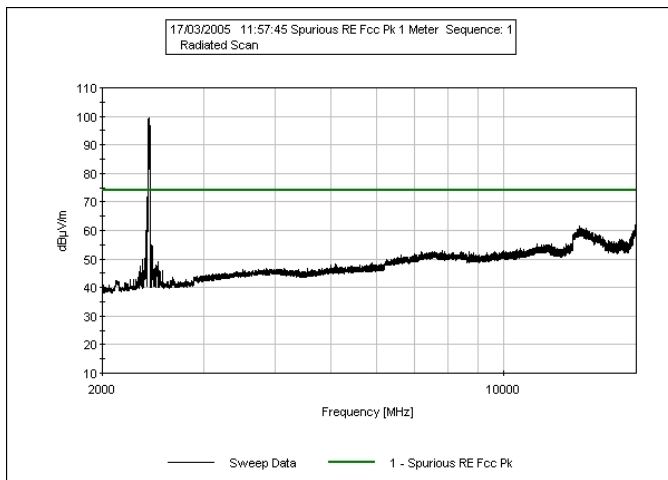

Only spurious emissions covered during band edge testing were detected. Please see section 6.4. No other significant spurious radiated emissions were detected.

## 6.0 Band Edge

### 6.1 Test Standard

FCC CFR 47, Part 15, Subpart B 15.247d

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 6.2 Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Sec. 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a) (see Sec. 15.205(c)).

### 6.3 Test Setup


This test is performed with a modified unit. The antenna is removed and the intentional transmitter fitted with a modified production cable. The only modification to the cable is the addition of an appropriate connector that allows a direct connection to the measurement equipment. The output of the EUT is connected directly to the spectrum analyzer through an attenuator. The unit is exercised with bandwidth test software at a rate of 4 MBps reflecting the worst case transmit rate.

The radiated output measurement is performed at a distance of 3 meters. Extensive prescanning found the 24 dBi grid antenna to be worst case. Only worst case measurements are shown below.


This test is performed on channels 1, and 11.

#### 6.3.1 Test Setup Block Diagram

##### Conducted Setup

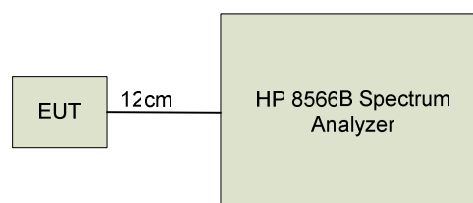


## Radiated Setup

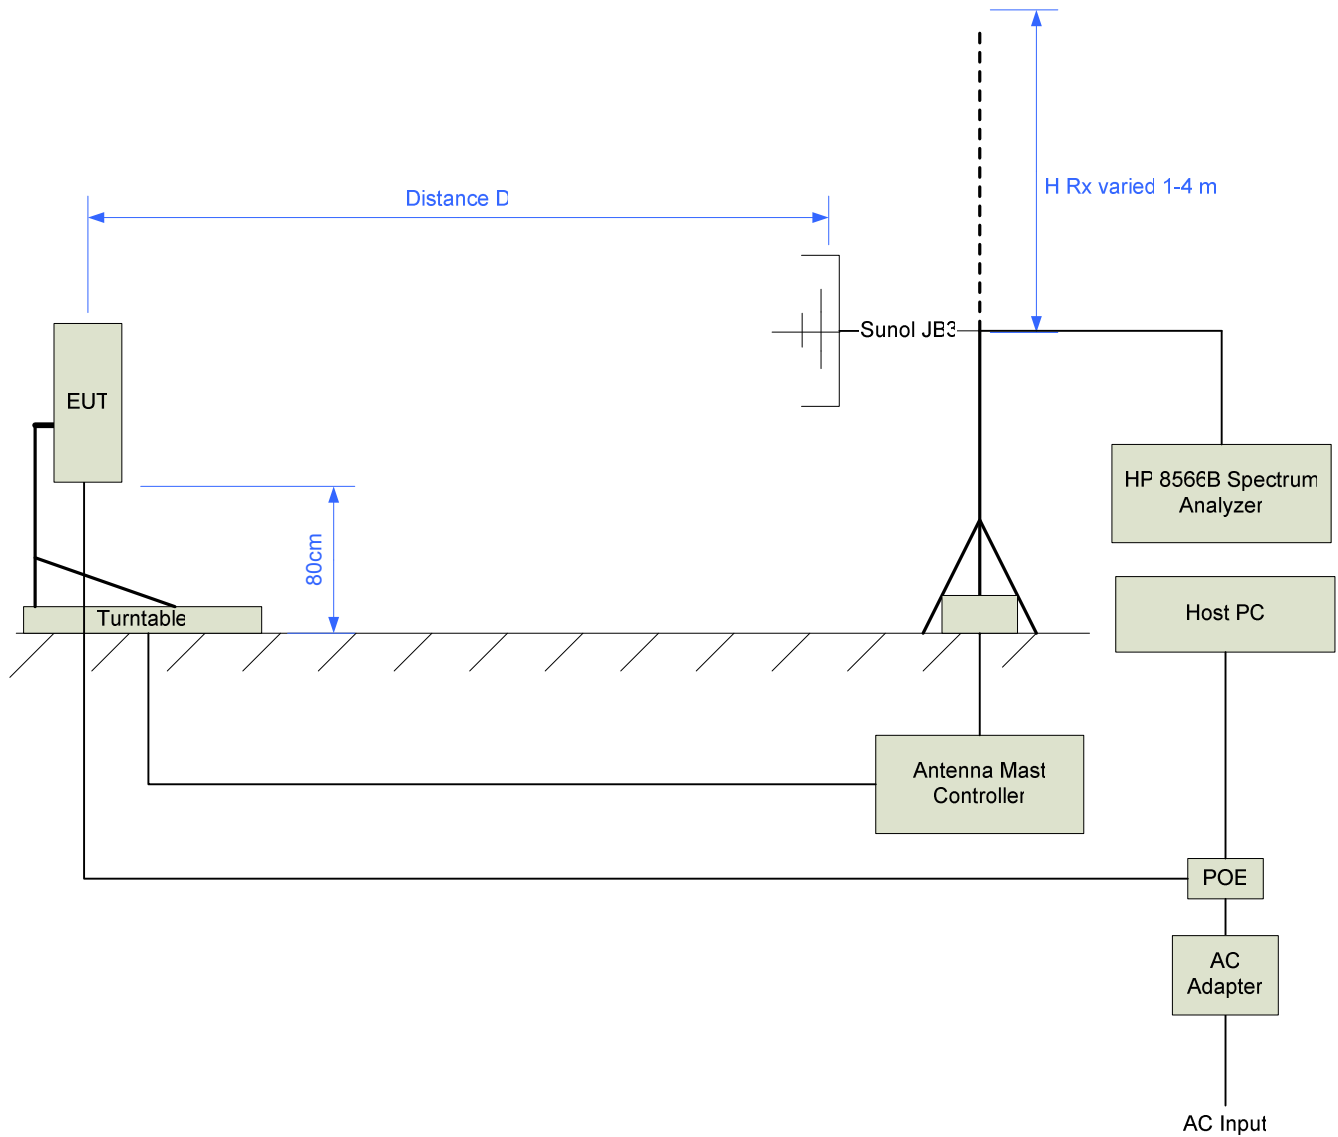

## 6.4 Test Results

This measurement is performed using the delta method. The conducted delta is measured using bandwidth settings of RBW, VBW = 100 KHz. This delta is then subtracted from the peak radiated power which is measured using settings of RBW, VBW = 1 MHz.

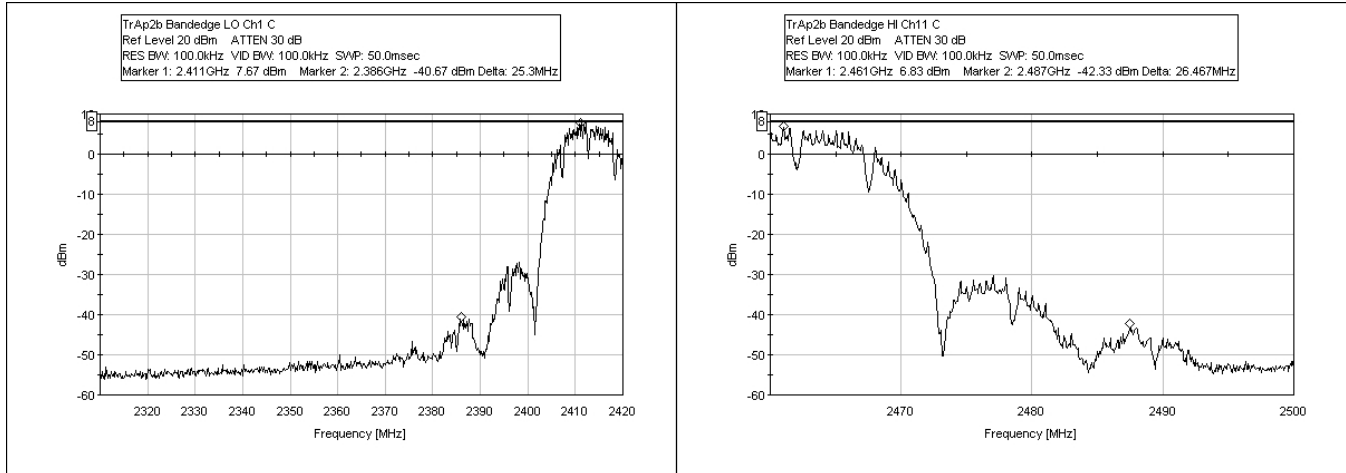

### Test result, Channel 1

| Hi Reading (dBm) | Lo Reading (dBm) | Delta (dB) | Peak Rdg RBW,VBW = 1 MHz (dBuV) | Low Rdg RBW,VBW = 1MHz (dBuV) | Limit (dBuV) | Margin | Result |
|------------------|------------------|------------|---------------------------------|-------------------------------|--------------|--------|--------|
| 7.67             | -40.67           | -48.34     | 122.2                           | 73.86                         | 74.0         | -0.1   | PASS   |

| Average Value (dBuV) | Limit (dBuV) | Margin | Result |
|----------------------|--------------|--------|--------|
| 36.06                | 54.0         | -17.9  | Pass   |

### Test result, Channel 11

| Hi Reading (dBm) | Lo Reading (dBm) | Delta (dB) | Peak Rdg (dBuV) | Low Rdg RBW,VBW = 1MHz (dBuV) | Limit (dBuV) | Margin | Result |
|------------------|------------------|------------|-----------------|-------------------------------|--------------|--------|--------|
| 6.83             | -42.33           | -49.16     | 120.2           | 71.04                         | 74.0         | -3.0   | PASS   |

| Average Value (dBuV) | Limit (dBuV) | Margin | Result |
|----------------------|--------------|--------|--------|
| 33.24                | 54.0         | -20.8  | Pass   |

## 7.0 Occupied Bandwidth

### 7.1 Test Standard

FCC CFR47, Part 15, Subpart B 15.247a

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

- (2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.2 Test Limits


The minimum 6dB bandwidth shall be at least 500 kHz.

### 7.3 Test Setup

This test is performed with a modified unit. The antenna is removed and the intentional transmitter was fitted with a modified production cable. The only modification to the cable is the addition of an appropriate connector that allows a direct connection to the measurement equipment. The output of the EUT is connected directly to the spectrum analyzer through an attenuator. The unit is exercised with bandwidth test software at a rate of 4 MBps reflecting the worst case transmit rate.


This test was performed on channels 1, 6 and 11.

#### 7.3.1 Test Setup Block Diagram

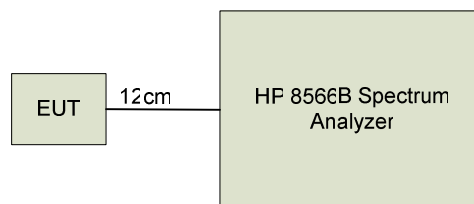

## 7.4 Test Results

### 6 dB Occupied Bandwidth

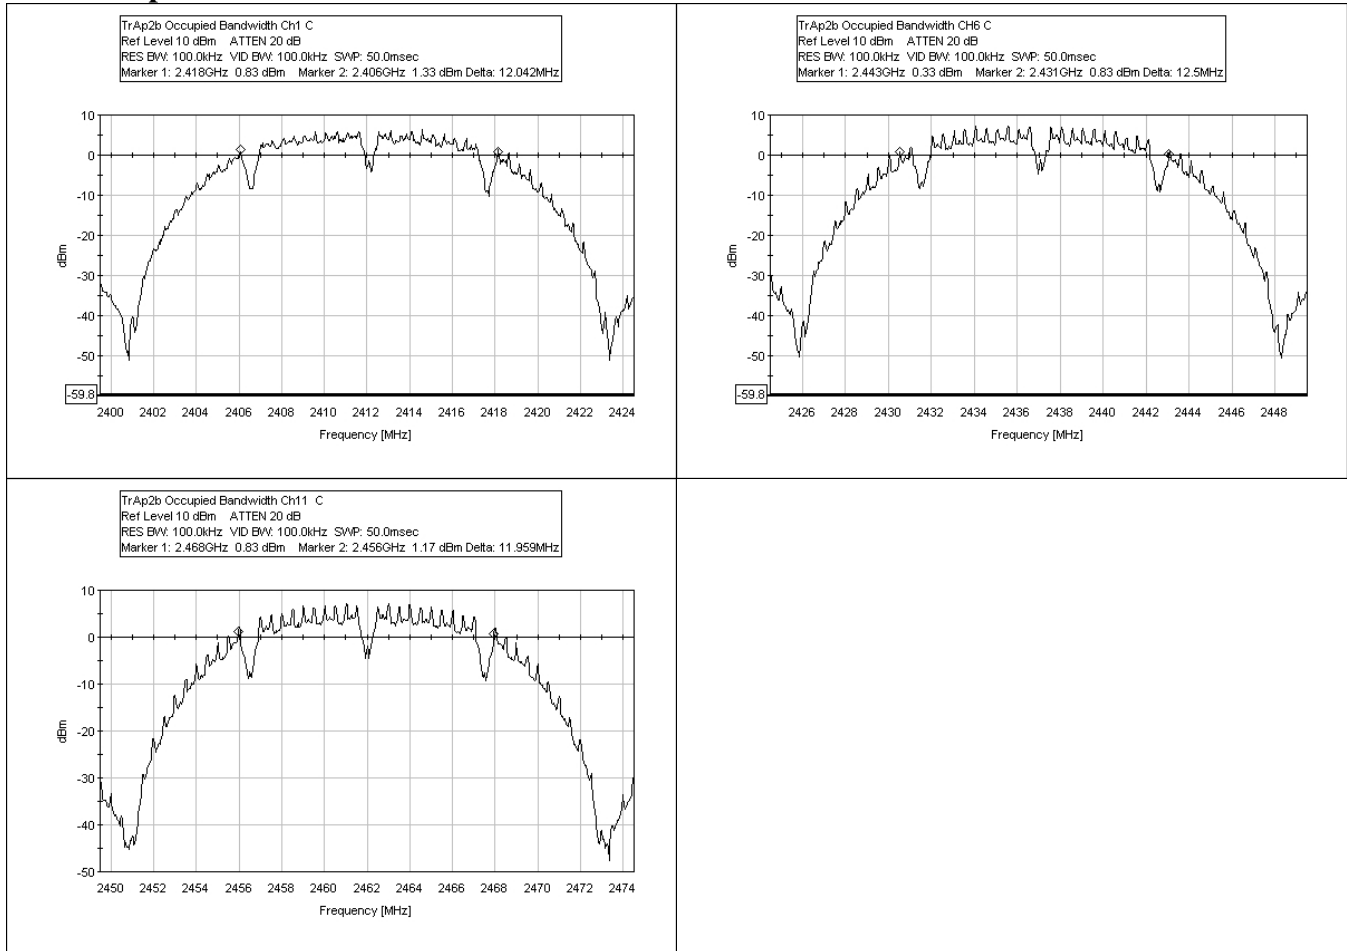

|       | Start Frequency (Mhz) | Stop Frequency (MHz) | Occupied Bandwidth (MHz) | Result |
|-------|-----------------------|----------------------|--------------------------|--------|
| CH 1  | 2406                  | 2418                 | 12.00                    | PASS   |
| Ch 6  | 2431                  | 2443                 | 12.00                    | PASS   |
| Ch 11 | 2456                  | 2468                 | 12.00                    | PASS   |

## 8.0 Power Spectral Density

### 8.1 Test Standard

FCC CFR 47, Part 15, Subpart B 15.247e

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 8.2 Test Limits


The transmitted power density shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.3 Test Setup


This test is performed with a modified unit. The antenna is removed and the intentional transmitter fitted with a modified production cable. The only modification to the cable is the addition of an appropriate connector that allows a direct connection to measurement equipment. The unit is exercised with bandwidth test software at a rate of 4 MBps reflecting the worst case transmit rate.

This test was performed on channels 1, 6 and 11.

#### 8.3.1 Test Setup Block Diagram

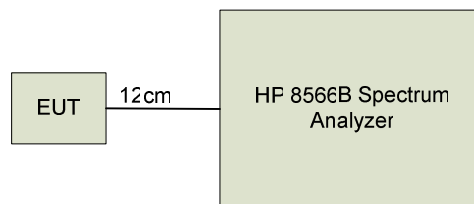

## 8.4 Test Results 15.247

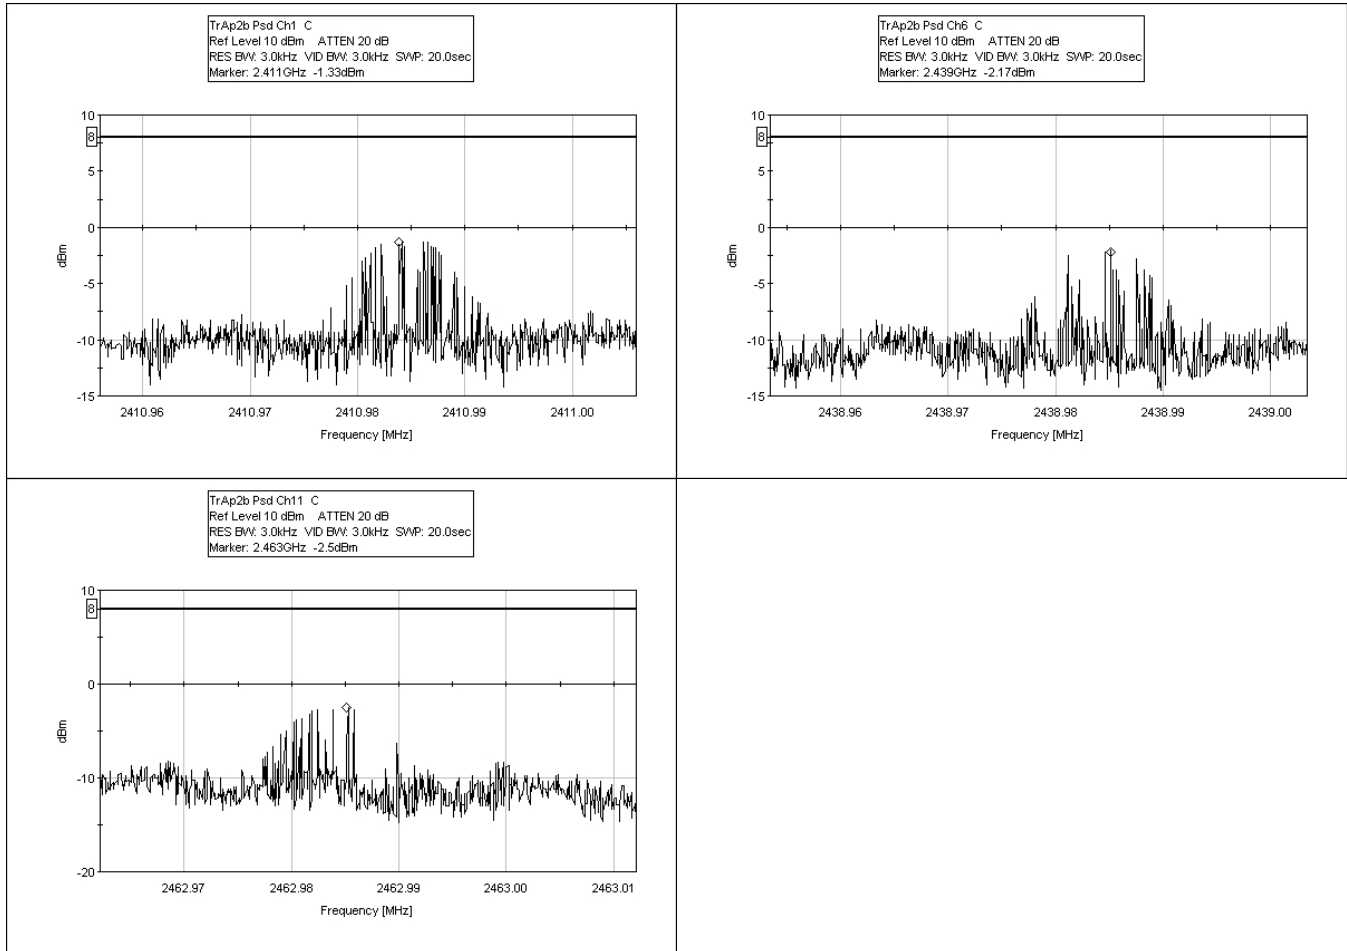

| Frequency (MHz) | Measurement (dBm) | Limit (dBm) | Result |
|-----------------|-------------------|-------------|--------|
| 2412            | -1.33             | +8          | PASS   |
| 2437            | -2.17             | +8          | PASS   |
| 2462            | -2.50             | +8          | PASS   |

## 9.0 RF Exposure Evaluation

FCC 1.1310 states the criteria listed in the table below shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter. Further information on evaluating compliance with these limits can be found in the FCC's OST/OET Bulletin Number 65, "Evaluating Compliance with FCC-Specified Guidelines for Human Exposure to Radiofrequency Radiation."

| Frequency Range (MHZ)                                    | Electric Field Strength (V/m) | Magnetic Field Strength (A/M) | Power Density (mW/cm <sup>2</sup> ) | Average Time |
|----------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------|
| (A) Limits for Occupational/Control Exposures            |                               |                               |                                     |              |
| 300-1500                                                 | --                            | --                            | F/300                               | 6            |
| 1500-100,000                                             | --                            | --                            | 5                                   | 6            |
| (B) Limits for General Population/Uncontrolled Exposures |                               |                               |                                     |              |
| 300-1500                                                 | --                            | --                            | F/1500                              | 6            |
| 1500-100,000                                             | --                            | --                            | 1                                   | 30           |

### 9.1 Fries Formula

Fries transmission formula:  $P_d = (P_{out} * G) / (4 * \pi * r^2)$  Where

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW.

$G$  = gain of antenna in the direction of interest relative to an isotropic radiator.

$R$  = the distance between the observation point and the center of the radiator in cm.

$P_d$  is the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna we can calculate the distance  $r$  where the MPE limit is reached.

### 9.2 EUT Operating Condition

The maximum antenna gain is 24 dBi for the TR-6000 as stated by the manufacturer.

### 9.3 RF exposure evaluation distance calculation

#### TR-6000


| Chan | Freq (MHz) | Output Power to Antenna (dBm) | Output Power to Antenna (mW) | Antenna Gain (dBi) | Antenna Gain | r (cm) |
|------|------------|-------------------------------|------------------------------|--------------------|--------------|--------|
| 1    | 2412       | 22.31                         | 170                          | 24                 | 251.1886     | 58.3   |
| 6    | 2437       | 21.52                         | 142                          | 24                 | 251.1886     | 53.3   |
| 11   | 2462       | 21.16                         | 131                          | 24                 | 251.1886     | 51.2   |

As shown above, the minimum distance where the MPE limit is reached is **59** cm for the TR-6000.

## 10.0 Test Photos



TR-6000 with 24 dBi grid

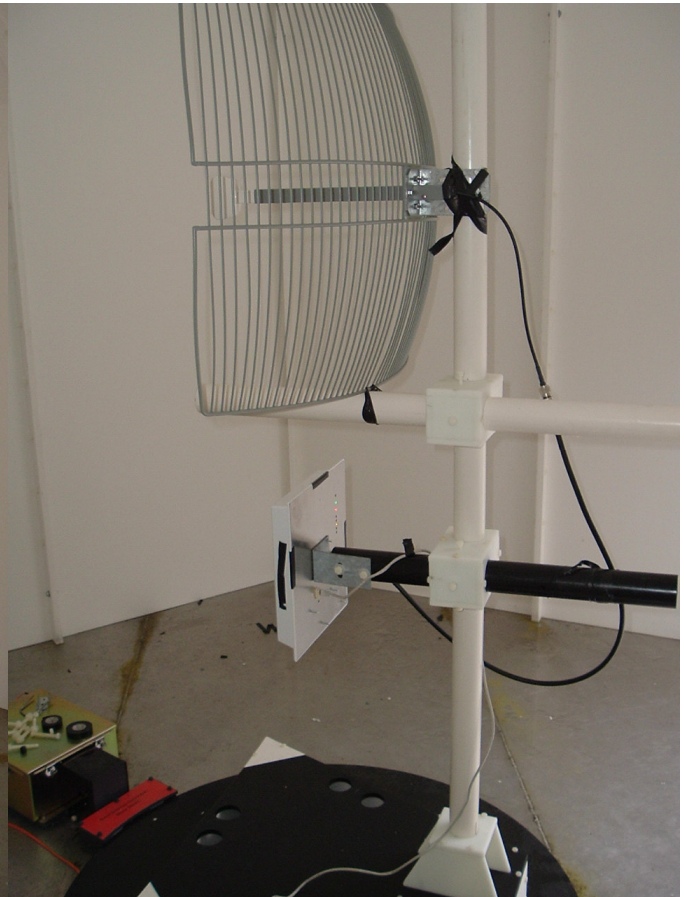


24 dBi grid cable lay



TR-6000 with 17 dBi sector



17 dBi cable lay

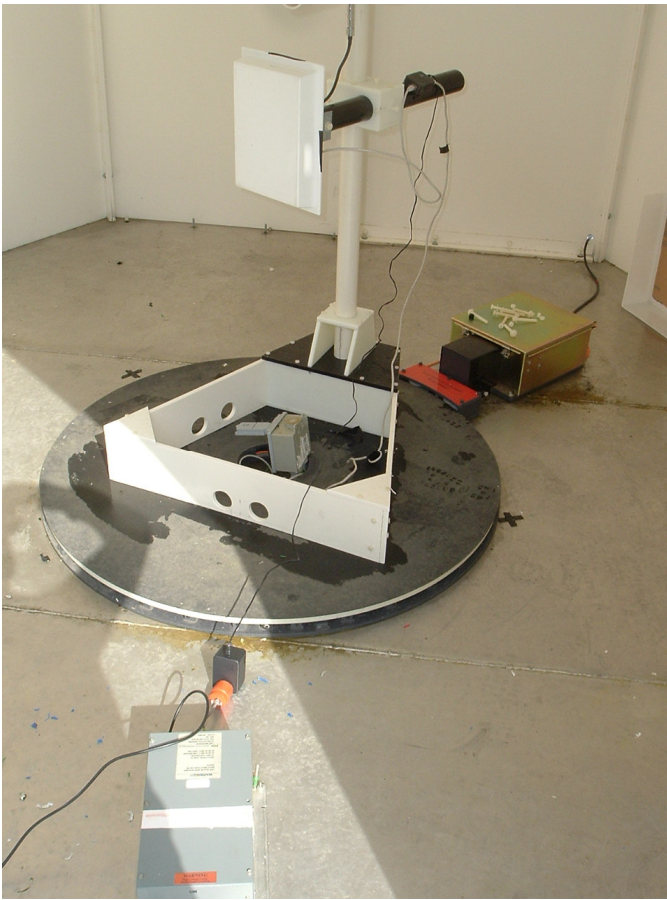

Conducted Emissions Test Setup