





<b>SAR EVALUATION REPORT</b> <b>FCC 47 CFR Part 2.1093</b> <b>ISED RSS-102</b> <b>RF-Exposure evaluation of portable equipment</b>	
<b>Report Reference No</b>	G0M-1908-8377-TFC093SR-V02
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
<b>Address</b>	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b>	 DAkkS - Registration number : D-PL-12092-01-03 (ISED) DAkkS - Registration number : D-PL-12092-01-04 (FCC)
<b>Applicant</b>	BIOTRONIK SE & Co. KG
<b>Address</b>	Woermannkehre 1 12359 Berlin GERMANY
<b>Test Specification Standard(s)</b>	FCC 47 CFR 2.1093 ISED RSS-102 Issue 5 IEEE 1528:2013
<b>Non-Standard Test Method</b>	None
<b>Equipment under Test (EUT):</b>	
<b>Product Description</b>	CardioMessenger Smart / Telemonitoring System
<b>Model(s)</b>	CardioMessenger Smart 4G
<b>Additional Model(s)</b>	None
<b>Brand Name(s)</b>	BIOTRONIK
<b>Hardware Version(s)</b>	CardioMessenger Smart 4G mit LP best. LP1/Telex Smart 4G Rev Cx
<b>Software Version(s)</b>	ULP_HIGH_1_32_0, ULP_LOW_1_13_0, M0B.800004
<b>FCC-ID</b>	QRI-CMSMART4GWW
<b>IC</b>	4708A-CMSMART4GWW
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Test Lab Temperature	15 - 35 °C	
Test Lab Humidity	30 – 50 %	
Date of receipt of test item	2019-09-03	
<b>Report:</b>		
Compiled by	Charline Graf	
Tested by (+ signature)	Charline Graf	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2021-08-26	
Total number of pages	174	
<b>General Remarks:</b>		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		

**SAR EVALUATION SUMMARY**

SAR Summary								
Exposure Condition		Equipment Classes						
		PCE	PCF	PCT	NII	DTS	DSS	TNT
Standalone-Tx	Head (1-g) [W/kg]	-	-	-	-	-	-	-
	Body-worn (1-g) [W/kg]	-	-	1.438	-	-	-	-
	Hotspot (1-g) [W/kg]	-	-	-	-	-	-	-
	Extremities (10-g) [W/kg]	-	-	-	-	-	-	-
Simultaneous-Tx	Head (1-g) [W/kg]	-	-	-	-	-	-	-
	Body-worn (1-g) [W/kg]	-	-	1.43828	-	-	-	-
	Hotspot (1-g) [W/kg]	-	-	-	-	-	-	-
	Extremities (10-g) [W/kg]	-	-	-	-	-	-	-

**VERSION HISTORY**

Version History			
Version	Issue Date	Remarks	Revised By
01	2020-05-20	Initial Release	
02	2021-08-26	Replaced document: G0M-1908-8377-TFC093SR-V01 Replaced by: G0M-1908-8377-TFC093SR-V02  Reason: New Issue.	C. Graf

## ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EIRP	Equivalent Isotropic Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
LPE	Low Power Exclusion
SAR	Specific Absorption Rate

**REPORT INDEX**

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>7</b>
<b>2</b>	<b>Reference Documents.....</b>	<b>9</b>
<b>3</b>	<b>SAR System and Procedures.....</b>	<b>10</b>
3.1	SAR System Description .....	10
3.2	SAR System Components.....	11
3.3	Tissue Liquid Validation .....	14
3.4	Tissue Liquid Recipes .....	16
3.5	SAR System Validation .....	17
3.6	SAR Head Positions.....	19
3.7	SAR Body Positions .....	23
3.8	SAR Measurement Procedure .....	24
3.9	SAR Equipment List .....	26
3.10	Other Equipment List.....	26
3.11	SAR Measurement Uncertainty .....	27
<b>4</b>	<b>General Evaluation Guidance and Procedures .....</b>	<b>28</b>
4.1	SAR Limits .....	28
4.2	SAR Evaluation for Head .....	28
4.3	SAR Evaluation for body-worn accessory .....	28
4.4	SAR Evaluation for Extremities .....	29
4.5	Required test channels.....	29
4.6	Maximum output power and tune-up tolerance .....	30
4.7	Reported SAR .....	30
4.8	Standalone SAR Test Exclusion.....	31
4.9	SAR Value Estimation .....	32
4.10	Simultaneous SAR Test Exclusion .....	33
4.11	General SAR Test Reduction .....	33
4.12	SAR Measurement Variability .....	34
4.13	SAR Measurement Uncertainty .....	34
4.14	SAR DUT Holder Perturbations.....	35
4.15	SAR Reporting .....	36
<b>5</b>	<b>Product specific SAR Evaluation Procedures .....</b>	<b>38</b>
5.1	SAR Evaluation for UMPC Mini-Tablets .....	38
<b>6</b>	<b>Technology specific SAR Evaluation Procedures .....</b>	<b>39</b>
6.1	MedRadio.....	39
6.2	LTE Cat-M1 .....	40
<b>7</b>	<b>SAR Evaluation for Standalone Transmitter Operation .....</b>	<b>45</b>
7.1	Radio Chipset/Module 1: MedRadio.....	45
7.2	Radio Chipset/Module 1: LTE Cat-M1 .....	50
<b>8</b>	<b>SAR Evaluation for Multi-Transmitter Operation .....</b>	<b>75</b>
8.1	Concurrent radio operational modes .....	75
8.2	Sum of SAR evaluation .....	75

## 1 Equipment (Test Item) Under Test

General Information	
Description	CardioMessenger Smart / Telemonitoring System
Model	CardioMessenger Smart 4G
Additional Model(s)	None
Brand Name(s)	BIOTRONIK
Serial Number(s)	80216079
Hardware Version(s)	CardioMessenger Smart 4G mit LP best. LP1/Telex Smart 4G Rev Cx
Software Version(s)	ULP_HIGH_1_32_0, ULP_LOW_1_13_0, MOB.800004
FCC Certification	
FCC-ID	QRI-CMSMART4GWW
ISED Certification	
IC	4708A-CMSMART4GWW
PMN	CardioMessenger Smart 4G
HVIN	CardioMessenger Smart 4G
FVIN	n/a
HMN	n/a
Equipment Classification	
Environment	General public
Type	Production Unit
Special Device Type	<input type="checkbox"/> Handset <input checked="" type="checkbox"/> UMPC Mini-Tablet <input type="checkbox"/> USB Dongle <input type="checkbox"/> Non-specific
Number of radio chipsets/modules	2
Radio technologies of chipset/module 1	MedRadio
Radio technologies of chipset/module 2	LTE Cat-M1

Equipment Radio Chipset/Module 1					
MedRadio	Equipment Class	TNT			
	Frequency Range	402.45-404.85 MHz			
	Mode(s)	2-FSK / 8 kbps 2-FSK / 197 kbps			
	Antenna	MICS			
	Use case(s)	Body-worn			
	Hotspot mode(s)	None			
Equipment Radio Chipset/Module 2					
LTE Cat-M1	Equipment Class	PCT			
	Frequency Band(s)	FDD2 FDD4 FDD5 FDD12 FDD26			
	Frequency Range(s)	UL: 1850-1910 MHz UL: 1710-1755 MHz UL: 824-849 MHz UL: 699-716 MHz UL: 814-849 MHz			
	Supported Bandwidths	FDD2	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz	<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
		FDD4	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz	<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
		FDD5	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz	<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz	<input type="checkbox"/> 15 MHz <input type="checkbox"/> 20 MHz
		FDD12	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz	<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz	<input type="checkbox"/> 15 MHz <input type="checkbox"/> 20 MHz
		FDD26	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz	<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz	<input checked="" type="checkbox"/> 15 MHz <input type="checkbox"/> 20 MHz
	Modulation(s)	QPSK, 16-QAM			
	Power Class	3 (23 dBm)			
	Duplex mode	Half-duplex			
	Mode(s)	Data			
	Overlapping Bandwidth Support	Yes			
	Antenna	LTE			
Use case(s)	Body-worn				
Hotspot mode(s)	None				



## 2 Reference Documents


KDB Publications		
Name	Description	Date
447498 D01 v06	Mobile and Portable Devices RF Exposure Procedures And Equipment Authorization Policies	2015-10
865664 D01 v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz	2015-08
865664 D02 v01r02	RF Exposure Compliance Reporting and Documentation Considerations	2015-10
648474 D03 v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers	2015-12
680106 D01 v03	RF Exposure Considerations for Wireless Charging Applications	2018-04
616217 D04 v01r02	SAR Evaluation Consideration for Laptops and Netbooks and Tablets	2015-10
941225 D05 v02r05	SAR Evaluation Considerations for LTE Devices	2015-12
941225 D05A v01r02	Rel. 10 LTE SAR Test Guidance and KDB Inquiries	2015-10
648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets	2015-10
941225 D06 v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities	2015-10
941225 D07 v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices	2015-10
248227 D01 v02r02	SAR Guidance for 802.11 (Wi-Fi) Transmitters	2015-10
690783 D01 v01r03	SAR Listings on Equipment Authorization Grants	2013-09
941225 D01 v03r01	SAR Measurement Procedures for 3G Devices	2015-10
447498 D02 v02r01	SAR Measurement Procedures for USB Dongle Transmitters	2015-10

TCB Council Presentations		
Name	Description	Date
RF Exposure Procedures Update	GSM/GPRS SAR	2013-10
RF Exposure Procedures	Overlapping LTE Bands	2015-04
RF Exposure Procedures	Bluetooth Duty Factor	2016-10
RF Exposure Procedures	DUT Holder Perturbations	2016-10
RF Exposure Procedures	HSUPA Configuration Update	2017-05
RF Exposure Procedures	802.11ax SAR Testing	2019-04
RF Exposure Procedures	SPLSR Hotspot Combination	2019-11
RF Exposure Procedures	LTE UL/DL Carrier Aggregation	2017-11
RF Exposure Procedures	LTE DL CA Test Exclusion	2018-04

KDB Guidance/Inquiry		
Name	Description	Date
511278	Resource Block Allocation for LTE Cat-M1	2019-04


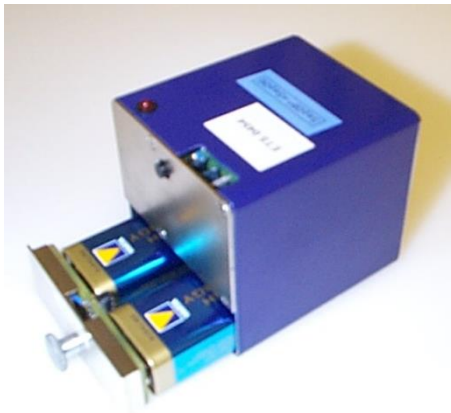

### 3 SAR System and Procedures


#### 3.1 SAR System Description

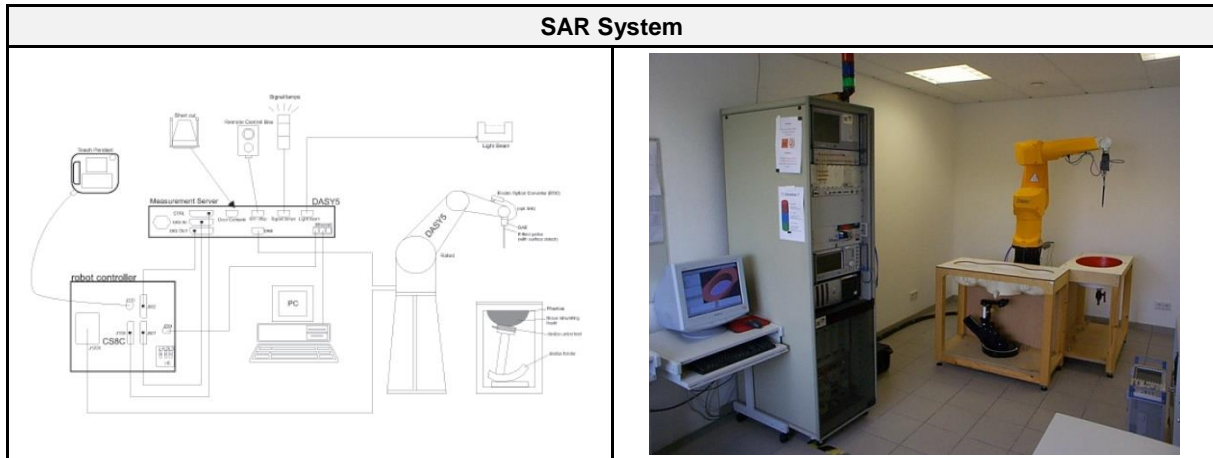



SAR System Components
<ul style="list-style-type: none"> <li>– A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE)</li> <li>– An isotropic field probe optimized and calibrated for the targeted measurement</li> <li>– A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC</li> <li>– The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server</li> <li>– The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts</li> <li>– The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning</li> <li>– A computer running Win7 professional operating system and the DASY5 software</li> <li>– Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc</li> <li>– The phantom, the device holder and other accessories according to the targeted measurement</li> </ul>


### 3.2 SAR System Components

<b>SAR Component - Robot</b>	
<ul style="list-style-type: none"> <li>- The DASY5 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France)</li> <li>- High precision (repeatability 0.02 mm)</li> <li>- High reliability (industrial design)</li> <li>- Jerk-free straight movements</li> <li>- Low ELF interference (the closed metallic construction shields against motor control fields)</li> <li>- 6-axis controller</li> </ul>	
<b>SAR Component - DAE</b>	
<ul style="list-style-type: none"> <li>- The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multi-plexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock</li> <li>- The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB</li> </ul>	
<b>SAR Component - Probe</b>	
<ul style="list-style-type: none"> <li>- One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges</li> <li>- Frequency Range: 10 MHz to 6 GHz</li> <li>- Linearity: <math>\pm 0.2</math>dB (30MHz to 6GHz)</li> <li>- Directivity: <ul style="list-style-type: none"> <li>▪ <math>\pm 0.3</math> dB in HSL (rotation around probe axis)</li> <li>▪ <math>\pm 0.5</math> dB in tissue material (rotation normal to probe axis)</li> </ul> </li> <li>- Dynamic Range: <math>5\mu</math>W/g to <math>&gt; 100</math>mW/g</li> <li>- Dimensions: <ul style="list-style-type: none"> <li>▪ Overall Length: 337mm (Tip: 20mm)</li> <li>▪ Tip Diameter: 2.5mm (Body: 12mm)</li> <li>▪ Distance from probe tip to dipole centers: 1mm</li> </ul> </li> </ul>	

<b>SAR Component – Twin Phantom</b>	
<ul style="list-style-type: none"> <li>– Material: Vinyl ester, fiberglass reinforced (VE-GF)</li> <li>– Shell Thickness: <math>2 \pm 0.2</math> mm (<math>6 \pm 0.2</math> mm at ear point)</li> <li>– Three measurement areas:                             <ul style="list-style-type: none"> <li>▪ Left Hand</li> <li>▪ Right Hand</li> <li>▪ Flat Phantom</li> </ul> </li> <li>– Length: 1000 mm</li> <li>– Width: 500 mm</li> <li>– Height: adjustable feet</li> <li>– Filling Volume: approx. 25 liters</li> </ul>	
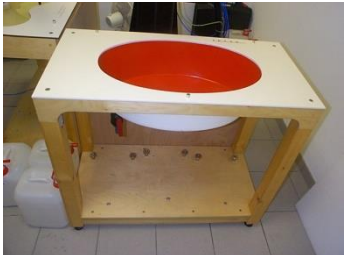
<b>SAR Component – ELI Phantom</b>	
<ul style="list-style-type: none"> <li>– Intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz</li> <li>– Material: Vinyl ester, fiberglass reinforced (VE-GF)</li> <li>– Shell thickness: <math>2.0 \pm 0.2</math> mm (bottom plate)</li> <li>– Major axis: 600 mm</li> <li>– Minor axis: 400 mm</li> <li>– Filling Volume: approx. 30 liters</li> </ul>	

<b>SAR Component – ELI Phantom</b>	
<ul style="list-style-type: none"> <li>– Is designed to cope with the different positions given in the standard</li> <li>– It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points)</li> <li>– The rotation centers for both scales is the ear reference point (ERP)</li> <li>– Is constructed of low-loss POM material having the following dielectric parameters: relative permittivity <math>\epsilon=3</math> and loss tangent <math>\delta=0.02</math></li> </ul>	

<b>SAR Component – Dipole 750 MHz</b>	
<ul style="list-style-type: none"> <li>– Symmetrical dipole with <math>\lambda/4</math> balun</li> <li>– Frequency: 750 MHz</li> <li>– Return Loss: <math>&gt;20</math> dB at specified validation position</li> <li>– Power Capability:                             <ul style="list-style-type: none"> <li>▪ <math>&gt;100</math> W (<math>f &lt; 1</math> GHz)</li> <li>▪ <math>&gt;40</math> W (<math>f &gt; 1</math> GHz)</li> </ul> </li> <li>– Dipole length: 179 mm</li> <li>– Overall height: 330.0</li> </ul>	

**SAR Component – Dipole 900 MHz**

- Symmetrical dipole with  $\lambda/4$  balun
- Frequency: 900 MHz
- Return Loss: >20 dB at specified validation position
- Power Capability:
  - >100 W (f <1 GHz)
  - >40 W (f >1 GHz)
- Dipole length: 148.5 mm
- Overall height: 340.0



**SAR Component – Dipole 1800 MHz**

- Symmetrical dipole with  $\lambda/4$  balun
- Frequency: 1800 MHz
- Return Loss: >20 dB at specified validation position
- Power Capability:
  - >100 W (f <1 GHz)
  - >40 W (f >1 GHz)
- Dipole length: 72.5 mm
- Overall height: 300.0



**SAR Component – Dipole 1900 MHz**

- Symmetrical dipole with  $\lambda/4$  balun
- Frequency: 1900 MHz
- Return Loss: >20 dB at specified validation position
- Power Capability:
  - >100 W (f <1 GHz)
  - >40 W (f >1 GHz)
- Dipole length: 67.7 mm
- Overall height: 300.0



**Depth of Liquid**

ELI Phantom -15 cm tissue depth



Twin Phantom -15 cm tissue depth




### 3.3 Tissue Liquid Validation

Tissue Simulating Liquid Target Values (FCC KDB 865664 D01)				
Target Frequency [MHz]	Head		Body	
	$\epsilon_r$	$\sigma$ [S/m]	$\epsilon_r$	$\sigma$ [S/m]
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

Note1: Per FCC KDB 865664 D01 the dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency

Note 2: Per FCC KDB 865664 D01 if the deviation from the target values are within 5 to 10 % the measured SAR values must be compensated for the tissue dielectric deviations

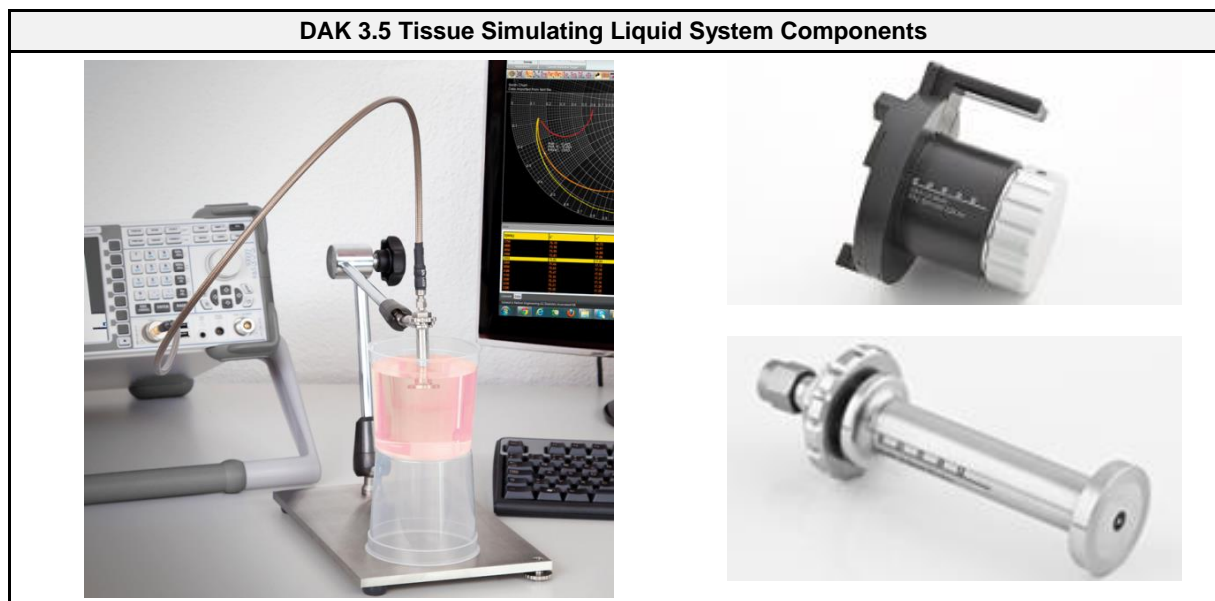

**DAK 3.5 System Tissue Validation Procedure (FCC KDB 865664 D01, IEEE 1528:2013)**

1. The target frequency range is set in the measurement software
2. The DAK-System is calibrated with open termination
3. The DAK-System is calibrated with short termination using the shorting block of the system
4. The DAK-System is calibrated with load termination using distilled water
5. The Probe is put into the tissue simulating liquid inside the measurement phantom
6. The tissue simulating liquid parameters are measured over the target frequency range
7. The liquid parameters are interpolated in order to get the target parameters of the source target frequencies
8. The deviations  $\Delta\epsilon_r$  and  $\Delta\sigma$  of the liquid parameters from the target parameters given by the FCC and IEEE 1528:2013 in % are calculated:

$$\Delta\epsilon_r[\%] = \frac{\epsilon_r \text{ measured} - \epsilon_r \text{ target}}{\epsilon_r \text{ target}} \cdot 100$$

$$\Delta\sigma[\%] = \frac{\sigma_{\text{measured}} - \sigma_{\text{target}}}{\sigma_{\text{target}}} \cdot 100$$

9. The deviations must be  $\leq 5\%$  according to FCC KDB 865664 D01 and  $\leq 10\%$  for IEEE 1528:2013
10. The liquid parameters are exported from the measurement software and imported to the DASY Software

### 3.4 Tissue Liquid Recipes

Body Tissue Simulating Liquids < 3 GHz						
Ingredient	M 450-B weight (%)	M 750-B weight (%)	M 900-B weight (%)	M 1800-B weight (%)	M 1950-A weight (%)	M 2450-B weight (%)
Water	46.21	51.7	50.75	70.17	69.79	68.64
Sugar	51.17	47.2	48.21	-	-	-
Cellulose	0.18	-	-	-	-	-
Salt	2.34	0.9	-	0.39	0.2	-
Preventol	0.08	0.1	0.1	-	-	-
DGBE	-	-	-	29.44	30	31.37

Head Tissue Simulating Liquids < 3 GHz					
Ingredient	HSL 450-A weight (%)	HSL 900-B weight (%)	HSL 1800-F weight (%)	HSL 1950-B weight (%)	HSL 2450-B weight (%)
Water	38.91	40.29	55.24	55.41	55
Sugar	56.93	57.9	-	-	-
Cellulose	0.25	0.24	-	-	-
Salt	3.79	1.38	0.31	0.08	-
Preventol	0.12	0.18	-	-	-
DGBE	-	-	44.45	44.51	45


Ingredients	
Water	deionized water. resistivity $\geq 16 \text{ M}\Omega$
Sugar	refined white sugar
Cellulose	Hydroxyethyl-cellulose
Salt	pure NaCl
Preventol	Preventol D-7
DGBE	Diethylenglycol-monobutyl ether

Body Tissue Simulating Liquids > 3 GHz	
MBBL 3-6 GHz	Liquids are direct from Speag


Head Tissue Simulating Liquids > 3 GHz	
HBBL 3-6 GHz	Liquids are direct from Speag



### 3.5 SAR System Validation

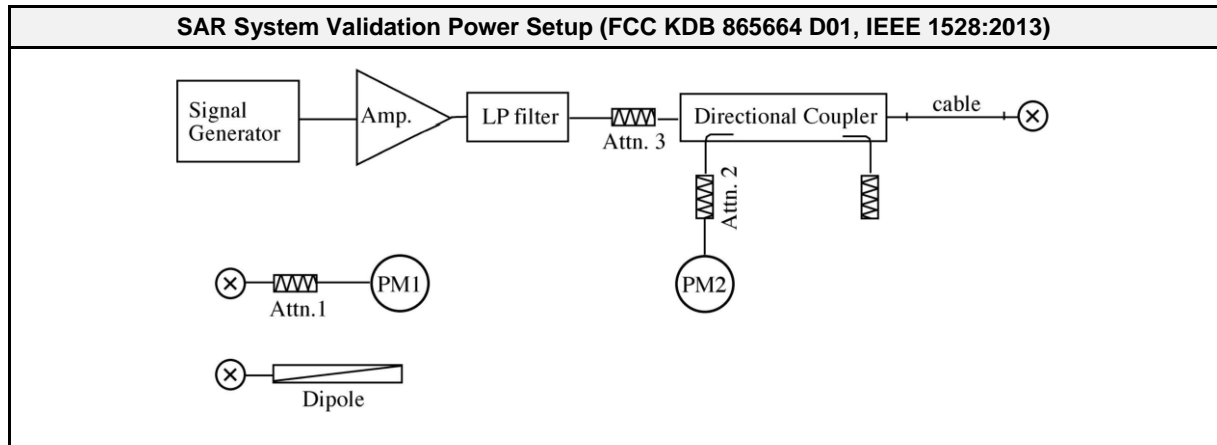

- SAR System Validation Power Setup Procedure (FCC KDB 865664 D01, IEEE 1528:2013)**
1. The power sensor PM1 is connected to the end of the feeding cable where the dipole is later connected
  2. The signal generator is set to the target frequency and the output power of the signal generator is set to a value that the power sensor PM1 shows the target system validation power (e.g 250 mW or 100 mW)
  3. The reading of the power sensor PM2 is recorded
  4. The dipole is connected to the end of the feeding cable and placed under the phantom with the corresponding tissue simulating liquid
  5. The power level of the signal generator is readjusted until the reading of PM2 in step 3 is shown again

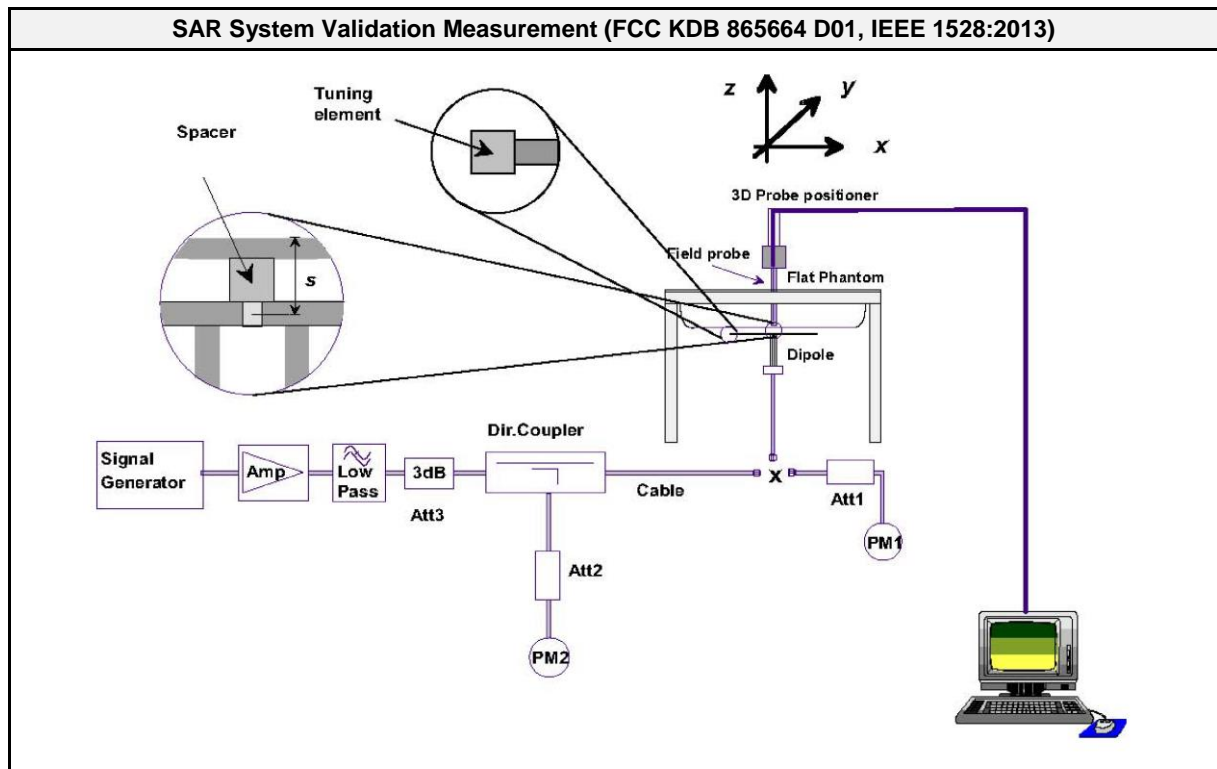

**SAR System Validation Measurement Procedure (FCC KDB 865664 D01, IEEE 1528:2013)**
**Setup:**

1. The system validation dipole is placed beneath the flat phantom (ELI phantom or flat phantom section of twin phantom) filled with the corresponding tissue simulating liquid of interest
2. A spacer is used to set the correct distance of the dipole from the phantom:
  - From IEEE 1528:2013:  $s = 15 \text{ mm} \pm 0.2 \text{ mm}$  for  $300 \text{ MHz} \leq f \leq 1000 \text{ MHz}$
  - From IEEE 1528:2013:  $s = 10 \text{ mm} \pm 0.2 \text{ mm}$  for  $1000 \text{ MHz} < f \leq 6000 \text{ MHz}$
3. The power setup procedure is used to set the target feed power given in the calibration documentation of the validation dipole (e.g. 250 mW or 100 mW)

**Power reference Measurement:**

4. At the center of the dipole area scan an initial power measurement is performed with the SAR probe in order to determine the power drift during the validation measurement

**Area Scan:**

5. A plane area parallel to the phantom surface is scanned using fixed grid spacing
6. The measurement values are interpolated in order to find the peak SAR location inside the area
7. The cube for the zoom scan is centered at the location of the peak SAR location

**Zoom Scan:**

8. The cube for the zoom scan is scanned using a fine 3 dimensional grid
9. The measurement values are interpolated and the average peak SAR value is calculated for the desired reference mass (e.g. 1-g or 10-g)

**Power Drift Measurement:**

10. Another power measurement is performed at the same location as for step 4
11. The power difference between step 10 and 4 is calculated
12. According to FCC KDB 865664 D01 the power drift must be  $\leq \pm 5 \%$  (or  $\leq \pm 0.2 \text{ dB}$ ) for the measurement to be valid

**Deviation Analysis:**


13. The measured SAR values are normalized to 1 W input power (SAR values times 4 for 250 mW or times 10 for 100 mW input power)
14. The deviation in % from the SAR values given in the calibration sheet for the dipole and tissue simulating liquid is calculated


$$\Delta SAR[\%] = \frac{SAR_{measured} - SAR_{target}}{SAR_{target}} \cdot 100$$

15. Per FCC KDB 865664 D01 the device must be  $\leq \pm 10 \%$  of the target values given in the calibration document of the dipole

### 3.6 SAR Head Positions

SAM Twin Phantom (IEEE 1528:2013)
<p>SAM Phantom</p> <ul style="list-style-type: none"> <li>– Phantom shells for use with the test procedures in this recommended practice shall be manufactured using the CAD file of the SAM model</li> <li>– When used in a horizontal configuration, the SAM phantom shell is bisected along the mid-sagittal plane into right and left halves</li> <li>– Testing is required on both right and left sides</li> <li>– The perimeter sidewalls of each phantom half are extended to allow filling with liquid to a depth that is sufficient to minimize reflections from the upper surface</li> <li>– The liquid depth shall be measured from the ERP (inside the SAM phantom) to the air-liquid interface</li> <li>– shall be constructed from chemical-resistant, low-permittivity and low-loss material, with relative permittivity between 2 and 5; however, less than 2 is acceptable for frequencies up to 3 GHz</li> <li>– The shape of the phantom shell shall have a tolerance of less than <math>\pm 0.2</math> mm with respect to the SAM CAD file</li> <li>– In any area within the projection of the handset, the shell thickness shall be 2 mm, except for the ear and the extended perimeter walls; The tolerance on the shell thickness shall be <math>\pm 0.2</math> mm</li> <li>– In any area within the projection of the handset, the shell thickness shall be 2 mm, except for the ear and the extended perimeter walls; The tolerance on the shell thickness shall be <math>\pm 0.2</math> mm</li> </ul> <p>Flat Phantom</p> <ul style="list-style-type: none"> <li>– The minimum transverse dimensions (width and length) shall be used such that the SAR results are within 1% of a phantom with larger dimensions</li> <li>– For a half-wavelength dipole source, the length shall be at least 0.6 times the wavelength in air in the major dimension, and width shall be at least 0.4 times the wavelength in air in the minor dimension, with the bottom surface area larger than a corresponding ellipse</li> <li>– For 800 MHz to 6 GHz, the minimum dimensions of the flat phantom shall be 22.5 cm x 15 cm in the major and minor axes, respectively</li> <li>– The relative permittivity of the phantom shell material shall be between 2 and 5; however, less than 2 is acceptable below 3 GHz</li> <li>– The loss tangent of the phantom shell material shall be less than or equal to 0.05</li> <li>– The thickness of the flat phantom bottom section shall be 2 mm. The thickness shall be uniform within a tolerance of <math>\pm 0.2</math> mm</li> <li>– When filled with liquid, the sagging of the phantom directly above the source (e.g., dipole) due to the weight of the liquid shall be less than 1% of a wavelength in air in the frequency range of 800 MHz to 6 GHz, and less than 0.5% of a wavelength in air at frequencies below 800 MHz</li> </ul>

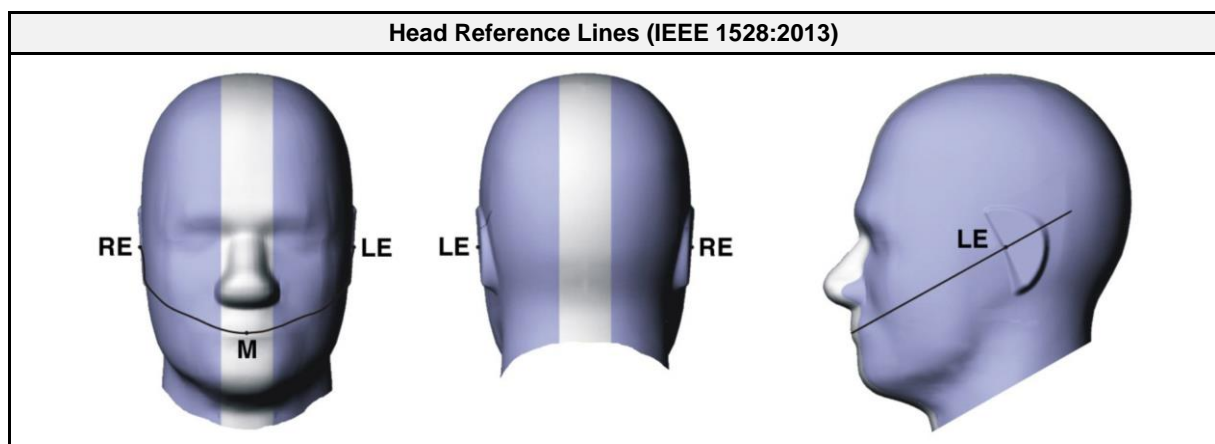

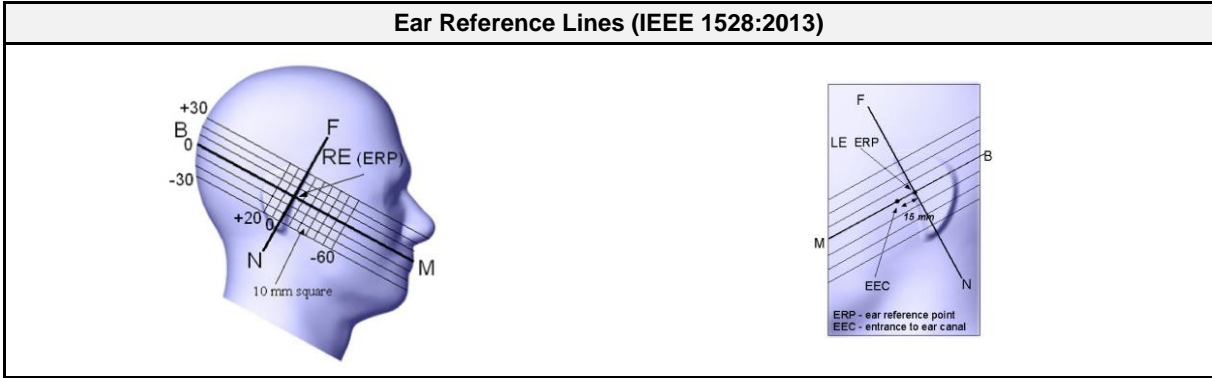


- ### Test Positions (IEEE 1528:2013)
- two device test positions against the head phantom - the “cheek” position and the “tilt” position
  - The device shall be tested in both positions on left and right sides of the SAM phantom


- ### Cheek Position (IEEE 1528:2013)
- The N-F line is in the plane defined by the handset vertical centerline and horizontal line
  - Handset touches the pinna
  - The handset vertical centerline is aligned with the Reference Plane

Procedure:


1. Ready the handset for talk operation, if necessary. For example, for handsets with a flip, swivel, or slide cover piece, open the cover if this is consistent with talk operation. If the handset can transmit with the cover closed, this configuration shall be tested also
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output [point A in Figure (a) and Figure (b)], and the midpoint of the width  $w_b$  at the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output [see Figure (a)]. The horizontal line is also tangential to the face of the handset at point A. The two lines intersect at point A.

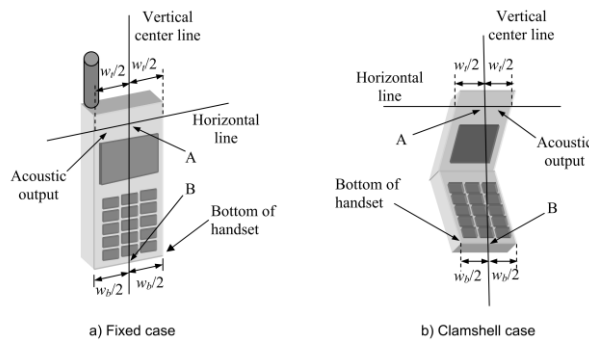


3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom. The plane defined by the vertical centerline and the horizontal line of the handset is parallel to the sagittal plane of the phantom

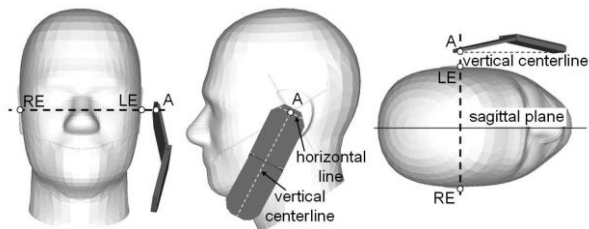


4. Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the pinna

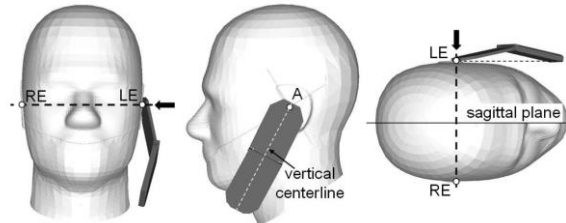


5. Rotate the handset around the (virtual) LE-RE line until the handset vertical centerline is in the Reference Plane

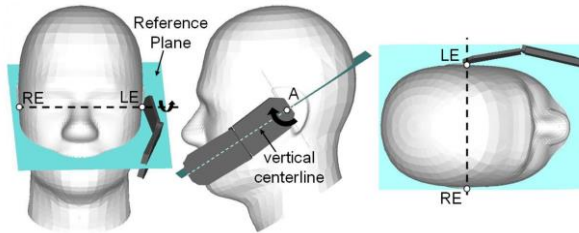


6. Rotate the handset around the vertical centerline until the plane defined by the handset vertical centerline and horizontal line is parallel to the N-F line, and translate the handset along the LE-RE line toward the phantom until handset touches the pinna

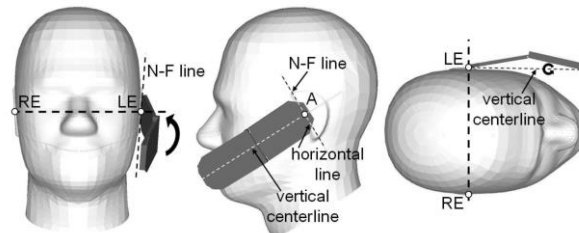

7. While keeping point A on the line passing through RE and LE, and maintaining the handset in contact with the pinna at the ERP, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek

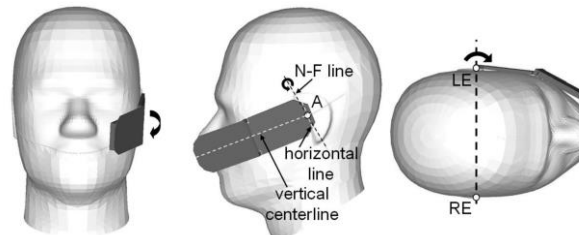

8. While keeping the handset in contact with the pinna, rotate the handset around a line perpendicular to the plane defined by the handset vertical centerline and horizontal line and passing through handset point A, until the handset vertical centerline is in the Reference Plane. Note that this step is necessary, as the handset may not be in the reference plane after step 7)

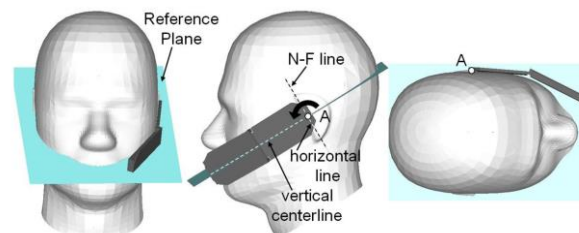

**Tilt Position (IEEE 1528:2013)**

## Procedure:


1. Repeat the steps for the cheek position to place the device in the cheek position
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°
3. Rotate the handset around the horizontal line by 15°
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head



### 3.7 SAR Body Positions

#### Body-worn Positions (FCC KDB 447498 D01)

- Devices that support transmission while used with body-worn accessories must be tested for body worn accessory SAR compliance
- Body SAR compliance is also tested with a flat phantom
- SAR evaluation is required for body-worn accessories supplied with the host device
- All body-worn accessories containing metallic components, either supplied with the product or available as an option from the device manufacturer, must be tested in conjunction with the host device to demonstrate compliance
- Body-worn accessory SAR compliance must be based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations
- A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets should be used to test for body-worn accessory SAR compliance
- This distance is determined by the handset manufacturer according to the typical body-worn accessories users may acquire at the time of equipment certification, but not more than 2.5 cm, to enable users to purchase aftermarket body-worn accessories with the required minimum separation
- The selected test separation distance must be clearly explained in the SAR report to support the body-worn accessory test configurations
- Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance  $\leq 5$  mm to support compliance

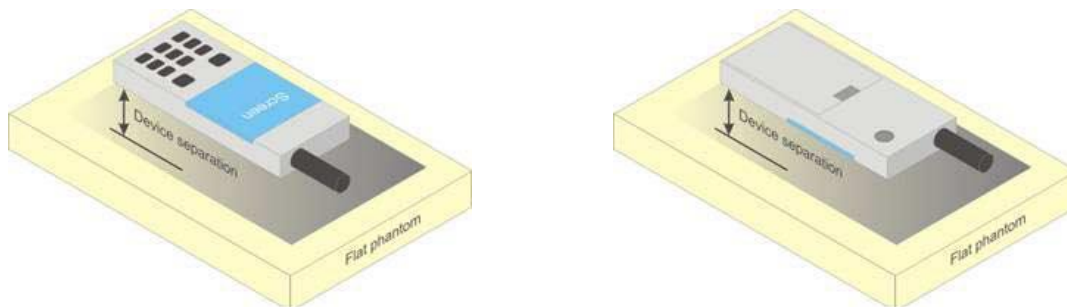

### 3.8 SAR Measurement Procedure

Step 1: Power Reference Measurement (FCC KDB 865664 D01, IEEE 1528:2013)	
1.	The probe is positioned at the closest distance to the surface of the phantom
2.	A power measurement is performed as later reference for the second power drift measurement at the same position

Step 2: Area Scan (FCC KDB 865664 D01, IEEE 1528:2013)																
1.	An area larger than all radiating structures and antennas of the equipment under test is defined															
2.	The grid spacing and distance to the phantom surface is selected according to the requirements given in FCC KDB 865664 D01															
		<table border="1"> <thead> <tr> <th></th> <th>≤ 3 GHz</th> <th>&gt; 3 GHz</th> </tr> </thead> <tbody> <tr> <td>Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface</td> <td>5 mm ± 1 mm</td> <td><math>\frac{1}{2} \cdot \delta \cdot \ln(2)</math> mm ± 0.5 mm</td> </tr> <tr> <td>Maximum probe angle from probe axis to phantom surface normal at the measurement location</td> <td>30° ± 1°</td> <td>20° ± 1°</td> </tr> <tr> <td rowspan="2">Maximum area scan spatial resolution: <math>\Delta x_{Area}, \Delta y_{Area}</math></td> <td>≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm</td> <td>3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm</td> </tr> <tr> <td colspan="2">When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.</td> </tr> </tbody> </table>		≤ 3 GHz	> 3 GHz	Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm	Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°	Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
	≤ 3 GHz	> 3 GHz														
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm														
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°														
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm														
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.															
	Settings applied: for frequencies < 3 GHz: $\Delta x = \Delta y = 10$ mm; $\Delta z = 4$ mm (Note 1)															
	Settings applied: for frequencies > 3 GHz: $\Delta x = \Delta y = 5$ mm; $\Delta z = 2$ mm (Note 2)															
3.	At each grid point a measurement is performed until all points of the grid are measured															
4.	The values are interpolated and the location of the peak SAR value is determined															
5.	If a location closer than $\frac{1}{2}$ the zoom scan volume to the edges is determined, the area is extended															
Note 1: According the DASY 5.2 Manual a distance of the Probe Sensor to the Phantom Surface should be between 4 mm up to 3 GHz																
Note 2: According the DASY 5.2 Manual a distance of the Probe Sensor to the Phantom Surface should be between 1.5 and 2.0 mm above 3 GHz																

$\frac{1}{2} \cdot \delta \cdot \ln(2)$ (IEEE 1528:2013)	
Frequency [MHz]	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ [mm]
3000	4.8
4000	3.3
5000	2.5
5200	2.4
5400	2.3
5600	2.2
5800	2.1
6000	2.0

Note 1: According the DASY 5.2 Manual a distance of the Probe Sensor to the Phantom Surface should be between 1.5 and 2.0 mm



**Step 3: Zoom Scan (FCC KDB 865664 D01, IEEE 1528:2013)**

1. The zoom scan is initially performed at the location of the highest peak SAR in the area scan
2. For the zoom scan a 3d cube is used with grid settings as required from FCC KDB 865664 D01:

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Settings applied: for frequencies < 3 GHz:  $\Delta x = \Delta y = \Delta z = 5$  mm; volume x,y,z = 30 mm

Settings applied: for frequencies > 3 GHz:  $\Delta x = \Delta y = \Delta z = 2$  mm; volume x,y,z = 30 mm

3. The measured field strength values are interpolated and the average SAR value is calculated
4. When the 1-g SAR is within 2 dB of the SAR limit, additional zoom scans are performed for other peaks within 2 dB of the highest SAR peak
5. The determined 1-g and 10-g average SAR values are recorded for all determined SAR locations

**Step 4: Power Drift Measurement (FCC KDB 865664 D01, IEEE 1528:2013)**

1. At the same location as in step 1 the power measurement is repeated
2. The power drift is calculated from the values measured in step 4 ( $M_{step4}$ ) and step 1 ( $M_{step1}$ ) as  

$$\text{Deviation} = M_{step4} / M_{step1}$$
3. The drift in % is calculated as  

$$10 \cdot \log_{10}(\text{Deviation}) \text{ [dB]}$$
4. The drift shall be  $\leq \pm 5 \%$  or  $\leq 10 \cdot \log_{10}(1.05) = 0.2$  dB or  $\leq 10 \cdot \log_{10}(0.95) = -0.2$  dB

### 3.9 SAR Equipment List

SAR Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Stäubli Robot	Stäubli	RX90B L	EF00271	functional test	functional test
Stäubli Robot Controller	Stäubli	CS7MB	EF00272	functional test	functional test
DASY 5.2 Measurement Server	Schmid & Partner	-	EF00273	functional test	functional test
Control Pendant	Stäubli	-	EF00274	functional test	functional test
Dell Computer	Schmid & Partner	Intel	EF00275	functional test	functional test
Data Acquisition Electronics	Schmid & Partner	DAE3V1	EF00276	2019-09	2020-09
Dosimetric E-Field Probe	Schmid & Partner	EX3DV4	EF00826	2019-09	2020-09
SAM Twin phantom	Schmid & Partner	V 4.0	EF00286	functional test	functional test
Oval flat phantom	Schmid & Partner	ELI4	EF00289	functional test	functional test
System Validation Kit	Schmid & Partner	D300V2	EF00299	2018-09	2021-09
System Validation Kit	Schmid & Partner	D450V2	EF00300	2018-09	2021-09
System Validation Kit	Schmid & Partner	D750V3	EF00946	2017-09	2020-09
System Validation Kit	Schmid & Partner	D900V2	EF00281	2018-09	2021-09
System Validation Kit	Schmid & Partner	D1750V2	EF00947	2017-10	2020-10
System Validation Kit	Schmid & Partner	D1800V2	EF00282	2018-09	2021-09
System Validation Kit	Schmid & Partner	D1900V2	EF00283	2018-09	2021-09
System Validation Kit	Schmid & Partner	D2450V2	EF00284	2018-09	2021-09
System Validation Kit	Schmid & Partner	D2600V2	EF00948	2017-09	2020-09
System Validation Kit	Schmid & Partner	D5GHzV2	EF00827	2018-09	2021-09
DAK Thermometer (-20..110°C)	Schmid & Partner	DTM3000	EF00967	2020-02	2021-02
Mounting Device	Schmid & Partner	V3.1	EF00287	functional test	functional test
Millivoltmeter	R&S	URV5	EF00126	2019-07	2022-07
Power sensor	R&S	NRV-Z1	EF00127	2018-07	2020-07
Power sensor	R&S	NRV-Z2	EF00003	2018-07	2020-07
Spectrum- and Network-Analyzer	R&S	FSMS26	EF00005	no certification testing	no certification testing
Signal generator	R&S	SME 03	EF00169	functional test	functional test
DAK Probe Stand	Schmid & Partner	SM DAK 300 AA	EF00944	no calibration required	no calibration required
DAK Probe (200MHz-20GHz)	Schmid & Partner	DAK-3.5	EF00945	2019-09	2020-09
DAK Measurement Software	Schmid & Partner	DAK v2.6.0.5	EF00965	no calibration required	no calibration required
DAK Verification Kit	Schmid & Partner	SL AAH U16 BD	EF01128	no calibration required	no calibration required

### 3.10 Other Equipment List

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
R&S	Communication tester	CMW290	EF01367	2019-06	2020-06

## 3.11 SAR Measurement Uncertainty

Measurement Uncertainty (IEEE 1528)							
Error Description	Uncertainty Value	Probability Distribution	Div.	ci (1g)	ci (10g)	Std. Unc. 1 g	Std. Unc. 10 g
<b>Measurement System</b>							
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Boundary effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%
Post processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%
<b>Test Sample Related</b>							
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
<b>Phantom and Setup Related</b>							
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.1%	±0.1%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
<b>Combined Standard Uncertainty</b>						<b>±12.8%</b>	<b>±12.7%</b>
<b>Expanded Standard Uncertainty</b>						<b>±25.6%</b>	<b>±25.4%</b>

## 4 General Evaluation Guidance and Procedures

### 4.1 SAR Limits

Exposure Environments (FCC and ISED)	
General Population/ Uncontrolled Environment	Defined as locations where there is the exposure of individuals who has no knowledge or control of their exposure
Occupational/ Controlled Environment	Defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure

SAR Limits (FCC and ISED)		
Exposure Condition	General Population	Occupational
Spatial Peak SAR (1-g) (Brain/Body/Arms/Legs)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (10-g) (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

### 4.2 SAR Evaluation for Head

SAR Evaluation for Head (FCC KDB 447498 D01)
<ul style="list-style-type: none"> <li>– Devices that are designed to transmit next to the ear and operate according to the handset procedures in IEEE Std 1528-2013, or conditions described in the published RF exposure KDB procedures, must be tested using the SAM phantom defined in IEEE Std 1528-2013</li> <li>– When antennas are near the bottom of a handset and the peak SAR location is located in regions of the SAM phantom where SAR probe access can be limited, the procedures in KDB Publication 648474 D04 must be applied</li> <li>– Other head exposure conditions, for example, in-front-of the face, should be tested using a flat phantom according to the required published RF exposure KDB procedures</li> </ul>

### 4.3 SAR Evaluation for body-worn accessory

SAR Evaluation for body-worn accessory (FCC KDB 447498 D01)
<ul style="list-style-type: none"> <li>– Body SAR compliance is also tested with a flat phantom</li> <li>– For devices with irregular shapes or form factors that do not conform to a flat phantom, and/or unusual operating configurations and exposure conditions, a KDB inquiry is also required to determine the appropriate SAR measurement procedures</li> </ul> <p>Devices</p> <ul style="list-style-type: none"> <li>– Devices that support transmission while used with body-worn accessories must be tested for body-worn accessory SAR compliance</li> </ul> <p>Accessories</p> <ul style="list-style-type: none"> <li>– All body-worn accessories containing metallic components, either supplied with the product or available as an option from the device manufacturer, must be tested in conjunction with the host device to demonstrate compliance</li> <li>– Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics</li> <li>– Body-worn accessory SAR compliance must be based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations</li> <li>– If a body-worn accessory supports voice only operations in its normal and expected use conditions (for example, belt clips and holsters for cellphones), testing of data mode for body-worn compliance is not required</li> </ul>

- A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets should be used to test for body-worn accessory
  - This distance is determined by the handset manufacturer according to the typical body-worn accessories users may acquire at the time of equipment certification, but not more than 2.5 cm
  - The selected test separation distance must be clearly explained in the SAR report to support the body-worn accessory test configurations
- Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance  $\leq 5$  mm to support compliance
- Users must be fully informed of the operating requirements and restrictions, to the extent that the typical user can easily understand the information, to acquire the required body-worn accessories to maintain compliance

#### 4.4 SAR Evaluation for Extremities

<b>SAR Evaluation for Extremities (FCC KDB 447498 D01)</b>
<ul style="list-style-type: none"> <li>– Devices that are designed or intended for use on extremities, or mainly operated in extremity only exposure conditions, i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation</li> <li>– When extremity SAR testing is required, a flat phantom must be used if the exposure condition is more conservative than the actual use conditions               <ul style="list-style-type: none"> <li>otherwise, a KDB inquiry is required to determine the phantom and test requirements</li> </ul> </li> <li>– When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required</li> <li>– The 1-g body and 10-g extremity SAR Test Exclusion Thresholds should be applied to determine SAR test requirements</li> <li>– For devices with irregular shapes or form factors that do not conform to a flat phantom, and/or unusual operating configurations and exposure conditions, a KDB inquiry is also required to determine the appropriate SAR measurement procedures</li> <li>– when simultaneous transmission applies to extremity exposure, the simultaneous transmission SAR test exclusion provisions should be applied</li> <li>– When simultaneous transmission SAR measurement is required, the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01 should be applied</li> </ul>

#### 4.5 Required test channels

<b>Required SAR Test Channels (FCC KDB 447498 D01)</b>
<p>When the frequency channels required for SAR testing are not specified in the published RF exposure KDB procedures, the following should be applied to determine the number of required test channels:</p> $N_c = \text{Round} \left[ \sqrt{100 \cdot \frac{f_{\text{high}} - f_{\text{low}}}{f_c} \cdot \left(\frac{f_c}{100}\right)^{0.2}} \right]$ <p>where:</p> <ul style="list-style-type: none"> <li><math>N_c</math>: number of test channels, rounded to the nearest integer</li> <li><math>f_{\text{high}}</math>: highest channel frequencies within the transmission band in MHz</li> <li><math>f_{\text{low}}</math>: lowest channel frequencies within the transmission band in MHz</li> <li><math>f_c</math>: mid-band channel frequency in MHz</li> </ul>

#### 4.6 Maximum output power and tune-up tolerance

<b>Maximum rated output power and tune-up tolerance (FCC KDB 447498 D01)</b>
<ul style="list-style-type: none"> <li>– The maximum output power and tolerance allowed for production units should be used to determine RF exposure test exclusion and compliance</li> <li>– Each device must be evaluated for SAR compliance in the required operating modes and test configurations, at the maximum rated output power and within the tune-up tolerance range specified for the product</li> <li>– SAR evaluation must be performed at power level not more than 2 dB lower than the maximum tune-up tolerance limit</li> <li>– The range of expected maximum output power variations from the rated nominal maximum output power specified for the product or wireless mode is referred to as the tune-up tolerance in this document. All devices must be tested within the tune-up tolerance specification range</li> </ul>

<b>Maximum source-based time-averaged conducted output power (KDB 865664 D01, TCB Council 2016-10)</b>
<ul style="list-style-type: none"> <li>– RF exposure compliance must be determined at the maximum average power level according to source-based time-averaging requirements</li> <li>– Time-averaged maximum conducted output power applies to SAR</li> <li>– When SAR evaluation is required to determine compliance, the duty factor established in the SAR analysis may be applied to scale the measured SAR</li> </ul>

#### 4.7 Reported SAR

<b>Reported SAR according (FCC KDB 447498 D01)</b>
<p>Measured SAR values must be scales to the maximum tune-up tolerance limit. The results are referred to as reported SAR values:</p> $SAR_{Reported} \left[ \frac{W}{kg} \right] = SAR_{Measured} \left[ \frac{W}{kg} \right] \cdot \frac{Power_{Maximum \text{ including tune-up tolerance}} [mW]}{Power_{Actual \text{ for measurement}} [mW]}$

<b>Reported SAR Duty Factor Scaling (FCC KDB 248227 D01)</b>
<p>The reported SAR values must be scales to the maximum duty factor specified for production units. The results are referred to as scaled reported SAR values:</p> $SAR_{Reported \text{ scaled}} \left[ \frac{W}{kg} \right] = SAR_{Reported} \left[ \frac{W}{kg} \right] \cdot \frac{1}{Duty \text{ Factor}}$

#### 4.8 Standalone SAR Test Exclusion

Standalone SAR test exclusion (FCC KDB 447498 D01)	
Input:	
1. P: Source-based time-averaged maximum conducted output power of RF channel requiring evaluation	
2. d: Minimum test separation distance required for exposure conditions (Note 1, 2)	
3. f: RF channel frequency	
Test exclusion power level calculation:	
1. Frequency 100 MHz to 6 GHz, Test separation distance $\leq 50$ mm:	
1-g SAR:	$P[mW] = 3.0 \cdot \frac{d[mm]}{\sqrt{f[GHz]}}$
10-g SAR:	$P[mW] = 7.5 \cdot \frac{d[mm]}{\sqrt{f[GHz]}}$
When test separation distance is $< 5$ mm, a distance of 5 mm is applied to determine test exclusion	
2. Frequency 100 MHz to 6 GHz, Test separation distance $> 50$ mm:	
1-g SAR: (100 – 1500 MHz)	$P[mW] = \left( 3.0 \cdot \frac{50 \text{ mm}}{\sqrt{f[GHz]}} \right) + \left[ (d[mm] - 50 \text{ mm}) \cdot \frac{f[MHz]}{150} \right]$
1-g SAR: ( $>1500 - 6000$ MHz)	$P[mW] = \left( 3.0 \cdot \frac{50 \text{ mm}}{\sqrt{f[GHz]}} \right) + [(d[mm] - 50 \text{ mm}) \cdot 10]$
10-g SAR: (100 – 1500 MHz)	$P[mW] = \left( 7.5 \cdot \frac{50 \text{ mm}}{\sqrt{f[GHz]}} \right) + \left[ (d[mm] - 50 \text{ mm}) \cdot \frac{f[MHz]}{150} \right]$
10-g SAR: ( $>1500 - 6000$ MHz)	$P[mW] = \left( 7.5 \cdot \frac{50 \text{ mm}}{\sqrt{f[GHz]}} \right) + [(d[mm] - 50 \text{ mm}) \cdot 10]$
3. Frequency $< 100$ MHz:	
1-g SAR: ( $> 50$ and $< 200$ mm)	$P[mW] = \left\{ \left( 3.0 \cdot \frac{50 \text{ mm}}{\sqrt{0.1}} \right) + \left[ (d[mm] - 50 \text{ mm}) \cdot \frac{100}{150} \right] \right\} \cdot \left[ 1 + \log \left( \frac{100}{f[MHz]} \right) \right]$
1-g SAR: ( $\leq 50$ mm)	$P[mW] = \left\{ \left( 3.0 \cdot \frac{50 \text{ mm}}{\sqrt{0.1}} \right) + \left[ (d[mm] - 50 \text{ mm}) \cdot \frac{100}{150} \right] \right\} \cdot \left[ 1 + \log \left( \frac{100}{f[MHz]} \right) \right] \cdot \frac{1}{2}$
10-g SAR: ( $> 50$ and $< 200$ mm)	$P[mW] = \left\{ \left( 7.5 \cdot \frac{50 \text{ mm}}{\sqrt{0.1}} \right) + \left[ (d[mm] - 50 \text{ mm}) \cdot \frac{100}{150} \right] \right\} \cdot \left[ 1 + \log \left( \frac{100}{f[MHz]} \right) \right]$
10-g SAR: ( $\leq 50$ mm)	$P[mW] = \left\{ \left( 7.5 \cdot \frac{50 \text{ mm}}{\sqrt{0.1}} \right) + \left[ (d[mm] - 50 \text{ mm}) \cdot \frac{100}{150} \right] \right\} \cdot \left[ 1 + \log \left( \frac{100}{f[MHz]} \right) \right] \cdot \frac{1}{2}$
4. If the source-based time-averaged maximum conducted output power is lower or equal than the test exclusion power level no SAR testing will be required	
Note 1: Minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander	
Note 2: To qualify for SAR test exclusion, the test separation distances applied must be fully explained and justified, typically in the SAR measurement or SAR analysis report, by the operating configurations and exposure conditions of the transmitter and applicable host platform requirements, according to the required published RF exposure KDB procedures	

<b>Standalone SAR test exclusion (ISED RSS-102)</b>	
Input: <ol style="list-style-type: none"> <li>1. Output power level; shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power</li> <li>2. Minimum test separation distance D required for exposure conditions (Note)</li> <li>3. RF channel frequency</li> </ol> Test exclusion power level calculation: <ol style="list-style-type: none"> <li>1. Use linear interpolation of frequency and Separation distance in order to determine the exemption power level that applies to the test frequency and distance</li> <li>2. If the output power level of the device is lower or equal than the exemption power level no SAR testing will be required</li> </ol>	
Note: When test separation distance is < 5 mm, a distance of 5 mm is applied to determine test exclusion	

<b>Exemption Power Limits [mW] (ISED RSS-102)</b>										
Freq. [MHz]	Separation Distance [mm]									
	≤ 5	10	15	20	25	30	35	40	45	≥ 50
≤ 300	71	101	132	162	193	223	254	284	315	345
450	52	70	88	106	123	141	159	177	195	213
835	17	30	42	55	67	80	92	105	117	130
1900	7	10	18	34	60	99	153	225	316	431
2450	4	7	15	30	52	83	123	173	235	309
3500	2	6	16	32	55	86	124	170	225	290
5800	1	6	15	27	41	56	71	85	97	106

Note: For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in the Table are multiplied by a factor of 2.5

#### 4.9 SAR Value Estimation

<b>Estimated SAR (FCC KDB 447498 D01)</b>	
Input: <ol style="list-style-type: none"> <li>1. P: Source-based time-averaged maximum conducted output power of RF channel requiring evaluation</li> <li>2. d: Minimum test separation distance required for exposure conditions (Note)</li> <li>3. f: RF channel frequency</li> </ol> Estimated SAR calculation: <ol style="list-style-type: none"> <li>1. Test separation distance ≤ 50 mm:                             <math display="block">1\text{-g SAR: } SAR_{Estimated} \left[ \frac{W}{kg} \right] = \frac{P[mW]}{d[mm]} \cdot \frac{\sqrt{f[GHz]}}{7.5}</math> <math display="block">10\text{-g SAR: } SAR_{Estimated} \left[ \frac{W}{kg} \right] = \frac{P[mW]}{d[mm]} \cdot \frac{\sqrt{f[GHz]}}{18.75}</math> </li> <li>2. Test separation distance &gt; 50 mm:                             <math display="block">1\text{-g SAR: } SAR_{Estimated} \left[ \frac{W}{kg} \right] = 0.4</math> <math display="block">10\text{-g SAR: } SAR_{Estimated} \left[ \frac{W}{kg} \right] = 1.0</math> </li> </ol>	
Note: Minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander	



#### 4.10 Simultaneous SAR Test Exclusion

Simultaneous Transmitter SAR test exclusion (FCC KDB 447498 D01)
<p>Method 1 – Sum of SAR:</p> <ol style="list-style-type: none"> <li>The SAR values from the simultaneous transmitting radios are selected</li> <li>If an excluded radio transmitter participates in the multi-transmitter mode, the SAR value must be estimated</li> <li>The reported SAR values from the simultaneous transmitting radios are added</li> <li>If the sum of SAR values is below the limit no further SAR testing is required</li> </ol> <p>Method 2 – SAR to Peak Location Separation Ratio (SPLSR)</p> <ol style="list-style-type: none"> <li>The SAR values from the simultaneous transmitting radios are selected</li> <li>If an excluded radio transmitter participates in the multi-transmitter mode, the SAR value must be estimated</li> <li>From the various transmitters participating in the multi-transmitter mode, all pairs of two transmitters are evaluated (e.g. for three simultaneous transmitters = 1 and 2, 2 and 3, 1 and 3)</li> <li>For the transmitter pair under evaluation the location of the hotspot is determined                     <ul style="list-style-type: none"> <li>Measured SAR: The location of the hotspot as given in the SAR measurement results</li> <li>Estimated SAR: The center of the transmitter antenna</li> </ul> </li> <li>With the two reported SAR values SAR<sub>1</sub> and SAR<sub>2</sub> and the separation distance r the SPLSR is calculated:                     <math display="block">SPLSR = \frac{\sqrt{(SAR_1 + SAR_2)^3}}{R}</math> </li> <li>If the result is below the exclusion value the pair is excluded                     <ul style="list-style-type: none"> <li>1-g SAR: <math>SPLSR \leq 0.04</math></li> <li>10-g SAR: <math>SPLSR \leq 0.10</math></li> </ul> </li> <li>All antenna pair that do not qualify for test exclusion must be tested</li> </ol>

#### 4.11 General SAR Test Reduction

General SAR test reduction (FCC KDB 447498 D01)												
<ol style="list-style-type: none"> <li>SAR is measured for the mid-band or highest output power channel</li> <li>Testing of the other required channels within the operating mode of a frequency band is not required if the the reported 1-g or 10-g SAR of the test channel in step 1 is:                     <table style="margin-left: 40px;"> <tr> <td style="text-align: right;">1-g SAR (Band ≤ 100 MHz)</td> <td><math>SAR_{Reported} \leq 0.8 \frac{W}{kg}</math></td> </tr> <tr> <td style="text-align: right;">1-g SAR (100 MHz &lt; Band &lt; 200 MHz)</td> <td><math>SAR_{Reported} \leq 0.6 \frac{W}{kg}</math></td> </tr> <tr> <td style="text-align: right;">1-g SAR (Band ≥ 200 MHz)</td> <td><math>SAR_{Reported} \leq 0.4 \frac{W}{kg}</math></td> </tr> <tr> <td style="text-align: right;">10-g SAR (Band ≤ 100 MHz)</td> <td><math>SAR_{Reported} \leq 2.0 \frac{W}{kg}</math></td> </tr> <tr> <td style="text-align: right;">10-g SAR (100 MHz &lt; Band &lt; 200 MHz)</td> <td><math>SAR_{Reported} \leq 1.5 \frac{W}{kg}</math></td> </tr> <tr> <td style="text-align: right;">10-g SAR (Band ≥ 200 MHz)</td> <td><math>SAR_{Reported} \leq 1.0 \frac{W}{kg}</math></td> </tr> </table> </li> </ol>	1-g SAR (Band ≤ 100 MHz)	$SAR_{Reported} \leq 0.8 \frac{W}{kg}$	1-g SAR (100 MHz < Band < 200 MHz)	$SAR_{Reported} \leq 0.6 \frac{W}{kg}$	1-g SAR (Band ≥ 200 MHz)	$SAR_{Reported} \leq 0.4 \frac{W}{kg}$	10-g SAR (Band ≤ 100 MHz)	$SAR_{Reported} \leq 2.0 \frac{W}{kg}$	10-g SAR (100 MHz < Band < 200 MHz)	$SAR_{Reported} \leq 1.5 \frac{W}{kg}$	10-g SAR (Band ≥ 200 MHz)	$SAR_{Reported} \leq 1.0 \frac{W}{kg}$
1-g SAR (Band ≤ 100 MHz)	$SAR_{Reported} \leq 0.8 \frac{W}{kg}$											
1-g SAR (100 MHz < Band < 200 MHz)	$SAR_{Reported} \leq 0.6 \frac{W}{kg}$											
1-g SAR (Band ≥ 200 MHz)	$SAR_{Reported} \leq 0.4 \frac{W}{kg}$											
10-g SAR (Band ≤ 100 MHz)	$SAR_{Reported} \leq 2.0 \frac{W}{kg}$											
10-g SAR (100 MHz < Band < 200 MHz)	$SAR_{Reported} \leq 1.5 \frac{W}{kg}$											
10-g SAR (Band ≥ 200 MHz)	$SAR_{Reported} \leq 1.0 \frac{W}{kg}$											

#### 4.12 SAR Measurement Variability

<b>SAR Measurement Variability (FCC KDB 865664 D01)</b>
<ul style="list-style-type: none"> <li>– Repeated measurement is not required when the original highest measured SAR is &lt; 0.80 W/kg</li> <li>– When the original highest measured SAR is <math>\geq 0.80</math> W/kg, repeat that measurement once</li> <li>– Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is &gt; 1.20 or when the original or repeated measurement is <math>\geq 1.45</math> W/kg</li> <li>– Perform a third repeated measurement only if the original, first or second repeated measurement is <math>\geq 1.5</math> W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is &gt; 1.20</li> <li>– The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds</li> </ul>
<p>Procedure:</p> <ol style="list-style-type: none"> <li>1. Additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band</li> <li>2. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged</li> <li>3. The device is re-mounted on the device holder for the repeated measurement(s) using the same measurement settings and configuration as for the initial SAR measurement</li> </ol>

#### 4.13 SAR Measurement Uncertainty

<b>SAR Measurement Uncertainty (FCC KDB 865664 D01)</b>
<ul style="list-style-type: none"> <li>– When the highest measured 1-g SAR within a frequency band is &lt; 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval</li> <li>– SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is <math>\geq 1.5</math> W/kg for 1-g SAR</li> <li>– The procedures described in IEEE Std 1528-2013 should be applied</li> <li>– The expanded SAR measurement uncertainty must be <math>\leq 30\%</math>, for a confidence interval of <math>k = 2</math></li> </ul>

#### 4.14 SAR DUT Holder Perturbations

SAR DUT Holder Perturbations (FCC TCB Council 2016-10)
<ul style="list-style-type: none"> <li>– When the highest reported SAR of an antenna is &gt; 1.2 W/kg (1-g) or 3.0 (10-g), holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands</li> <li>– in the same exact device and holder positions used for head and body SAR measurements; i.e. same device/button locations in the holder</li> <li>– a KDB inquiry is required if the highest reported SAR for each antenna, adjusted for increases in holder perturbation, would introduce noncompliance conditions or noticeably high differences due to perturbation</li> </ul>
<p>Procedure:</p> <ol style="list-style-type: none"> <li>1. For each frequency band and exposure condition the highest reported SAR is determined for each antenna</li> <li>2. If the reported SAR is above the threshold value the procedure given in E.4.1.1 of IEEE 1528:2013 is followed for holder perturbation analysis</li> <li>3. The SAR tolerance is calculated                             <math display="block">SAR_{tolerance} [\%] = \frac{SAR_{with\ holder} - SAR_{without\ holder}}{SAR_{with\ holder}} \cdot 100</math> </li> <li>4. If the SAR tolerance is negative which means that the SAR value without DUT holder is larger than the SAR value with DUT holder, the reported SAR value is corrected by the SAR tolerance in order to take the decrease in SAR value because of the DUT holder into account.                             <math display="block">SAR_{Reported\ with\ DUT\ holder\ perturbations} \left[ \frac{W}{kg} \right] = SAR_{Reported} \left[ \frac{W}{kg} \right] \cdot \left( 1 - \frac{SAR_{tolerance} [\%]}{100} \right)</math> </li> </ol>

#### 4.15 SAR Reporting

<b>General RF-Exposure Reporting Requirements (FCC KDB 865664 D02)</b>
<ul style="list-style-type: none"> <li>– The operating modes and exposure conditions of all wireless technologies applicable to the equipment approval must be clearly described               <ol style="list-style-type: none"> <li>1. Nominal and maximum output power of all wireless modes and frequency bands of production units should be specified; Tune-up tolerances should also be included when it is required for equipment authorization                    Otherwise, the maximum power allowed for production units should be identified                    When multiple maximum output power levels are specified for a wireless or operating mode; for example, different time slots, data rates or modulation requirements, such as GPRS, EDGE, 802.11, WiMax and various 3GPP implementations, the maximum output power of each configuration should be identified separately</li> <li>2. Antenna dimensions and separation distances should be illustrated in photos and/or diagrams</li> <li>3. Voice and data mode transmission requirements in all supported operating configurations and exposure conditions for standalone and simultaneous transmission operations</li> <li>4. Device implementation and operating requirements that can influence the RF exposure evaluation; for example, MPR, testing duty factor for TDD systems, power reduction requirements and multiple transmission configurations, such as data rate, data mode, channel bandwidth and modulation etc</li> <li>5. Accessories supplied with the device or available as options from the device manufacturer or provisions for supporting other after-market accessories that can influence the RF exposure evaluation</li> <li>6. Accessories supplied with the device or available as options from the device manufacturer or provisions for supporting other after-market accessories that can influence the RF exposure evaluation</li> <li>7. Optional antennas</li> </ol> </li> <li>– The device test setup and operating configurations used to establish transmission in various wireless modes should be documented; the information should include at least the following               <ol style="list-style-type: none"> <li>1. The test setup, measurement, numerical simulation or analysis procedures and KDB numbers of published RF exposure KDB procedures applied to test the device, include latest applicable TCB workshop guidance,</li> <li>2. Test guidance and other considerations provided through specific KDB inquiries to manufacturers and test labs should be fully described in test reports to support the test results. KDB tracking numbers should not be identified in test reports</li> <li>3. Source-based time-averaging duty factors that are inherent to device transmissions or applied separately to the measured results must be clearly explained in the test reports</li> <li>4. When test reduction and exclusion are applied, justifications according to the published RF exposure KDB procedures or KDB inquiries are required</li> <li>5. Except for generic test setup photos, other diagrams and illustrations should include proper explanations and descriptions to support the test setup and measurement results</li> <li>6. The test and supporting equipment or numerical simulation tools used to test the device should be uniquely identified in test reports, including actual calibration dates, required calibration interval and calibration status or software release versions. Equipment and apparatuses that are not used in the tests, except when clearly noted, should not be listed</li> </ol> </li> </ul>

<b>SAR Reporting Requirements (FCC KDB 865664 D02)</b>
<ul style="list-style-type: none"> <li>– SAR system validation status and system verification results should be documented in a separate section of the SAR report, or as an attachment, to confirm measurement accuracy</li> <li>– Conducted output power measurements are required to support the SAR results and for scaling results to the maximum tune-up tolerance or production limit</li> <li>– When multiple maximum output power levels are applied to different transmission configurations; for example, due to time slot, data rate, transmission protocol or signal modulation requirements, such as GMSK vs. 8-PSK in EDGE and different MPR or RB configurations in WCDMA or LTE, separate maximum output power measurements are required to support the SAR test configurations and results</li> <li>– When power reduction is implemented, the maximum output power levels and triggering conditions for activating the power reduction and returning to normal full power conditions must be verified and reported according to published RF exposure KDB procedures or procedures determined through KDB inquiries</li> </ul>

- The measured SAR results should be tabulated separately according to the test configurations documented in the test setup descriptions section of the test report, for the required test positions such as head, body-worn accessories, other use conditions (e.g. hotspot mode) and other host device specific exposure configurations
- Information relating to duty factors, TDMA time-slots and maximum output power of the various operating modes and conditions are also required to support the SAR results
- When SAR scaling is required to determine compliance for duty factors that are neither source-based nor inherent to the measurements, the scaling procedures and scaled results should be included after the tabulated SAR summary
- If the same scaling factor is applied to a group of SAR results; for example, a frequency band or operating mode, scaling the highest measured SAR within the group should generally be sufficient to demonstrate compliance
- The SAR scaling procedures required by the published RF exposure KDB procedures, specific KDB inquiries or other FCC requirements must be correctly applied to qualify for equipment approval
- When required, the SAR measurement variability and measurement uncertainty analysis results should be included after the tabulated SAR summary, according to procedures in KDB Publication 865664 D01. It should be clearly explained in the test report when SAR measurement uncertainty analysis is not required, but included for other purposes
- The analysis required to qualify for simultaneous transmission SAR test exclusion should be documented separately according to the head, body-worn accessory, other use conditions and host specific configurations described in the test setup section of the SAR report
- When applying SAR peak location separation ratio test exclusion, the peak location coordinates of each test configuration must be identified according to procedures in KDB Publication 447498 D01. The measured and estimated peak locations must be clearly identified, on SAR plots and illustrations as appropriate, to support the test exclusion
- The SAR distribution plots should be included in a separate attachment or appendix to the SAR report. The plots should be numbered sequentially and referenced in the tabulated SAR summary to facilitate review
- Information on test date, wireless mode, exposure configuration and test position, test channel & frequency, SAR probe serial number, probe conversion factors, transmission duty factor, tissue dielectric parameters, area and zoom scan measurement resolutions and dimensions, measurement drifts, 1-g or 10-g SAR and highest extrapolated SAR must be included on each SAR plot, with the peak location(s) clearly identified
- SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; for example, WCDMA head SAR at 1900 MHz. Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure.
- The relevant boundaries of the test device should be correctly illustrated on SAR plots with peak SAR location(s) identified on the SAR distribution.
- Z-axis plots are generally optional; these are included to address certain specific concerns, as determined by the test laboratory and measurement results. When Z-axis plots are included, the results should be extrapolated to the phantom surface and the purpose of the plots must be clearly explained in the SAR report.
- The SAR numbers listed on the grant(s) of equipment authorization must be identified at the beginning of the SAR report, for each equipment class, according to procedures in KDB Publication 690783 D01. These reported SAR numbers should be highlighted in the SAR summary results for easy reference
- The SAR numbers listed on the grant(s) of equipment authorization must be identified at the beginning of the SAR report, for each equipment class, according to procedures in KDB Publication 690783 D01
- General specifications of the SAR system, SAR probe and dipole calibration certificates and results, tissue-equivalent media recipes, SAR system verification (dipole) plots, generic test setup photos and SAR system validation status information etc. should be included in a separate attachment or appendix to the SAR report

## 5 Product specific SAR Evaluation Procedures

### 5.1 SAR Evaluation for UMPC Mini-Tablets

<b>SAR Evaluation for UMPC Mini-Tablets (FCC KDB 941225 D07)</b>
<ul style="list-style-type: none"> <li>– for certain small hand-held tablets and devices of similar form factors that are designed primarily for interactive hand-held use next to or near the body of users (devices are typically operated like a mini-tablet and are usually designed with certain UMPC features and operating characteristics)</li> <li>– test procedures are applicable to devices with a display and overall diagonal dimension <math>\leq 20</math> cm</li> </ul> <p>Larger devices</p> <ul style="list-style-type: none"> <li>– For larger tablets with a display or overall diagonal dimension <math>&gt; 20</math> cm, the SAR procedures in KDB Publication 616217 D04 are required</li> </ul> <p>Test distance 5 mm</p> <ul style="list-style-type: none"> <li>– A composite test separation distance of 5 mm is applied</li> </ul> <p>Test distance 10 mm</p> <ul style="list-style-type: none"> <li>– Depending on the device form factor, antenna locations, operating configurations and exposure conditions, a test separation distance up to 10 mm may be considered for some devices <ul style="list-style-type: none"> <li>Under such circumstances, 10-g extremity SAR must also be measured at zero test separation for all measured 1-g (10 mm) SAR configurations to address hand exposure</li> <li>A KDB inquiry is required to determine 10 mm is acceptable for measuring 1-g SAR</li> </ul> </li> </ul> <p>SAR testing</p> <ul style="list-style-type: none"> <li>– UMPC mini-tablet devices must be tested for 1-g SAR on all surfaces and side edges with a transmitting antenna located at <math>\leq 25</math> mm from that surface or edge, at 5 mm separation from a flat phantom, for the data modes, wireless technologies and frequency bands supported by the device to determine SAR compliance</li> <li>– When 1-g SAR is tested at 5 mm, 10-g SAR is not required</li> </ul> <p>Voice mode</p> <ul style="list-style-type: none"> <li>– When voice mode applies (speaker mode only) and the exposure conditions are not adequately covered by the data mode SAR results, additional SAR tests for voice mode may be required</li> </ul> <p>Next to ear</p> <ul style="list-style-type: none"> <li>– When next to the ear voice operations are supported, the handset and phablet procedures in KDB Publication 648474 D04 must be applied</li> </ul> <p>Hotspot mode</p> <ul style="list-style-type: none"> <li>– When the maximum output power levels of transmitters used in hotspot mode are not higher than those tested using UMPC mini-tablet procedures the more conservative UMPC mini-tablet SAR results can be used to support hotspot mode</li> </ul> <p>Simultaneous transmission</p> <ul style="list-style-type: none"> <li>– For simultaneous transmission conditions, the procedures described in KDB Publication 447498 D01 are used to determine 1-g SAR test exclusion and SAR test requirements</li> </ul> <p>Proximity sensing</p> <ul style="list-style-type: none"> <li>– Some UMPC mini-tablet devices may incorporated proximity sensing and power reduction mechanisms to address RF exposure and simultaneous transmission concerns. The proximity sensor triggering distance and coverage tests described in KDB Publication 616217 D04 for full size tablets should be applied to determine the non-reduced full power SAR test separation distance required for UMPC mini-tablets</li> </ul>

## 6 Technology specific SAR Evaluation Procedures

### 6.1 MedRadio

Evaluation Information
<p>Nominal and maximum output power and tune-up tolerance:  The nominal and maximum conducted output power levels are given</p> <p>Conducted and radiated output power of wireless modes:  On the required test channels (low, mid, high) the conducted output power levels are measured at the maximum achievable duty cycle</p> <p>Transmission duty factor:  The duty factor is measured and reported as required per TCB workshop 2016-10</p>

Evaluation Test Mode
<p>Test mode setup:  Manufacturer tool based test mode</p> <p>Modulation:  All modes (modulations and data rates) used by the EUT</p> <p>Test packet interval:  Maximum achievable duty factor</p>

Evaluation Steps
<p>Rated highest maximum output power:  1. The highest rated conducted output power is listed for all relevant operational modes</p> <p>Conducted output power:  2. The actual conducted output power is measured in test mode on the required test channels (low, mid, high) and it is verified that the actual output power is within 2 dB of the highest rated output power  3. The duty cycle of the test mode is measured and recorded</p> <p>Test exclusion:  4. The test separation distance is determined with respect to the applicable device use cases  5. Using the highest rated maximum output power values a test exclusion is performed according to KDB 447498 D01 and RSS-102</p> <p>Tissue Simulating Liquid and System Validation:  6. The tissue simulating liquid is checked and the system validation is performed directly before SAR testing  Tissue simulating liquid and system validation is repeated every 48 h if needed</p> <p>SAR Measurement:  7. SAR is measured using test mode for all test positions on the channel and operational mode combination with the highest actual output power  8. The measured SAR values are scaled to the highest rated maximum output power value for the operational mode under test  9. The general test exclusion of KDB 447498 D01 is followed for the applicability of SAR testing to the other required test channels</p> <p>SAR Repeatability:  10. If needed due to SAR results, repeated measurements are performed after all other SAR tests are finished</p> <p>DUT Holder Perturbations:  11. If needed due to SAR results DUT holder perturbation verification is performed</p>

## 6.2 LTE Cat-M1


Evaluation Information
<p>Frequency ranges and channel bandwidths:                      The frequency range and channel bandwidths (1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz) are listed for each frequency band</p> <p>Channel selection:                      The required test channels for each channel bandwidth and frequency band                      Per KDB 941225 D05; if transmission bandwidth &gt; 100 MHz the channel selection criteria of KDB 447498 D01 must be applied                      otherwise, the low, mid, high channel should be used</p> <p>Antenna implementation:                      Antenna usage for the different operational modes and configurations are listed</p> <p>Voice and data mode:                      The applicability of voice and data modes for each RF-exposure configuration</p> <p>Power class:                      The power class of the radio implementation</p> <p>Nominal and maximum output power and tune-up tolerance:                      For each band, channel bandwidth and applicable resource block allocations the nominal and maximum conducted output power levels are given</p> <p>Conducted and radiated output power of wireless modes:                      On the required test channels (low, mid, high) the conducted output power levels are measured for all applicable channel bandwidths and resource block allocations and the corresponding modulations</p> <p>Maximum power reduction:                      The usage of Maximum power reduction and implementation details are given for each frequency band, channel, channel bandwidth, resource block allocation and modulation together with the 3GPP target values</p> <p>Spectrum plots for resource block configurations:                      If no properly configured base station simulator is used for the SAR or power measurements, spectrum plots for each RB allocation and offset configuration are given</p>



### Evaluation Test Mode

Test mode setup:

Communication tester based test mode



Frequency bands:

3GPP TS 36.521-1:

UE category M1 and M2 is designed to operate in the E-UTRA operating bands 1, 2, 3, 4, 5, 7, 8, 11, 12, 13, 14, 18, 19, 20, 21, 25, 26, 27, 28, 31, 66, 71, 72, 73 and 74 in both half duplex FDD mode and full-duplex FDD mode, and in band 39, 40 and 41 in TDD mode. The E-UTRA bands are defined in Table 5.2-1.

All supported frequency bands

Duplex mode:

Half-duplex, Full-duplex as applicable

Modulation:

QPSK, 16-QAM as applicable

Channel type:

RMC

QPSK

Parameter	Unit	Value					
Channel bandwidth	MHz	1.4	3	5	10	15	20
Allocated resource blocks		6	6	6	6	6	6
DFT-OFDM Symbols per Sub-Frame		12	12	12	12	12	12
Modulation		QPSK	QPSK	QPSK	QPSK	QPSK	QPSK
Target Coding rate		1/3	1/3	1/3	1/3	1/3	1/3
Payload size	Bits	600	600	600	600	600	600
Transport block CRC	Bits	24	24	24	24	24	24
Number of code blocks per Sub-Frame		1	1	1	1	1	1
Total number of bits per Sub-Frame	Bits	1728	1728	1728	1728	1728	1728
Total symbols per Sub-Frame		864	864	864	864	864	864
UE Category		M1	M1	M1	M1	M1	M1

NOTE 1: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit)

NOTE 2: For HD-FDD UE, the uplink subframes are scheduled at the 4th, 5th and 6th subframes every 10ms for the channel bandwidth 5MHz/10MHz/15MHz/20MHz. For HD-FDD UE, the uplink subframes are scheduled at the 5th, 6th, and 7th subframes every 10ms for the channel bandwidth 1.4MHz/3MHz. Information bit payload is available if uplink subframe is scheduled.

$N_{PUSCH}^{abs}$  is total number of absolute subframes a PUSCH with repetition spans [4].

NOTE 3: For HD-FDD UE with  $N_{PUSCH}^{abs} > 1$ , MPDCCH are scheduled at 0th DL subframe every  $N_{PUSCH}^{abs} + 5$  subframes (starting from the 0th subframe). The associated PUSCH is scheduled at the 4th to ( $N_{PUSCH}^{abs} + 3$ )-th UL subframes every  $N_{PUSCH}^{abs} + 5$  subframes. Information bit payload is available if uplink subframe is scheduled.

Parameter	Ch BW	Allocated RBs	DFT-OFDM Symbols per Sub-Frame	Mod'n	Target Coding rate	Payload size	Transport block CRC	Number of code blocks per Sub-Frame (Note 1)	Total number of bits per Sub-Frame	Total symbols per Sub-Frame	UE Category
Unit	MHz					Bits	Bits		Bits		
1.4-20	1	12	12	QPSK	1/3	72	24	1	288	144	M1
1.4-20	2	12	12	QPSK	1/3	176	24	1	576	288	M1
1.4-20	3	12	12	QPSK	1/3	296	24	1	864	432	M1
1.4-20	4	12	12	QPSK	1/3	392	24	1	1152	576	M1
1.4-20	5	12	12	QPSK	1/3	424	24	1	1440	720	M1
3-20	6	12	12	QPSK	1/3	600	24	1	1728	864	M1

Note 1: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit)

Note 2: For HD-FDD UE, the uplink subframes are scheduled at the 4th, 5th and 6th subframes every 10ms for the channel bandwidth 5MHz/10MHz/15MHz/20MHz. For HD-FDD UE, the uplink subframes are scheduled at the 5th, 6th, and 7th subframes every 10ms for the channel bandwidth 1.4MHz/3MHz. Information bit payload is available if uplink subframe is scheduled.

16-QAM

Parameter	Unit	Value					
Channel bandwidth	MHz	1.4	3	5	10	15	20
Allocated resource blocks		5	5	5	5	5	5
DFT-OFDM Symbols per Sub-Frame		12	12	12	12	12	12
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding rate		1/3	1/3	1/3	1/3	1/3	1/3
Payload size	Bits	872	872	872	872	872	872
Transport block CRC	Bits	24	24	24	24	24	24
Number of code blocks per Sub-Frame		1	1	1	1	1	1
Total number of bits per Sub-Frame	Bits	2880	2880	2880	2880	2880	2880
Total symbols per Sub-Frame		720	720	720	720	720	720
UE Category		M1	M1	M1	M1	M1	M1

NOTE 1: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit)

NOTE 2: For HD-FDD UE, the uplink subframes are scheduled at the 4th, 5th and 6th subframes every 10ms for the channel bandwidth 5MHz/10MHz/15MHz/20MHz. For HD-FDD UE, the uplink subframes are scheduled at the 5th, 6th, and 7th subframes every 10ms for the channel bandwidth 1.4MHz/3MHz. Information bit payload is available if uplink subframe is scheduled.

Parameter	Ch BW	Allocated RBs	DFT-OFDM Symbols per Sub-Frame	Mod'n	Target Coding rate	Payload size	Transport block CRC	Number of code blocks per Sub-Frame (Note 1)	Total number of bits per Sub-Frame	Total symbols per Sub-Frame	UE Category
Unit	MHz					Bits	Bits		Bits		
1.4-20	1	12	12	16QAM	1/2	256	24	1	576	144	M1
1.4-20	2	12	12	16QAM	1/2	552	24	1	1152	288	M1
1.4-20	3	12	12	16QAM	1/2	840	24	1	1728	432	M1
1.4-20	4	12	12	16QAM	1/2	904	24	1	2040	516	M1

Note 1: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit)

Note 2: For HD-FDD UE, the uplink subframes are scheduled at the 4th, 5th and 6th subframes every 10ms for the channel bandwidth 5MHz/10MHz/15MHz/20MHz. For HD-FDD UE, the uplink subframes are scheduled at the 5th, 6th, and 7th subframes every 10ms for the channel bandwidth 1.4MHz/3MHz. Information bit payload is available if uplink subframe is scheduled.

Required test channels:

According to 3GPP TS 36.508 Section 4.3.1

Channel bandwidths:

3GPP TS 36.521-1:

Channel bandwidth $BW_{channel}$ [MHz]	1.4	3	5	10	15	20

All supported channel bandwidths from the applicable bandwidth per band according to 3GPP TS 36.521-1 Table 5.4.2.1-1

E-UTRA Band	E-UTRA band / channel bandwidth					
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
1		Yes	Yes	Yes	Yes	Yes
2	Yes	Yes	Yes	Yes	Yes <sup>1</sup>	Yes <sup>1</sup>
3	Yes	Yes	Yes	Yes	Yes <sup>1</sup>	Yes <sup>1</sup>
4	Yes	Yes	Yes	Yes	Yes	Yes
5	Yes	Yes	Yes	Yes <sup>1</sup>		
6			Yes	Yes <sup>1</sup>		
7		Yes	Yes	Yes	Yes <sup>3</sup>	Yes <sup>1,3</sup>
8	Yes	Yes	Yes	Yes <sup>1</sup>		
9		Yes	Yes	Yes	Yes <sup>1</sup>	Yes <sup>1</sup>
10			Yes	Yes	Yes	Yes
11			Yes	Yes <sup>1</sup>		
12	Yes	Yes	Yes <sup>1</sup>	Yes <sup>1</sup>		
13			Yes <sup>1</sup>	Yes <sup>1</sup>		
14			Yes <sup>1</sup>	Yes <sup>1</sup>		
...						
17		Yes <sup>1</sup>	Yes <sup>1</sup>			
18		Yes	Yes <sup>1</sup>	Yes <sup>1</sup>		
19		Yes	Yes <sup>1</sup>	Yes <sup>1</sup>	Yes <sup>1</sup>	
20			Yes	Yes <sup>1</sup>	Yes <sup>1</sup>	Yes <sup>1</sup>
21			Yes	Yes <sup>1</sup>	Yes <sup>1</sup>	Yes <sup>1</sup>

Resource block allocation:

For each frequency band and required test channel:

- 1 RB at lower edge, center position and upper edge of channel bandwidth
- 50 % RB allocation at lower edge, center position and upper edge of channel bandwidth
- 100 % RB allocation

Number of resource blocks:

QPSK: 0 – 6

16-QAM: 0 – 5

Narrowband indices:

1.4 MHz: 0

3 MHz: 0, 1

5 MHz: 0, 1, 2, 3

10 MHz: 0, 1, 2, 3, 4, 5, 6, 7

15 MHz: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11

20 MHz: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 1, 14, 15

Combination of resource block number and narrowband index as per KDB Guidance

3GPP Maximum power reduction:

QPSK and 16-QAM:

Power class 3:

Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	>2	>2	>1	>4	-	-	≤ 1
QPSK	>5	>5	-	-	-	-	≤ 2
16 QAM	≤ 2	≤ 2	>1	>3	-	-	≤ 1
16QAM	>2	>2	>3	>5	-	-	≤ 2

Power class 5:

Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	>2	>2	>3	>5	-	-	≤ 1
QPSK	>5	>5	-	-	-	-	≤ 2
16 QAM	≤ 2	≤ 2	>3	>5	-	-	≤ 1
16QAM	>2	>2	>5	-	-	-	≤ 2

Additional Maximum power reduction (A-MPR):

None via usage of NS\_01:

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N <sub>RB</sub> )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A

Uplink transmit power control:

Maximum power

**Evaluation Steps**

Rated highest maximum output power:

1. The highest rated conducted output power is listed for all frequency bands, channel bandwidth, RB allocations and modulations

Conducted output power:

2. The actual conducted output power is measured on the required test channels (Low, Mid, High) for each band, for the required RB allocations and all applicable modulations

It is verified that the actual output power is within 2 dB of the highest rated output power

Test exclusion per KDB 447498 D01:

4. The test separation distance is determined with respect to the applicable device use cases
5. Using the highest rated maximum output power values a test exclusion is performed according to KDB 447498 D01 and RSS-102

Initial test selection per KDB 941225 D05:

6. SAR testing is initially performed for QPSK 1RB and 50 % RB allocation for the largest channel bandwidth in each frequency band for all test positions that are not excluded according to KDB 447498 D01

Tissue Simulating Liquid and System Validation:

7. The tissue simulating liquid is checked and the system validation is performed directly before SAR testing for each frequency band and corresponding liquid

Tissue simulating liquid and system validation is repeated every 48 h if needed

SAR Measurement:

8. SAR is measured for all required test positions on the channel with the highest average output power according to initial test selection per KDB 941225 D05
9. The measured SAR values are scaled to the highest rated maximum output power value for the operational mode under test
10. The test reduction rules per KDB 941225 D05 for the other 1 RB and 50 % RB allocations and required test channels is applied:

SAR is not required:

the reported SAR is  $\leq 0.8$  W/kg

otherwise:

SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel

if the reported SAR is  $> 1.45$  W/kg:

SAR is required for all three RB offset configurations for that required test channel

11. The test reduction rules per KDB 941225 D05 for the 100 % RB allocation is applied:

SAR is not required:

the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations

and

the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg

otherwise:

SAR is measured for the highest output power channel

if the reported SAR is  $> 1.45$  W/kg:

The remaining required test channels must also be tested

12. The test reduction rules per KDB 941225 D05 for the higher order modulations is applied:

The 1 RB, 50 % RB and 100 % allocation rules for QPSK are also applied to higher order modulations in order to identify the configurations that require SAR testing

SAR is required only:

the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK

or

the reported SAR for the QPSK configuration is  $> 1.45$  W/kg

13. The test reduction rules per KDB 941225 D05 for the lower channel bandwidths is applied:

The 1 RB, 50 % RB and 100 % allocation rules for QPSK are applied to low channel bandwidths in order to identify the configurations that require SAR testing

The 1 RB, 50 % RB and 100 % allocation rules for QPSK are also applied to higher order modulations in lower channel bandwidths in order to identify the configurations that require SAR testing

SAR is required only:

the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration

Or

the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg

14. Additional SAR testing is applied for all configurations that does not fall under the test reduction rules according to KDB 941225 D05

SAR Repeatability:

10. If needed due to SAR results, repeated measurements are performed after all other SAR tests are finished

DUT Holder Perturbations:

11. If needed due to SAR results DUT holder perturbation verification is performed

## 7 SAR Evaluation for Standalone Transmitter Operation

### 7.1 Radio Chipset/Module 1: MedRadio

#### 7.1.1 Maximum specified output power

Maximum Specified Output Power incl. Tune-up Tolerance				
Mode	Antenna Port	Maximum Conducted Power [dBm]	Antenna Gain [dBi]	Maximum Radiated Power [dBm EIRP]
2-FSK / 8 kbps	MICS	-17.9	1.9	-16.0
2-FSK / 197 kbps	MICS	-17.9	1.9	-16.0

## 7.1.2 Conducted output power

Source-based time-averaged conducted Output Power						
Mode	Antenna port	Channel	Frequency	Power [dBm]	Tune-up Power [dBm]	Duty Cycle [%]
2-FSK / 8 kbps	MICS	1	402.45	-18.9	-17.9	100
		0	403.65	-18.6	-17.9	100
		7	404.85	-19.0	-17.9	100
2-FSK / 197 kbps	MICS	1	402.45	-18.9	-17.9	100
		0	403.65	-18.6	-17.9	100
		7	404.85	-19.0	-17.9	100

Notes
1: Conducted power is source-based time-averaged power
2: The actual conducted power must be within 2 dB of the specified maximum tune-up power
3: The highest output power channel and transmission mode is used for initial SAR testing

## 7.1.3 Product specific SAR evaluation requirements

UMPC mini-tablet devices (1-g) SAR					
Antenna	Test Position	Antenna to DUT Surface Separation [mm]	DUT to User Separation [mm]	SAR Required	Note
MICS	Front	< 25	5	Yes	1
MICS	Back	< 25	5	Yes	1
MICS	Top	> 25	5	No	1
MICS	Bottom	< 25	5	Yes	1
MICS	Left	< 25	5	Yes	1
MICS	Right	< 25	5	Yes	1

Notes
1: UMPC mini-tablet devices must be tested for 1-g SAR on all surfaces and side edges with a transmitting antenna located at $\leq 25$ mm from that surface or edge, at 5 mm separation from a flat phantom; When 1-g SAR is tested at 5 mm, 10-g SAR is not required

7.1.4 General output power based test exclusion per KDB 447498 D01

SAR Test Exclusion										
SAR Mode	Frequency [MHz]	Position	Tune-up power [dBm]	Tune-up power [mW]	Test Distance [mm]	Threshold power [mW]	SAR Required	Estimated SAR (1-g) [W/kg]	Estimated SAR (10-g) [W/kg]	Note
Antenna: MICS										
1-g	404.85	Front	-17.9	0	5	24	No	0.00028	N/A	1
1-g	404.85	Back	-17.9	0	5	24	No	0.00028	N/A	1
1-g	404.85	Bottom	-17.9	0	5	24	No	0.00028	N/A	1
1-g	404.85	Left	-17.9	0	5	24	No	0.00028	N/A	1
1-g	404.85	Right	-17.9	0	5	24	No	0.00028	N/A	1

Notes
1: All surfaces and edges with a maximum power below the threshold power are excluded from SAR measurements; for all other surfaces or edges SAR measurements must be performed



7.1.5 General maximum output power based test exclusion per RSS-102

SAR Test Exclusion											
SAR Mode	Frequency [MHz]	Position	Cond. power [dBm]	Tune-up power [dBm]	Tune-up power [mW]	Test Distance [mm]	Threshold power [mW]	SAR Required	Estimated SAR (1-g) [W/kg]	Estimated SAR (10-g) [W/kg]	Note
Antenna: MICS											
1-g	404.85	Front	-17.9	-16	0	5	58	No	0.00028	N/A	1
1-g	404.85	Back	-17.9	-16	0	5	58	No	0.00028	N/A	1
1-g	404.85	Bottom	-17.9	-16	0	5	58	No	0.00028	N/A	1
1-g	404.85	Left	-17.9	-16	0	5	58	No	0.00028	N/A	1
1-g	404.85	Right	-17.9	-16	0	5	58	No	0.00028	N/A	1

Notes
1: All surfaces and edges with a maximum power below the threshold power are excluded from SAR measurements; for all other surfaces or edges SAR measurements must be performed
2: Estimated SAR is calculated according to FCC KDB 447498 D01 from conducted output power, operating frequency and test distance

## 7.2 Radio Chipset/Module 1: LTE Cat-M1

### 7.2.1 Maximum specified output power

Maximum Specified Output Power incl. Tune-up Tolerance					
Band	Modulation	Antenna Port	Maximum Conducted Power [dBm]	Antenna Gain [dBi]	Maximum Radiated Power [dBm]
FDD2	QPSK	LTE	22.5	-2.4	20.1
FDD2	16-QAM	LTE	22.5	-2.4	20.1
FDD4	QPSK	LTE	23.0	1.3	24.3
FDD4	16-QAM	LTE	23.0	1.3	24.3
FDD5	QPSK	LTE	24.0	-2.9	21.1
FDD5	16-QAM	LTE	24.0	-2.9	21.1
FDD12	QPSK	LTE	24.0	2.9	26.9
FDD12	16-QAM	LTE	24.0	2.9	26.9
FDD26	QPSK	LTE	24.0	-1.8	22.2
FDD26	16-QAM	LTE	24.0	-1.8	22.2

Notes
1: Maximum conducted power is specified for the antenna feed point at the end of the antenna feeding transmission line between the radio module output port and the antenna
2: According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows: <ul style="list-style-type: none"> <li>a) The maximum output power, including tolerance, for the smaller band must be <math>\leq</math> the larger band to qualify for the SAR test exclusion Tune-up power of LTE band 5 is identical to tune-up power of LTE band 26</li> <li>b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band All channel bandwidths supported for LTE band 5 are also supported for LTE band 26</li> </ul> → SAR test exclusion for overlapping frequency bands applies to LTE band 5

7.2.2 Conducted output power

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD2											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	18700	18900	19100	Tune-up Power
								1860 MHz	1880 MHz	1900 MHz	
FDD2	20	QPSK	1	0	0	0	0	21.64	21.82	21.49	22.5
			1	0	8	0	0	21.35	21.87	21.69	22.5
			1	5	15	0	0	21.34	<b>21.98</b>	21.94	22.5
			3	0	0	0	0	<b>21.39</b>	<b>21.54</b>	21.31	22.5
			3	0	8	0	0	21.19	21.46	21.30	22.5
			3	3	15	0	0	21.19	21.44	<b>21.38</b>	22.5
			6	0	0	0	0	21.36	<b>21.40</b>	21.16	22.5
			6	0	8	0	0	21.18	21.36	21.20	22.5
		6	0	15	0	0	21.30	21.33	21.37	22.5	
		16-QAM	1	0	0	0	0	21.08	21.11	21.23	22.5
		16-QAM	1	0	8	0	0	20.84	21.04	21.00	22.5
		16-QAM	1	5	15	0	0	20.77	21.29	20.96	22.5
		16-QAM	3	0	0	0	0	20.98	21.18	21.06	22.5
		16-QAM	3	0	8	0	0	20.93	21.23	21.19	22.5
		16-QAM	3	3	15	0	0	20.89	21.35	21.42	22.5
		16-QAM	5	0	0	0	0	20.75	21.13	21.00	22.5
16-QAM	5	0	8	0	0	20.54	21.25	21.35	22.5		
16-QAM	5	0	15	0	0	20.57	21.29	21.29	22.5		
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	18675	18900	19125	Tune-up Power
								1857.5 MHz	1880 MHz	1902.5 MHz	
FDD2	15	QPSK	1	0	0	0	0	21.59	21.72	21.59	22.5
			1	0	6	0	0	21.40	21.80	21.76	22.5
			1	5	11	0	0	21.28	21.94	21.99	22.5
			3	0	0	0	0	21.42	21.45	21.29	22.5
			3	0	6	0	0	21.39	21.37	21.22	22.5
			3	3	11	0	0	21.24	21.39	21.17	22.5
			6	0	0	0	0	21.39	21.31	21.13	22.5
			6	0	6	0	0	21.36	21.28	21.20	22.5
		6	0	11	0	0	21.17	21.34	21.24	22.5	
		16-QAM	1	0	0	0	0	21.12	21.15	21.24	22.5
		16-QAM	1	0	6	0	0	20.97	21.08	21.16	22.5
		16-QAM	1	5	11	0	0	20.99	21.11	21.24	22.5
		16-QAM	3	0	0	0	0	21.08	21.19	21.03	22.5
		16-QAM	3	0	6	0	0	20.96	21.29	21.23	22.5
		16-QAM	3	3	11	0	0	20.85	21.36	21.28	22.5
		16-QAM	5	0	0	0	0	21.59	21.28	21.23	22.5
16-QAM	5	0	6	0	0	21.88	21.36	21.34	22.5		
16-QAM	5	0	11	0	0	21.85	21.46	21.25	22.5		

Notes	
1:	Conducted power is RMS average power
2:	The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD2											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	18650	18900	19150	Tune-up Power
								1855 MHz	1880 MHz	1905 MHz	
FDD2	10	QPSK	1	0	0	0	0	21.60	21.86	21.69	22.5
			1	0	4	0	0	21.46	21.83	21.77	22.5
			1	5	7	0	0	21.43	21.94	21.84	22.5
			3	0	0	0	0	21.45	21.55	21.25	22.5
			3	0	4	0	0	21.44	21.55	21.22	22.5
			3	3	7	0	0	21.26	21.39	21.26	22.5
			6	0	0	0-1	1	20.34	20.36	20.16	21.5
			6	0	4	0-1	1	20.35	20.34	20.20	21.5
			6	0	7	0-1	1	20.37	20.43	20.29	21.5
		16-QAM	1	0	0	0	0	21.13	21.15	21.54	22.5
			1	0	4	0	0	21.01	21.14	21.48	22.5
			1	5	7	0	0	21.01	21.24	20.99	22.5
			3	0	0	0	0	21.10	21.27	20.99	22.5
			3	0	4	0	0	20.90	21.20	21.12	22.5
			3	3	7	0	0	20.86	21.15	21.17	22.5
			5	0	0	0-1	1	20.48	20.30	20.23	21.5
5	0	4	0-1	1	20.88	20.46	20.35	21.5			
5	0	7	0-1	1	20.98	20.43	20.41	21.5			
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	18625	18900	19175	Tune-up Power
								1852.5 MHz	1880 MHz	1907.5 MHz	
FDD2	5	QPSK	1	0	0	0	0	21.63	21.74	21.41	22.5
			1	0	2	0	0	21.56	21.81	21.25	22.5
			1	5	3	0	0	21.34	21.73	21.15	22.5
			3	0	0	0-1	1	20.38	20.39	20.02	21.5
			3	0	2	0-1	1	20.42	20.42	20.21	21.5
			3	3	3	0-1	1	20.24	20.23	20.14	21.5
			6	0	0	0-1	1	20.36	20.35	20.16	21.5
			6	0	2	0-1	1	20.39	20.40	20.29	21.5
			6	0	3	0-1	1	20.20	20.36	20.23	21.5
		16-QAM	1	0	0	0	0	21.16	21.16	20.77	22.5
			1	0	2	0	0	21.20	21.10	20.94	22.5
			1	5	3	0	0	20.92	21.04	20.85	22.5
			3	0	0	0-1	1	19.98	20.11	19.74	21.5
			3	0	2	0-1	1	19.92	20.28	19.89	21.5
			3	3	3	0-1	1	19.87	20.31	19.81	21.5
			5	0	0	0-2	1	19.53	19.51	19.59	21.5
5	0	2	0-2	1	20.10	19.48	19.88	21.5			
5	0	3	0-2	1	20.07	19.52	19.95	21.5			

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD2											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	18615	18900	19185	Tune-up Power
								1851.5 MHz	1880 MHz	1908.5 MHz	
FDD2	3	QPSK	1	0	0	0	0	21.82	21.83	21.78	22.5
			1	0	1	0	0	21.60	21.85	21.69	22.5
			1	5	1	0	0	21.83	21.81	21.65	22.5
			3	0	0	0-1	1	20.65	20.57	20.40	21.5
			3	0	1	0-1	1	20.66	20.58	20.52	21.5
			3	3	1	0-1	1	20.52	20.43	20.40	21.5
			6	0	0	0-2	2	19.47	19.46	19.29	20.5
		6	0	1	0-2	2	19.46	19.45	19.39	20.5	
		16-QAM	1	0	0	0-1	1	20.10	20.47	19.92	21.5
			1	0	1	0-1	1	20.00	20.03	19.93	21.5
			1	5	1	0-1	1	19.97	20.00	19.88	21.5
			3	0	0	0-2	2	19.04	18.91	18.88	20.5
			3	0	1	0-2	2	19.06	19.05	18.95	20.5
			3	3	1	0-2	2	19.16	19.15	18.97	20.5
5	0		0	0-2	2	19.60	19.97	20.13	20.5		
5	0	1	0-2	2	20.04	19.99	20.12	20.5			
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	18607	18900	19193	Tune-up Power
								1850.7 MHz	1880 MHz	1909.3 MHz	
FDD2	1.4	QPSK	1	0	0	0	0	21.69	21.80	21.73	22.5
			1	3	0	0	0	21.72	21.75	21.75	22.5
			1	5	0	0	0	21.63	21.65	21.64	22.5
			3	0	0	0-1	1	20.44	20.41	20.37	21.5
			3	3	0	0-1	1	20.45	20.42	20.37	21.5
			6	0	0	0-2	2	19.40	19.33	19.17	20.5
		16-QAM	1	0	0	0-1	1	20.25	20.02	20.32	21.5
			1	3	0	0-1	1	20.05	20.05	19.94	21.5
			1	5	0	0-1	1	19.98	19.99	19.87	21.5
			3	0	0	0-2	2	19.06	18.90	18.85	20.5
			3	3	0	0-2	2	19.12	19.02	18.92	20.5
			5	0	0	0-2	2	19.00	19.36	18.71	20.5

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD4											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	20050	20175	20300	Tune-up Power
								1720 MHz	1732.5 MHz	1745 MHz	
FDD4	20	QPSK	1	0	0	0	0	<u>21.72</u>	21.77	21.60	23.0
			1	0	8	0	0	21.67	21.86	21.97	23.0
			1	5	15	0	0	21.60	<u>21.86</u>	<u>22.10</u>	23.0
			3	0	0	0	0	21.49	21.67	21.57	23.0
			3	0	8	0	0	21.53	21.74	<u>21.64</u>	23.0
			3	3	15	0	0	<u>21.55</u>	<u>21.76</u>	21.64	23.0
			6	0	0	0	0	21.44	21.62	21.43	23.0
			6	0	8	0	0	21.51	21.72	21.63	23.0
		6	0	15	0	0	21.51	<u>21.73</u>	21.64	23.0	
		16-QAM	1	0	0	0	0	21.55	22.05	21.70	23.0
			1	0	8	0	0	21.29	21.43	21.70	23.0
			1	5	15	0	0	21.35	21.47	21.57	23.0
			3	0	0	0	0	21.20	21.39	21.34	23.0
			3	0	8	0	0	21.22	21.59	21.57	23.0
			3	3	15	0	0	21.12	21.69	21.60	23.0
			5	0	0	0	0	21.39	21.47	21.38	23.0
5	0		8	0	0	21.90	21.71	21.60	23.0		
5	0	15	0	0	21.90	21.69	21.69	23.0			
FDD4	15	QPSK	1	0	0	0	0	21.72	21.82	21.69	23.0
			1	0	6	0	0	21.77	22.01	21.98	23.0
			1	5	11	0	0	21.63	22.05	22.00	23.0
			3	0	0	0	0	21.54	21.67	21.63	23.0
			3	0	6	0	0	21.62	21.68	21.65	23.0
			3	3	11	0	0	21.55	21.62	21.56	23.0
			6	0	0	0	0	21.49	21.42	21.38	23.0
			6	0	6	0	0	21.58	21.55	21.61	23.0
		6	0	11	0	0	21.50	21.64	21.61	23.0	
		16-QAM	1	0	0	0	0	21.43	21.58	21.68	23.0
			1	0	6	0	0	21.38	21.64	21.56	23.0
			1	5	11	0	0	21.35	21.56	21.50	23.0
			3	0	0	0	0	21.25	21.29	21.37	23.0
			3	0	6	0	0	21.28	21.51	21.50	23.0
			3	3	11	0	0	21.12	21.59	21.52	23.0
			5	0	0	0	0	21.39	21.35	21.45	23.0
5	0		6	0	0	22.06	21.62	21.57	23.0		
5	0	11	0	0	21.36	21.63	21.56	23.0			

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD4											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	20000	20175	20350	Tune-up Power
								1715 MHz	1732.5 MHz	1750 MHz	
FDD4	10	QPSK	1	0	0	0	0	21.69	21.86	21.83	23.0
			1	0	4	0	0	21.72	22.03	22.04	23.0
			1	5	7	0	0	21.67	21.98	22.11	23.0
			3	0	0	0	0	21.55	21.73	21.67	23.0
			3	0	4	0	0	21.58	21.70	21.73	23.0
			3	3	7	0	0	21.61	21.63	21.64	23.0
			6	0	0	0-1	1	20.47	20.62	20.65	22.0
			6	0	4	0-1	1	20.56	20.68	20.71	22.0
			6	0	7	0-1	1	20.60	20.63	20.68	22.0
		16-QAM	1	0	0	0	0	21.50	21.55	21.76	23.0
			1	0	4	0	0	21.44	21.71	21.71	23.0
			1	5	7	0	0	21.40	21.44	21.68	23.0
			3	0	0	0	0	21.14	21.34	21.51	23.0
			3	0	4	0	0	21.24	21.53	21.68	23.0
			3	3	7	0	0	21.29	21.49	21.59	23.0
			5	0	0	0-1	1	20.54	20.48	20.54	22.0
5	0	4	0-1	1	21.10	20.60	20.72	22.0			
5	0	7	0-1	1	21.14	20.64	20.65	22.0			
FDD4	5	QPSK	1	0	0	0	0	21.72	21.89	21.84	23.0
			1	0	2	0	0	21.84	22.00	22.00	23.0
			1	5	3	0	0	21.77	22.02	21.80	23.0
			3	0	0	0-1	1	20.63	20.66	20.53	22.0
			3	0	2	0-1	1	20.65	20.74	20.64	22.0
			3	3	3	0-1	1	20.60	20.57	20.66	22.0
			6	0	0	0-1	1	20.49	20.61	20.60	22.0
			6	0	2	0-1	1	20.72	20.72	20.72	22.0
			6	0	3	0-1	1	20.67	20.67	20.66	22.0
		16-QAM	1	0	0	0	0	21.60	21.65	21.64	23.0
			1	0	2	0	0	21.52	21.63	21.65	23.0
			1	5	3	0	0	21.40	21.62	21.50	23.0
			3	0	0	0-1	1	20.29	20.58	20.41	22.0
			3	0	2	0-1	1	20.41	20.65	20.52	22.0
			3	3	3	0-1	1	20.35	20.56	20.43	22.0
			5	0	0	0-2	2	19.92	19.59	19.58	21.0
5	0	2	0-2	2	19.90	19.73	19.72	21.0			
5	0	3	0-2	2	19.77	19.67	19.65	21.0			

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD4											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	19965	20175	20385	Tune-up Power
								1711.5 MHz	1732.5 MHz	1753.5 MHz	
FDD4	3	QPSK	1	0	0	0	0	21.52	22.19	21.85	23.0
			1	0	1	0	0	21.54	22.10	21.98	23.0
			1	5	1	0	0	21.56	22.07	21.94	23.0
			3	0	0	0-1	1	20.46	20.87	20.85	22.0
			3	0	1	0-1	1	20.54	20.86	20.84	22.0
			3	3	1	0-1	1	20.60	20.77	20.72	22.0
			6	0	0	0-2	2	19.67	19.73	19.71	21.0
		6	0	1	0-2	2	19.73	19.72	19.68	21.0	
		16-QAM	1	0	0	0-1	1	20.45	20.47	20.44	22.0
			1	0	1	0-1	1	20.50	20.29	20.33	22.0
			1	5	1	0-1	1	20.54	20.24	20.29	22.0
			3	0	0	0-2	2	19.53	19.21	19.30	21.0
			3	0	1	0-2	2	19.53	19.33	19.31	21.0
			3	3	1	0-2	2	19.51	19.31	19.29	21.0
5	0		0	0-2	2	19.54	19.43	19.32	21.0		
5	0	1	0-2	2	19.53	19.41	19.39	21.0			
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	19957	20175	20393	Tune-up Power
								1710.7 MHz	1732.5 MHz	1754.3 MHz	
FDD4	1.4	QPSK	1	0	0	0	0	21.86	21.99	21.97	23.0
			1	3	0	0	0	21.97	22.10	22.08	23.0
			1	5	0	0	0	21.89	22.02	21.99	23.0
			3	0	0	0-1	1	20.75	20.78	20.78	22.0
			3	3	0	0-1	1	20.76	20.79	20.78	22.0
			6	0	0	0-2	2	19.73	19.78	19.68	21.0
		16-QAM	1	0	0	0-1	1	20.40	20.30	20.28	22.0
			1	3	0	0-1	1	20.43	20.33	20.31	22.0
			1	5	0	0-1	1	20.37	20.27	20.25	22.0
			3	0	0	0-2	2	19.33	19.26	19.25	21.0
			3	3	0	0-2	2	19.34	19.28	19.34	21.0
			5	0	0	0-2	2	20.01	19.51	19.48	21.0

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR



Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD12											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	23060	23095	23130	Tune-up Power
								704 MHz	707.5 MHz	711 MHz	
FDD12	10	QPSK	1	0	0	0	0	22.78	22.87	23.01	24.0
			1	0	4	0	0	22.73	22.93	23.18	24.0
			1	5	7	0	0	22.68	22.97	<b>23.37</b>	24.0
			3	0	0	0	0	22.63	22.74	22.91	24.0
			3	0	4	0	0	22.72	22.72	22.84	24.0
			3	3	7	0	0	22.63	22.74	<b>22.98</b>	24.0
			6	0	0	0-1	1	21.69	21.85	21.89	23.0
			6	0	4	0-1	1	21.78	21.79	21.82	23.0
			6	0	7	0-1	1	21.72	21.82	21.90	23.0
		16-QAM	1	0	0	0	0	22.76	22.88	22.98	24.0
			1	0	4	0	0	22.74	22.76	22.97	24.0
			1	5	7	0	0	22.68	22.80	22.93	24.0
			3	0	0	0	0	22.61	22.74	22.66	24.0
			3	0	4	0	0	22.55	22.83	22.86	24.0
			3	3	7	0	0	22.43	22.84	22.95	24.0
			5	0	0	0-1	1	21.75	21.73	21.77	23.0
5	0	4	0-1	1	21.96	21.71	21.89	23.0			
5	0	7	0-1	1	21.99	21.83	21.96	23.0			
FDD12	5	QPSK	1	0	0	0	0	22.72	23.02	22.89	24.0
			1	0	2	0	0	22.80	23.23	23.12	24.0
			1	5	3	0	0	22.79	23.19	23.35	24.0
			3	0	0	0-1	1	21.75	21.84	21.94	23.0
			3	0	2	0-1	1	21.96	21.91	21.87	23.0
			3	3	3	0-1	1	21.81	21.94	21.87	23.0
			6	0	0	0-1	1	21.73	21.76	21.70	23.0
			6	0	2	0-1	1	21.81	21.82	21.75	23.0
			6	0	3	0-1	1	21.79	21.81	21.82	23.0
		16-QAM	1	0	0	0	0	22.69	22.86	22.97	24.0
			1	0	2	0	0	22.79	22.83	23.06	24.0
			1	5	3	0	0	22.66	22.70	23.13	24.0
			3	0	0	0-1	1	21.47	21.56	21.80	23.0
			3	0	2	0-1	1	21.45	21.84	21.86	23.0
			3	3	3	0-1	1	21.42	21.77	21.91	23.0
			5	0	0	0-2	2	20.84	20.74	20.76	22.0
5	0	2	0-2	2	20.77	20.94	20.85	22.0			
5	0	3	0-2	2	20.76	20.92	20.94	22.0			

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD12											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	23025	23095	23165	Tune-up Power
								700.5 MHz	707.5 MHz	714.5 MHz	
FDD12	3	QPSK	1	0	0	0	0	23.02	23.28	23.18	24.0
			1	0	1	0	0	23.07	23.20	23.37	24.0
			1	5	1	0	0	23.06	23.19	23.21	24.0
			3	0	0	0-1	1	21.99	22.03	22.07	23.0
			3	0	1	0-1	1	22.02	22.06	22.09	23.0
			3	3	1	0-1	1	22.03	22.07	22.01	23.0
			6	0	0	0-2	2	20.84	20.90	20.80	22.0
		6	0	1	0-2	2	20.87	20.91	20.94	22.0	
		16-QAM	1	0	0	0-1	1	21.66	21.60	21.64	23.0
			1	0	1	0-1	1	21.70	21.64	21.67	23.0
			1	5	1	0-1	1	21.57	21.62	21.64	23.0
			3	0	0	0-2	2	20.64	20.69	20.51	22.0
			3	0	1	0-2	2	20.68	20.73	20.65	22.0
			3	3	1	0-2	2	20.68	20.63	20.65	22.0
5	0		0	0-2	2	20.71	20.77	20.78	22.0		
5	0	1	0-2	2	20.73	20.78	20.66	22.0			
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	23017	23095	23173	Tune-up Power
								699.7 MHz	707.5 MHz	715.3 MHz	
FDD12	1.4	QPSK	1	0	0	0	0	22.65	22.91	22.88	24.0
			1	3	0	0	0	22.76	23.14	23.07	24.0
			1	5	0	0	0	22.63	23.01	22.98	24.0
			3	0	0	0-1	1	21.75	21.90	22.11	23.0
			3	3	0	0-1	1	21.71	21.89	21.98	23.0
			6	0	0	0-2	2	20.70	21.02	20.94	22.0
		16-QAM	1	0	0	0-1	1	21.60	21.55	21.91	23.0
			1	3	0	0-1	1	22.10	21.65	21.85	23.0
			1	5	0	0-1	1	21.73	21.91	21.83	23.0
			3	0	0	0-2	2	20.98	20.67	20.41	22.0
			3	3	0	0-2	2	20.61	20.60	20.38	22.0
			5	0	0	0-2	2	20.73	20.60	20.83	22.0

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD26											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	26765	26865	26965	Tune-up Power
								821.5 MHz	831.5 MHz	841.5 MHz	
FDD26	15	QPSK	1	0	0	0	0	23.30	23.51	23.60	24.0
			1	0	6	0	0	23.21	23.63	<b>23.68</b>	24.0
			1	5	11	0	0	23.28	23.52	23.44	24.0
			3	0	0	0	0	23.27	23.22	23.29	24.0
			3	0	6	0	0	23.16	23.27	23.24	24.0
			3	3	11	0	0	23.23	23.30	<b>23.32</b>	24.0
			6	0	0	0	0	23.24	23.08	23.16	24.0
			6	0	6	0	0	23.11	23.13	23.20	24.0
		6	0	11	0	0	23.10	23.11	23.30	24.0	
		16-QAM	1	0	0	0	0	22.95	22.89	22.75	24.0
			1	0	6	0	0	22.88	22.87	22.57	24.0
			1	5	11	0	0	23.00	22.70	22.91	24.0
			3	0	0	0	0	22.87	22.84	22.64	24.0
			3	0	6	0	0	22.80	22.77	22.59	24.0
			3	3	11	0	0	22.69	22.78	22.92	24.0
			5	0	0	0	0	22.79	22.82	22.85	24.0
5	0		6	0	0	22.78	22.72	22.93	24.0		
5	0	11	0	0	22.66	22.74	22.92	24.0			
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	26740	26865	26990	Tune-up Power
								819 MHz	831.5 MHz	844 MHz	
FDD26	10	QPSK	1	0	0	0	0	23.46	23.15	23.61	24.0
			1	0	4	0	0	23.36	23.03	23.69	24.0
			1	5	7	0	0	23.31	23.06	23.72	24.0
			3	0	0	0	0	23.25	23.17	23.49	24.0
			3	0	4	0	0	23.32	23.18	23.38	24.0
			3	3	7	0	0	23.25	23.09	23.29	24.0
			6	0	0	0-1	1	22.24	22.31	22.30	23.0
			6	0	4	0-1	1	22.27	22.21	22.29	23.0
		6	0	7	0-1	1	22.24	22.15	22.22	23.0	
		16-QAM	1	0	0	0	0	23.16	23.29	23.17	24.0
			1	0	4	0	0	23.09	22.99	23.33	24.0
			1	5	7	0	0	23.05	23.02	23.32	24.0
			3	0	0	0	0	23.05	22.96	23.20	24.0
			3	0	4	0	0	23.09	22.88	23.17	24.0
			3	3	7	0	0	23.03	22.89	23.21	24.0
			5	0	0	0-1	1	22.40	22.01	22.17	23.0
5	0		4	0-1	1	22.43	22.04	22.30	23.0		
5	0	7	0-1	1	22.38	21.97	22.31	23.0			

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD26											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	26715	26865	27015	Tune-up Power
								816.5 MHz	831.5 MHz	846.5 MHz	
FDD26	5	QPSK	1	0	0	0	0	23.32	23.34	23.31	24.0
			1	0	2	0	0	23.45	23.32	23.26	24.0
			1	5	3	0	0	23.39	23.23	23.16	24.0
			3	0	0	0-1	1	22.29	22.23	22.24	23.0
			3	0	2	0-1	1	22.28	22.18	22.19	23.0
			3	3	3	0-1	1	22.24	22.11	22.11	23.0
			6	0	0	0-1	1	22.17	22.24	22.16	23.0
			6	0	2	0-1	1	22.26	22.22	22.24	23.0
		6	0	3	0-1	1	22.21	22.15	22.17	23.0	
		16-QAM	1	0	0	0	0	23.22	23.45	23.41	24.0
			1	0	2	0	0	23.13	23.51	23.45	24.0
			1	5	3	0	0	23.06	23.54	23.50	24.0
			3	0	0	0-1	1	21.96	22.69	22.60	23.0
			3	0	2	0-1	1	22.06	22.56	22.58	23.0
			3	3	3	0-1	1	22.01	22.59	22.51	23.0
			5	0	0	0-2	2	21.25	21.78	21.63	22.0
5	0		2	0-2	2	21.82	21.64	21.59	22.0		
5	0	3	0-2	2	21.80	21.60	21.55	22.0			
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	26705	26865	27025	Tune-up Power
								815.5 MHz	831.5 MHz	847.5 MHz	
FDD26	3	QPSK	1	0	0	0	0	23.67	23.67	23.65	24.0
			1	0	1	0	0	23.68	23.58	23.65	24.0
			1	5	1	0	0	23.77	23.54	23.61	24.0
			3	0	0	0-1	1	22.56	22.53	22.41	23.0
			3	0	1	0-1	1	22.53	22.50	22.32	23.0
			3	3	1	0-1	1	22.44	22.39	22.32	23.0
			6	0	0	0-2	2	21.20	21.26	21.24	22.0
			6	0	1	0-2	2	21.28	21.23	21.21	22.0
		16-QAM	1	0	0	0-1	1	22.07	22.19	22.24	23.0
			1	0	1	0-1	1	21.77	21.91	22.00	23.0
			1	5	1	0-1	1	22.02	21.86	21.87	23.0
			3	0	0	0-2	2	20.87	20.93	20.94	22.0
			3	0	1	0-2	2	20.99	20.92	20.91	22.0
			3	3	1	0-2	2	20.98	20.90	20.99	22.0
			5	0	0	0-2	2	21.15	21.08	20.93	22.0
			5	0	1	0-2	2	21.11	21.04	20.88	22.0

Notes	
1:	Conducted power is RMS average power
2:	The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

Source-based time-averaged conducted Output Power - Antenna: LTE - Band: FDD26											
Band	BW [MHz]	Mod	RB Allocation			MPR [dB]		Average Power [dBm]			
			RB#	RB Offset	NB Index	3GPP	Target	26697	26865	27033	Tune-up Power
								814.7 MHz	831.5 MHz	848.3 MHz	
FDD26	1.4	QPSK	1	0	0	0	0	23.13	23.58	23.52	24.0
			1	3	0	0	0	23.22	23.70	23.63	24.0
			1	5	0	0	0	23.09	23.51	23.60	24.0
			3	0	0	0-1	1	22.17	22.46	22.42	23.0
			3	3	0	0-1	1	22.21	22.47	22.38	23.0
			6	0	0	0-2	2	21.10	21.21	21.35	22.0
		16-QAM	1	0	0	0-1	1	22.12	21.88	21.96	23.0
			1	3	0	0-1	1	22.59	21.90	22.03	23.0
			1	5	0	0-1	1	22.50	21.83	21.93	23.0
			3	0	0	0-2	2	21.18	21.08	21.12	22.0
			3	3	0	0-2	2	21.19	21.10	21.11	22.0
			5	0	0	0-2	2	21.14	21.06	20.97	22.0

**Notes**

- 1: Conducted power is RMS average power
- 2: The actual conducted power must be within 2 dB of the specified maximum tune-up power taking into account the implemented MPR

## 7.2.3 Product specific SAR evaluation requirements

UMPC mini-tablet devices (1-g) SAR					
Antenna	Test Position	Antenna to DUT Surface Separation [mm]	DUT to User Separation [mm]	SAR Required	Note
LTE	Front	< 25	5	Yes	1
LTE	Back	< 25	5	Yes	1
LTE	Top	< 25	5	Yes	1
LTE	Bottom	> 25	5	No	1
LTE	Left	< 25	5	Yes	1
LTE	Right	< 25	5	Yes	1

Notes
1: UMPC mini-tablet devices must be tested for 1-g SAR on all surfaces and side edges with a transmitting antenna located at $\leq 25$ mm from that surface or edge, at 5 mm separation from a flat phantom; When 1-g SAR is tested at 5 mm, 10-g SAR is not required

7.2.4 General maximum output power based test exclusion per KDB 447498 D01

SAR Test Exclusion									
Mode	Operating Band	Frequency [MHz]	Position	Tune-up power [dBm]	Tune-up power [mW]	Test Distance [mm]	Threshold power [mW]	SAR Required	Note
Antenna: LTE									
SAR (1-g)	FDD2	1910	Front	22.5	178	5	11	Yes	1
SAR (1-g)	FDD2	1910	Back	22.5	178	5	11	Yes	1
SAR (1-g)	FDD2	1910	Top	22.5	178	5	11	Yes	1
SAR (1-g)	FDD2	1910	Left	22.5	178	5	11	Yes	1
SAR (1-g)	FDD2	1910	Right	22.5	178	5	11	Yes	1
SAR (1-g)	FDD4	1755	Front	23.0	200	5	11	Yes	1
SAR (1-g)	FDD4	1755	Back	23.0	200	5	11	Yes	1
SAR (1-g)	FDD4	1755	Top	23.0	200	5	11	Yes	1
SAR (1-g)	FDD4	1755	Left	23.0	200	5	11	Yes	1
SAR (1-g)	FDD4	1755	Right	23.0	200	5	11	Yes	1
SAR (1-g)	FDD5	849	Front	24.0	251	5	16	Yes	1
SAR (1-g)	FDD5	849	Back	24.0	251	5	16	Yes	1
SAR (1-g)	FDD5	849	Top	24.0	251	5	16	Yes	1
SAR (1-g)	FDD5	849	Left	24.0	251	5	16	Yes	1
SAR (1-g)	FDD5	849	Right	24.0	251	5	16	Yes	1
SAR (1-g)	FDD12	716	Front	24.0	251	5	18	Yes	1
SAR (1-g)	FDD12	716	Back	24.0	251	5	18	Yes	1
SAR (1-g)	FDD12	716	Top	24.0	251	5	18	Yes	1
SAR (1-g)	FDD12	716	Left	24.0	251	5	18	Yes	1
SAR (1-g)	FDD12	716	Right	24.0	251	5	18	Yes	1
SAR (1-g)	FDD26	849	Front	24.0	251	5	16	Yes	1
SAR (1-g)	FDD26	849	Back	24.0	251	5	16	Yes	1
SAR (1-g)	FDD26	849	Top	24.0	251	5	16	Yes	1
SAR (1-g)	FDD26	849	Left	24.0	251	5	16	Yes	1
SAR (1-g)	FDD26	849	Right	24.0	251	5	16	Yes	1

Notes
1: All surfaces and edges with a maximum power below the threshold power are excluded from SAR measurements; for all other surfaces or edges SAR measurements must be performed

## 7.2.5 General maximum output power based test exclusion per RSS-102

SAR Test Exclusion									
Mode	Operating Band	Frequency [MHz]	Position	Tune-up power [dBm]	Tune-up power [mW]	Test Distance [mm]	Threshold power [mW]	SAR Required	Note
Antenna: LTE									
SAR (1-g)	FDD2	1910	Front	22.5	177.83	5	6.9	Yes	1
SAR (1-g)	FDD2	1910	Back	22.5	177.83	5	6.9	Yes	1
SAR (1-g)	FDD2	1910	Top	22.5	177.83	5	6.9	Yes	1
SAR (1-g)	FDD2	1910	Left	22.5	177.83	5	6.9	Yes	1
SAR (1-g)	FDD2	1910	Right	22.5	177.83	5	6.9	Yes	1
SAR (1-g)	FDD4	1755	Front	24.3	269.15	5	8.4	Yes	1
SAR (1-g)	FDD4	1755	Back	24.3	269.15	5	8.4	Yes	1
SAR (1-g)	FDD4	1755	Top	24.3	269.15	5	8.4	Yes	1
SAR (1-g)	FDD4	1755	Left	24.3	269.15	5	8.4	Yes	1
SAR (1-g)	FDD4	1755	Right	24.3	269.15	5	8.4	Yes	1
SAR (1-g)	FDD5	849	Front	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD5	849	Back	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD5	849	Top	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD5	849	Left	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD5	849	Right	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD12	716	Front	26.9	489.78	5	27.8	Yes	1
SAR (1-g)	FDD12	716	Back	26.9	489.78	5	27.8	Yes	1
SAR (1-g)	FDD12	716	Top	26.9	489.78	5	27.8	Yes	1
SAR (1-g)	FDD12	716	Left	26.9	489.78	5	27.8	Yes	1
SAR (1-g)	FDD12	716	Right	26.9	489.78	5	27.8	Yes	1
SAR (1-g)	FDD26	849	Front	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD26	849	Back	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD26	849	Top	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD26	849	Left	24.0	251.19	5	16.9	Yes	1
SAR (1-g)	FDD26	849	Right	24.0	251.19	5	16.9	Yes	1

**Notes**

- 1: All surfaces and edges with a maximum power below the threshold power are excluded from SAR measurements; for all other surfaces or edges SAR measurements must be performed



## 7.2.6 Tissue simulating liquid validations

Tissue Validation								
Date	Tissue	Frequency [MHz]	Liquid Parameter	Measured	Target	Delta [%]	Limit [%]	Note
2019-12-18	MSL-1900	1860	Relative Permittivity ( $\epsilon_r$ )	53.639	53.300	0.64	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.509	1.520	-0.72	$\pm 5$	1
2019-12-18	MSL-1900	1880	Relative Permittivity ( $\epsilon_r$ )	53.632	53.300	0.62	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.547	1.520	1.78	$\pm 5$	1
2019-12-18	MSL-1900	1900	Relative Permittivity ( $\epsilon_r$ )	53.583	53.300	0.53	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.579	1.520	3.88	$\pm 5$	1
2019-12-20	MSL-1900	1860	Relative Permittivity ( $\epsilon_r$ )	53.644	53.300	0.65	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.494	1.520	-1.71	$\pm 5$	1
2019-12-20	MSL-1900	1880	Relative Permittivity ( $\epsilon_r$ )	53.567	53.300	0.50	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.517	1.520	-0.20	$\pm 5$	1
2019-12-20	MSL-1900	1900	Relative Permittivity ( $\epsilon_r$ )	53.524	53.300	0.42	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.552	1.520	2.11	$\pm 5$	1
2020-01-02	MSL-1900	1860	Relative Permittivity ( $\epsilon_r$ )	53.784	53.300	0.91	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.511	1.520	-0.59	$\pm 5$	1
2020-01-02	MSL-1900	1880	Relative Permittivity ( $\epsilon_r$ )	53.704	53.300	0.76	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.538	1.520	1.18	$\pm 5$	1
2020-01-02	MSL-1900	1900	Relative Permittivity ( $\epsilon_r$ )	53.726	53.300	0.80	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.555	1.520	2.30	$\pm 5$	1
2020-01-08	MSL-1900	1860	Relative Permittivity ( $\epsilon_r$ )	52.579	53.300	-1.35	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.511	1.520	-0.59	$\pm 5$	1
2020-01-08	MSL-1900	1880	Relative Permittivity ( $\epsilon_r$ )	52.462	53.300	-1.57	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.539	1.520	1.25	$\pm 5$	1
2020-01-08	MSL-1900	1900	Relative Permittivity ( $\epsilon_r$ )	52.393	53.300	-1.70	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.562	1.520	2.76	$\pm 5$	1
2020-05-12	MSL-1900	1860	Relative Permittivity ( $\epsilon_r$ )	53.287	53.300	-0.02	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.476	1.520	-2.89	$\pm 5$	1
2020-05-12	MSL-1900	1880	Relative Permittivity ( $\epsilon_r$ )	53.208	53.300	-0.17	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.504	1.520	-1.05	$\pm 5$	1
2020-05-12	MSL-1900	1900	Relative Permittivity ( $\epsilon_r$ )	53.113	53.300	-0.35	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.539	1.520	1.25	$\pm 5$	1
2020-01-08	MSL-1800	1720	Relative Permittivity ( $\epsilon_r$ )	53.967	53.511	0.85	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.493	1.469	1.60	$\pm 5$	1
2020-01-08	MSL-1800	1732.5	Relative Permittivity ( $\epsilon_r$ )	53.901	53.478	0.79	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.502	1.477	1.67	$\pm 5$	1
2020-01-08	MSL-1800	1745	Relative Permittivity ( $\epsilon_r$ )	53.825	53.445	0.71	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.513	1.485	1.87	$\pm 5$	1
2020-01-08	MSL-1800	1750	Relative Permittivity ( $\epsilon_r$ )	53.846	53.432	0.78	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.518	1.488	1.99	$\pm 5$	1
2020-01-09	MSL-1800	1720	Relative Permittivity ( $\epsilon_r$ )	53.104	53.511	-0.76	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.466	1.469	-0.24	$\pm 5$	1
2020-01-09	MSL-1800	1732.5	Relative Permittivity ( $\epsilon_r$ )	53.083	53.478	-0.74	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.483	1.477	0.38	$\pm 5$	1
2020-01-09	MSL-1800	1745	Relative Permittivity ( $\epsilon_r$ )	53.041	53.445	-0.76	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.496	1.485	0.72	$\pm 5$	1
2020-01-09	MSL-1800	1750	Relative Permittivity ( $\epsilon_r$ )	52.965	53.432	-0.87	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.496	1.488	0.51	$\pm 5$	1

2020-01-10	MSL-1800	1720	Relative Permittivity ( $\epsilon_r$ )	53.287	53.511	-0.42	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.472	1.469	0.17	$\pm 5$	1
2020-01-10	MSL-1800	1732.5	Relative Permittivity ( $\epsilon_r$ )	53.238	53.478	-0.45	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.476	1.477	-0.09	$\pm 5$	1
2020-01-10	MSL-1800	1745	Relative Permittivity ( $\epsilon_r$ )	53.191	53.445	-0.47	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.491	1.485	0.39	$\pm 5$	1
2020-01-10	MSL-1800	1750	Relative Permittivity ( $\epsilon_r$ )	53.194	53.432	-0.44	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.493	1.488	0.31	$\pm 5$	1
2020-01-13	MSL-1800	1720	Relative Permittivity ( $\epsilon_r$ )	53.252	53.511	-0.48	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.461	1.469	-0.58	$\pm 5$	1
2020-01-13	MSL-1800	1732.5	Relative Permittivity ( $\epsilon_r$ )	53.19	53.478	-0.54	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.47	1.477	-0.50	$\pm 5$	1
2020-01-13	MSL-1800	1745	Relative Permittivity ( $\epsilon_r$ )	53.187	53.445	-0.48	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.482	1.485	-0.22	$\pm 5$	1
2020-01-13	MSL-1800	1750	Relative Permittivity ( $\epsilon_r$ )	53.06	53.432	-0.70	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.487	1.488	-0.10	$\pm 5$	1
2020-05-11	MSL-1800	1750	Relative Permittivity ( $\epsilon_r$ )	52.443	53.511	-1.99	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.483	1.469	0.92	$\pm 5$	1
2020-05-11	MSL-1800	1720	Relative Permittivity ( $\epsilon_r$ )	52.375	53.478	-2.06	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.497	1.477	1.33	$\pm 5$	1
2020-05-11	MSL-1800	1732.5	Relative Permittivity ( $\epsilon_r$ )	52.392	53.445	-1.97	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.513	1.485	1.87	$\pm 5$	1
2020-05-11	MSL-1800	1745	Relative Permittivity ( $\epsilon_r$ )	52.311	53.432	-2.10	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.51	1.488	1.45	$\pm 5$	1
2020-05-11	MSL-1800	1750	Relative Permittivity ( $\epsilon_r$ )	52.931	53.511	-1.08	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.505	1.469	2.42	$\pm 5$	1
2020-05-11	MSL-1800	1720	Relative Permittivity ( $\epsilon_r$ )	52.957	53.478	-0.97	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.512	1.477	2.34	$\pm 5$	1
2020-05-11	MSL-1800	1732.5	Relative Permittivity ( $\epsilon_r$ )	52.859	53.445	-1.10	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.519	1.485	2.27	$\pm 5$	1
2020-05-11	MSL-1800	1745	Relative Permittivity ( $\epsilon_r$ )	52.839	53.432	-1.11	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.529	1.488	2.73	$\pm 5$	1
2020-05-06	MSL-900	821.5	Relative Permittivity ( $\epsilon_r$ )	53.49	55.253	-3.19	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.946	0.969	-2.37	$\pm 5$	1
2020-05-06	MSL-900	831.5	Relative Permittivity ( $\epsilon_r$ )	53.373	55.214	-3.33	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.957	0.970	-1.31	$\pm 5$	1
2020-05-06	MSL-900	841.5	Relative Permittivity ( $\epsilon_r$ )	53.307	55.180	-3.39	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.967	0.978	-1.12	$\pm 5$	1
2020-05-06	MSL-900	900	Relative Permittivity ( $\epsilon_r$ )	52.79	55.000	-4.02	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.029	1.050	-2.00	$\pm 5$	1
2020-05-08	MSL-900	821.5	Relative Permittivity ( $\epsilon_r$ )	54.117	55.336	-2.20	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.937	0.967	-3.13	$\pm 5$	1
2020-05-08	MSL-900	831.5	Relative Permittivity ( $\epsilon_r$ )	53.891	55.253	-2.46	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.96	0.969	-0.92	$\pm 5$	1
2020-05-08	MSL-900	841.5	Relative Permittivity ( $\epsilon_r$ )	53.804	55.214	-2.55	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.969	0.970	-0.07	$\pm 5$	1

2020-05-11	MSL-900	900	Relative Permittivity ( $\epsilon_r$ )	53.62	55.180	-2.83	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.979	0.978	0.10	$\pm 5$	1
2020-05-11	MSL-900	821.5	Relative Permittivity ( $\epsilon_r$ )	53.931	55.253	-2.39	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.931	0.969	-3.92	$\pm 5$	1
2020-05-11	MSL-900	831.5	Relative Permittivity ( $\epsilon_r$ )	53.876	55.214	-2.42	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.937	0.970	-3.37	$\pm 5$	1
2020-05-11	MSL-900	841.5	Relative Permittivity ( $\epsilon_r$ )	53.735	55.180	-2.62	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.948	0.978	-3.07	$\pm 5$	1
2020-05-11	MSL-900	900	Relative Permittivity ( $\epsilon_r$ )	53.262	55.000	-3.16	$\pm 5$	1
			Conductivity ( $\sigma$ )	1.009	1.050	-3.90	$\pm 5$	1
2020-05-04	MSL-750	704	Relative Permittivity ( $\epsilon_r$ )	55.12	55.710	-1.06	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.917	0.960	-4.46	$\pm 5$	1
2020-05-04	MSL-750	707.5	Relative Permittivity ( $\epsilon_r$ )	54.992	55.697	-1.27	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.92	0.960	-4.17	$\pm 5$	1
2020-05-04	MSL-750	711	Relative Permittivity ( $\epsilon_r$ )	54.955	55.683	-1.31	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.924	0.960	-3.78	$\pm 5$	1
2020-05-04	MSL-750	750	Relative Permittivity ( $\epsilon_r$ )	54.546	55.531	-1.77	$\pm 5$	1
			Conductivity ( $\sigma$ )	0.961	0.963	-0.25	$\pm 5$	1

**Notes**

- 1: Per KDB 865664 D01 the measured  $\epsilon_r$  and  $\sigma$  of the tissue-equivalent medium used during probe calibration must be within 5% of the target parameters

## 7.2.7 System validations

System Validation											
Date	Dipole	Tissue	SAR	Frequency [MHz]	Power [mW]	Measured SAR [W/kg]	Normalized 1W SAR [W/kg]	Target 1W SAR [W/kg]	Delta [%]	Limit [%]	Plot
2019-12-18	D1900V2	MSL-1900	1-g	1900	250	10.80	43.20	40.00	7.4	± 10	1
2019-12-20	D1900V2	MSL-1900	1-g	1900	250	10.50	42.00	40.00	4.8	± 10	
2020-01-02	D1900V2	MSL-1900	1-g	1900	250	10.70	42.80	40.00	6.5	± 10	
2020-01-06	D1900V2	MSL-1900	1-g	1900	250	10.80	43.20	40.00	7.4	± 10	
2020-05-12	D1900V2	MSL-1900	1-g	1900	250	10.6	42.40	40.00	5.7	± 10	
2020-01-08	D1750V2	MSL-1800	1-g	1750	250	9.84	39.36	36.60	7.0	± 10	
2020-01-09	D1750V2	MSL-1800	1-g	1750	250	9.53	38.12	36.60	4.0	± 10	
2020-01-10	D1750V2	MSL-1800	1-g	1750	250	9.43	37.72	36.60	3.1	± 10	
2020-01-13	D1750V2	MSL-1800	1-g	1750	250	9.53	38.12	36.60	4.0	± 10	
2020-05-11	D1750V2	MSL-1800	1-g	1750	250	9.61	38.44	36.40	5.3	± 10	
2020-05-13	D1750V2	MSL-1800	1-g	1750	250	9.87	39.48	36.40	7.8	± 10	2
2020-05-06	D900V2	MSL-900	1-g	900	250	2.67	10.68	11.10	-3.9	± 10	
2020-05-08	D900V2	MSL-900	1-g	900	250	2.73	10.92	11.10	-1.6	± 10	
2020-05-11	D900V2	MSL-900	1-g	900	250	2.62	10.48	11.10	-5.9	± 10	3
2020-05-04	D750V3	MSL-750	1-g	750	250	2.19	8.76	8.52	2.7	± 10	4

## Notes

- 1: Per KDB 865664 D01 the 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target
- 2: Per KDB 865664 D02 section 2.3 j) only the SAR system verification plots, with the largest deviation from the dipole or qualified source SAR target are to be reported for each dipole or qualified source

## 7.2.8 SAR measurements

SAR Measurements - Band: FDD2 - Bandwidth: 20 MHz														
Date	Configuration			Position	Dist. [mm]	Power				SAR		Plot	Note	
	Ant.	Mode	Exposure Config.			Ch.	Freq. [MHz]	Meas. Power [dBm]	Tune-up Power [dBm]	Power Drift [dB]	Meas. SAR [W/kg]			Scaled SAR [W/kg]
2019-12-20	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Back	3	18900	1880	21.98	22.5	-0.15	0.683	0.770		1,2
2020-01-02	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Front	3	18900	1880	21.98	22.5	-0.09	0.644	0.726		1,2
2019-12-18	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Right	0	18900	1880	21.98	22.5	-0.01	0.704	0.794		1,2
2019-12-19	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Left	0	18900	1880	21.98	22.5	0.04	0.199	0.224		1,2
2019-12-19	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Top	0	18900	1880	21.98	22.5	-0.04	0.124	0.140		1,2
2019-12-20	LTE	QPSK 50% RB RB 3 0 0	Body (1-g)	Back	3	18900	1880	21.54	22.5	-0.03	0.724	0.903		6,8
2020-01-02	LTE	QPSK 50% RB RB 3 0 0	Body (1-g)	Front	3	18900	1880	21.54	22.5	-0.06	0.677	0.844		6,8
2019-12-19	LTE	QPSK 50% RB RB 3 0 0	Body (1-g)	Right	0	18900	1880	21.54	22.5	0.05	0.712	0.888		6,8
2019-12-19	LTE	QPSK 50% RB RB 3 0 0	Body (1-g)	Left	0	18900	1880	21.54	22.5	0.06	0.225	0.281		6,7
2019-12-19	LTE	QPSK 50% RB RB 3 0 0	Body (1-g)	Top	0	18900	1880	21.54	22.5	-0.19	0.119	0.148		6,7
2020-05-12	LTE	OPSK 50% RB RB 3 0 0	Body (1-g)	Back	3	18700	1860	21.39	22.5	-0.15	0.732	<b>0.926</b>	1	8
2020-05-12	LTE	OPSK 50% RB RB 3 0 0	Body (1-g)	Front	3	18700	1860	21.39	22.5	0.07	0.631	0.815		8
2020-05-12	LTE	OPSK 50% RB RB 3 0 0	Body (1-g)	Right	0	18700	1860	21.39	22.5	-0.03	0.555	0.717		8
2020-05-12	LTE	OPSK 50% RB RB 3 3 15	Body (1-g)	Back	3	19100	1900	21.38	22.5	0.04	0.661	0.855		8
2020-05-12	LTE	OPSK 50% RB RB 3 3 15	Body (1-g)	Front	3	19100	1900	21.38	22.5	-0.03	0.539	0.698		8
2020-05-12	LTE	OPSK 50% RB RB 3 3 15	Body (1-g)	Right	0	19100	1900	21.38	22.5	0.07	0.489	0.633		8
2020-05-13	LTE	OPSK 100% RB RB 6 0 0	Body (1-g)	Back	3	18900	1880	21.40	22.5	-0.03	0.626	0.806		13
2020-05-13	LTE	OPSK 100% RB RB 6 0 0	Body (1-g)	Front	3	18900	1880	21.40	22.5	-0.03	0.595	0.767		13
2020-05-13	LTE	OPSK 100% RB RB 6 0 0	Body (1-g)	Right	0	18900	1880	21.40	22.5	0.05	0.570	0.734		13

SAR Measurements - Band: FDD4 - Bandwidth: 20 MHz														
Date	Configuration			Position	Dist. [mm]	Power				SAR		Plot	Note	
	Ant.	Mode	Exposure Config.			Ch.	Freq. [MHz]	Meas. Power [dBm]	Tune-up Power [dBm]	Power Drift [dB]	Meas. SAR [W/kg]			Scale d SAR [W/kg]
2020-01-09	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Back	3	20300	1745	22.10	23.0	-0.20	0.853	1.049		1,3
2020-01-09	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Front	3	20300	1745	22.10	23.0	0.07	0.826	1.016		1,3
2020-01-08	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Right	0	20300	1745	22.10	23.0	-0.08	1.07	1.316		1,3
2020-01-08	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Left	0	20300	1745	22.10	23.0	0.06	0.213	0.262		1,2
2020-01-08	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Top	0	20300	1745	22.10	23.0	0.14	0.165	0.203		1,2
2020-01-09	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Back	3	20175	1732.5	21.86	23.0	-0.07	0.843	1.096		3, 4
2020-01-09	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Front	3	20175	1732.5	21.86	23.0	0.00	0.901	1.171		3, 4
2020-01-10	LTE	QPSK 1 RB RB 1 5 15	Body (1-g)	Right	0	20175	1732.5	21.86	23.0	0.20	1.02	1.326		3, 4
2020-01-10	LTE	QPSK 1 RB RB 1 0 0	Body (1-g)	Back	3	20050	1720	21.72	23.0	-0.06	0.869	1.167		3, 4
2020-01-10	LTE	QPSK 1 RB RB 1 0 0	Body (1-g)	Front	3	20050	1720	21.72	23.0	0.00	0.949	1.274		3, 4
2020-01-10	LTE	QPSK 1 RB RB 1 0 0	Body (1-g)	Right	0	20050	1720	21.72	23.0	0.14	1.05	1.410		3, 4
2020-01-09	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Back	3	20175	1732.5	21.76	23.0	-0.18	1.01	1.356		6,8
2020-01-09	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Front	3	20175	1732.5	21.76	23.0	0.13	0.919	1.223		6,8
2020-01-10	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Right	0	20175	1732.5	21.76	23.0	0.11	1.01	1.344		6,8
2020-01-09	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Left	0	20175	1732.5	21.76	23.0	0.07	0.124	0.165		6,7
2020-01-10	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Top	0	20175	1732.5	21.76	23.0	0.04	0.112	0.149		6,7
2020-01-10	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Back	3	20050	1720	21.55	23.0	-0.04	0.919	1.283		8, 9
2020-01-10	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Front	3	20050	1720	21.55	23.0	-0.18	0.887	1.239		8, 9
2020-01-10	LTE	QPSK 50% RB RB 3 3 15	Body (1-g)	Right	0	20050	1720	21.55	23.0	0.06	1.03	<u>1.438</u>	2	8, 9
2020-01-13	LTE	QPSK 50% RB RB 3 0 8	Body (1-g)	Back	3	20300	1745	21.64	23.0	-0.11	0.906	1.239		8, 9
2020-01-13	LTE	QPSK 50% RB RB 3 0 8	Body (1-g)	Front	3	20300	1745	21.64	23.0	-0.05	0.808	1.105		8, 9
2020-01-13	LTE	QPSK 50% RB RB 3 0 8	Body (1-g)	Right	0	20300	1745	21.64	23.0	0.12	0.932	1.275		8, 9

2020-01-13	LTE	QPSK 100% RB RB 6 0 15	Body (1-g)	Back	3	20175	1732.5	21.73	23.0	-0.14	0.926	1.241		13
2020-01-13	LTE	QPSK 100% RB RB 6 0 15	Body (1-g)	Front	3	20175	1732.5	21.73	23.0	-0.12	0.832	1.115		13
2020-01-13	LTE	QPSK 100% RB RB 6 0 15	Body (1-g)	Right	0	20175	1732.5	21.73	23.0	0.02	1.07	1.433		13

SAR Measurements - Band: FDD12 - Bandwidth: 10 MHz														
Date	Configuration			Position	Dist. [mm]	Power				SAR		Plot	Note	
	Ant.	Mode	Exposure Config.			Ch.	Freq. [MHz]	Meas. Power [dBm]	Tune-up Power [dBm]	Power Drift [dB]	Meas. SAR [W/kg]			Scaled SAR [W/kg]
2020-05-05	LTE	QPSK 1 RB RB 1 5 7	Body (1-g)	Back	3	23130	711.0	23.37	24.0	0.15	0.356	0.412		1,2
2020-05-05	LTE	QPSK 1 RB RB 1 5 7	Body (1-g)	Front	3	23130	711.0	23.37	24.0	-0.12	0.420	0.486		1,2
2020-05-05	LTE	QPSK 1 RB RB 1 5 7	Body (1-g)	Right	0	23130	711.0	23.37	24.0	0.11	0.452	0.523		1,2
2020-05-05	LTE	QPSK 1 RB RB 1 5 7	Body (1-g)	Left	0	23130	711.0	23.37	24.0	0.19	0.240	0.277		1,2
2020-05-05	LTE	QPSK 1 RB RB 1 5 7	Body (1-g)	Top	0	23130	711.0	23.37	24.0	0.13	0.099	0.114		1,2
2020-05-05	LTE	QPSK 50% RB RB 3 3 7	Body (1-g)	Back	3	23130	711.0	22.98	24.0	-0.02	0.339	0.429		6,7
2020-05-05	LTE	QPSK 50% RB RB 3 3 7	Body (1-g)	Front	3	23130	711.0	22.98	24.0	-0.17	0.399	0.505		6,7
2020-05-05	LTE	QPSK 50% RB RB 3 3 7	Body (1-g)	Right	0	23130	711.0	22.98	24.0	-0.05	0.432	<b>0.546</b>	3	6,7
2020-05-05	LTE	QPSK 50% RB RB 3 3 7	Body (1-g)	Left	0	23130	711.0	22.98	24.0	0.09	0.231	0.292		6,7
2020-05-05	LTE	QPSK 50% RB RB 3 3 7	Body (1-g)	Top	0	23130	711.0	22.98	24.0	0.06	0.100	0.126		6,7

SAR Measurements - Band: FDD26 - Bandwidth: 15 MHz													
Date	Configuration			Position	Dist. [mm]	Power				SAR		Plot	Note
	Ant.	Mode	Exposure Config.			Ch.	Freq. [MHz]	Meas. Power [dBm]	Tune-up Power [dBm]	Power Drift [dB]	Meas. SAR [W/kg]		
2020-05-08	LTE	QPSK 1 RB RB 1 0 6	Body (1-g)	Back	3	26965	841.5	23.68	24.0	0.03	0.288	0.310	1,2
2020-05-06	LTE	QPSK 1 RB RB 1 0 6	Body (1-g)	Front	3	26965	841.5	23.68	24.0	-0.08	0.390	0.420	1,2
2020-05-08	LTE	QPSK 1 RB RB 1 0 6	Body (1-g)	Right	0	26965	841.5	23.68	24.0	-0.04	0.376	0.405	1,2
2020-05-11	LTE	QPSK 1 RB RB 1 0 6	Body (1-g)	Left	0	26965	841.5	23.68	24.0	0.02	0.214	0.230	1,2
2020-05-11	LTE	QPSK 1 RB RB 1 0 6	Body (1-g)	Top	0	26965	841.5	23.68	24.0	0.01	0.085	0.091	1,2
2020-05-11	LTE	QPSK 1 RB RB 3 3 11	Body (1-g)	Back	3	26965	841.5	23.32	24.0	-0.01	0.318	0.372	6,7
2020-05-11	LTE	QPSK 1 RB RB 3 3 11	Body (1-g)	Front	3	26965	841.5	23.32	24.0	0.05	0.347	0.406	6,7
2020-05-08	LTE	QPSK 1 RB RB 3 3 11	Body (1-g)	Right	0	26965	841.5	23.32	24.0	-0.02	0.390	<u>0.456</u>	4 6,7
2020-05-08	LTE	QPSK 1 RB RB 3 3 11	Body (1-g)	Left	0	26965	841.5	23.32	24.0	-0.19	0.199	0.233	6,7
2020-05-11	LTE	QPSK 1 RB RB 3 3 11	Body (1-g)	Top	0	26965	841.5	23.32	24.0	-0.08	0.085	0.099	6,7

Notes
A: According to use case conditions from the manufacturer and the corresponding user manual, the test distances for front and back faces are reduced from 5 mm to 3 mm and for the top, left and right faces were reduced to 0 mm
B: Measured SAR values are scaled to the maximum tune-up power specified for transmission mode
C: The power drift must be $\leq \pm 5 \%$ or $\leq \pm 0.2 \text{ dB}$
D: Per KDB 865664 D02 section 2.3 h) SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination. Plots are also required when the measured SAR is $> 1.5 \text{ W/kg}$ , or $> 7.0 \text{ W/kg}$ for occupational exposure

LTE Test Selection and Reduction Notes
1: Initial test channel for bandwidth under evaluation 1 RB configuration with highest output power
2: Reported SAR of initial 1 RB test channel $\leq 0.8 \text{ W/kg}$ , testing of the remaining RB offset configurations and test channels is not required for 1 RB allocation
3: Reported SAR of initial 1 RB test channel $> 0.8 \text{ W/kg}$ , SAR has to be measured for the remaining required 1 RB test channels and only for the RB offset configuration with the highest output power for that channel
4: Reported SAR of all required 1 RB test channels for the modulation under consideration $\leq 1.45 \text{ W/kg}$ , SAR has not to be measured for all three 1 RB offset configurations for that test channel and modulation
5: Reported SAR of required 1 RB test channel $> 1.45 \text{ W/kg}$ , SAR has to be measured for all three 1 RB offset configurations for that test channel and modulation
6: Initial test channel for bandwidth under evaluation 50 % RB configuration with highest output power
7: Reported SAR of initial 50 % RB test channel $\leq 0.8 \text{ W/kg}$ , testing of the remaining RB offset configurations and test channels is not required for 50 % RB allocation
8: Reported SAR of initial 50 % RB test channel $> 0.8 \text{ W/kg}$ , SAR has to be measured for the remaining 50 % RB test channels and only for the RB offset configuration with the highest output power for that channel
9: Reported SAR of all required 50 % RB test channels for the modulation under consideration $\leq 1.45 \text{ W/kg}$ , SAR has not to be measured for all three 50 % RB offset configurations for that test channel and modulation
10: Reported SAR of required 50 % RB test channel $> 1.45 \text{ W/kg}$ , SAR has to be measured for all three 50 % RB offset configurations for that test channel and modulation
11: SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50 % and 1 RB allocations at the same modulation, and the highest reported SAR for 1 RB and 50 % RB allocation are $\leq 0.8 \text{ W/kg}$ for the modulation under consideration
12: SAR testing for the highest output power channel with 100 % RB allocation is required because highest maximum output power for 100 % RB allocation is higher than the highest maximum output power in 50 % and 1 RB allocations for the same modulation
13: SAR testing for the highest output power channel with 100 % RB allocation is required because the highest reported SAR of any 50 % or 1 RB configuration for the same modulation is $> 0.8 \text{ W/kg}$



14:	SAR testing for remaining required channels with 100 % RB allocation is not required because reported SAR for highest output power channel with 100 % RB allocation is $\leq 1.45$ W/kg
15:	SAR testing for remaining required channels with 100 % RB allocation is required because reported SAR for highest output power channel with 100 % RB allocation is $> 1.45$ W/kg
16:	SAR testing for the higher order modulations is not required because the highest output power for higher order configuration is not $> 1/2$ dB higher than the same configuration in QPSK and the reported SAR of a QPSK configuration is $\leq 1.45$ W/kg
17:	SAR testing for required test channel according to notes 1 to 15 of higher order modulation is required because the highest output power for higher order configuration is $> 1/2$ dB higher than the same configuration in QPSK
18:	SAR testing for required test channel according to notes 1 to 15 of higher order modulation is required because the reported SAR of a QPSK configuration is $> 1.45$ W/kg
19:	SAR testing for other channel bandwidth is not required because the highest maximum output power of a configuration requiring testing according to notes 1 to 18 in the smaller channel bandwidth is not $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration and the reported SAR of a configuration for the largest channel bandwidth is $\leq 1.45$ W/kg
20:	SAR testing for required test channel according to notes 1 to 18 of other channel bandwidth is required because the highest maximum output power of the configuration requiring testing in the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration
21:	SAR testing for required test channel according to notes 1 to 18 of other channel bandwidth is required because the reported SAR of a configuration for the largest channel bandwidth is $> 1.45$ W/kg

## 7.2.9 SAR repeatability

SAR Repeatability												
Date	Ant.	Exposure Configuration	Position	Mode	Dist. [mm]	Ch.	Frequency [MHz]	SAR [W/kg]		Largest to smallest Ratio	Plot	Note
								Original	Repeated			
2020-05-13	LTE	Body (1-g)	Right	FDD4 QPSK 50% RB RB 3 3 15	0	20050	1720	1.030	1.010	1.020	5	2

Notes
1: Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2: When the original highest measured SAR is $\geq 0.80$ W/kg, repeat that measurement once
3: Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45$ W/kg
4: Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5$ W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20

## 7.2.10 DUT Holder Perturbations

DUT Holder Perturbations														
Date	Configuration			Position	Dist. [mm]	Channel		SAR					Plot	Note
	Ant.	Mode	Exposure Config.			Ch.	Freq. [MHz]	Original Reported [W/kg]	Original with holder [W/kg]	Repeated without holder [W/kg]	SAR Tolerance [%]	Corr. Reported SAR [W/kg]		
2020-05-13	LTE	Body (1-g)	Right	FDD4 QPSK 50% RB RB 3 3 15	0	20050	1720	1.438	1.030	1.070	-3.783	1.492	6	1,2

Notes
1: When the highest reported SAR of an antenna is > 1.2 W/kg (1-g) or 3.0 (10-g), holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands
2: If the SAR tolerance is negative which means that the SAR value without DUT holder is larger than the SAR value with DUT holder, the reported SAR value is corrected by the SAR tolerance in order to take the decrease in SAR value because of the DUT holder into account
3: a KDB inquiry is required if the highest reported SAR for each antenna, adjusted for increases in holder perturbation, would introduce noncompliance conditions or noticeably high differences due to perturbation

## 8 SAR Evaluation for Multi-Transmitter Operation


### 8.1 Concurrent radio operational modes

Chipset/Module 1	Chipset/Module 2
ULP-AMI	LTE Cat-M1

### 8.2 Sum of SAR evaluation

SAR Value estimation			
Mode	Maximum power [dBm]	Test volume [g]	SAR-Value [W/kg]
ULP-AMI	-17.9	1	0.00028

Multi-band transmission SAR assessment results				
Position	Transmitter operating modes		$\Sigma$ SAR [W/kg (1-g)]	SAR Limit [W/kg (1-g)]
	LTE Cat-M1	ULP-AMI-P		
Flat-Right - 0 mm	1.438	0.00028	1.43828	1.6
<b>Overall maximum <math>\Sigma</math> SAR [W/kg (1-g)]</b>			<b>1.43828</b>	<b>1.6</b>

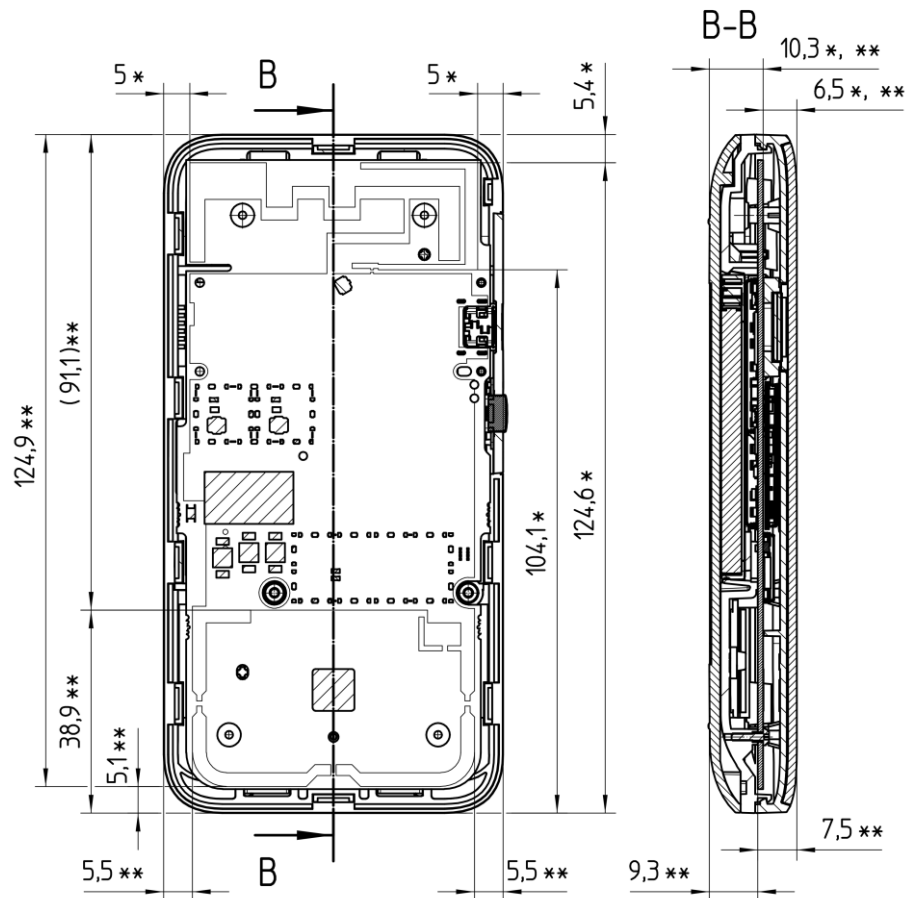**ANNEX A Antenna Dimensions and Separation Distances**


- \* LTE Antenna (top layer)
- \*\* MICS Antenna (top and bottom layer)

**ANNEX D SAR Results**

Test Laboratory: Eurofins Product Service GmbH

## LTE-FDD2 Cat-M1 CH18700 QPSK BW 20 RB 3 ROffset 0 NBI 0 - Flat Back 3 mm

**DUT: CardioMessenger Smart 4G; Type: Handset; Serial: 80216063**

Communication System: UID 0, LTE FDD 2 Cat-M1 (0); Frequency: 1860 MHz; Duty Cycle: 1:3.33043  
Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.477$  S/m;  $\epsilon_r = 53.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3893; ConvF(8.32, 8.32, 8.32) @ 1860 MHz; Calibrated: 20.09.2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2019
- Phantom: ELI v4.0; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (2);

### Configuration/CardioMessenger Smart 4G/Area Scan (11x17x1):

Measurement grid:  $dx=10$ mm,  $dy=10$ mm  
Maximum value of SAR (measured) = 0.704 W/kg

### Configuration/CardioMessenger Smart 4G/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 19.49 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 1.18 W/kg  
**SAR(1 g) = 0.732 W/kg**  
Maximum value of SAR (measured) = 0.793 W/kg

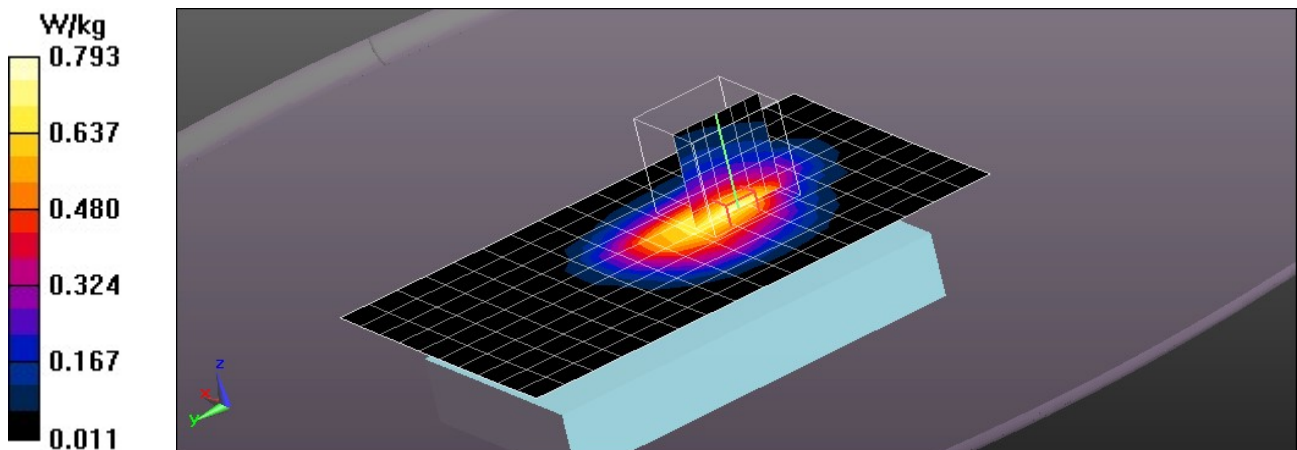

Test Laboratory: Eurofins Product Service GmbH

## LTE-FDD4 Cat-M1 CH20050 QPSK BW 20 RB 3 ROffset 3 NBI 15 - Flat Right 0 mm

DUT: CardioMessenger Smart 4G; Type: Handset; Serial: 80216063

Communication System: UID 0, LTE FDD 4 Cat-M1 (0); Frequency: 1720 MHz; Duty Cycle: 1:3.33043  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 53.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3893; ConvF(8.61, 8.61, 8.61) @ 1720 MHz; Calibrated: 20.09.2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2019
- Phantom: ELI v4.0; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (2);

### Configuration 2/CardioMessenger Smart 4G/Area Scan (7x17x1):

Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.13 W/kg

### Configuration 2/CardioMessenger Smart 4G/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 27.02 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 1.74 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.579 W/kg**  
Maximum value of SAR (measured) = 1.15 W/kg

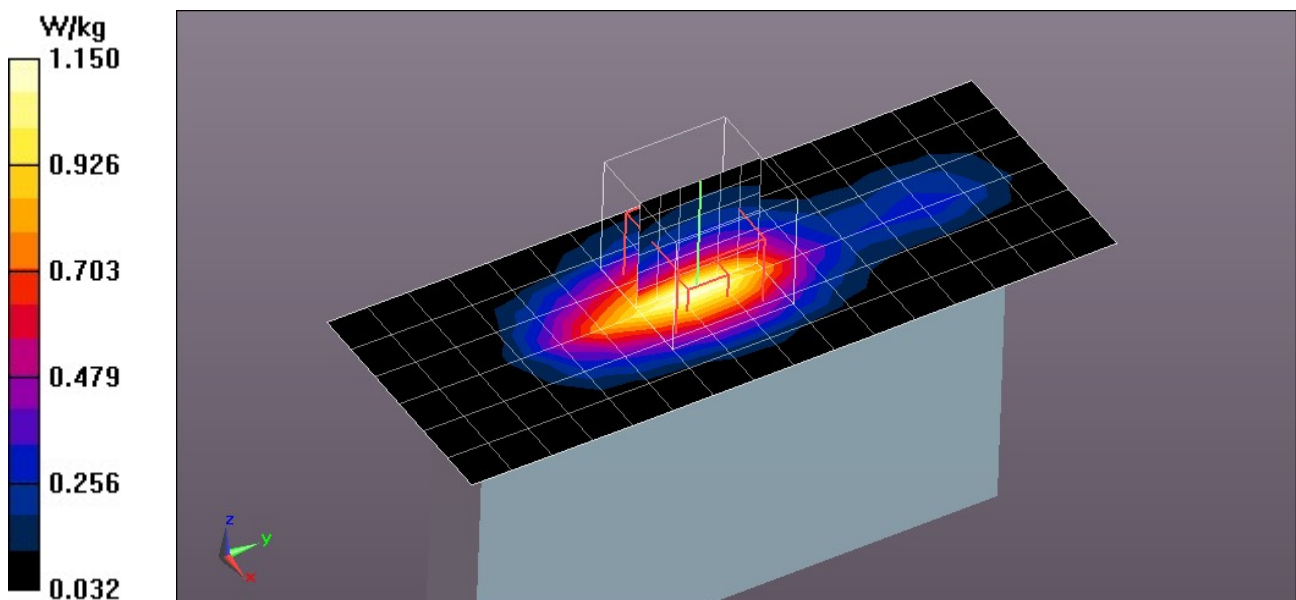

Test Laboratory: Eurofins Product Service GmbH

## LTE-FDD12 Cat-M1 CH23130 QPSK BW 10 RB 3 RBoffset 3 NBI 7 - Flat Right 0 mm

DUT: CardioMessenger Smart 4G; Type: Handset; Serial: 80216063

Communication System: UID 0, LTE FDD 12 Cat-M1 (0); Frequency: 711 MHz; Duty Cycle: 1:3.33043

Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.925$  S/m;  $\epsilon_r = 54.955$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(10.28, 10.28, 10.28) @ 711 MHz; Calibrated: 20.09.2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2019
- Phantom: ELI v4.0; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (2);

### Configuration 2/CardioMessenger Smart 4G/Area Scan (7x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.471 W/kg

### Configuration 2/CardioMessenger Smart 4G/Zoom Scan (7x8x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.75 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.649 W/kg

**SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.288 W/kg**

Maximum value of SAR (measured) = 0.468 W/kg

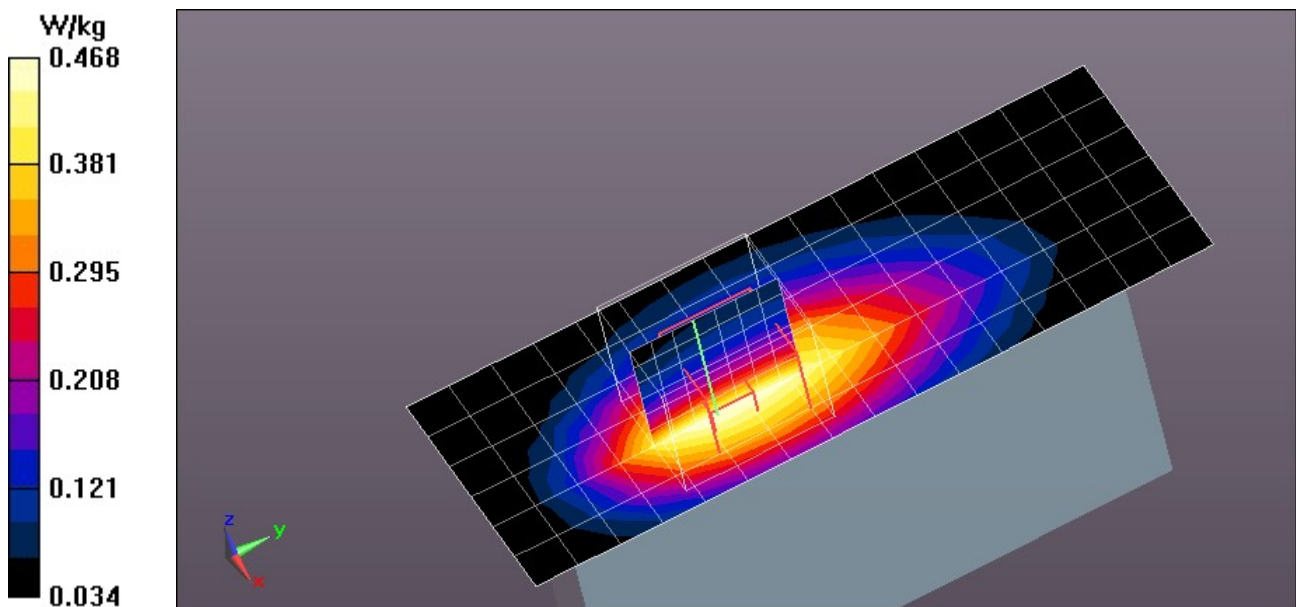



Test Laboratory: Eurofins Product Service GmbH

## LTE-FDD26 Cat-M1 CH26965 QPSK BW 15 RB 3 RBoffset 3 NBI 11 - Flat Right 0 mm

**DUT: CardioMessenger Smart 4G; Type: Handset; Serial: 80216063**

Communication System: UID 0, LTE FDD 26 Cat-M1 (0); Frequency: 841.5 MHz; Duty Cycle: 1:3.33043  
Medium parameters used (interpolated):  $f = 841.5$  MHz;  $\sigma = 0.979$  S/m;  $\epsilon_r = 53.62$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3893; ConvF(9.92, 9.92, 9.92) @ 841.5 MHz; Calibrated: 20.09.2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2019
- Phantom: ELI v4.0; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (2);

### Configuration 2/CardioMessenger Smart 4G/Area Scan (7x17x1):

Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.407 W/kg

### Configuration 2/CardioMessenger Smart 4G/Zoom Scan (7x11x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 19.92 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.748 W/kg  
**SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.251 W/kg**  
Maximum value of SAR (measured) = 0.440 W/kg

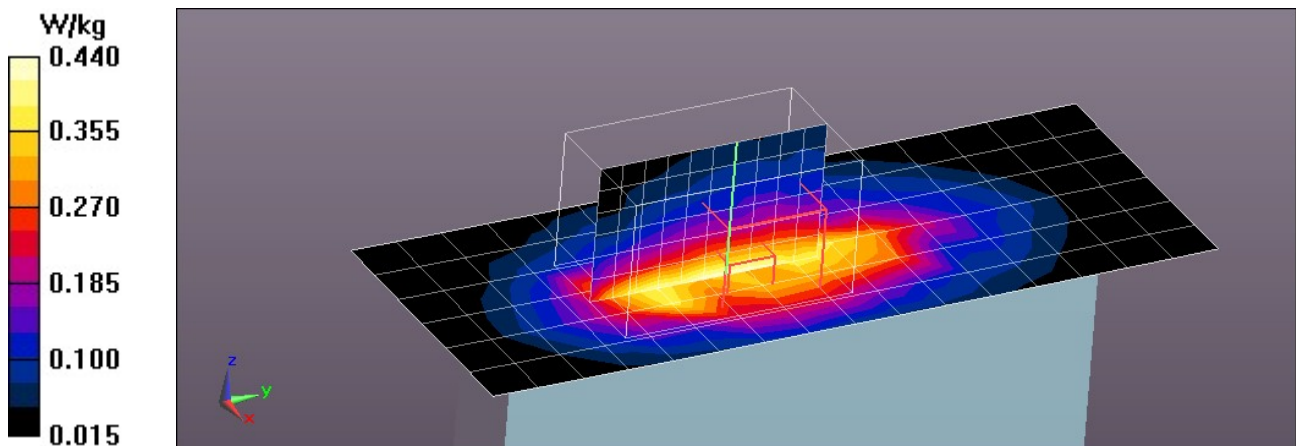

Test Laboratory: Eurofins Product Service GmbH

## LTE-FDD4 Cat-M1 CH20050 QPSK BW 20 RB 3 ROffset 3 NBI 15 - Flat Right 0 mm - 1st Repeated

DUT: CardioMessenger Smart 4G; Type: Handset; Serial: 80216063

Communication System: UID 0, LTE FDD 4 Cat-M1 (0); Frequency: 1720 MHz; Duty Cycle: 1:3.33043  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.505$  S/m;  $\epsilon_r = 52.931$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3893; ConvF(8.61, 8.61, 8.61) @ 1720 MHz; Calibrated: 20.09.2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2019
- Phantom: ELI v4.0; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (2);

### Configuration 2/CardioMessenger Smart 4G/Area Scan (7x17x1):

Measurement grid:  $dx=10$ mm,  $dy=10$ mm  
Maximum value of SAR (measured) = 1.09 W/kg

### Configuration 2/CardioMessenger Smart 4G/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 26.36 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.71 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.569 W/kg**  
Maximum value of SAR (measured) = 1.12 W/kg

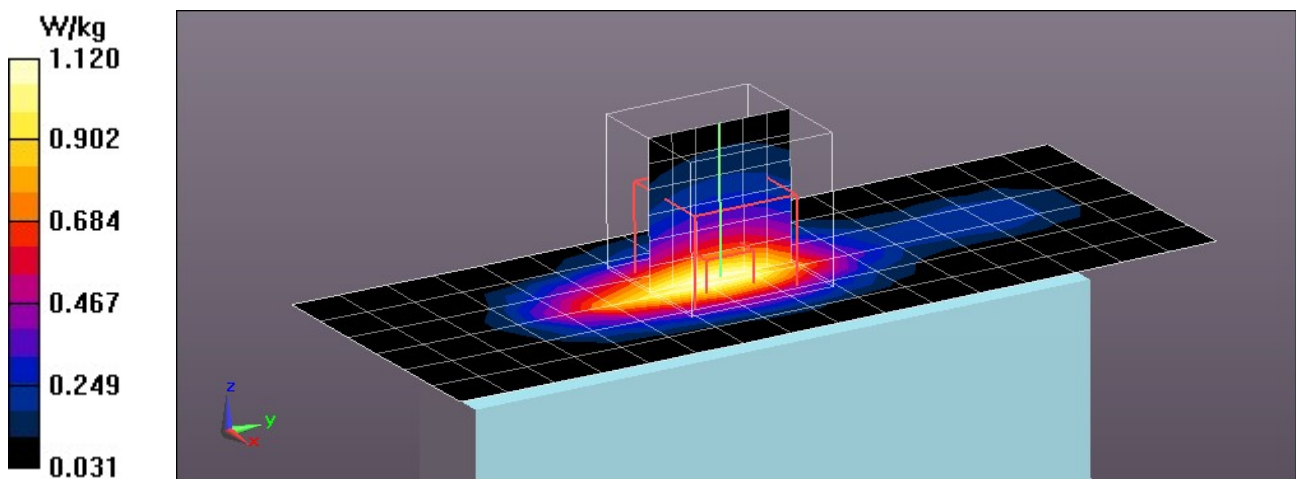

Test Laboratory: Eurofins Product Service GmbH

## LTE-FDD4 Cat-M1 CH20050 QPSK BW 20 RB 3 ROffset 3 NBI 15 - Flat Right 0 mm - DUT Holder Perturbations (without Holder)

DUT: CardioMessenger Smart 4G; Type: Handset; Serial: 80216063

Communication System: UID 0, LTE FDD 4 Cat-M1 (0); Frequency: 1720 MHz; Duty Cycle: 1:3.33043  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.505$  S/m;  $\epsilon_r = 52.931$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3893; ConvF(8.61, 8.61, 8.61) @ 1720 MHz; Calibrated: 20.09.2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2019
- Phantom: ELI v4.0; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (2);

### Configuration 2/CardioMessenger Smart 4G/Area Scan (9x19x1):

Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.18 W/kg

### Configuration 2/CardioMessenger Smart 4G/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 20.80 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 1.80 W/kg  
**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.601 W/kg**  
Maximum value of SAR (measured) = 1.19 W/kg

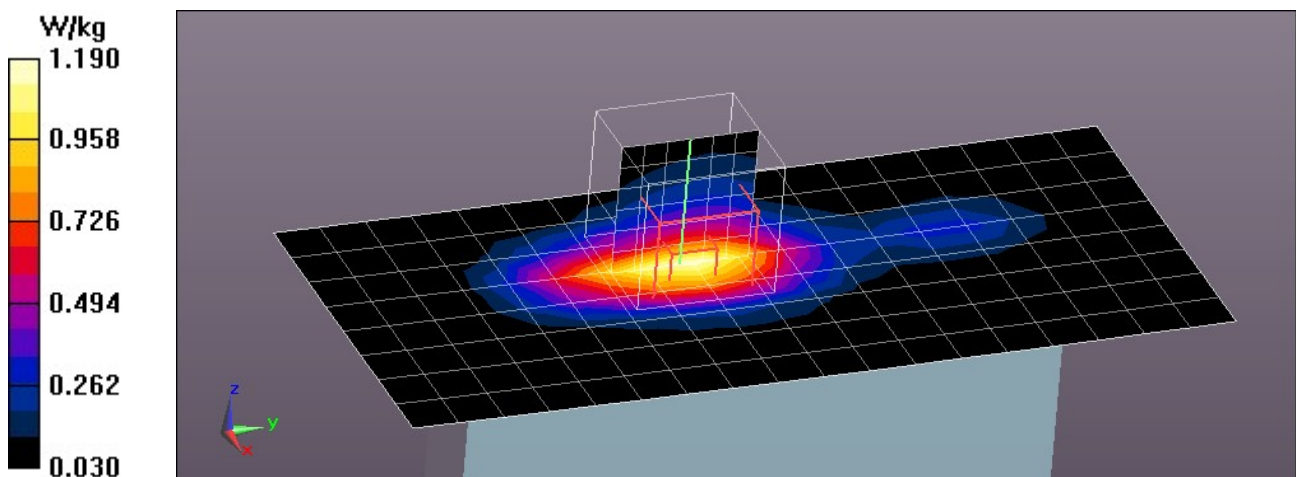

## ANNEX E System Validation Results

Test Laboratory: Eurofins Product Service GmbH

## LTE-FDD2 Cat-M1 CH18700 QPSK BW 20 RB 3 ROffset 0 NBI 0 - Flat Back 3 mm

**DUT: CardioMessenger Smart 4G; Type: Handset; Serial: 80216063**

Communication System: UID 0, LTE FDD 2 Cat-M1 (0); Frequency: 1860 MHz; Duty Cycle: 1:3.33043  
Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.477$  S/m;  $\epsilon_r = 53.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(8.32, 8.32, 8.32) @ 1860 MHz; Calibrated: 20.09.2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2019
- Phantom: ELI v4.0; Type: QDOVA001BB;
- Measurement SW: DASY52, Version 52.10 (2);

### Configuration/CardioMessenger Smart 4G/Area Scan (11x17x1):

Measurement grid:  $dx=10$ mm,  $dy=10$ mm  
Maximum value of SAR (measured) = 0.704 W/kg

### Configuration/CardioMessenger Smart 4G/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 19.49 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 1.18 W/kg  
**SAR(1 g) = 0.732 W/kg**  
Maximum value of SAR (measured) = 0.793 W/kg

