

page 2


2.1 PC-Board 2260

The PCB-board 2260 will be used for single (SR-T) and dual (DR-T) chamber devices.



2.2 PC-Board 2270

The PCB-board 2270 will be used for CRT devices with single lead (HF-T) and with quadrupolar lead (HFT QP).

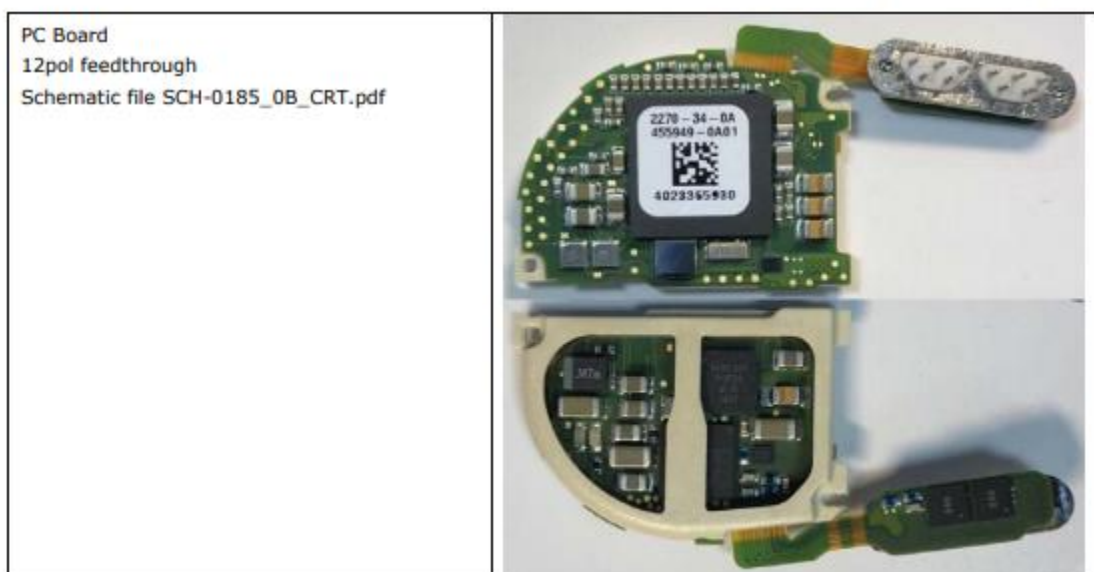

1.2 Photos – Equipment Internal

