




| RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band | |
|--|--|
| Report Reference No | G0M-1905-8256-TFC247WF-V01 |
| Testing Laboratory | Eurofins Product Service GmbH |
| Address | Storkower Str. 38c 15526 Reichenwalde Germany |
| Accreditation |  <p>DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970</p> |
| Applicant | BIOTRONIK SE & Co. KG |
| Address | Woermannkehre 1 12359 Berlin GERMANY |
| Test Specification | According to FCC/ISED rules |
| Standard | 47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, Amendment 1, 2019-03 |
| Non-Standard Test Method | None |
| Equipment under Test (EUT): | |
| Product Description | programming device for BIOTRONIK pacemakers, ICDs, CRT-devices and ICMs |
| Model(s) | Renamic Neo |
| Additional Model(s) | None |
| Brand Name(s) | BIOTRONIK |
| Hardware Version(s) | A.x |
| Software Version(s) | Porto_WLAN: 1_1_0 |
| FCC-ID | QRI-RENAMICNEO |
| IC | 4708A-RENAMICNEO |
| Test Result | PASSED |

| Possible test case verdicts: | | |
|--|-------------------|---|
| required by standard but not tested | N/T | |
| not required by standard | N/R | |
| not applicable to EUT | N/A | |
| test object does meet the requirement | P(PASS) | |
| test object does not meet the requirement | F(FAIL) | |
| Testing: | | |
| Test Lab Temperature | 20 - 23 °C | |
| Test Lab Humidity | 32 – 38 % | |
| Date of receipt of test item | 2019-05-22 | |
| Report: | | |
| Compiled by | Abdullah Al Jamal | |
| Tested by (+ signature) (Responsible for Test) | Abdullah Al Jamal |  |
| Approved by (+ signature) (Head of Lab) | Christian Weber |  |
| Date of Issue | 2019-12-18 | |
| Total number of pages | 180 | |
| General Remarks: | | |
| <p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> | | |
| Additional Comments: | | |
| Internal equipment photos provided by applicant. | | |

VERSION HISTORY

| Version History | | | |
|-----------------|------------|-----------------|------------|
| Version | Issue Date | Remarks | Revised By |
| 01 | 2019-12-18 | Initial Release | |

ABBREVIATIONS AND ACRONYMS

| Acronyms | |
|------------------|---|
| Acronym | Description |
| BPSK | Binary Phase Shift Keying |
| DSSS | Direct Sequence Spread Spectrum |
| EUT | Equipment Under Test |
| FCC | Federal Communications Commission |
| HT | High Throughput |
| IEEE 802.11 | MAC and PHY Layer for WiFi |
| ISED | Innovation, Science and Economic Development Canada |
| OFDM | Orthogonal Frequency Division Multiplexing |
| QAM | Quadrature Amplitude Modulation |
| QPSK | Quadrature Phase Shift Keying |
| RBW | Resolution bandwidth |
| RMS | Root mean square |
| VBW | Video bandwidth |
| V _{NOM} | Nominal supply voltage |

REPORT INDEX

| | | |
|----------|--|-----------|
| 1 | Equipment (Test Item) Under Test..... | 6 |
| 1.1 | Photos – Equipment External..... | 7 |
| 1.2 | Photos – Equipment Internal..... | 14 |
| 1.3 | Photos – Test Setup..... | 24 |
| 1.4 | Support Equipment..... | 25 |
| 1.5 | Test mode output power..... | 26 |
| 1.6 | Test Modes..... | 29 |
| 1.7 | Test Frequencies..... | 30 |
| 1.8 | Sample emission level calculation..... | 31 |
| 2 | Result Summary..... | 32 |
| 3 | Test Conditions and Results..... | 33 |
| 3.1 | Test Conditions and Results - Occupied bandwidth..... | 33 |
| 3.2 | Test Conditions and Results - 6 dB bandwidth..... | 53 |
| 3.3 | Test Conditions and Results - Maximum peak conducted output power..... | 73 |
| 3.4 | Test Conditions and Results - Power spectral density..... | 75 |
| 3.5 | Test Conditions and Results - AC powerline conducted emissions..... | 95 |
| 3.6 | Test Conditions and Results - Band-edge compliance..... | 98 |
| 3.7 | Test Conditions and Results - Conducted spurious emissions..... | 112 |
| 3.8 | Test Conditions and Results - Transmitter radiated emissions..... | 132 |
| 3.9 | Test Conditions and Results - Receiver radiated emissions..... | 135 |
| ANNEX A | Transmitter spurious emissions..... | 138 |
| ANNEX B | Receiver spurious emissions..... | 169 |

1 Equipment (Test Item) Under Test

| | | |
|-------------------------------|---|------------------------------------|
| Description | programming device for BIOTRONIK pacemakers, ICDs, CRT-devices and ICMs | |
| Model | Renamic Neo | |
| Additional Model(s) | None | |
| Brand Name(s) | BIOTRONIK | |
| Serial Number(s) | 80001072 (Test sample 24167) 80001091 (Test sample 24164) | |
| Hardware Version(s) | A.x | |
| Software Version(s) | Porto_WLAN: 1_1_0 | |
| PMN | Renamic Neo | |
| HVIN | Renamic Neo | |
| FVIN | N/A | |
| HMN | N/A | |
| FCC-ID | QRI-RENAMICNEO | |
| IC | 4708A-RENAMICNEO | |
| Equipment type | End Product | |
| Radio type | Transceiver | |
| Assigned frequency bands | 2400 - 2483.5 MHz | |
| Radio technology | IEEE 802.11 b/g/n (HT20) | |
| Modulation | BPSK, QPSK, 16-QAM, 32-QAM | |
| Number of antenna ports | 2 | |
| Antenna 1 – Antenna port W | Type | Integrated antenna |
| | Model | Not specified |
| | Manufacturer | BIOTRONIK SE & Co. KG |
| | Gain | 4.0 dBi (declared by applicant) |
| Antenna 2 – Antenna port B | Type | Integrated antenna |
| | Model | Not specified |
| | Manufacturer | BIOTRONIK SE & Co. KG |
| | Gain | 4.0 dBi (declared by applicant) |
| Supply Voltage | V _{NOM} | 120 VAC |
| Operating Temperature | T _{NOM} | 23 °C |
| AC/DC-Adaptor | Model | ATM090T-P190 |
| | Vendor | Adapter Tech |
| | Input | 100 VAC – 240 VDC |
| | Output | 19 VDC |
| Manufacturer | BIOTRONIK SE & Co. KG Woermannkehre 1 12359 Berlin GERMANY | |

1.4 Support Equipment


| Product Type | Device | Manufacturer | Model | Comment |
|----------------|---------------------|--------------|-------|---------|
| None. | | | | |
| Description: | | | | |
| AE | Auxiliary Equipment | | | |
| SIM | Simulator | | | |
| CBL | Connecting Cable | | | |
| SFT | Software | | | |
| Comment: None. | | | | |

1.5 Test mode output power

1.5.1 Information

| Test Information | |
|--------------------|------------------------|
| Measurement Method | ANSI C63.10 11.9, 14.3 |

1.5.2 Setup

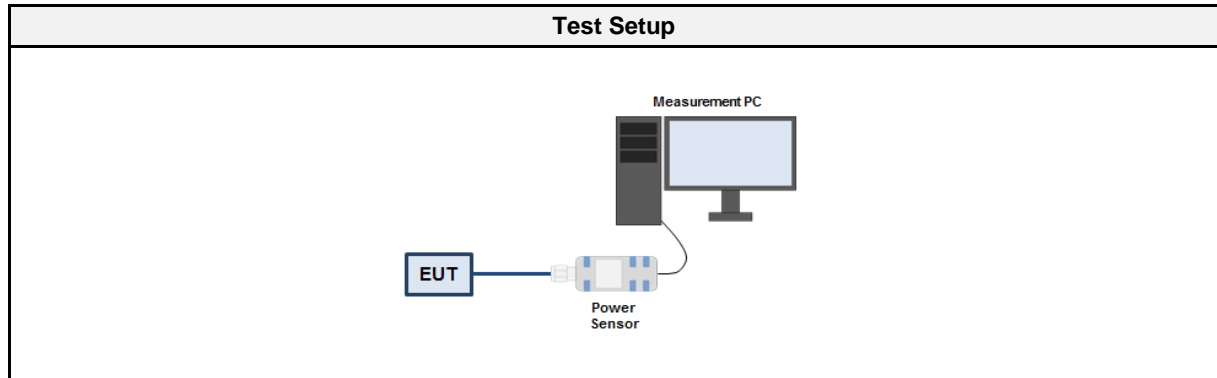

1.5.3 Equipment

| Test Equipment | | | | | |
|----------------|--------------|---------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Power Sensor | R&S | NRP-Z81 | EF00830 | 2018-07 | 2019-07 |

1.5.4 Procedure

| Test Procedure |
|---|
| <ol style="list-style-type: none"> 1. EUT set to test mode 2. The peak power is measured with the wideband power sensor 3. The power is measured for the lowest data rate on all three channels 4. For the channel with the highest power the power is also measured for all data rates 5. The data rate with the highest output power is selected for test mode |

1.5.5 Results

| Results – DSSS | | | |
|-----------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Antenna port 1 | | | |
| Data Rate [Mbps] | Power [dBm] Channel 2412 [MHz] | Power [dBm] Channel 2437 [MHz] | Power [dBm] Channel 2462 [MHz] |
| 1 | 15.8 | 16.1 | 16.5 |
| 2 | 15.9 | 15.6 | 16.1 |
| 5.5 | 15.4 | 15.0 | 15.5 |
| 11 | 15.4 | 15.3 | 15.6 |

| Results - OFDM | | | |
|-----------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Antenna port 1 | | | |
| Data Rate [Mbps] | Power [dBm] Channel 2412 [MHz] | Power [dBm] Channel 2437 [MHz] | Power [dBm] Channel 2462 [MHz] |
| 6 | 21.9 | 21.7 | 22.0 |
| 9 | 21.9 | 21.7 | 22.2 |
| 12 | 21.3 | 21.2 | 21.7 |
| 18 | 21.4 | 21.3 | 21.4 |
| 24 | 22.0 | 21.5 | 22.0 |
| 36 | 21.2 | 21.1 | 21.2 |
| 48 | 20.1 | 19.3 | 20.1 |
| 54 | 20.1 | 20.0 | 19.9 |

| Results - HT20 | | | |
|-----------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Antenna port 1 | | | |
| MCS | Power [dBm] Channel 2412 [MHz] | Power [dBm] Channel 2437 [MHz] | Power [dBm] Channel 2462 [MHz] |
| 0 | 21.9 | 22.0 | 21.2 |
| 1 | 21.6 | 22.2 | 22.4 |
| 2 | 21.8 | 21.3 | 22.1 |
| 3 | 21.8 | 21.4 | 21.9 |
| 4 | 21.4 | 21.3 | 20.5 |
| 5 | 20.7 | 19.6 | 21.5 |
| 6 | 19.3 | 20.1 | 20.2 |
| 7 | 19.8 | 19.9 | 22.0 |
| 8 | 21.6 | 21.5 | 21.3 |
| 9 | 21.3 | 21.2 | 22.0 |
| 10 | 21.4 | 21.7 | 21.7 |
| 11 | 21.6 | 21.3 | 21.8 |
| 12 | 21.9 | 21.9 | 21.9 |
| 13 | 20.9 | 21.5 | 21.3 |
| 14 | 21.0 | 22.0 | 22.0 |
| 15 | 20.2 | 21.7 | 21.4 |

| Results – DSSS Antenna port 2 | | | |
|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Data Rate [Mbps] | Power [dBm] Channel 2412 [MHz] | Power [dBm] Channel 2437 [MHz] | Power [dBm] Channel 2462 [MHz] |
| 1 | 16.2 | 15.9 | 16.3 |
| 2 | 16.1 | 15.4 | 16.2 |
| 5.5 | 15.3 | 14.9 | 15.3 |
| 11 | 15.7 | 15.4 | 15.7 |

| Results - OFDM Antenna port 2 | | | |
|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Data Rate [Mbps] | Power [dBm] Channel 2412 [MHz] | Power [dBm] Channel 2437 [MHz] | Power [dBm] Channel 2462 [MHz] |
| 6 | 21.2 | 21.3 | 21.3 |
| 9 | 21.2 | 21.2 | 21.4 |
| 12 | 21.0 | 20.8 | 20.8 |
| 18 | 21.1 | 21.0 | 21.2 |
| 24 | 21.2 | 20.9 | 21.8 |
| 36 | 21.0 | 20.7 | 20.8 |
| 48 | 20.7 | 19.6 | 20.5 |
| 54 | 19.9 | 19.6 | 19.8 |

| Results - HT20 Antenna port 2 | | | |
|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| MCS | Power [dBm] Channel 2412 [MHz] | Power [dBm] Channel 2437 [MHz] | Power [dBm] Channel 2462 [MHz] |
| 0 | 21.2 | 21.3 | 21.4 |
| 1 | 21.3 | 21.3 | 21.6 |
| 2 | 21.1 | 21.2 | 21.4 |
| 3 | 21.1 | 21.1 | 21.1 |
| 4 | 21.0 | 21.0 | 21.3 |
| 5 | 20.3 | 19.6 | 20.4 |
| 6 | 20.0 | 20.0 | 20.3 |
| 7 | 20.4 | 19.9 | 19.4 |
| 8 | 21.2 | 21.0 | 21.4 |
| 9 | 20.9 | 20.4 | 20.7 |
| 10 | 21.1 | 20.9 | 21.0 |
| 11 | 21.2 | 21.0 | 21.1 |
| 12 | 21.3 | 21.1 | 21.2 |
| 13 | 20.8 | 20.4 | 20.6 |
| 14 | 21.2 | 20.7 | 21.4 |
| 15 | 20.9 | 20.8 | 20.8 |

1.6 Test Modes

| Mode | Description |
|--|--|
| DSSS (IEEE 802.11b) | Mode = Transmit Modulation = BPSK Spreading = DSSS Bandwidth = 20 MHz Duty cycle = 100% Power setting = Custom settings – software provided by applicant – with Tx Power = 15 dBm Data rate = 1 Mbps |
| OFDM (IEEE 802.11g) | Mode = Transmit Modulation = BPSK Spreading = OFDM Bandwidth = 20 MHz Duty cycle = 100% Power setting = Custom settings – software provided by applicant – with Tx Power = 15 dBm Data rate = 6 Mbps |
| HT20 (IEEE 802.11n) | Mode = Transmit Modulation = BPSK Spreading = OFDM Bandwidth = 20 MHz Duty cycle = 100% Power setting (1 Simultaneous Tx) = Custom settings – software provided by applicant – with Tx Power = 15 dBm Power setting (2 Simultaneous Tx) = Custom settings – software provided by applicant – with Tx Power = 15 dBm Data rate (1 Simultaneous Tx) = 6.5 Mbps Data rate (2 Simultaneous Tx) = 13 Mbps MCS (1 Simultaneous Tx) = 0 MCS (2 Simultaneous Tx) = 8 |
| Receive | Mode = Receive |
| Comment: The above settings were found as worst case during pre-tests. | |

1.7 Test Frequencies

| Designator | Mode | Channel | Frequency [MHz] |
|------------|---------|---------|-----------------|
| F1 | Tx / Rx | 1 | 2412 |
| F2 | Tx / Rx | 6 | 2437 |
| F3 | Tx / Rx | 11 | 2462 |

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

| | | | | |
|----------------------|---------------|---|---------------------------|-----------|
| Reading + AF | = Net Reading | : | Net reading - FCC limit | = Margin |
| +21.5 dBµV + 26 dB/m | = 47.5 dBµV/m | : | 47.5 dBµV/m - 57.0 dBµV/m | = -9.5 dB |

2 Result Summary

| FCC 47 CFR Part 15C, ISED RSS-247 | | | | |
|---|---|------------------|--------|--------------------|
| Product Standard Reference | Requirement | Reference Method | Result | Remarks |
| ISED RSS-Gen, Issue 5 (section 6.6) | Occupied Bandwidth | ANSI C63.10-2013 | N/R | Informational only |
| FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2) | 6 dB Bandwidth | ANSI C63.10-2013 | PASS | |
| FCC § 15.247(b)(1) ISED RSS-247, Issue 2 (section 5.4) | Maximum peak conducted power | ANSI C63.10-2013 | PASS | |
| FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2) | Power spectral density | ANSI C63.10-2013 | PASS | |
| FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1) | AC power line conducted emissions | ANSI C63.10-2013 | PASS | |
| FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5) | Band edge compliance | ANSI C63.10-2013 | PASS | |
| FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5) | Conducted spurious emissions | ANSI C63.10-2013 | PASS | |
| FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 (section 6.13) | Transmitter radiated spurious emissions | ANSI C63.10-2013 | PASS | |
| ISED RSS-247, Issue 2 (section 3.1) | Receiver radiated spurious emissions | ANSI C63.10-2013 | PASS | |
| Comment: None. | | | | |

| Possible Test Case Verdicts | |
|-----------------------------|--|
| PASS | Test object does meet the requirements |
| FAIL | Test object does not meet the requirements |
| N/T | Required by standard but not tested |
| N/R | Not required by standard for the test object |

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

| Test Information | |
|--------------------|-------------------------------------|
| Reference | ISED RSS-Gen, Issue 5 (section 6.6) |
| Measurement Method | ANSI C63.10 6.9.3 |
| Operator | Abdullah Al Jamal |
| Date | 2019-06-06 |

3.1.2 Limits

| Limits |
|---------------------------|
| None (Informational only) |

3.1.3 Setup

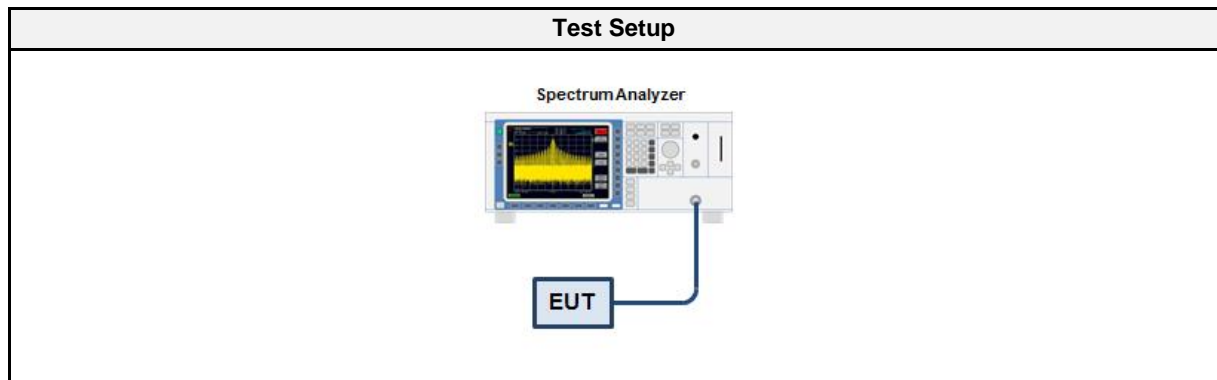

3.1.4 Equipment

| Test Equipment | | | | | |
|-------------------|--------------|--------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer | R&S | FSW 43 | EF00896 | 2018-07 | 2019-07 |

3.1.5 Procedure

| Test Procedure |
|--|
| <ol style="list-style-type: none"> 1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to the range of 1 % to 5 % of the occupied bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function |


3.1.6 Results

| Test Results – Antenna port B | | |
|-------------------------------|-----------------|-----------------|
| Mode | Frequency [MHz] | Bandwidth [MHz] |
| DSSS | 2412 | 13.258 |
| DSSS | 2437 | 13.240 |
| DSSS | 2462 | 13.181 |
| OFDM | 2412 | 16.468 |
| OFDM | 2437 | 16.461 |
| OFDM | 2462 | 16.459 |
| HT20 | 2412 | 17.585 |
| HT20 | 2437 | 17.575 |
| HT20 | 2462 | 17.573 |

| Test Results – Antenna port W | | |
|-------------------------------|-----------------|-----------------|
| Mode | Frequency [MHz] | Bandwidth [MHz] |
| DSSS | 2412 | 13.094 |
| DSSS | 2437 | 13.134 |
| DSSS | 2462 | 13.062 |
| OFDM | 2412 | 16.458 |
| OFDM | 2437 | 16.455 |
| OFDM | 2462 | 16.455 |
| HT20 | 2412 | 17.568 |
| HT20 | 2437 | 17.568 |
| HT20 | 2462 | 17.573 |

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 13.258

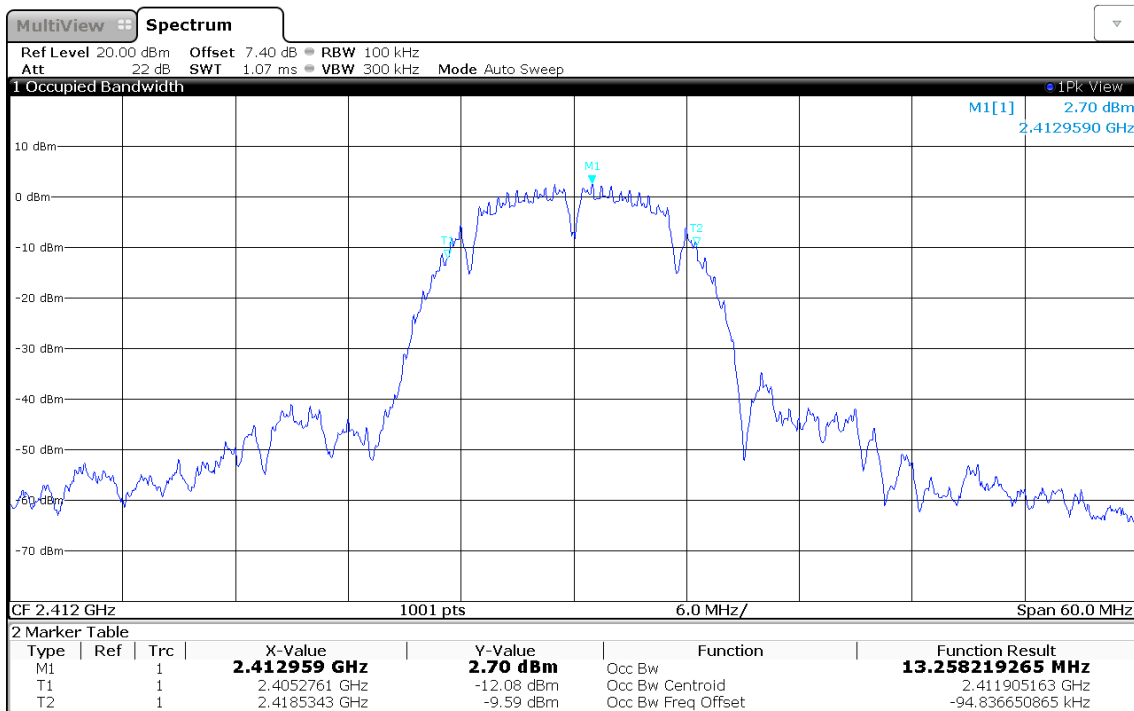

18:13:10 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 13.240

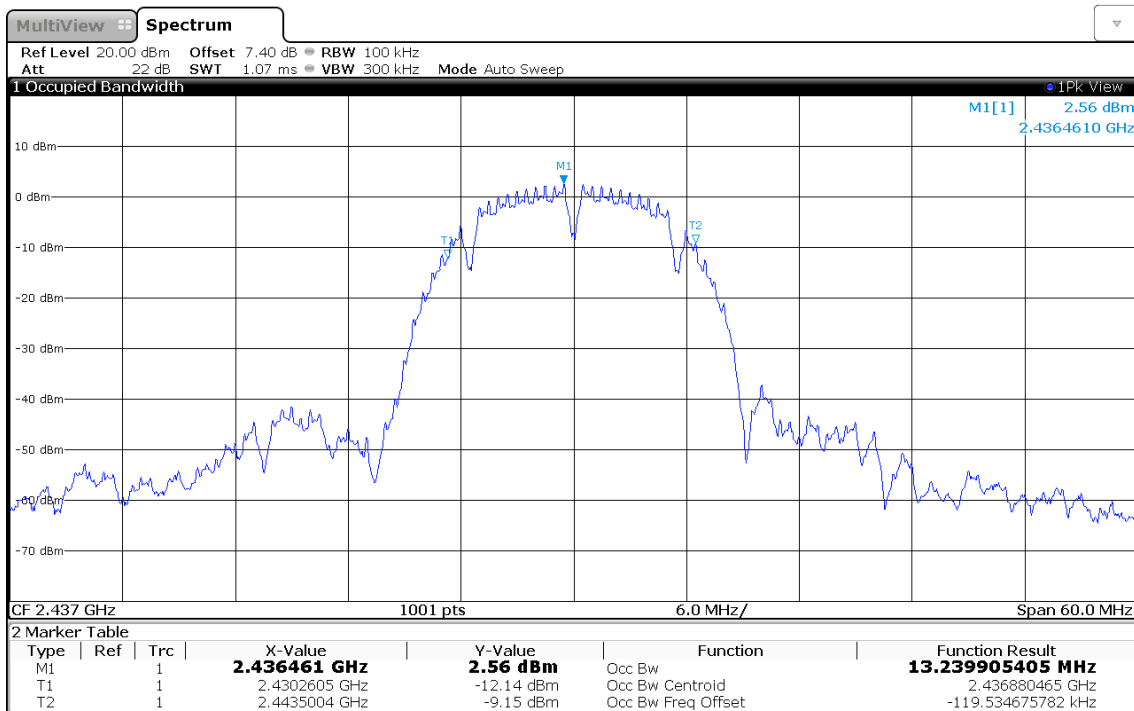

18:14:21 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 13.181

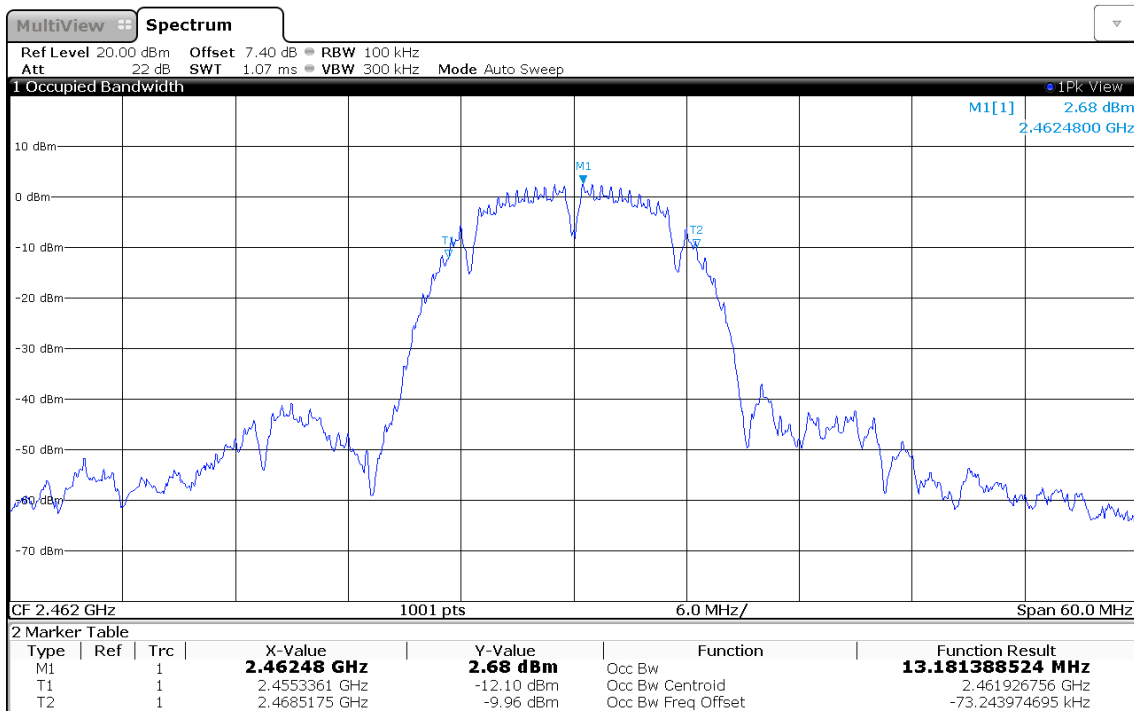

18:14:49 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 16.468

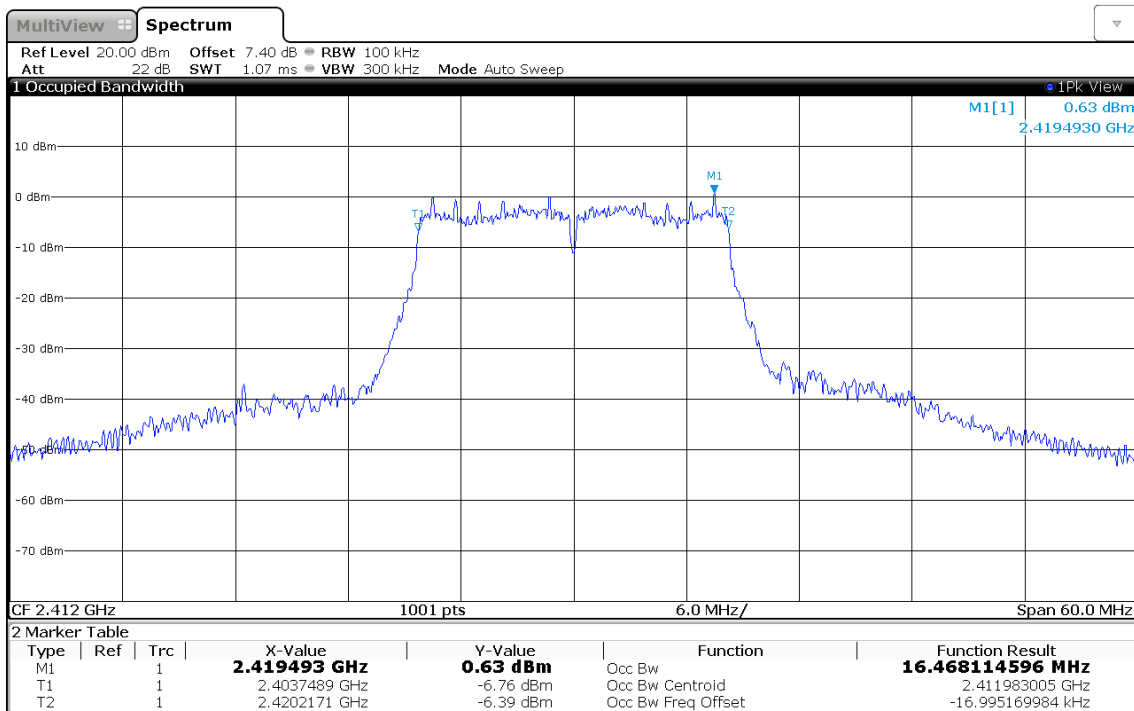

18:15:58 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 16.461

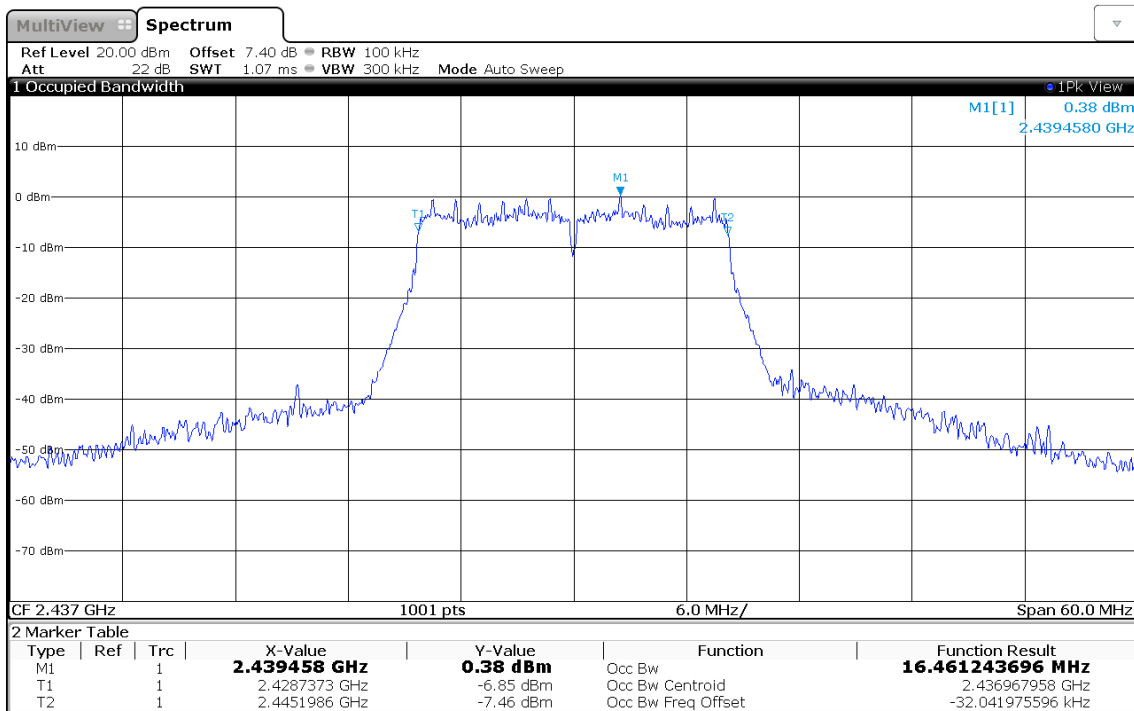

18:16:36 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 16.459

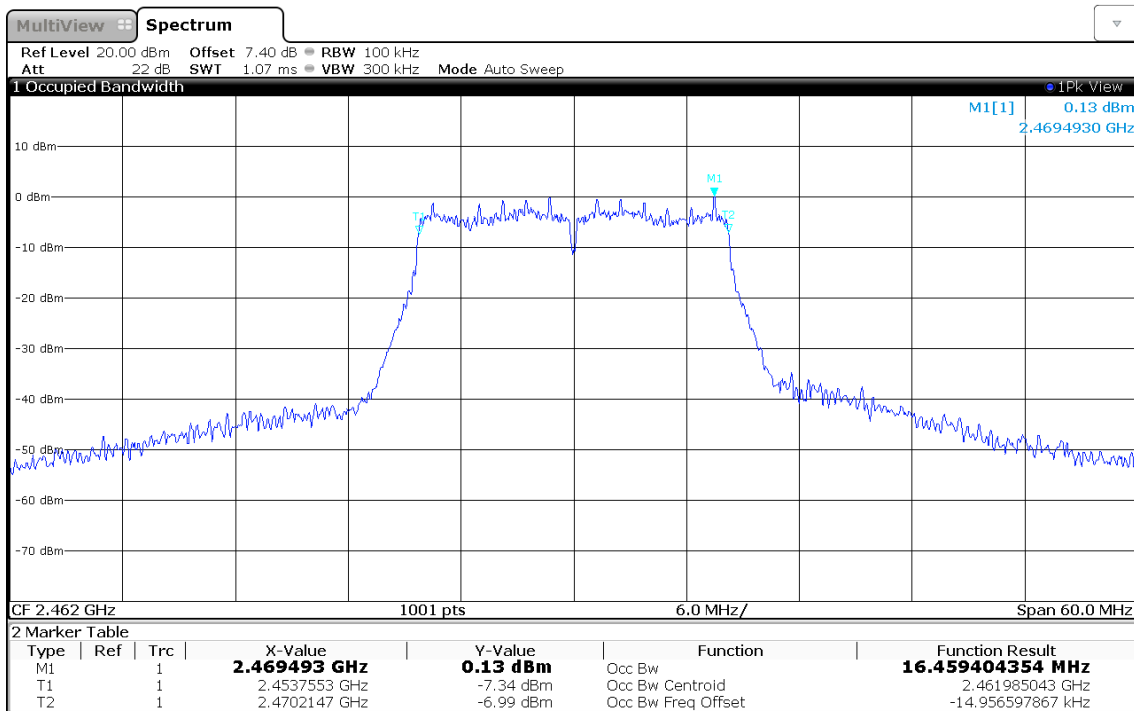

18:17:19 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 17.585

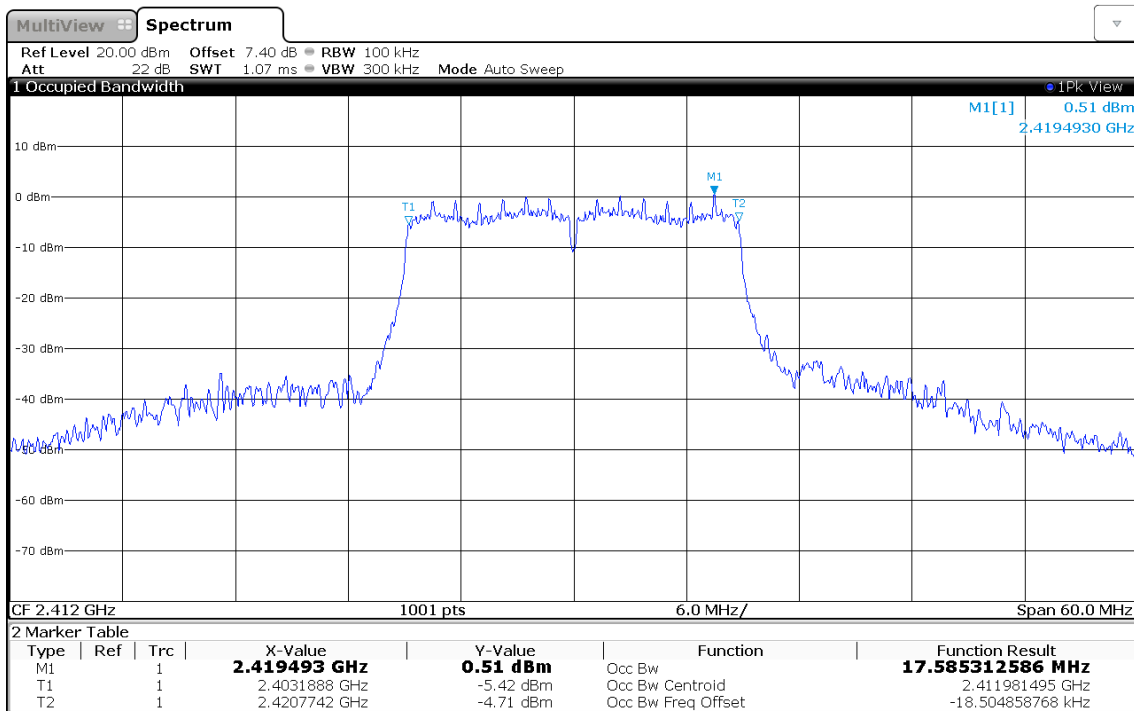

18:18:19 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 17.575

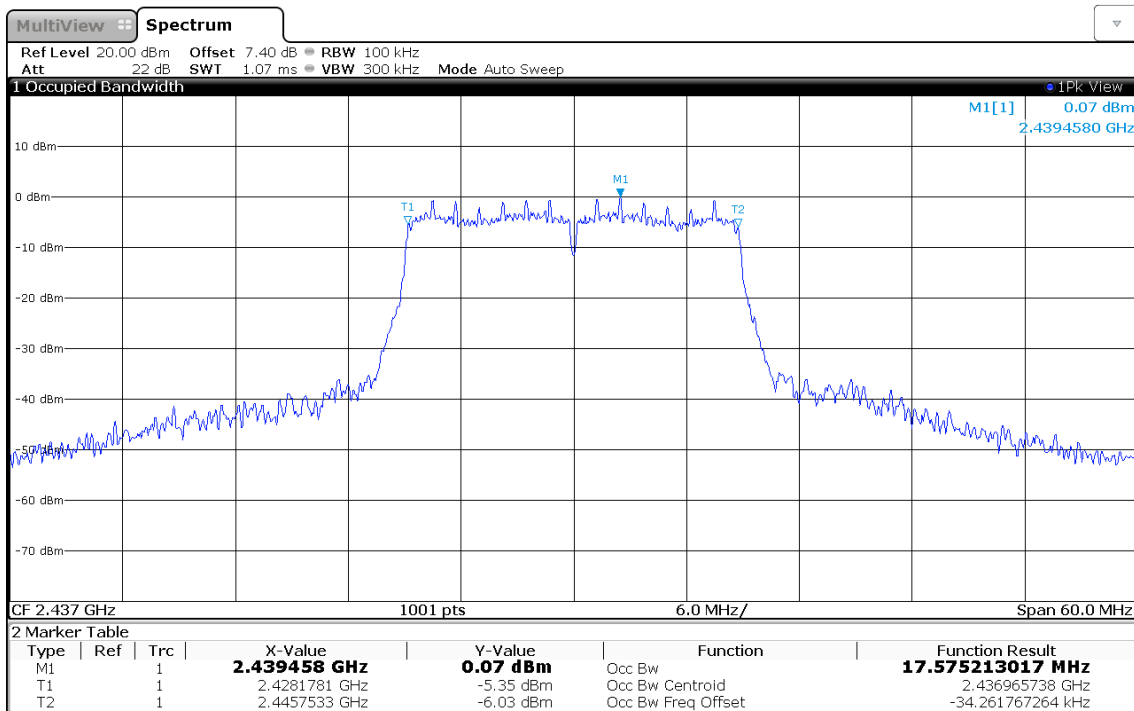

18:18:49 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Occupied Bandwidth [MHz]: 17.573

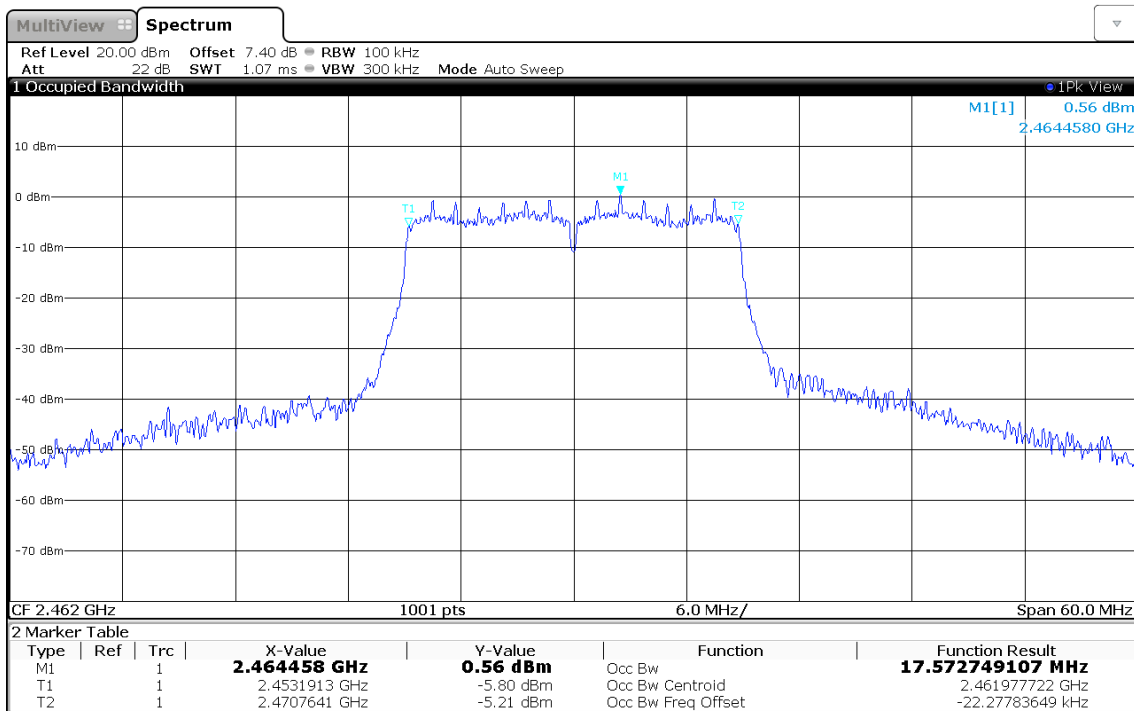

18:19:18 06.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 13.094

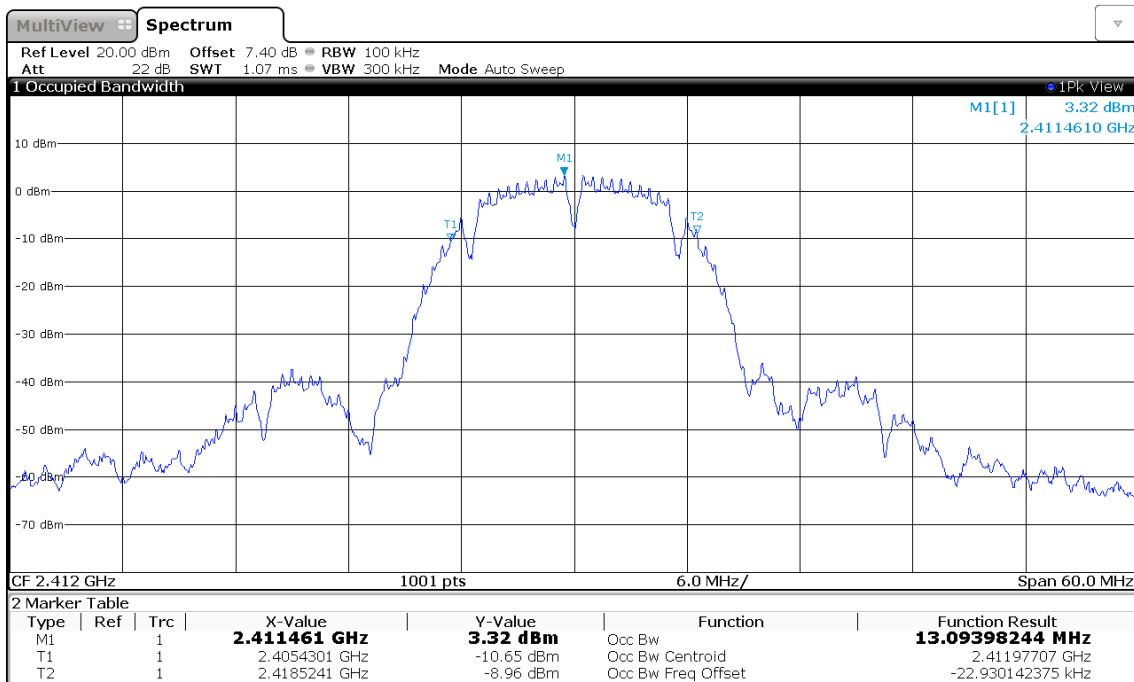

08:47:14 07.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 13.134

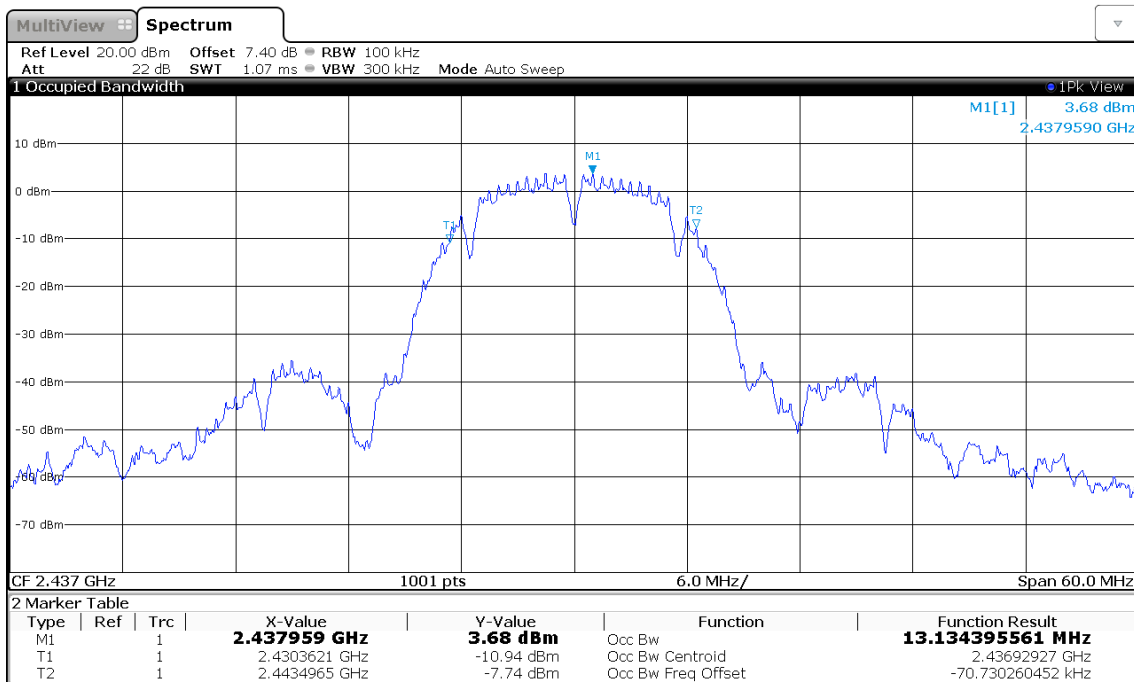

08:47:41 07.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 13.062

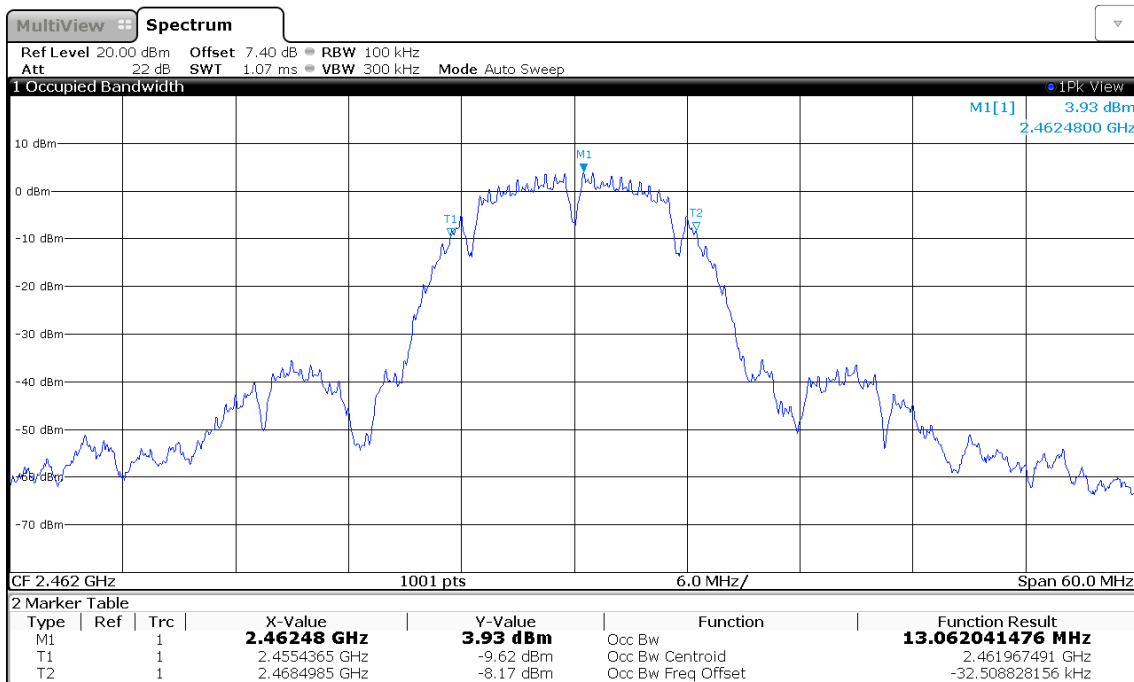

08:48:07 07.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 16.458

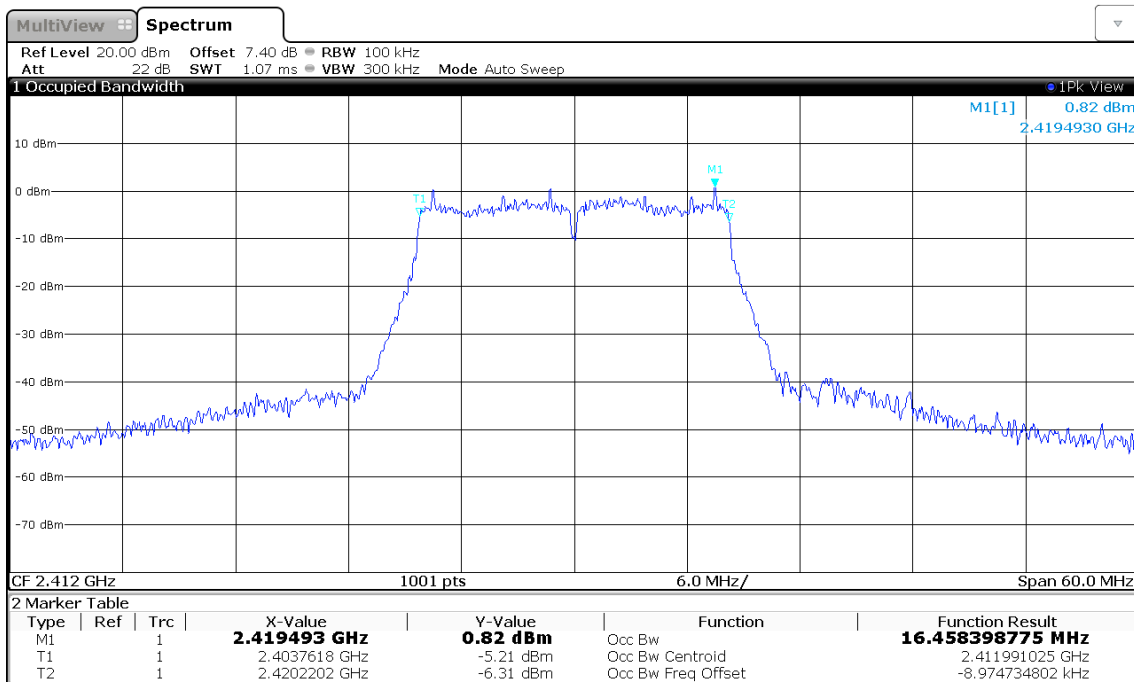

08:49:17 07.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 16.455

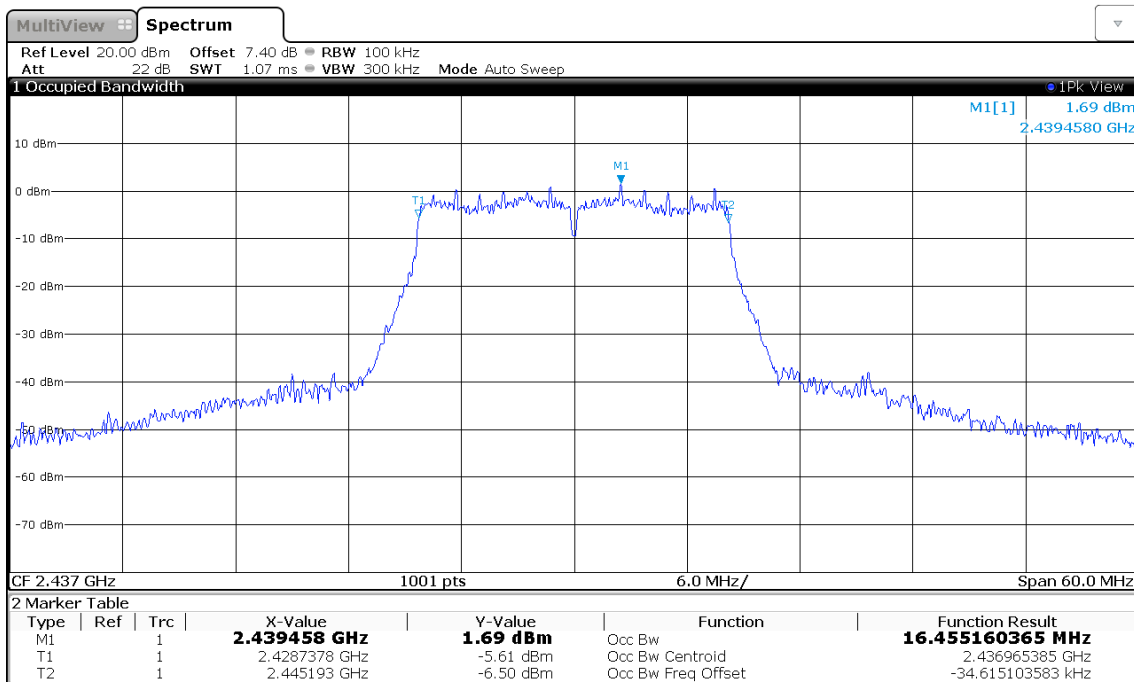

08:49:47 07.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 16.455

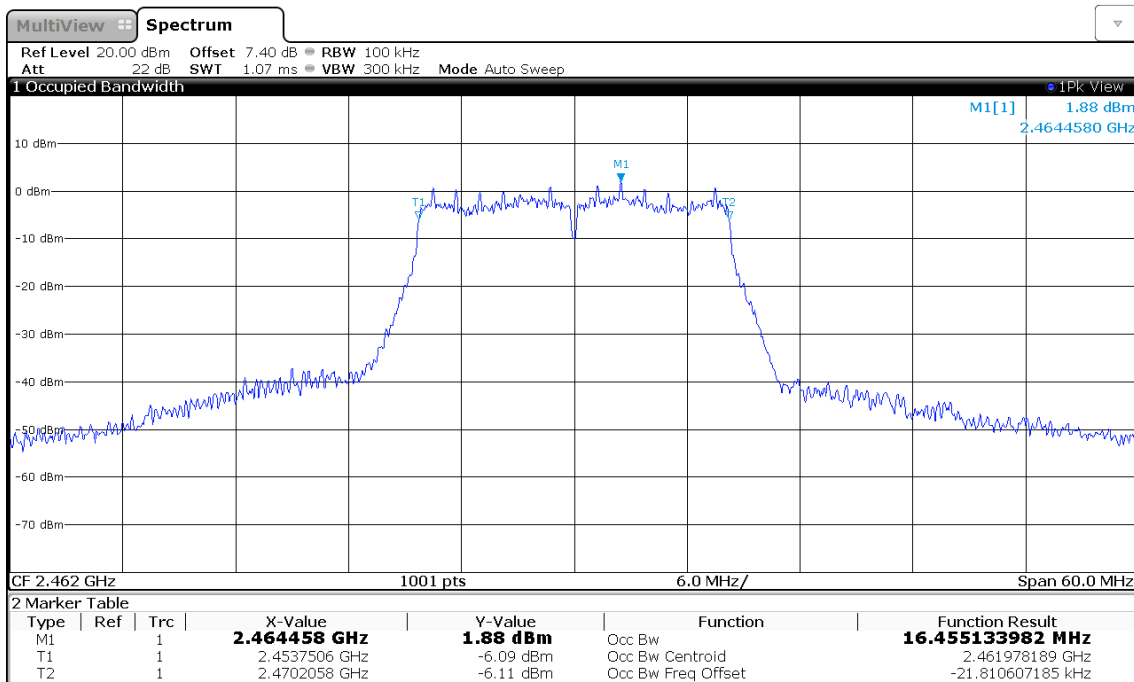

08:50:17 07.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 17.568

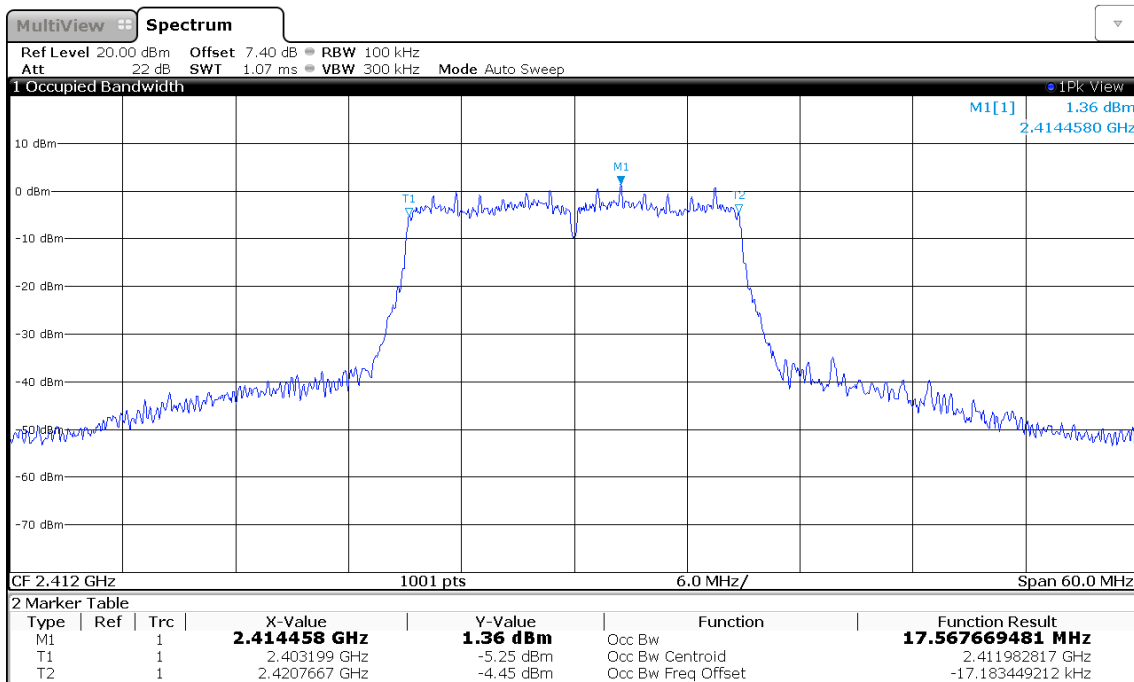

08:51:19 07.06.2019

Occupied Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 17.568

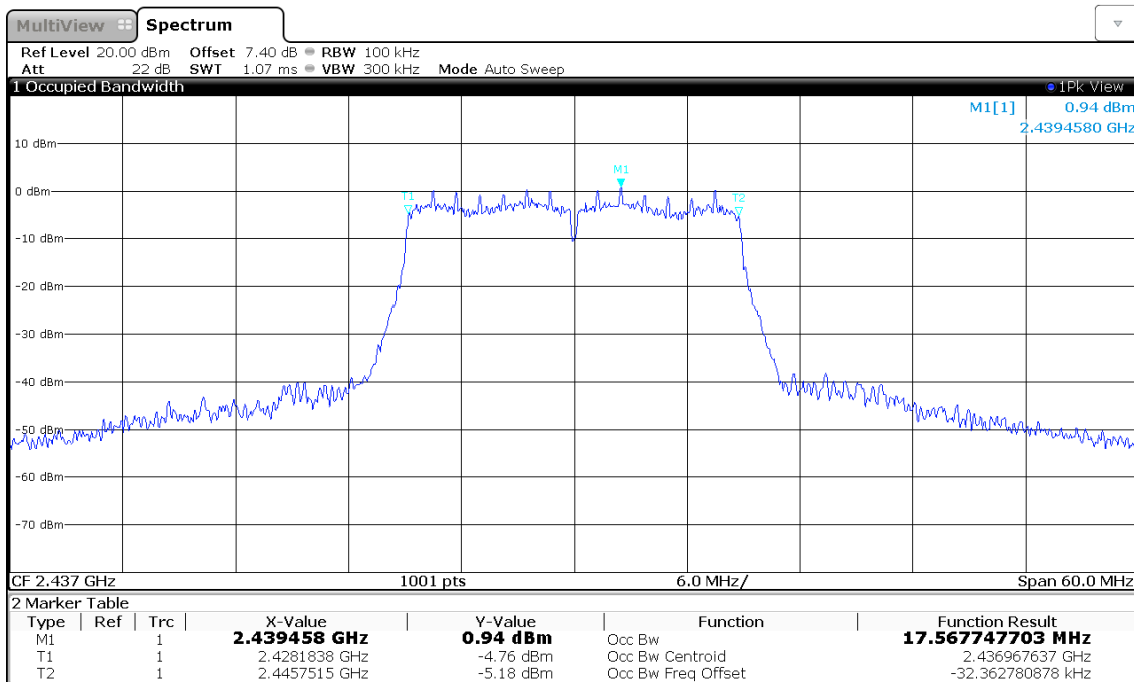

08:51:54 07.06.2019

Occupied Bandwidth

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Occupied Bandwidth [MHz]: 17.573

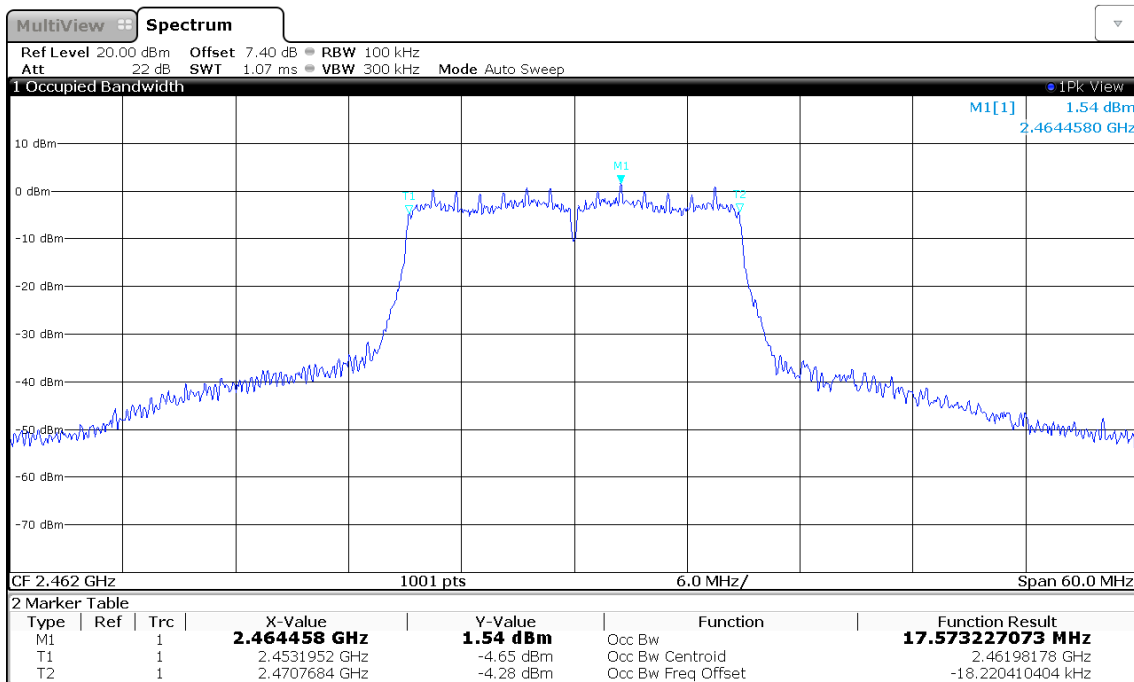

08:52:23 07.06.2019

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

| Test Information | |
|--------------------|---|
| Reference | FCC § 15.247(a)(2); ISED RSS-247, Issue 2 (section 5.2) |
| Measurement Method | ANSI C63.10 11.8 |
| Operator | Abdullah Al Jamal |
| Date | 2019-06-06 |

3.2.2 Limits

| Limits |
|----------|
| ≥ 500kHz |

3.2.3 Setup

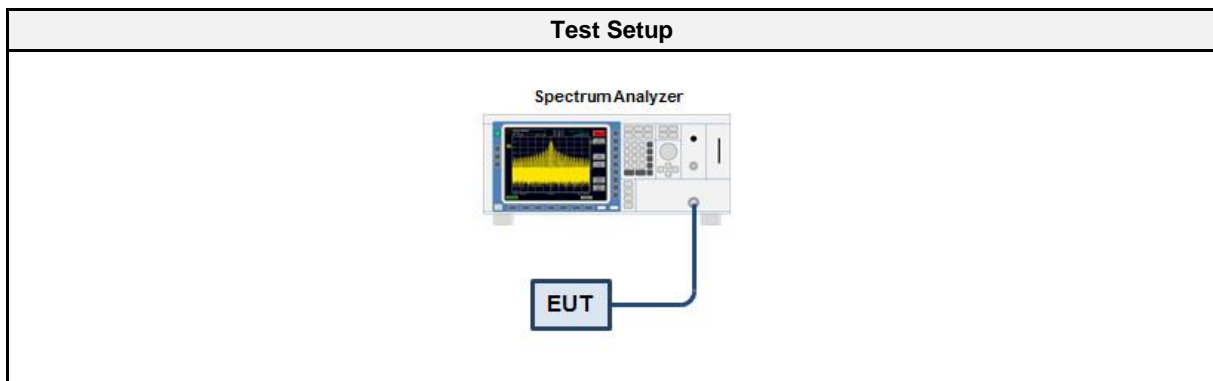

3.2.4 Equipment

| Test Equipment | | | | | |
|-------------------|--------------|--------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer | R&S | FSW 43 | EF00896 | 2018-07 | 2019-07 |

3.2.5 Procedure

| Test Procedure |
|--|
| <ol style="list-style-type: none"> 1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation |


3.2.6 Results

| Test Results – Antenna port B | | | | |
|-------------------------------|-----------------|-----------------|-------------|---------|
| Mode | Frequency [MHz] | Bandwidth [kHz] | Limit [kHz] | Verdict |
| DSSS | 2412 | 9990 | 500 | PASS |
| DSSS | 2437 | 9840 | 500 | PASS |
| DSSS | 2462 | 10040 | 500 | PASS |
| OFDM | 2412 | 16384 | 500 | PASS |
| OFDM | 2437 | 16434 | 500 | PASS |
| OFDM | 2462 | 16434 | 500 | PASS |
| HT20 | 2412 | 17532 | 500 | PASS |
| HT20 | 2437 | 17532 | 500 | PASS |
| HT20 | 2462 | 17532 | 500 | PASS |

| Test Results – Antenna port W | | | | |
|-------------------------------|-----------------|-----------------|-------------|---------|
| Mode | Frequency [MHz] | Bandwidth [kHz] | Limit [kHz] | Verdict |
| DSSS | 2412 | 10040 | 500 | PASS |
| DSSS | 2437 | 10040 | 500 | PASS |
| DSSS | 2462 | 10040 | 500 | PASS |
| OFDM | 2412 | 16434 | 500 | PASS |
| OFDM | 2437 | 16434 | 500 | PASS |
| OFDM | 2462 | 16434 | 500 | PASS |
| HT20 | 2412 | 17532 | 500 | PASS |
| HT20 | 2437 | 17532 | 500 | PASS |
| HT20 | 2462 | 17632 | 500 | PASS |

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2406.905
 Upper Frequency [MHz]: 2416.895
 6 dB Bandwidth [kHz]: 9990

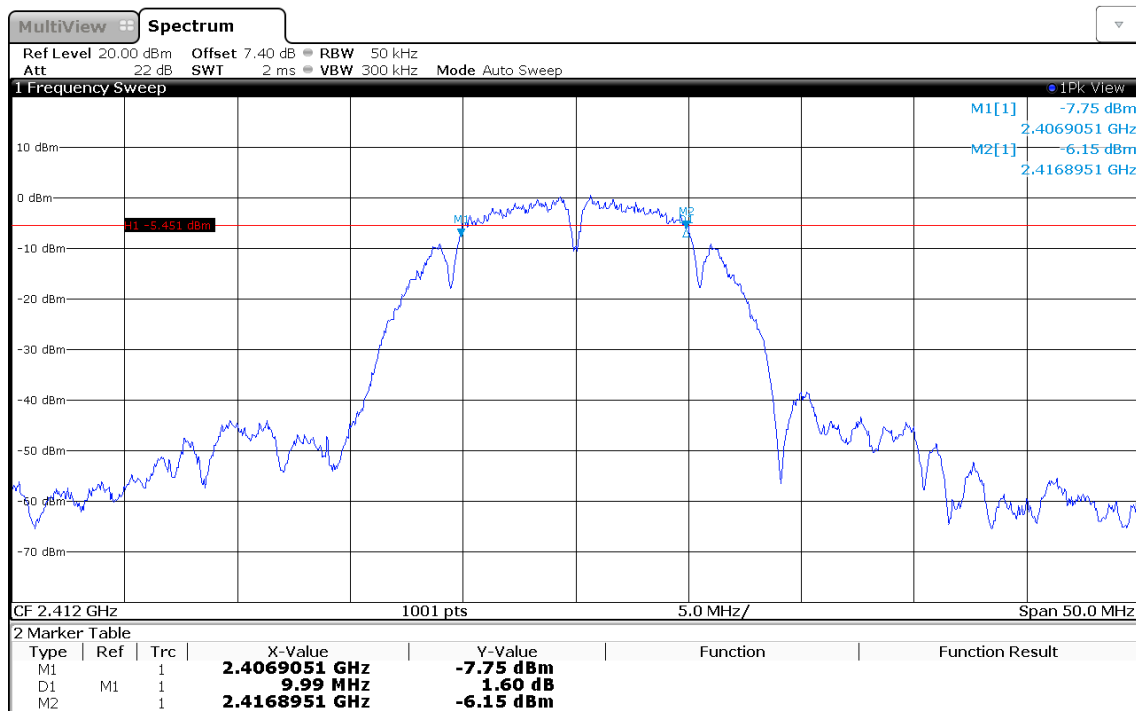

18:20:45 06.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2431.905
 Upper Frequency [MHz]: 2441.745
 6 dB Bandwidth [kHz]: 9840

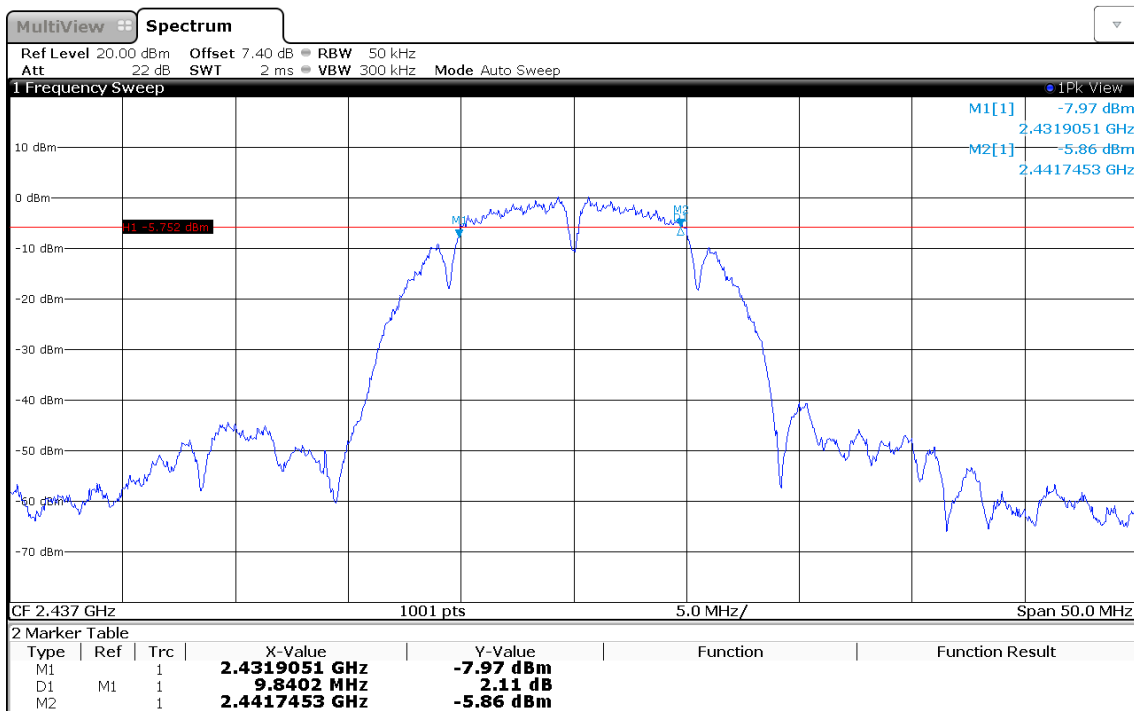

18:21:14 06.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2456.905
 Upper Frequency [MHz]: 2466.945
 6 dB Bandwidth [kHz]: 10040

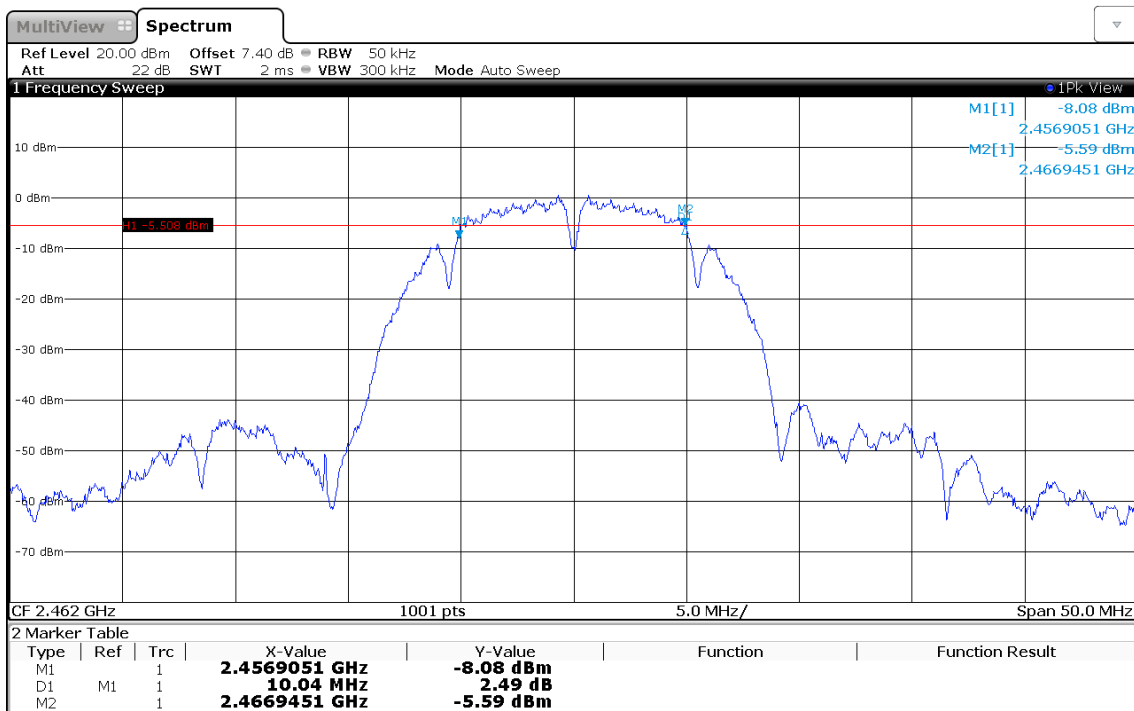

18:21:45 06.06.2019


DTS (6 dB) Bandwidth

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2403.758
 Upper Frequency [MHz]: 2420.142
 6 dB Bandwidth [kHz]: 16384

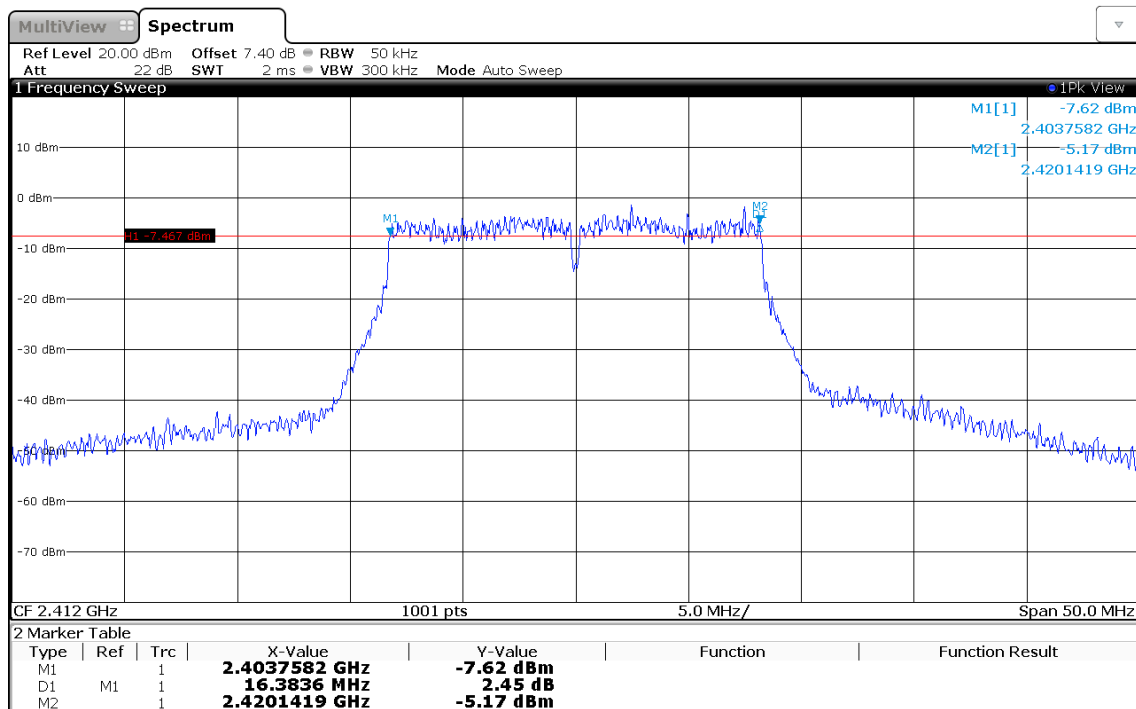

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2428.708
 Upper Frequency [MHz]: 2445.142
 6 dB Bandwidth [kHz]: 16434

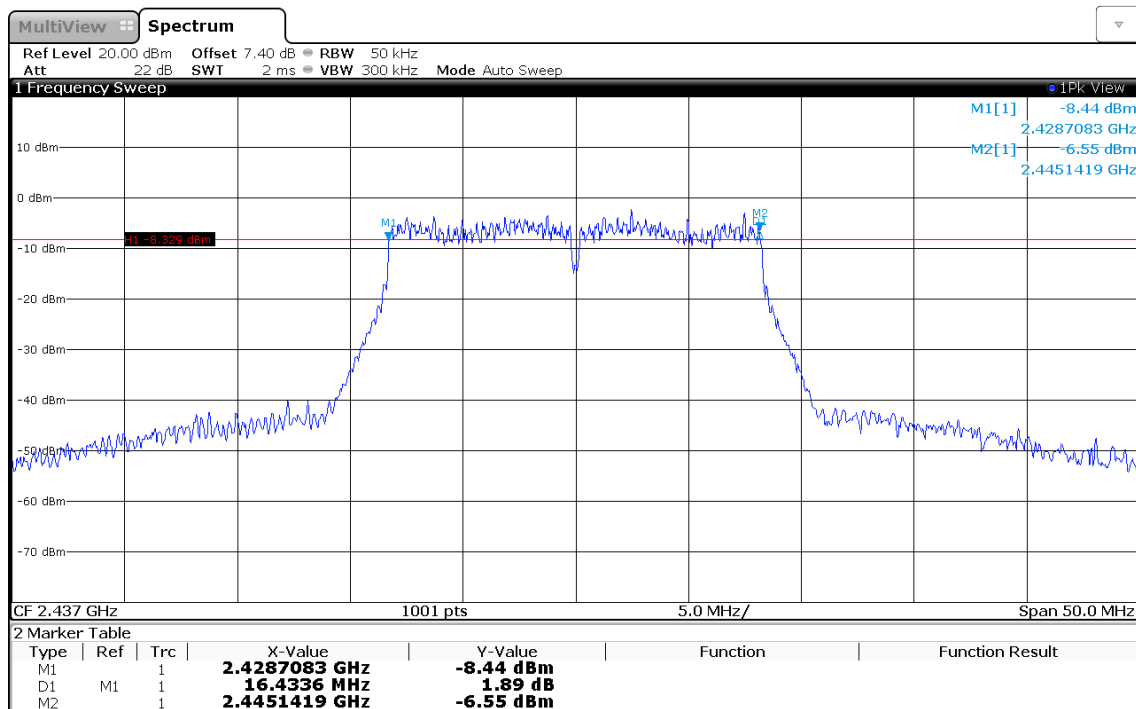

18:23:18 06.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2453.708
 Upper Frequency [MHz]: 2470.142
 6 dB Bandwidth [kHz]: 16434

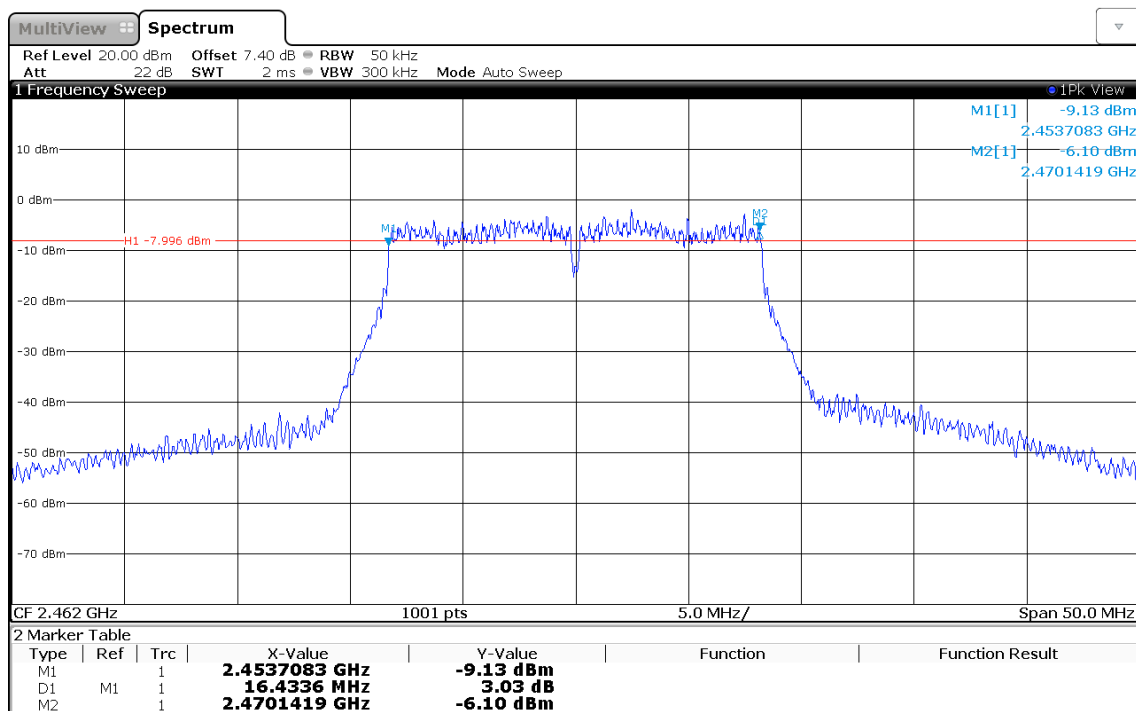

18:23:52 06.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2403.159
 Upper Frequency [MHz]: 2420.691
 6 dB Bandwidth [kHz]: 17532

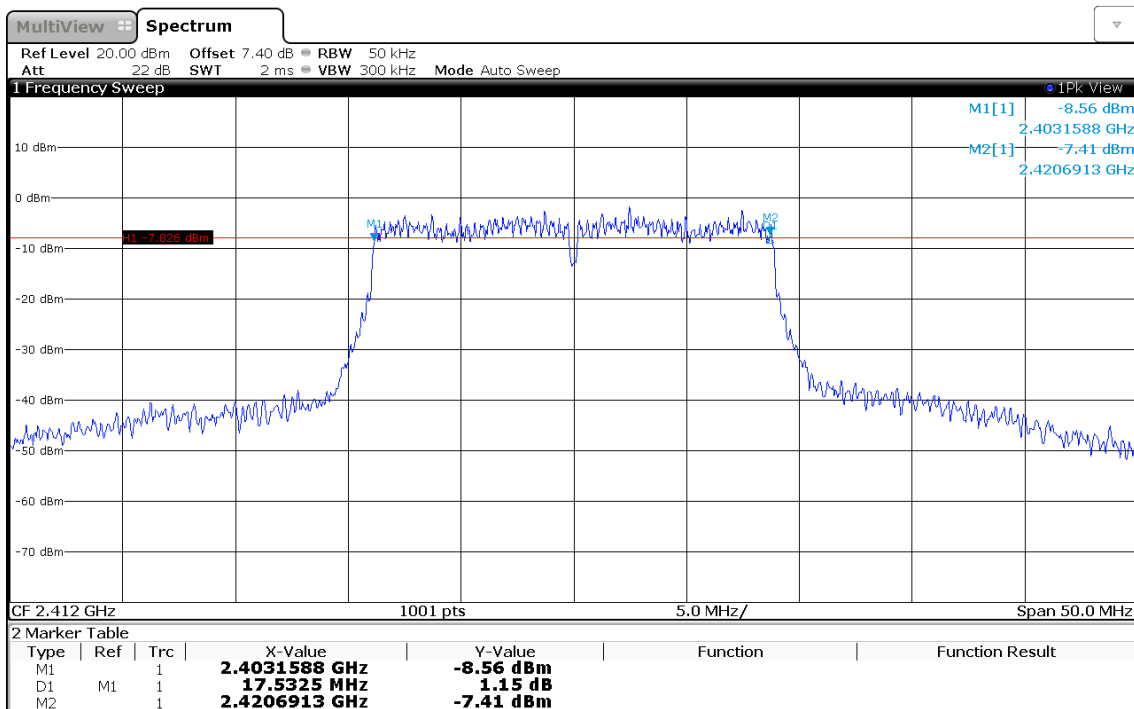

18:24:53 06.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2428.159
 Upper Frequency [MHz]: 2445.691
 6 dB Bandwidth [kHz]: 17532

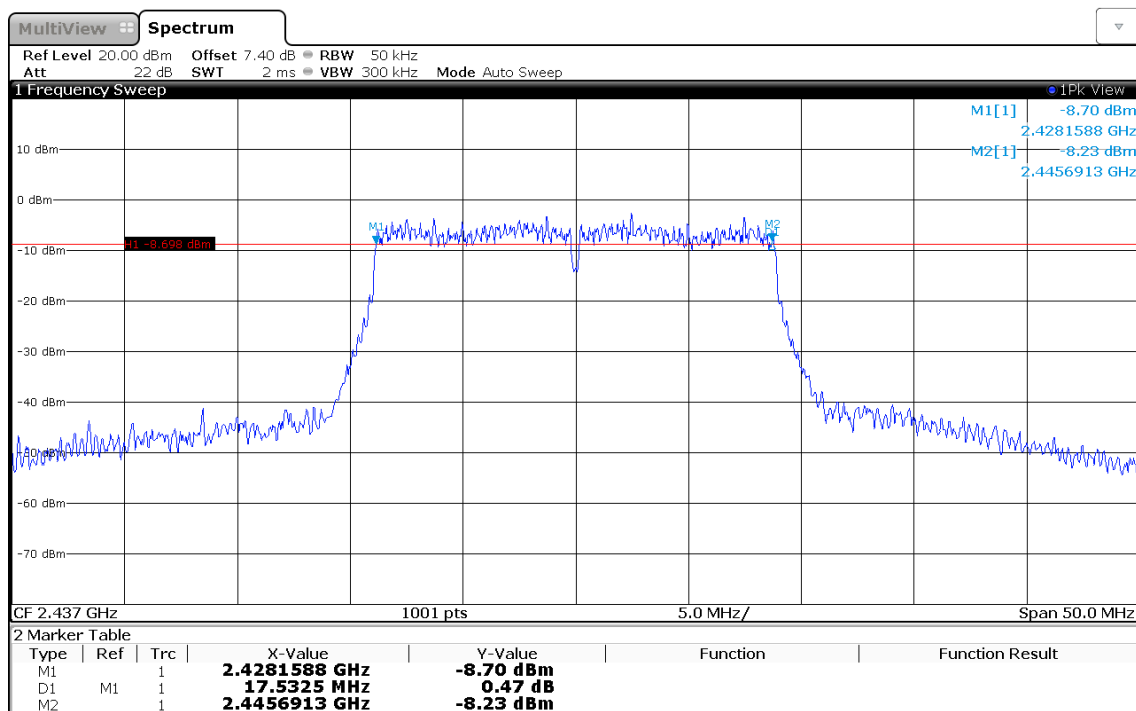

18:25:19 06.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Lower Frequency [MHz]: 2453.159
 Upper Frequency [MHz]: 2470.691
 6 dB Bandwidth [kHz]: 17532

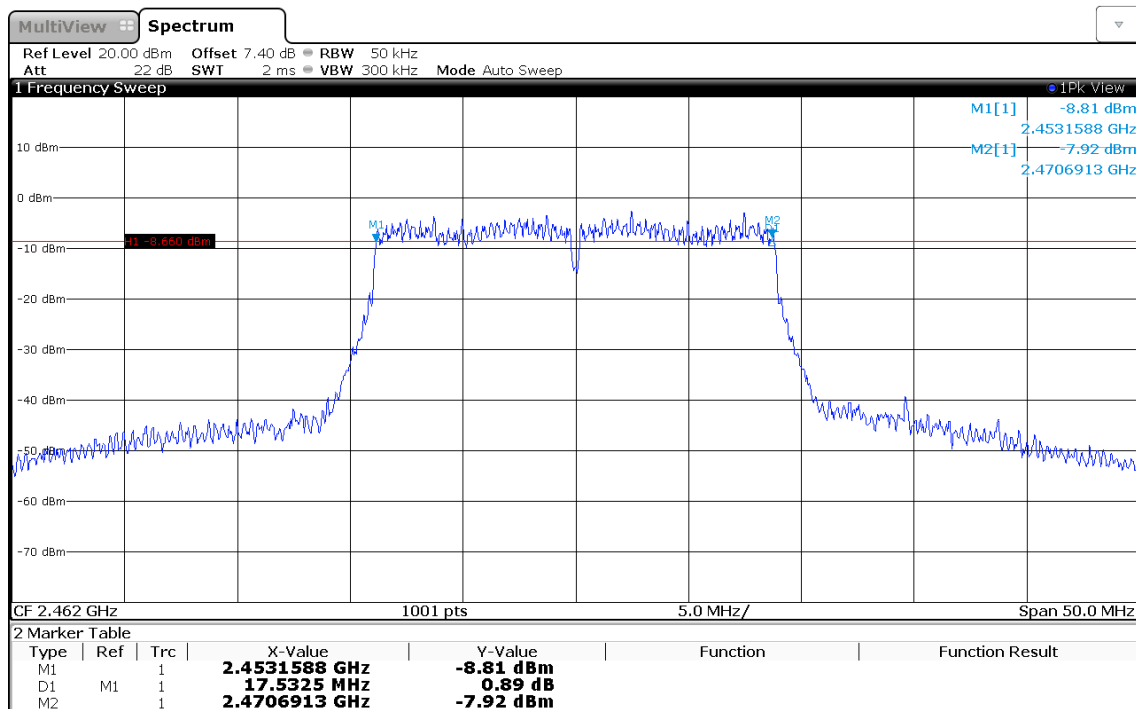

18:25:51 06.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2406.905
 Upper Frequency [MHz]: 2416.945
 6 dB Bandwidth [kHz]: 10040

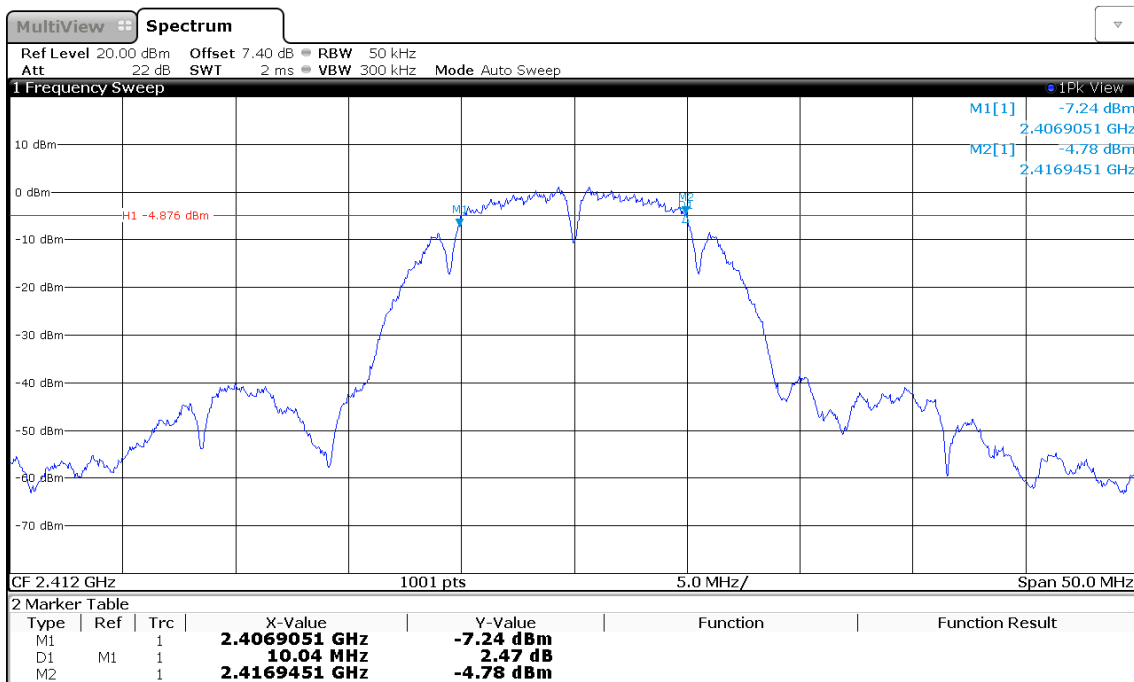

09:03:41 07.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2431.905
 Upper Frequency [MHz]: 2441.945
 6 dB Bandwidth [kHz]: 10040

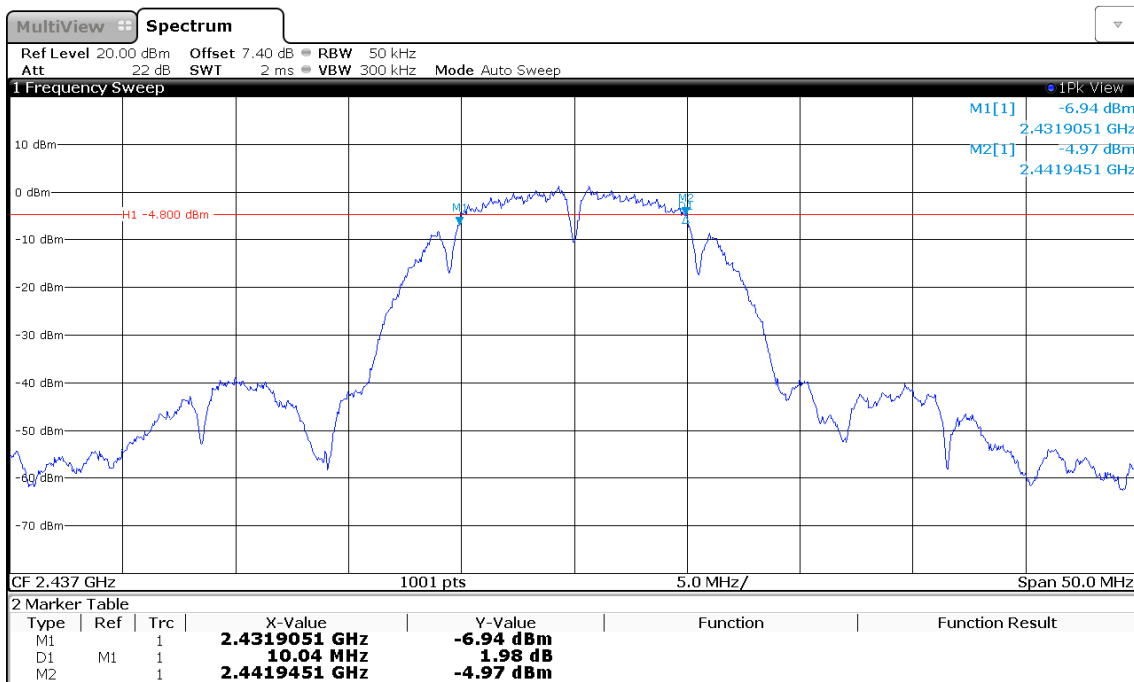

09:05:46 07.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2456.905
 Upper Frequency [MHz]: 2466.945
 6 dB Bandwidth [kHz]: 10040

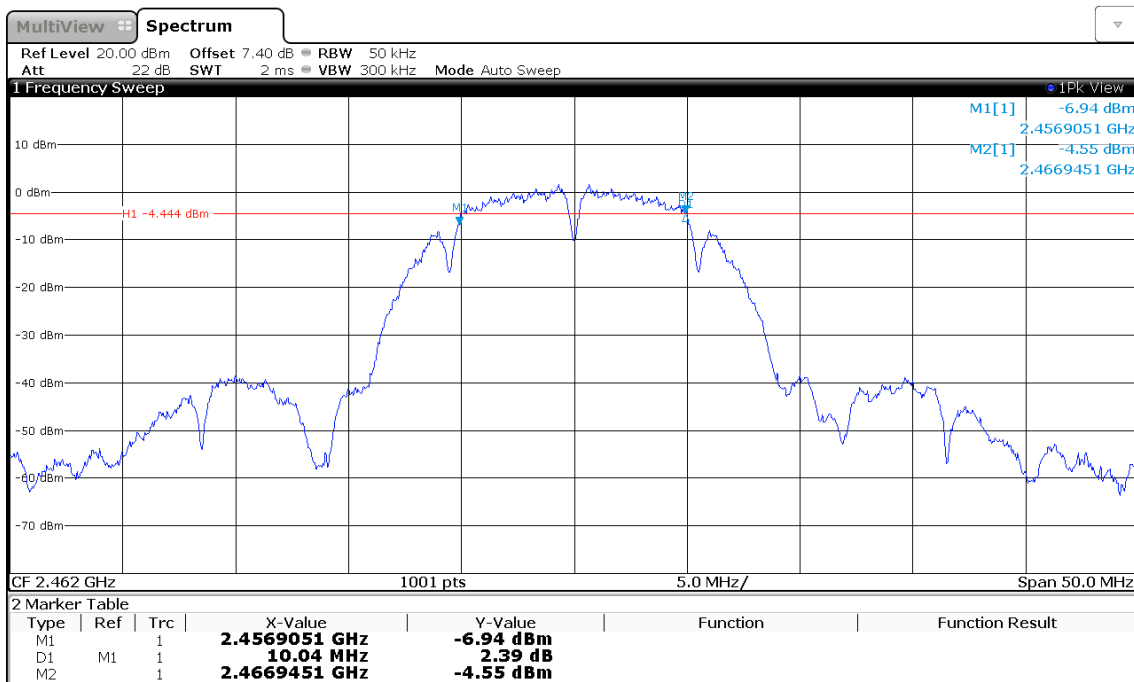

09:06:15 07.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2403.758
 Upper Frequency [MHz]: 2420.192
 6 dB Bandwidth [kHz]: 16434

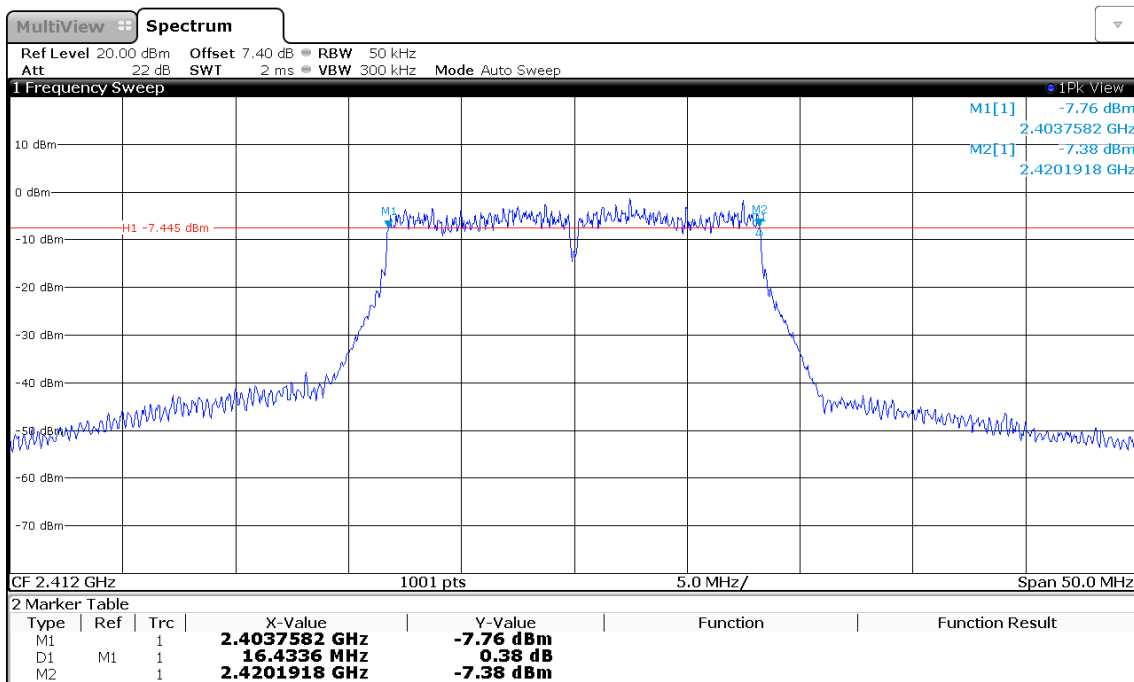

09:07:55 07.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2428.708
 Upper Frequency [MHz]: 2445.142
 6 dB Bandwidth [kHz]: 16434

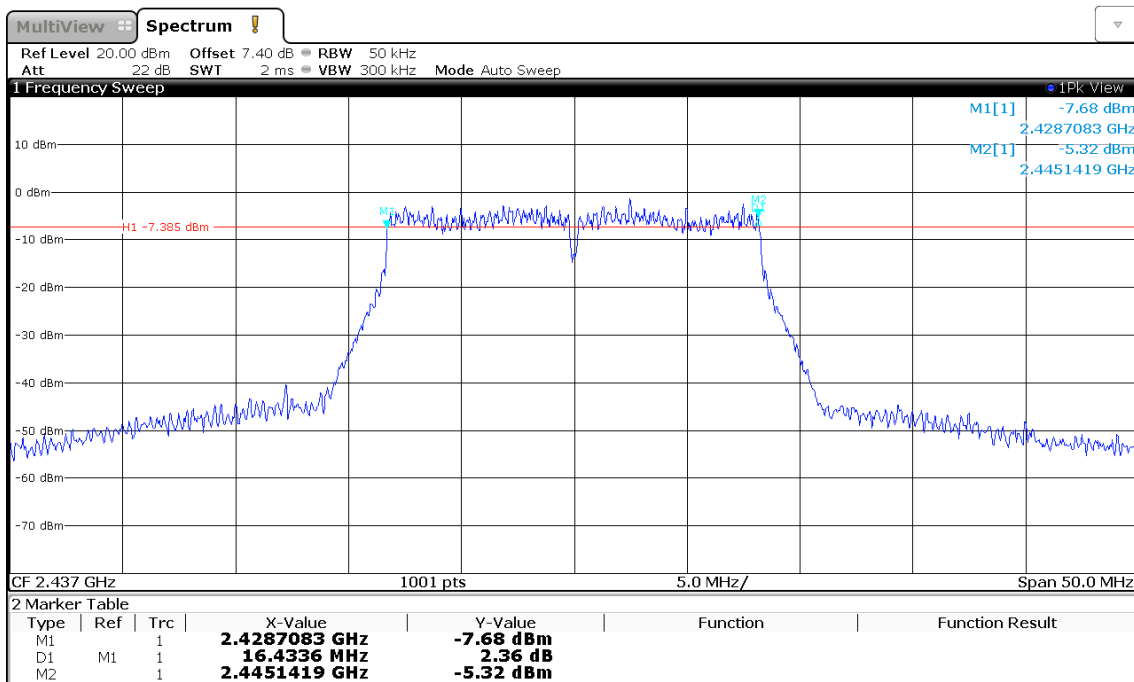

09:08:18 07.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2453.758
 Upper Frequency [MHz]: 2470.192
 6 dB Bandwidth [kHz]: 16434

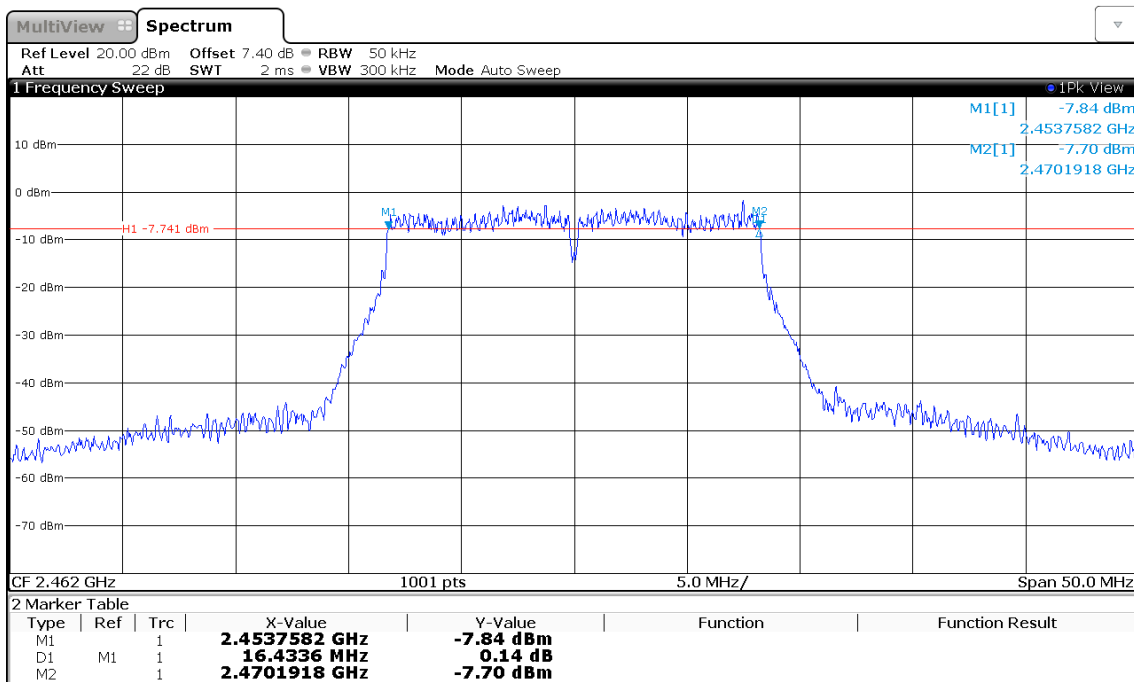

09:08:43 07.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2403.159
 Upper Frequency [MHz]: 2420.691
 6 dB Bandwidth [kHz]: 17532

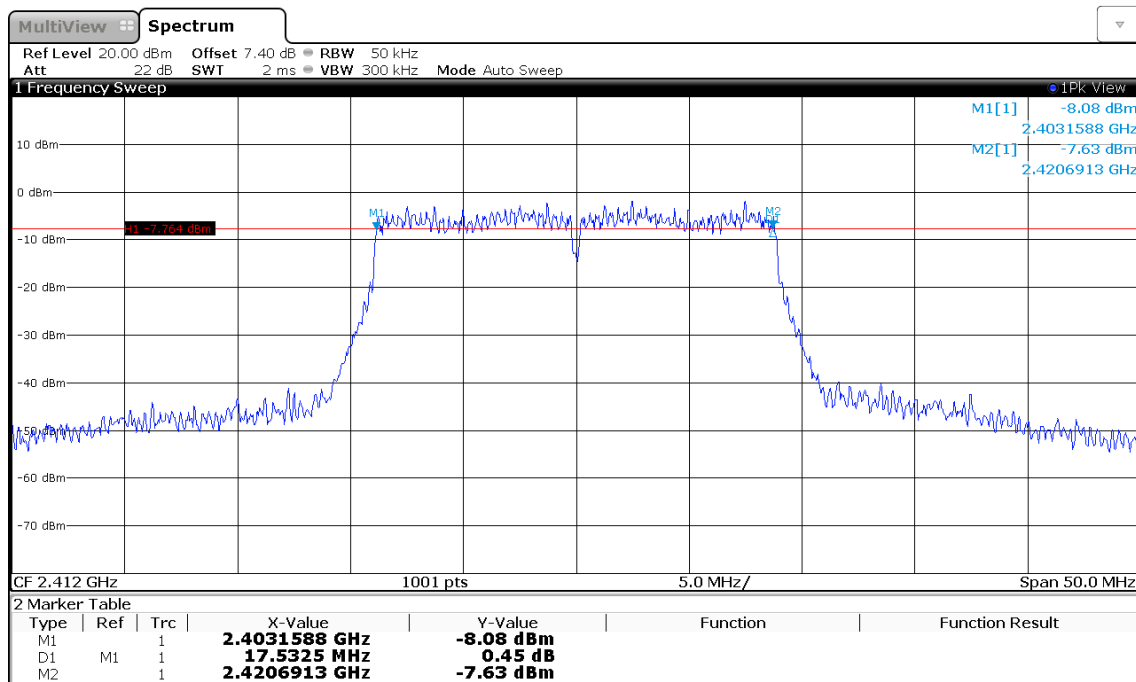

09:09:39 07.06.2019

DTS (6 dB) Bandwidth


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2428.159
 Upper Frequency [MHz]: 2445.691
 6 dB Bandwidth [kHz]: 17532

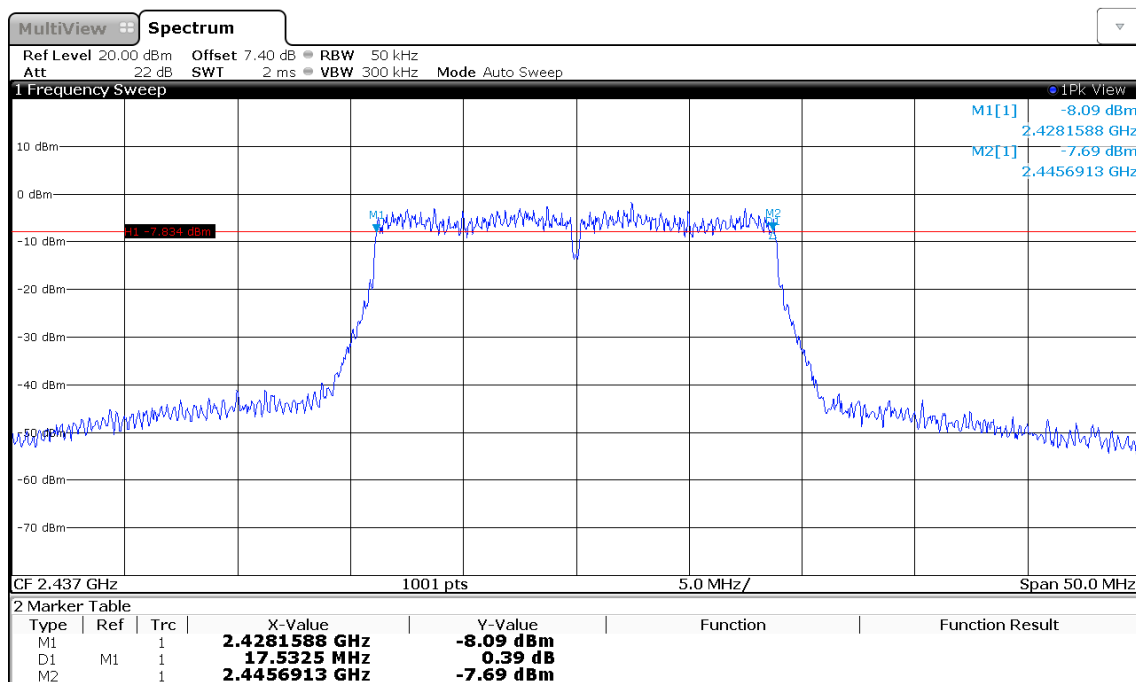

09:10:06 07.06.2019

DTS (6 dB) Bandwidth

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Lower Frequency [MHz]: 2453.159
 Upper Frequency [MHz]: 2470.791
 6 dB Bandwidth [kHz]: 17632

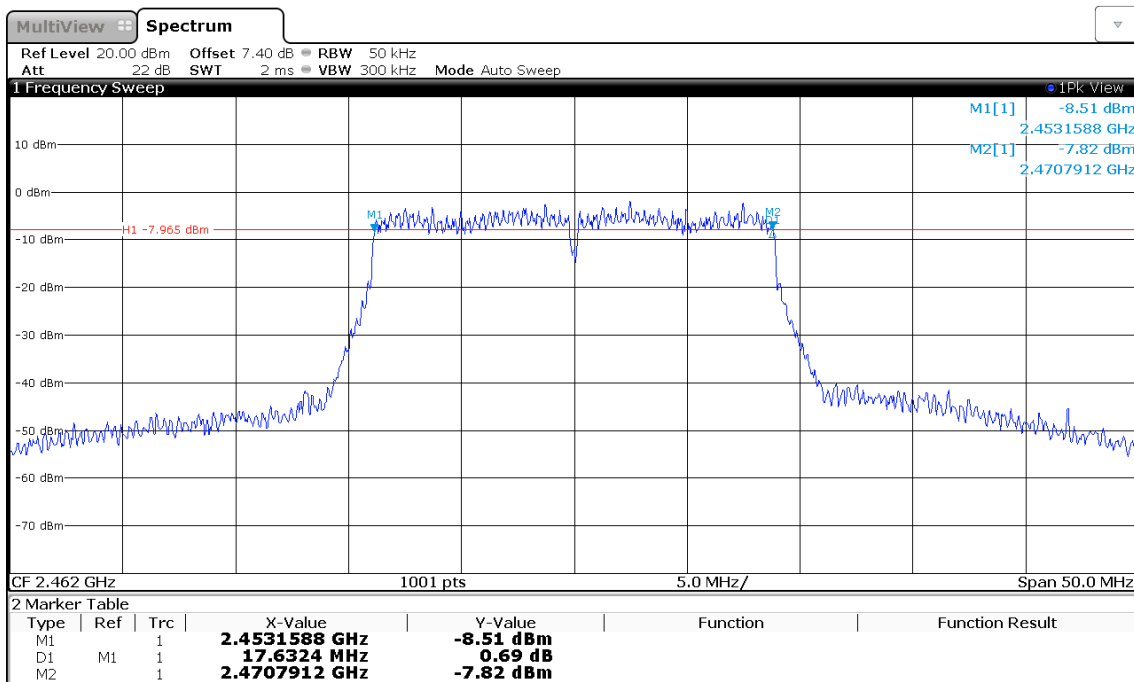

09:10:32 07.06.2019

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

| Test Information | |
|--------------------|---|
| Reference | FCC § 15.247(b)(1); ISED RSS-247, Issue 2 (section 5.4) |
| Measurement Method | ANSI C63.10 11.9.1 |
| Operator | Abdullah Al Jamal |
| Date | 2019-07-25 |

3.3.2 Limits

| Limits |
|---|
| 1 W (30 dBm) |
| The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |

3.3.3 Setup

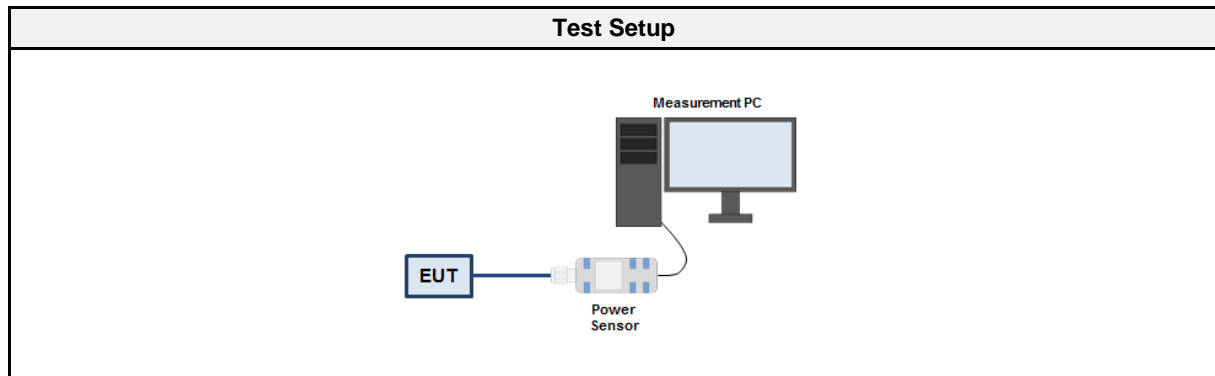

3.3.4 Equipment

| Test Equipment | | | | | |
|----------------|--------------|---------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Power Sensor | R&S | NRP-Z81 | EF00830 | 2018-07 | 2019-07 |

3.3.5 Procedure

| Test Procedure |
|---|
| <ol style="list-style-type: none"> 1. EUT set to test mode (Communication tester is used if needed) 2. The EUT antenna port is connected to a wideband power sensor 3. The peak power is measured with the power sensor 4. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain and the power is summed up |

3.3.6 Results

| Test Results - DSSS | | | | |
|---------------------|--------------------|--------------------|-----------|---------|
| Channel [MHz] | Power Port 1 [dBm] | Power Port 2 [dBm] | Limit [W] | Verdict |
| 2412 | 15.9 | 16.2 | 1.0 | PASS |
| 2437 | 16.1 | 15.9 | 1.0 | PASS |
| 2462 | 16.5 | 16.3 | 1.0 | PASS |

| Test Results - OFDM | | | | |
|---------------------|--------------------|--------------------|-----------|---------|
| Channel [MHz] | Power Port 1 [dBm] | Power Port 2 [dBm] | Limit [W] | Verdict |
| 2412 | 22.0 | 21.2 | 1.0 | PASS |
| 2437 | 21.7 | 21.3 | 1.0 | PASS |
| 2462 | 22.2 | 21.8 | 1.0 | PASS |

| Test Results - HT20 | | | | | | |
|---------------------|--------------------|--------------------|-------------------|-----------------|-----------|---------|
| Channel [MHz] | Power Port 1 [dBm] | Power Port 2 [dBm] | Total Power [dBm] | Total Power [W] | Limit [W] | Verdict |
| 2412 | 21.9 | 21.3 | 24.6 | 0.290 | 1.0 | PASS |
| 2437 | 22.2 | 21.3 | 24.8 | 0.301 | 1.0 | PASS |
| 2462 | 22.4 | 21.6 | 25.0 | 0.318 | 1.0 | PASS |

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

| Test Information | |
|--------------------|--|
| Reference | FCC § 15.247(e); ISED RSS-247, Issue 2 (section 5.2) |
| Measurement Method | ANSI C63.10 11.10.2, 14.3.2 |
| Operator | Abdullah Al Jamal |
| Date | 2019-06-07 |

3.4.2 Limits

| Limits |
|---------------|
| 8 dBm / 3 kHz |

3.4.3 Setup

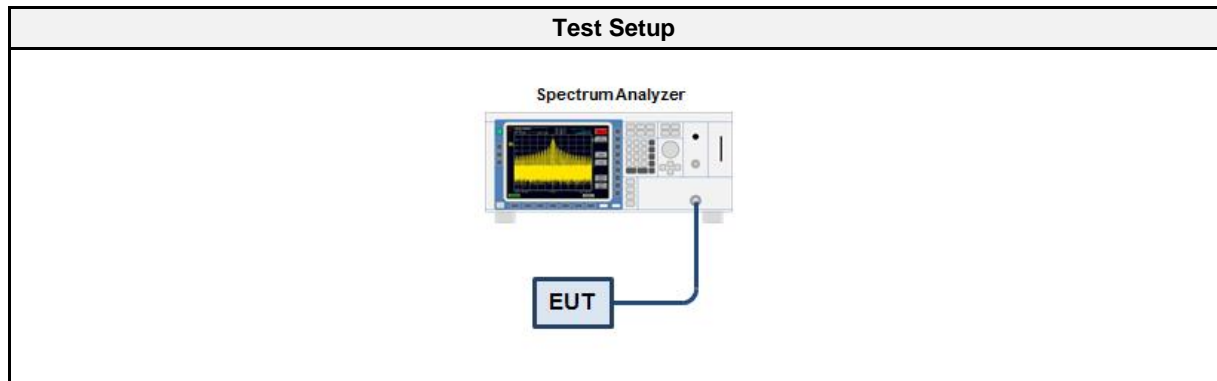

3.4.4 Equipment

| Test Equipment | | | | | |
|-------------------|--------------|--------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer | R&S | FSW 43 | EF00896 | 2018-07 | 2019-07 |

3.4.5 Procedure

| Test Procedure |
|---|
| <ol style="list-style-type: none"> 1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW ≥ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain |

3.4.6 Results


| Test Results - DSSS | | | | |
|---------------------|----------------------|----------------------|------------------|---------|
| Channel [MHz] | PSD Port 1 [dBm/RBW] | PSD Port 2 [dBm/RBW] | Limit [dBm/3kHz] | Verdict |
| 2412 | 3.22 | 3.70 | 8.0 | PASS |
| 2437 | 3.38 | 3.23 | 8.0 | PASS |
| 2462 | 3.78 | 3.86 | 8.0 | PASS |

| Test Results - OFDM | | | | |
|---------------------|----------------------|----------------------|------------------|---------|
| Channel [MHz] | PSD Port 1 [dBm/RBW] | PSD Port 2 [dBm/RBW] | Limit [dBm/3kHz] | Verdict |
| 2412 | 1.49 | 1.77 | 8.0 | PASS |
| 2437 | 0.95 | 1.41 | 8.0 | PASS |
| 2462 | 1.17 | 1.32 | 8.0 | PASS |

| Test Results - HT20 | | | | | |
|---------------------|----------------------|----------------------|---------------------|------------------|---------|
| Channel [MHz] | PSD Port 1 [dBm/RBW] | PSD Port 2 [dBm/RBW] | Total PSD [dBm/RBW] | Limit [dBm/3kHz] | Verdict |
| 2412 | 0.73 | 1.33 | 4.05 | 8.0 | PASS |
| 2437 | 0.76 | 1.09 | 3.94 | 8.0 | PASS |
| 2462 | 0.86 | 0.92 | 3.90 | 8.0 | PASS |
| RBW = 100 kHz | | | | | |


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2412.509
 Spectral Density [dBm/RBW]: 3.697
 Resolution Bandwidth [kHz]: 100 kHz

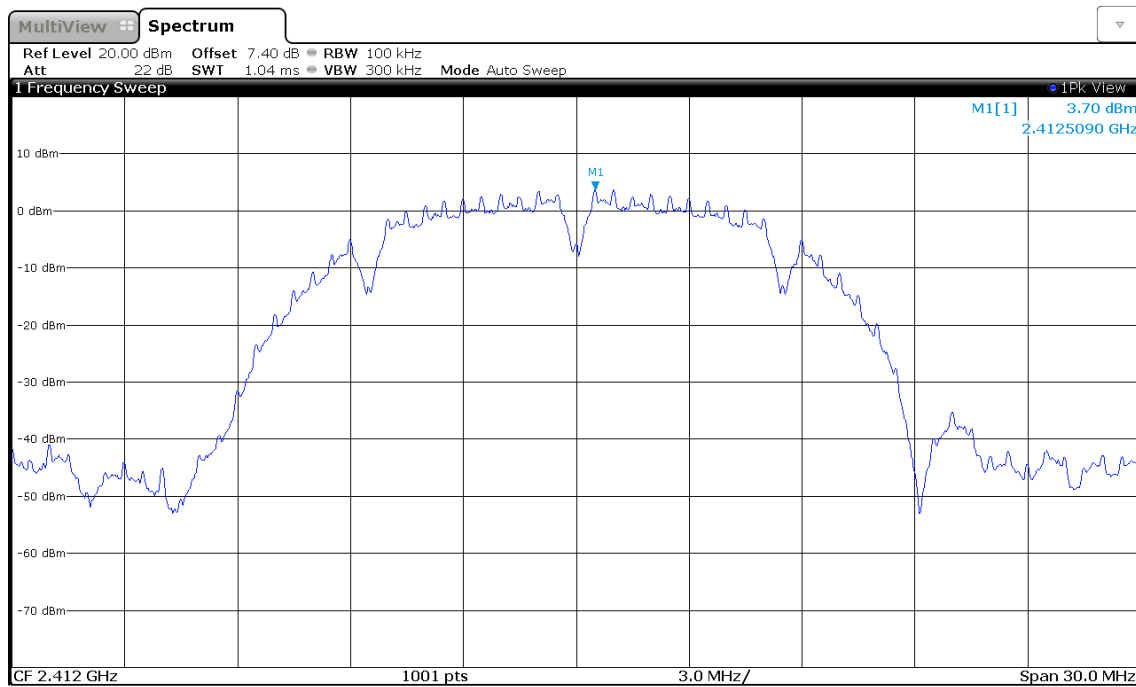

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2436.491
 Spectral Density [dBm/RBW]: 3.226
 Resolution Bandwidth [kHz]: 100 kHz

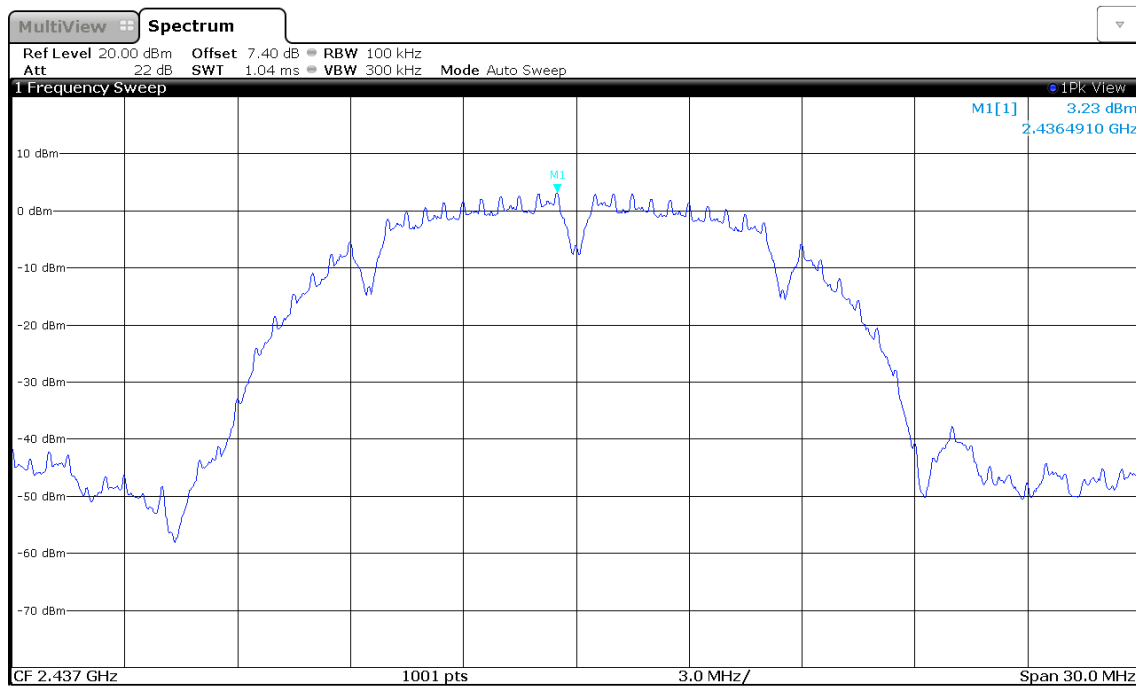

08:38:13 07.06.2019


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2462.480
 Spectral Density [dBm/RBW]: 3.856
 Resolution Bandwidth [kHz]: 100 kHz

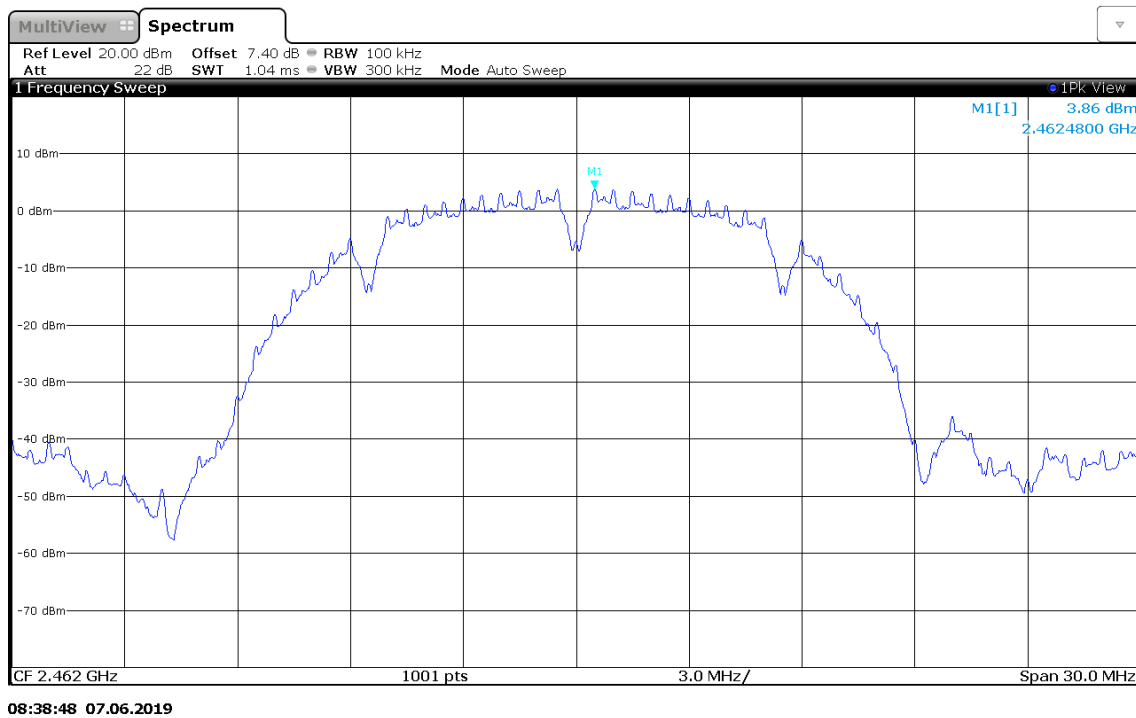


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2419.493
 Spectral Density [dBm/RBW]: 1.767
 Resolution Bandwidth [kHz]: 100 kHz

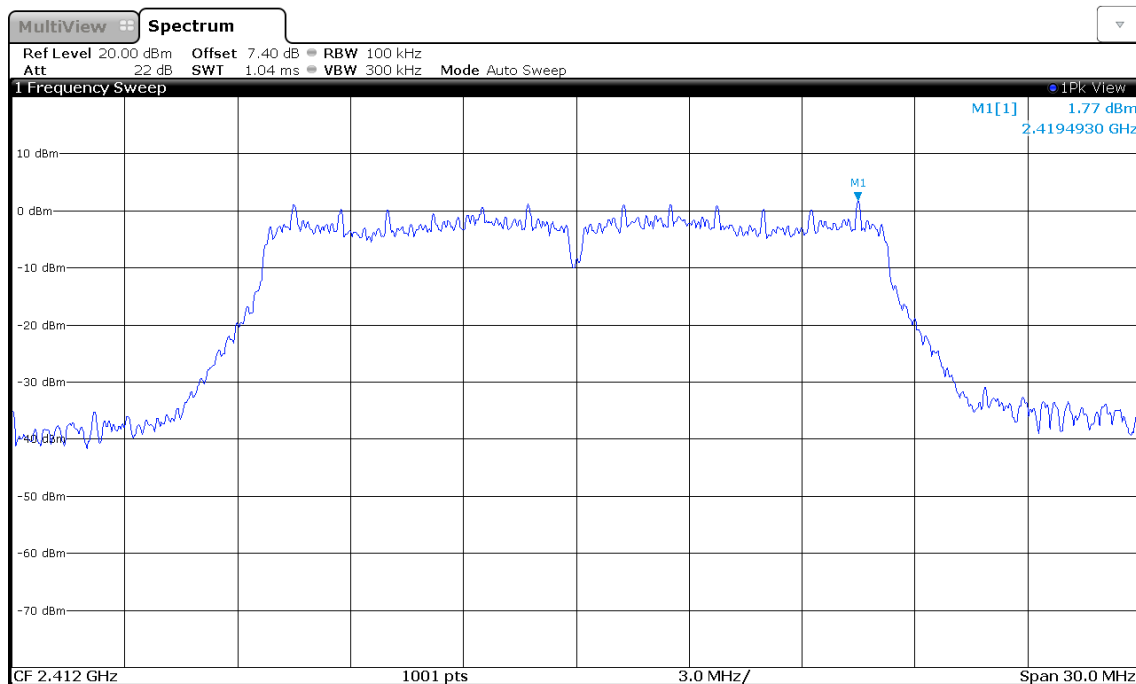

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2439.488
 Spectral Density [dBm/RBW]: 1.406
 Resolution Bandwidth [kHz]: 100 kHz

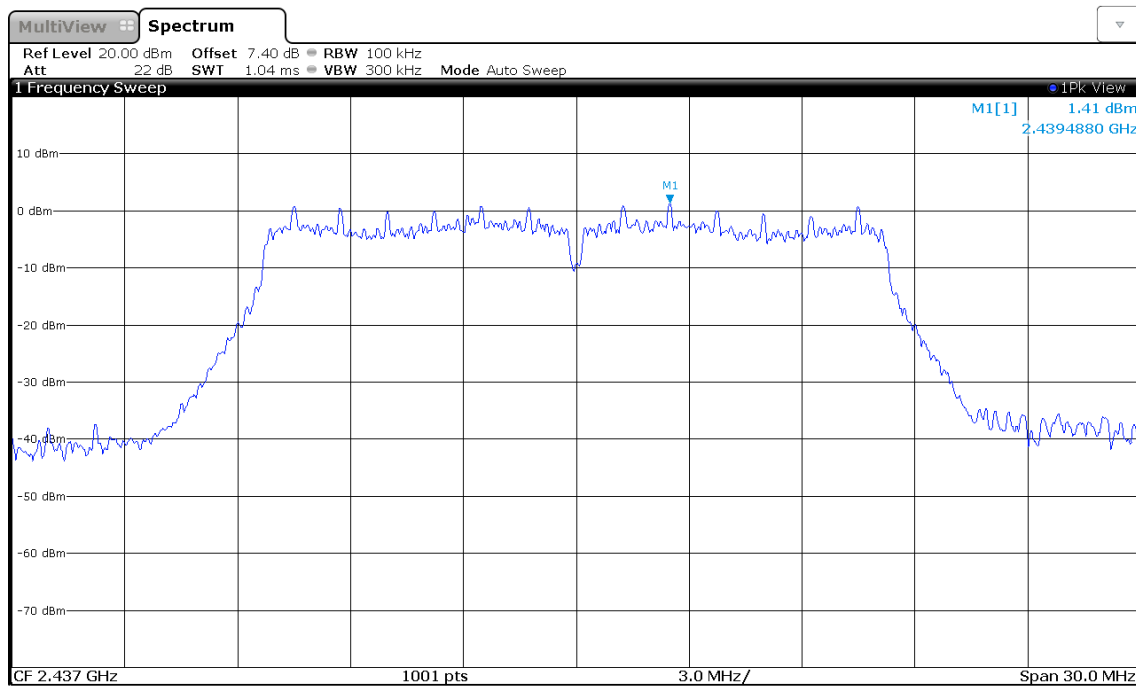

08:40:47 07.06.2019

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2464.488
 Spectral Density [dBm/RBW]: 1.315
 Resolution Bandwidth [kHz]: 100 kHz

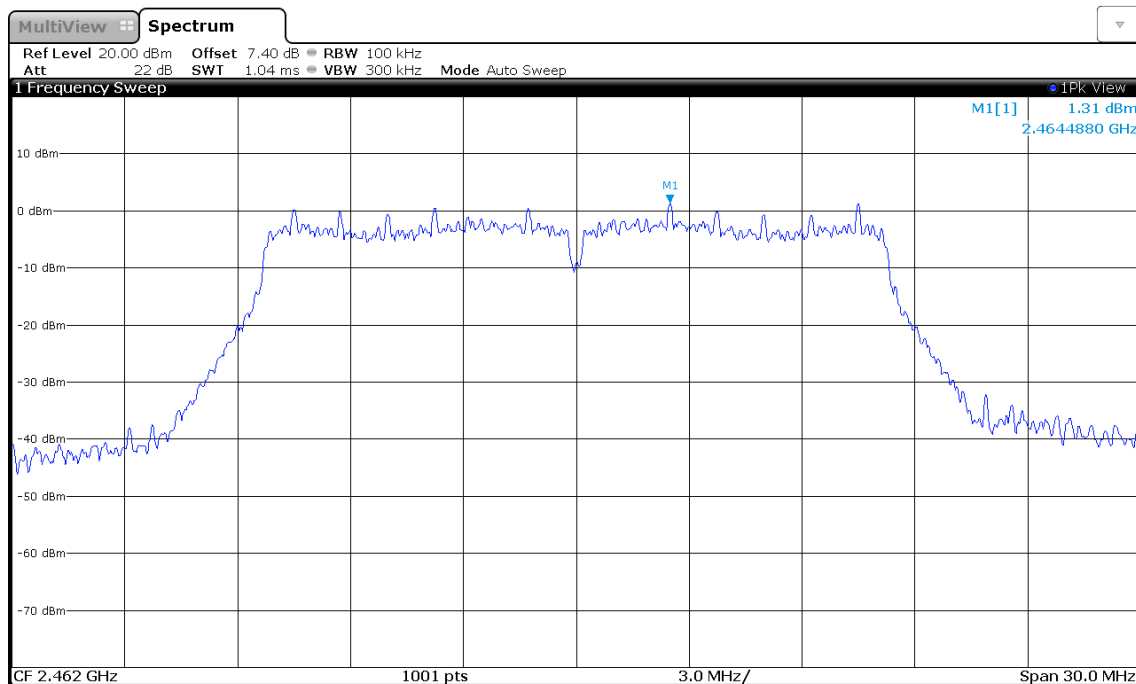

08:41:17 07.06.2019

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2413.259
 Spectral Density [dBm/RBW]: 1.333
 Resolution Bandwidth [kHz]: 100 kHz

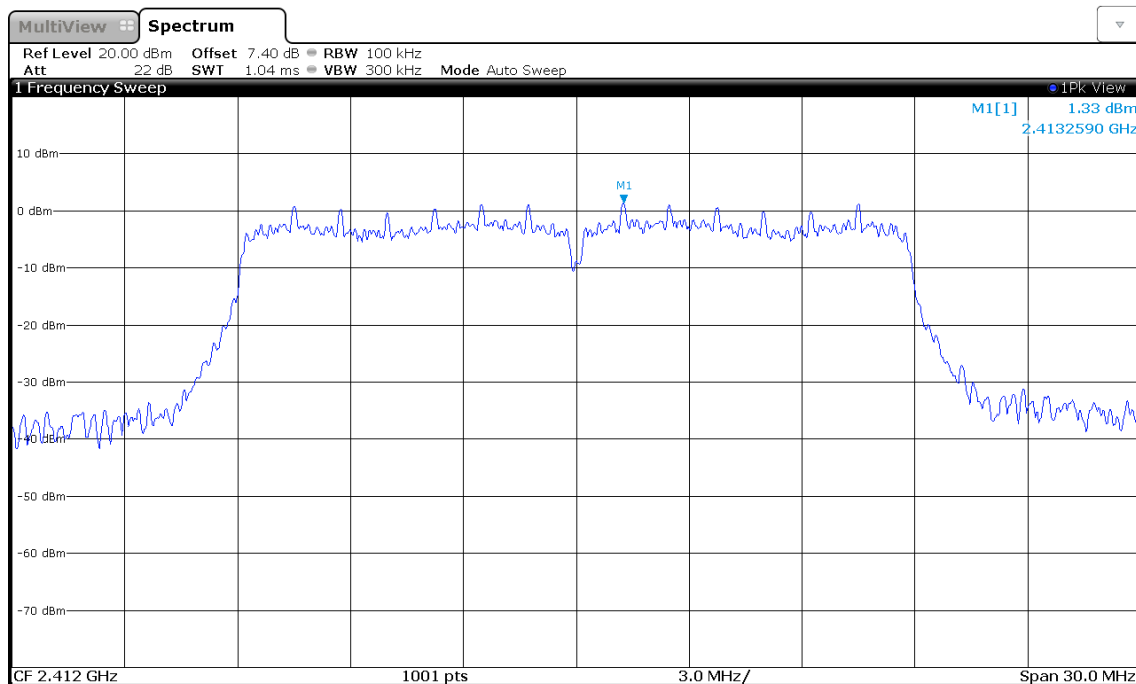

08:42:27 07.06.2019


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Peak Frequency [MHz]: 2439.488
 Spectral Density [dBm/RBW]: 1.085
 Resolution Bandwidth [kHz]: 100 kHz

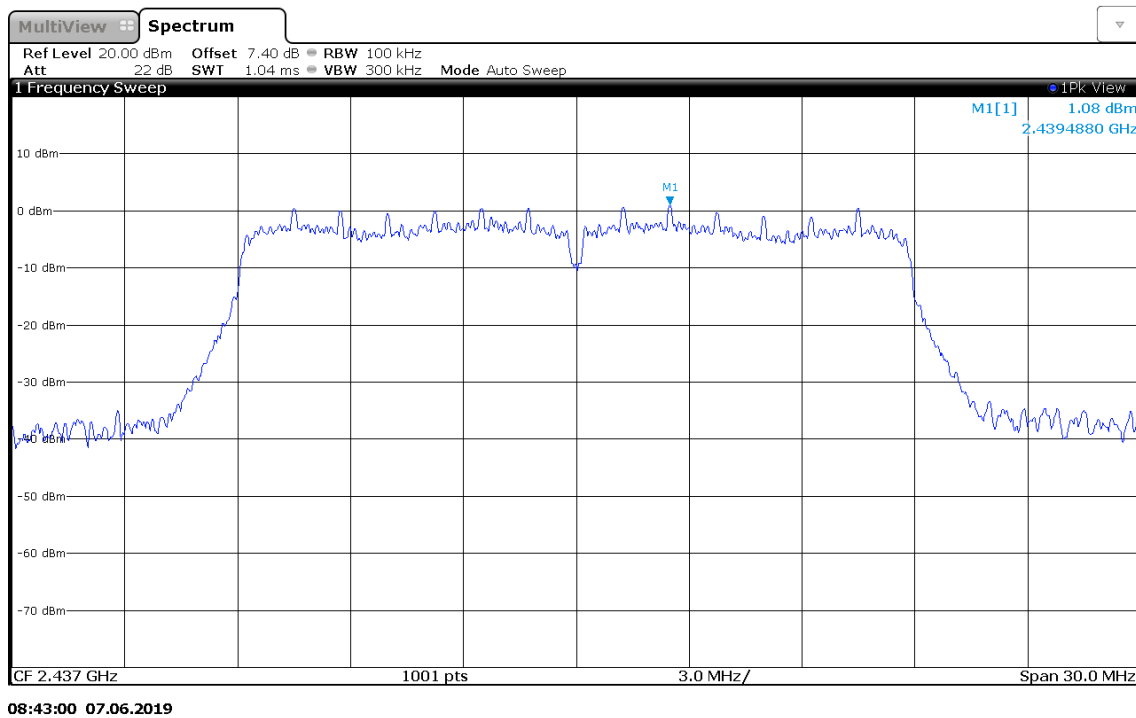

Peak Power Spectral Density


| | |
|-----------------------------|---|
| Project Number: | G0M-1905-8256 |
| Applicant: | BIOTRONIK SE & Co. KG |
| Model Description: | Renamic Neo Programming Device |
| Model: | Renamic Neo |
| Test Sample ID: | 24167 |
| Reference Standards: | FCC 15.247, RSS-247 |
| Reference Method: | ANSI C63.10:2013, Section 11.10.2 |
| Operational Mode: | IEEE 802.11 n HT20, Channel: 11, 2462 MHz |
| Operating Conditions: | Tnom/Vnom |
| Operator: | Abdullah Al Jamal |
| Test Site: | Eurofins Product Service GmbH |
| Test Date: | 2019-06-07 |
| Antenna port: | B |
| Peak Frequency [MHz]: | 2464.488 |
| Spectral Density [dBm/RBW]: | 0.919 |
| Resolution Bandwidth [kHz]: | 100 kHz |

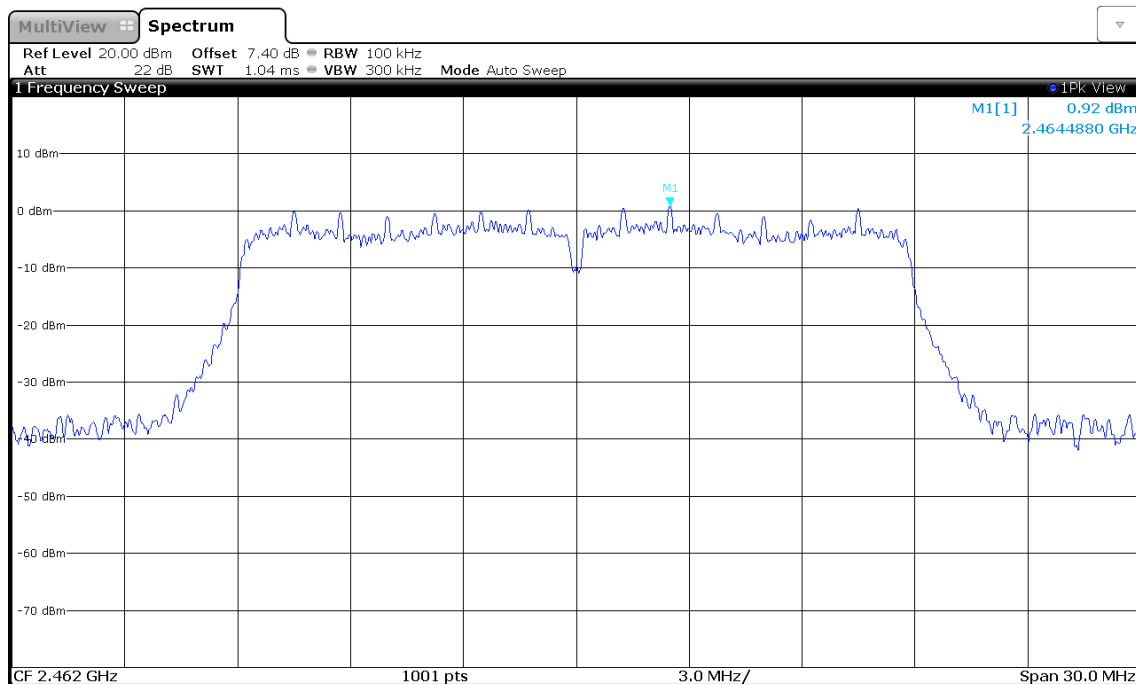

08:43:29 07.06.2019


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2411.491
 Spectral Density [dBm/RBW]: 3.219
 Resolution Bandwidth [kHz]: 100 kHz

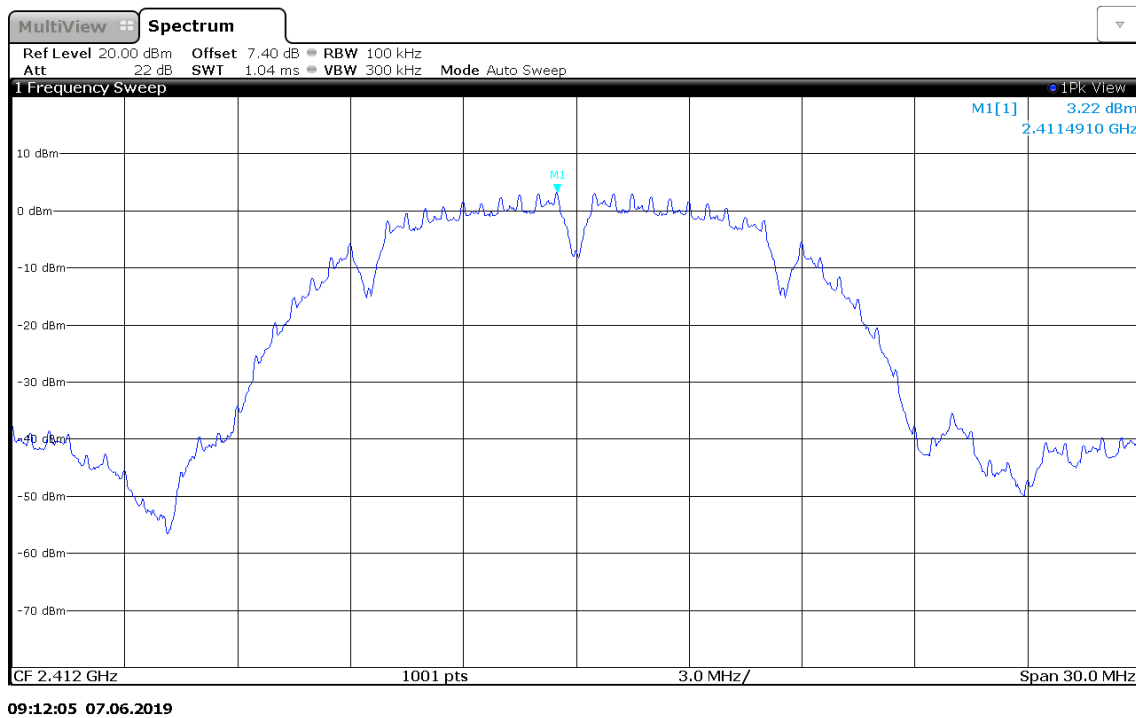


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2437.480
 Spectral Density [dBm/RBW]: 3.376
 Resolution Bandwidth [kHz]: 100 kHz

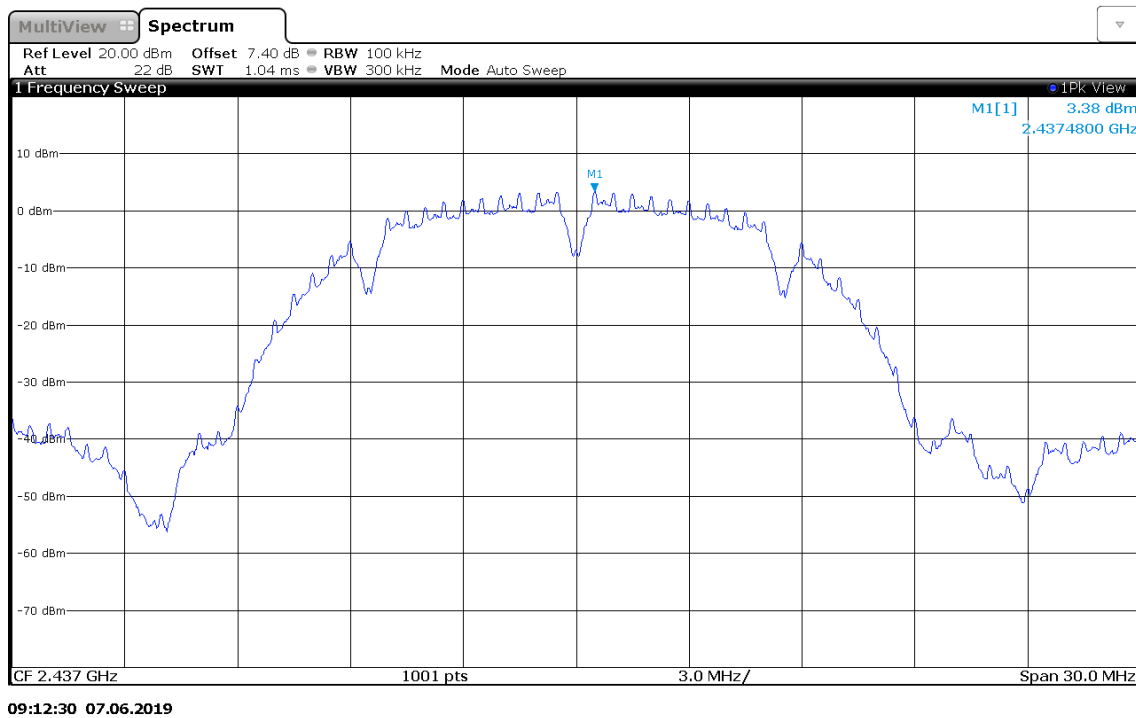


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2462.480
 Spectral Density [dBm/RBW]: 3.784
 Resolution Bandwidth [kHz]: 100 kHz

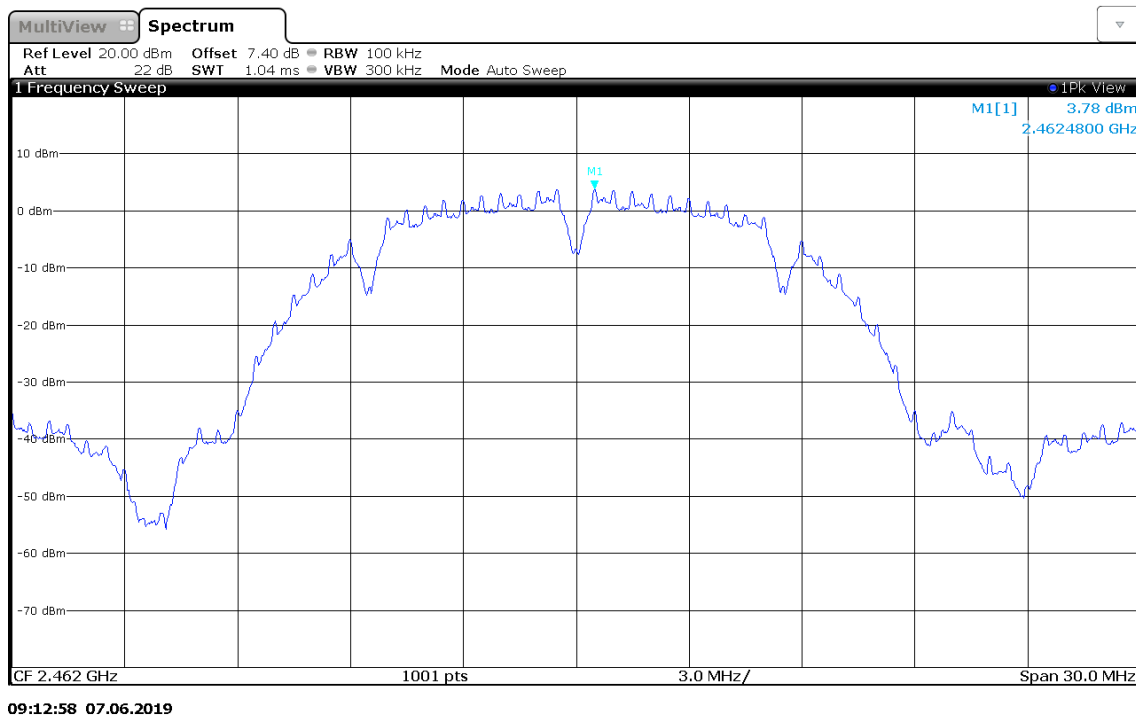

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2414.488
 Spectral Density [dBm/RBW]: 1.486
 Resolution Bandwidth [kHz]: 100 kHz

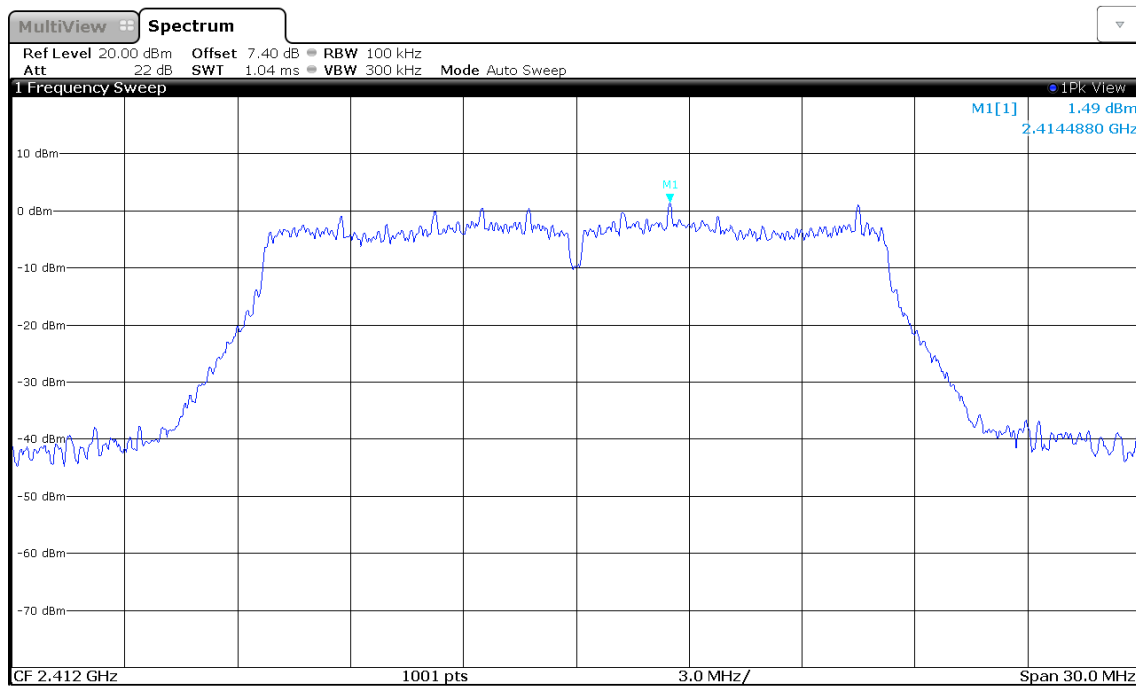

09:14:13 07.06.2019

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2439.488
 Spectral Density [dBm/RBW]: 0.950
 Resolution Bandwidth [kHz]: 100 kHz

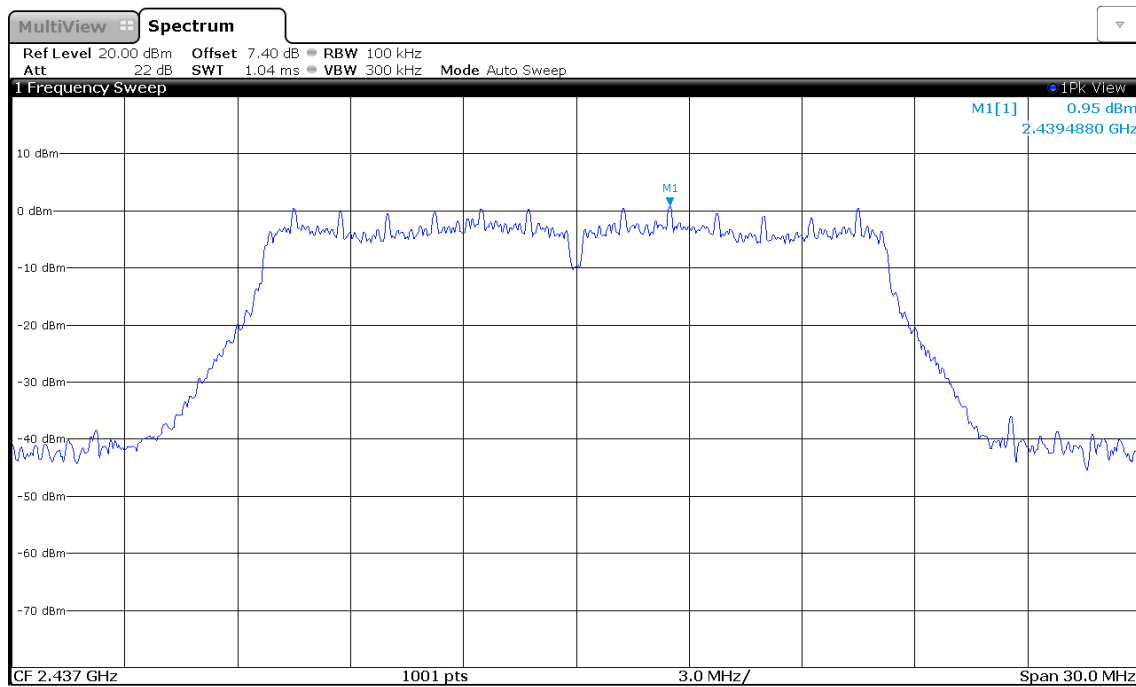

09:14:45 07.06.2019


Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2464.488
 Spectral Density [dBm/RBW]: 1.173
 Resolution Bandwidth [kHz]: 100 kHz

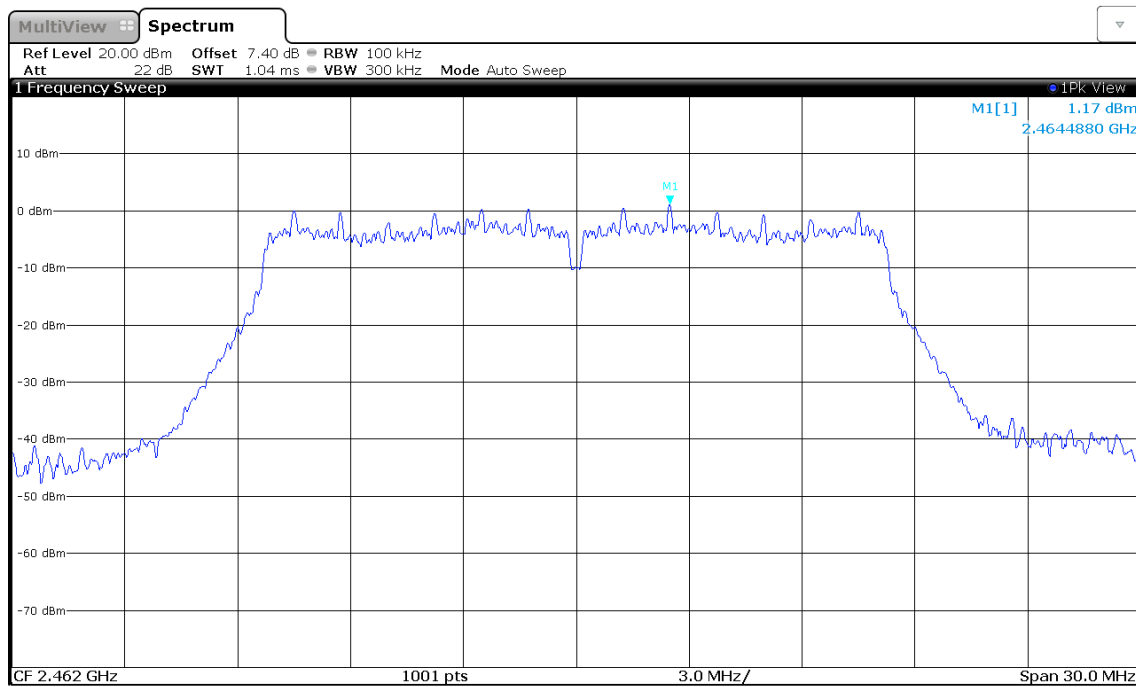

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2414.488
 Spectral Density [dBm/RBW]: 0.734
 Resolution Bandwidth [kHz]: 100 kHz

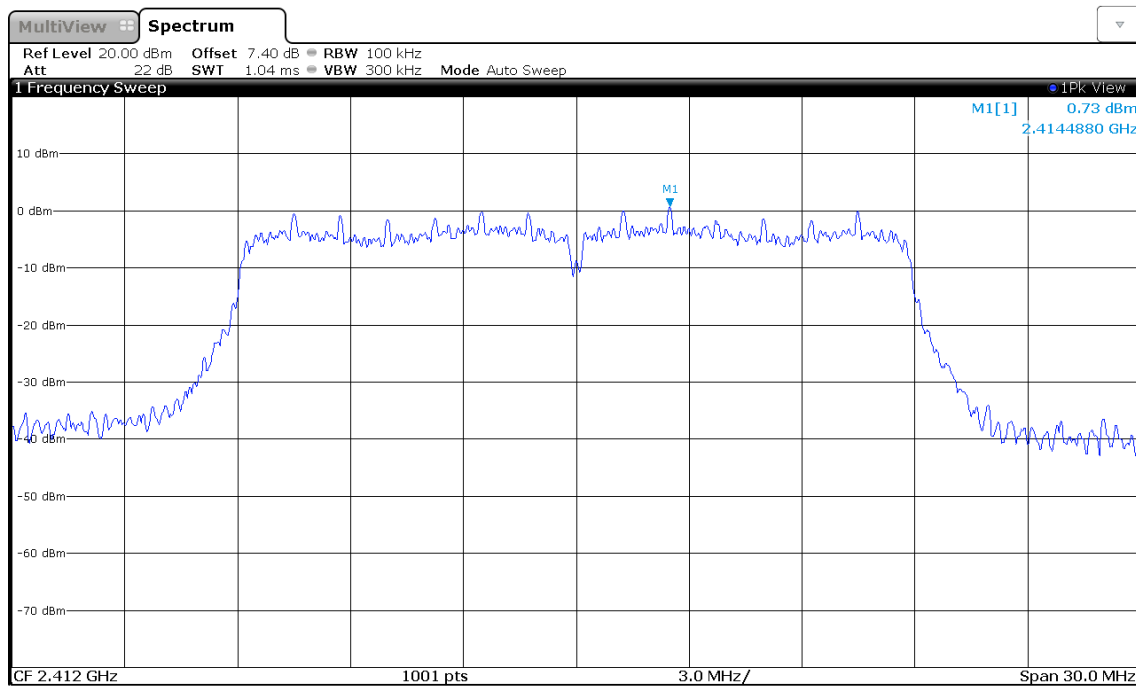

09:27:27 07.06.2019

Peak Power Spectral Density


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2439.488
 Spectral Density [dBm/RBW]: 0.762
 Resolution Bandwidth [kHz]: 100 kHz

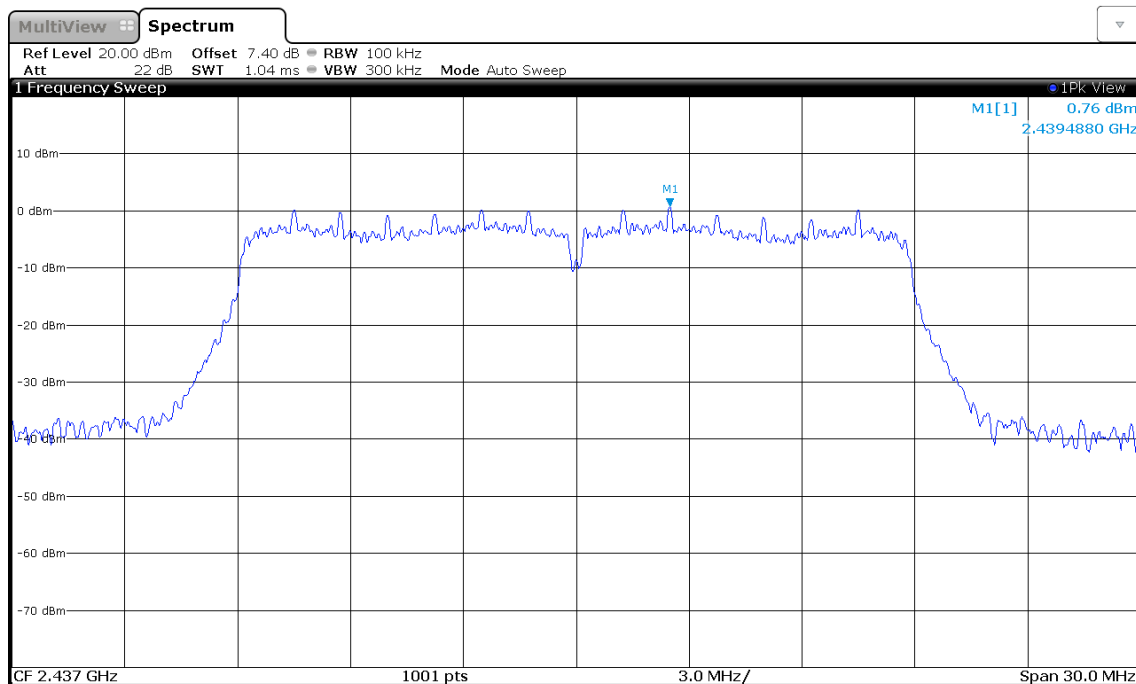

09:28:12 07.06.2019

Peak Power Spectral Density

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Peak Frequency [MHz]: 2464.488
 Spectral Density [dBm/RBW]: 0.861
 Resolution Bandwidth [kHz]: 100 kHz

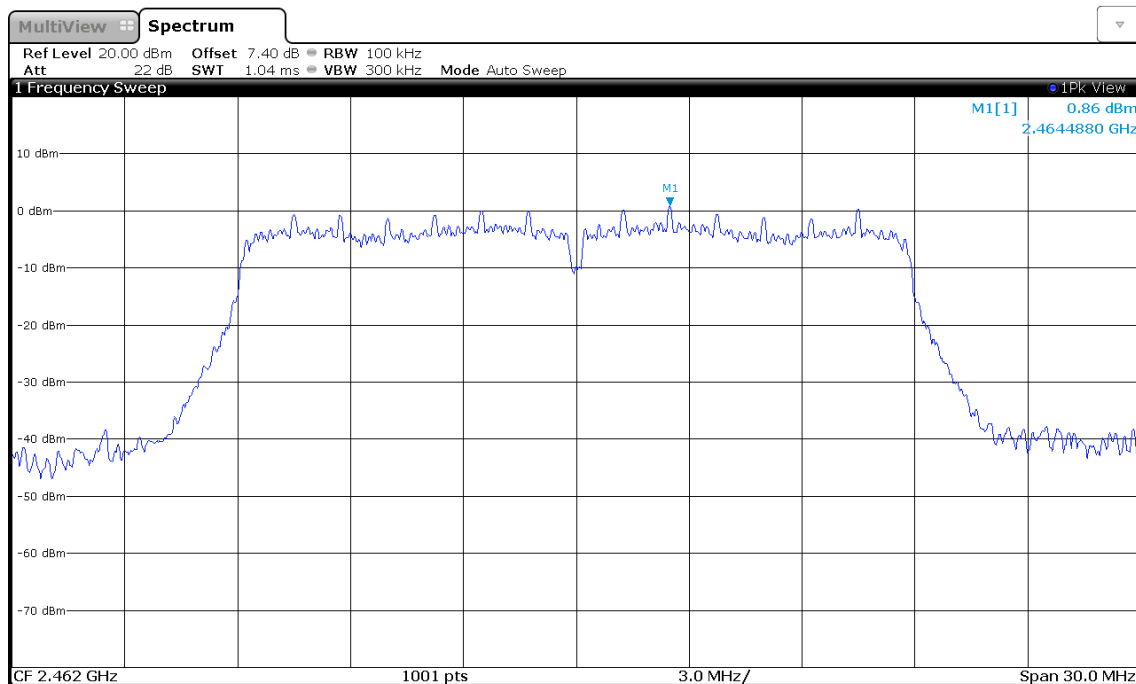

09:28:41 07.06.2019

3.5 Test Conditions and Results - AC powerline conducted emissions

3.5.1 Information


| Test Information | |
|--------------------|---|
| Reference | FCC § 15.207; ISED RSS-247, Issue 2 (section 3.1) |
| Measurement Method | ANSI C63.10 6.2 |
| Operator | Abdullah Al Jamal |
| Date | 2019-06-24 |

3.5.2 Limits

| Limits | | |
|-----------------|-------------------|----------------|
| Frequency [MHz] | Quasi-Peak [dBµV] | Average [dBµV] |
| 0.15 - 0.5 | 66 - 56* | 56 - 46* |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

* Limit decreases linearly with the logarithm of the frequency

3.5.3 Setup

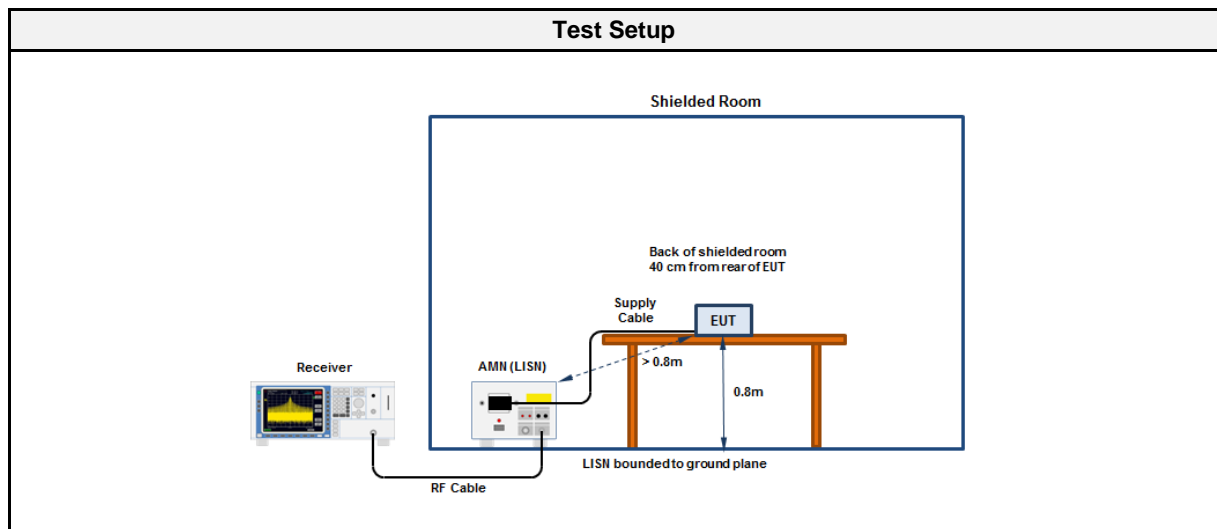

3.5.4 Equipment


| Test Software | | | |
|---------------|------------------|------------|-----------|
| Description | Manufacturer | Name | Version |
| EMC Software | DARE Instruments | RadiMation | 2016.1.10 |

| Test Equipment | | | | | |
|----------------|--------------|---------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| EMI Receiver | R&S | ESU 26 | EF00241 | 2017-07 | 2019-07 |
| LISN | R&S | ESH3-Z5 | EF00036 | 2017-01 | 2019-07 |

EMI voltage test in the ac-mains according to FCC 47 CFR §15.207

Project number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6°C, Unom: 120 VAC (external power supply)
 LISN: ESH3-Z5 (N)
 Mode: 2437 MHz
 Test Date: 2019-06-24
 Note:


Index 42

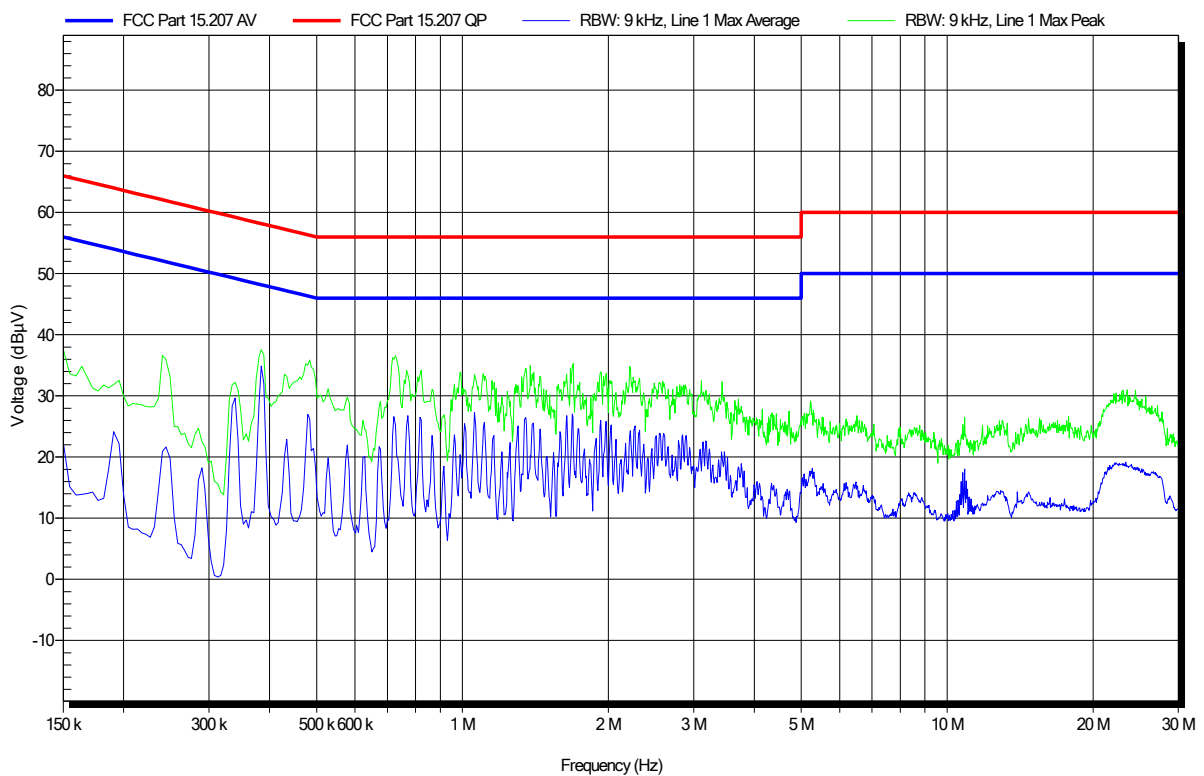

EMI voltage test in the ac-mains according to FCC 47 CFR §15.207

Project number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6°C, Unom: 120 VAC (external power supply)
 LISN: ESH3-Z5 (L)
 Mode: 2437 MHz
 Test Date: 2019-06-24
 Note:

Index 43

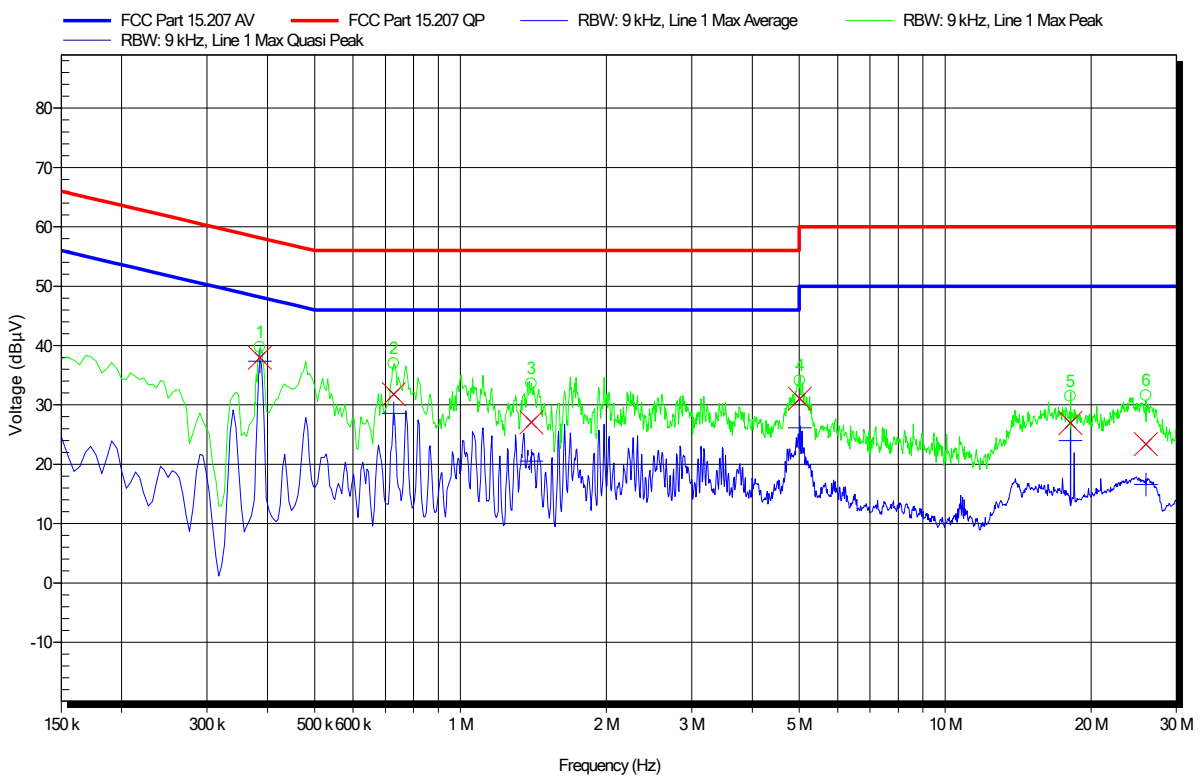

| Peak Number | Frequency | Quasi-Peak | Quasi-Peak Limit | Quasi-Peak Difference | Quasi-Peak Status |
|-------------|------------|------------|------------------|-----------------------|-------------------|
| 1 | 385.8 kHz | 37.94 dBµV | 58.15 dBµV | -20.21 dB | Pass |
| 2 | 727.8 kHz | 31.79 dBµV | 56 dBµV | -24.21 dB | Pass |
| 3 | 1.401 MHz | 27.07 dBµV | 56 dBµV | -28.93 dB | Pass |
| 4 | 5.014 MHz | 31.05 dBµV | 60 dBµV | -28.95 dB | Pass |
| 5 | 18.138 MHz | 26.95 dBµV | 60 dBµV | -33.05 dB | Pass |
| 6 | 25.967 MHz | 23.39 dBµV | 60 dBµV | -36.61 dB | Pass |

| Peak Number | Frequency | Average | Average Limit | Average Difference | Average Status |
|-------------|------------|------------|---------------|--------------------|----------------|
| 1 | 385.8 kHz | 37.36 dBµV | 48.15 dBµV | -10.8 dB | Pass |
| 2 | 727.8 kHz | 28.55 dBµV | 46 dBµV | -17.45 dB | Pass |
| 3 | 1.401 MHz | 20.54 dBµV | 46 dBµV | -25.46 dB | Pass |
| 4 | 5.014 MHz | 26.11 dBµV | 50 dBµV | -23.89 dB | Pass |
| 5 | 18.138 MHz | 24 dBµV | 50 dBµV | -26 dB | Pass |
| 6 | 25.967 MHz | 16.57 dBµV | 50 dBµV | -33.43 dB | Pass |

3.6 Test Conditions and Results - Band-edge compliance


3.6.1 Information

| Test Information | |
|--------------------|--|
| Reference | FCC § 15.247(d); ISED RSS-247, Issue 2 (section 5.5) |
| Measurement Method | ANSI C63.10 11.13 |
| Operator | Abdullah Al Jamal |
| Date | 2019-06-07 |

3.6.2 Limits

| Limits | |
|-------------------|------------------------------|
| Power Measurement | Out-of-band attenuation [dB] |
| Peak | 20 |
| RMS | 30 |

3.6.3 Setup

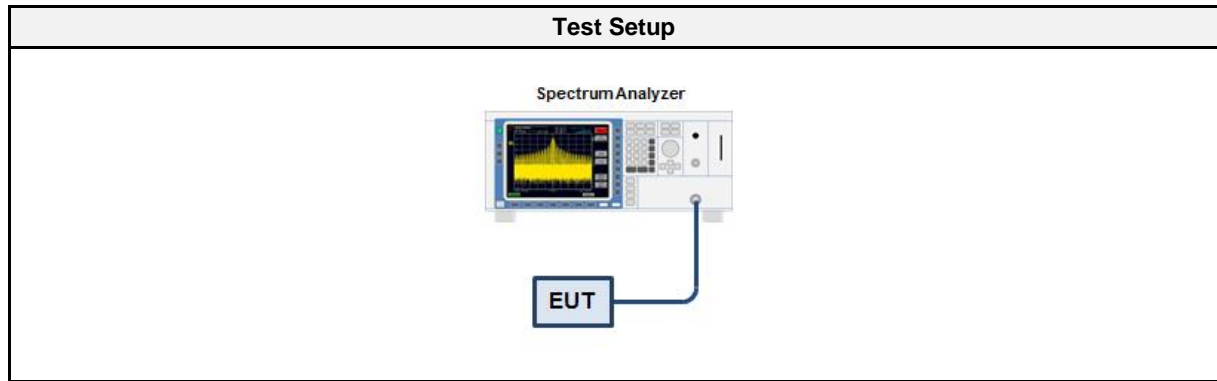

3.6.4 Equipment

| Test Equipment | | | | | |
|-------------------|--------------|--------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer | R&S | FSW 43 | EF00896 | 2018-07 | 2019-07 |

3.6.5 Procedure


| Test Procedure |
|---|
| <ol style="list-style-type: none"> 1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference |

3.6.6 Results

| Test Results | | | | | |
|--------------|------|---------------|------------------------------|------------|---------|
| Port | Mode | Channel [MHz] | Out-of-band Attenuation [dB] | Limit [dB] | Verdict |
| 1 | DSSS | 2412 | -43.52 | -20 | PASS |
| 1 | DSSS | 2462 | -57.84 | -20 | PASS |
| 1 | OFDM | 2412 | -39.31 | -20 | PASS |
| 1 | OFDM | 2462 | -46.34 | -20 | PASS |
| 1 | HT20 | 2412 | -33.86 | -20 | PASS |
| 1 | HT20 | 2462 | -44.87 | -20 | PASS |
| 2 | DSSS | 2412 | -41.04 | -20 | PASS |
| 2 | DSSS | 2462 | -56.75 | -20 | PASS |
| 2 | OFDM | 2412 | -41.82 | -20 | PASS |
| 2 | OFDM | 2462 | -48.64 | -20 | PASS |
| 2 | HT20 | 2412 | -37.24 | -20 | PASS |
| 2 | HT20 | 2462 | -47.37 | -20 | PASS |

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Band-edge: Lower
 In-band Frequency [MHz]: 2411.482
 Max. in-band Level [dBm/100 kHz]: 3.071
 Out-of-band Frequency [MHz]: 2396.974
 Max. out-of-band Level [dBm/100 kHz]: -40.448
 Attenuation [dB]: -43.52

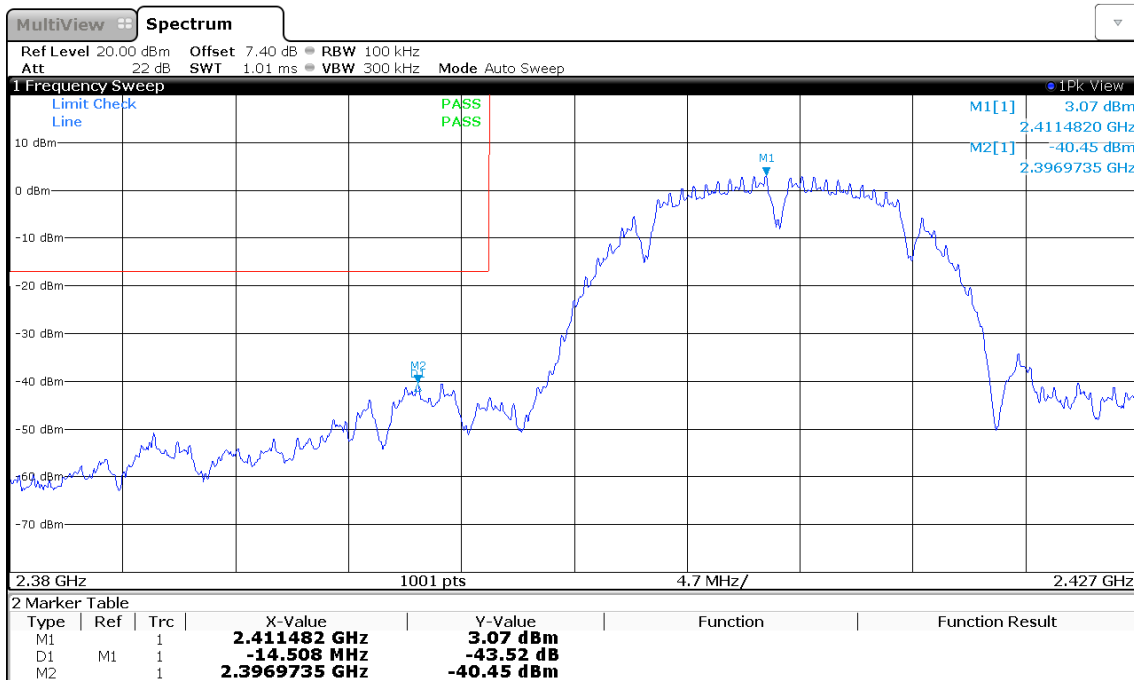

11:29:21 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Band-edge: Upper
 In-band Frequency [MHz]: 2461.457
 Max. in-band Level [dBm/100 kHz]: 3.022
 Out-of-band Frequency [MHz]: 2484.517
 Max. out-of-band Level [dBm/100 kHz]: -54.818
 Attenuation [dB]: -57.84

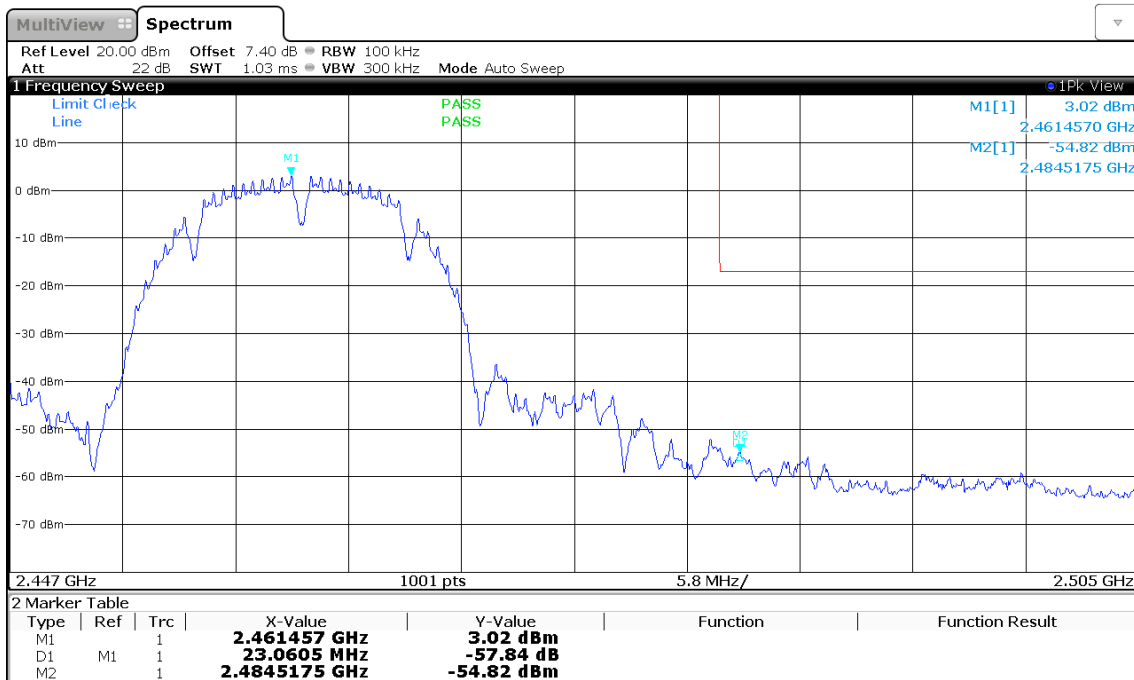

11:30:26 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Band-edge: Lower
 In-band Frequency [MHz]: 2414.487
 Max. in-band Level [dBm/100 kHz]: 1.295
 Out-of-band Frequency [MHz]: 2398.852
 Max. out-of-band Level [dBm/100 kHz]: -38.018
 Attenuation [dB]: -39.31

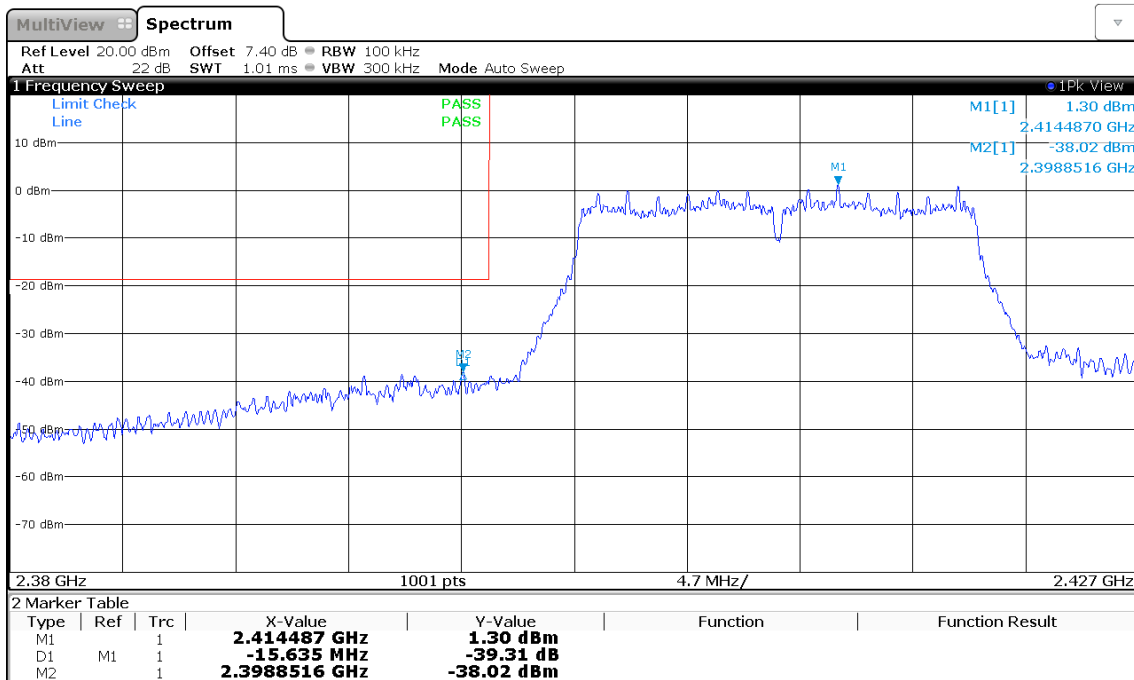

11:31:22 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Band-edge: Upper
 In-band Frequency [MHz]: 2464.47
 Max. in-band Level [dBm/100 kHz]: 0.17
 Out-of-band Frequency [MHz]: 2483.88
 Max. out-of-band Level [dBm/100 kHz]: -46.166
 Attenuation [dB]: -46.34

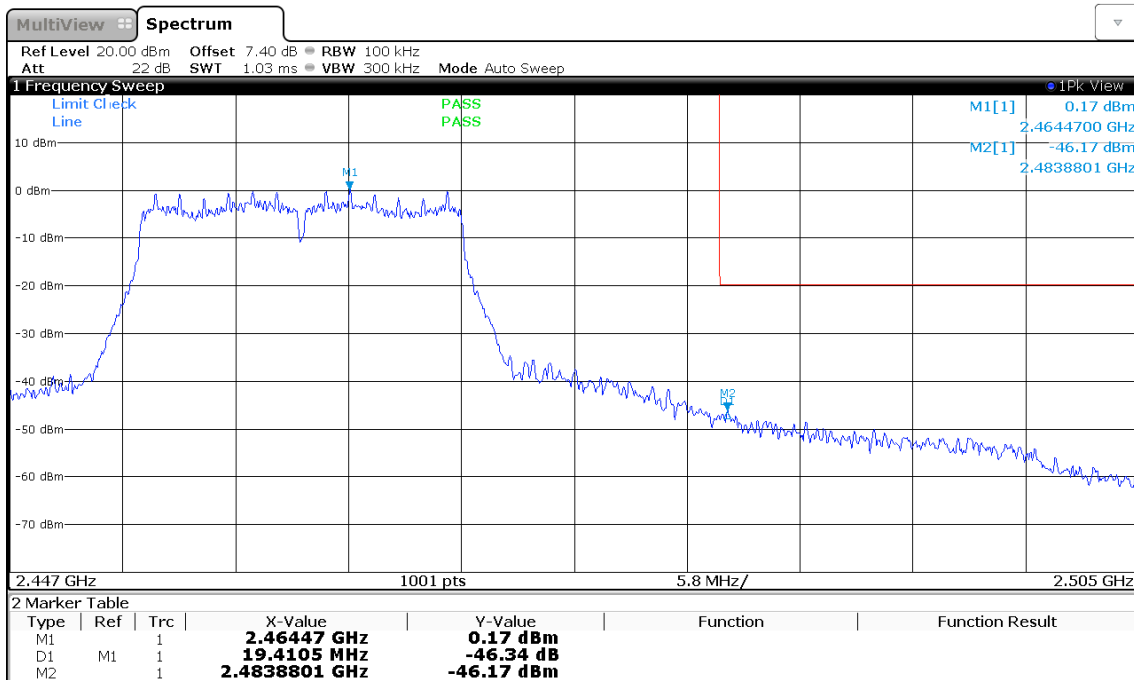

11:31:58 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Band-edge: Lower
 In-band Frequency [MHz]: 2419.464
 Max. in-band Level [dBm/100 kHz]: 0.189
 Out-of-band Frequency [MHz]: 2399.462
 Max. out-of-band Level [dBm/100 kHz]: -33.669
 Attenuation [dB]: -33.86

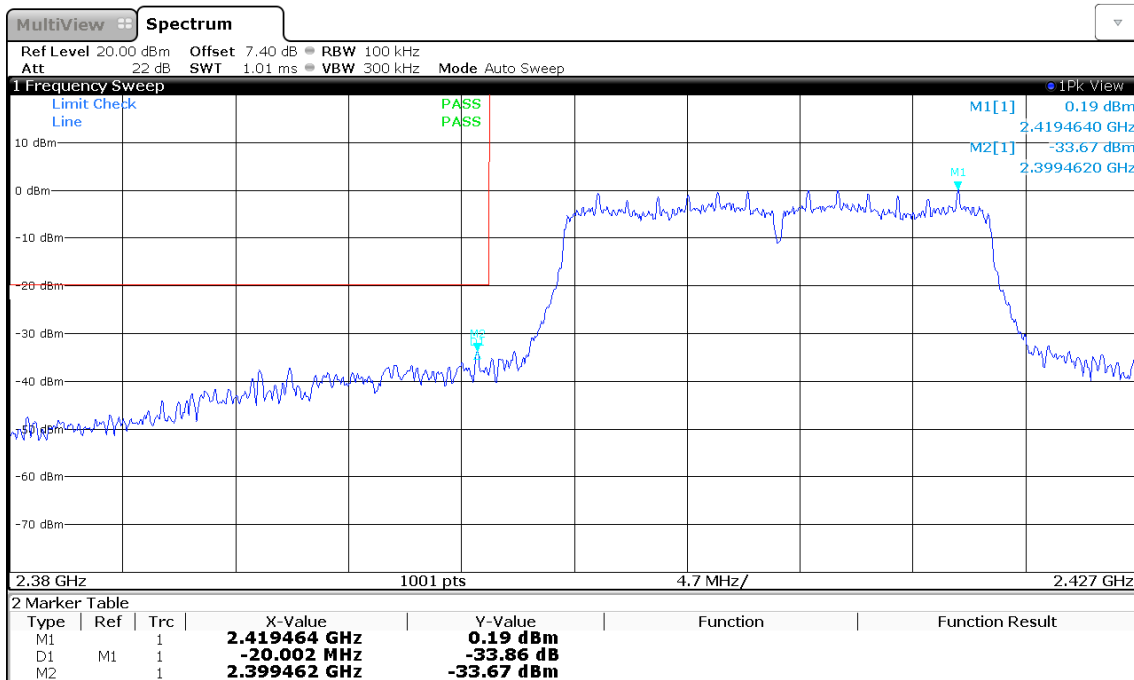

11:33:02 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: B
 Band-edge: Upper
 In-band Frequency [MHz]: 2464.47
 Max. in-band Level [dBm/100 kHz]: 0.189
 Out-of-band Frequency [MHz]: 2483.822
 Max. out-of-band Level [dBm/100 kHz]: -44.677
 Attenuation [dB]: -44.87

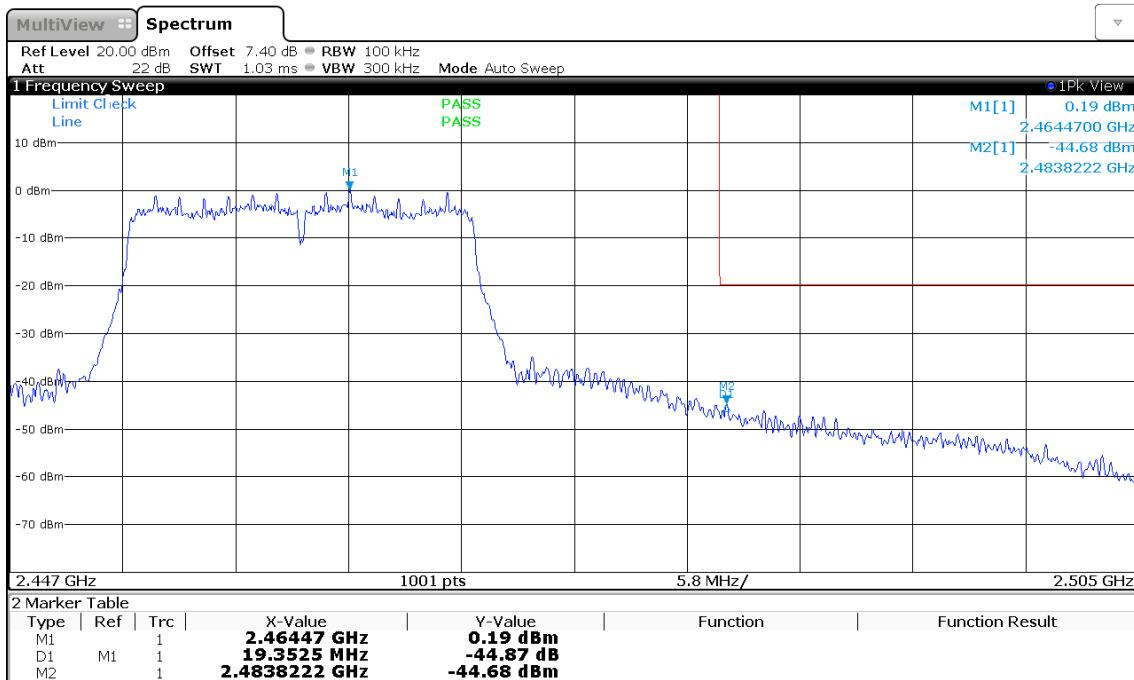

11:33:39 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Band-edge: Lower
 In-band Frequency [MHz]: 2411.482
 Max. in-band Level [dBm/100 kHz]: 2.726
 Out-of-band Frequency [MHz]: 2396.974
 Max. out-of-band Level [dBm/100 kHz]: -38.316
 Attenuation [dB]: -41.04

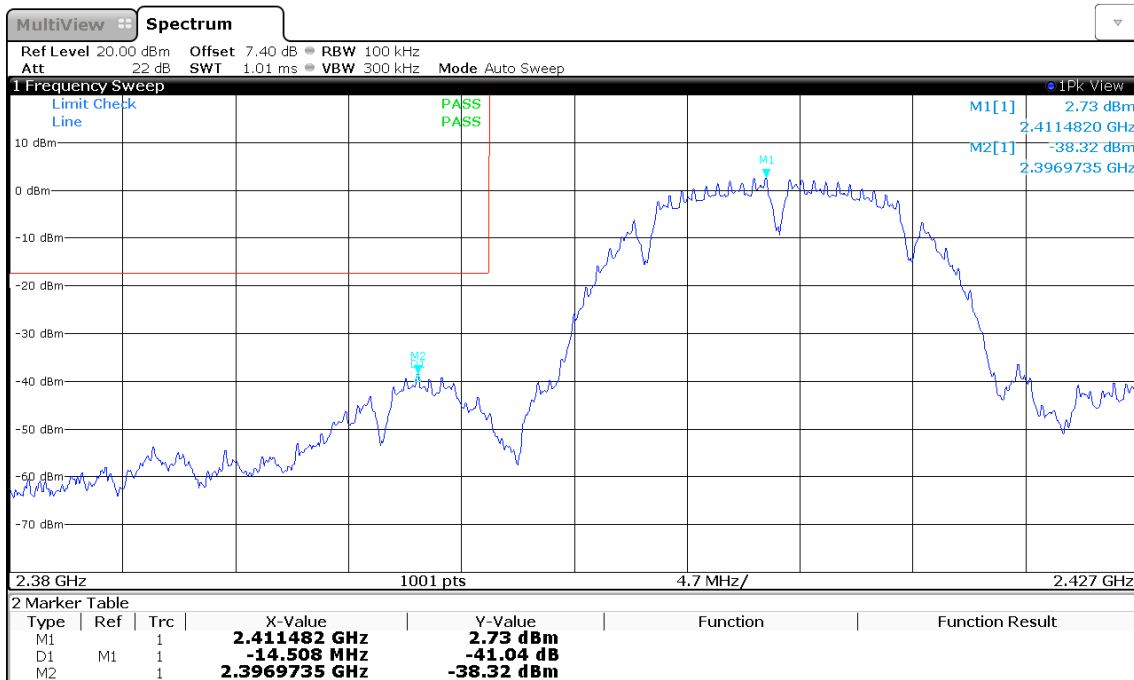

10:51:03 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Band-edge: Upper
 In-band Frequency [MHz]: 2461.457
 Max. in-band Level [dBm/100 kHz]: 3.284
 Out-of-band Frequency [MHz]: 2483.532
 Max. out-of-band Level [dBm/100 kHz]: -53.469
 Attenuation [dB]: -56.75

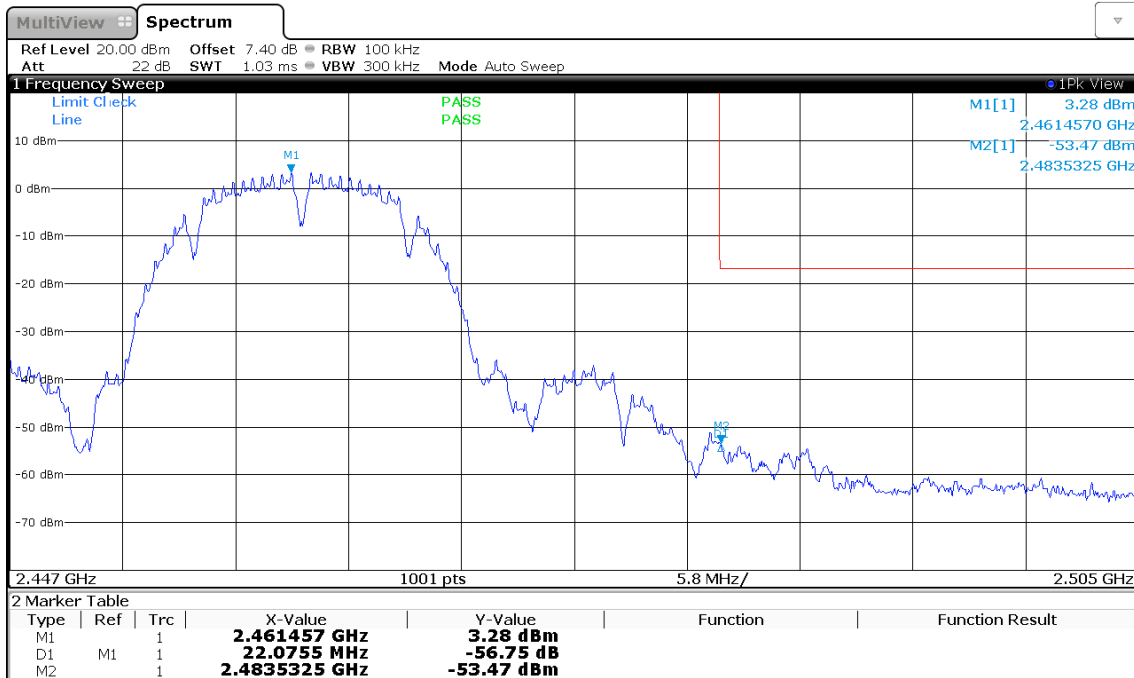

10:51:31 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Band-edge: Lower
 In-band Frequency [MHz]: 2414.487
 Max. in-band Level [dBm/100 kHz]: 0.986
 Out-of-band Frequency [MHz]: 2399.65
 Max. out-of-band Level [dBm/100 kHz]: -40.837
 Attenuation [dB]: -41.82

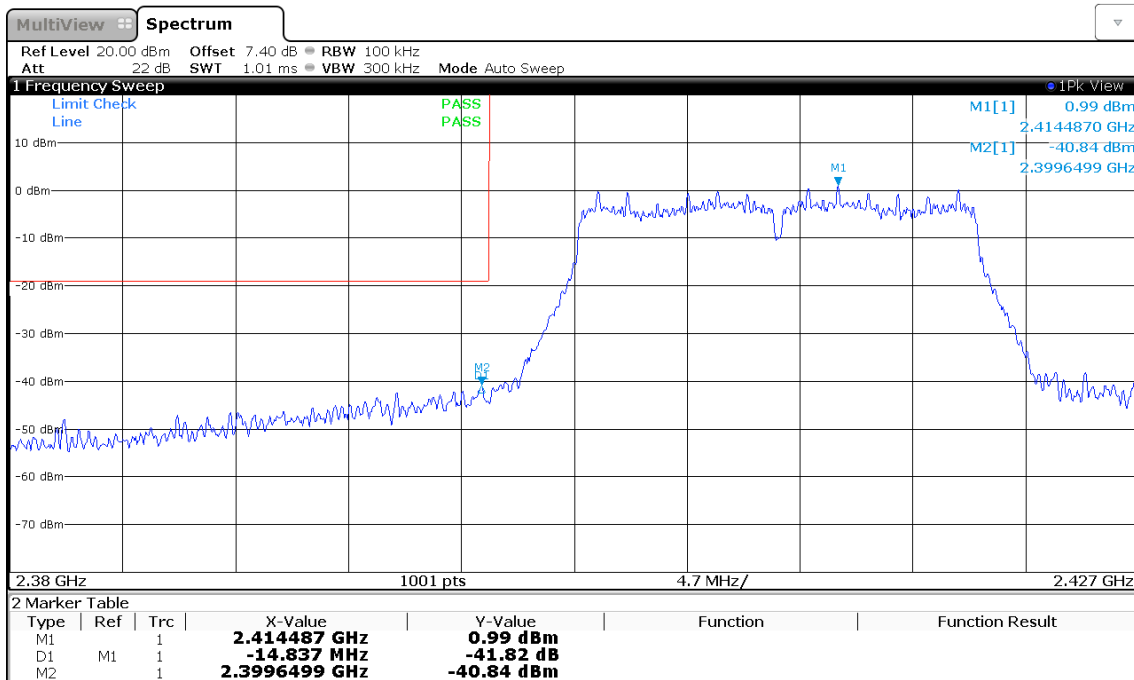

10:52:54 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Band-edge: Upper
 In-band Frequency [MHz]: 2469.453
 Max. in-band Level [dBm/100 kHz]: 0.2
 Out-of-band Frequency [MHz]: 2483.59
 Max. out-of-band Level [dBm/100 kHz]: -48.441
 Attenuation [dB]: -48.64

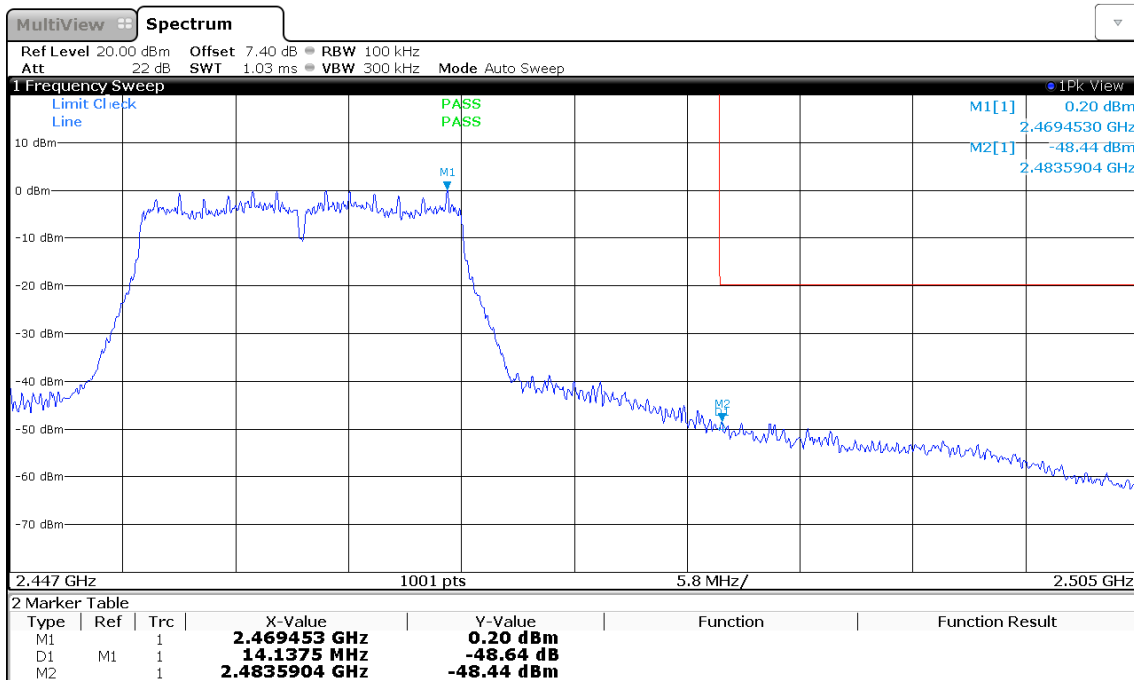

10:53:26 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Band-edge: Lower
 In-band Frequency [MHz]: 2414.487
 Max. in-band Level [dBm/100 kHz]: 0.83
 Out-of-band Frequency [MHz]: 2394.156
 Max. out-of-band Level [dBm/100 kHz]: -36.411
 Attenuation [dB]: -37.24

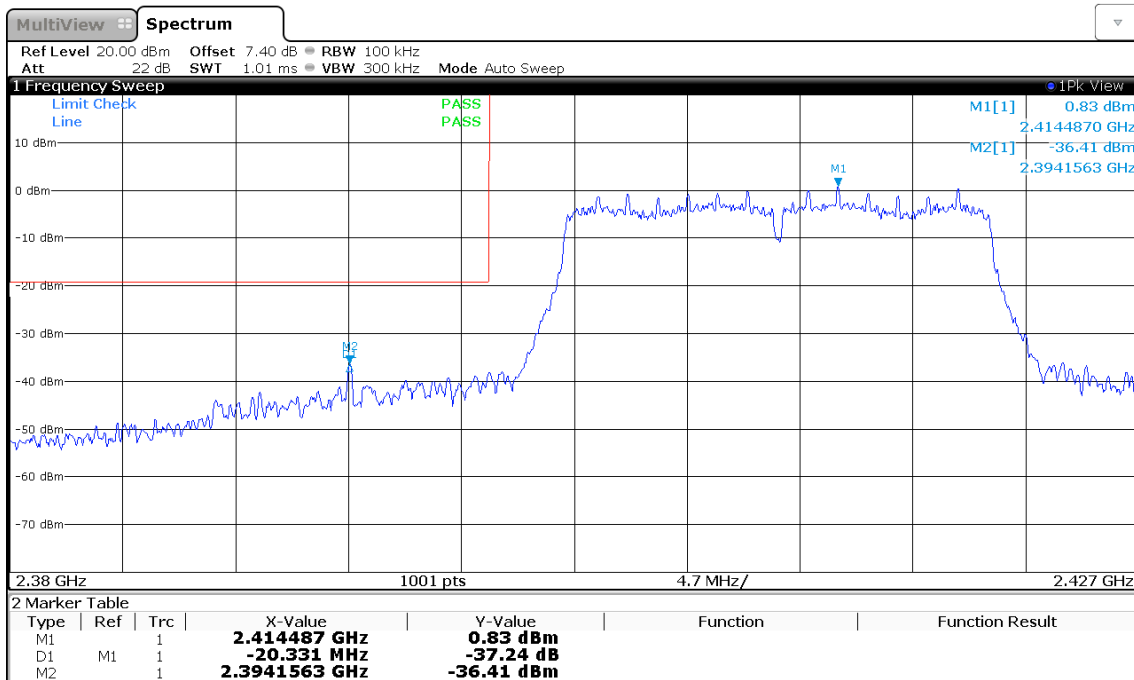

10:54:57 07.06.2019

Emissions in nonrestricted frequency bands at the Band-edge

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Band-edge: Upper
 In-band Frequency [MHz]: 2464.47
 Max. in-band Level [dBm/100 kHz]: 0.4
 Out-of-band Frequency [MHz]: 2483.822
 Max. out-of-band Level [dBm/100 kHz]: -46.973
 Attenuation [dB]: -47.37

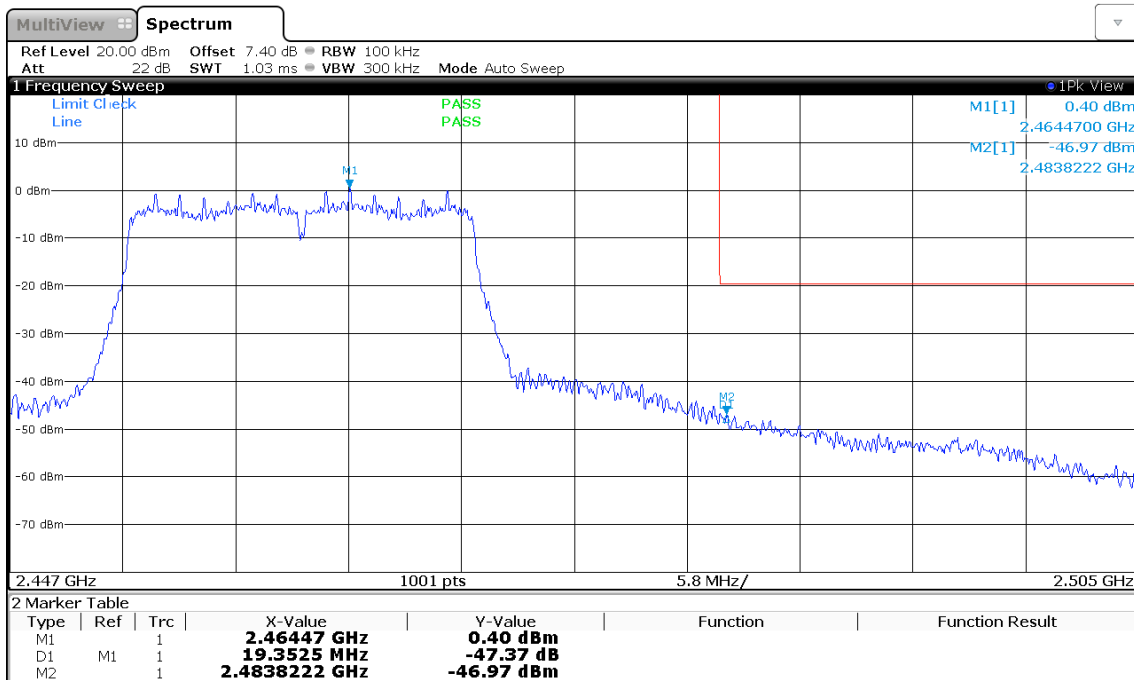

10:55:25 07.06.2019

3.7 Test Conditions and Results - Conducted spurious emissions


3.7.1 Information

| Test Information | |
|--------------------|--|
| Reference | FCC § 15.247(d); ISED RSS-247, Issue 2 (section 5.5) |
| Measurement Method | ANSI C63.10 11.11 |
| Operator | Abdullah Al Jamal |
| Date | 2019-06-06 |

3.7.2 Limits

| Limits | |
|-------------------|------------------------------|
| Power Measurement | Out-of-band attenuation [dB] |
| Peak | 20 |
| RMS | 30 |

3.7.3 Setup

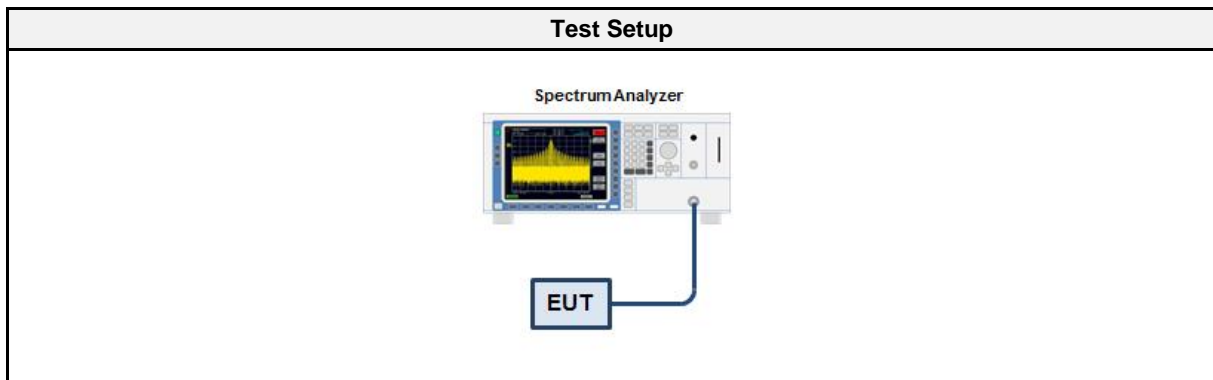

3.7.4 Equipment

| Test Equipment | | | | | |
|-------------------|--------------|--------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer | R&S | FSW 43 | EF00896 | 2018-07 | 2019-07 |

3.7.5 Procedure


| Test Procedure |
|---|
| <ol style="list-style-type: none"> 1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference |

3.7.6 Results

| Test Results | | | |
|--------------|------|---------------|---------|
| Port | Mode | Channel [MHz] | Verdict |
| 1 | DSSS | 2412 | PASS |
| 1 | DSSS | 2437 | PASS |
| 1 | DSSS | 2462 | PASS |
| 1 | OFDM | 2412 | PASS |
| 1 | OFDM | 2437 | PASS |
| 1 | OFDM | 2462 | PASS |
| 1 | HT20 | 2412 | PASS |
| 1 | HT20 | 2437 | PASS |
| 1 | HT20 | 2462 | PASS |
| 2 | DSSS | 2412 | PASS |
| 2 | DSSS | 2437 | PASS |
| 2 | DSSS | 2462 | PASS |
| 2 | OFDM | 2412 | PASS |
| 2 | OFDM | 2437 | PASS |
| 2 | OFDM | 2462 | PASS |
| 2 | HT20 | 2412 | PASS |
| 2 | HT20 | 2437 | PASS |
| 2 | HT20 | 2462 | PASS |

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2413.0
 Max. in-band Level [dBm/100 kHz]: 2.7
 Out-of-band Limit [dBm/100 kHz]: -17.3

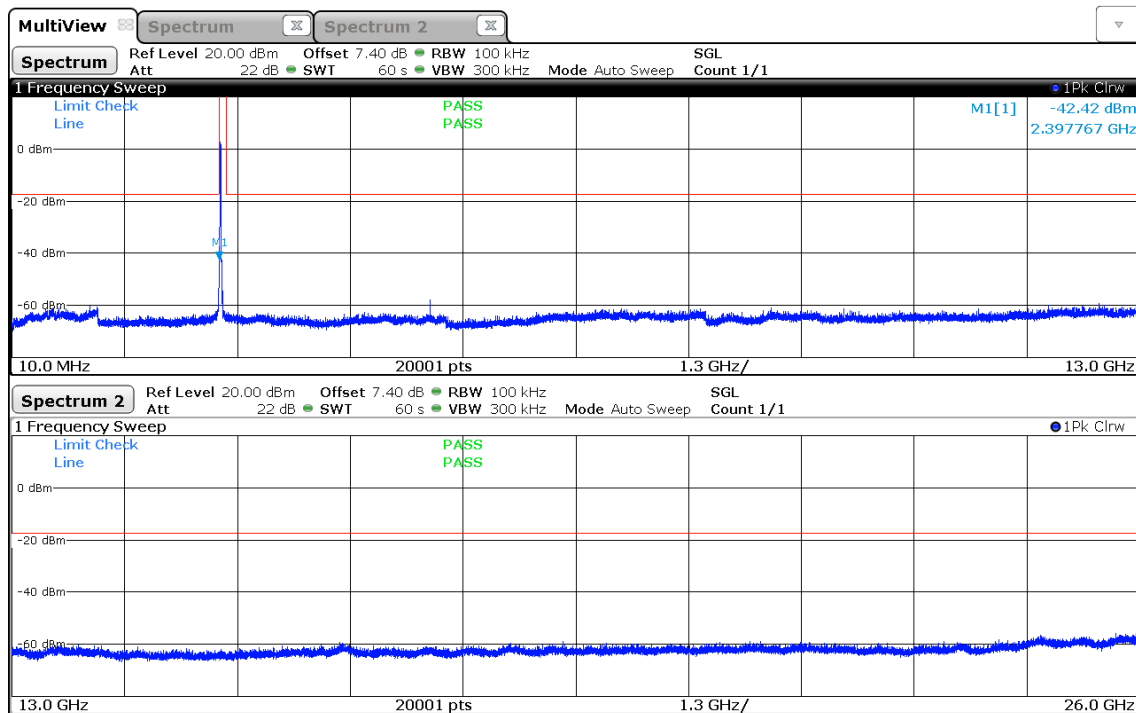

17:46:52 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2436.5
 Max. in-band Level [dBm/100 kHz]: 2.6
 Out-of-band Limit [dBm/100 kHz]: -17.4

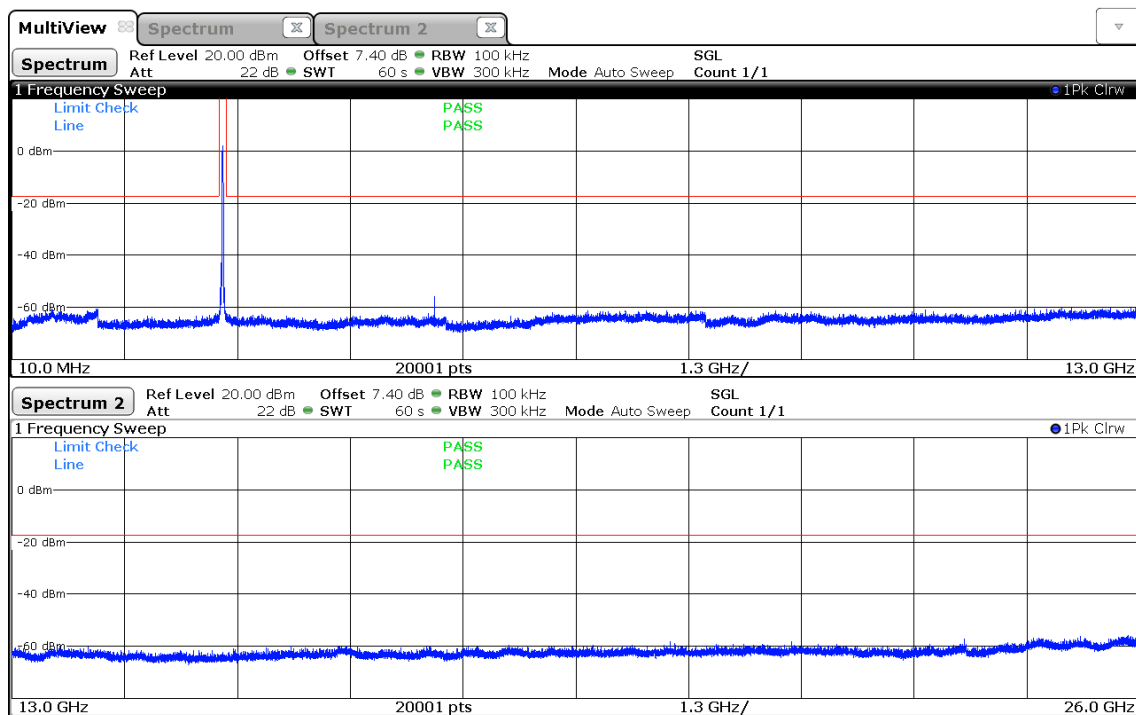

17:49:47 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2461.5
 Max. in-band Level [dBm/100 kHz]: 2.9
 Out-of-band Limit [dBm/100 kHz]: -17.1

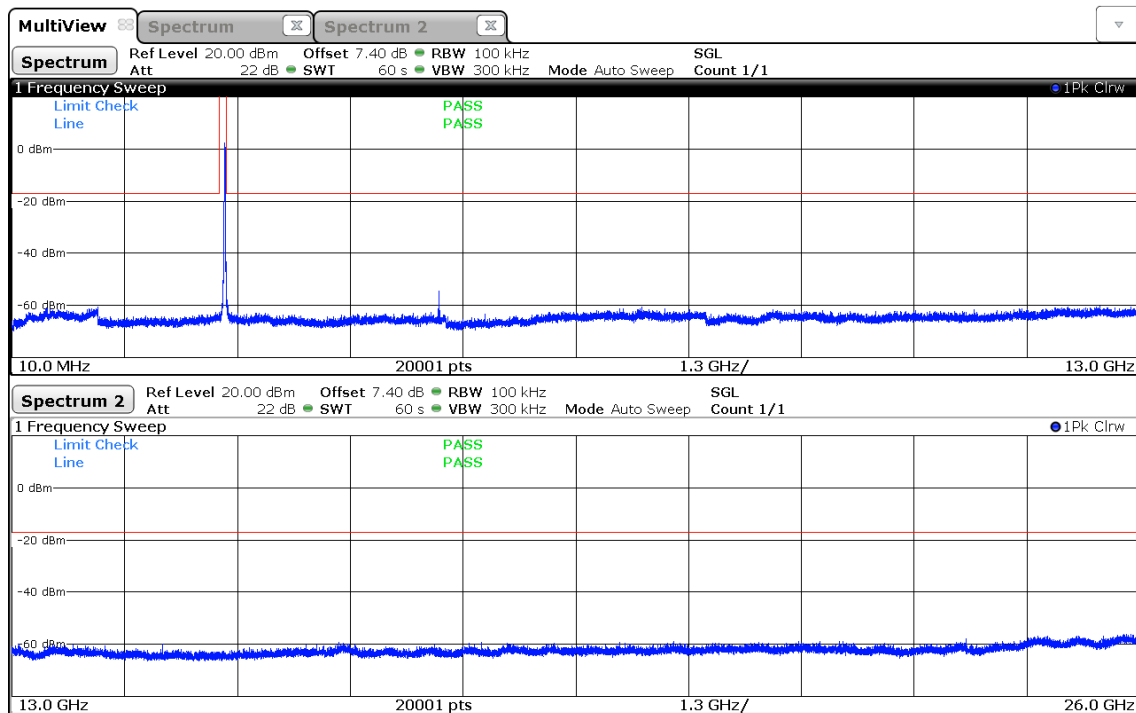

17:52:23 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2414.5
 Max. in-band Level [dBm/100 kHz]: 1.2
 Out-of-band Limit [dBm/100 kHz]: -18.8

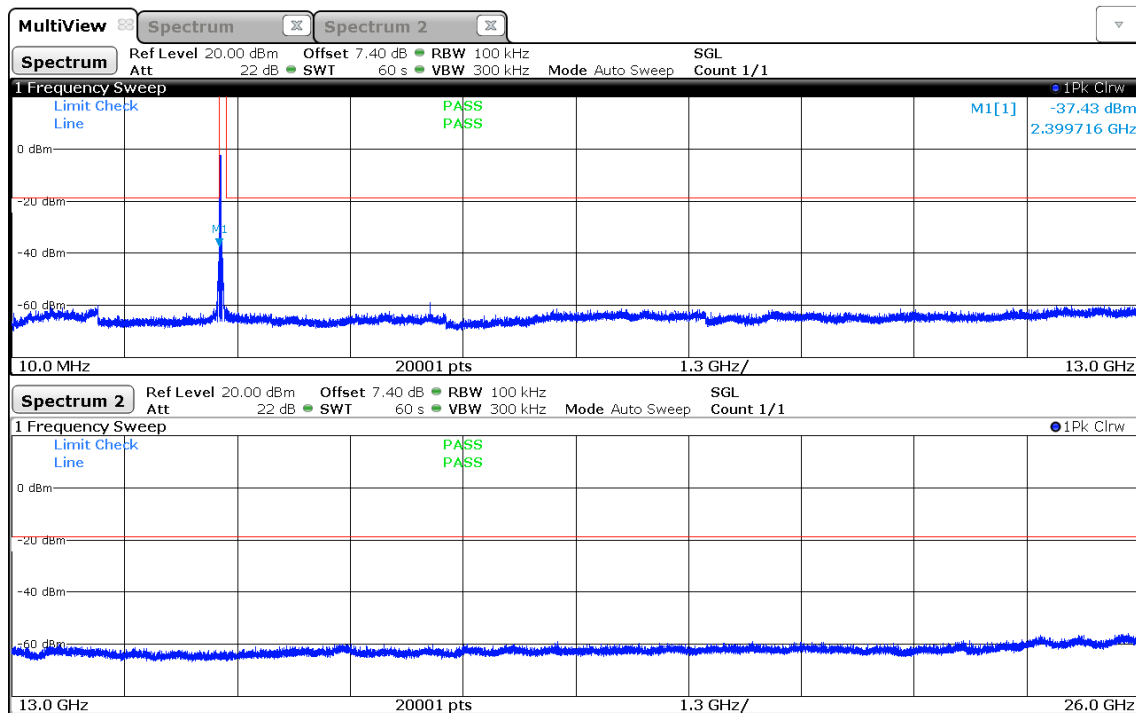

17:55:55 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2439.5
 Max. in-band Level [dBm/100 kHz]: 0.8
 Out-of-band Limit [dBm/100 kHz]: -19.2

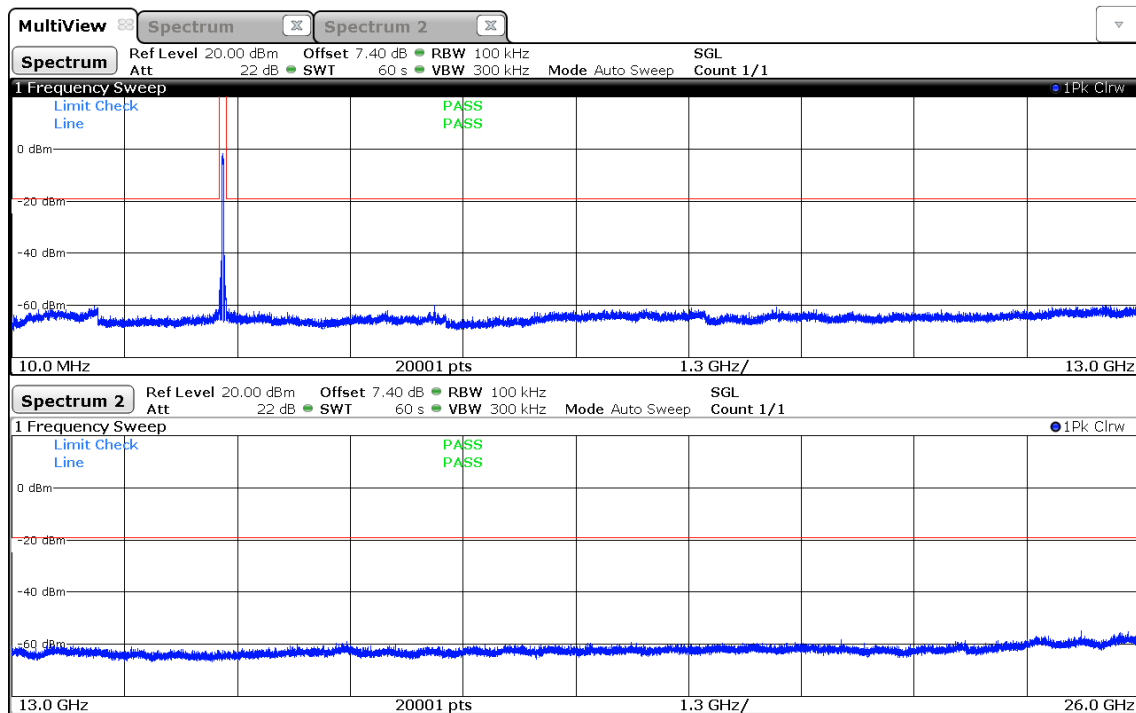

17:58:32 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2464.5
 Max. in-band Level [dBm/100 kHz]: 0.8
 Out-of-band Limit [dBm/100 kHz]: -19.2

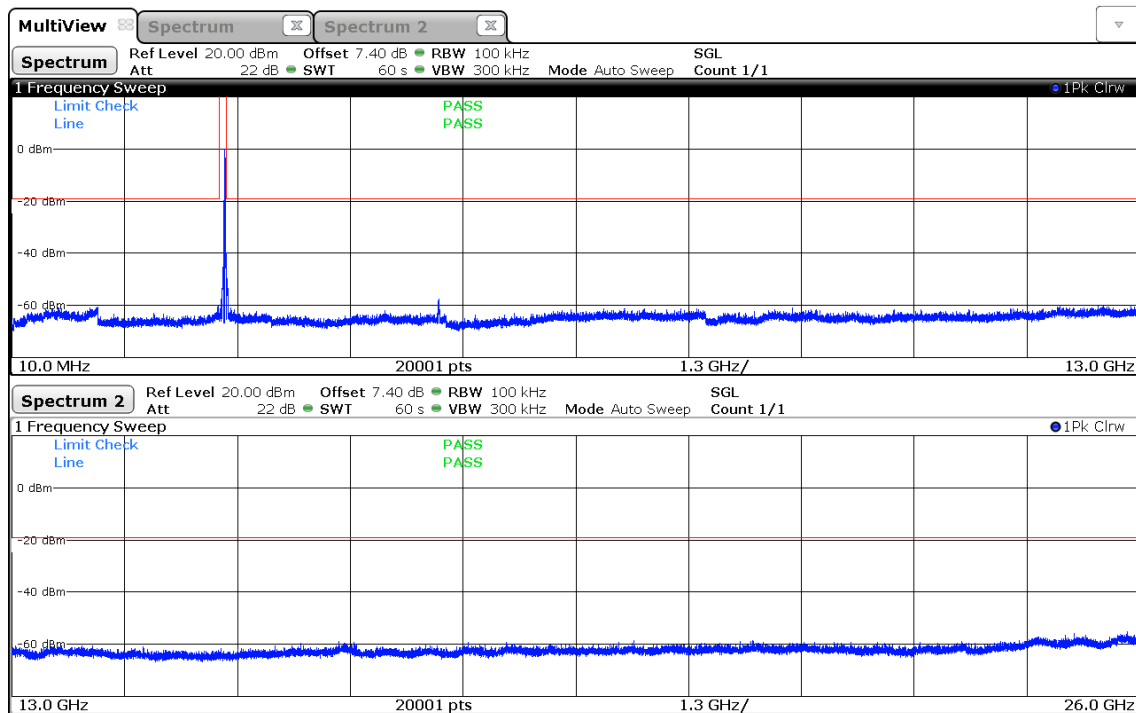

18:01:19 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2414.5
 Max. in-band Level [dBm/100 kHz]: 1.0
 Out-of-band Limit [dBm/100 kHz]: -19.0

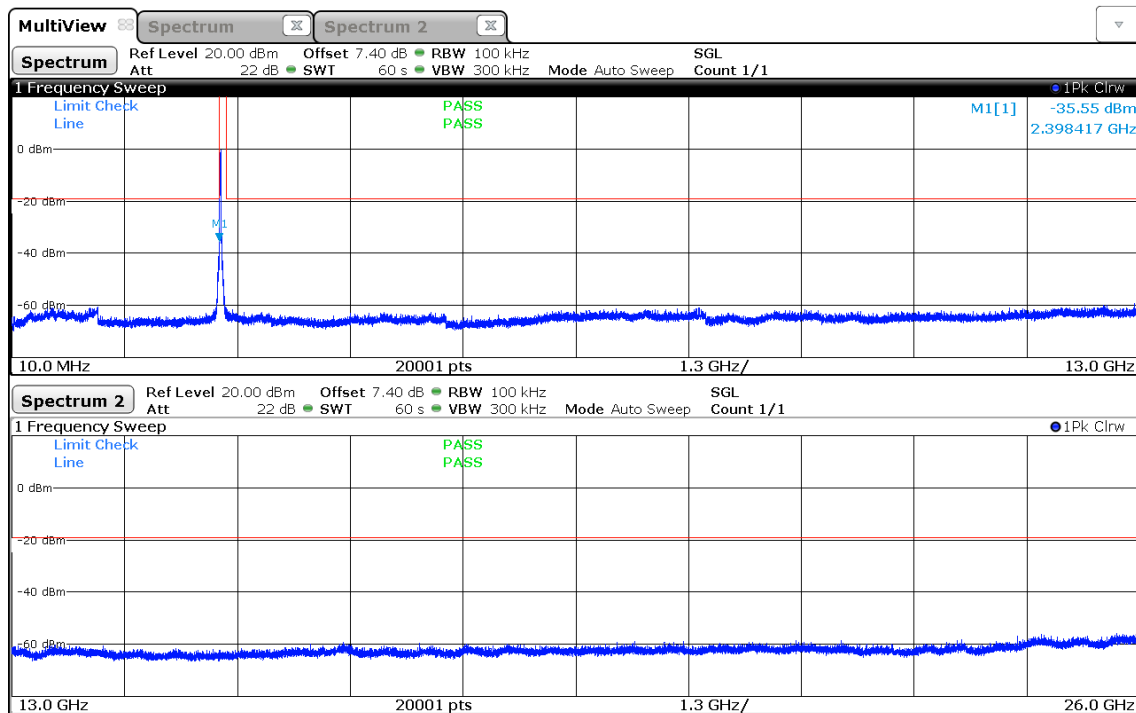

18:05:25 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2439.5
 Max. in-band Level [dBm/100 kHz]: 0.2
 Out-of-band Limit [dBm/100 kHz]: -19.8

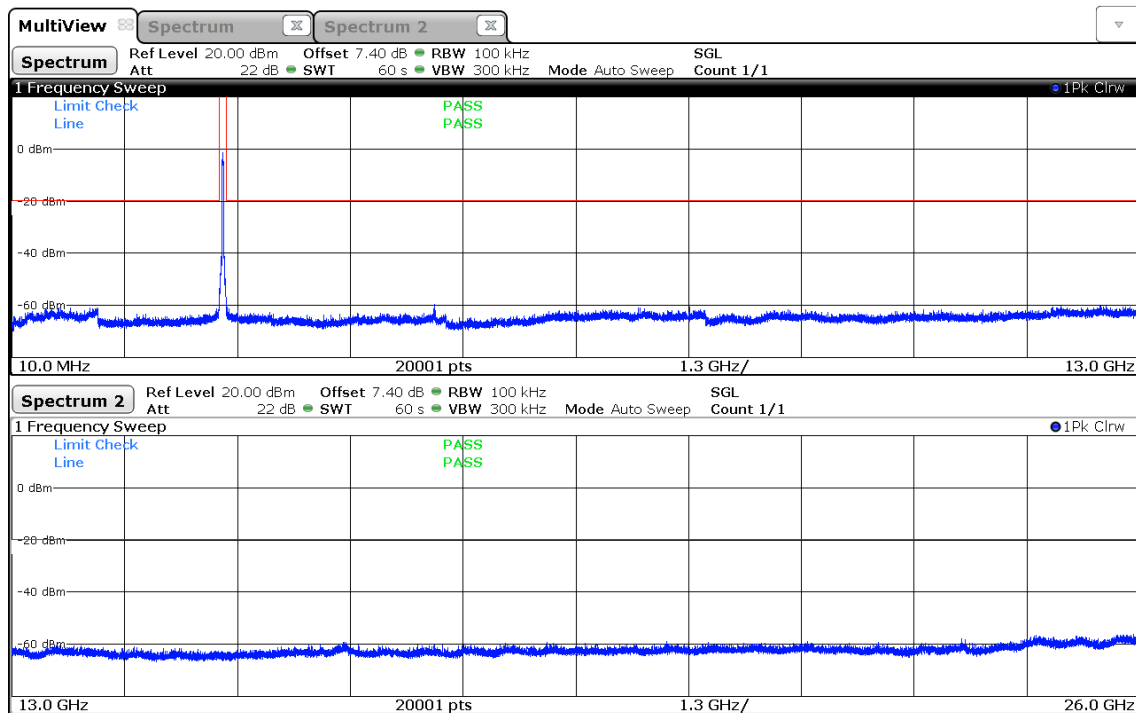

18:07:58 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-06
 Antenna port: B
 Max. in-band Frequency [MHz]: 2464.5
 Max. in-band Level [dBm/100 kHz]: -0.0
 Out-of-band Limit [dBm/100 kHz]: -20.0

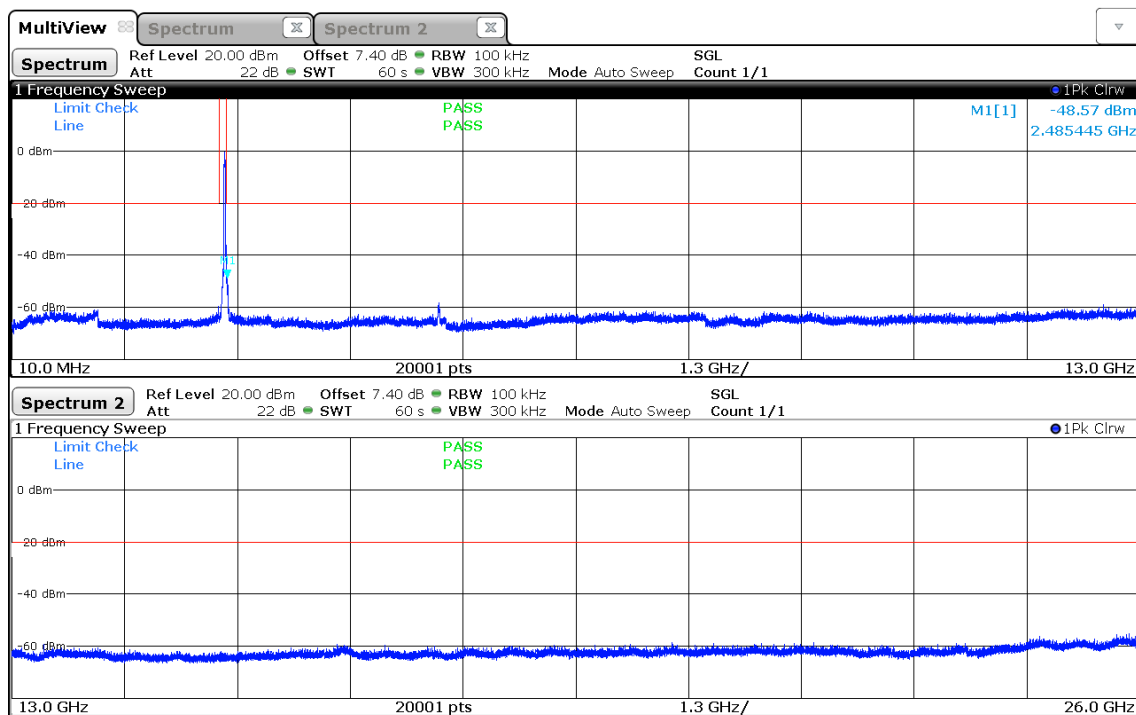

18:10:34 06.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2412.5
 Max. in-band Level [dBm/100 kHz]: 2.7
 Out-of-band Limit [dBm/100 kHz]: -17.3

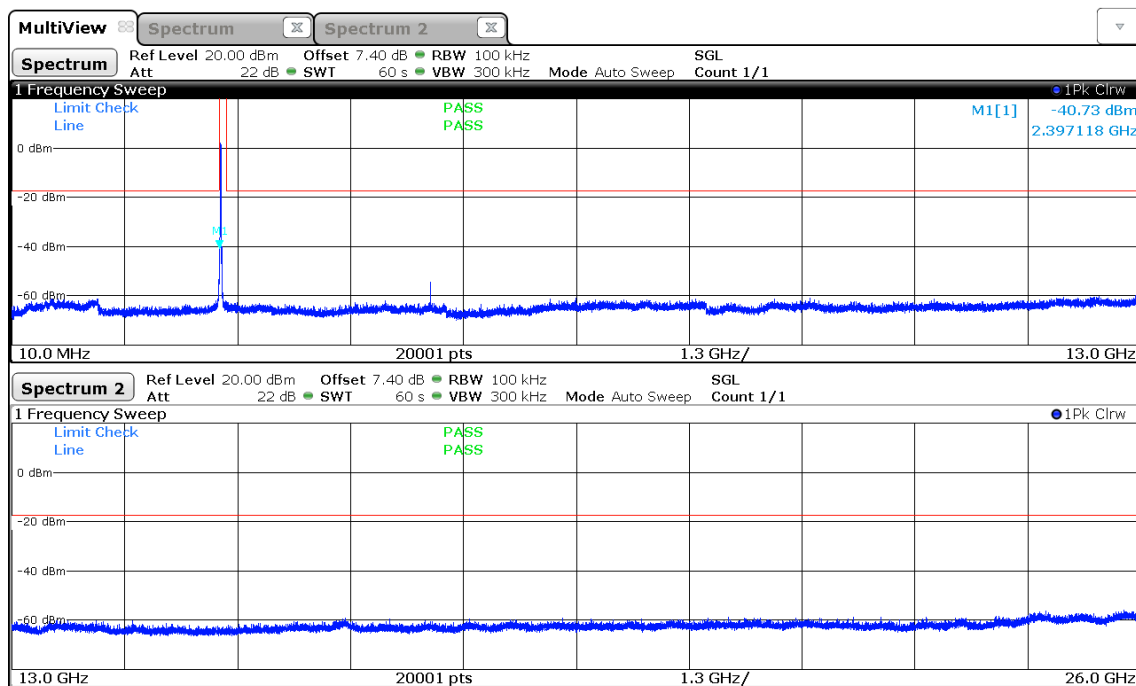

10:59:19 07.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2437.5
 Max. in-band Level [dBm/100 kHz]: 2.9
 Out-of-band Limit [dBm/100 kHz]: -17.1

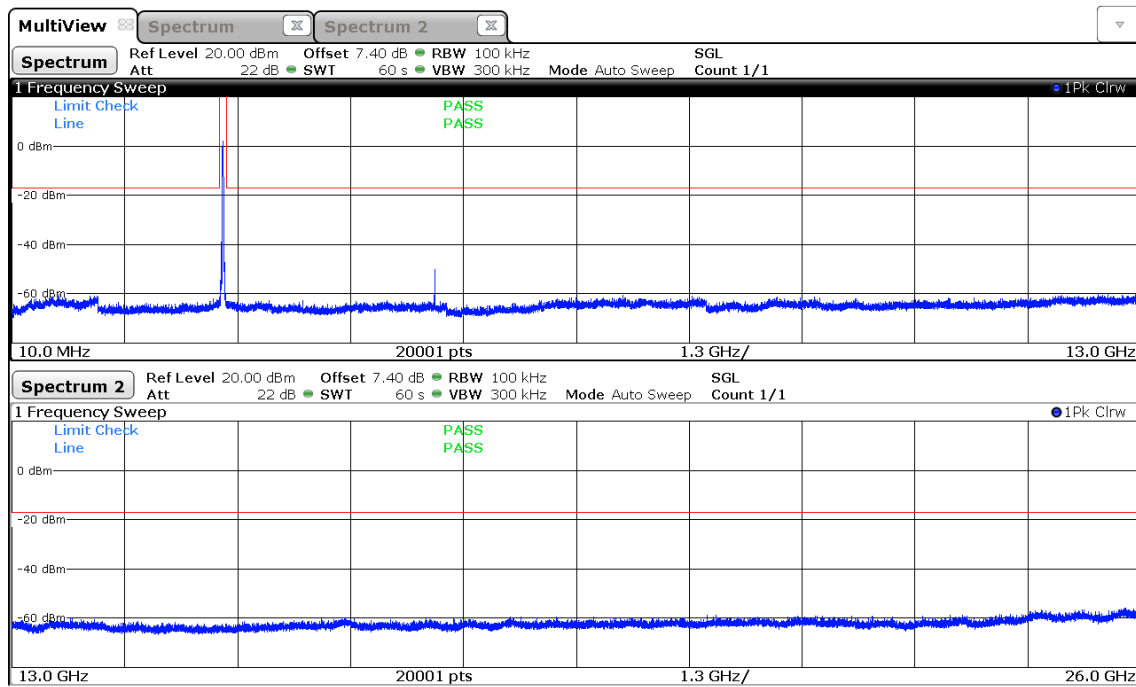

11:04:35 07.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 b, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2461.5
 Max. in-band Level [dBm/100 kHz]: 3.4
 Out-of-band Limit [dBm/100 kHz]: -16.6

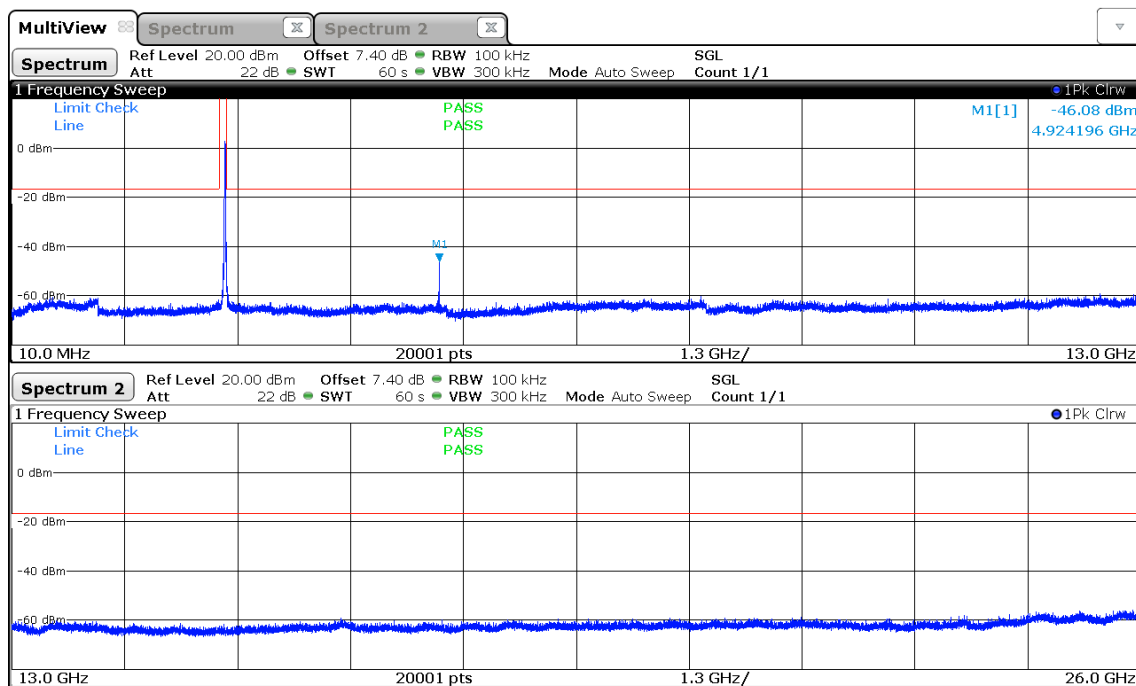

11:09:03 07.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2414.5
 Max. in-band Level [dBm/100 kHz]: 1.0
 Out-of-band Limit [dBm/100 kHz]: -19.0

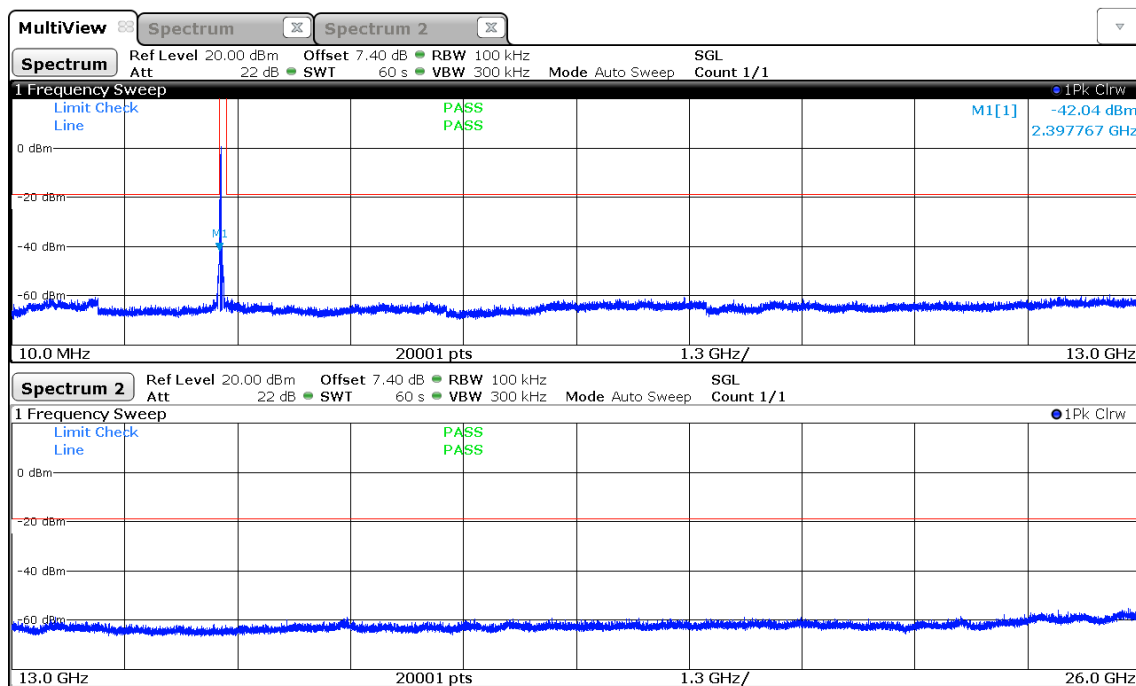

11:12:27 07.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2439.5
 Max. in-band Level [dBm/100 kHz]: 0.7
 Out-of-band Limit [dBm/100 kHz]: -19.3

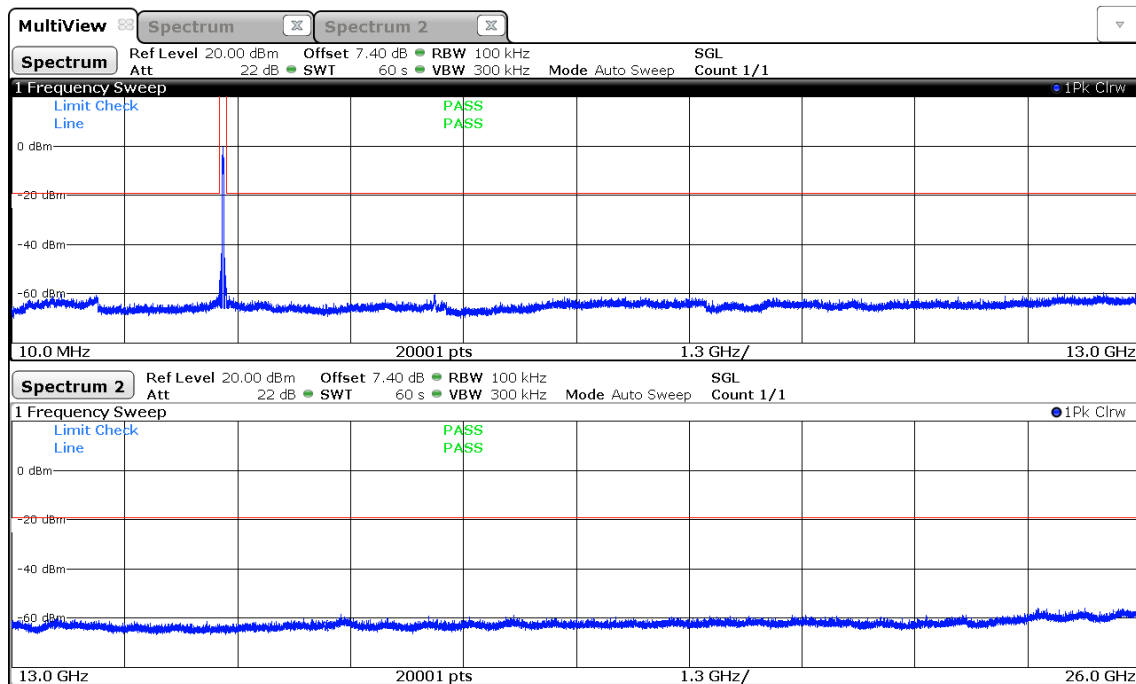

11:15:02 07.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 g, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2464.5
 Max. in-band Level [dBm/100 kHz]: 1.0
 Out-of-band Limit [dBm/100 kHz]: -19.0

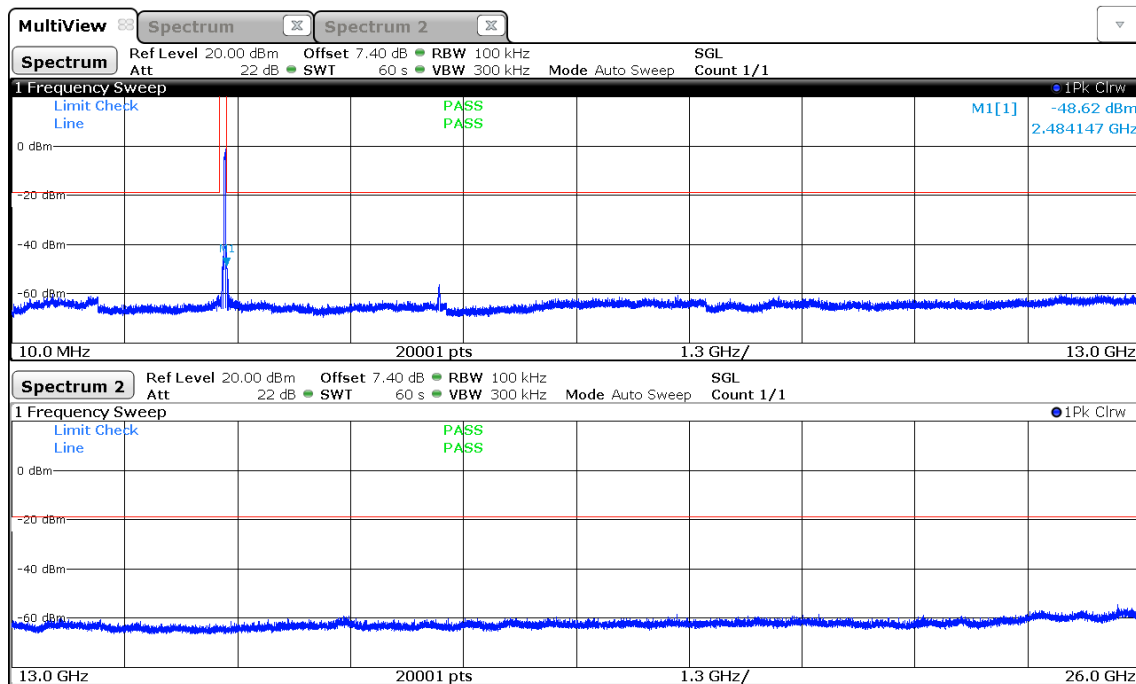

11:17:38 07.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 1, 2412 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2414.5
 Max. in-band Level [dBm/100 kHz]: 0.9
 Out-of-band Limit [dBm/100 kHz]: -19.1

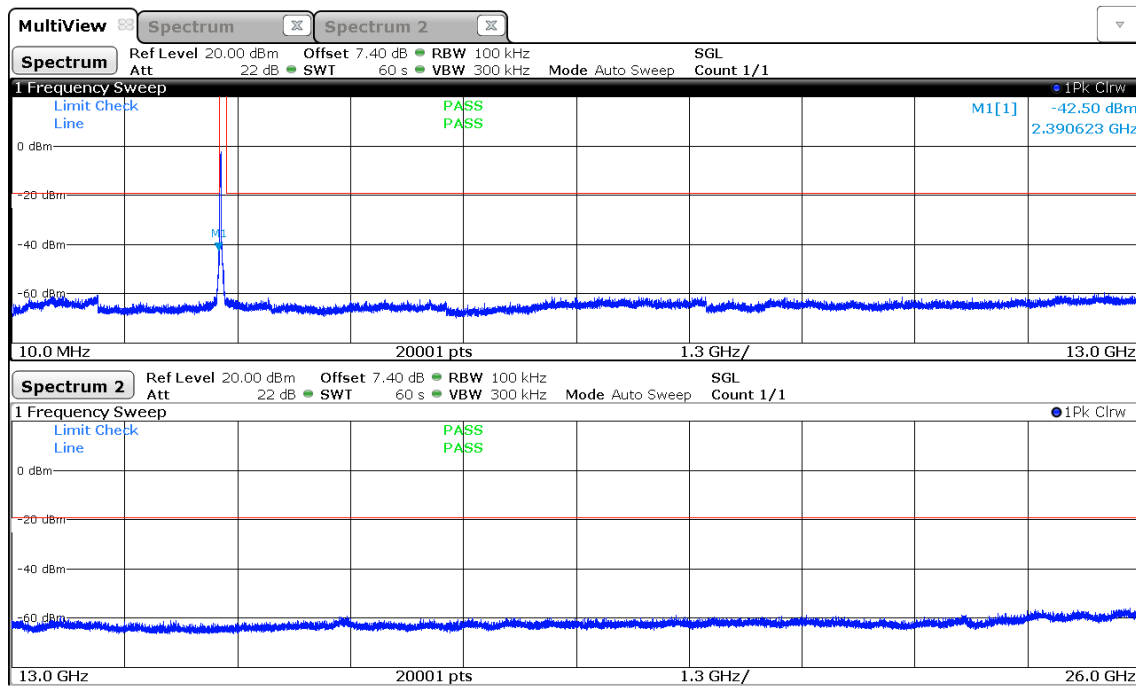

11:20:47 07.06.2019

Conducted Spurious Emissions


Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 6, 2437 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2439.5
 Max. in-band Level [dBm/100 kHz]: 0.5
 Out-of-band Limit [dBm/100 kHz]: -19.5

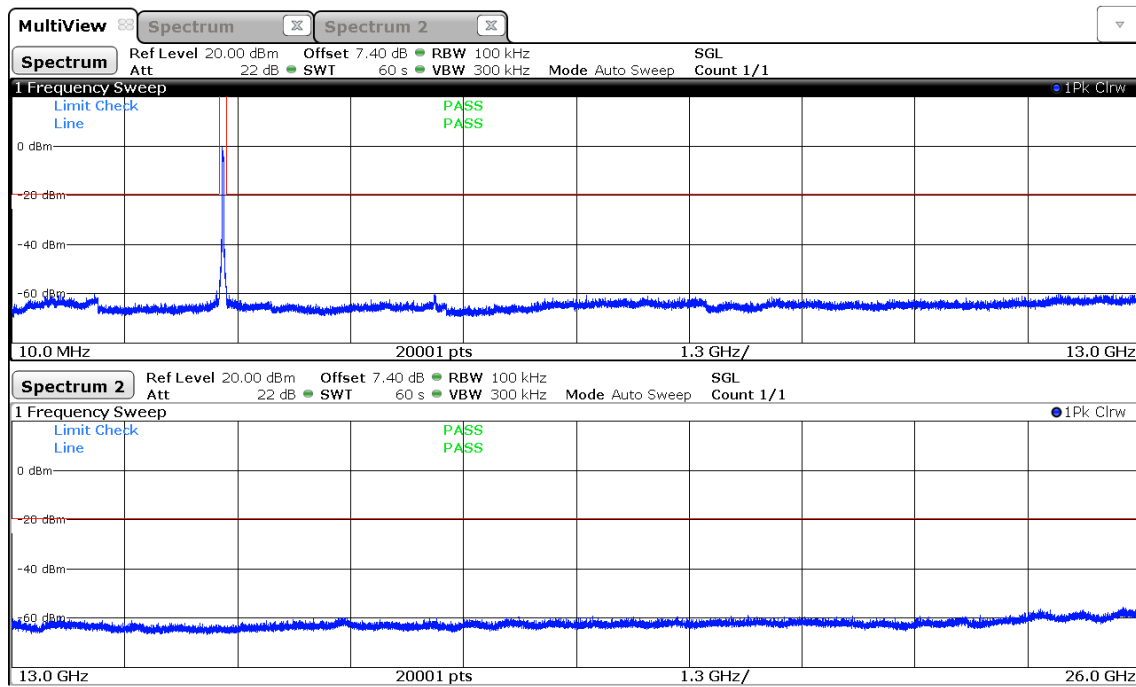

11:23:26 07.06.2019

Conducted Spurious Emissions

Project Number: G0M-1905-8256
 Applicant: BIOTRONIK SE & Co. KG
 Model Description: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Sample ID: 24167
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: IEEE 802.11 n HT20, Channel: 11, 2462 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Abdullah Al Jamal
 Test Site: Eurofins Product Service GmbH
 Test Date: 2019-06-07
 Antenna port: W
 Max. in-band Frequency [MHz]: 2464.5
 Max. in-band Level [dBm/100 kHz]: 0.5
 Out-of-band Limit [dBm/100 kHz]: -19.5

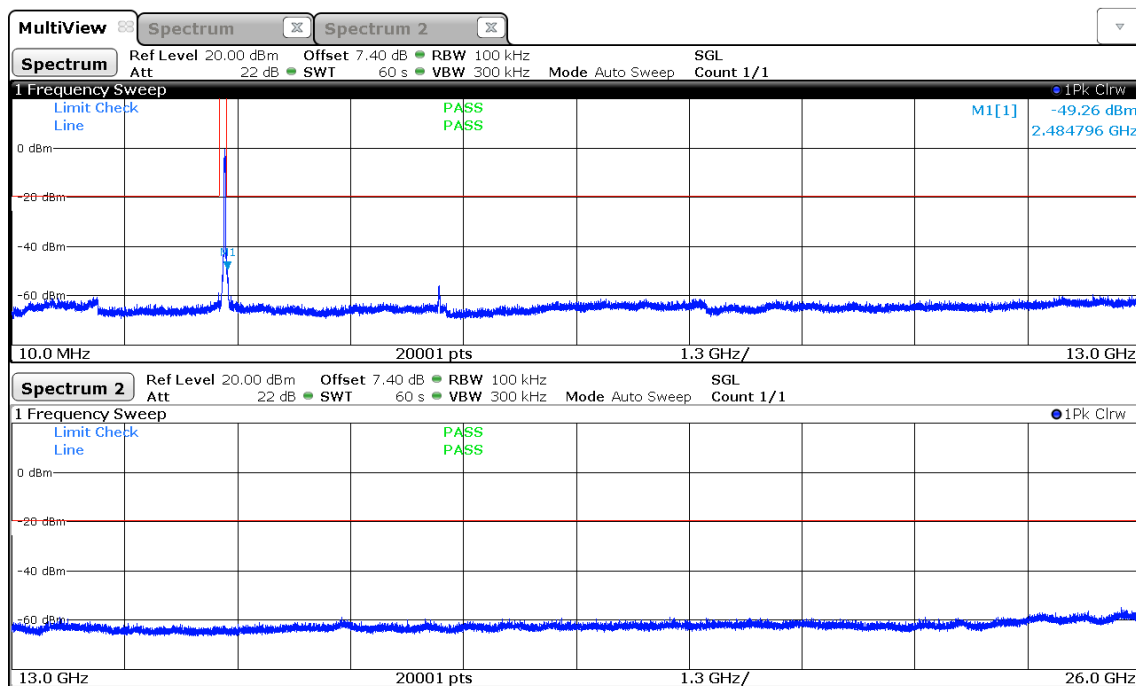

11:26:14 07.06.2019

3.8 Test Conditions and Results - Transmitter radiated emissions


3.8.1 Information


| Test Information | |
|--------------------|---|
| Reference | FCC § 15.247(d); FCC § 15.209; ISSED RSS-Gen, Issue 5 (section 6.13) |
| Measurement Method | ANSI C63.10 6.4, 6.5, 6.6, 11.12 |
| Operator | Abdullah Al Jamal |
| Date | 2019-06-24 |
| Note | The worst-case was determined by previous measurements. The worst-case of all antenna combinations is reported. Only plots containing spurious emissions are shown in this annex. All missing plots contain noise or contain no significant emission only. |

3.8.2 Limits

| Limits | | | |
|-----------------|------------|---|--------------------------|
| Frequency [MHz] | Detector | Field strength [$\mu\text{V}/\text{m}$] | Measurement distance [m] |
| 0.009 - 0.09 | Average | 2400/F[kHz] | 300 |
| 0.09 - 0.110 | Quasi-Peak | 2400/F[kHz] | 300 |
| 0.110 - 0.490 | Average | 2400/F[kHz] | 300 |
| 0.490 - 1.705 | Quasi-Peak | 24000/F[kHz] | 30 |
| 1.705 - 30.0 | Quasi-Peak | 30 | 30 |
| 30 - 88 | Quasi-Peak | 100 | 3 |
| 88 - 216 | Quasi-Peak | 150 | 3 |
| 216 - 960 | Quasi-Peak | 200 | 3 |
| 960 - 1000 | Quasi-Peak | 500 | 3 |
| >1000 | Average | 500 | 3 |

3.8.3 Setup

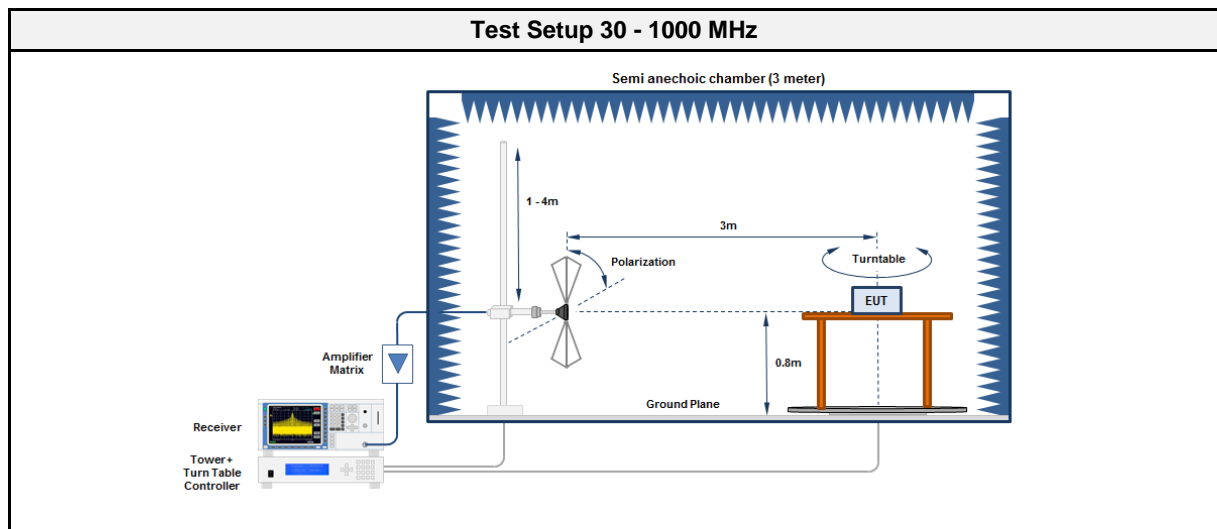

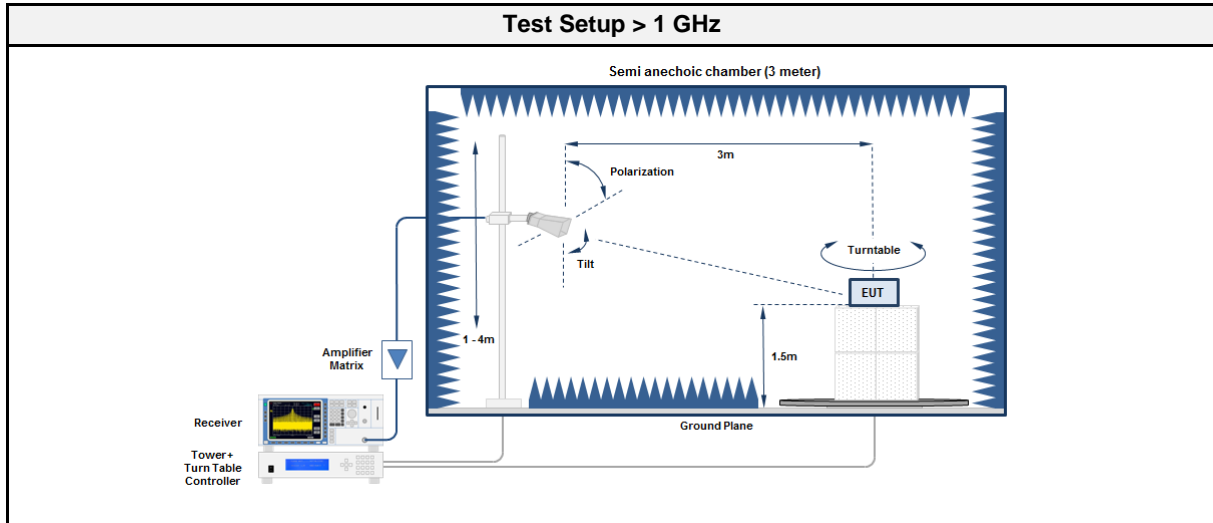

3.8.4 Equipment

| Test Software | | | |
|---------------|------------------|------------|-----------|
| Description | Manufacturer | Name | Version |
| EMC Software | DARE Instruments | RadiMation | 2016.1.10 |

| Test Equipment 30 - 1000 MHz | | | | | |
|------------------------------|--------------|-----------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber | Frankonia | AC1 | EF00062 | 2018-07 | 2021-07 |
| Measurement Receiver | R&S | ESU 26 | EF00887 | 2018-08 | 2019-08 |
| Antenna | R&S | VULB 9162 | EF00978 | 2016-11 | 2019-11 |

| Test Equipment > 1 GHz | | | | | |
|------------------------|--------------------|------------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber | Frankonia | AC1 | EF00062 | 2018-07 | 2021-07 |
| Measurement Receiver | R&S | ESU 26 | EF00887 | 2018-08 | 2019-08 |
| Antenna | Schwarzbeck | BBHA 9120D | EF00018 | 2016-09 | 2019-09 |
| Antenna | Amplifier Research | AT4560 | EF01152 | 2018-10 | 2019-10 |

3.8.5 Procedure

| Test Procedure 30 - 1000 MHz | |
|------------------------------|--|
| 1. | EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground |
| 2. | EUT set to test mode |
| 3. | The receiver is set to peak detection with max hold |
| 4. | The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m |
| 5. | All significant emissions are measured again using the corresponding final detector |

| Test Procedure > 1 GHz | |
|------------------------|--|
| 1. | EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground |
| 2. | EUT set to test mode |
| 3. | The receiver is set to peak detection with max hold |
| 4. | The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m |
| 5. | All significant emissions are measured again using the corresponding final detector |

3.8.6 Results

| Test Results - HT20 Antenna port 1 (W) | | | | | | |
|---|----------------|----------------------|------|------|----------------------|-------------|
| Channel [MHz] | Emission [MHz] | Level [dB μ V/m] | Det. | Pol. | Limit [dB μ V/m] | Margin [dB] |
| 2412 | 2388.9 | 73.99 | pk | ver | 74.00 | -00.01 |
| 2412 | 2388.9 | 48.10 | RMS | ver | 54.00 | -05.90 |
| 2412 | 2389.4 | 73.00 | pk | ver | 74.00 | -01.00 |
| 2412 | 2389.4 | 47.13 | RMS | ver | 54.00 | -06.87 |
| 2412 | 2389.7 | 70.73 | pk | hor | 74.00 | -03.27 |
| 2412 | 2389.7 | 47.45 | RMS | hor | 54.00 | -06.55 |
| 2412 | 2389.7 | 72.90 | pk | ver | 74.00 | -01.10 |
| 2412 | 2389.7 | 48.23 | RMS | ver | 54.00 | -05.77 |
| 2437 | 2483.8 | 64.81 | pk | hor | 74.00 | -09.19 |
| 2437 | 2483.8 | 43.81 | RMS | hor | 54.00 | -10.19 |
| 2437 | 2489.7 | 62.98 | pk | ver | 74.00 | -11.02 |
| 2437 | 2496.5 | 57.62 | pk | hor | 74.00 | -16.38 |
| 2437 | 2496.5 | 39.92 | RMS | hor | 54.00 | -14.08 |
| 2462 | 2399 | 60.32 | pk | hor | 95.00 | -34.68 |
| 2462 | 2483.6 | 71.85 | pk | ver | 74.00 | -02.15 |
| 2462 | 2483.6 | 45.66 | RMS | ver | 54.00 | -08.34 |
| 2462 | 2483.7 | 71.61 | pk | ver | 74.00 | -02.39 |
| 2462 | 2483.7 | 46.27 | RMS | ver | 54.00 | -07.73 |
| 2462 | 2484 | 71.86 | pk | ver | 74.00 | -02.14 |
| 2462 | 2484 | 46.34 | RMS | ver | 54.00 | -07.66 |
| 2462 | 2484.3 | 71.98 | pk | ver | 74.00 | -02.02 |
| 2462 | 2484.3 | 45.99 | RMS | ver | 54.00 | -08.01 |
| 2462 | 2484.5 | 71.70 | pk | ver | 74.00 | -02.30 |
| 2462 | 2484.5 | 46.55 | RMS | ver | 54.00 | -07.45 |

3.9 Test Conditions and Results - Receiver radiated emissions


3.9.1 Information


| Test Information | |
|--------------------|---|
| Reference | ISED RSS-247, Issue 2 (section 3.1) |
| Measurement Method | ANSI C63.10 6.5, 6.6, 11.12 |
| Operator | Abdullah Al Jamal |
| Date | 2019-07-26 |
| Note | Only plots containing spurious emissions are shown in this annex. All missing plots contain noise or contain no significant emission only. |

3.9.2 Limits

| Limits | | | |
|-----------------|------------|-------------------------------|--------------------------|
| Frequency [MHz] | Detector | Field strength [dB μ V/m] | Measurement distance [m] |
| 30 - 88 | Quasi-Peak | 100 | 3 |
| 88 - 216 | Quasi-Peak | 150 | 3 |
| 216 - 960 | Quasi-Peak | 200 | 3 |
| 960 - 1000 | Quasi-Peak | 500 | 3 |
| >1000 | Average | 500 | 3 |

3.9.3 Setup

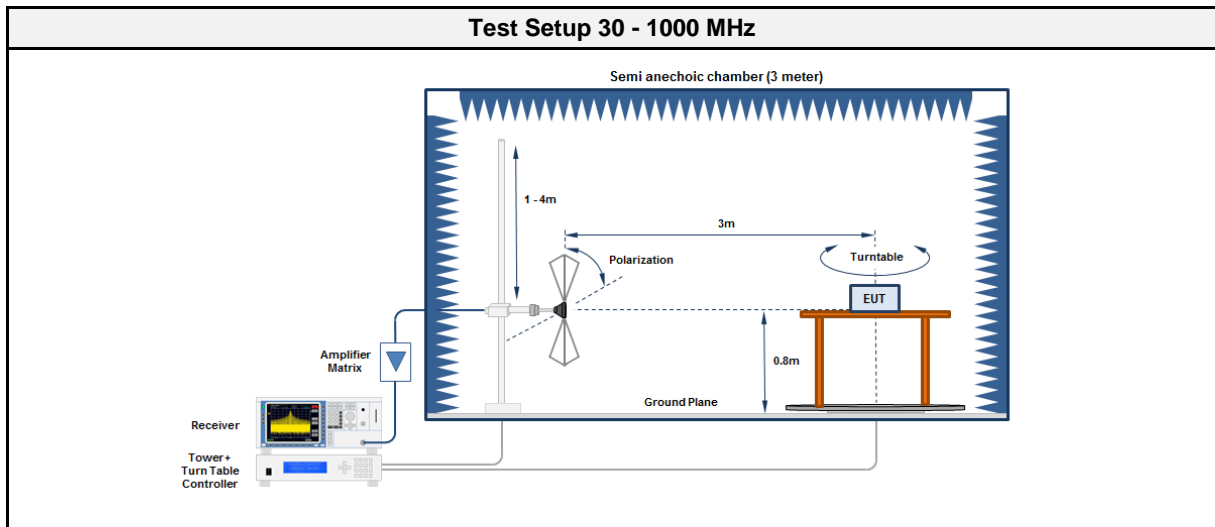

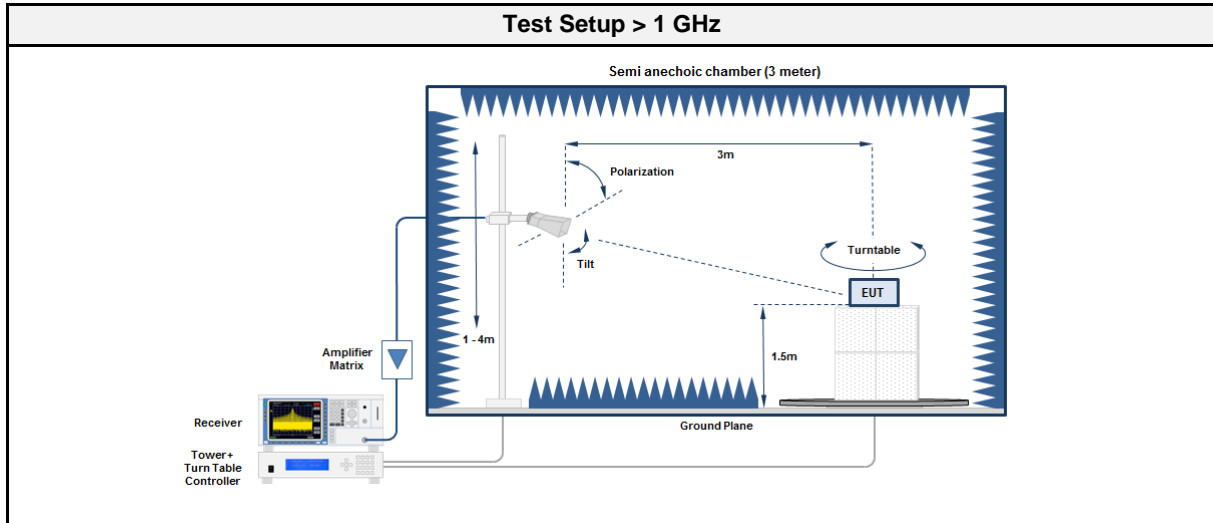

3.9.4 Equipment

| Test Software | | | |
|---------------|------------------|------------|----------|
| Description | Manufacturer | Name | Version |
| EMC Software | DARE Instruments | RadiMation | 2015.2.4 |

| Test Equipment 30 - 1000 MHz | | | | | |
|------------------------------|--------------|-----------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber | Frankonia | AC1 | EF00062 | 2018-07 | 2021-07 |
| Measurement Receiver | R&S | ESU 26 | EF00887 | 2018-08 | 2019-08 |
| Antenna | R&S | VULB 9162 | EF00978 | 2016-11 | 2019-11 |

| Test Equipment > 1 GHz | | | | | |
|------------------------|--------------|------------|------------|-----------|----------|
| Description | Manufacturer | Model | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber | Frankonia | AC1 | EF00062 | 2018-07 | 2021-07 |
| Measurement Receiver | R&S | ESU 26 | EF00887 | 2018-08 | 2019-08 |
| Antenna | Schwarzbeck | BBHA 9120D | EF00018 | 2016-09 | 2019-09 |

3.9.5 Procedure

| Test Procedure 30 - 1000 MHz |
|--|
| <ol style="list-style-type: none"> 1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector |

| Test Procedure > 1 GHz |
|--|
| <ol style="list-style-type: none"> 1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector |

3.9.6 Results

| Test Results | | | | | | |
|--------------------|----------------|----------------------|------|------|----------------------|-------------|
| Antenna port 1 (W) | | | | | | |
| Channel [MHz] | Emission [MHz] | Level [dB μ V/m] | Det. | Pol. | Limit [dB μ V/m] | Margin [dB] |
| 2437 | 31.635 | 32.98 | pk | hor | 40.00 | -07.02 |
| 2437 | 319.231 | 34.01 | pk | hor | 46.00 | -11.99 |
| 2437 | 355.128 | 35.14 | pk | ver | 46.00 | -10.86 |
| 2437 | 639.744 | 39.19 | pk | hor | 46.00 | -06.81 |
| 2437 | 1135 | 44.54 | pk | hor | 53.98 | -09.44 |
| 2437 | 1332 | 44.05 | pk | ver | 53.98 | -09.93 |
| 2437 | 10971 | 43.96 | pk | hor | 53.98 | -10.02 |
| 2437 | 14555 | 47.44 | pk | hor | 53.98 | -06.54 |

ANNEX A Transmitter spurious emissions


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-24
 Note:

Index 29

RadiMation

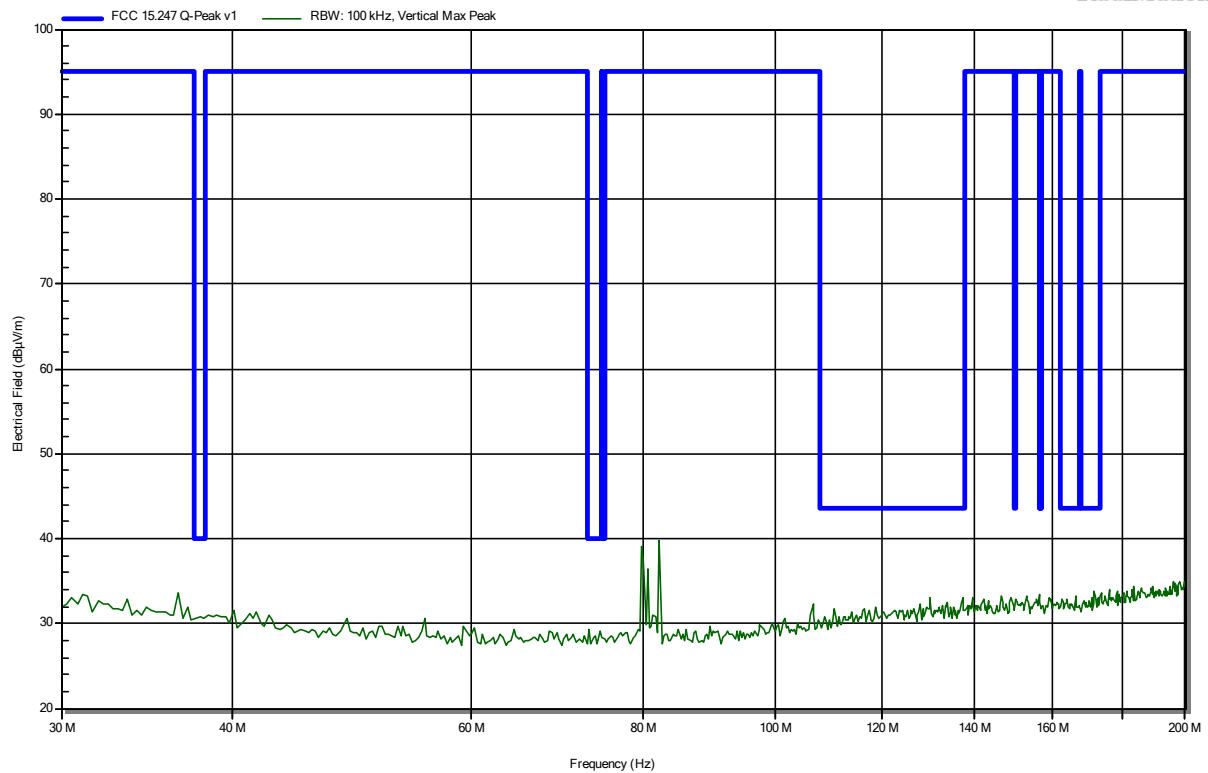


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-24
 Note:

Index 27

RadiMation

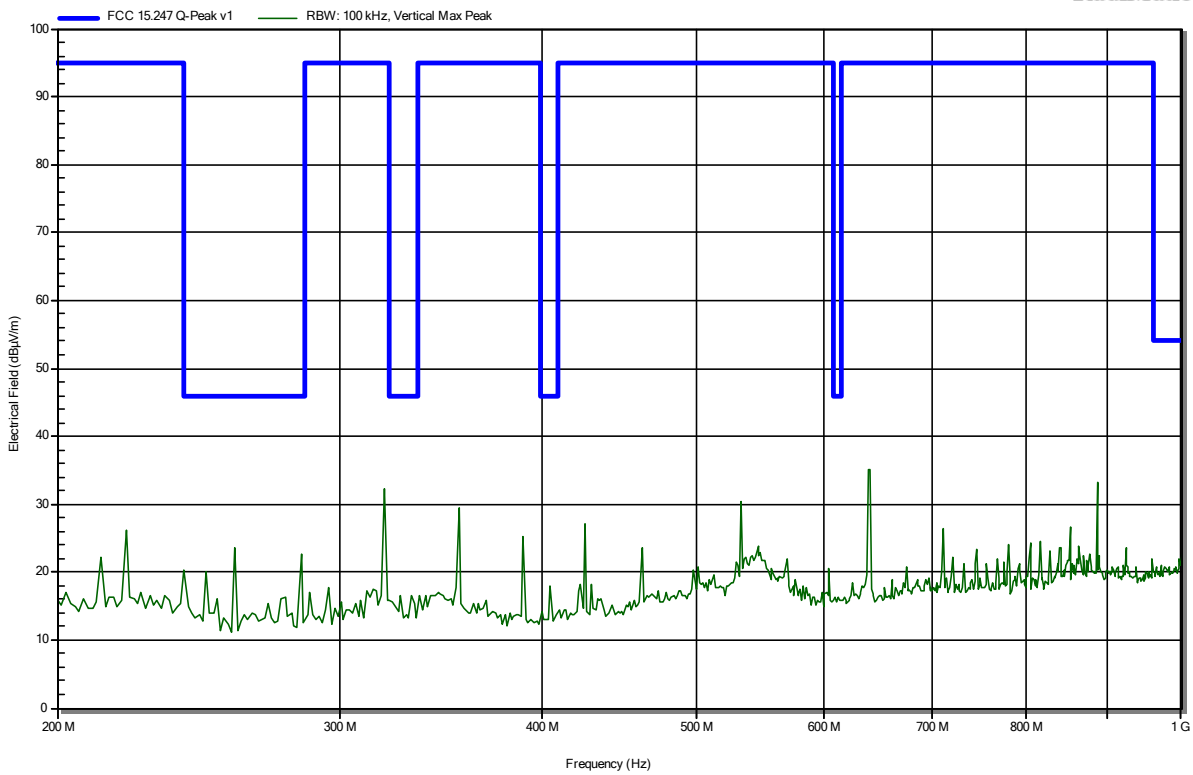


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note:

Index 2

RadiMation

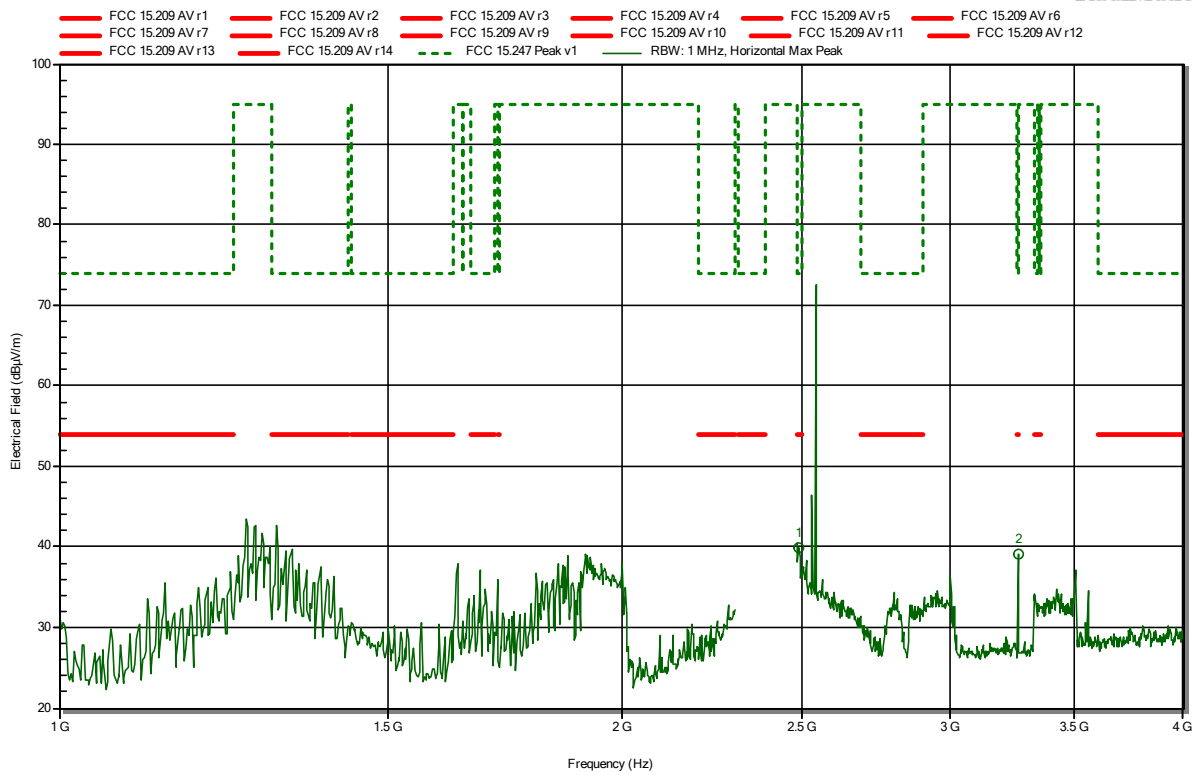

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.4884 GHz | 39.86 dBµV/m | 74 dBµV/m | -34.14 dB | Pass |
| 3.2612 GHz | 39.03 dBµV/m | 74 dBµV/m | -34.97 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note:

Index 6

RadiMation

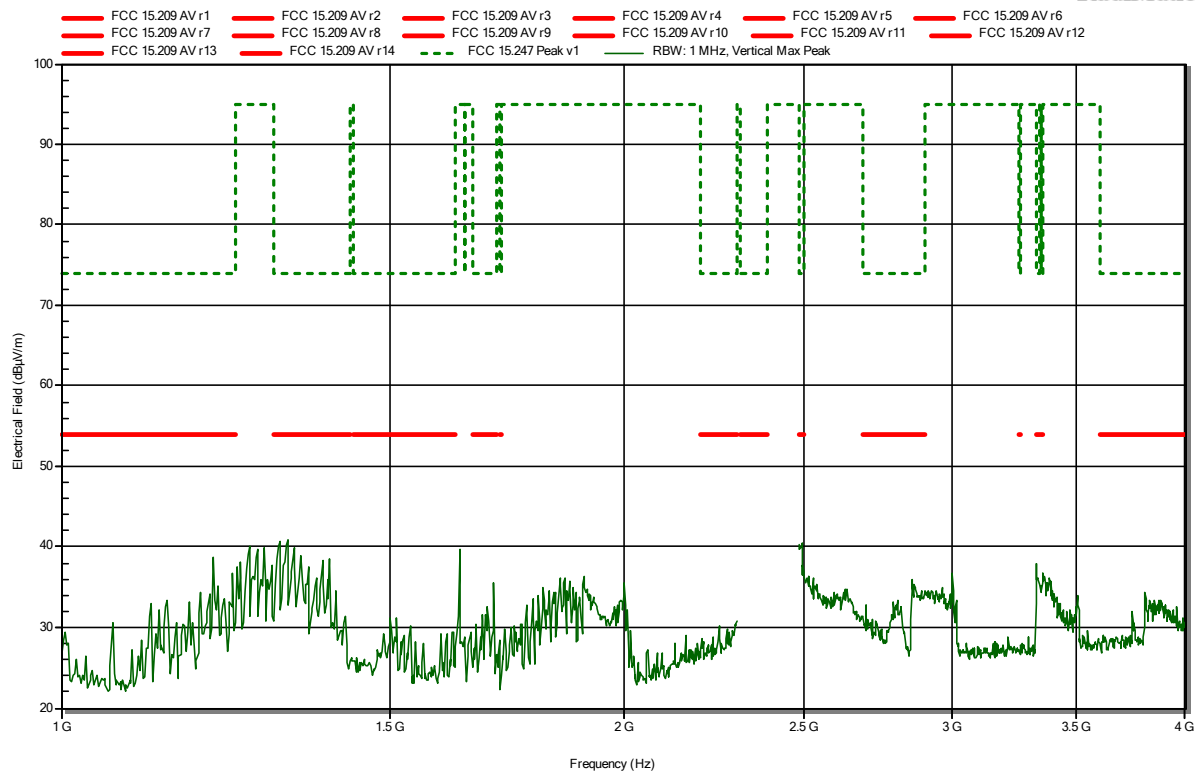


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note: lower bandedge

Index 3

RadiMation

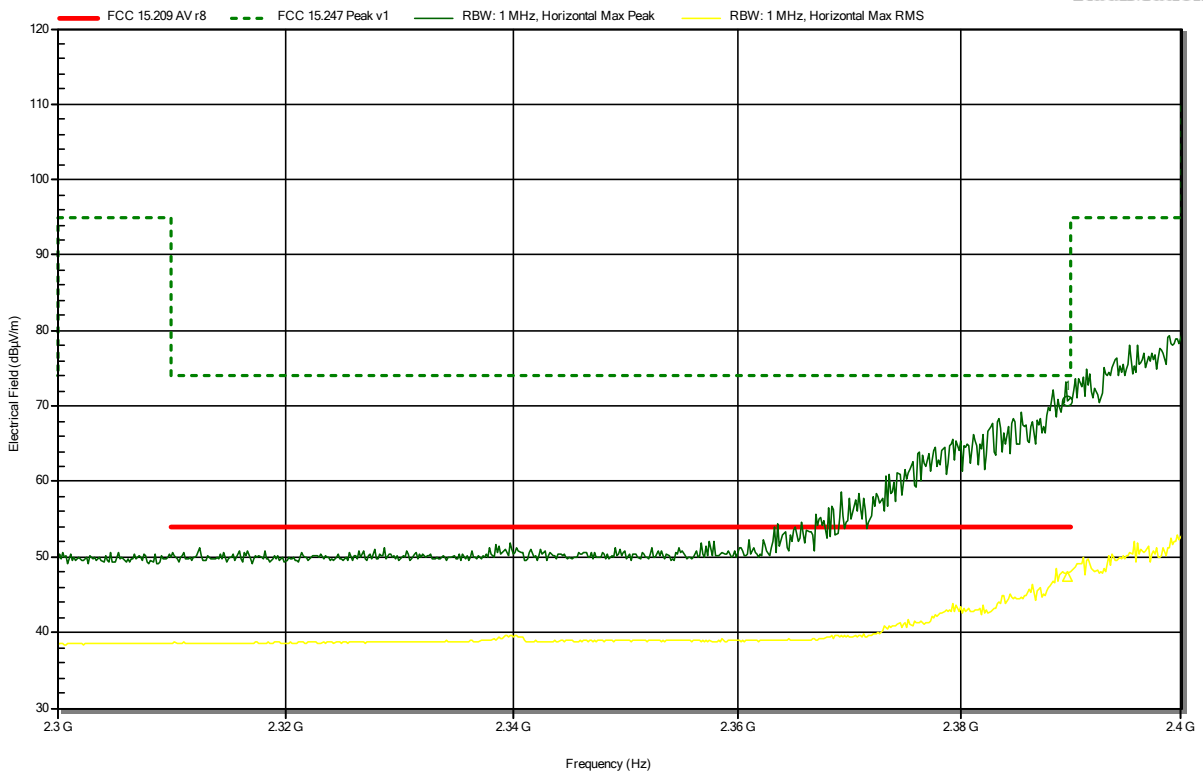

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.3897 GHz | 70.73 dBµV/m | 74 dBµV/m | -3.27 dB | Pass |

| Frequency | RMS | RMS Limit | RMS Difference | RMS Status |
|------------|--------------|-----------|----------------|------------|
| 2.3897 GHz | 47.45 dBµV/m | 54 dBµV/m | -6.55 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note: lower bandedge

Index 7

RadiMation

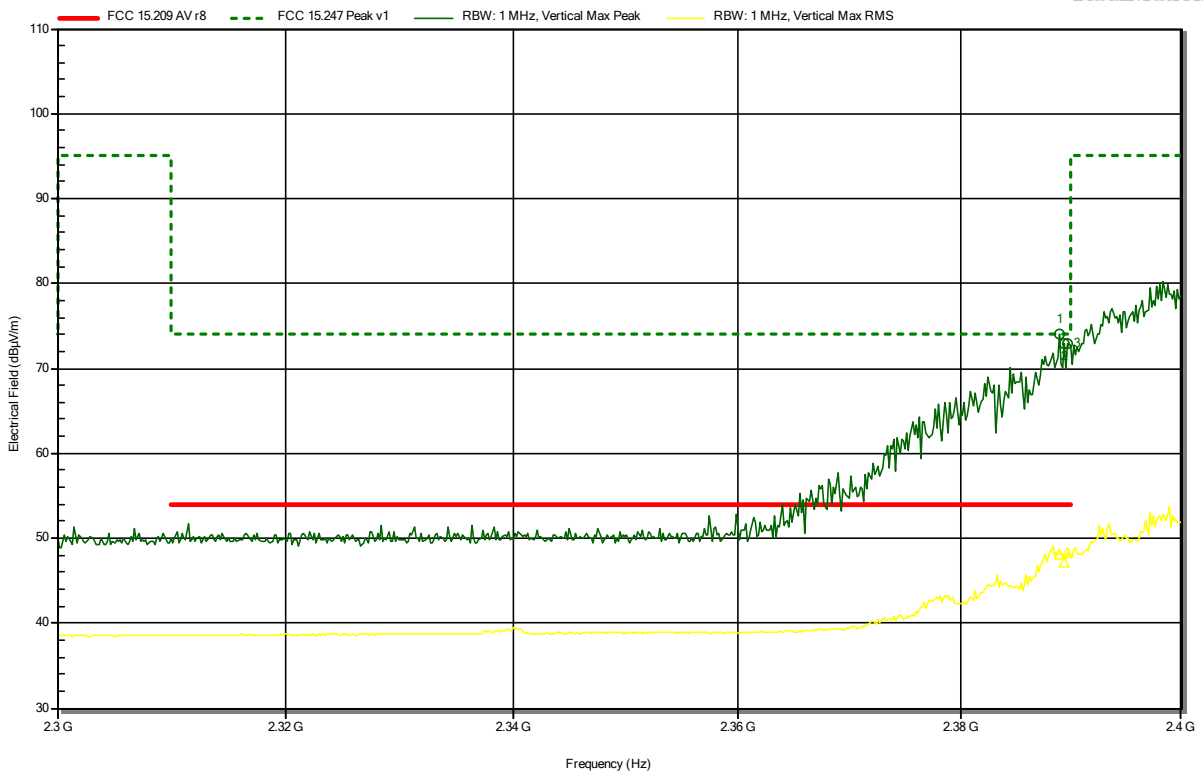

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.3889 GHz | 73.99 dBµV/m | 74 dBµV/m | -0.01 dB | Pass |
| 2.3894 GHz | 73 dBµV/m | 74 dBµV/m | -1 dB | Pass |
| 2.3897 GHz | 72.9 dBµV/m | 74 dBµV/m | -1.1 dB | Pass |

| Frequency | RMS | RMS Limit | RMS Difference | RMS Status |
|------------|--------------|-----------|----------------|------------|
| 2.3889 GHz | 48.1 dBµV/m | 54 dBµV/m | -5.9 dB | Pass |
| 2.3894 GHz | 47.13 dBµV/m | 54 dBµV/m | -6.87 dB | Pass |
| 2.3897 GHz | 48.23 dBµV/m | 54 dBµV/m | -5.77 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note:

Index 4

RadiMation

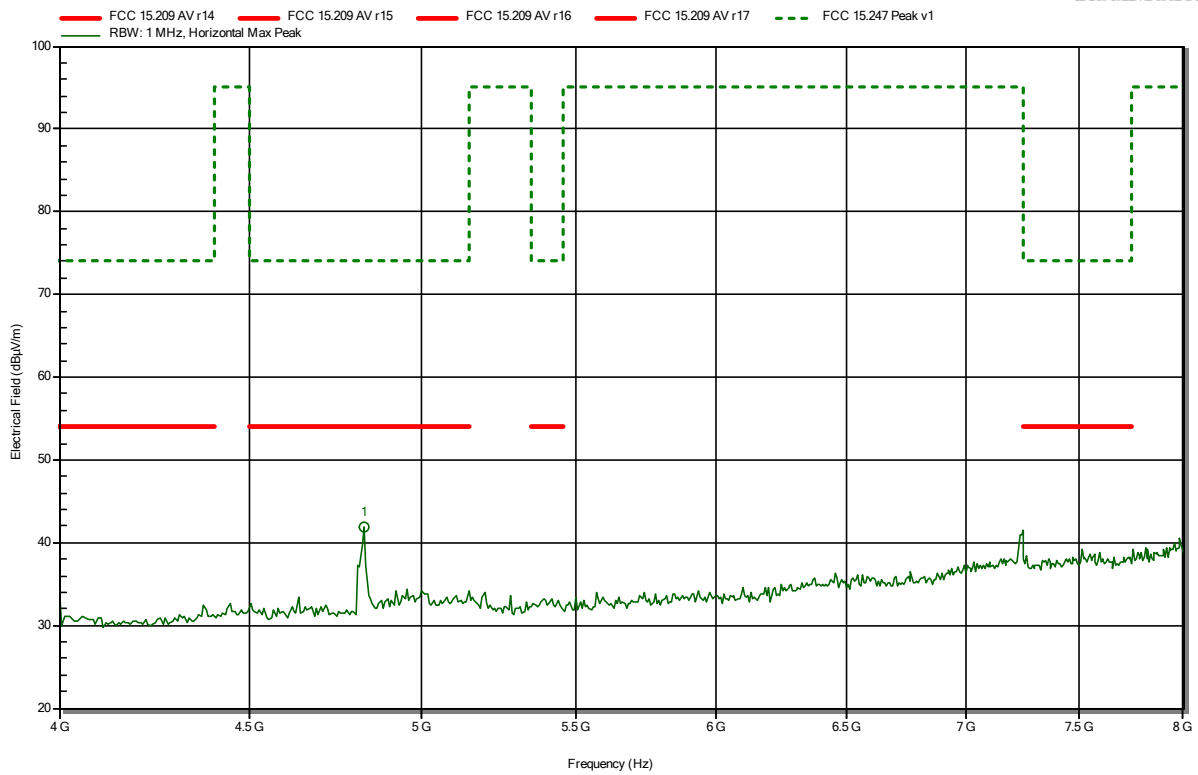

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 4.827 GHz | 41.86 dBµV/m | 74 dBµV/m | -32.14 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note:

Index 8

RadiMation

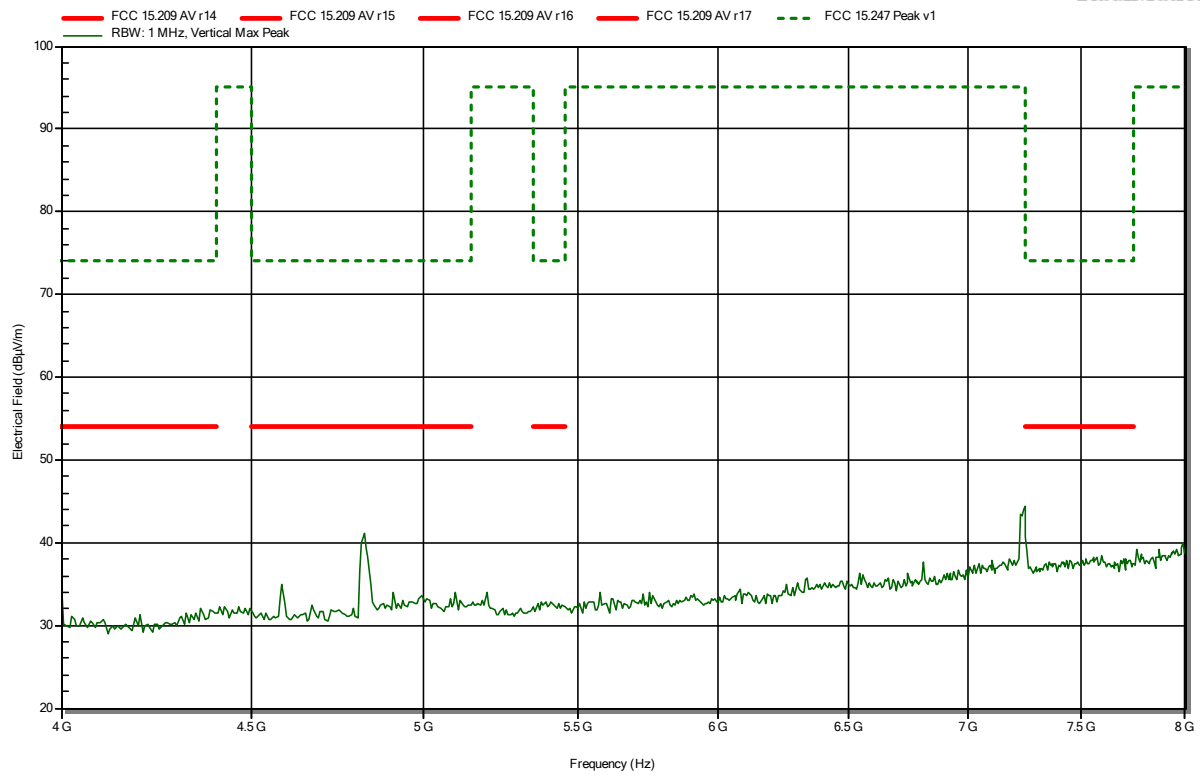


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note:

Index 5

RadiMation

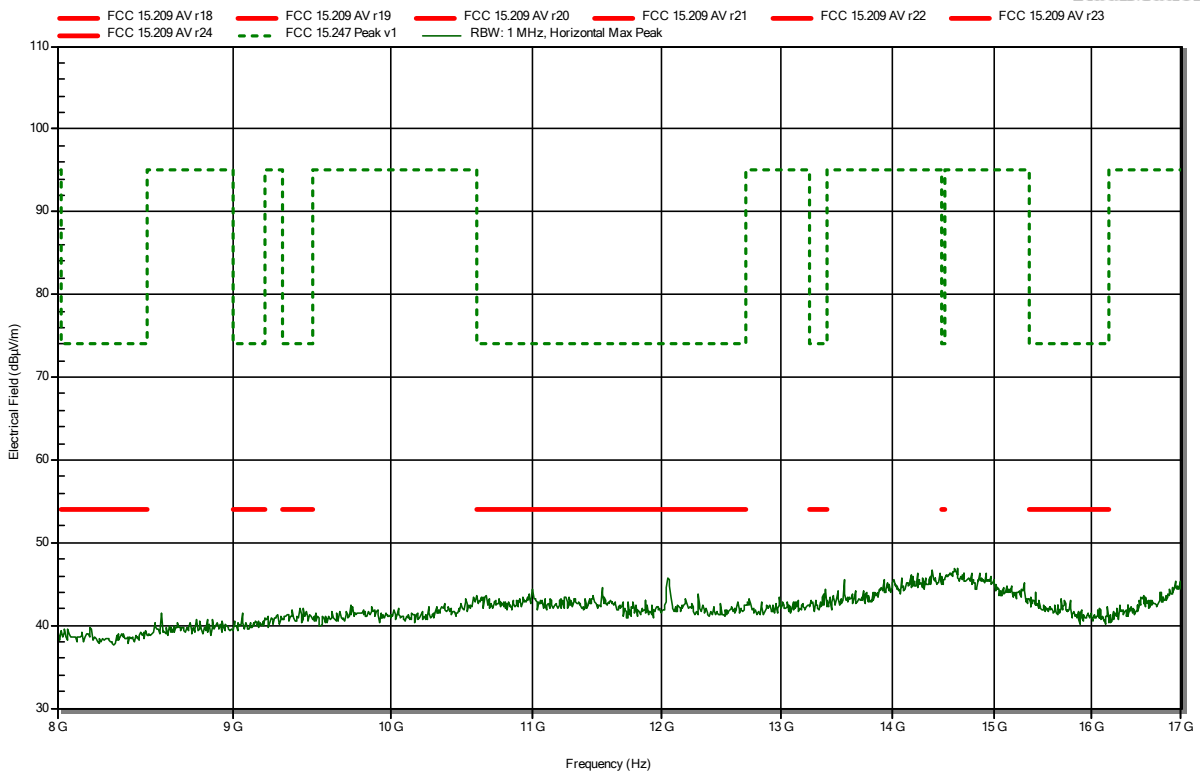


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-20
 Note:

Index 9

RadiMation

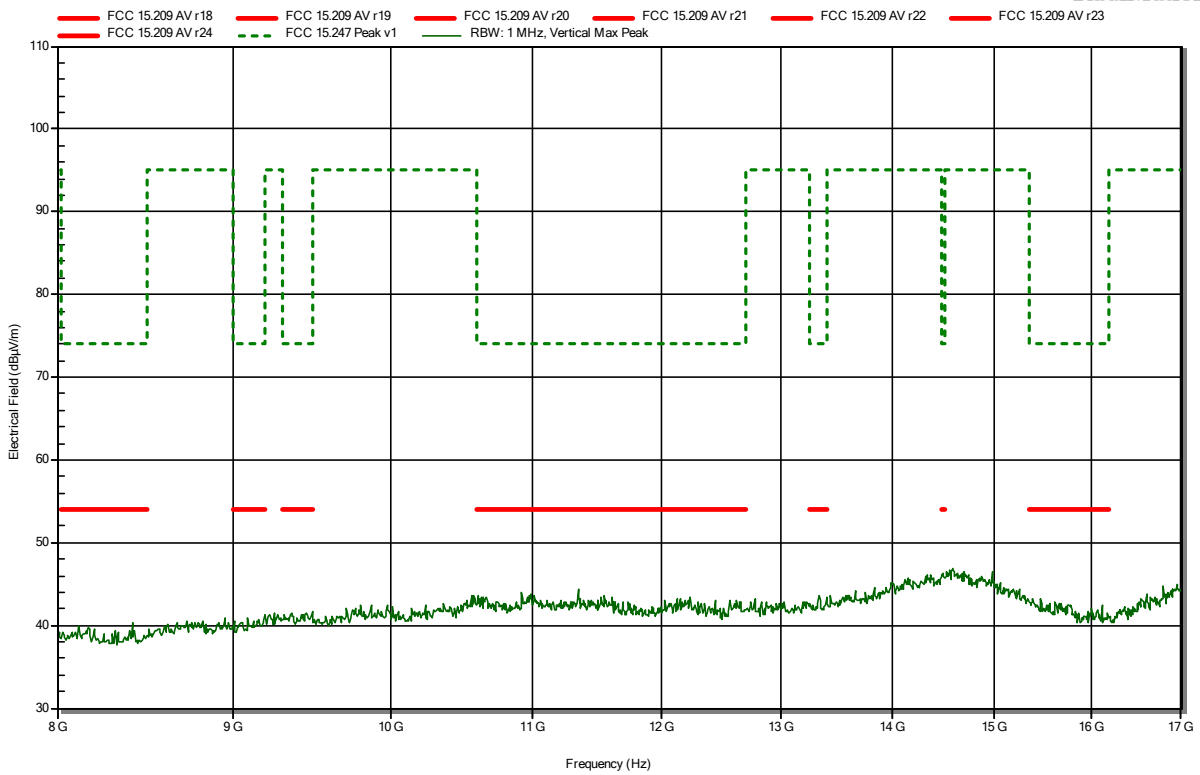


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9 °C, Vnom: 120 VAC (external power supply)
 Antenna: Amplifier Research AT4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2412 MHz
 Test Date: 2019-06-24
 Note:

Index 46

RadiMation

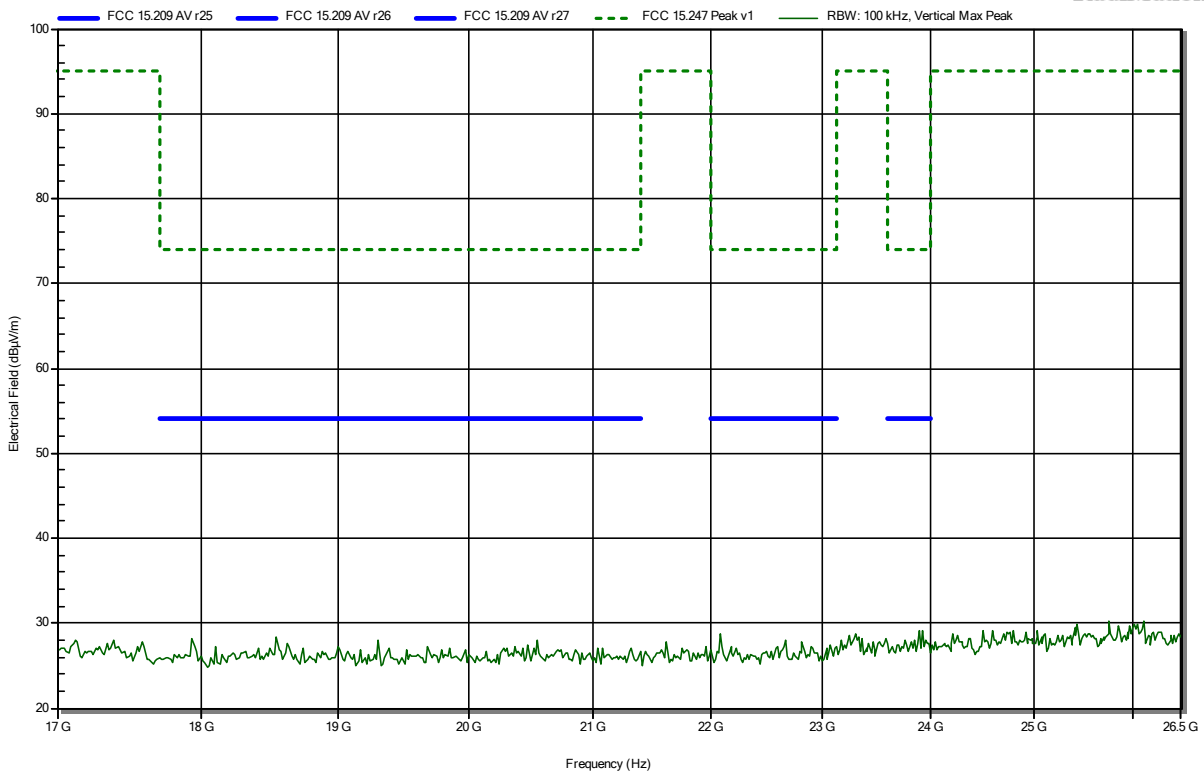


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-24
 Note:

Index 30

RadiMation

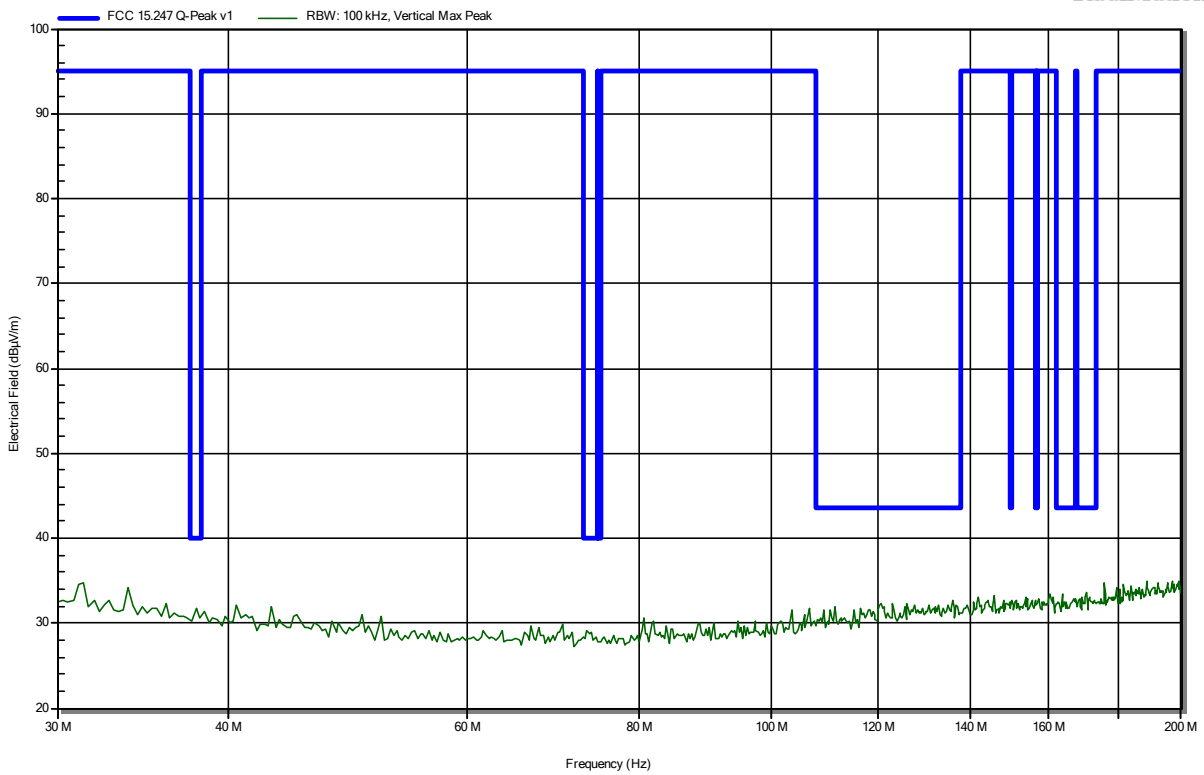


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-24
 Note:

Index 24

RadiMation

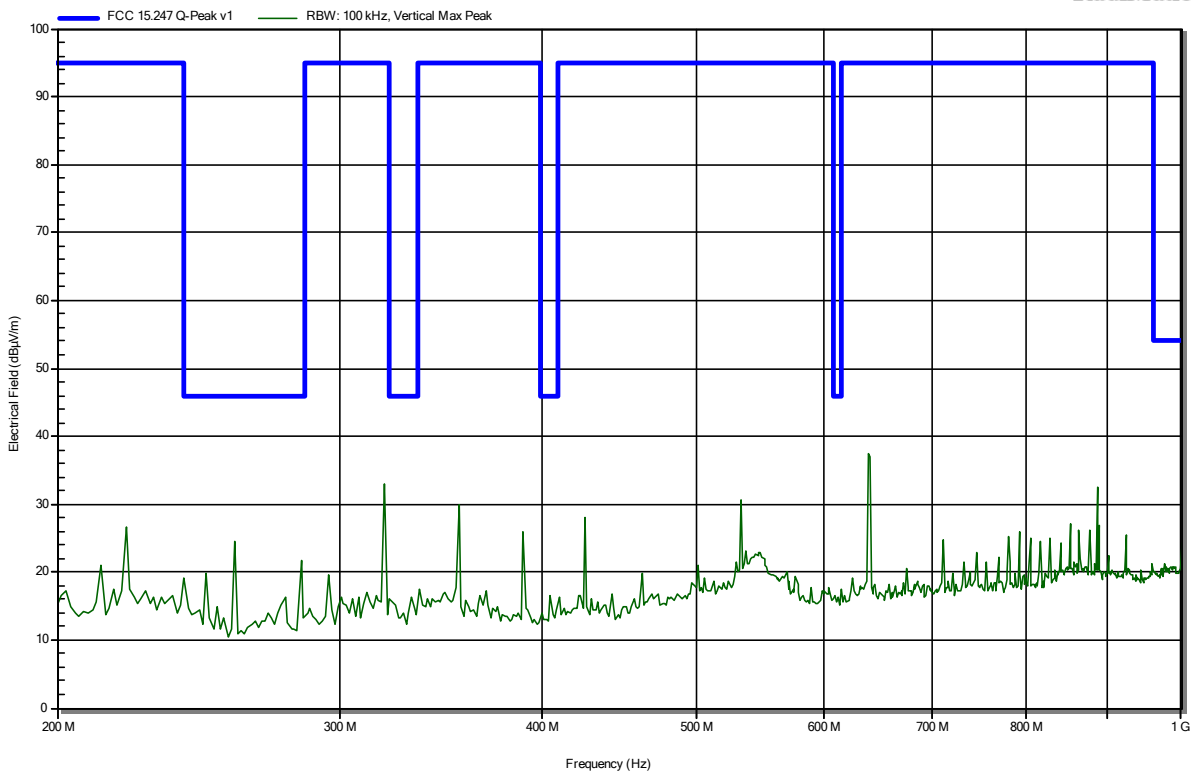


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-20
 Note:

Index 14

RadiMation

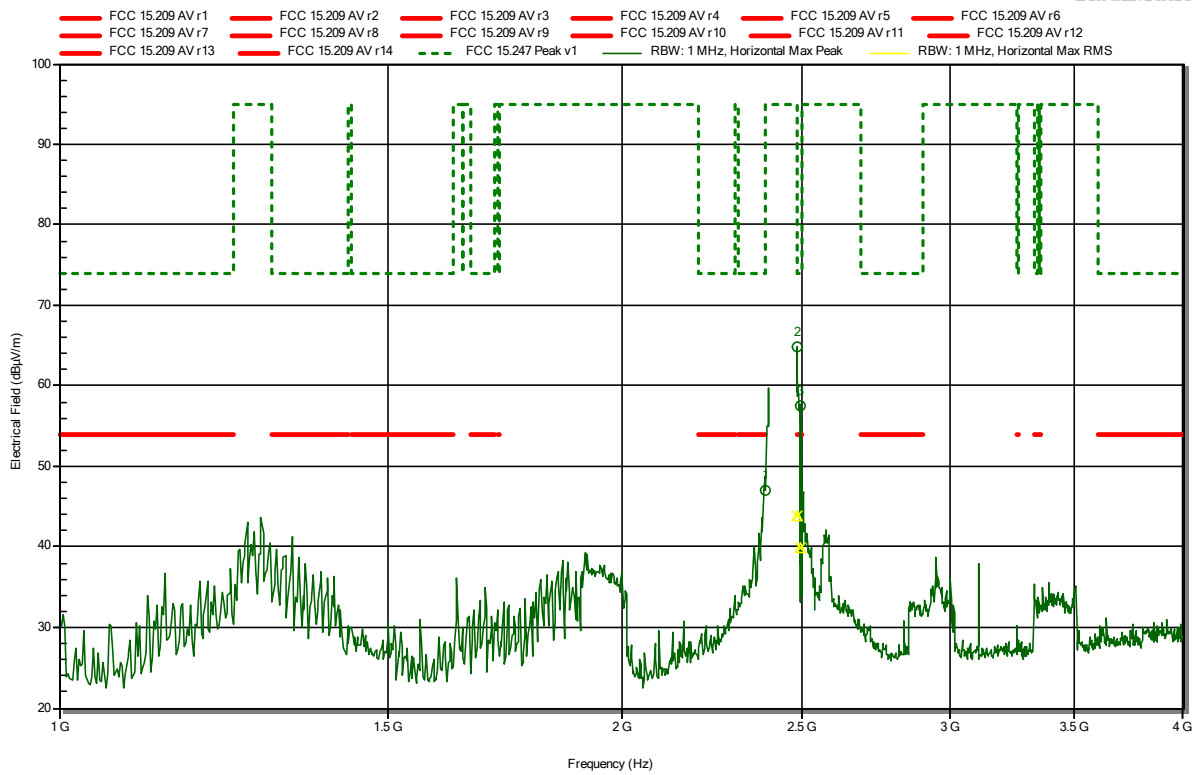

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.3888 GHz | 46.97 dBµV/m | 74 dBµV/m | -27.03 dB | Pass |
| 2.4838 GHz | 64.81 dBµV/m | 74 dBµV/m | -9.19 dB | Pass |
| 2.4965 GHz | 57.62 dBµV/m | 74 dBµV/m | -16.38 dB | Pass |

| Frequency | RMS | RMS Limit | RMS Difference | RMS Status |
|------------|--------------|-----------|----------------|------------|
| 2.4838 GHz | 43.81 dBµV/m | 54 dBµV/m | -10.19 dB | Pass |
| 2.4965 GHz | 39.92 dBµV/m | 54 dBµV/m | -14.08 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-20
 Note:

Index 13

RadiMation

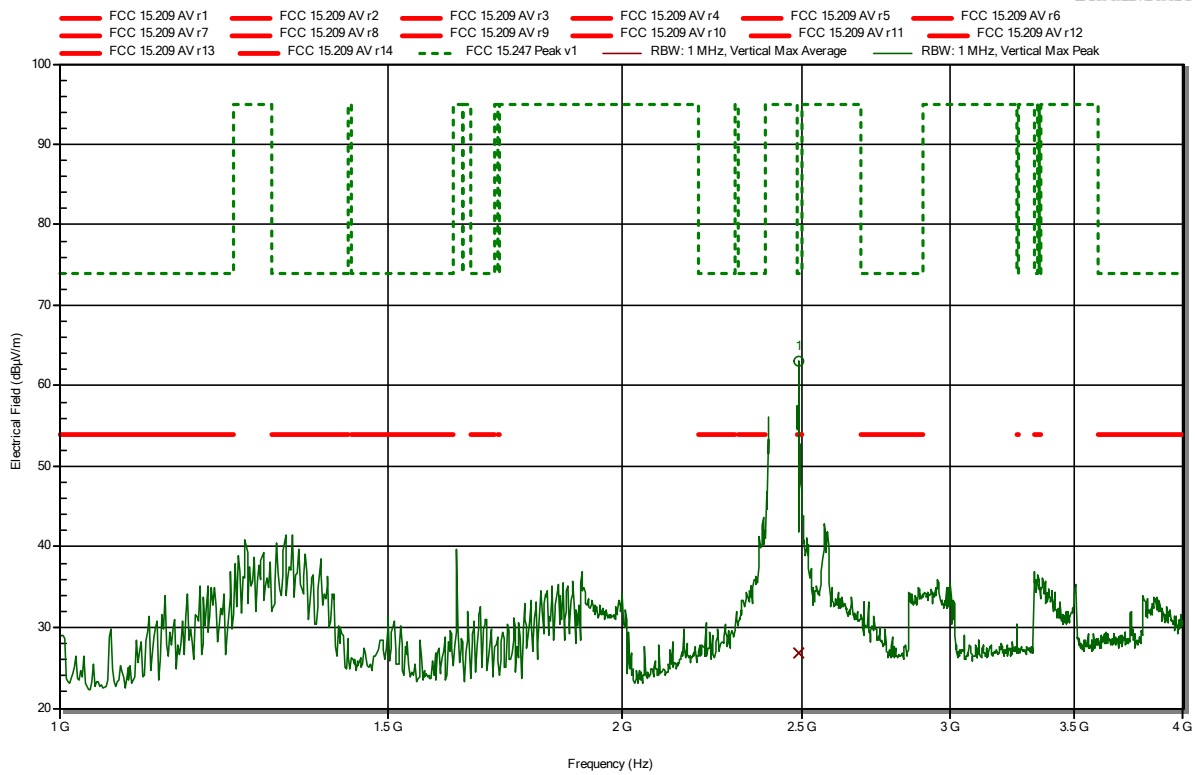

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.4897 GHz | 62.98 dBµV/m | 74 dBµV/m | -11.02 dB | Pass |

| Frequency | Average | Average Limit | Average Difference | Average Status |
|------------|--------------|---------------|--------------------|----------------|
| 2.4897 GHz | 26.75 dBµV/m | 54 dBµV/m | -27.25 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-20
 Note:

Index 15

RadiMation

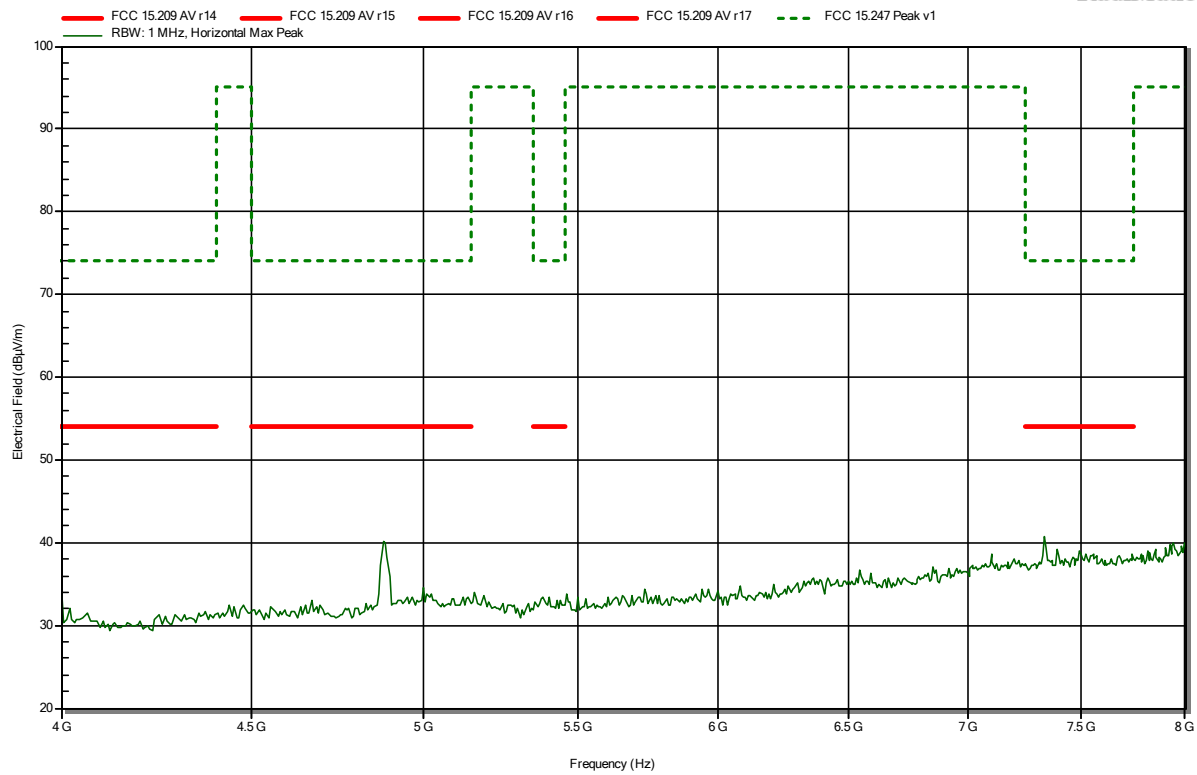


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-20
 Note:

Index 11

RadiMation

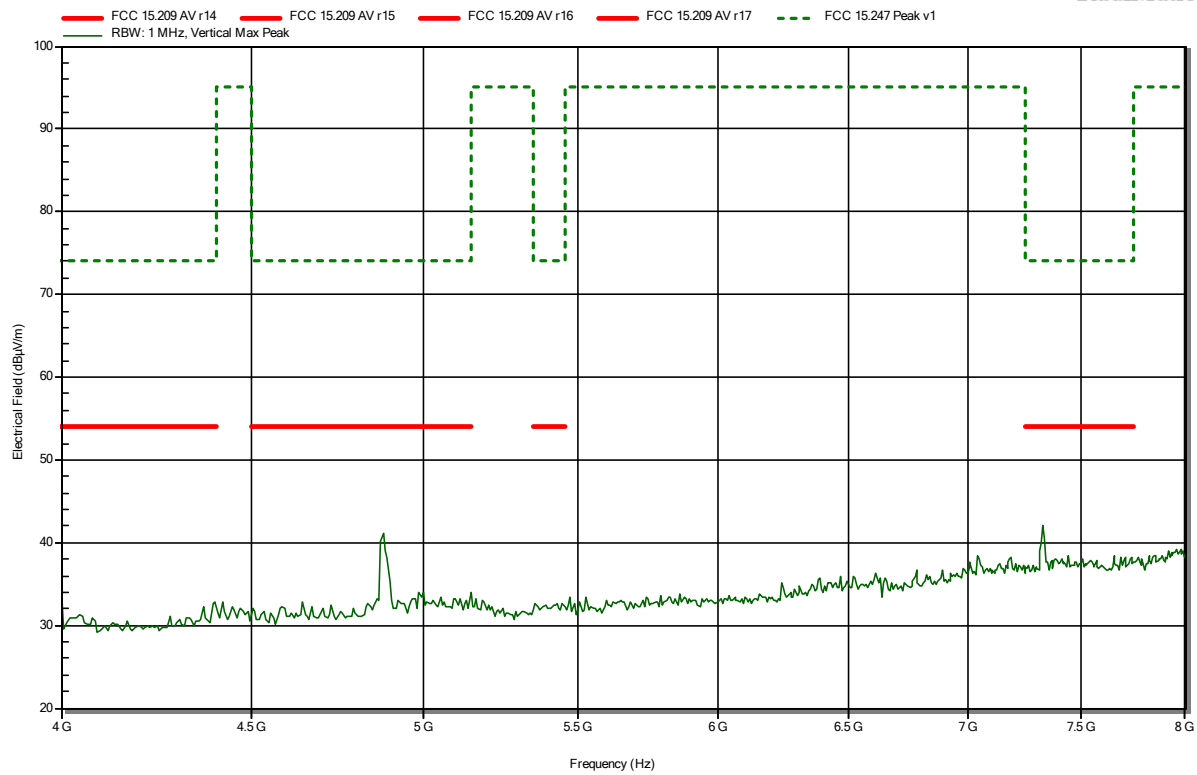


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-20
 Note:

Index 16

RadiMation

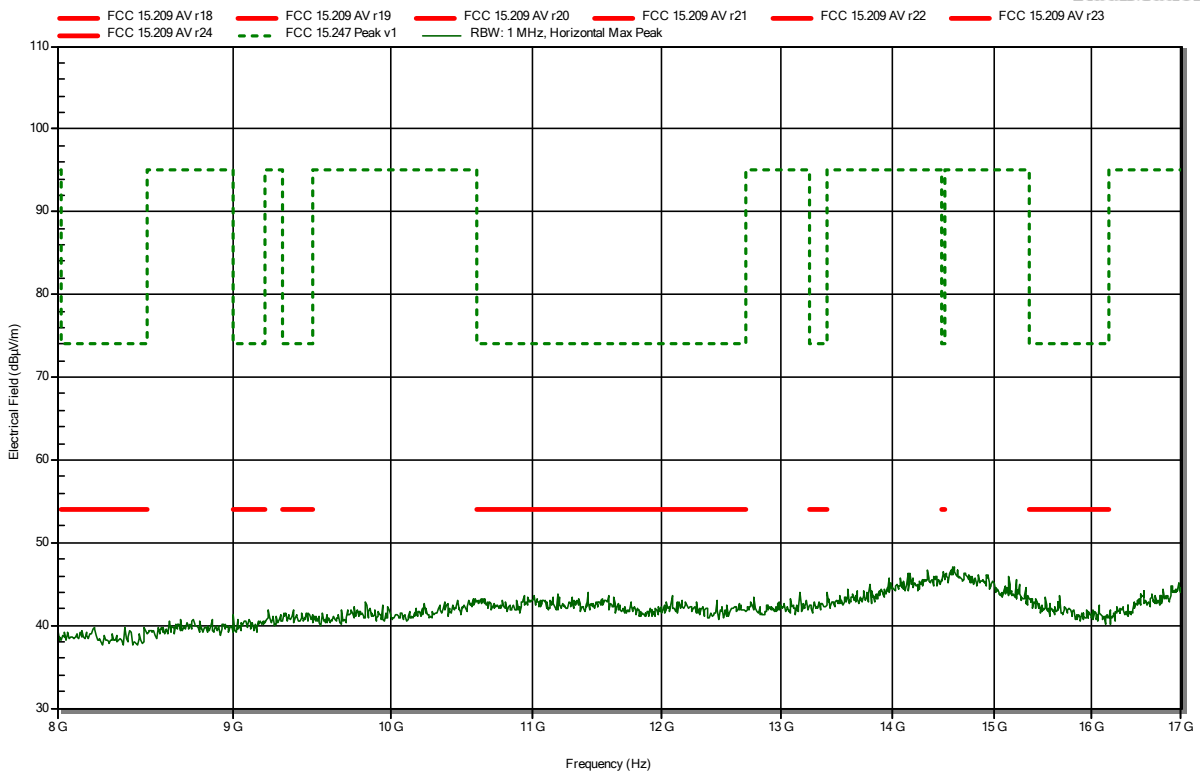


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-20
 Note:

Index 10

RadiMation

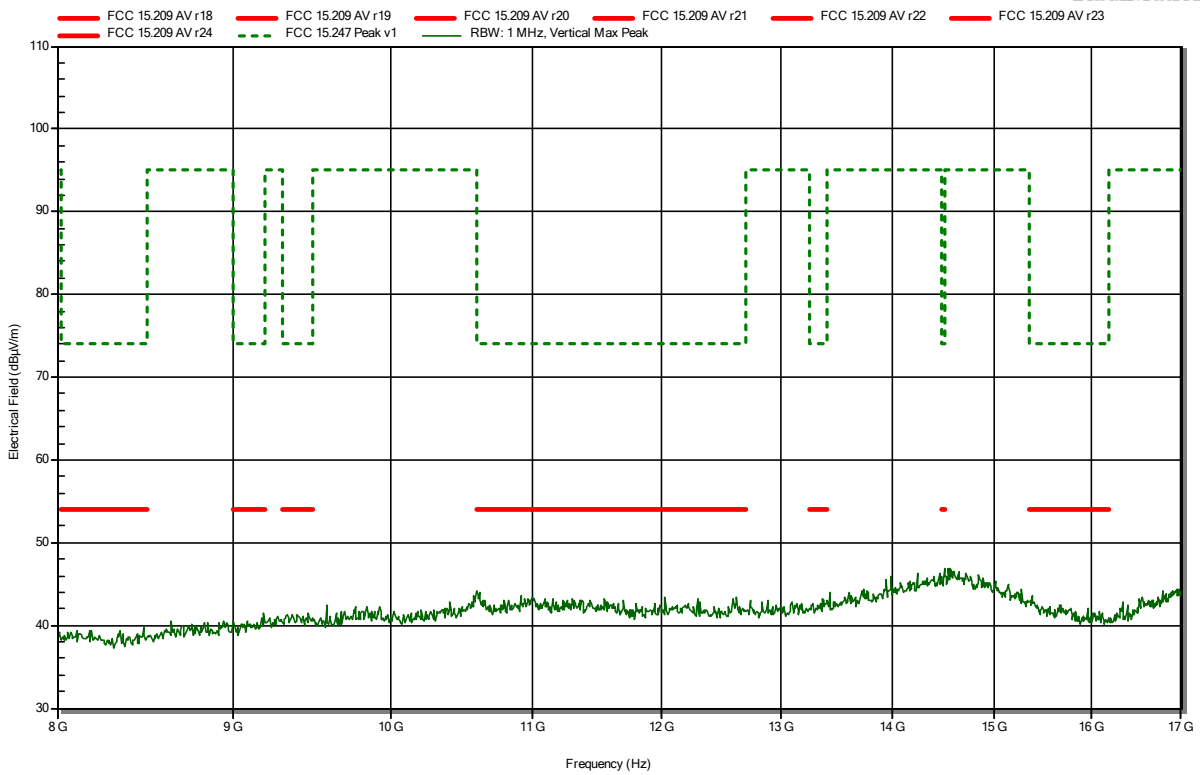


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9 °C, Vnom: 120 VAC (external power supply)
 Antenna: Amplifier Research AT4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-06-24
 Note:

Index 47

RadiMation

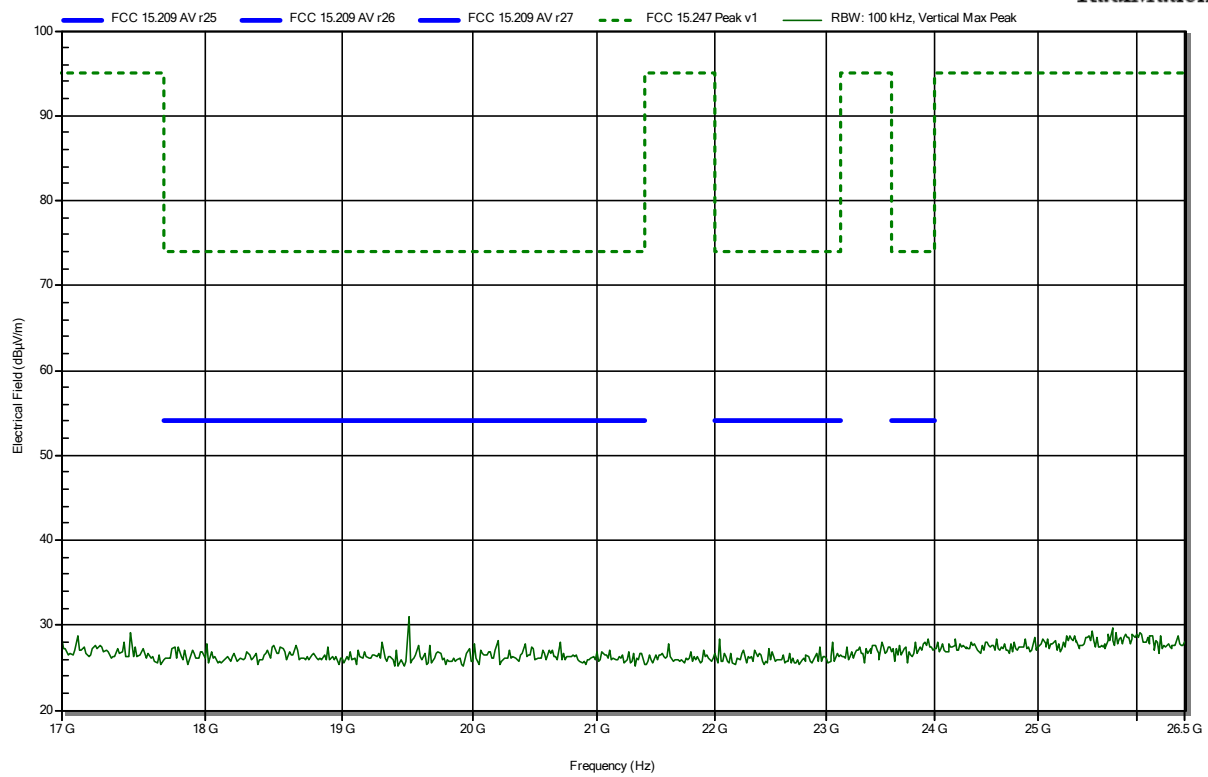


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 33

RadiMation

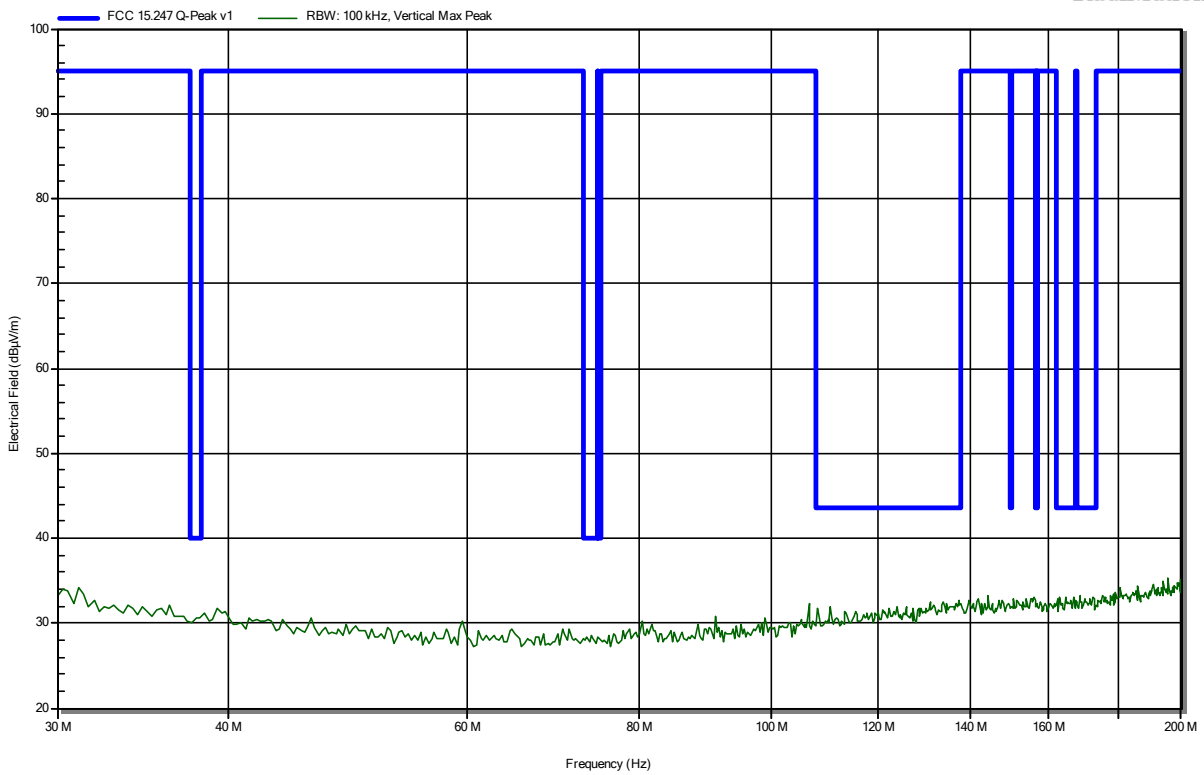


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 23

RadiMation

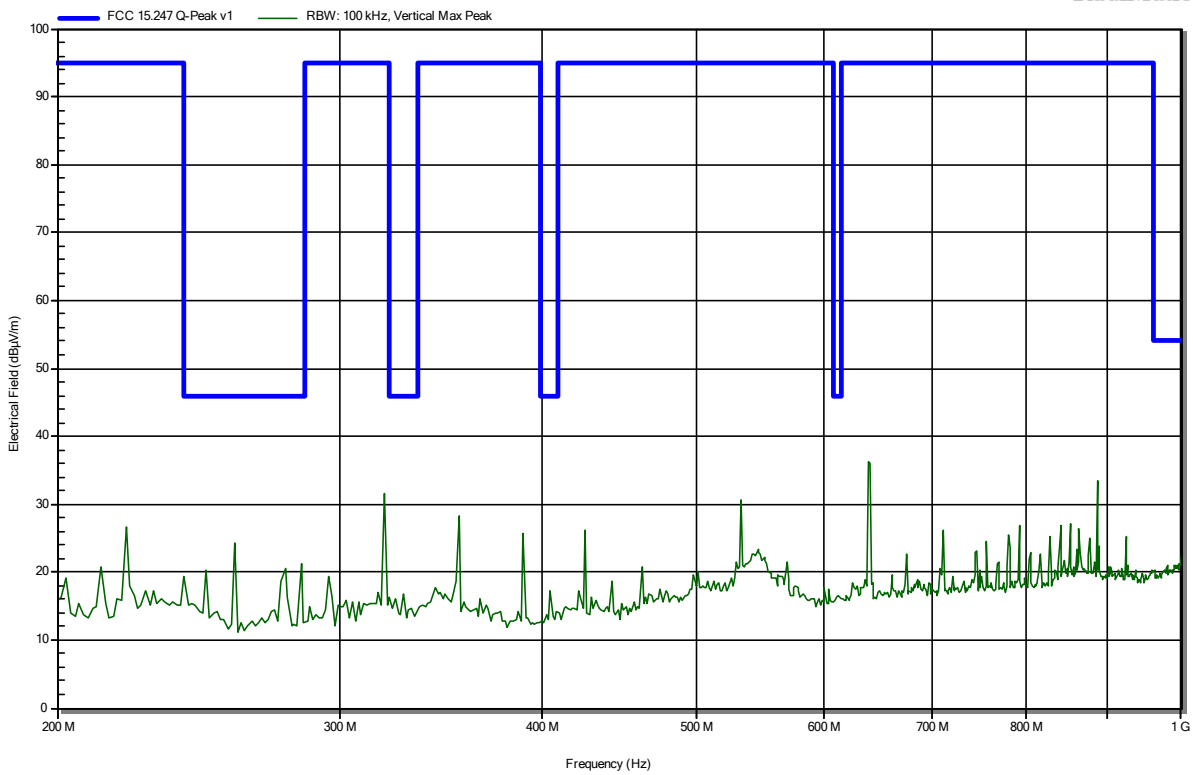


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 35

RadiMation

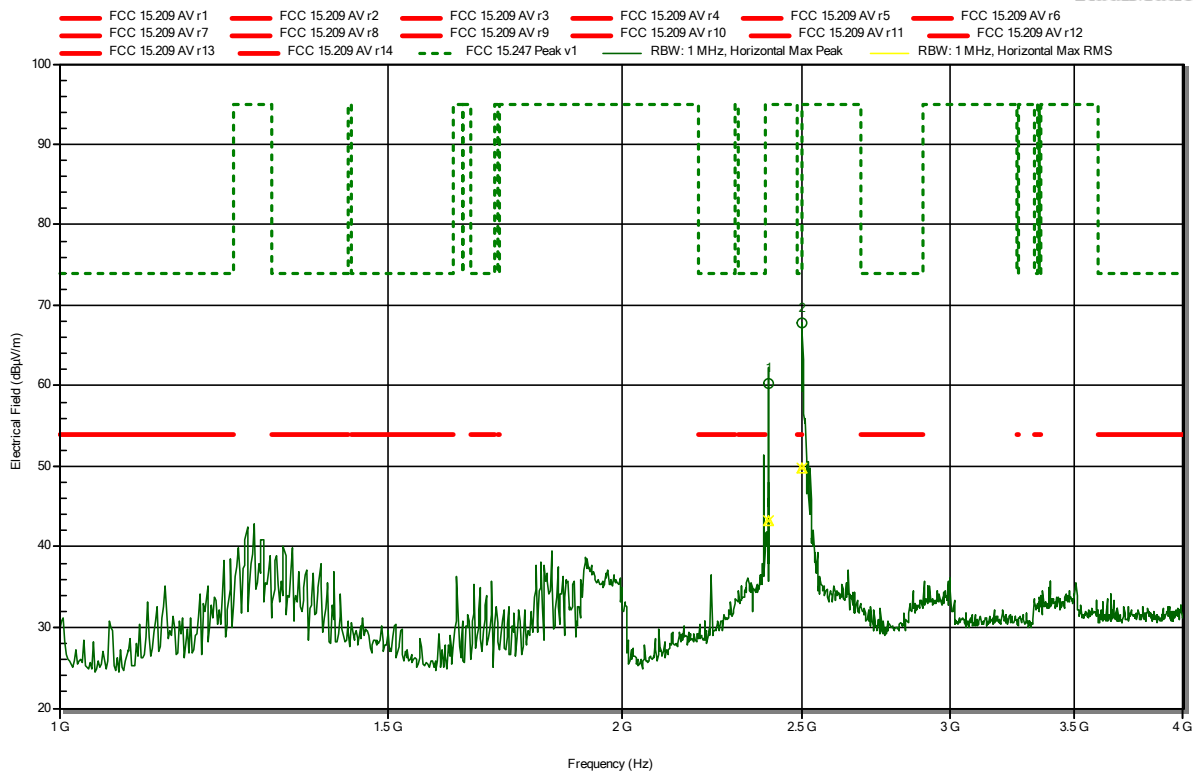

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 2.399 GHz | 60.32 dBµV/m | 95 dBµV/m | -34.68 dB | Pass |
| 2.5 GHz | 67.76 dBµV/m | 95 dBµV/m | -27.24 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 41

RadiMation

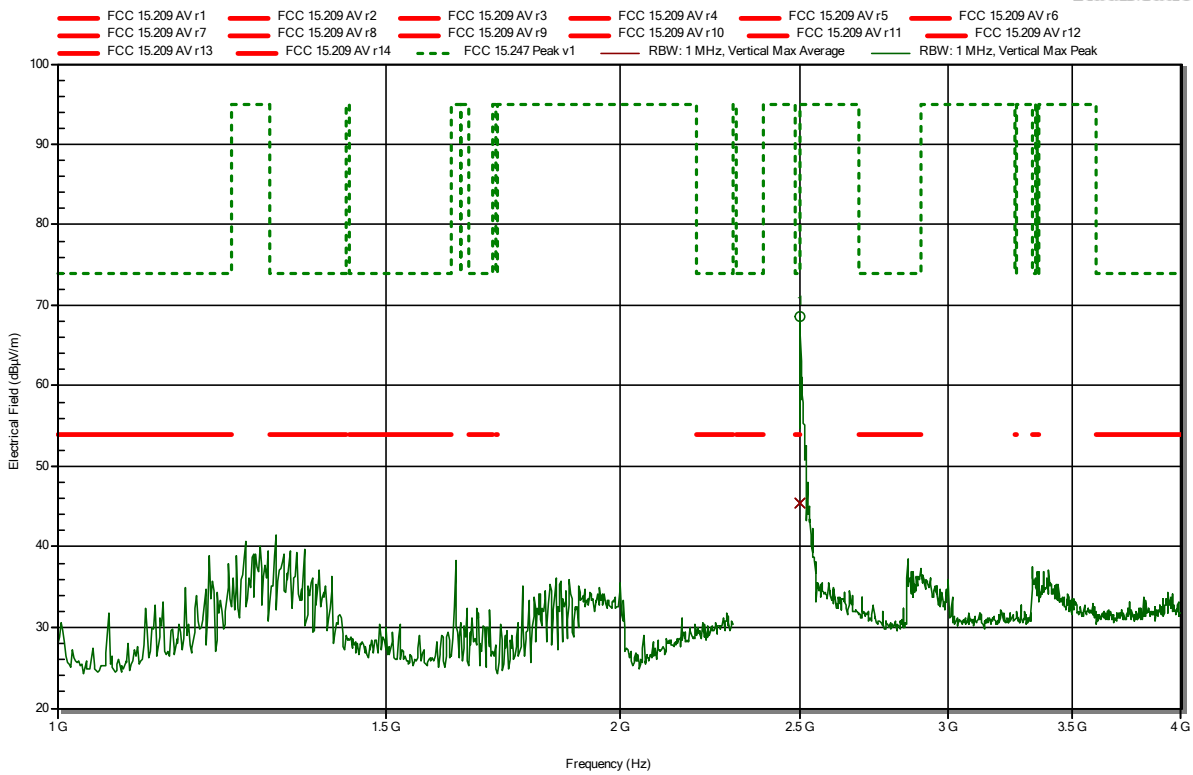

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|-----------|-------------|------------|-----------------|-------------|
| 2.5 GHz | 68.7 dBµV/m | 95 dBµV/m | -26.3 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note: upper bandedge

Index 34

RadiMation

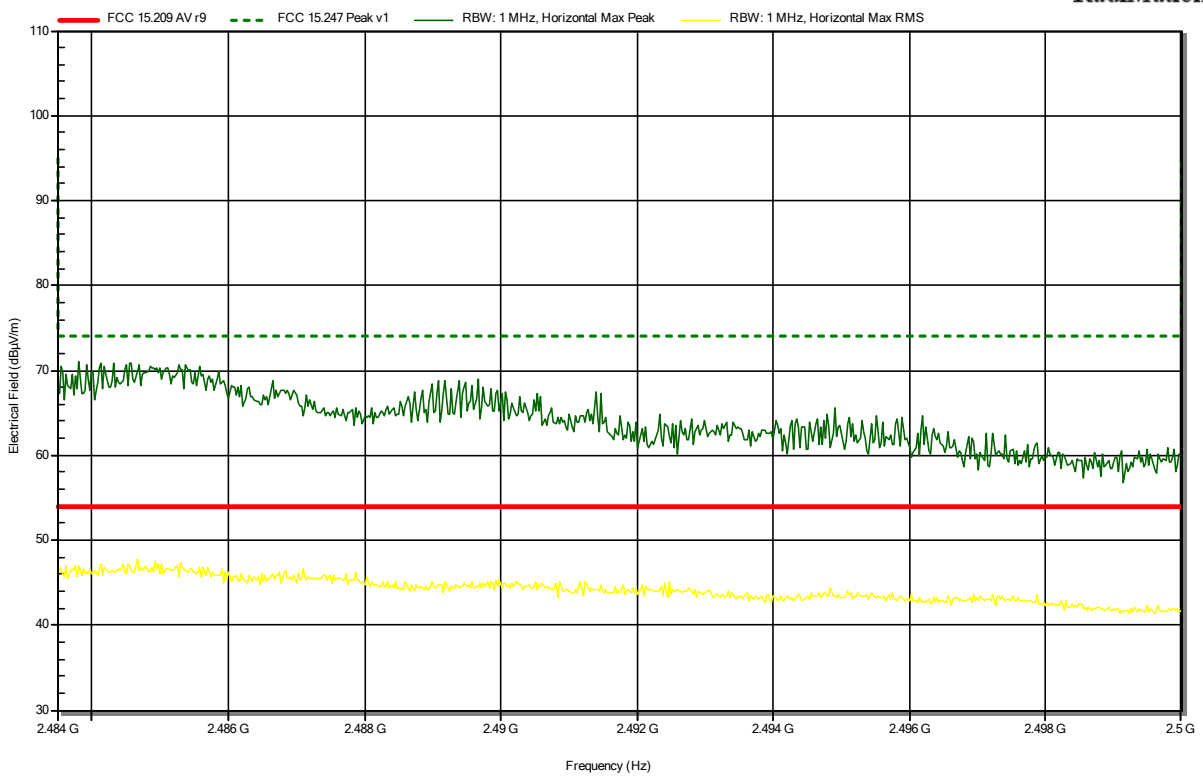


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note: upper bandedge

Index 42

RadiMation

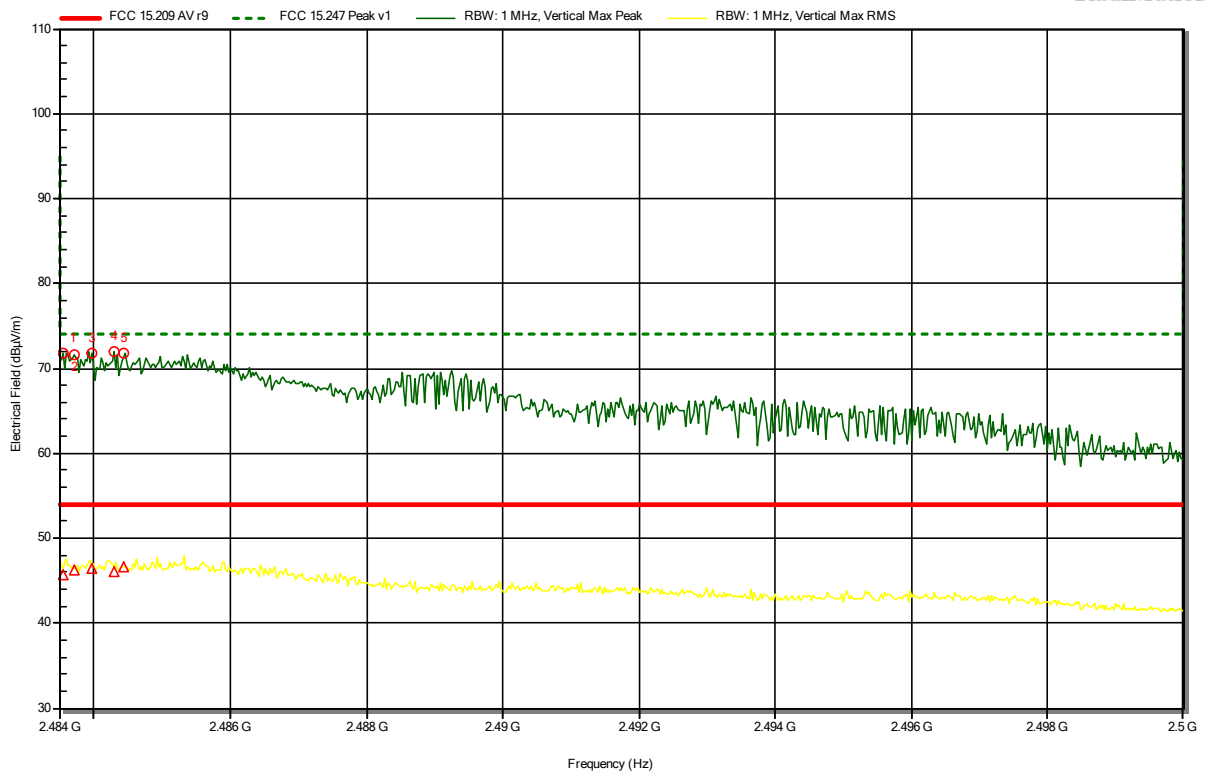

| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.4836 GHz | 71.85 dBµV/m | 74 dBµV/m | -2.15 dB | Pass |
| 2.4837 GHz | 71.61 dBµV/m | 74 dBµV/m | -2.39 dB | Pass |
| 2.484 GHz | 71.86 dBµV/m | 74 dBµV/m | -2.14 dB | Pass |
| 2.4843 GHz | 71.98 dBµV/m | 74 dBµV/m | -2.02 dB | Pass |
| 2.4845 GHz | 71.7 dBµV/m | 74 dBµV/m | -2.3 dB | Pass |

| Frequency | RMS | RMS Limit | RMS Difference | RMS Status |
|------------|--------------|-----------|----------------|------------|
| 2.4836 GHz | 45.66 dBµV/m | 54 dBµV/m | -8.34 dB | Pass |
| 2.4837 GHz | 46.27 dBµV/m | 54 dBµV/m | -7.73 dB | Pass |
| 2.484 GHz | 46.34 dBµV/m | 54 dBµV/m | -7.66 dB | Pass |
| 2.4843 GHz | 45.99 dBµV/m | 54 dBµV/m | -8.01 dB | Pass |
| 2.4845 GHz | 46.55 dBµV/m | 54 dBµV/m | -7.45 dB | Pass |


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 36

RadiMation

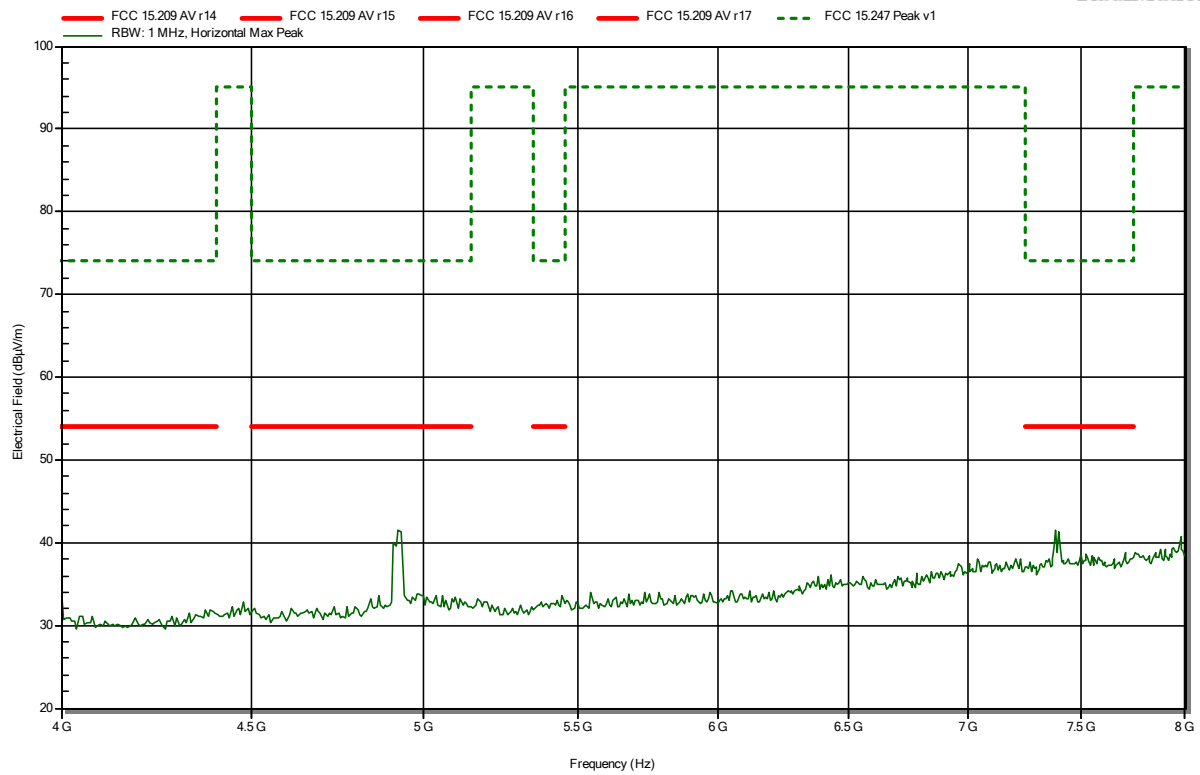


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 39

RadiMation

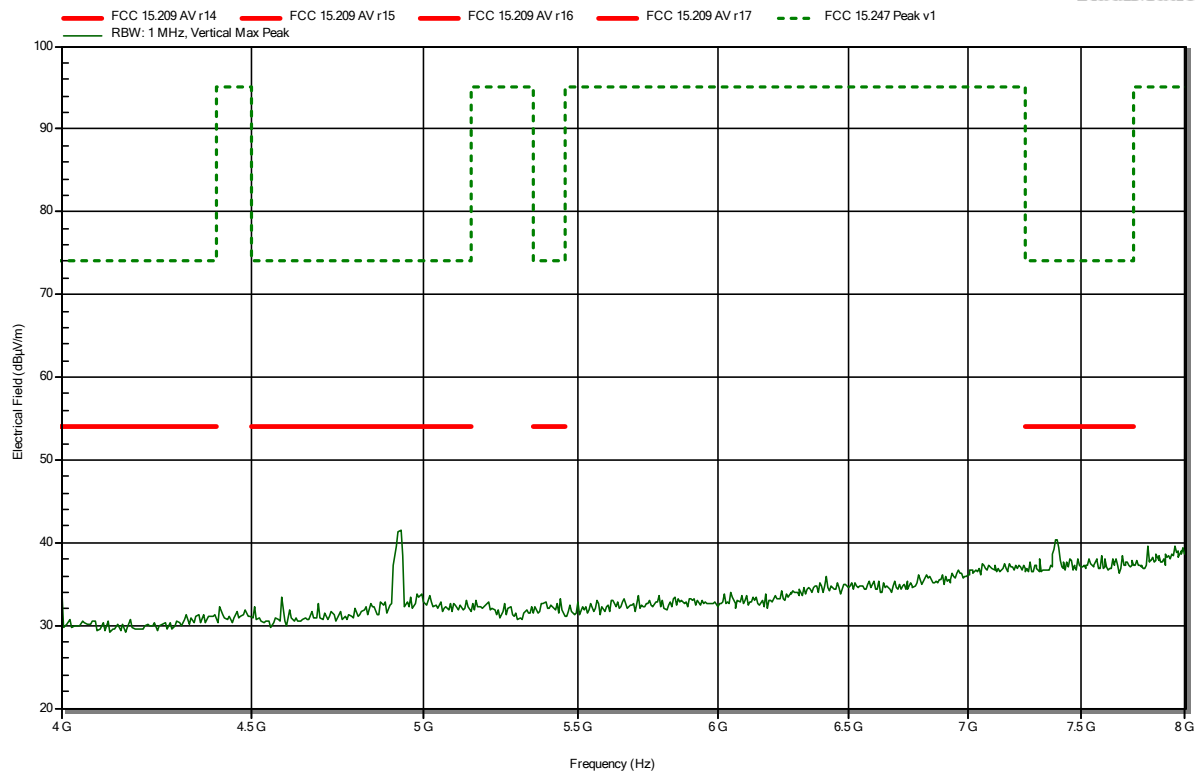


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 37

RadiMation

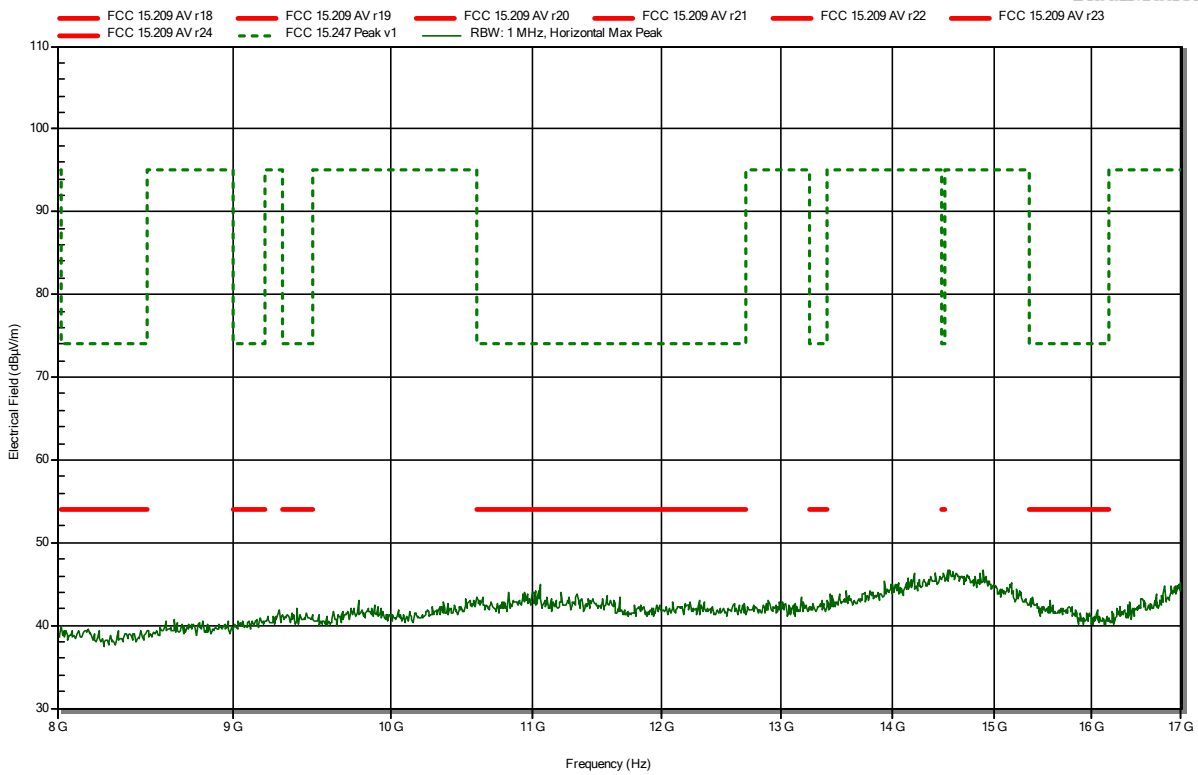


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 25.6 °C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 38

RadiMation

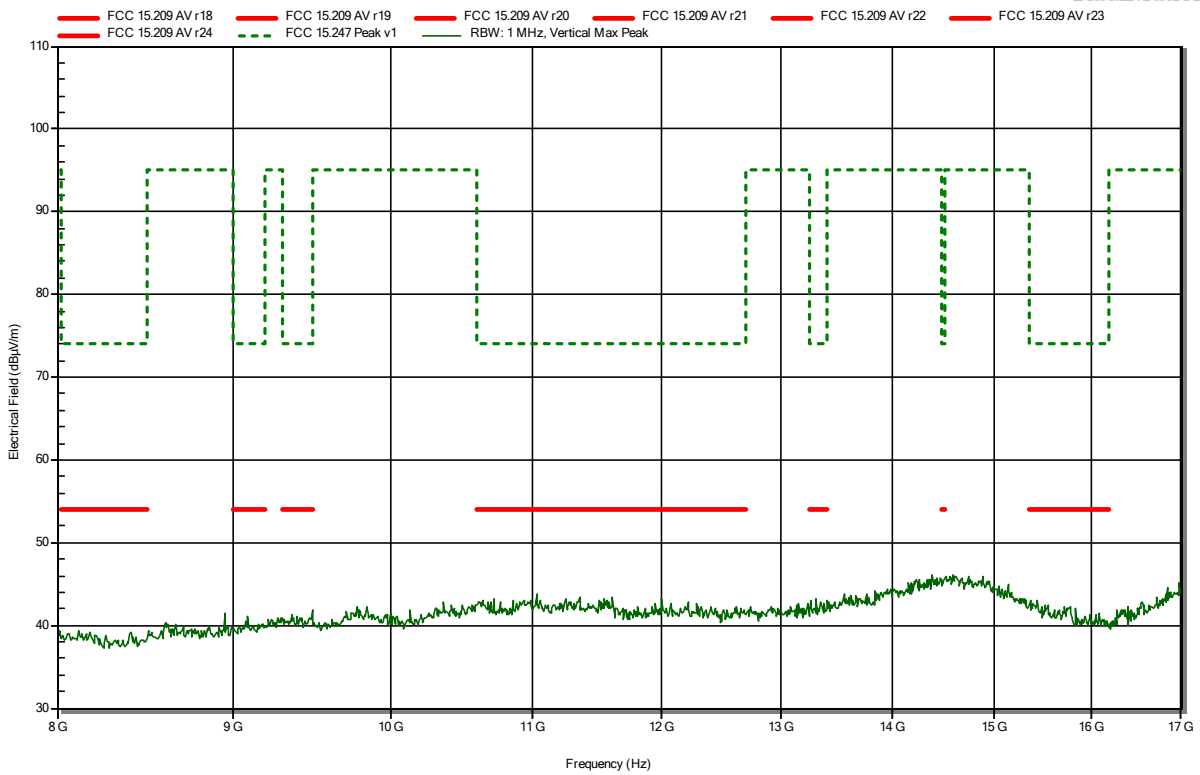


Spurious emissions according to FCC 47 CFR §15.247

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9 °C, Vnom: 120 VAC (external power supply)
 Antenna: Amplifier Research AT4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; Mode n HT20 -- 2462 MHz
 Test Date: 2019-06-24
 Note:

Index 49

RadiMation

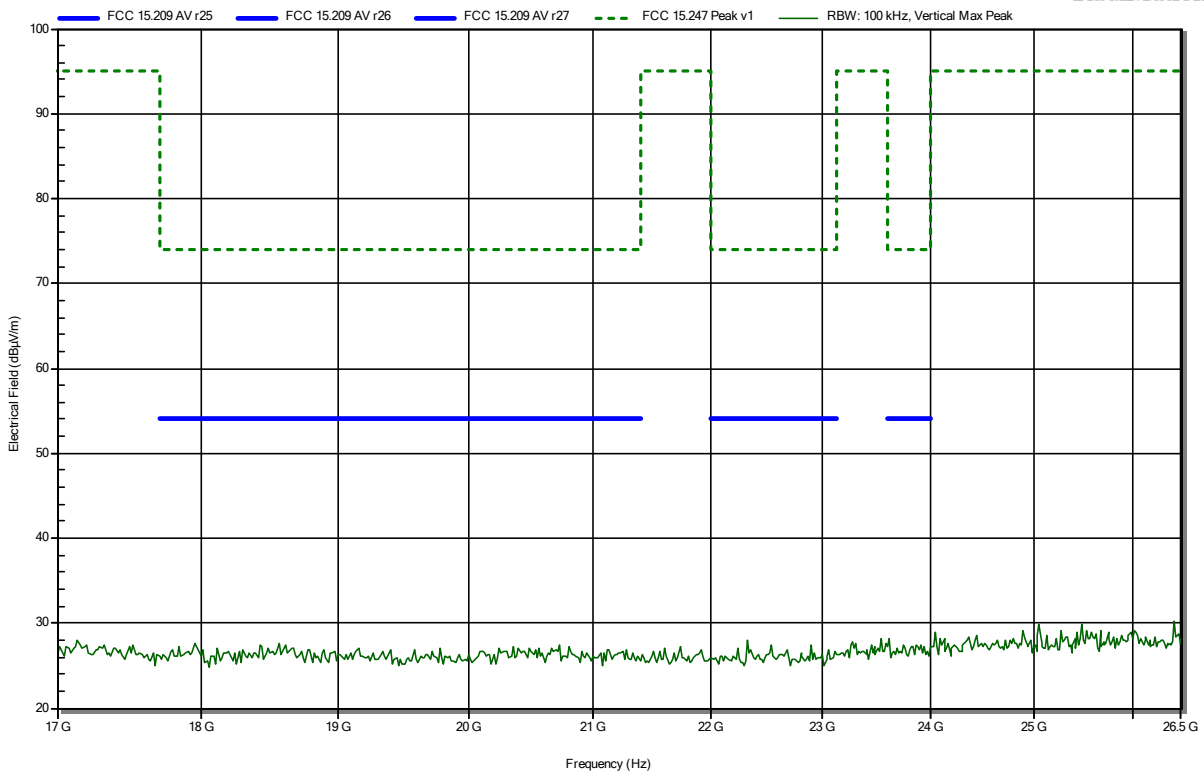


ANNEX B Receiver spurious emissions

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 54

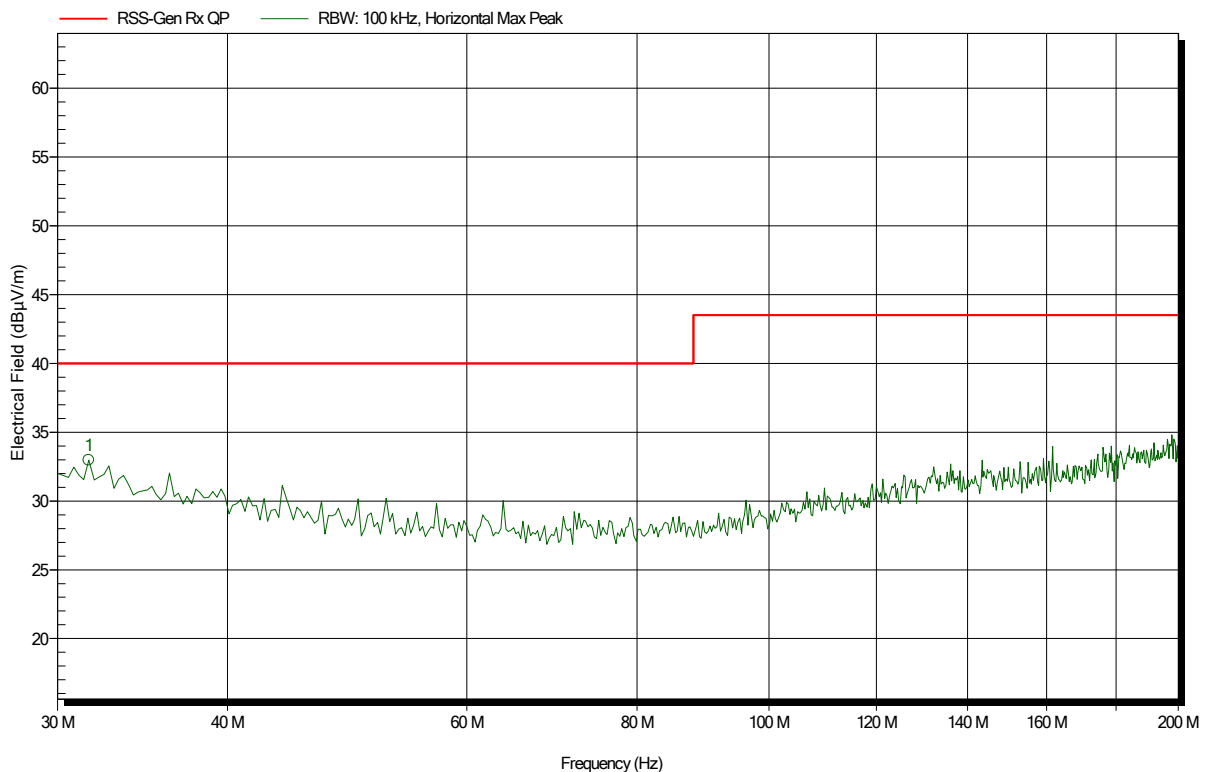


| Frequency | Peak | Peak Limit | Peak Difference | Status | Angle | Height |
|------------|--------------|------------|-----------------|--------|-----------|--------|
| 31.635 MHz | 32.98 dBµV/m | 40 dBµV/m | -7.02 dB | Pass | -1 Degree | 1.2 m |

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 55

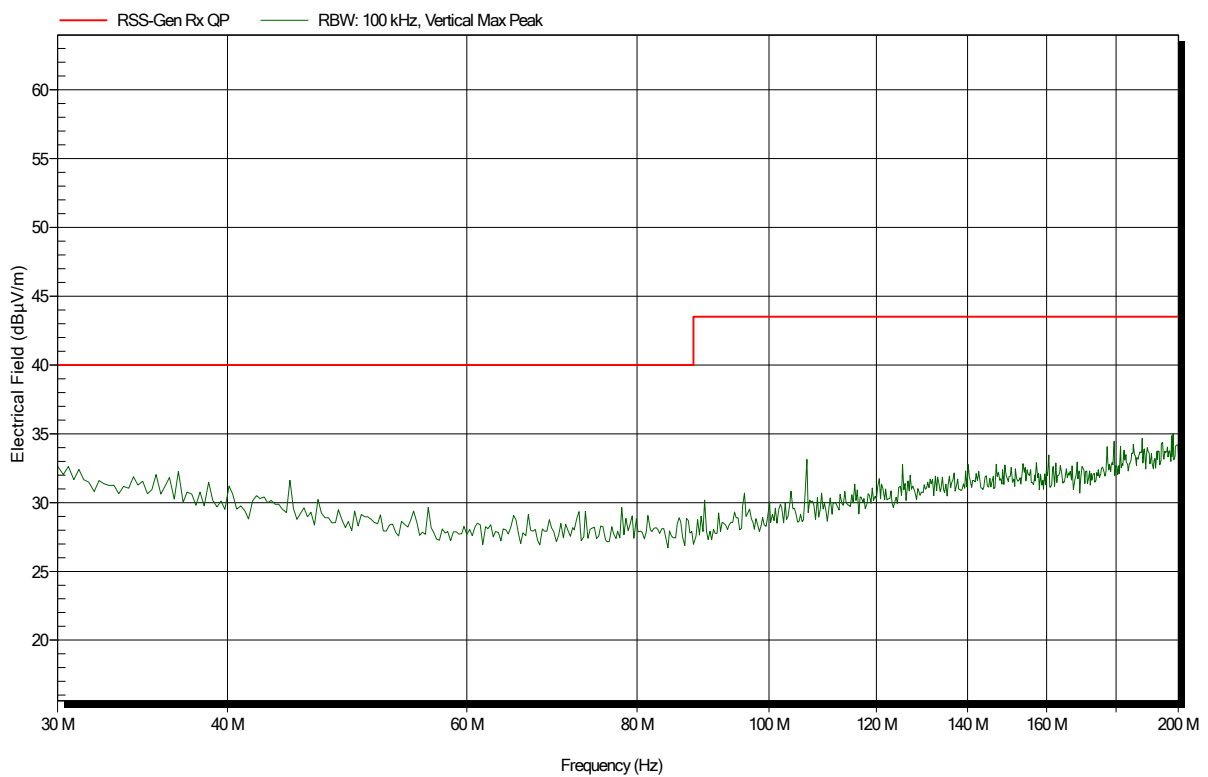


Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 51

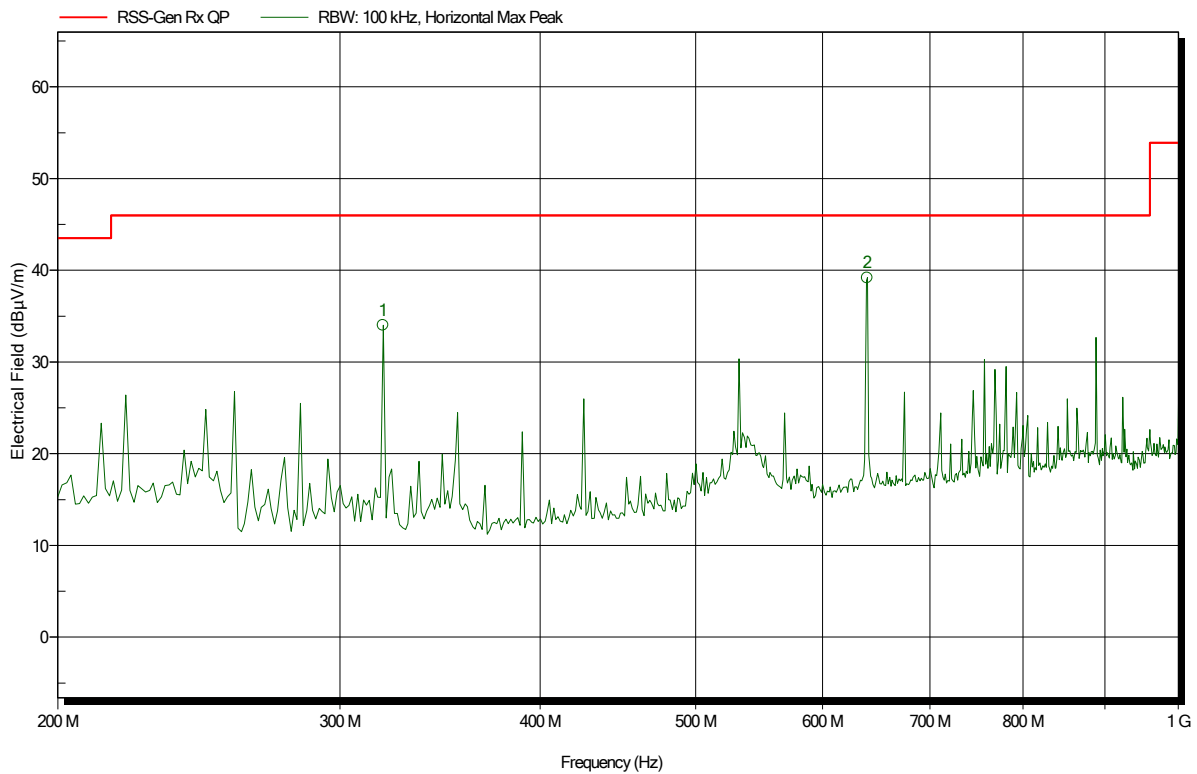


| Frequency | Peak | Peak Limit | Peak Difference | Status | Angle | Height |
|-------------|--------------|------------|-----------------|--------|------------|--------|
| 319.231 MHz | 34.01 dBµV/m | 46 dBµV/m | -11.99 dB | Pass | 90 Degree | 1.2 m |
| 639.744 MHz | 39.19 dBµV/m | 46 dBµV/m | -6.81 dB | Pass | 270 Degree | 1.2 m |

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 53

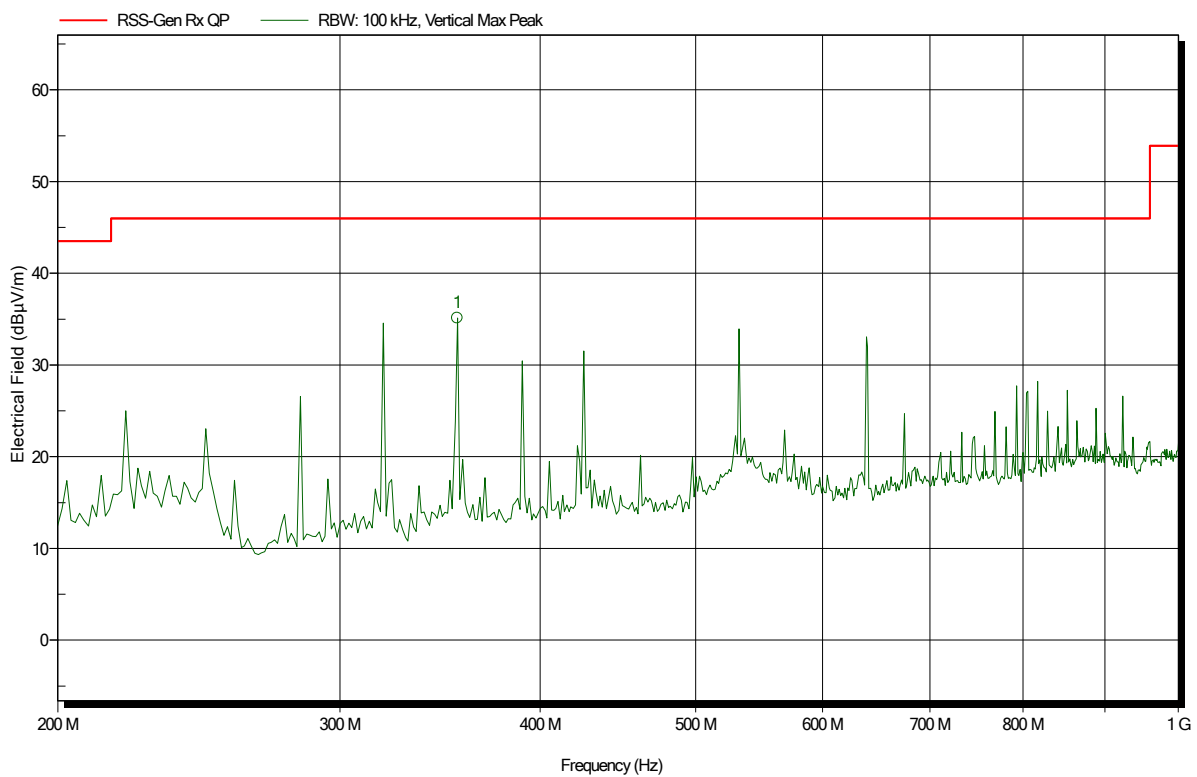


| Frequency | Peak | Peak Limit | Peak Difference | Status | Angle | Height |
|-------------|--------------|------------|-----------------|--------|-----------|--------|
| 355.128 MHz | 35.14 dBµV/m | 46 dBµV/m | -10.86 dB | Pass | 90 Degree | 1.2 m |

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 56

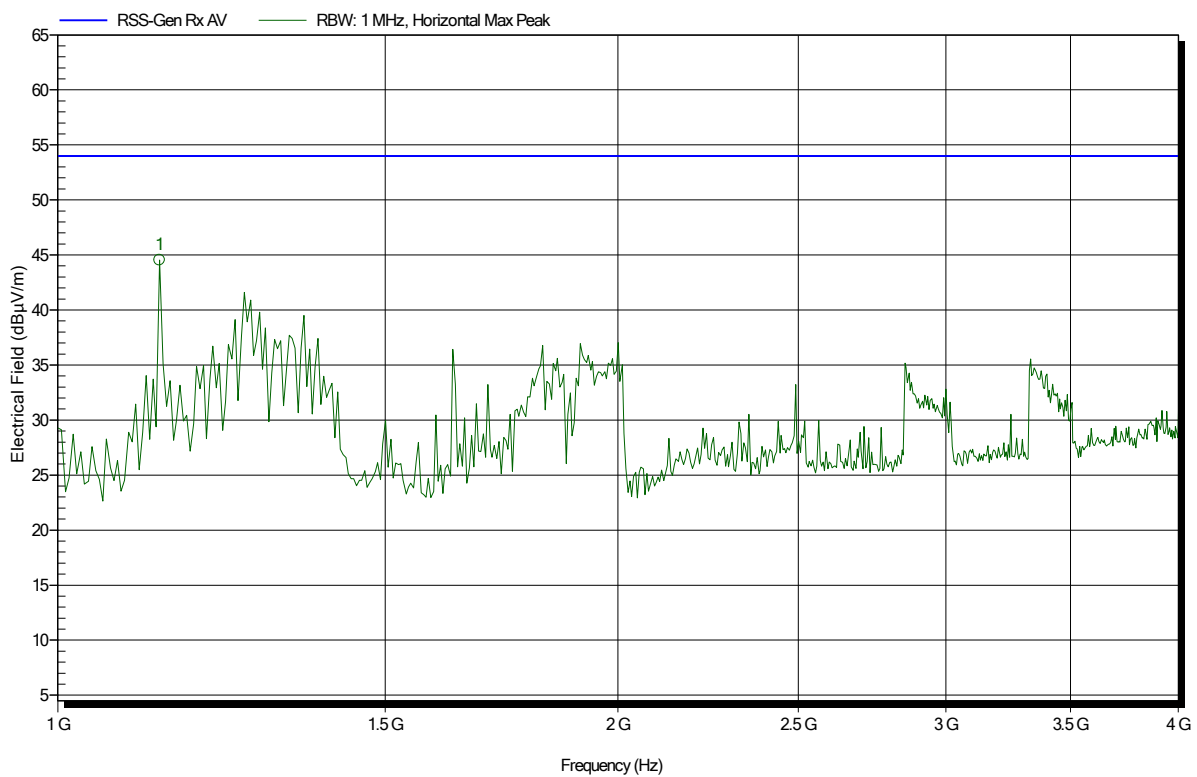


| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|--------------|-----------------|-------------|
| 1.135 GHz | 44.54 dBµV/m | 53.98 dBµV/m | -9.44 dB | Pass |

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 63

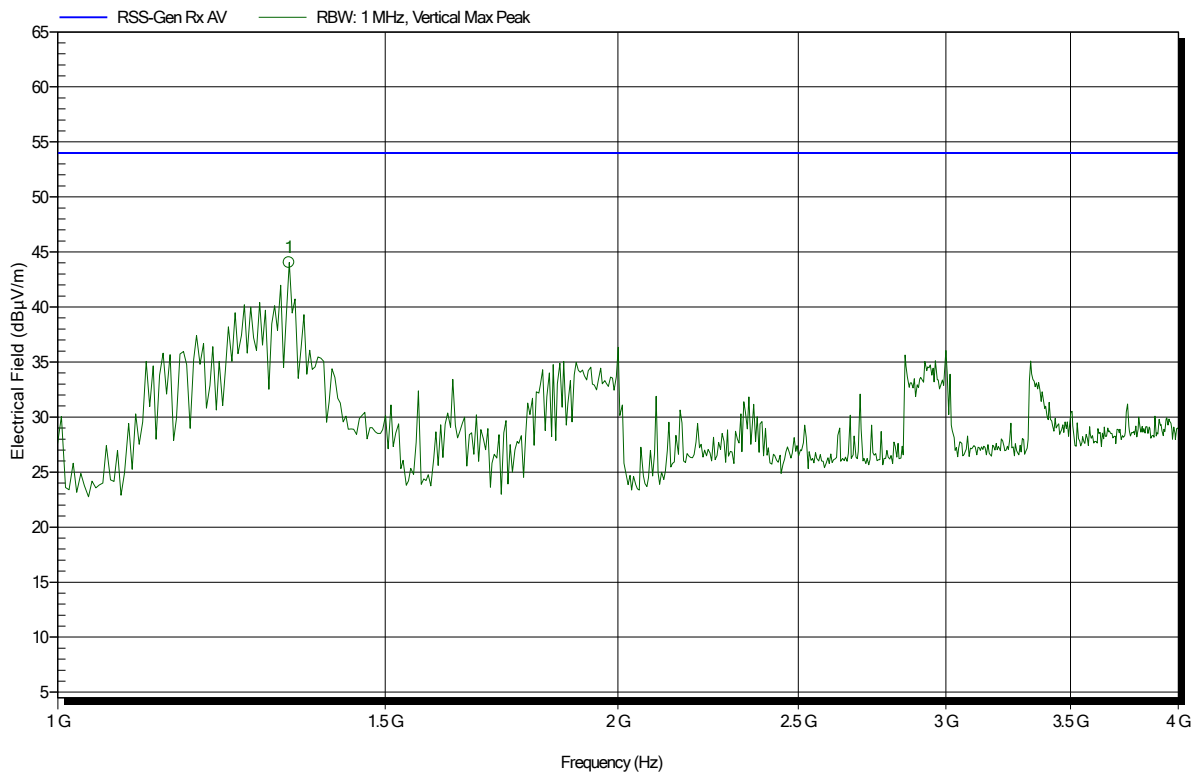


| Frequency | Peak | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|--------------|-----------------|-------------|
| 1.332 GHz | 44.05 dBµV/m | 53.98 dBµV/m | -9.93 dB | Pass |

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 57

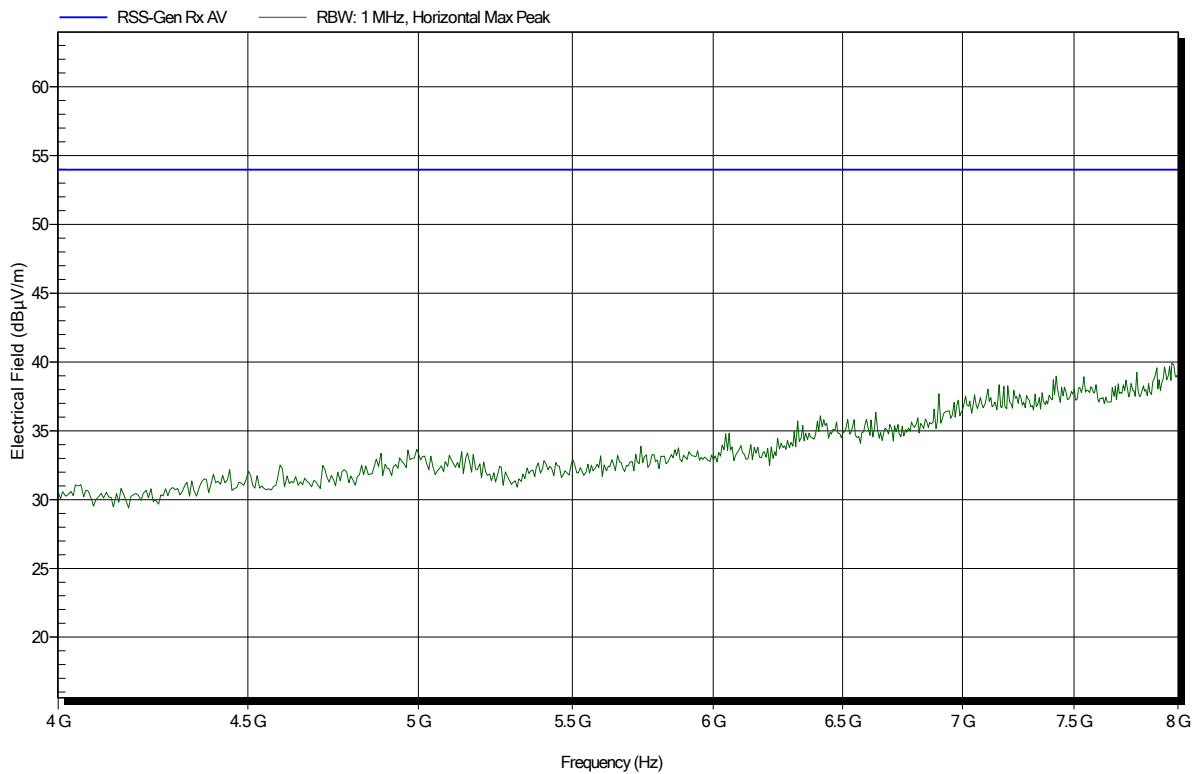


Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 62

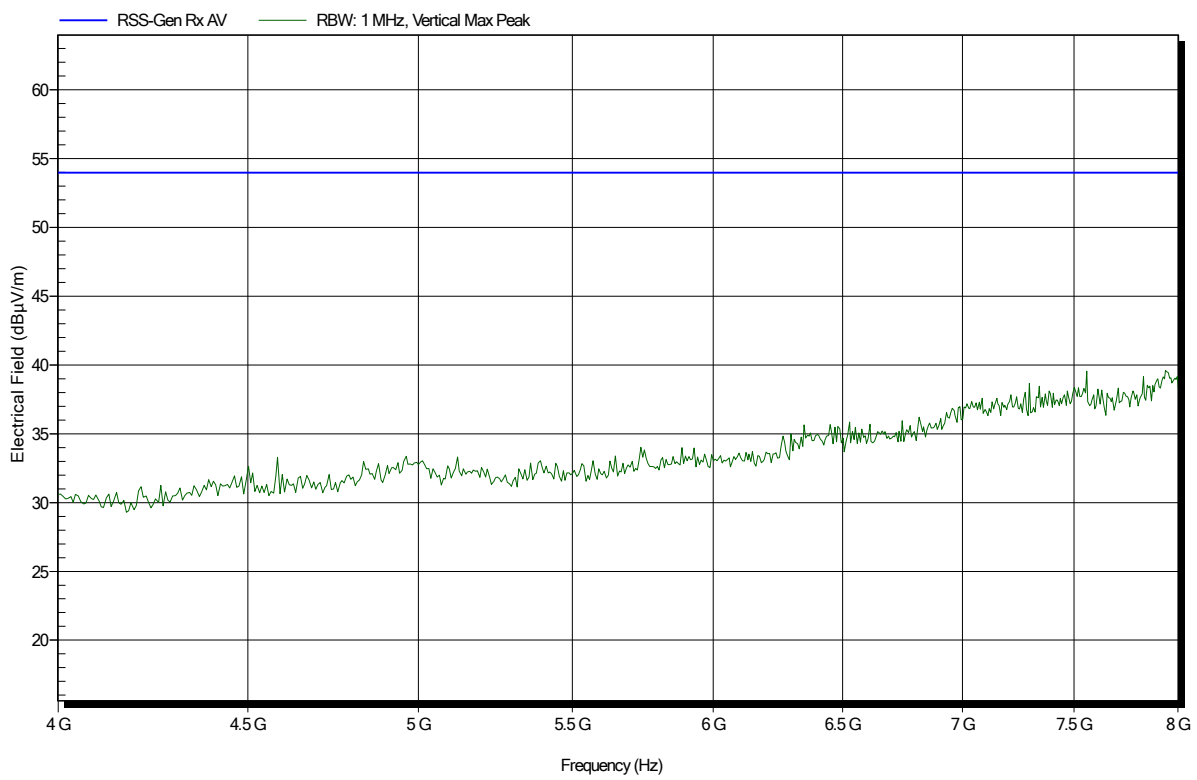


Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 58

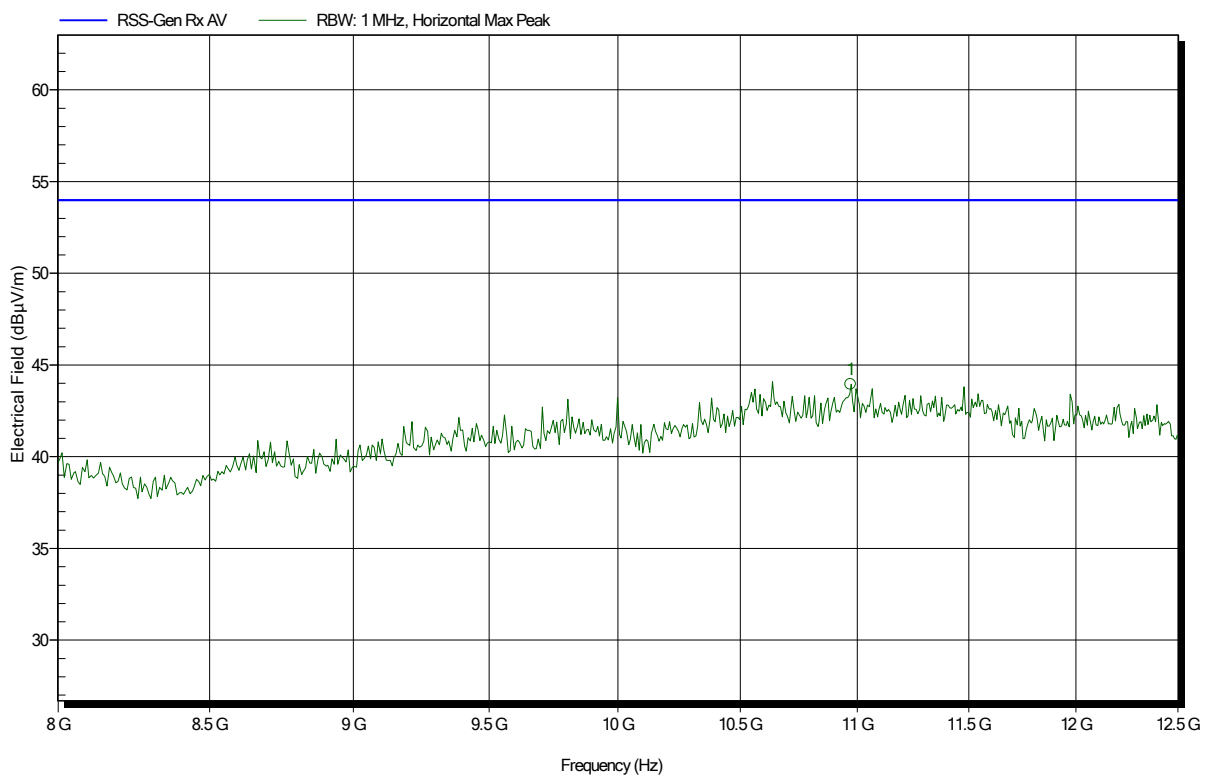


| Frequency | Peak | Peak Limit | Peak Difference | Status |
|------------|--------------|--------------|-----------------|--------|
| 10.971 GHz | 43.96 dBµV/m | 53.98 dBµV/m | -10.02 dB | Pass |

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 61

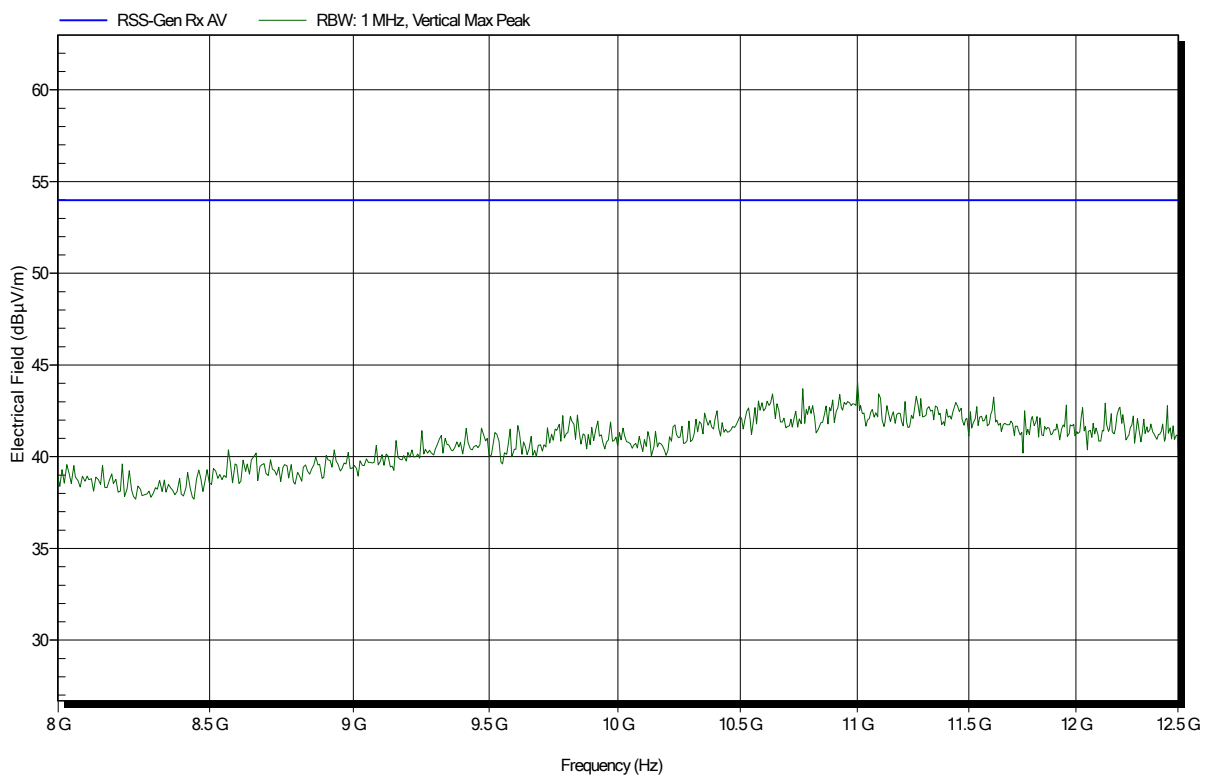


Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 59

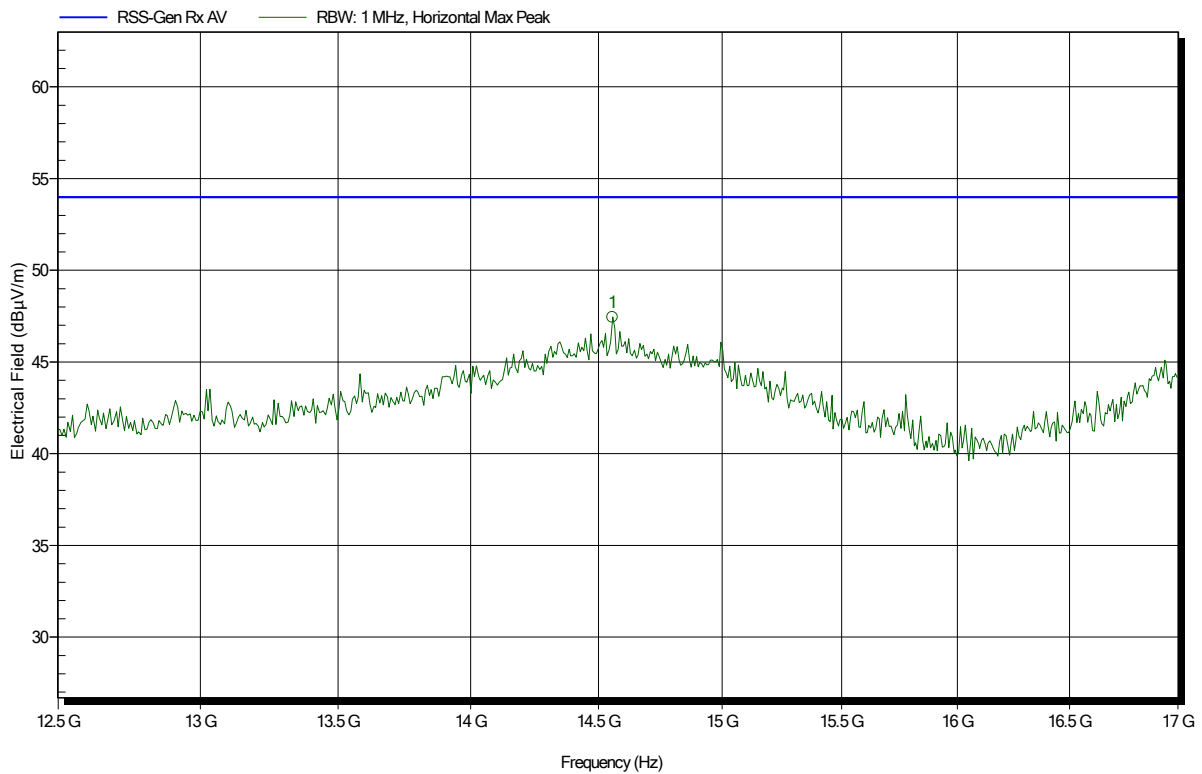

| Frequency | Peak | Peak Limit | Peak Difference | Status |
|------------|--------------|--------------|-----------------|--------|
| 14.555 GHz | 47.44 dBµV/m | 53.98 dBµV/m | -6.54 dB | Pass |

Spurious emissions according to ISED RSS-247 Issue 2 (February 2017)

Project number: G0M-1905-8256

Applicant: BIOTRONIK SE & Co. KG
 EUT Name: Renamic Neo Programming Device
 Model: Renamic Neo
 Test Site: Eurofins Product Service GmbH
 Operator: Abdullah Al Jamal
 Test Conditions: Tnom: 26.9°C, Vnom: 120 VAC (external power supply)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; Mode n HT20 -- 2437 MHz
 Test Date: 2019-07-26
 Note:

Index 60

