


Appendix F

Measurement diagrams “ Unwanted radiations FCC RULES Part 95”


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.098MHz, Emax: 32.22dBµV/m, RBW: 100kHz

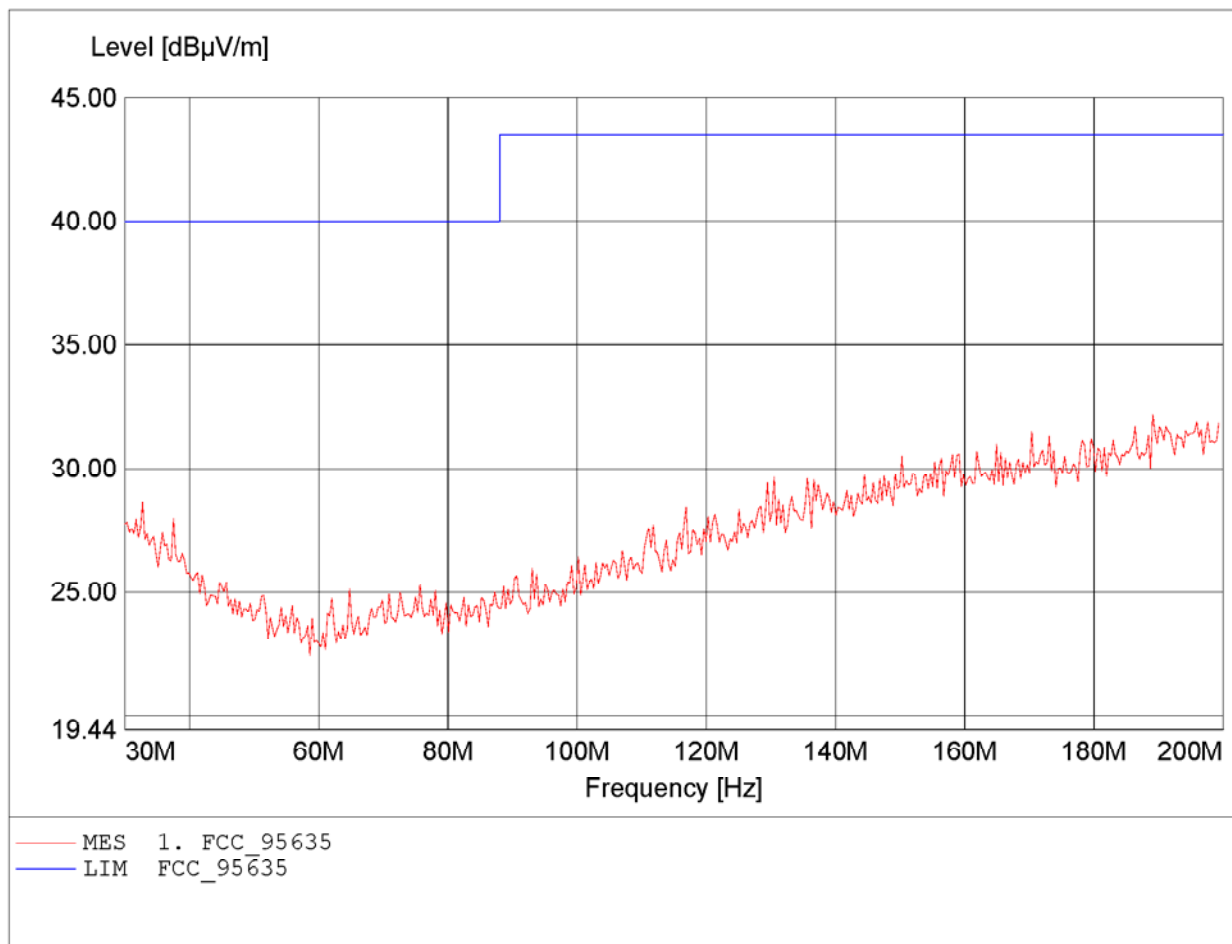


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.483MHz, Emax: 32.32dBµV/m, RBW: 100kHz

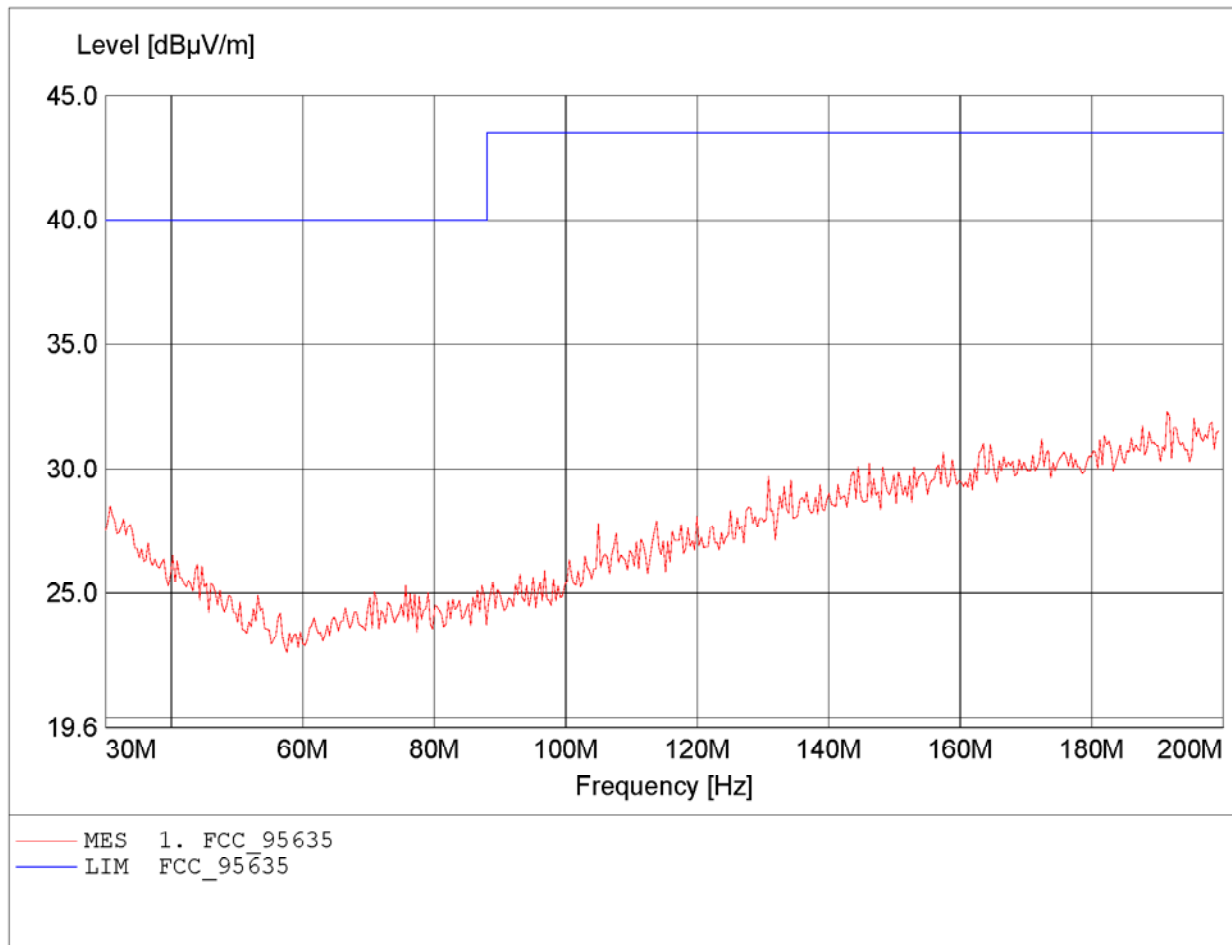


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.642MHz, Emax: 78.20dBuV/m, RBW: 100kHz

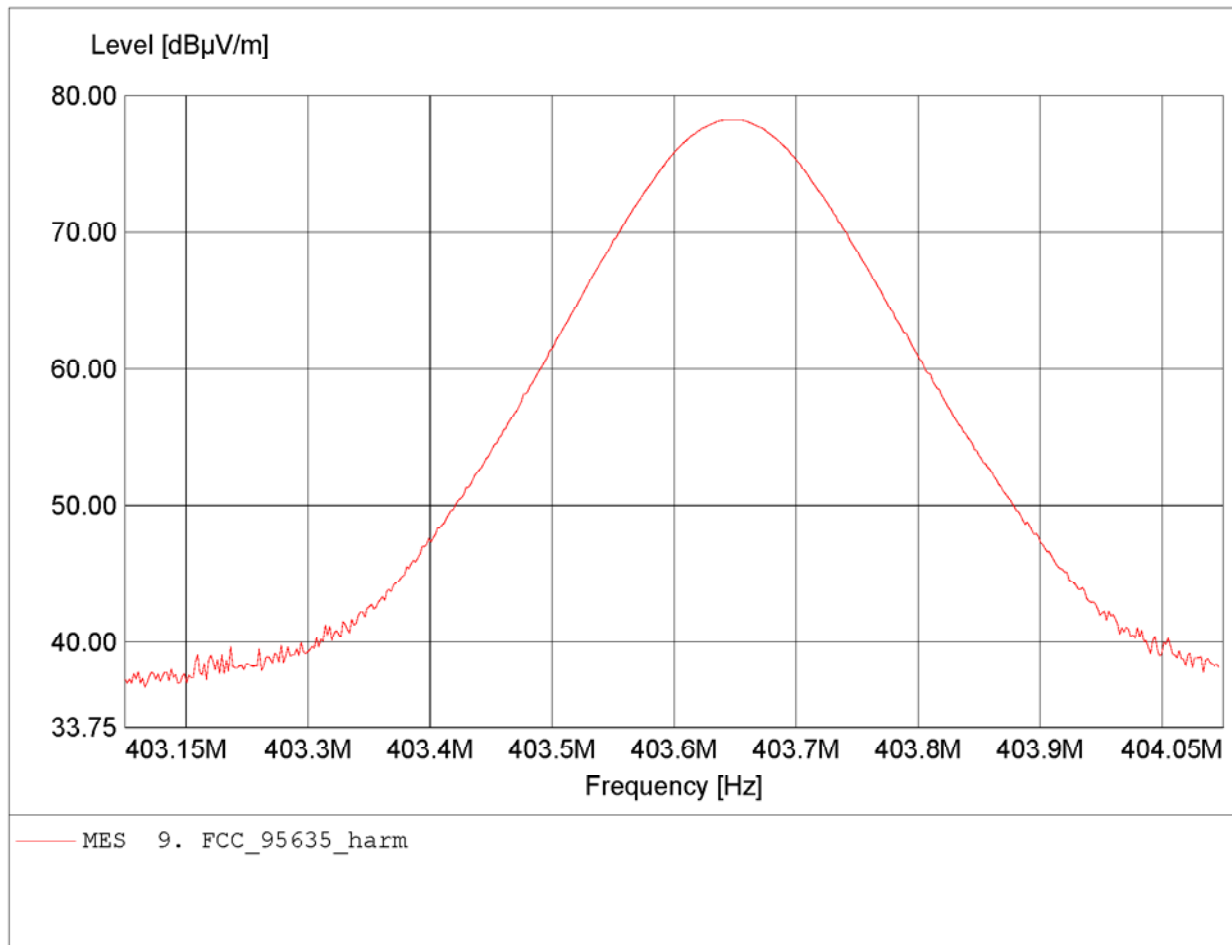


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 200.404MHz, Emax: 14.22dBµV/m, RBW: 100kHz

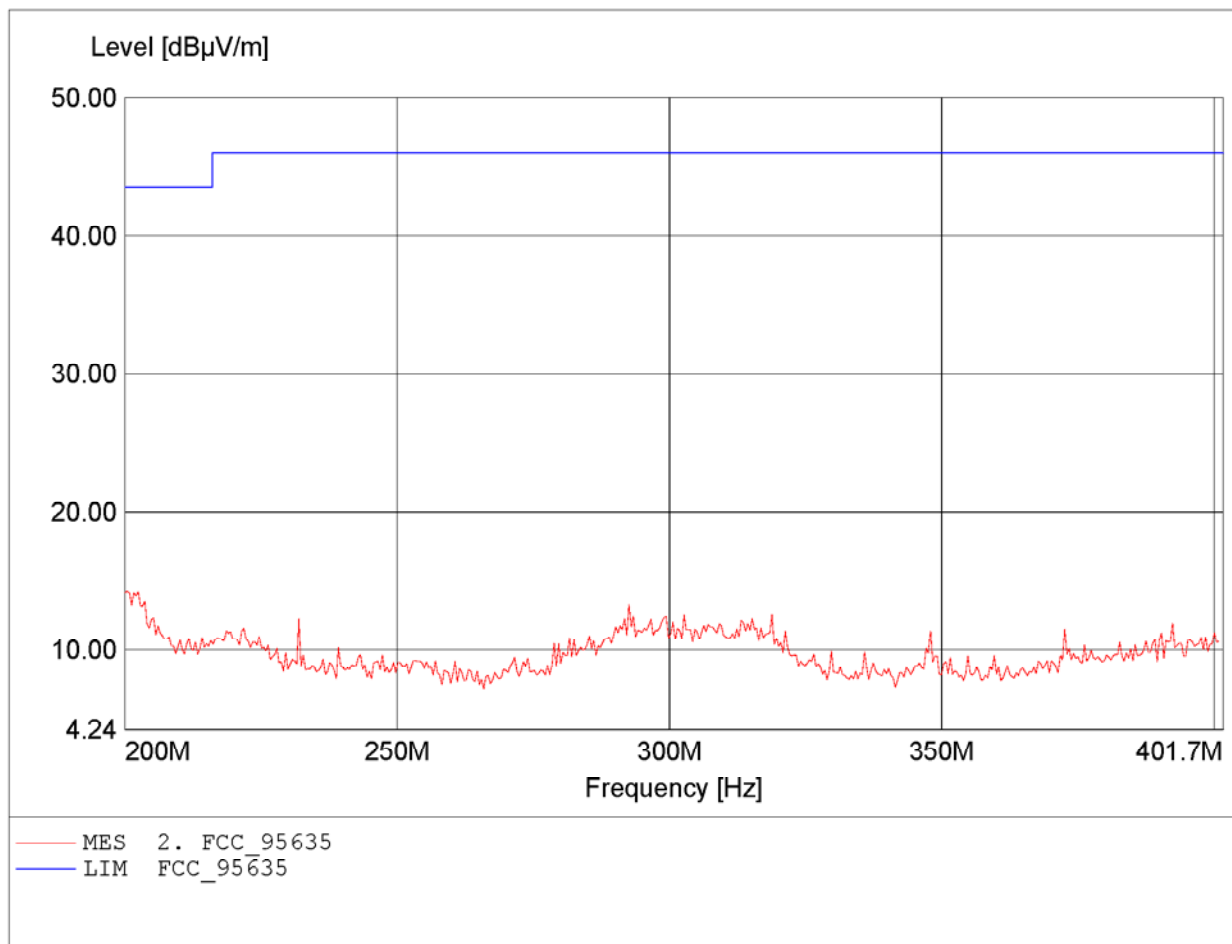


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 291.755MHz, Emax: 13.51dBµV/m, RBW: 100kHz

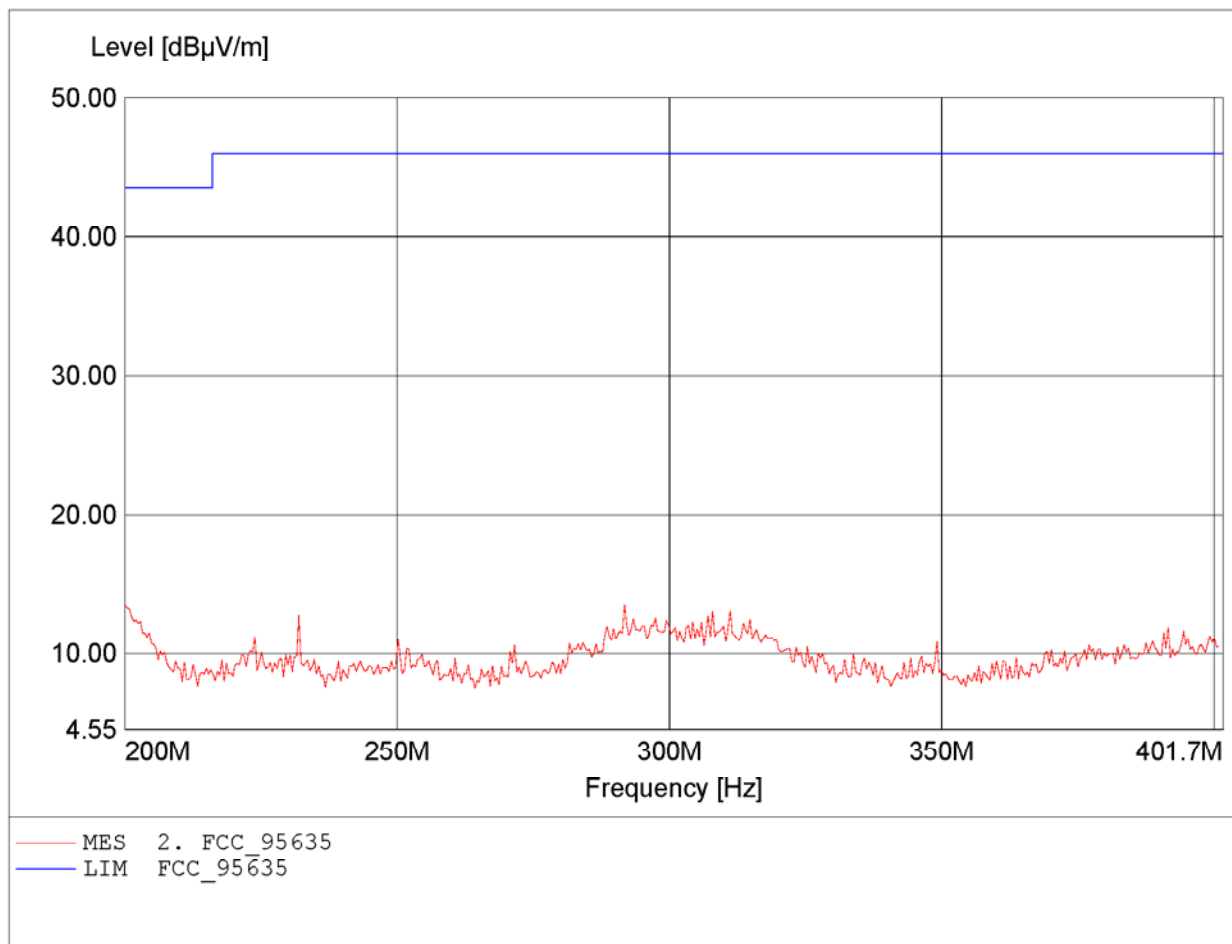


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.297MHz, Emax: 24.62dBµV/m, RBW: 3kHz

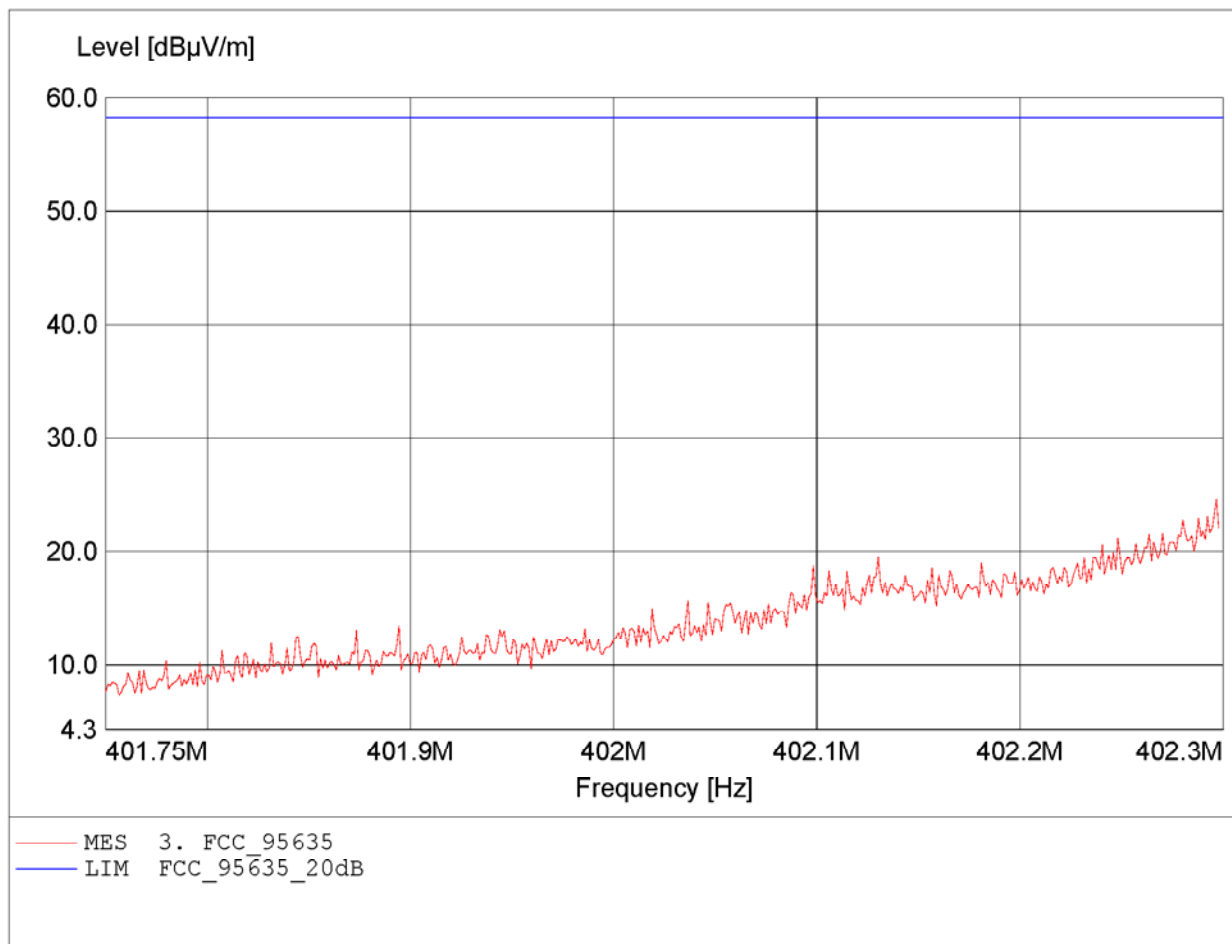


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.298MHz, Emax: 29.09dBµV/m, RBW: 3kHz

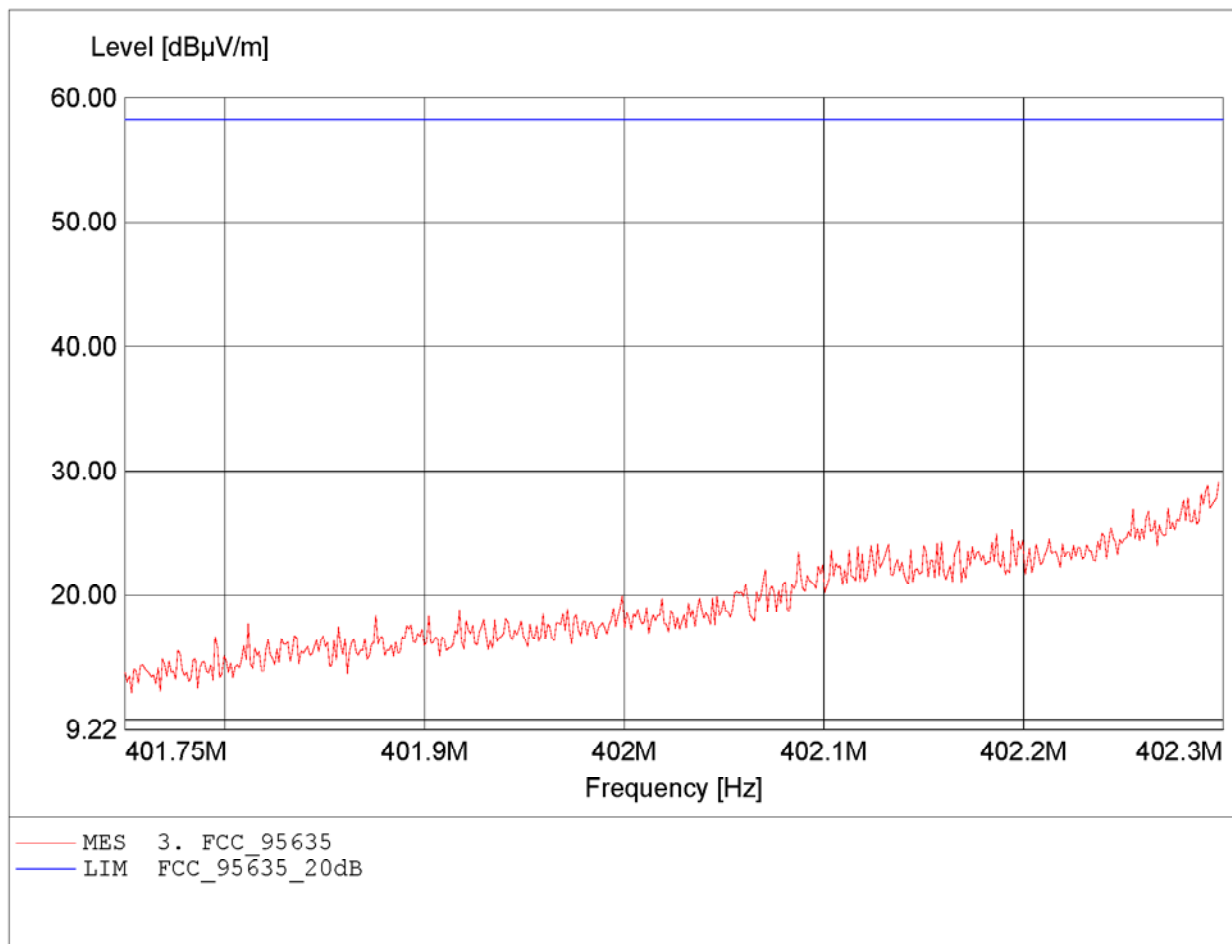


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.605MHz, Emax: 23.02dBµV/m, RBW: 3kHz

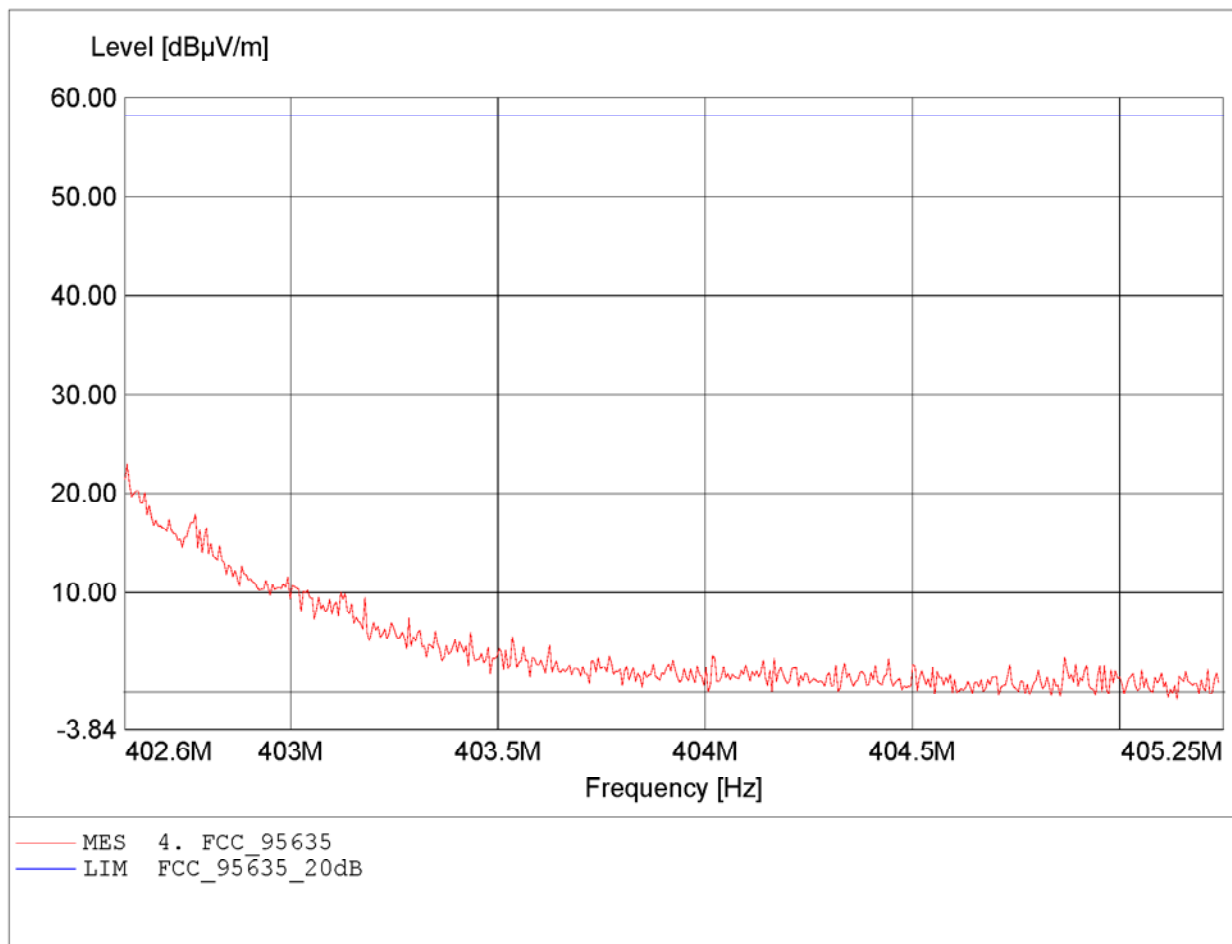


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.600MHz, Emax: 29.47dBµV/m, RBW: 3kHz

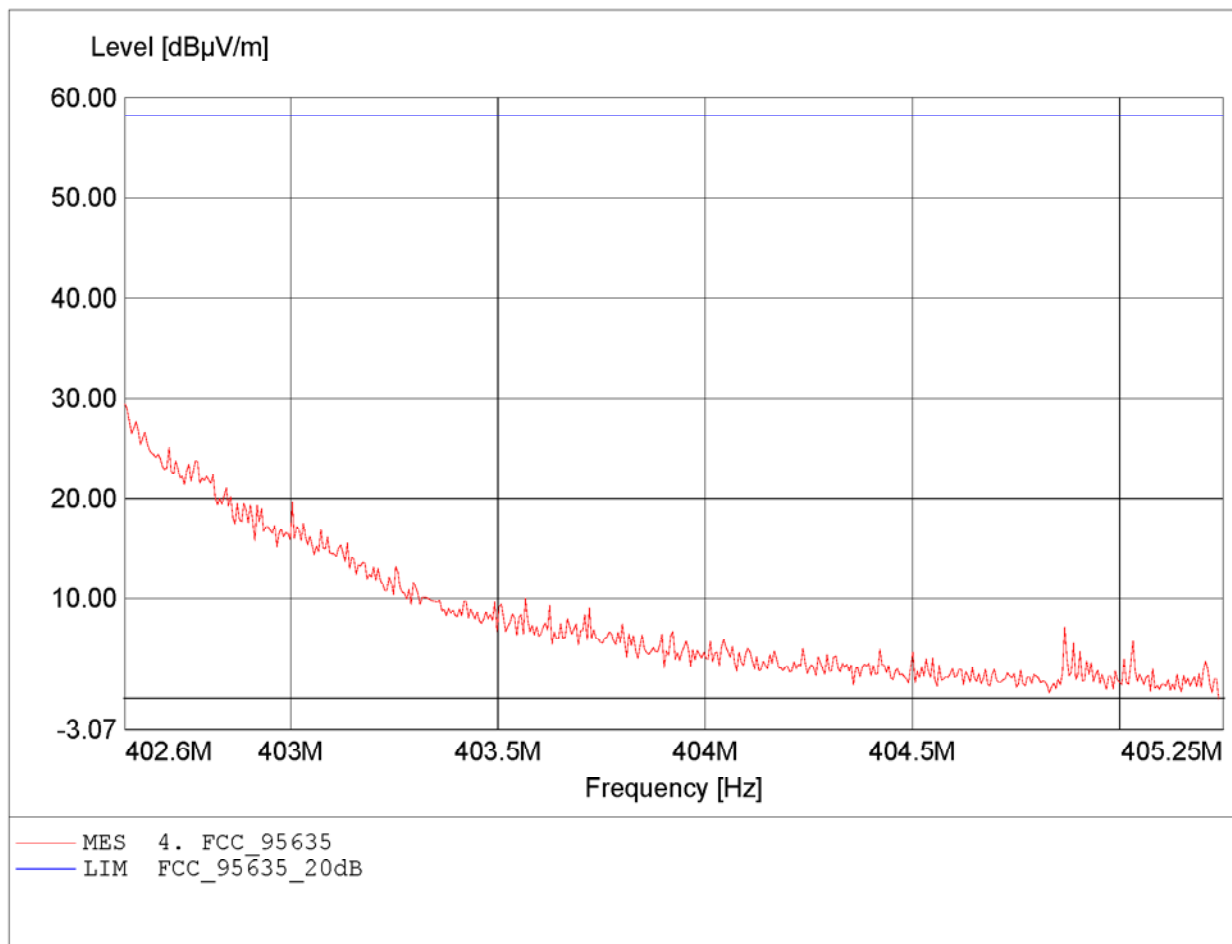


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 804.531MHz, Emax: 39.27dBµV/m, RBW: 100kHz

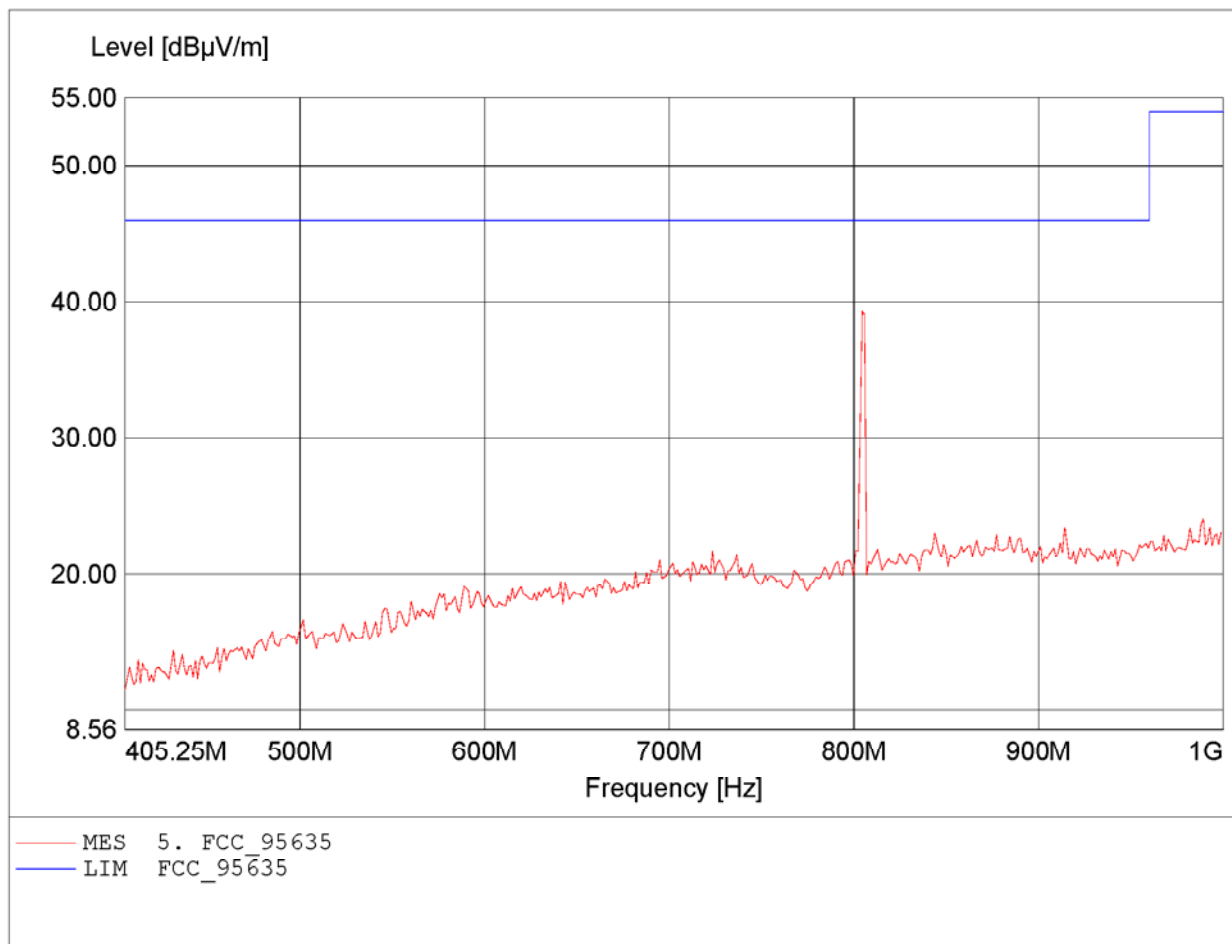


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 805.723MHz, Emax: 36.01dBµV/m, RBW: 100kHz

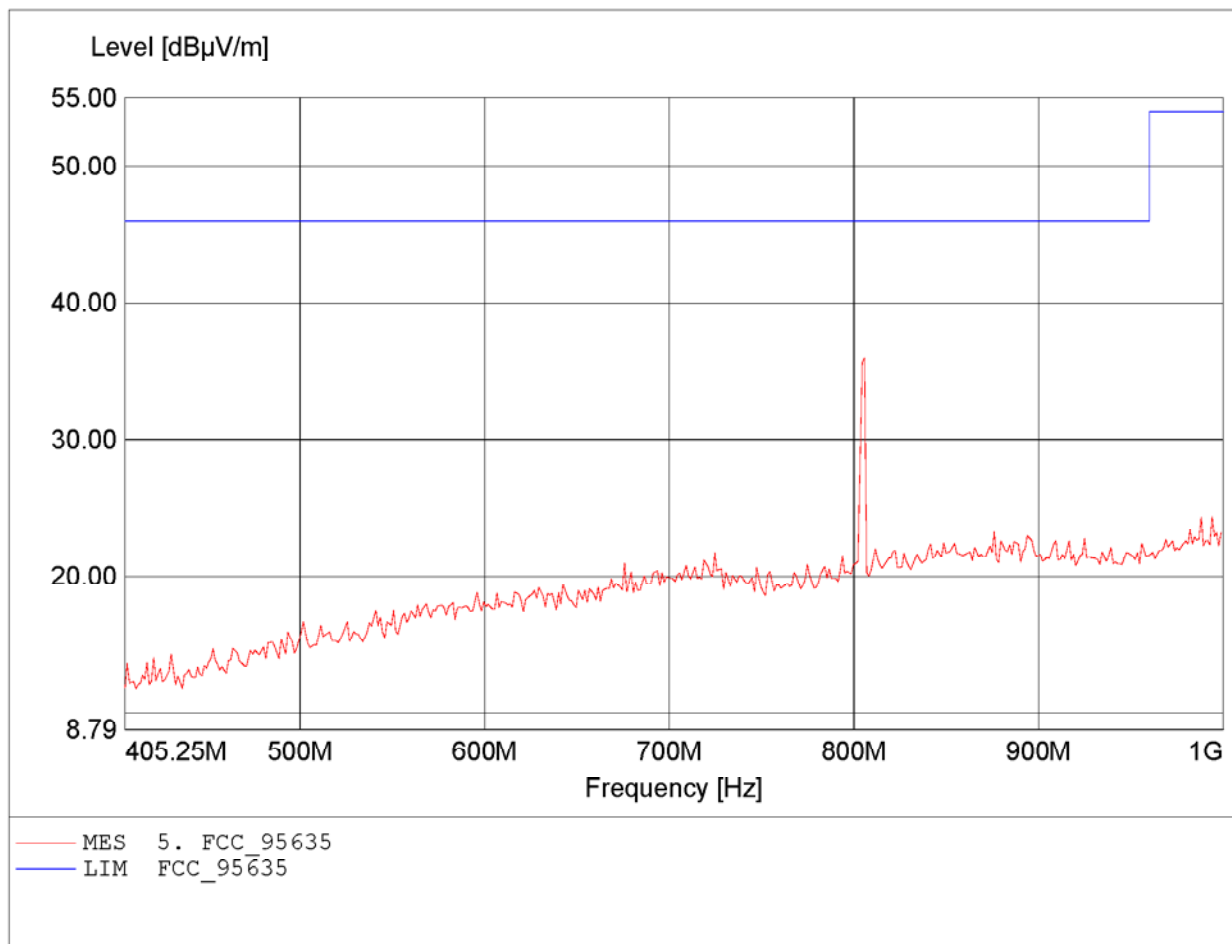


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.952GHz, Emax: 49.89dBµV/m, RBW: 100kHz

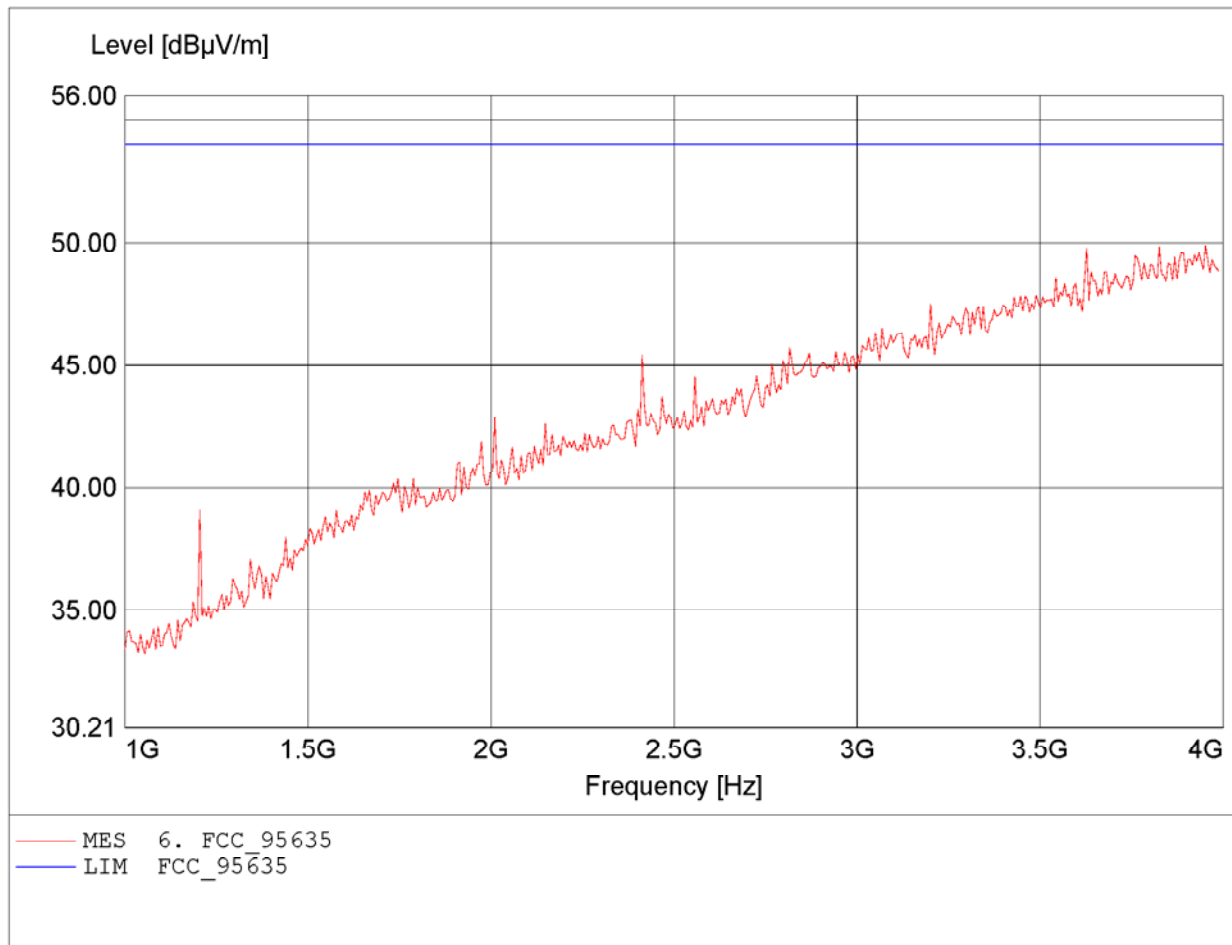


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.826GHz, Emax: 49.81dBµV/m, RBW: 100kHz

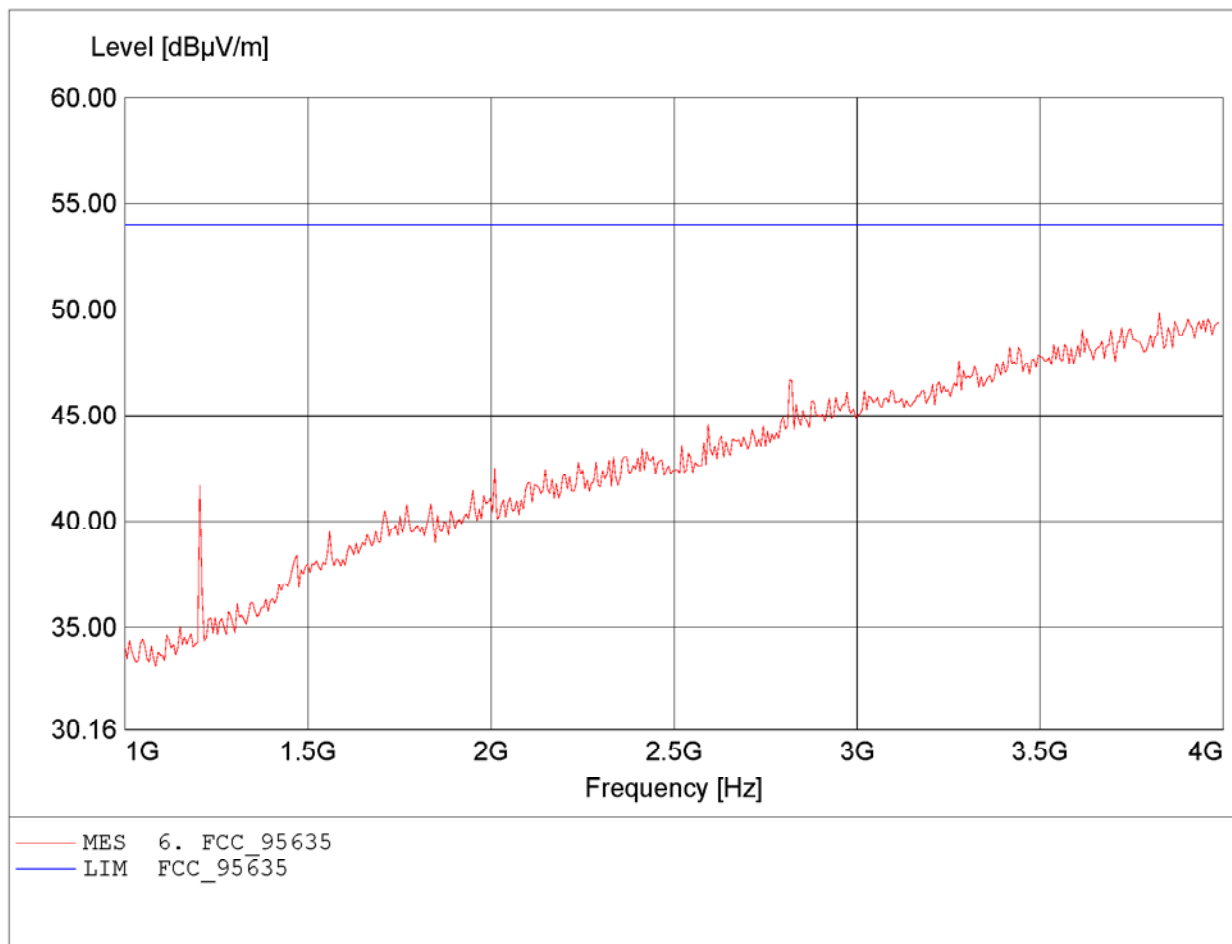


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.952GHz, Emax: 43.74dBµV/m, RBW: 1MHz

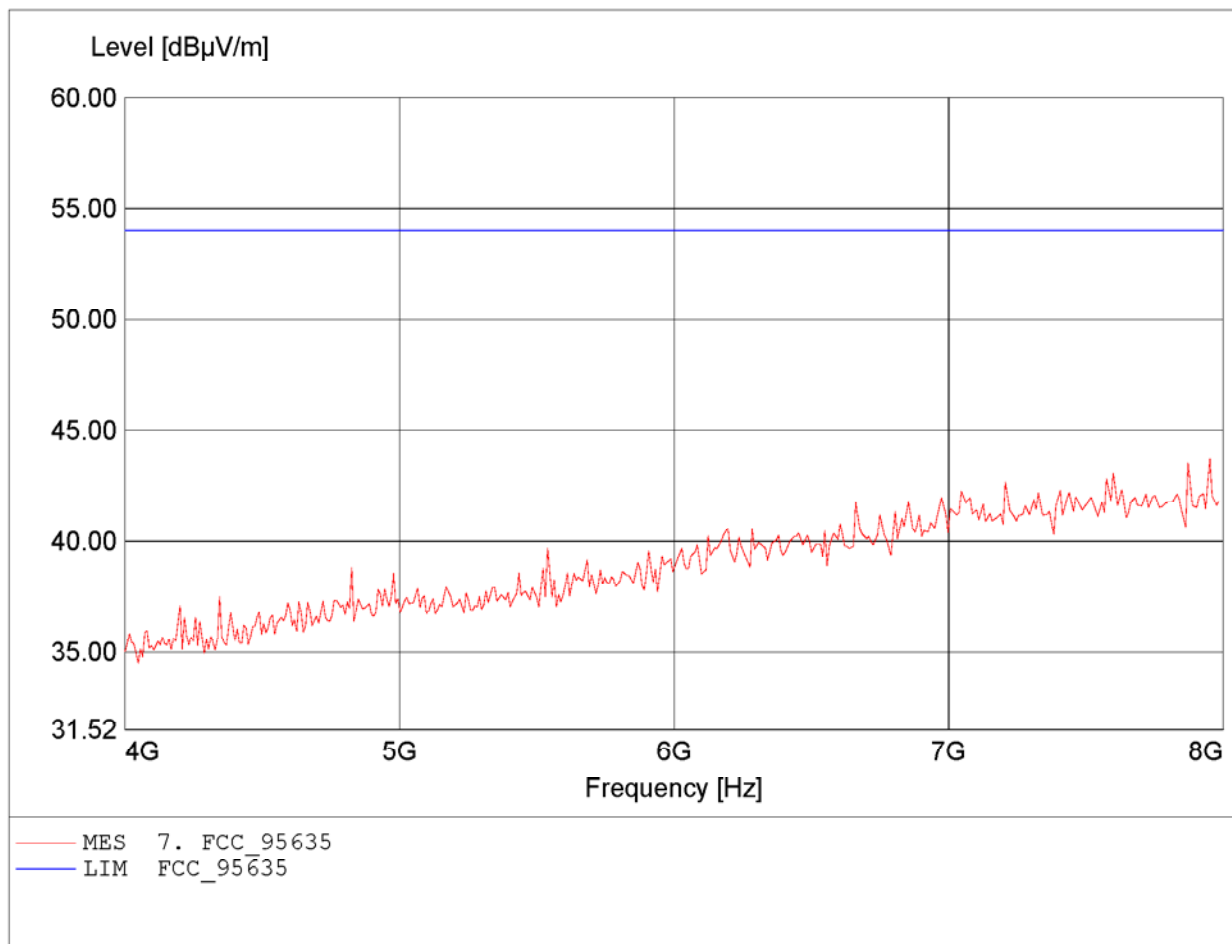


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.303GHz, Emax: 43.40dBµV/m, RBW: 1MHz

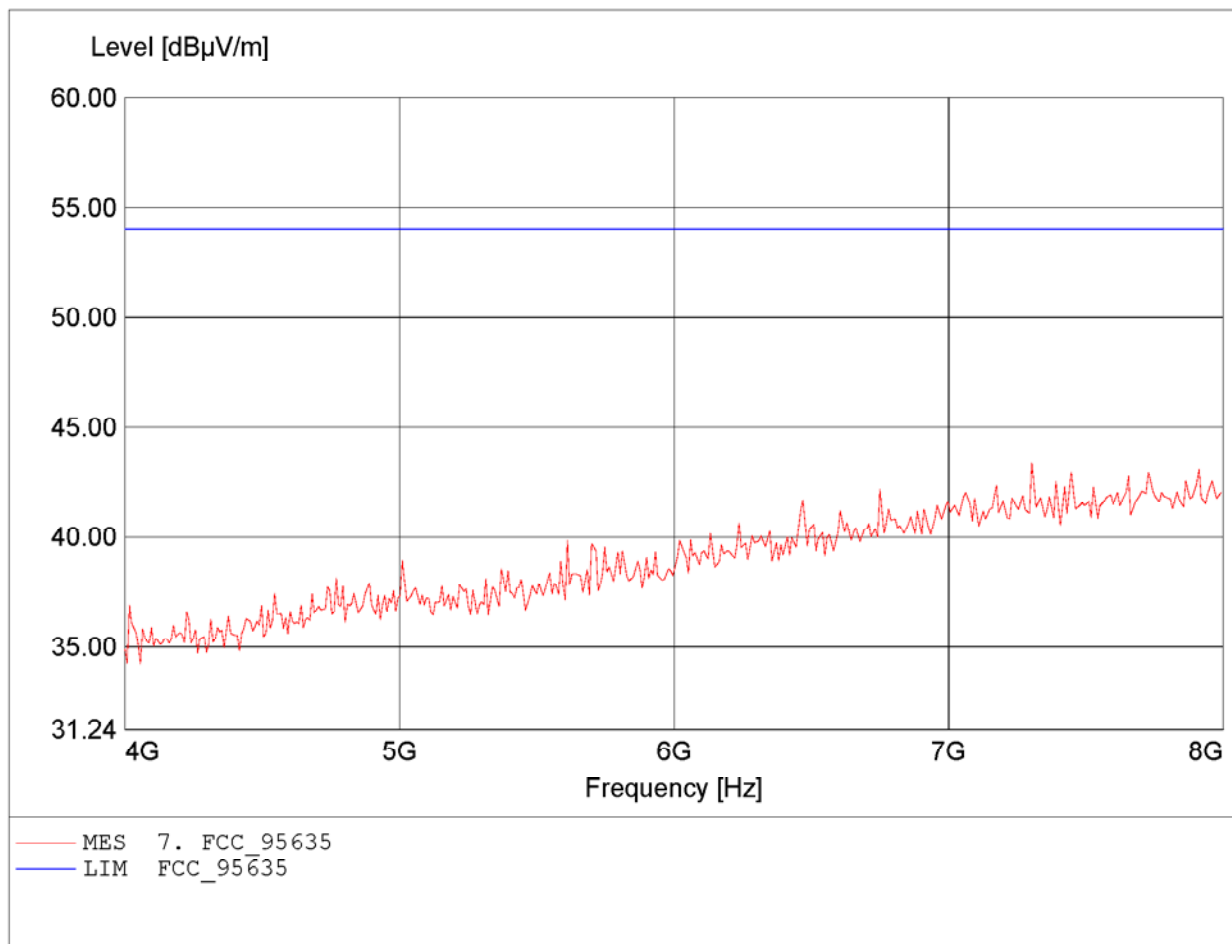


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.505MHz, Emax: 32.91dBµV/m, RBW: 100kHz

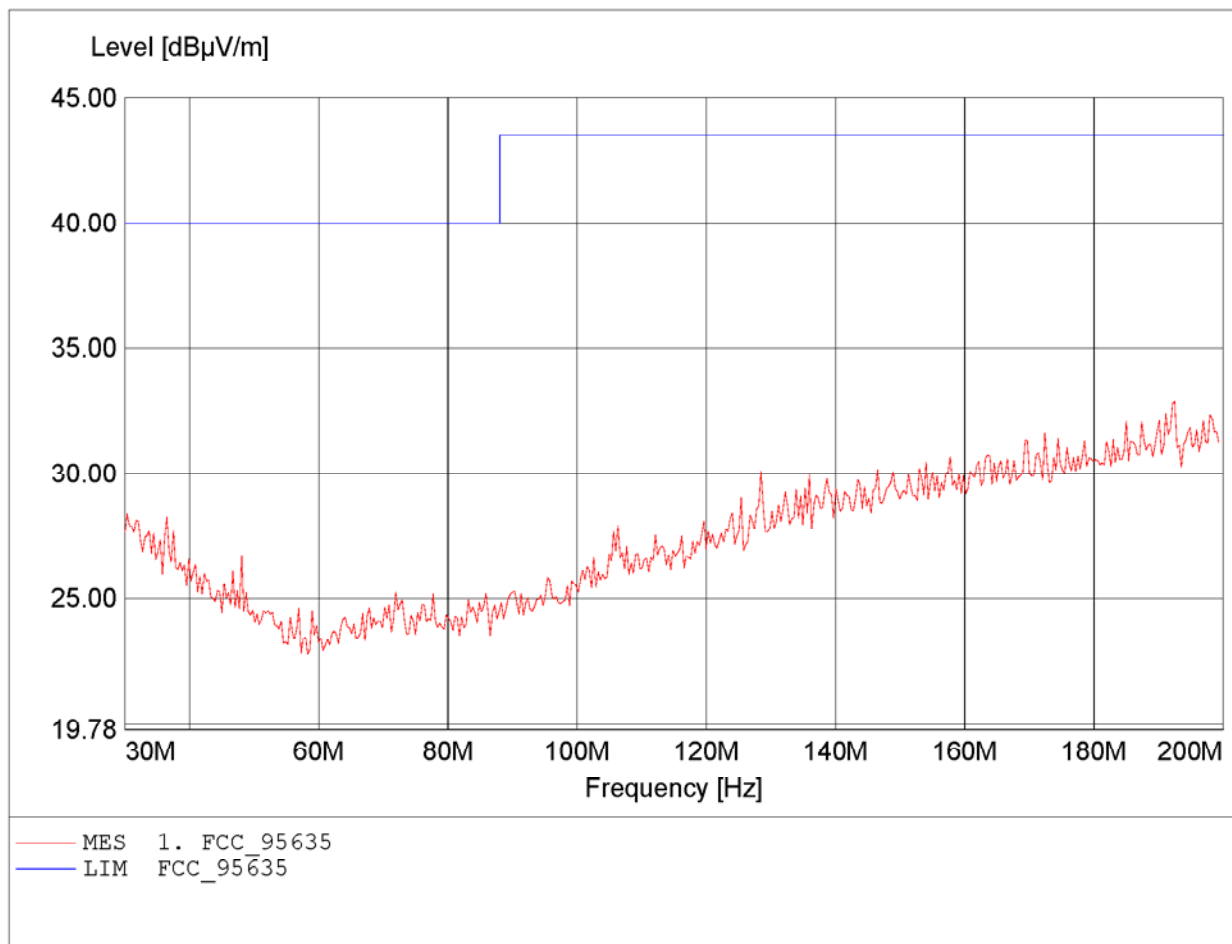


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.461MHz, Emax: 32.17dBµV/m, RBW: 100kHz

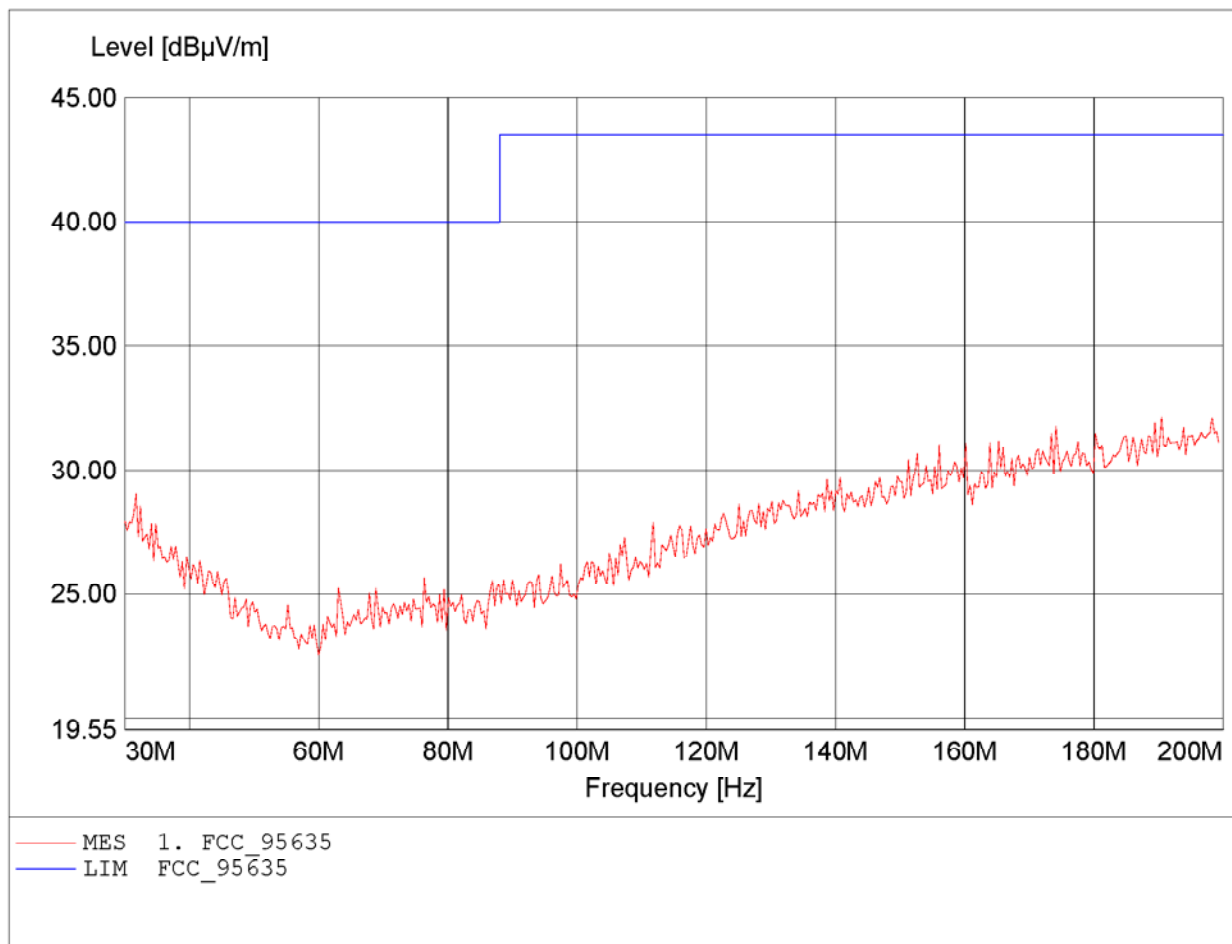


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 324.496MHz, Emax: 16.55dBµV/m, RBW: 100kHz

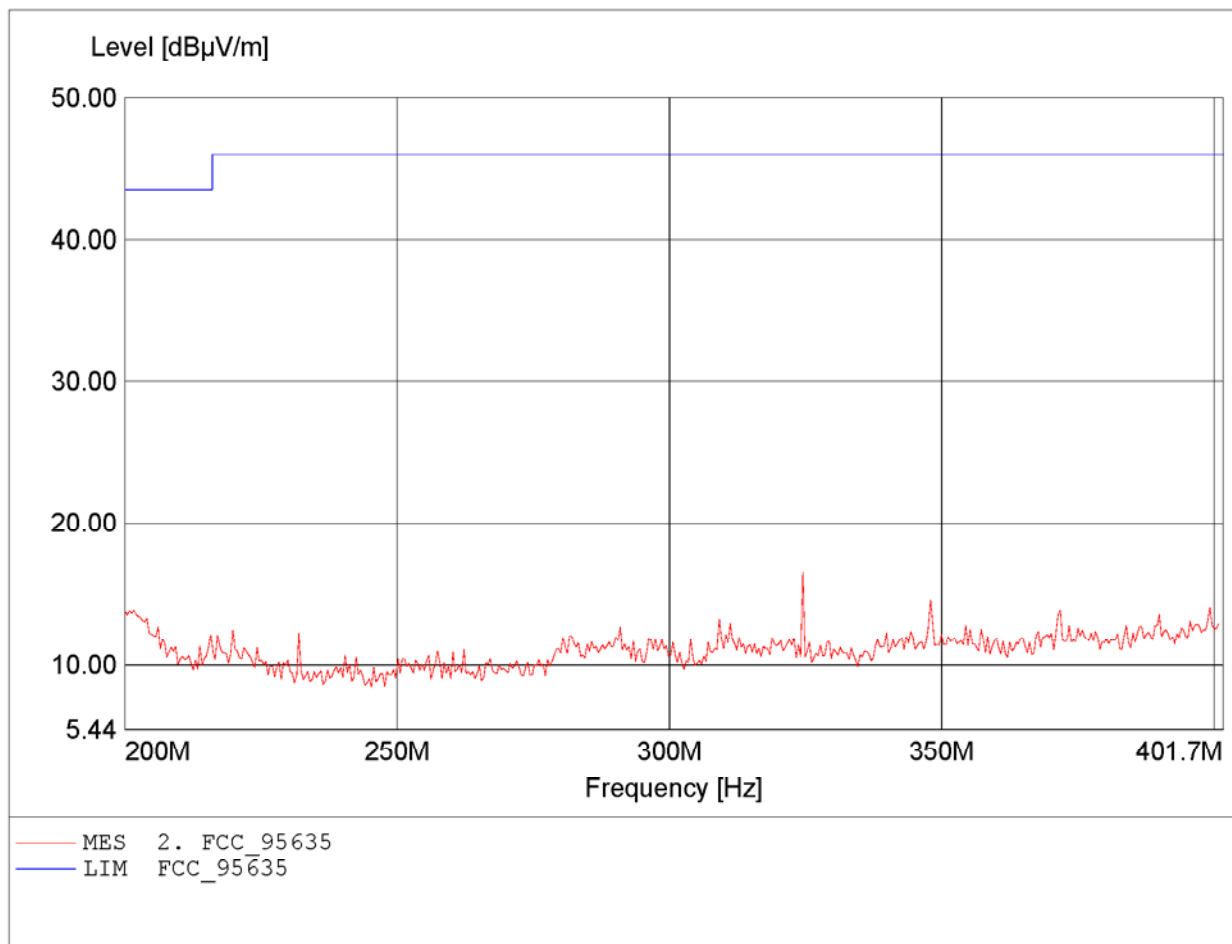


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 292.968MHz, Emax: 12.26dBµV/m, RBW: 100kHz

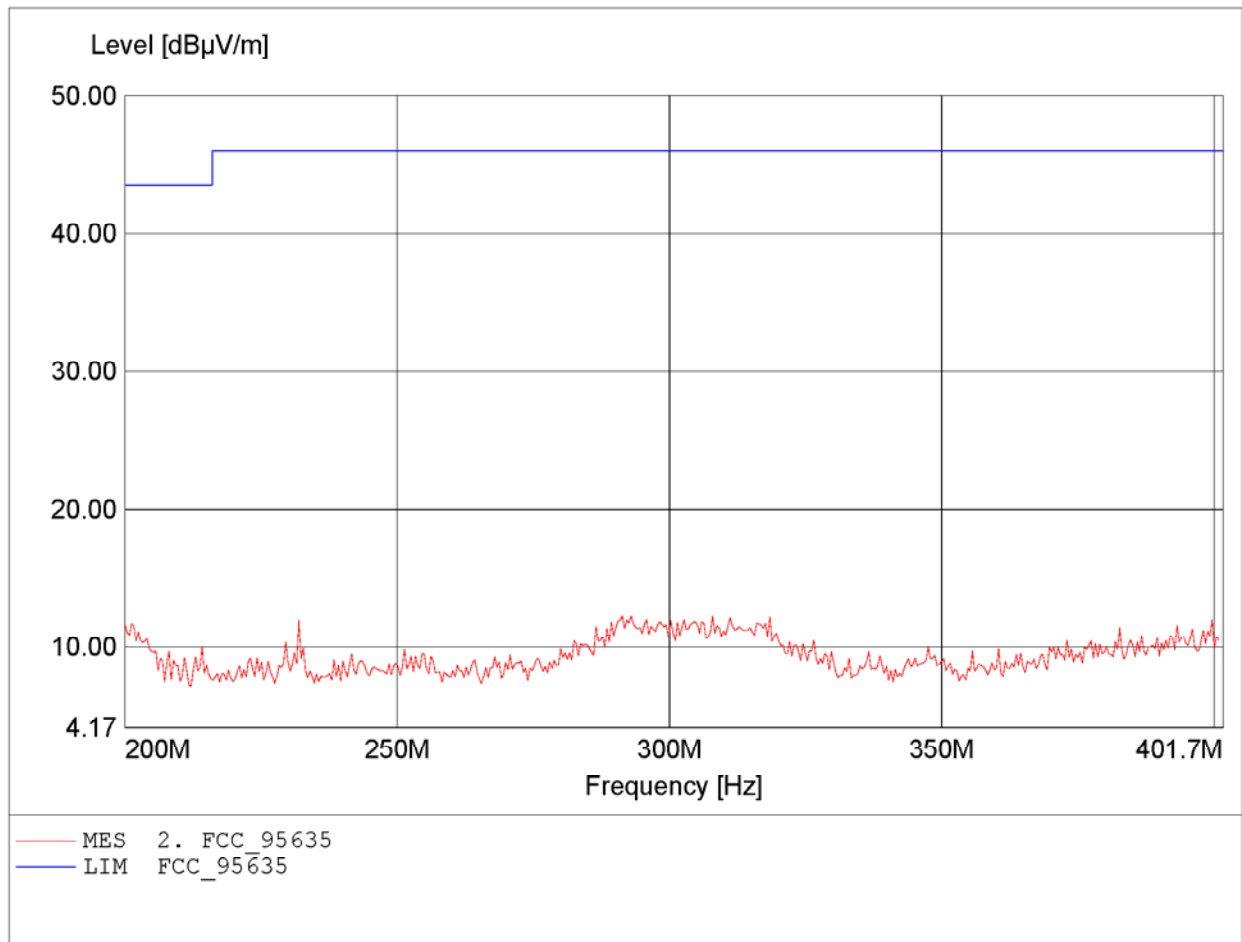


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 404.688MHz, Emax: 23.09dBµV/m, RBW: 3kHz

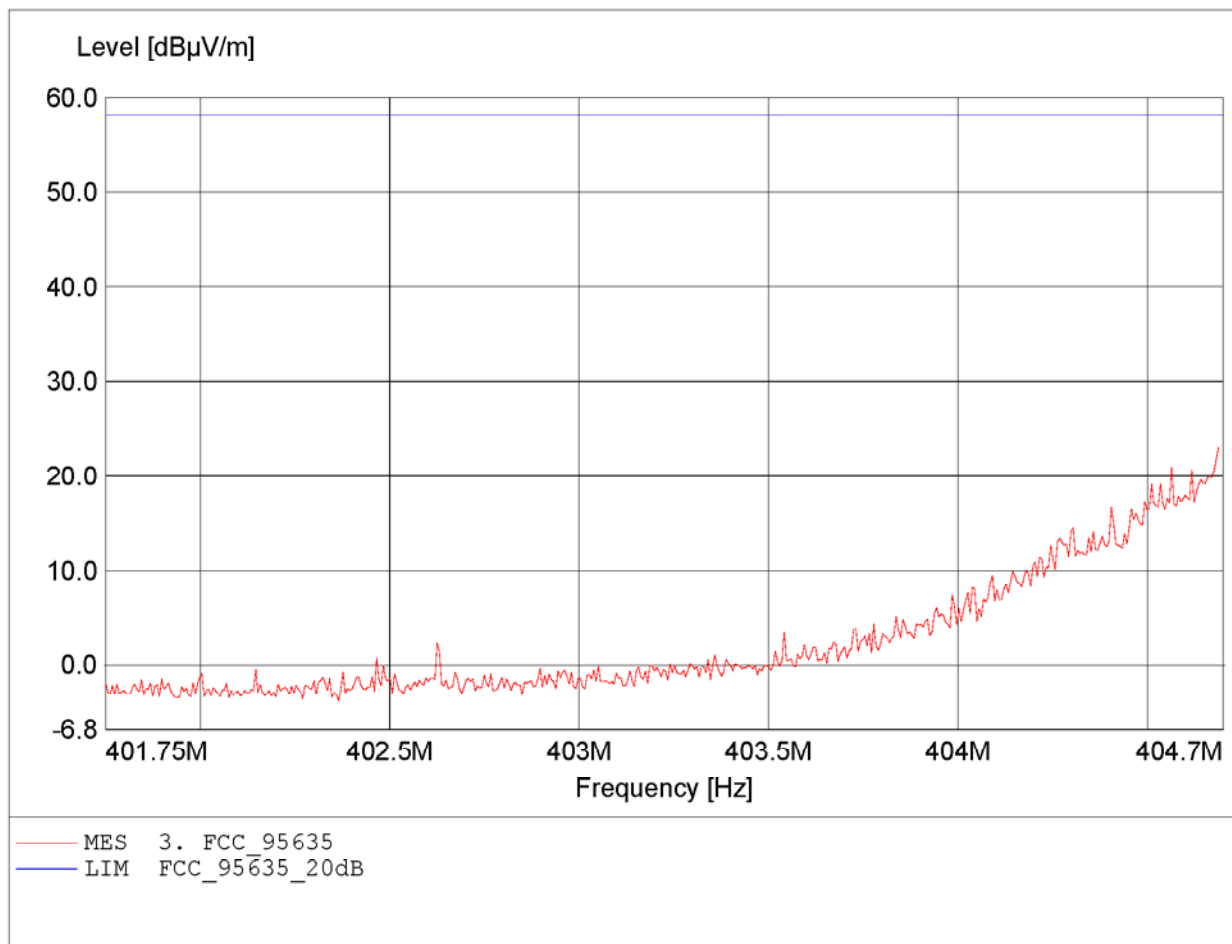


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 404.682MHz, Emax: 28.08dBµV/m, RBW: 3kHz

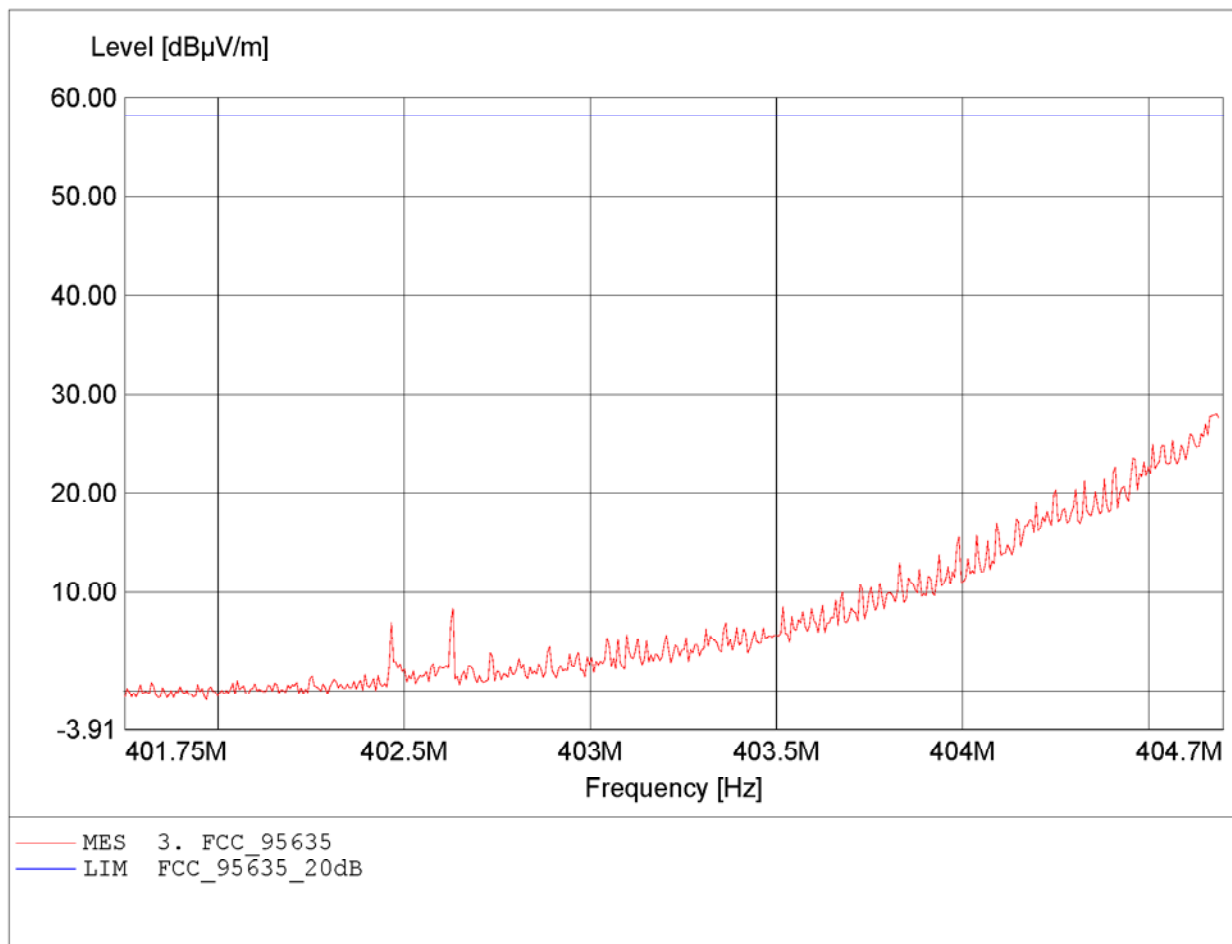


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 405.001MHz, Emax: 24.20dBµV/m, RBW: 3kHz

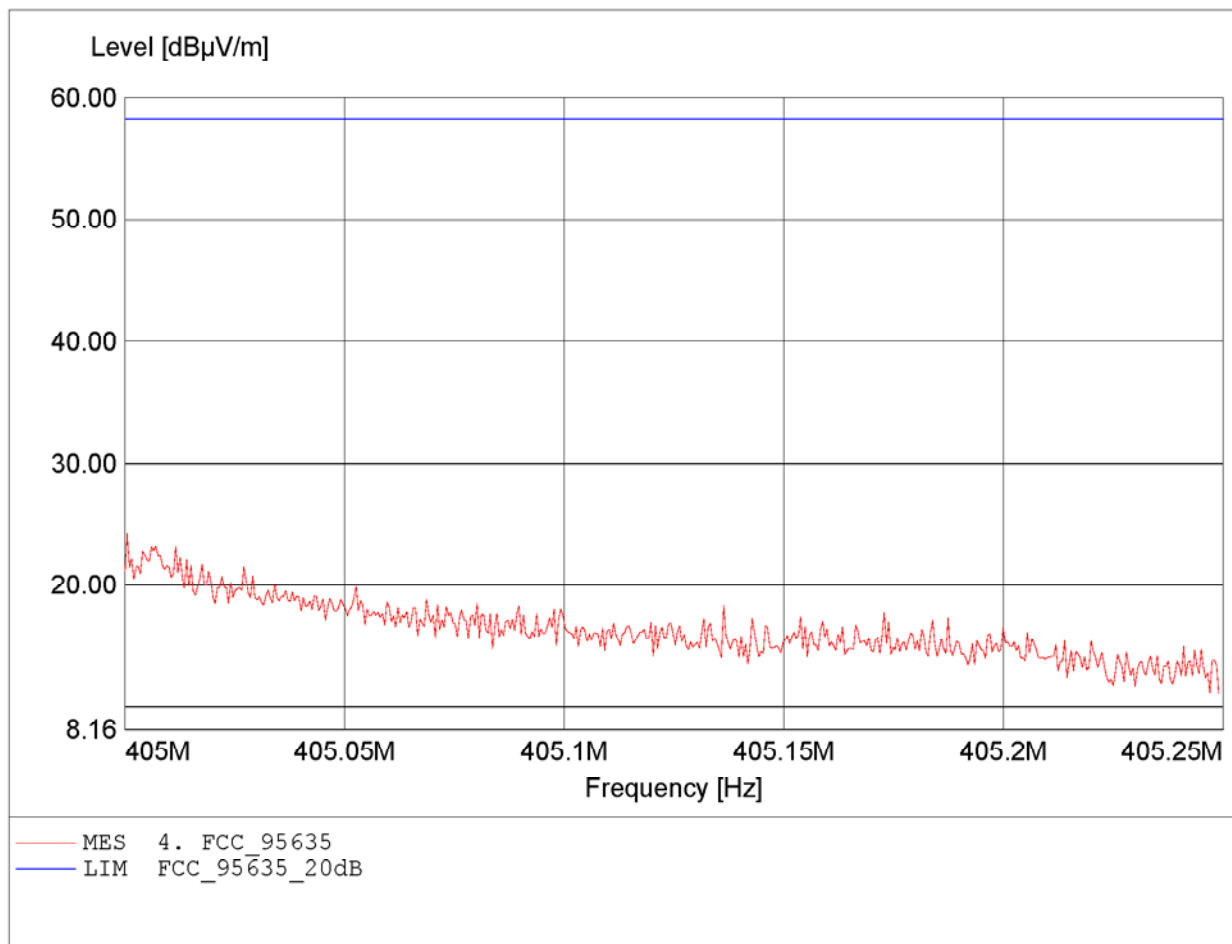


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 405.007MHz, Emax: 29.31dBµV/m, RBW: 3kHz

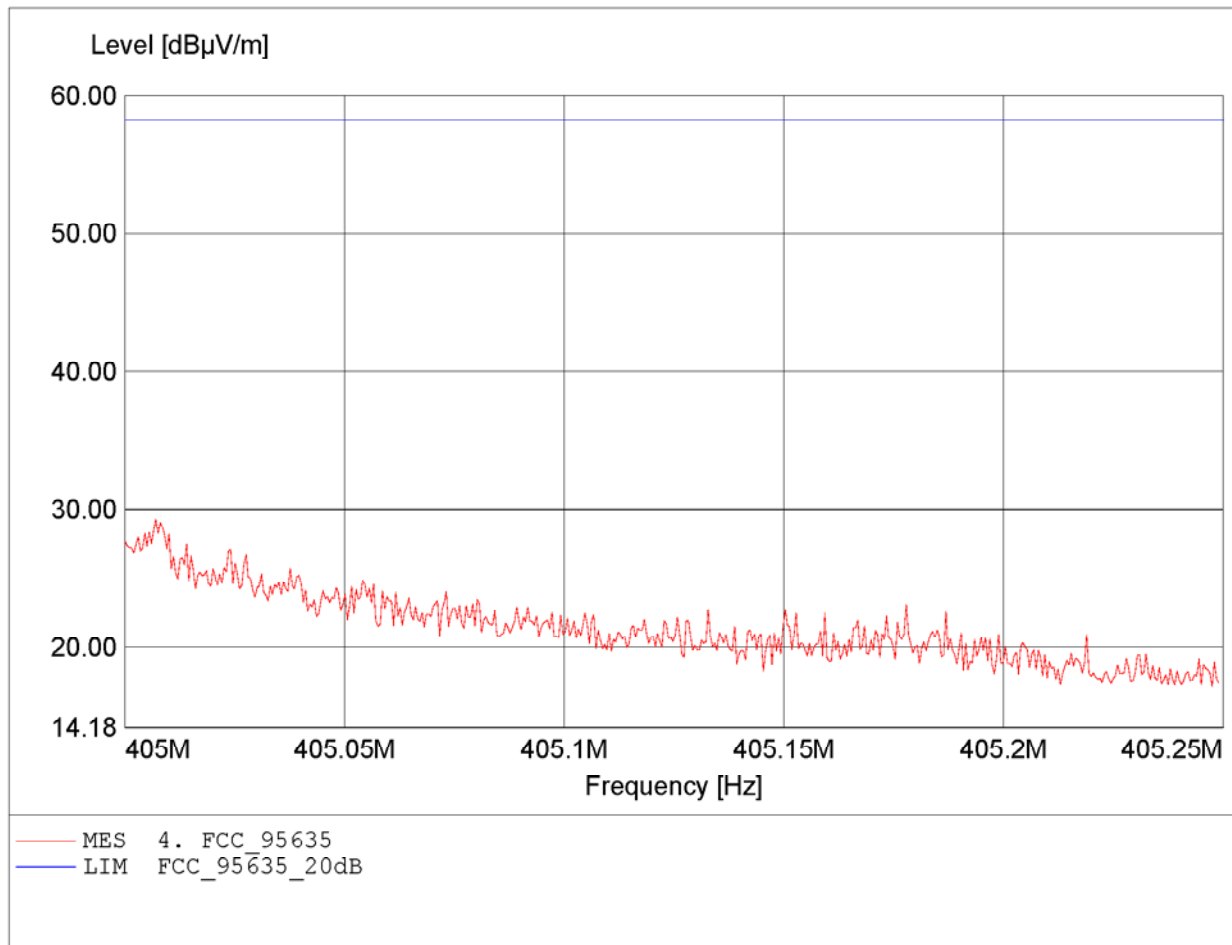


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 810.490MHz, Emax: 40.96dBµV/m, RBW: 100kHz

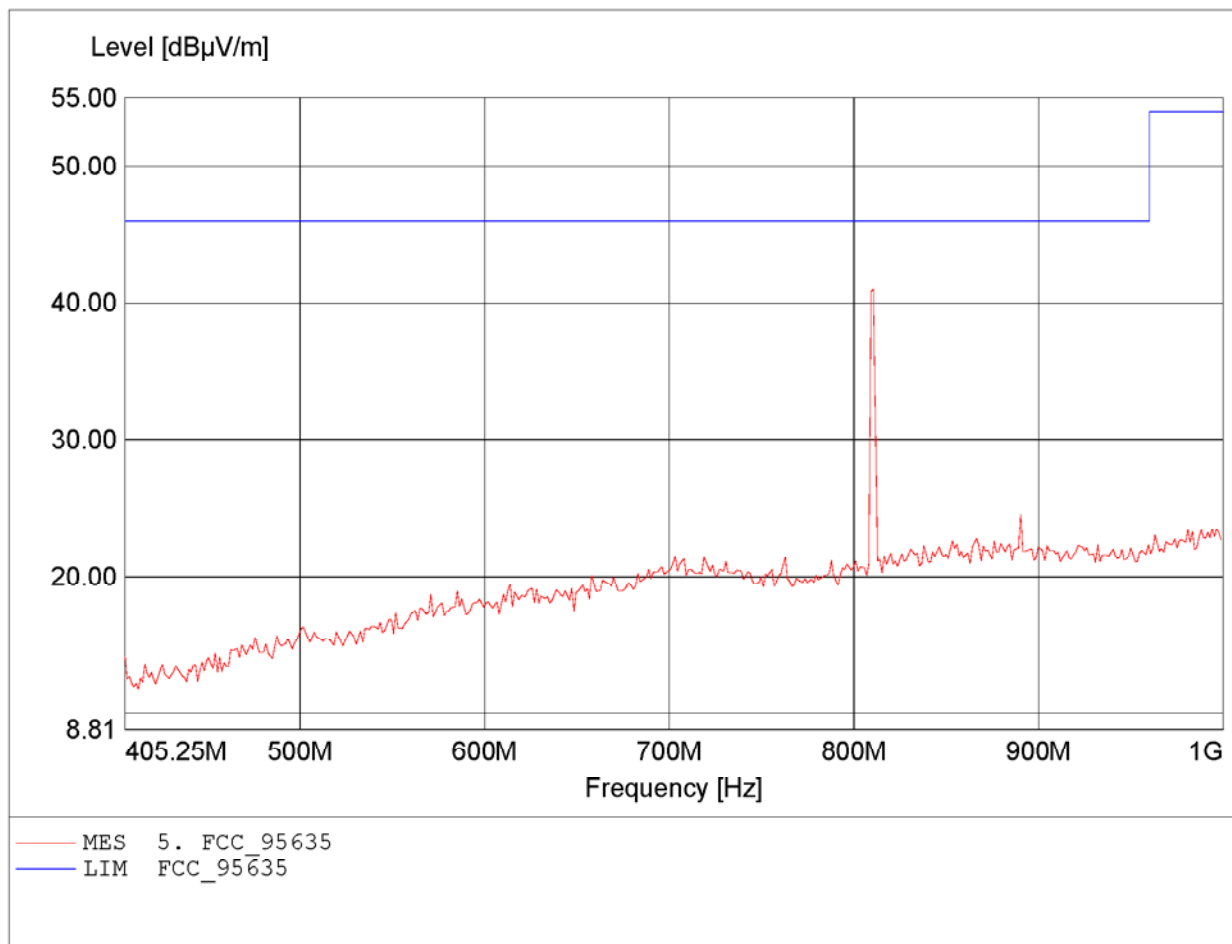


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 810.490MHz, Emax: 36.91dBµV/m, RBW: 100kHz

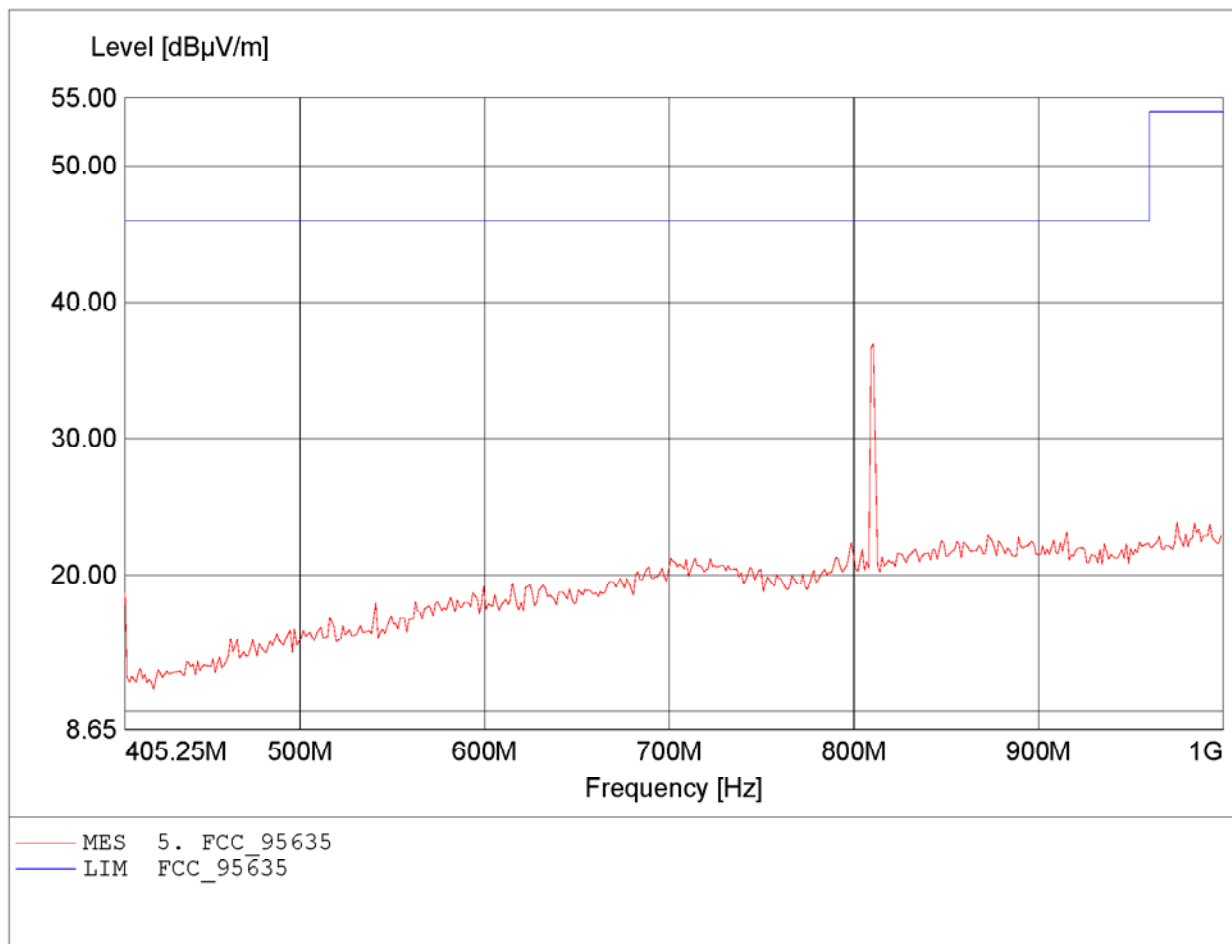


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.820GHz, Emax: 50.24dBµV/m, RBW: 100kHz

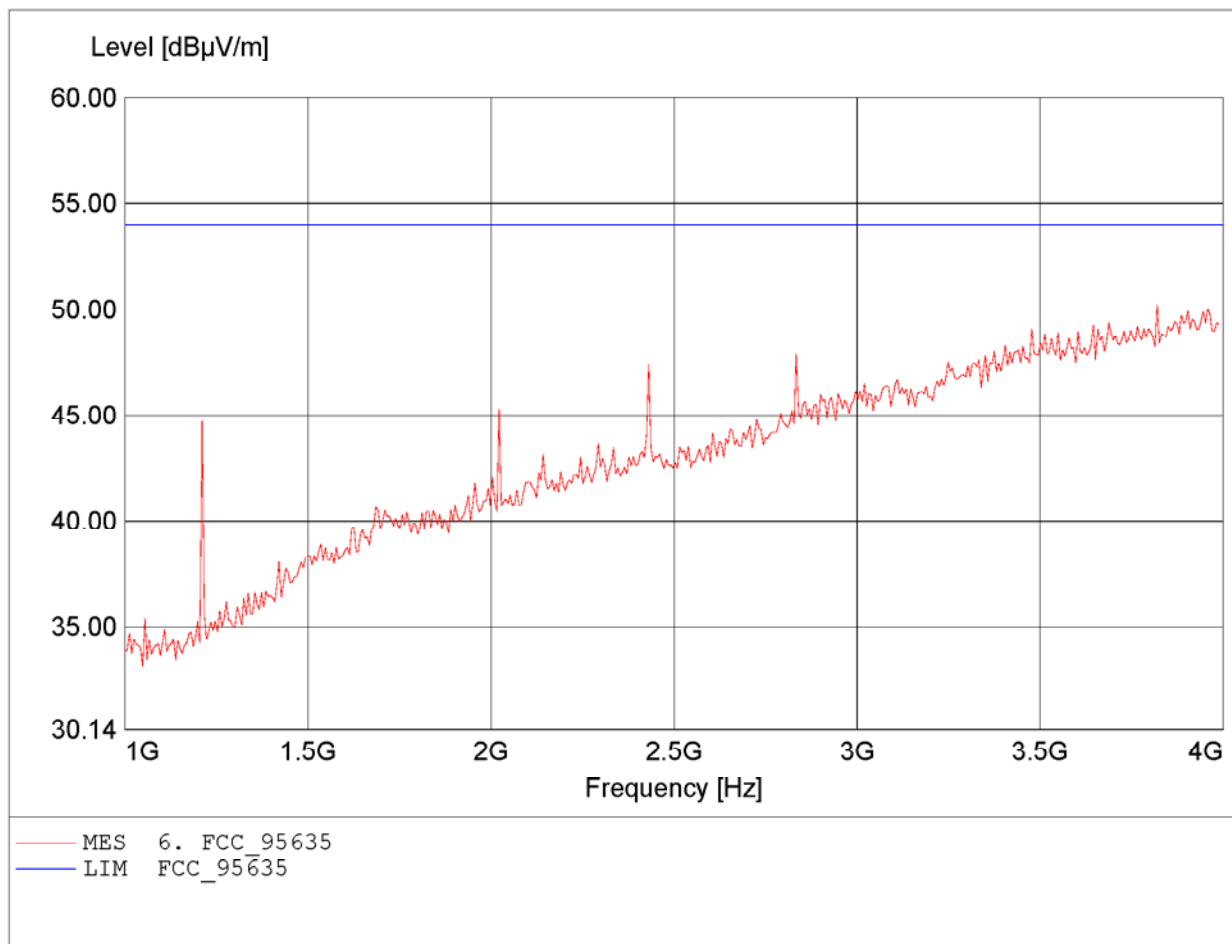


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.916GHz, Emax: 50.34dBµV/m, RBW: 100kHz

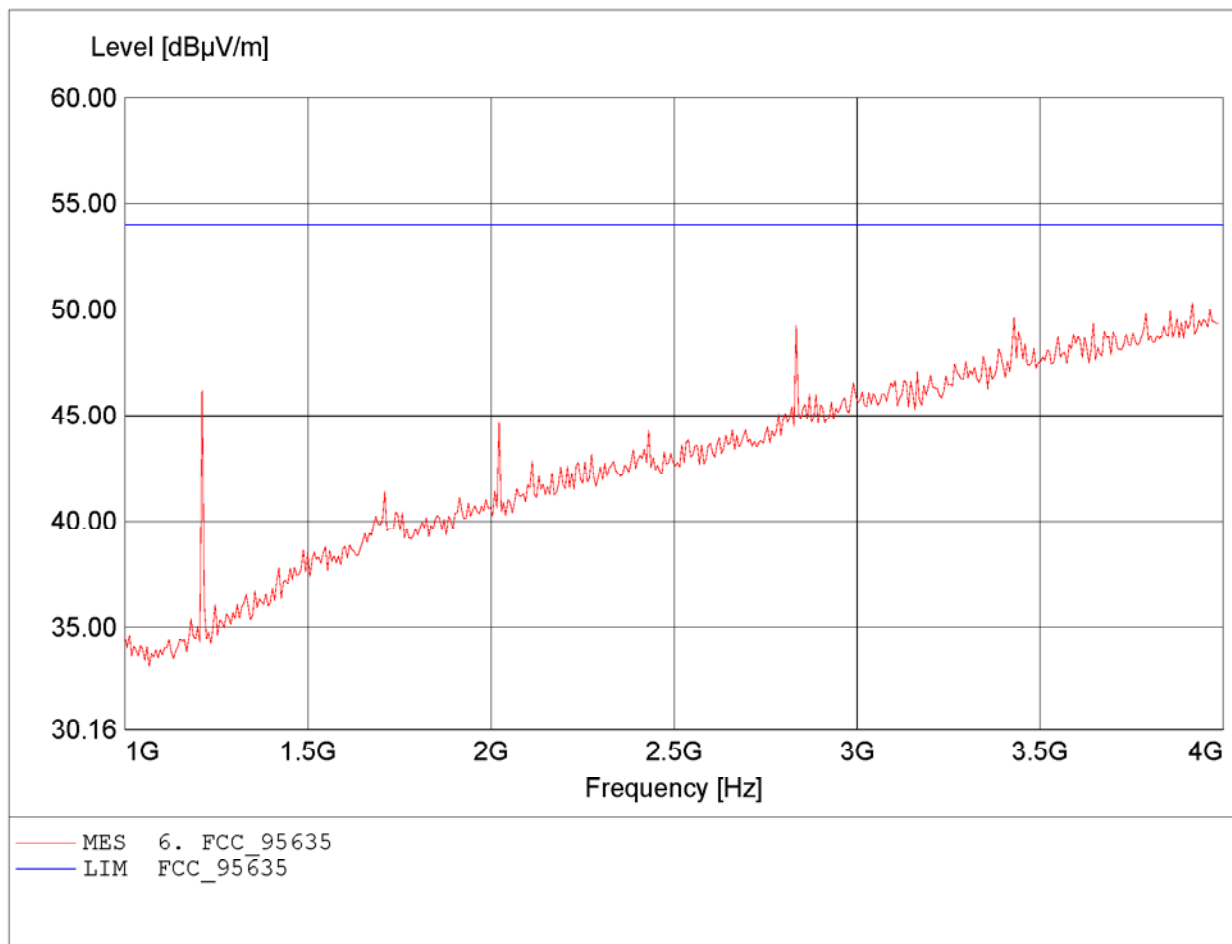


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.912GHz, Emax: 44.13dBµV/m, RBW: 1MHz

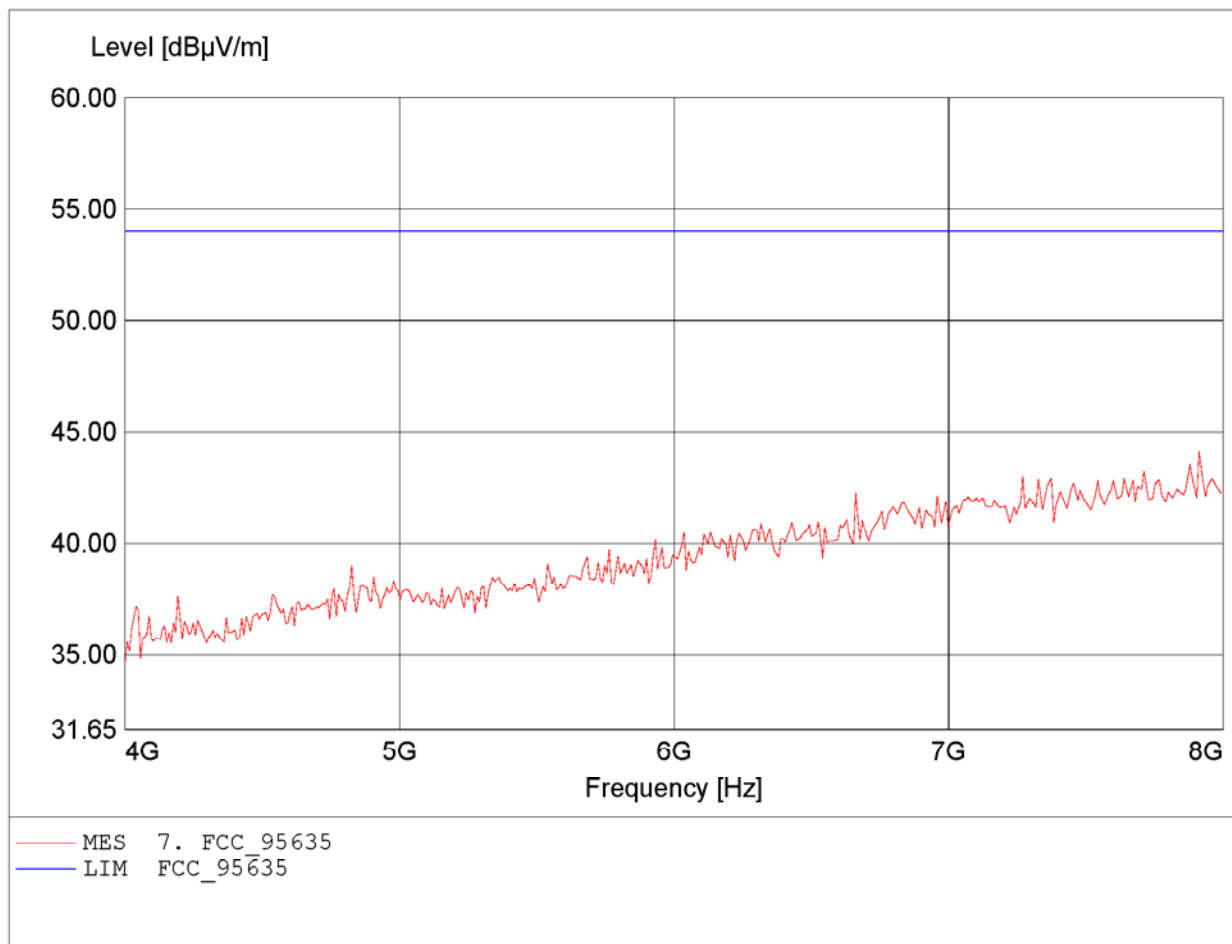


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.992GHz, Emax: 43.91dBµV/m, RBW: 1MHz

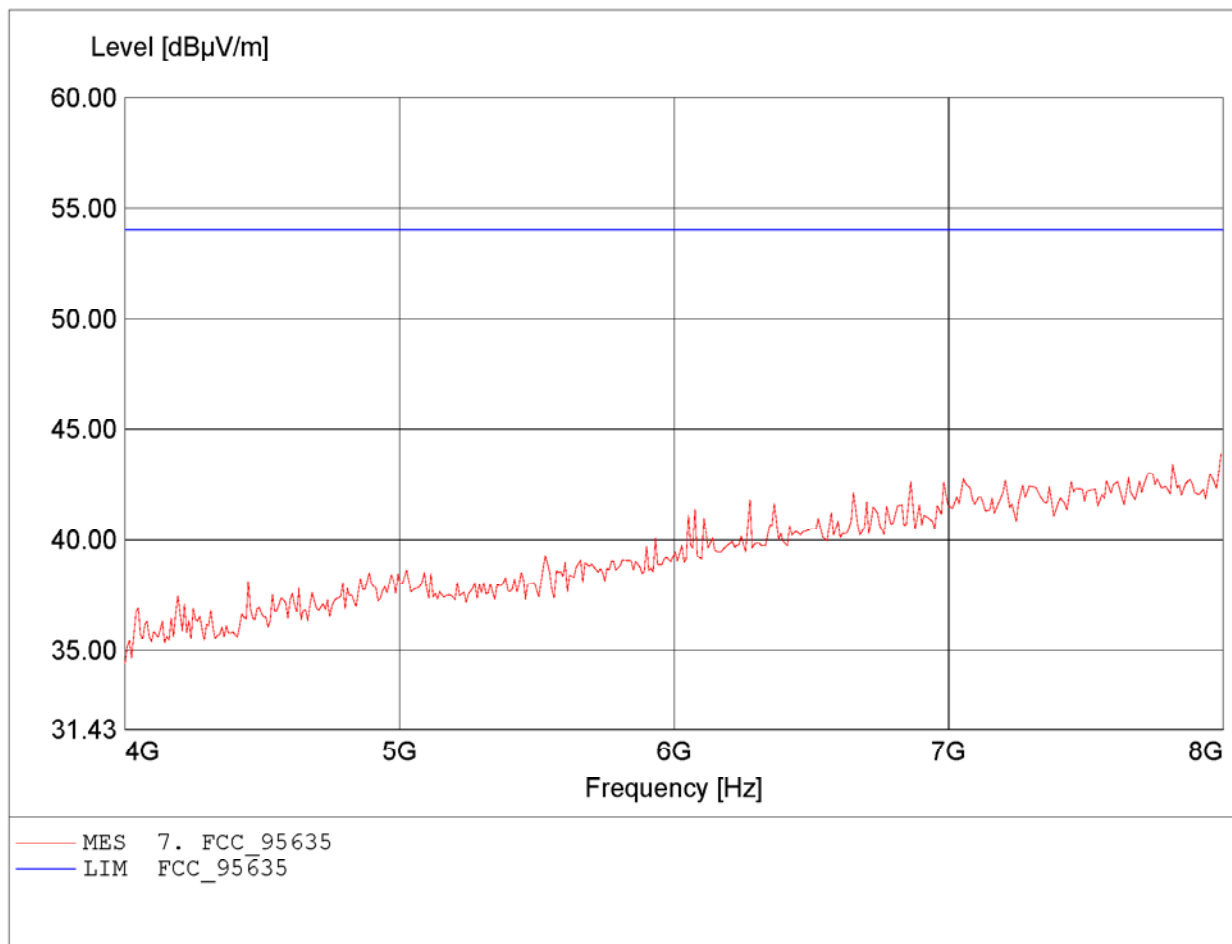


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.644MHz, Emax: 78.17dBuV/m, RBW: 100kHz

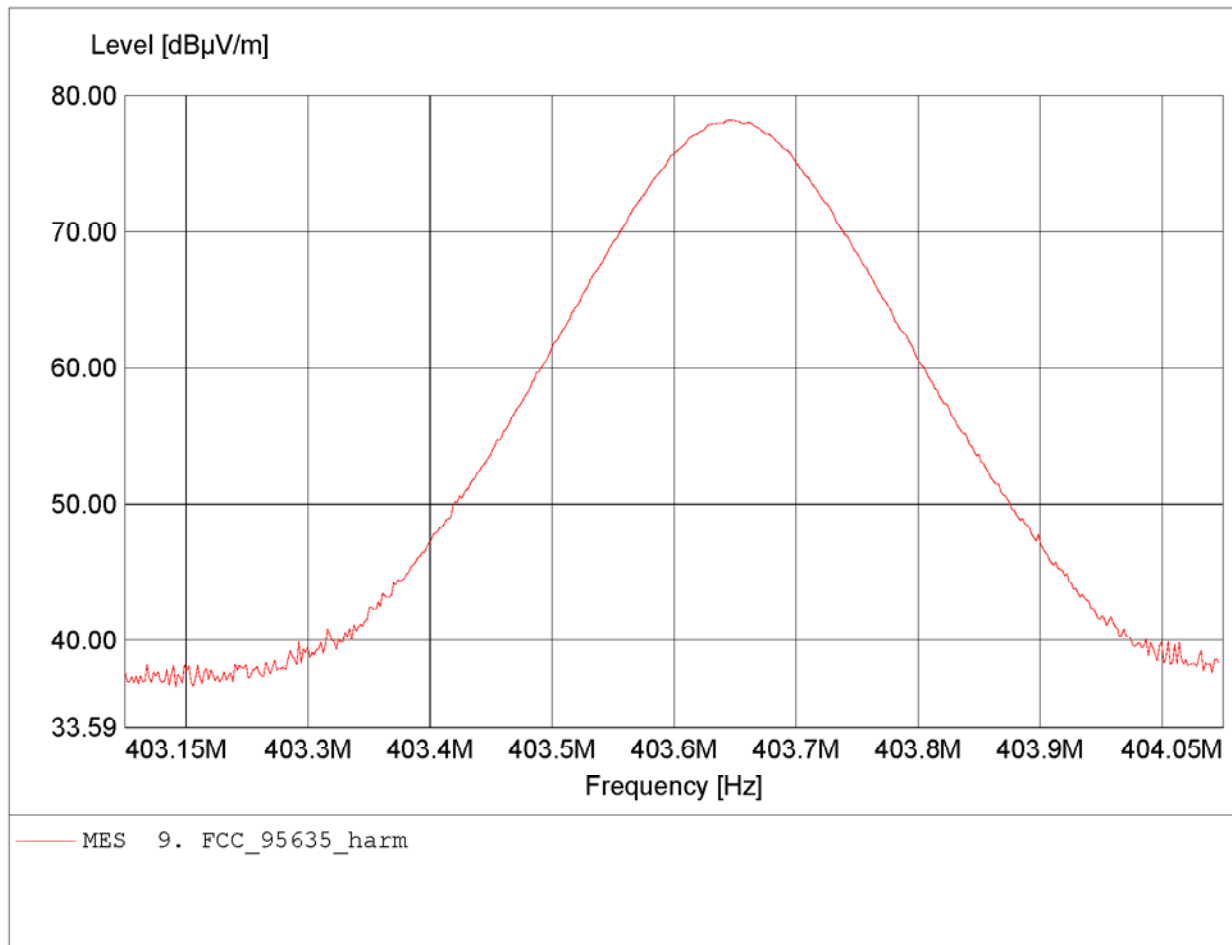


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 187.735MHz, Emax: 32.46dBµV/m, RBW: 100kHz

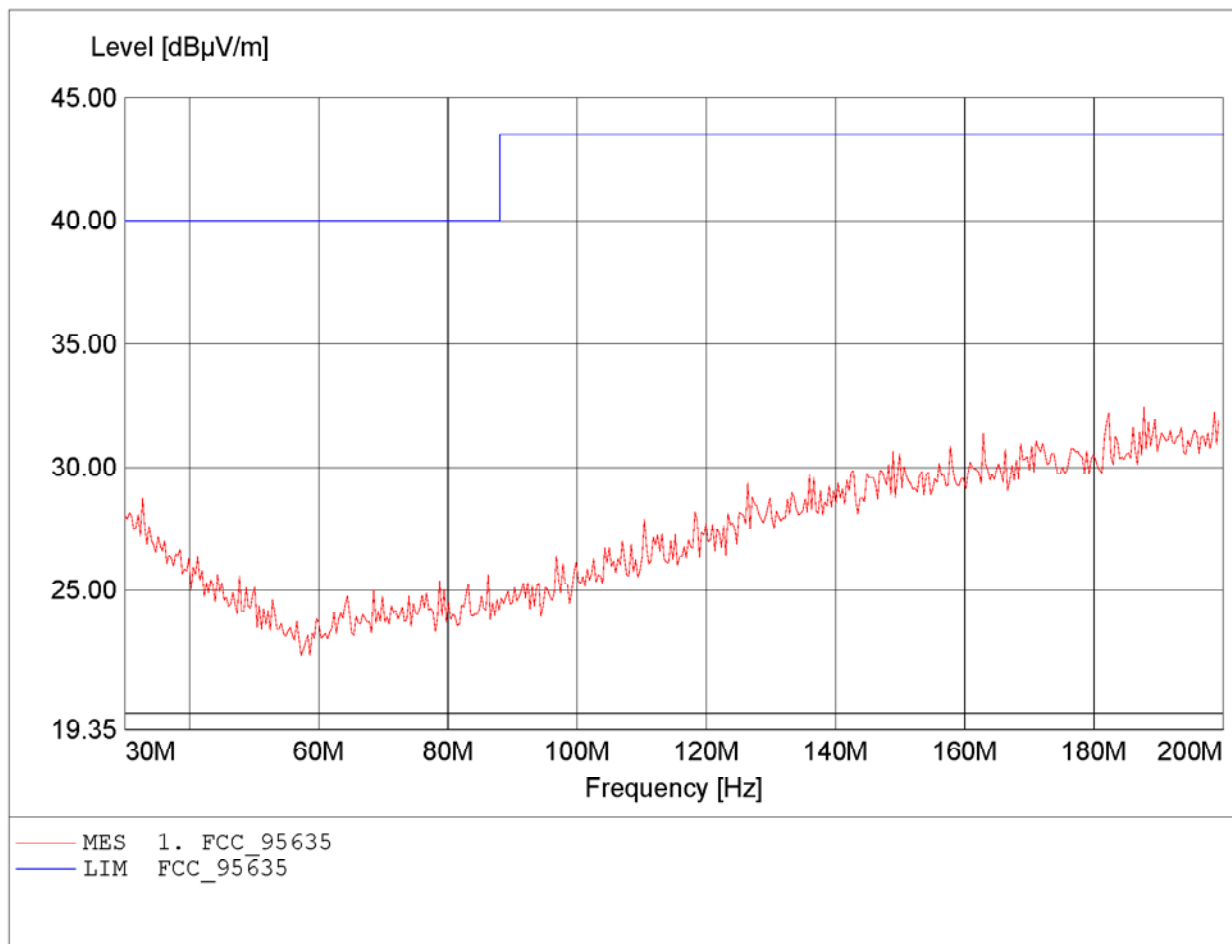


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 32.62dBµV/m, RBW: 100kHz

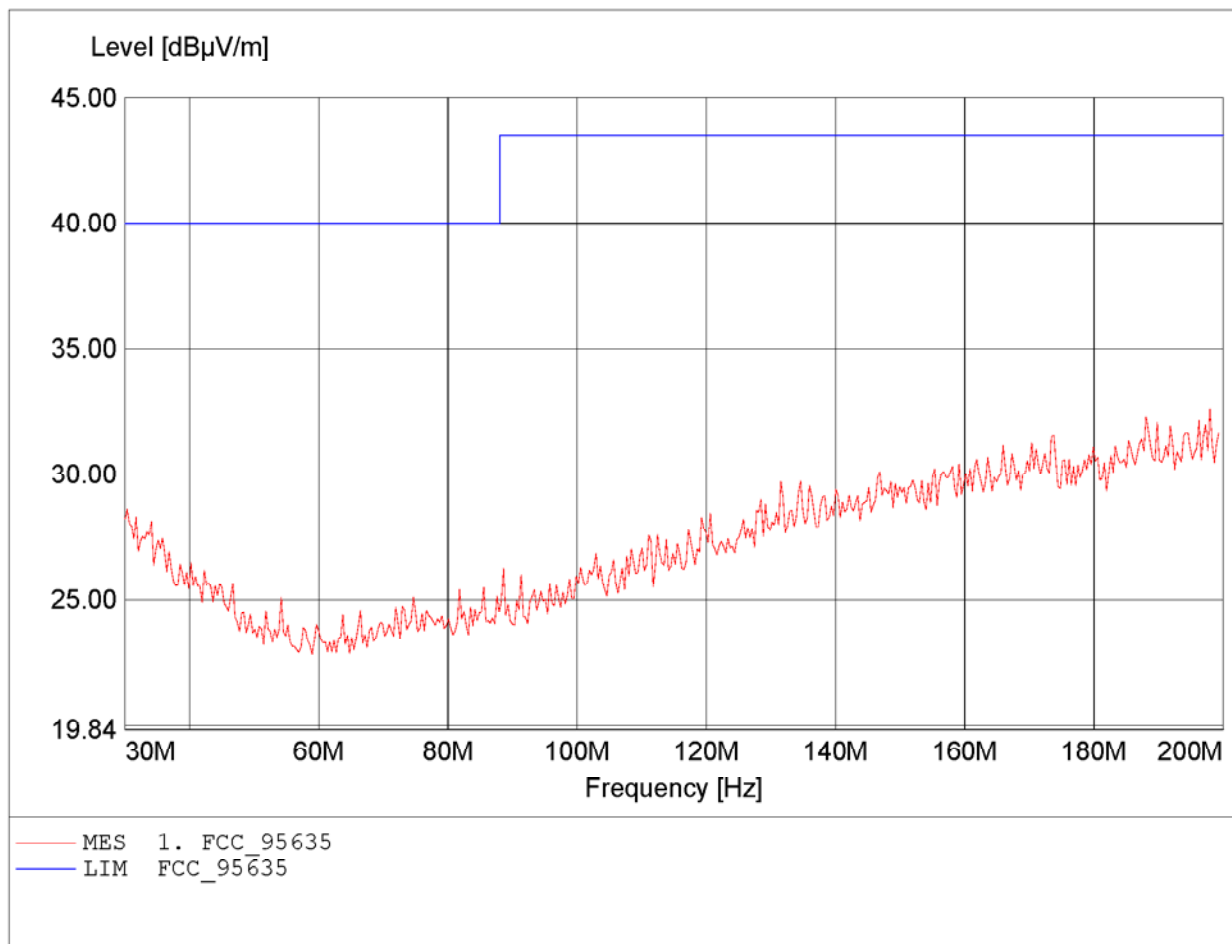


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 289.330MHz, Emax: 13.09dBµV/m, RBW: 100kHz

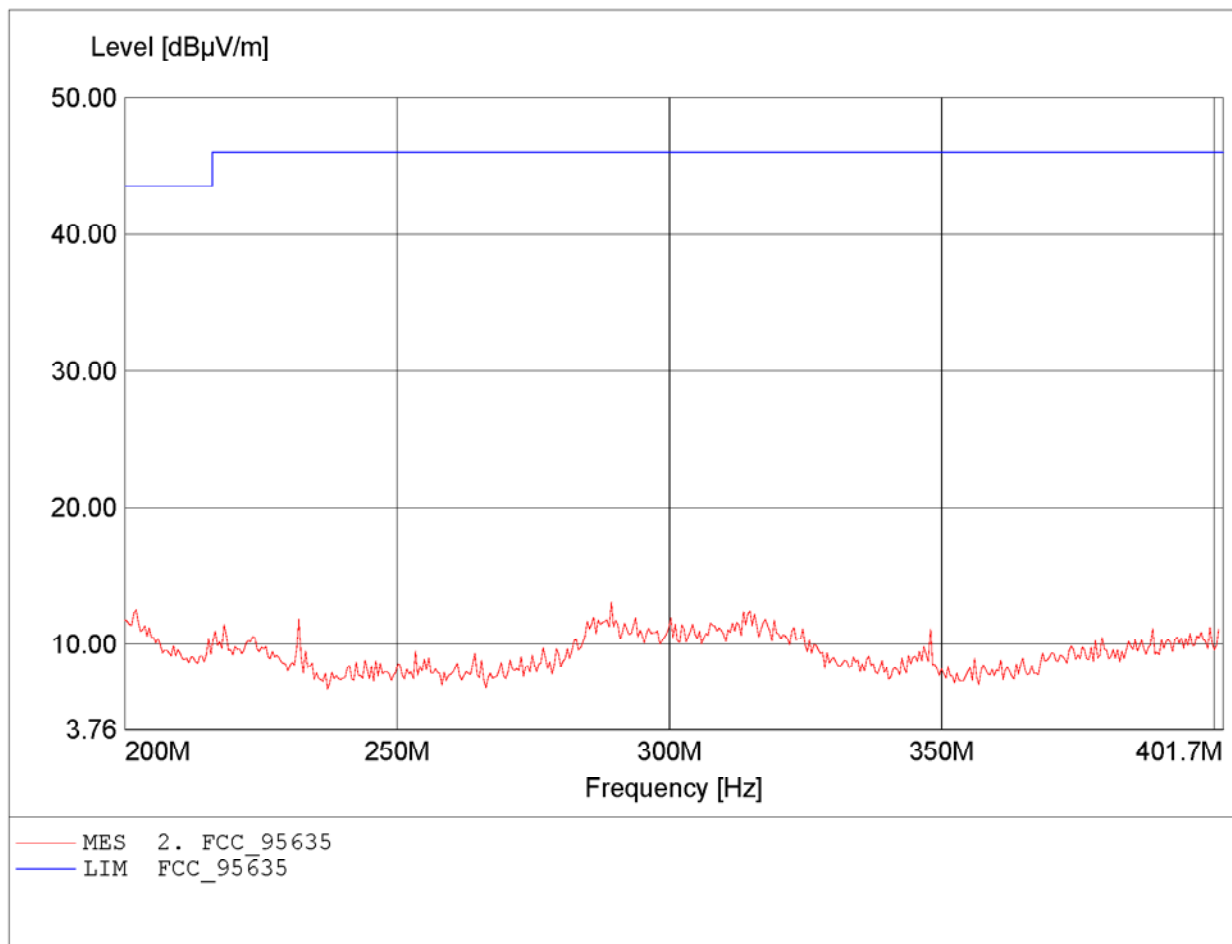


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 231.932MHz, Emax: 13.33dBµV/m, RBW: 100kHz

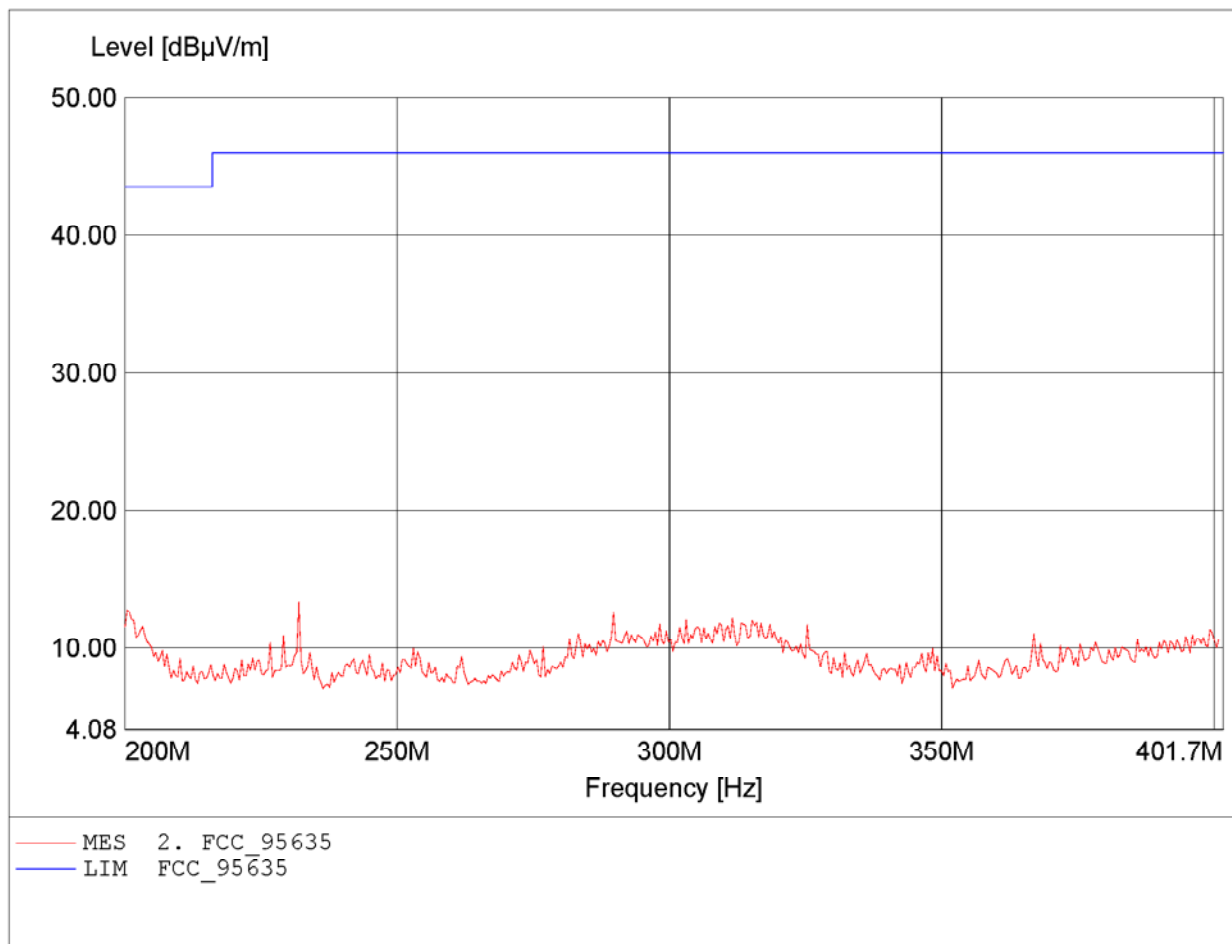


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.298MHz, Emax: 27.16dBµV/m, RBW: 3kHz

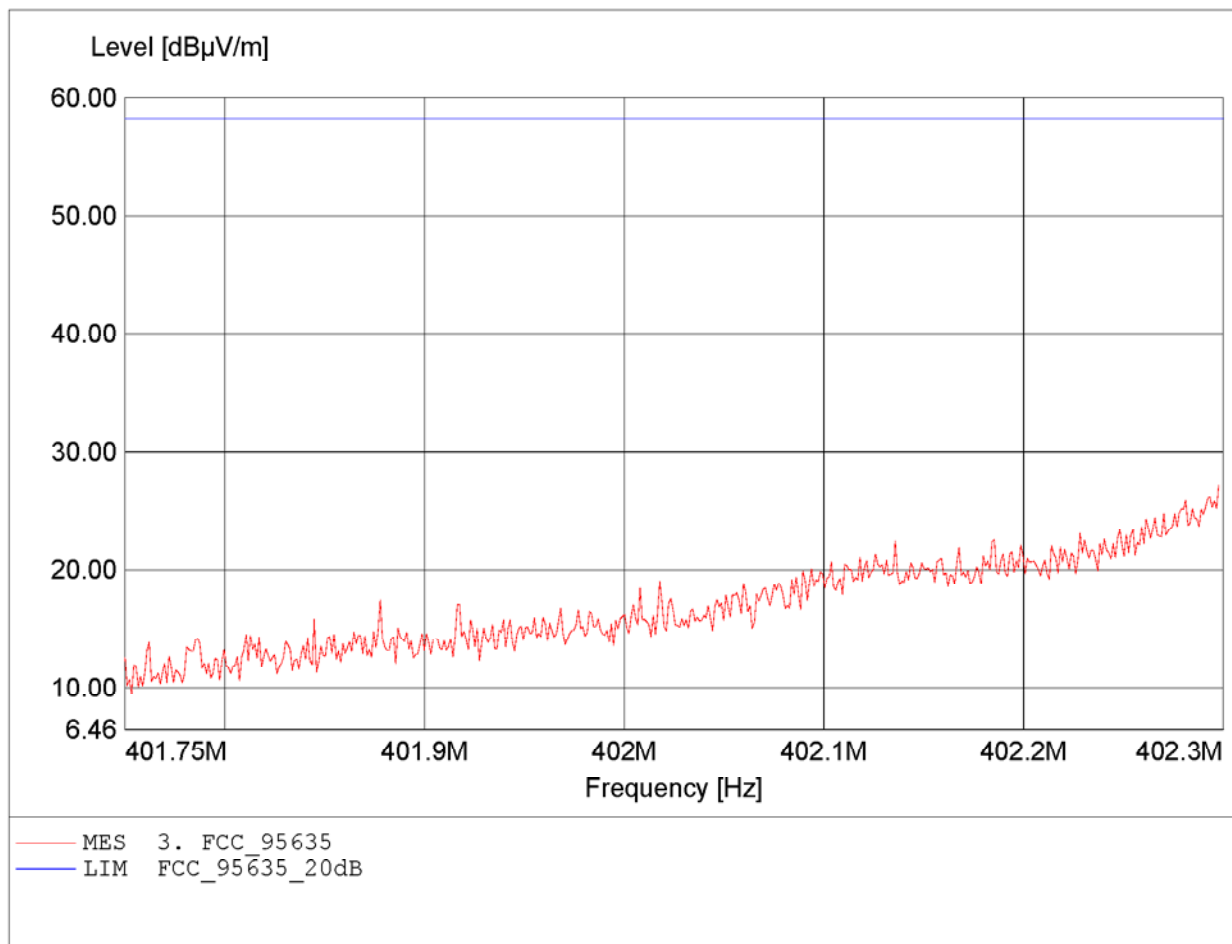


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.291MHz, Emax: 22.00dBµV/m, RBW: 3kHz

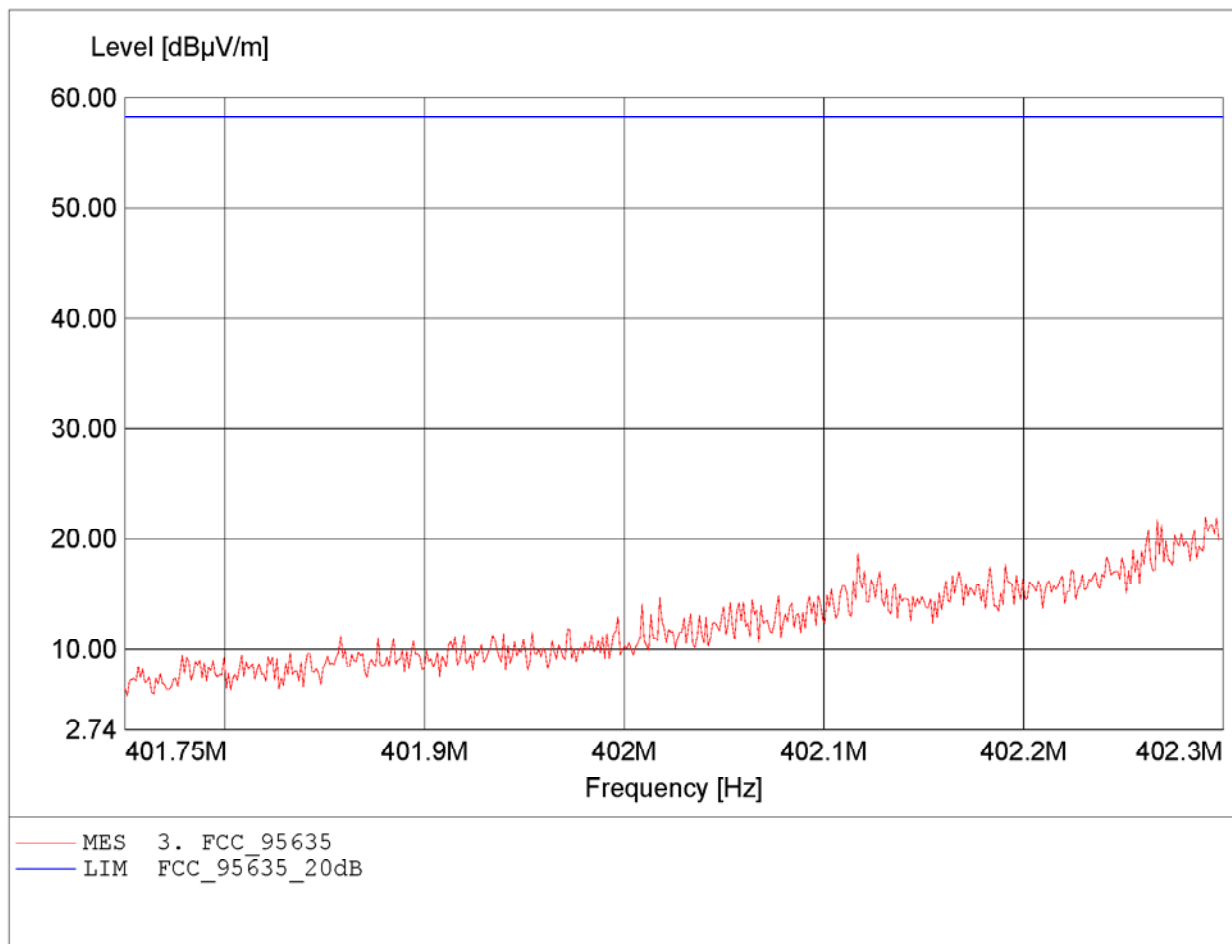


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.605MHz, Emax: 25.54dBµV/m, RBW: 3kHz

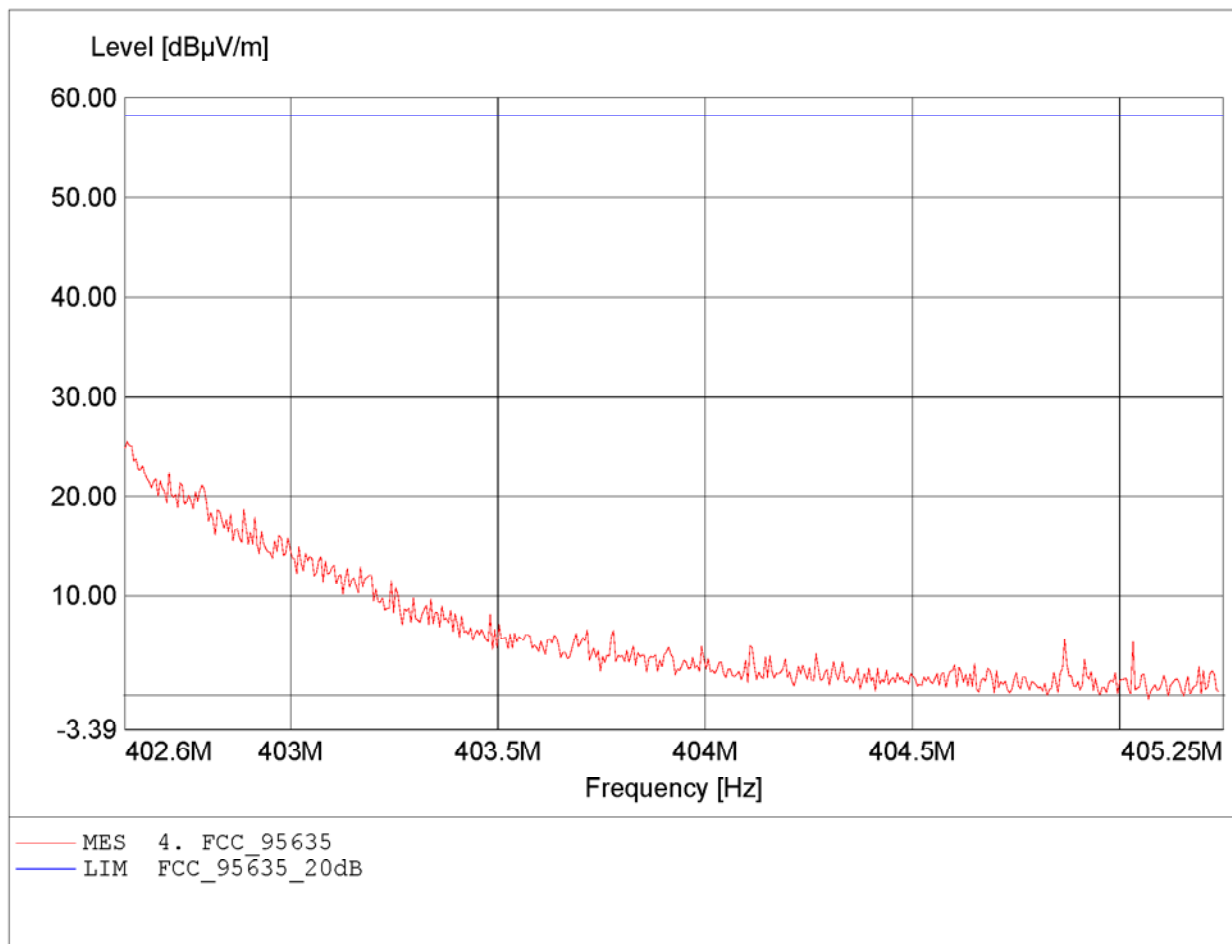


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 402.600MHz, Emax: 22.85dBµV/m, RBW: 3kHz

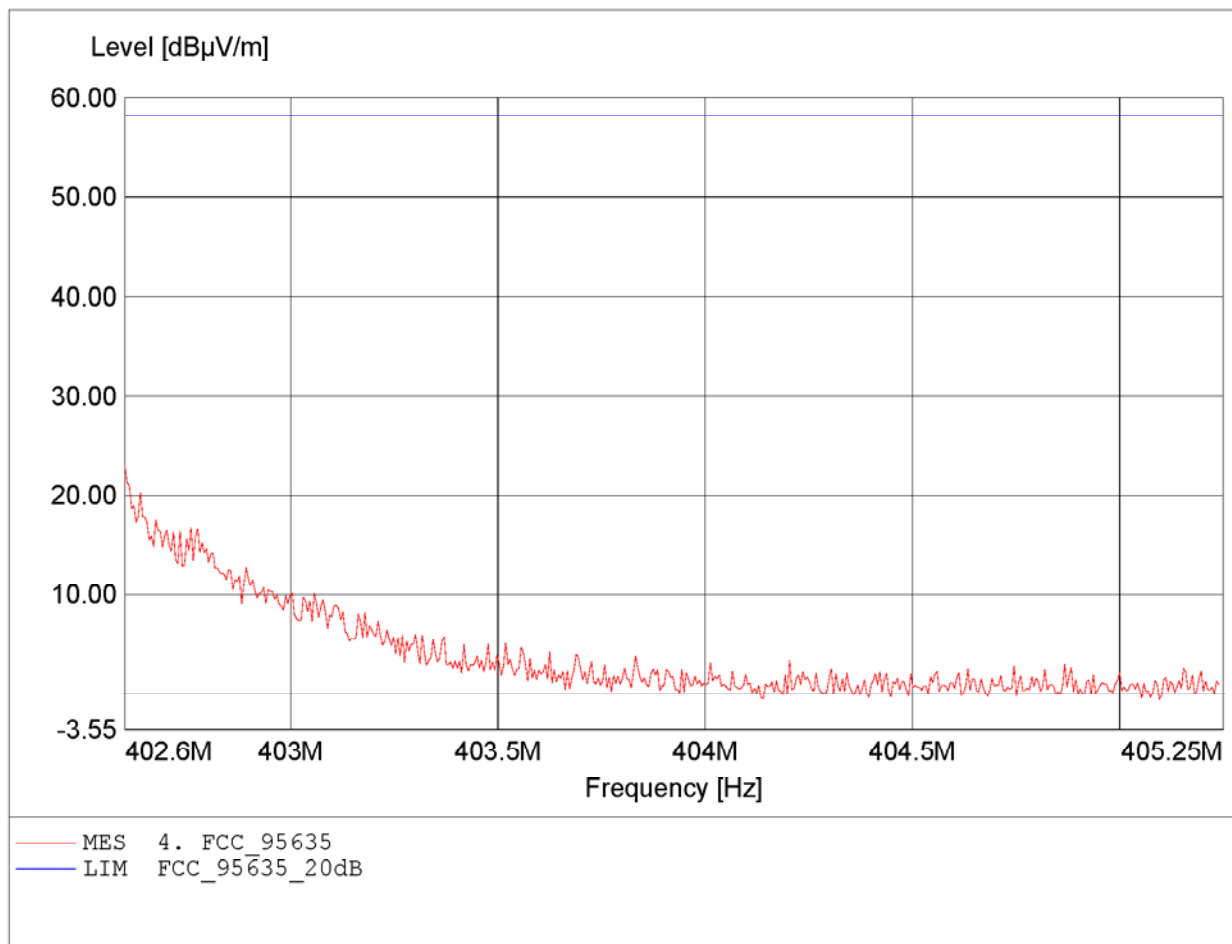


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 805.723MHz, Emax: 38.43dBµV/m, RBW: 100kHz

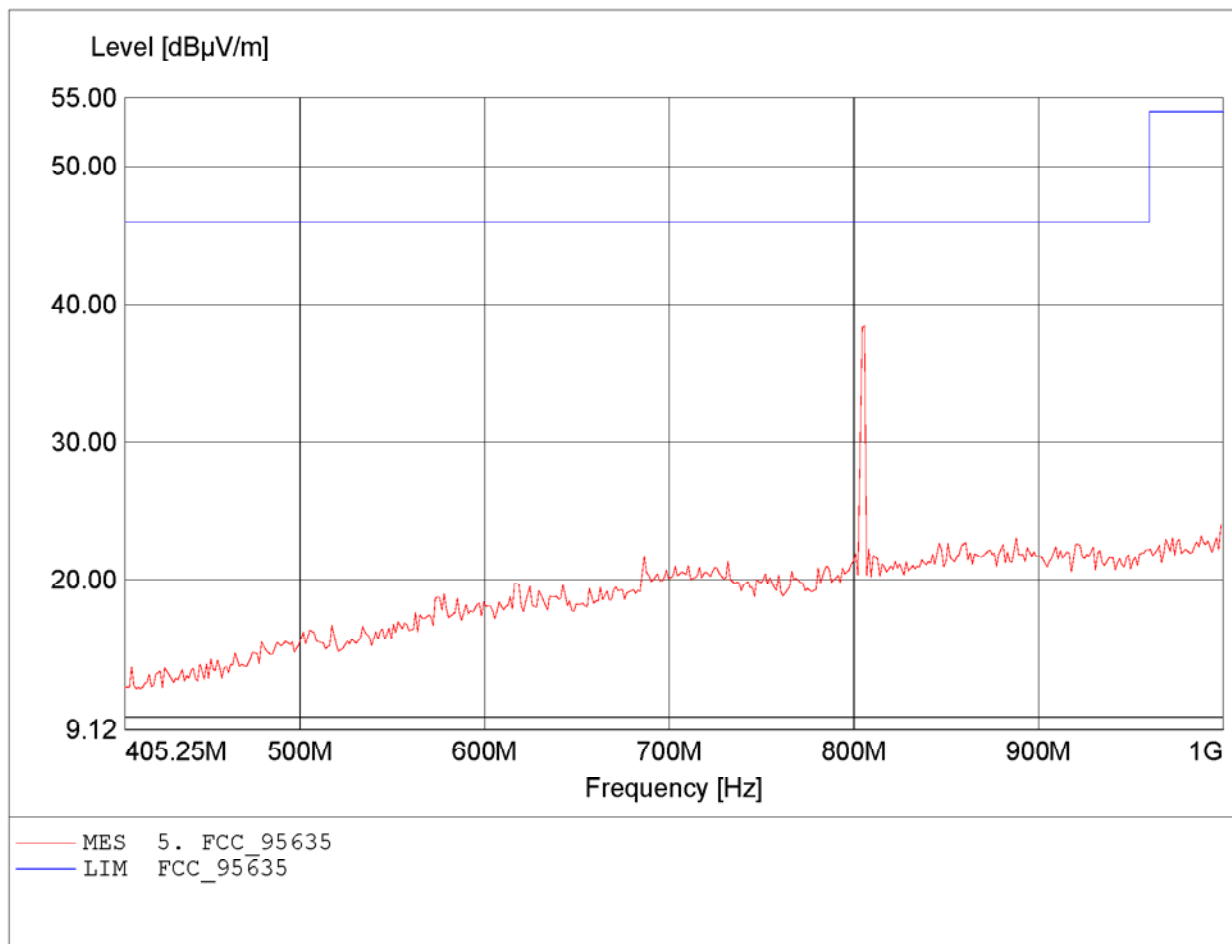


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 804.531MHz, Emax: 35.69dBµV/m, RBW: 100kHz

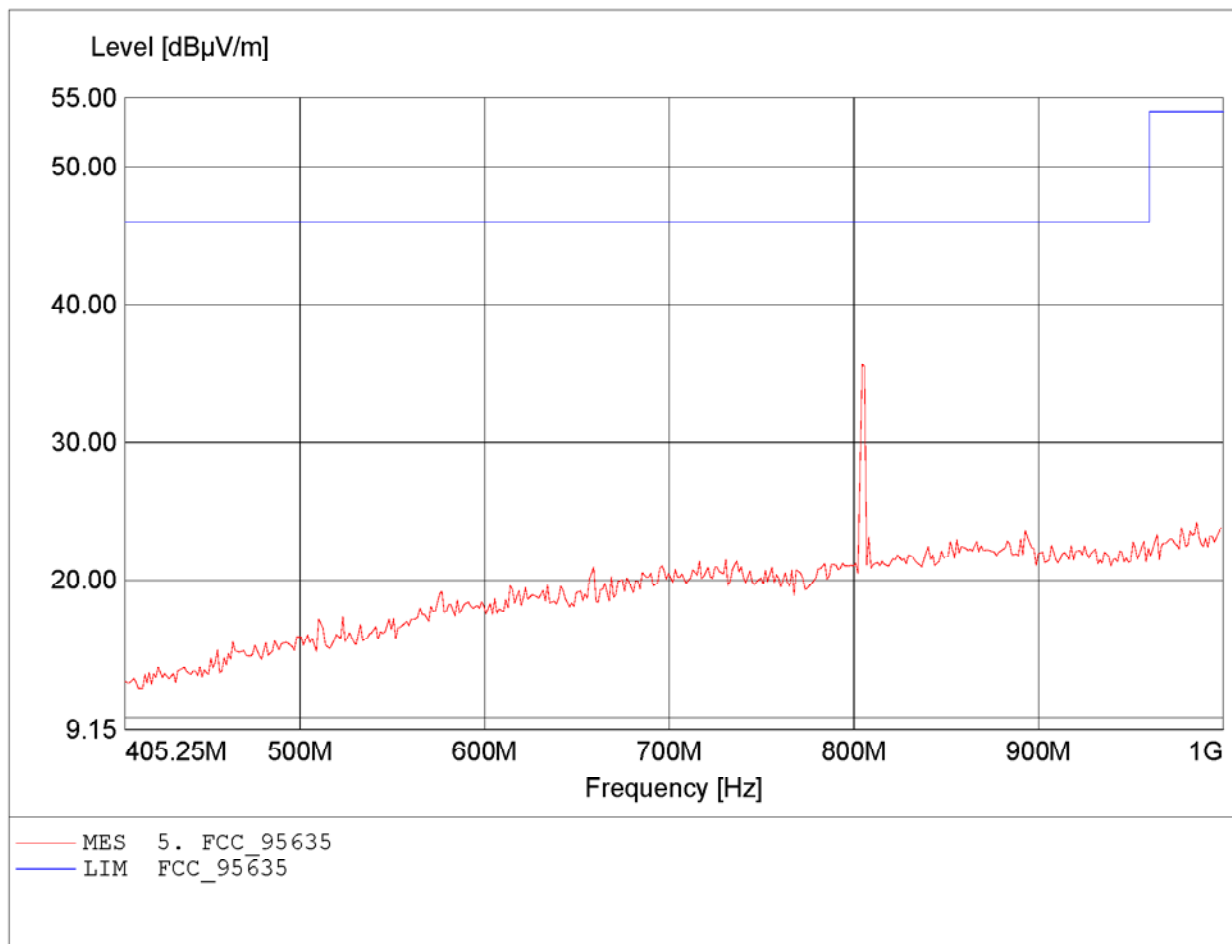


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.976GHz, Emax: 50.40dBµV/m, RBW: 100kHz

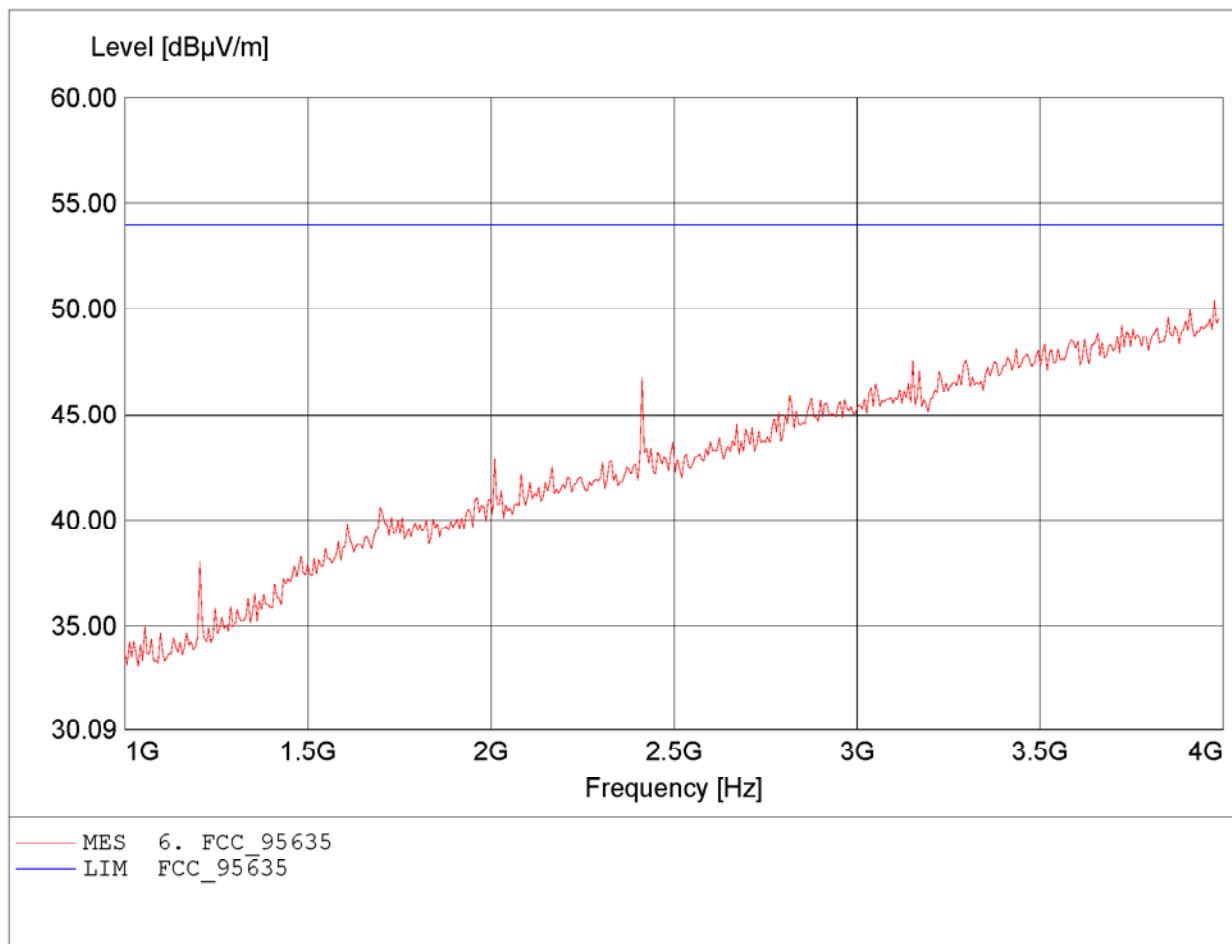


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.898GHz, Emax: 50.23dBµV/m, RBW: 100kHz

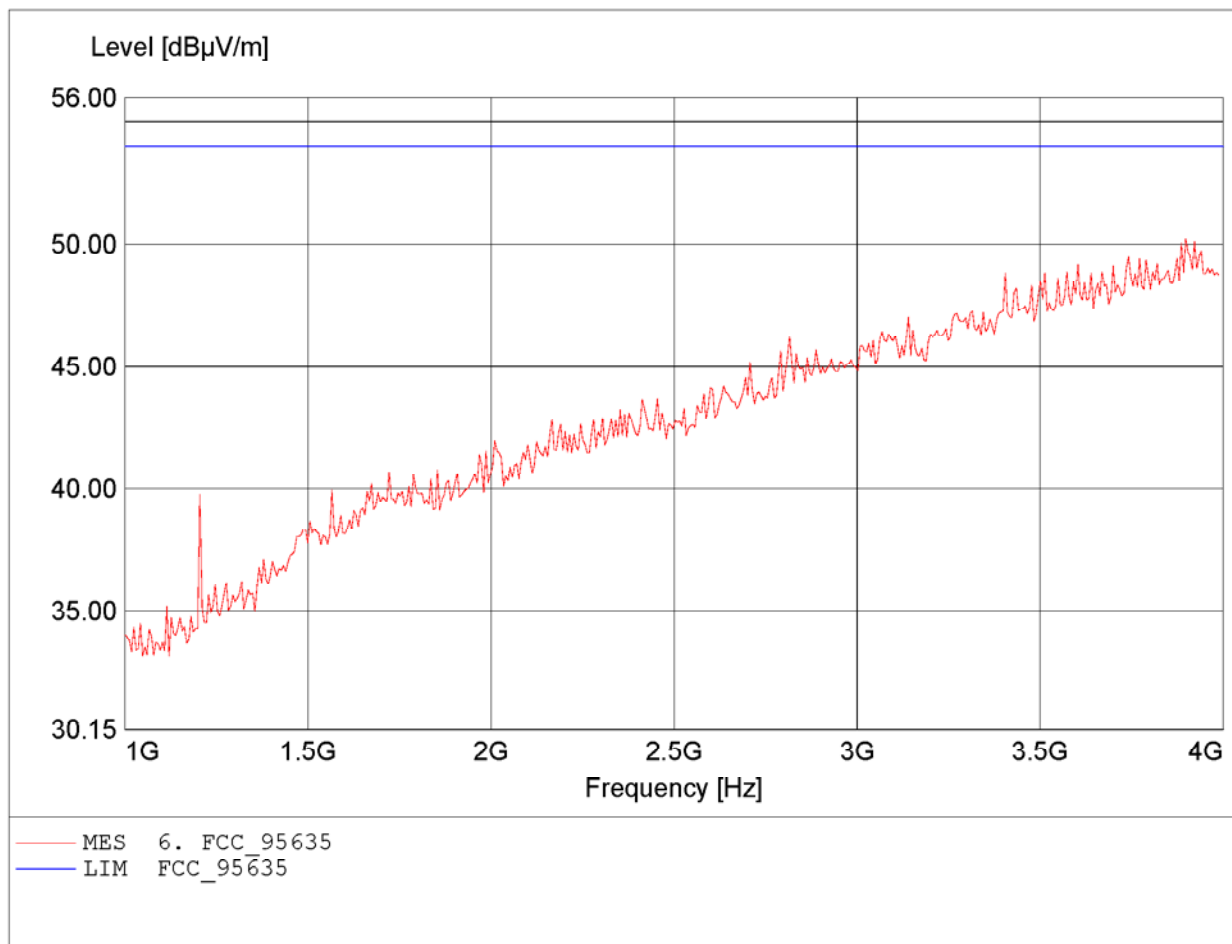


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.872GHz, Emax: 43.68dBµV/m, RBW: 1MHz

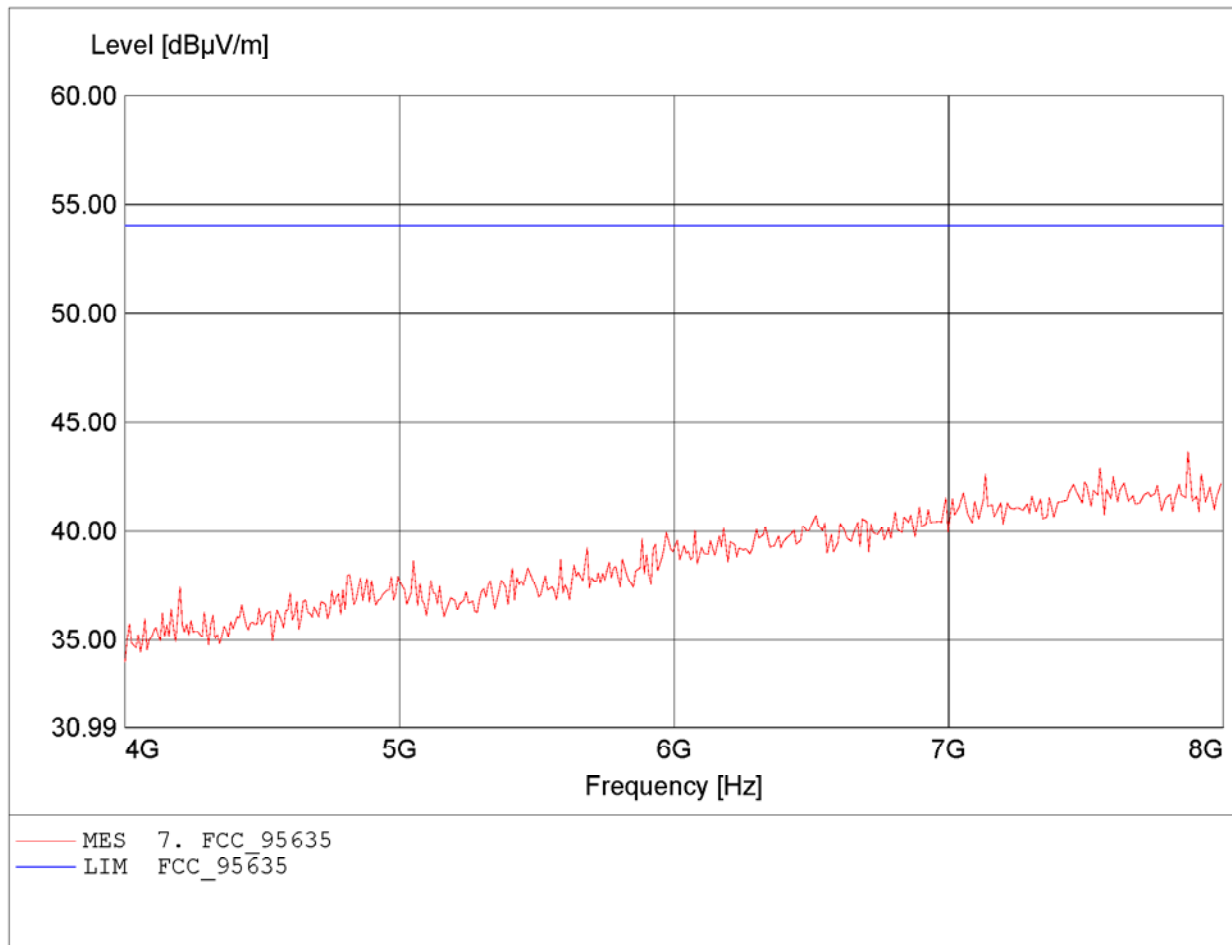


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 402.45 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.952GHz, Emax: 43.25dBµV/m, RBW: 1MHz

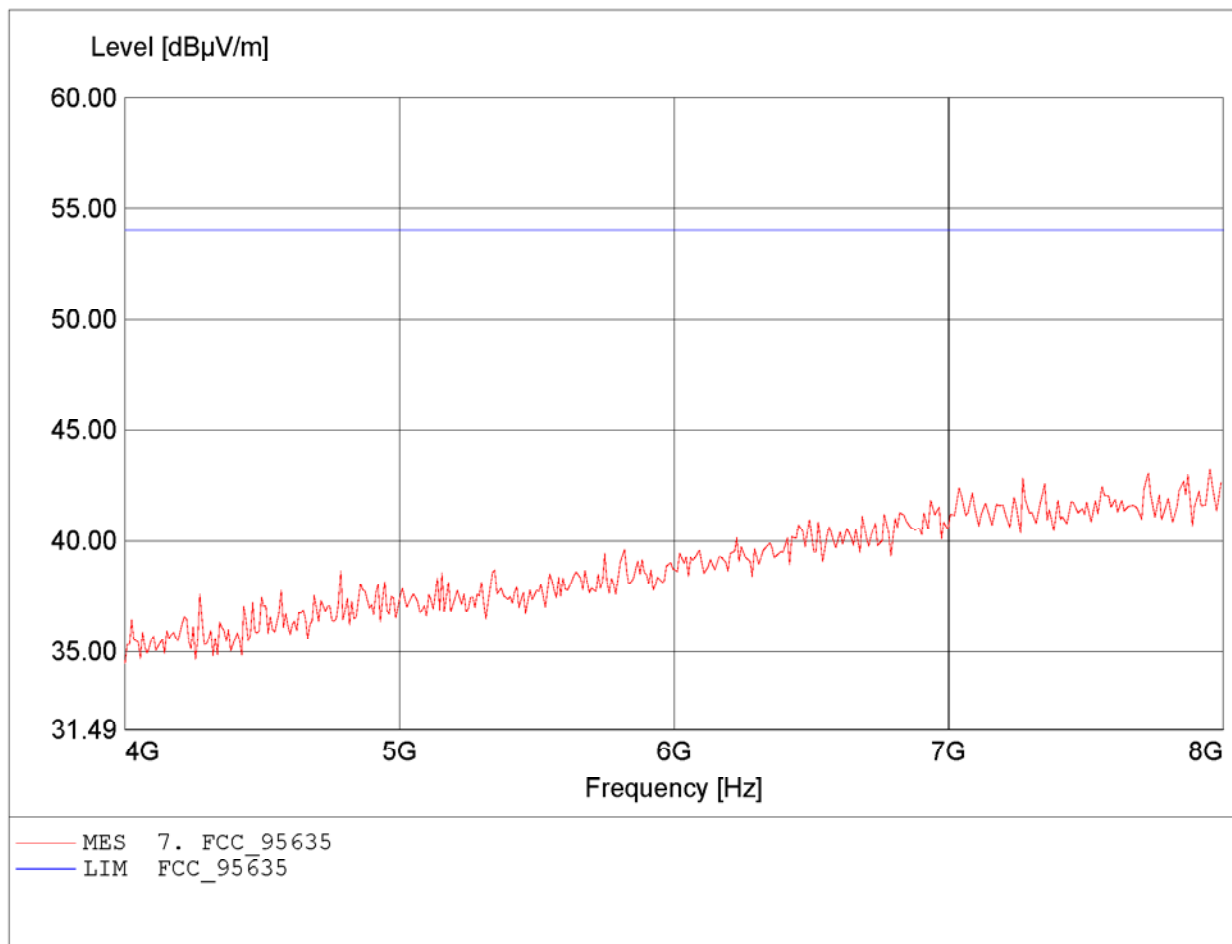


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.549MHz, Emax: 32.40dBµV/m, RBW: 100kHz

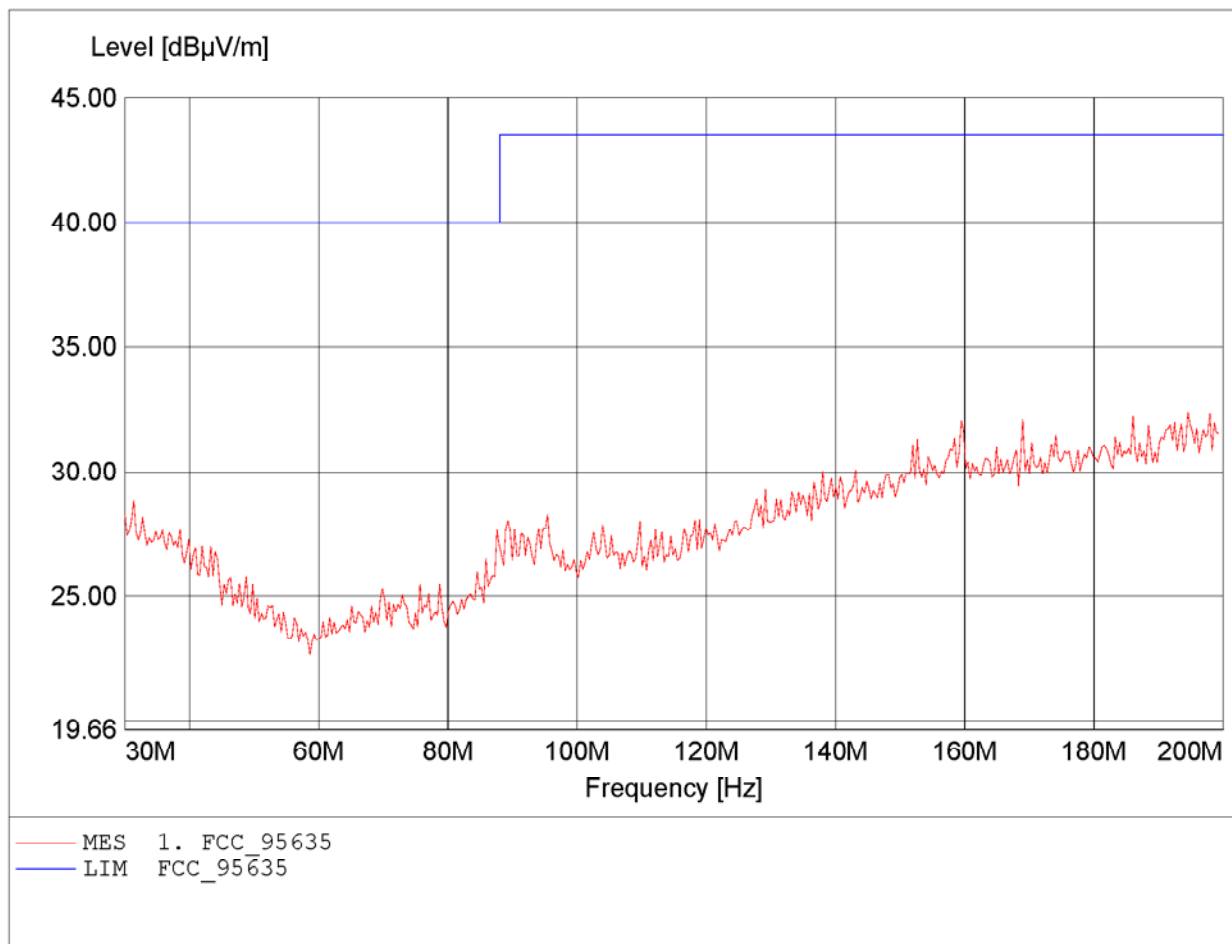


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.120MHz, Emax: 32.21dBµV/m, RBW: 100kHz

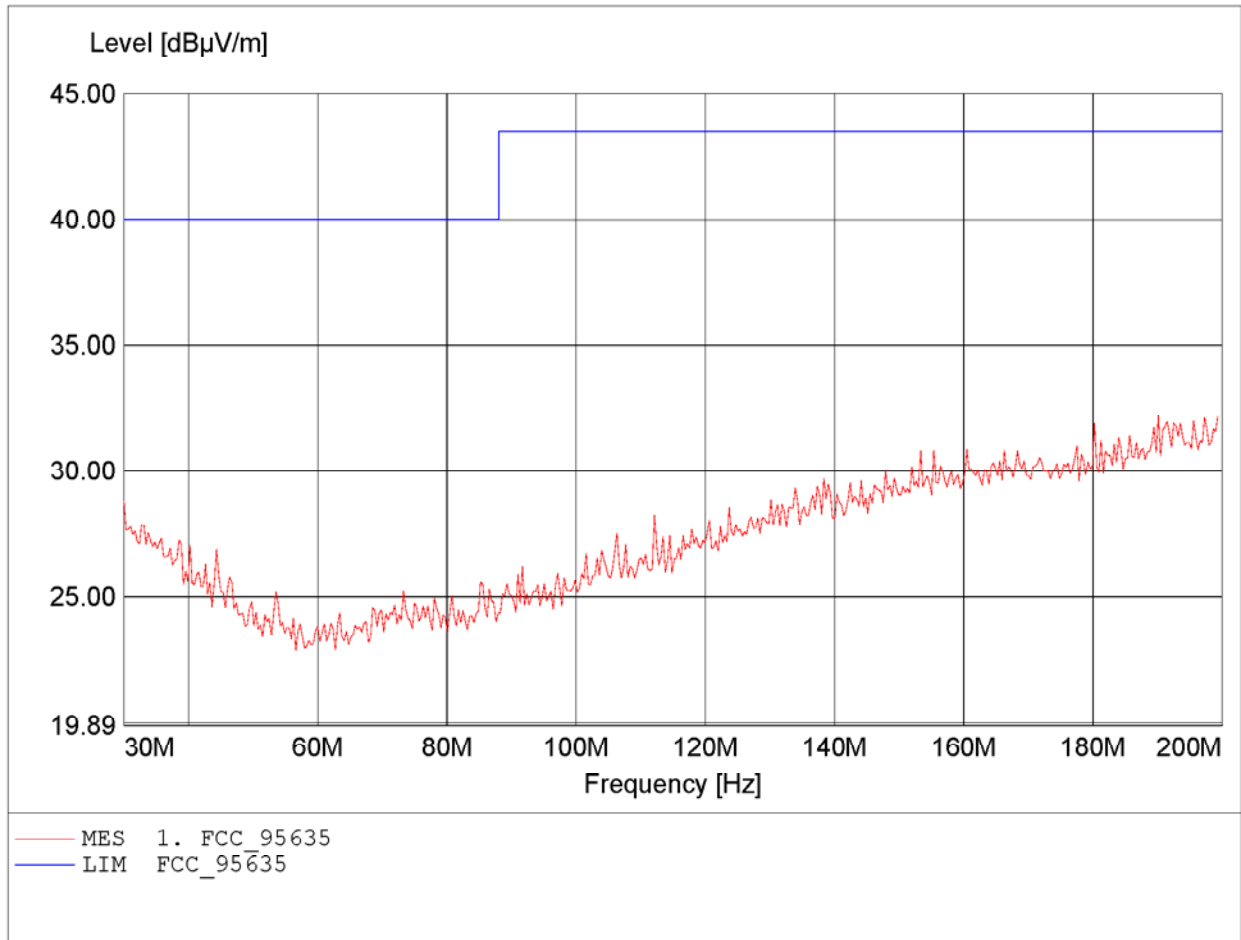


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 286.501MHz, Emax: 12.27dBµV/m, RBW: 100kHz

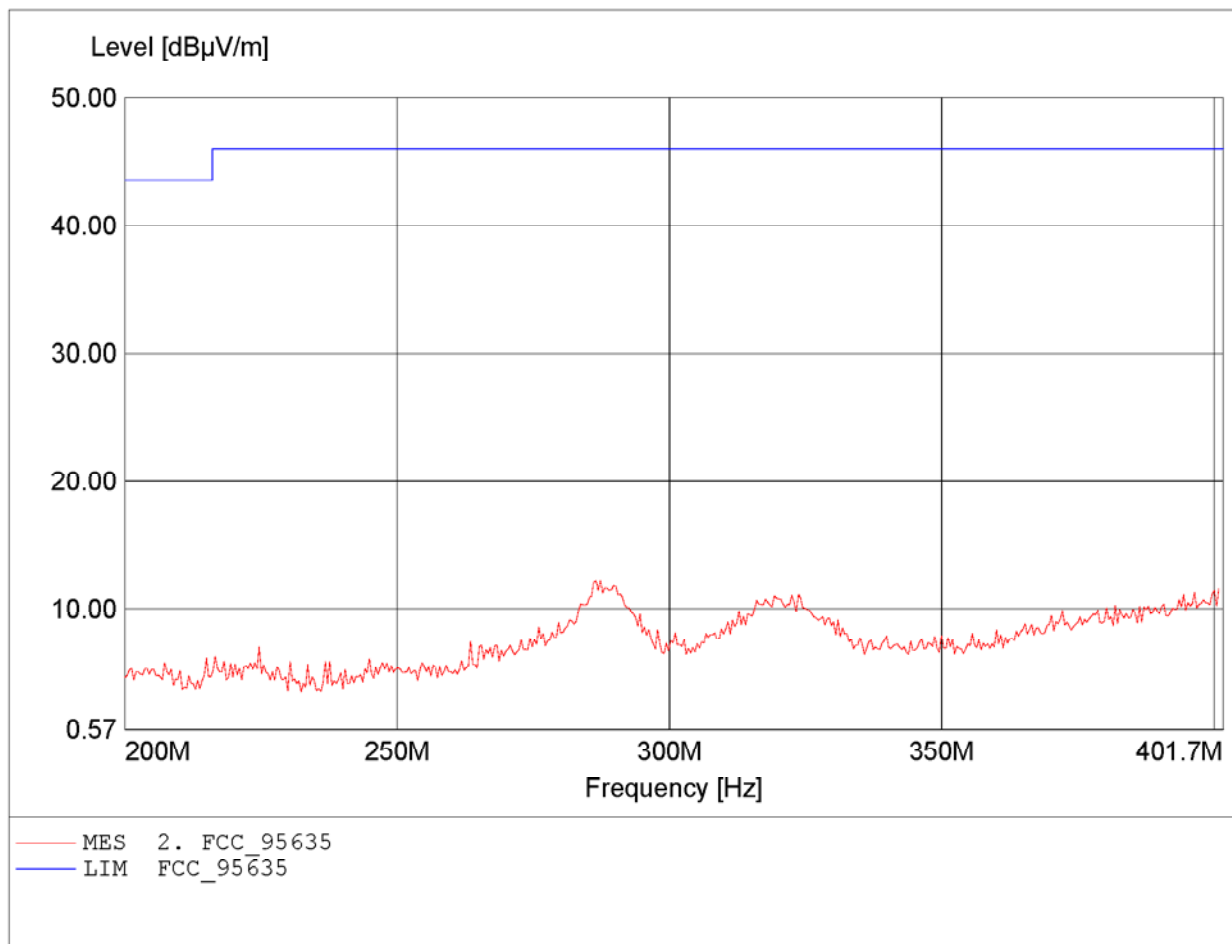


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 385.127MHz, Emax: 12.08dBµV/m, RBW: 100kHz

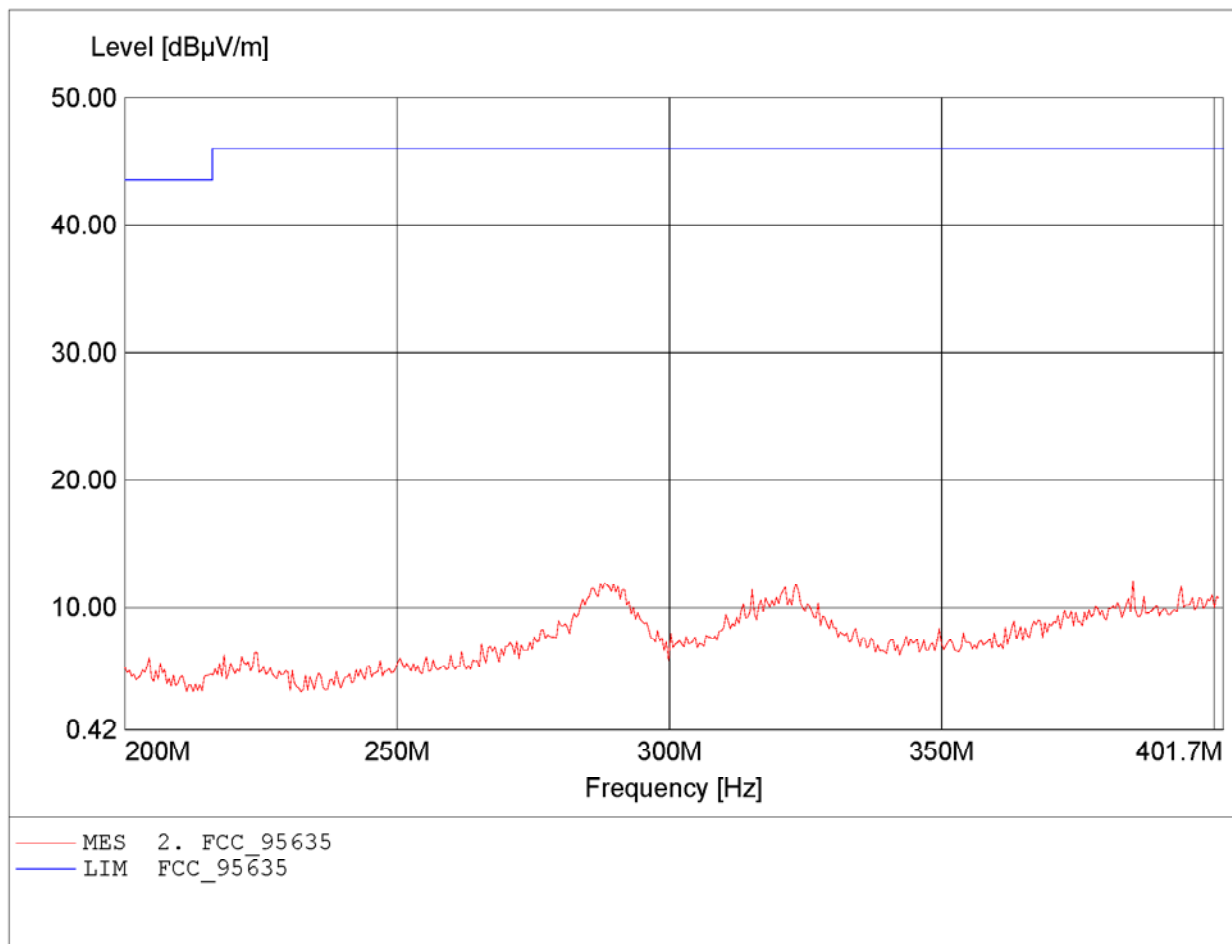


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 404.682MHz, Emax: 25.71dBµV/m, RBW: 3kHz

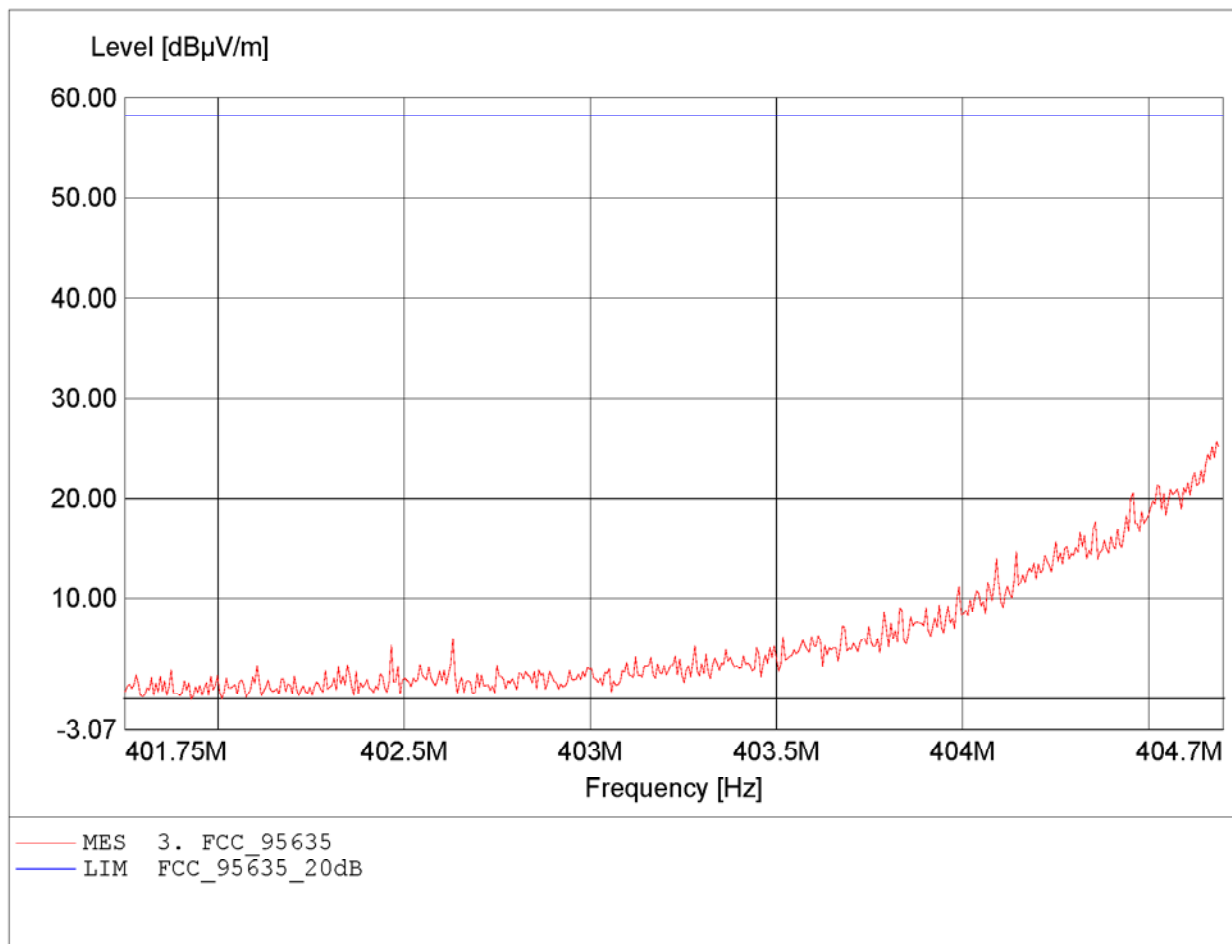


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 404.688MHz, Emax: 18.86dBµV/m, RBW: 3kHz

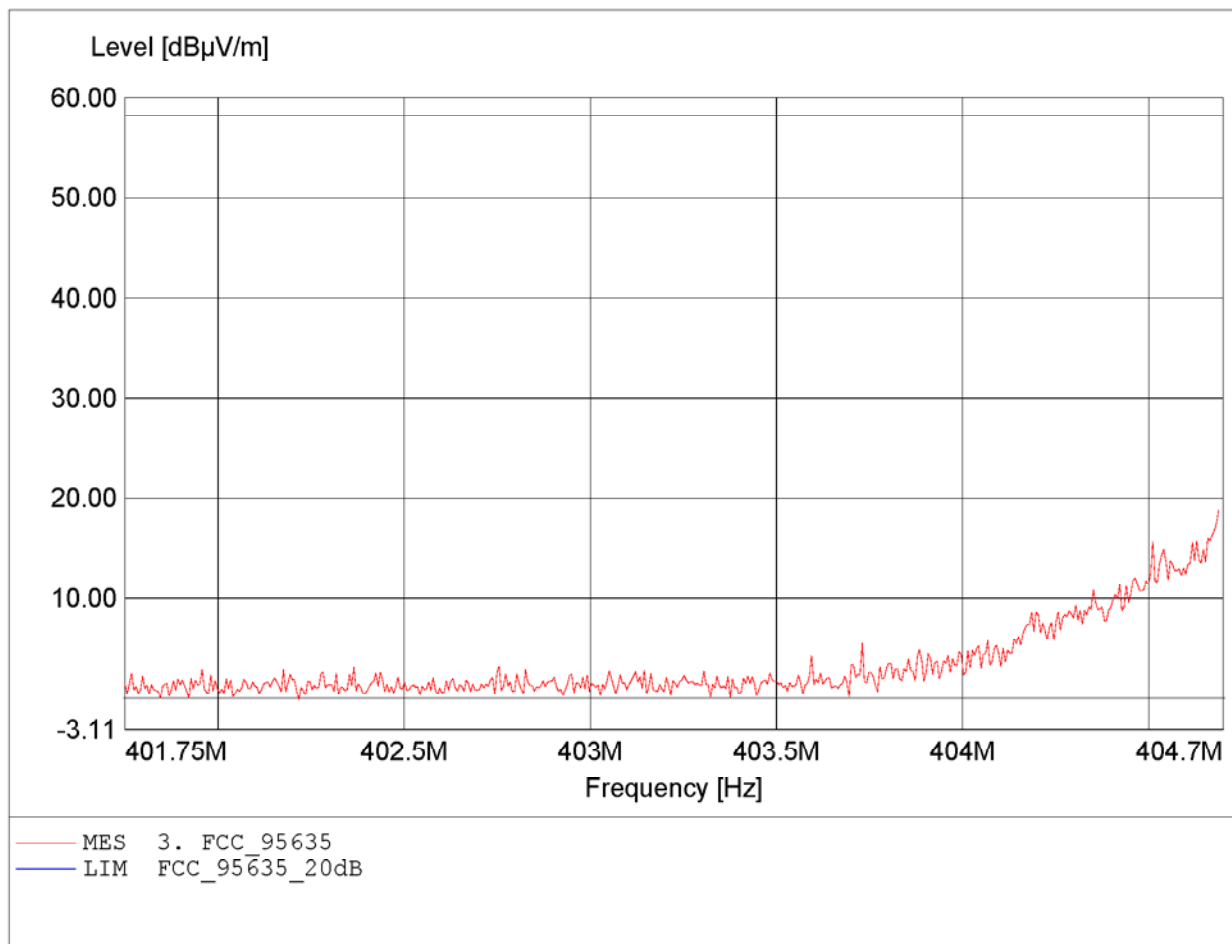


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 405.002MHz, Emax: 27.55dBµV/m, RBW: 3kHz

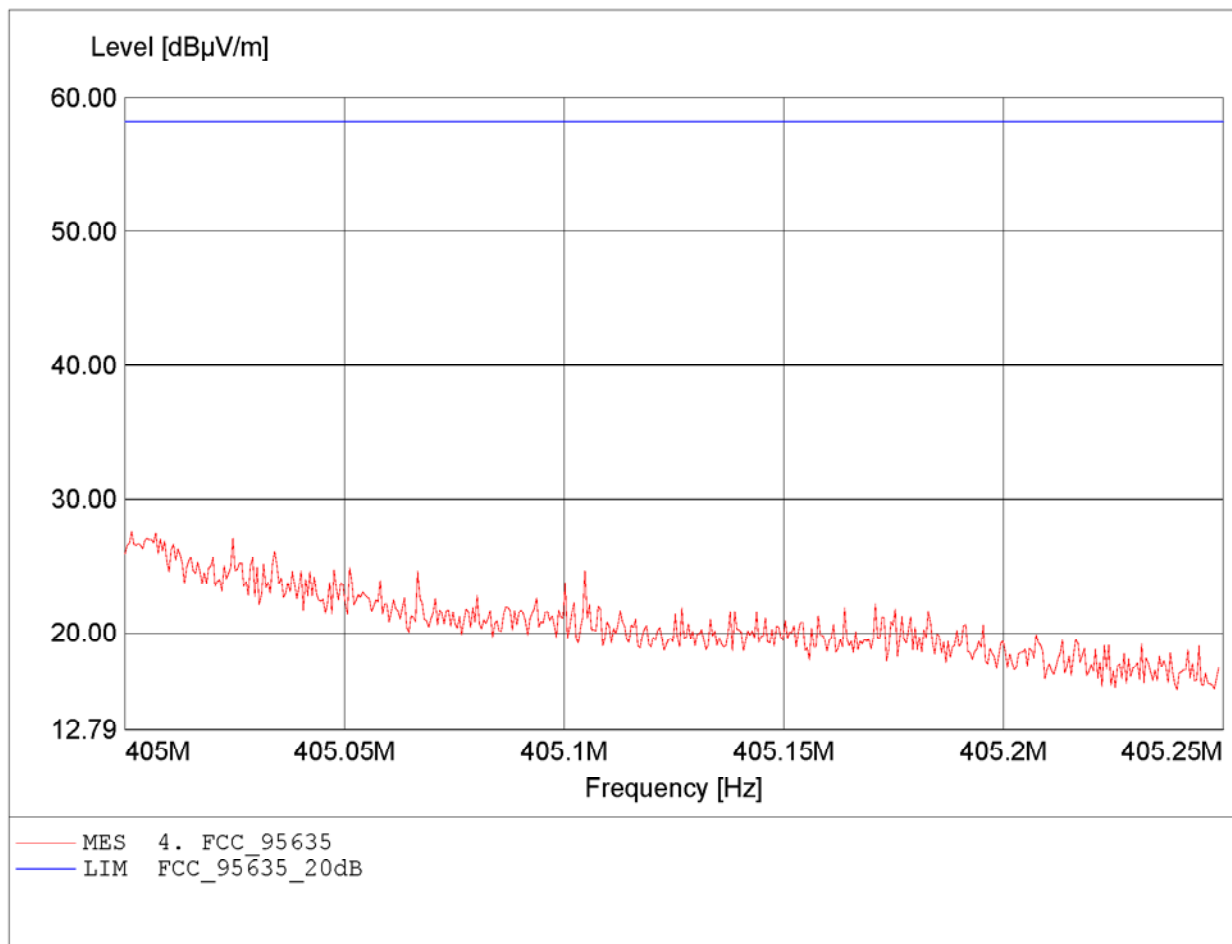


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 405.006MHz, Emax: 22.85dBµV/m, RBW: 3kHz

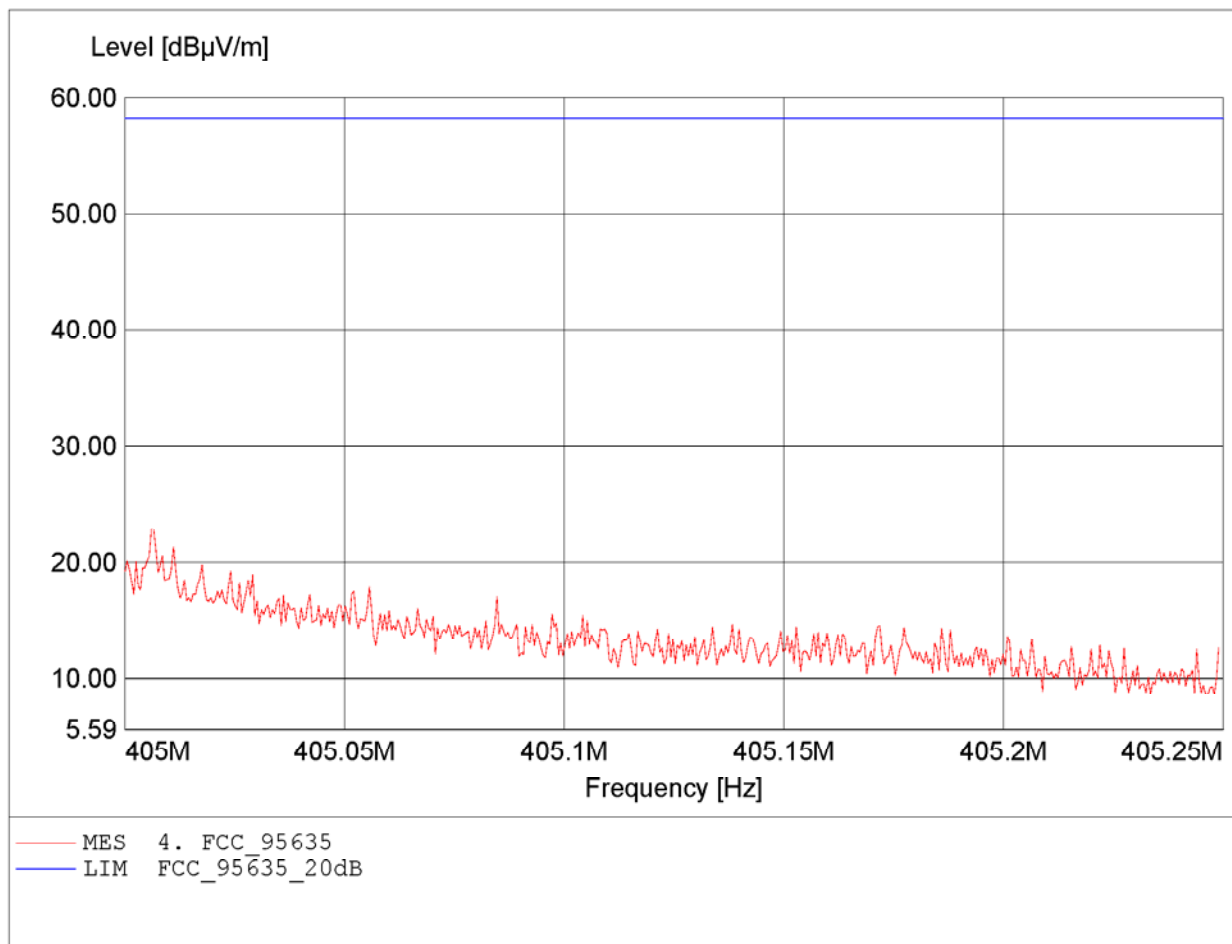


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 810.490MHz, Emax: 36.60dBµV/m, RBW: 100kHz

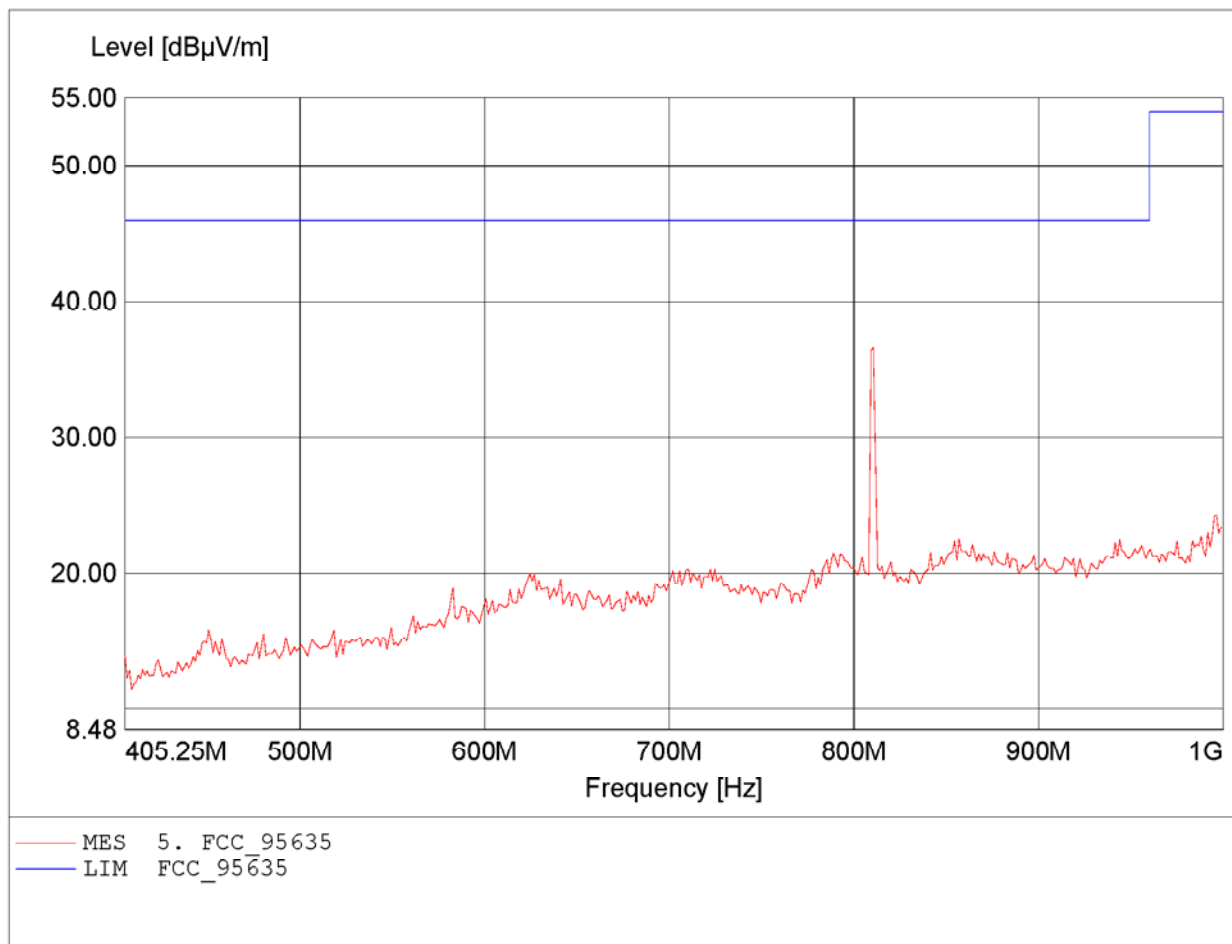


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 809.299MHz, Emax: 33.95dBµV/m, RBW: 100kHz

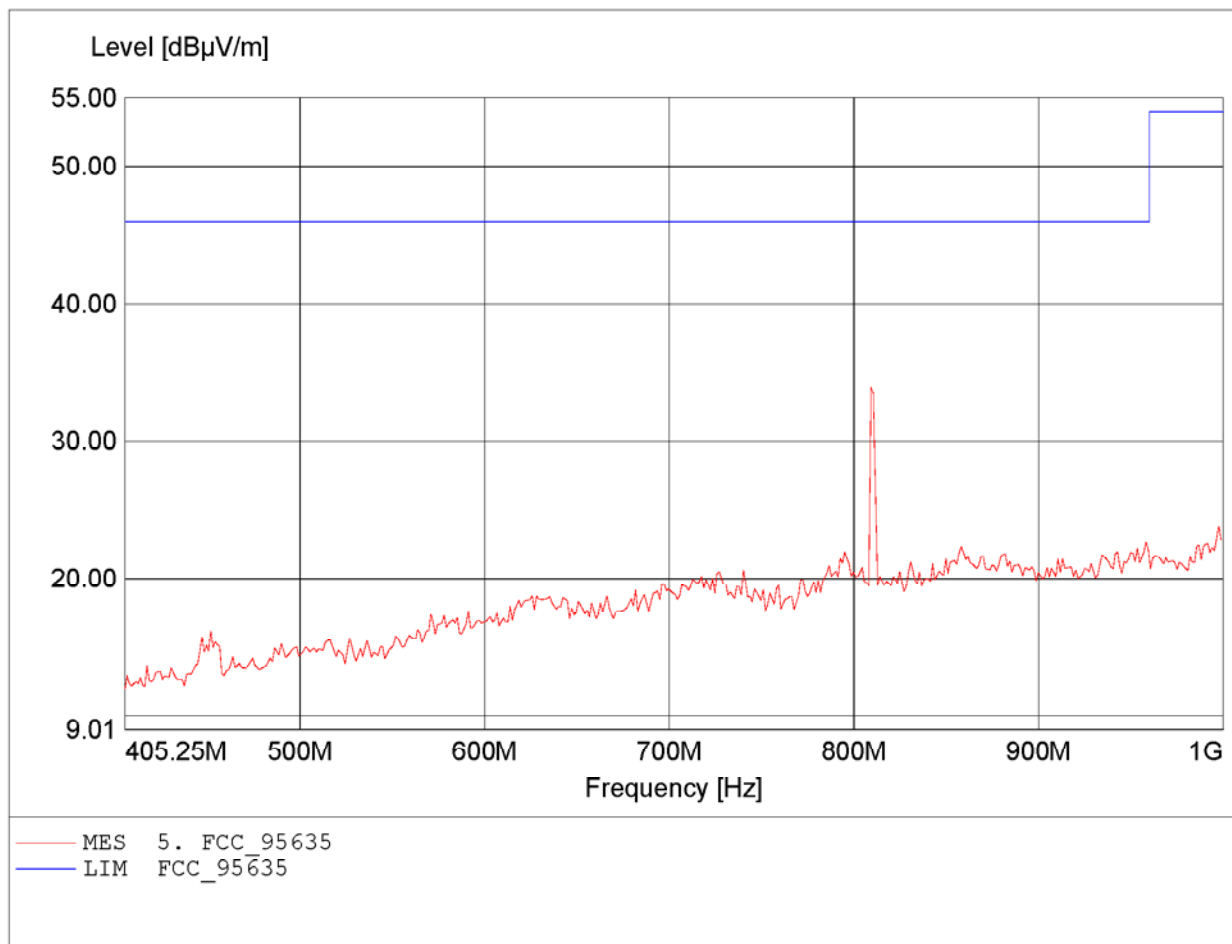


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.982GHz, Emax: 50.02dBμV/m, RBW: 100kHz

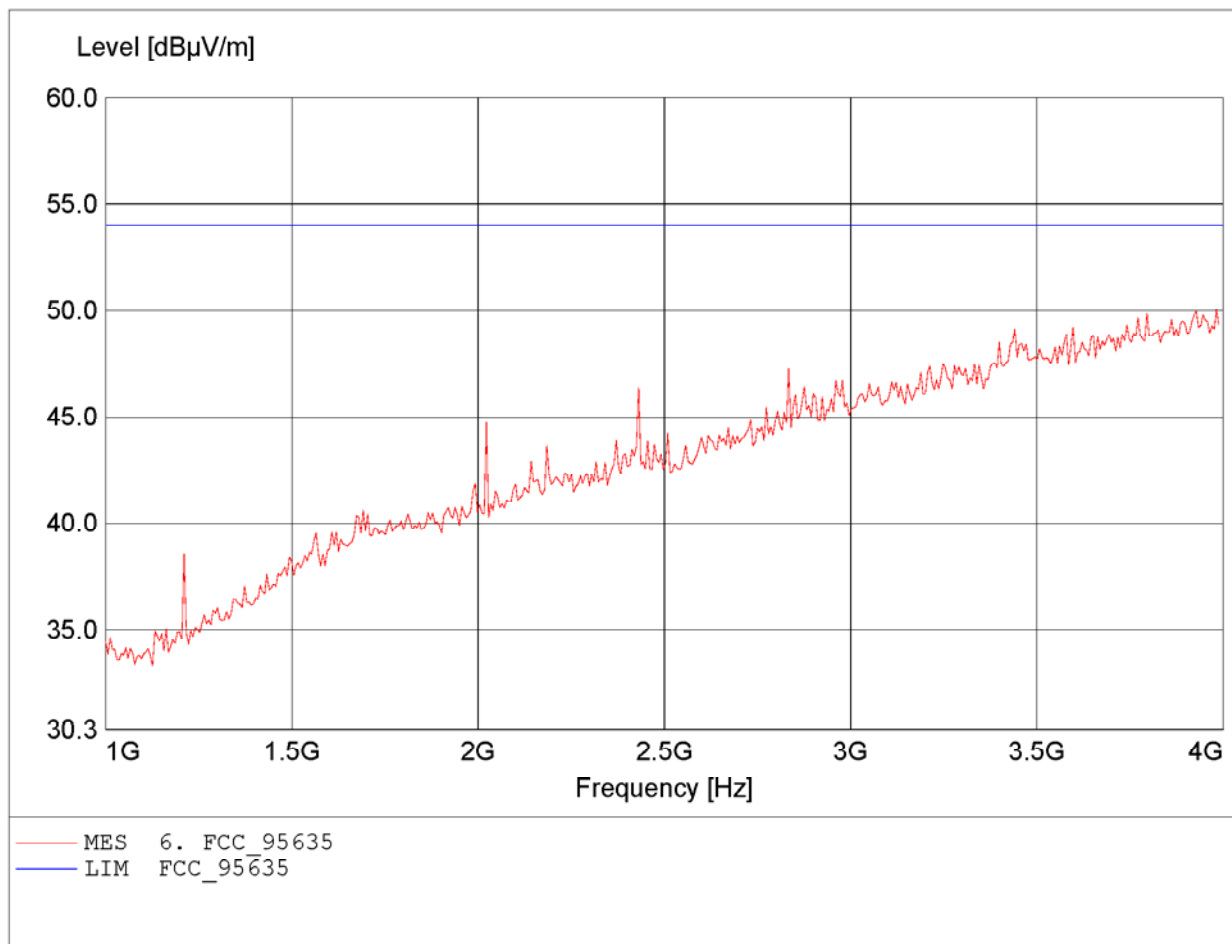


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.729GHz, Emax: 50.11dBµV/m, RBW: 100kHz

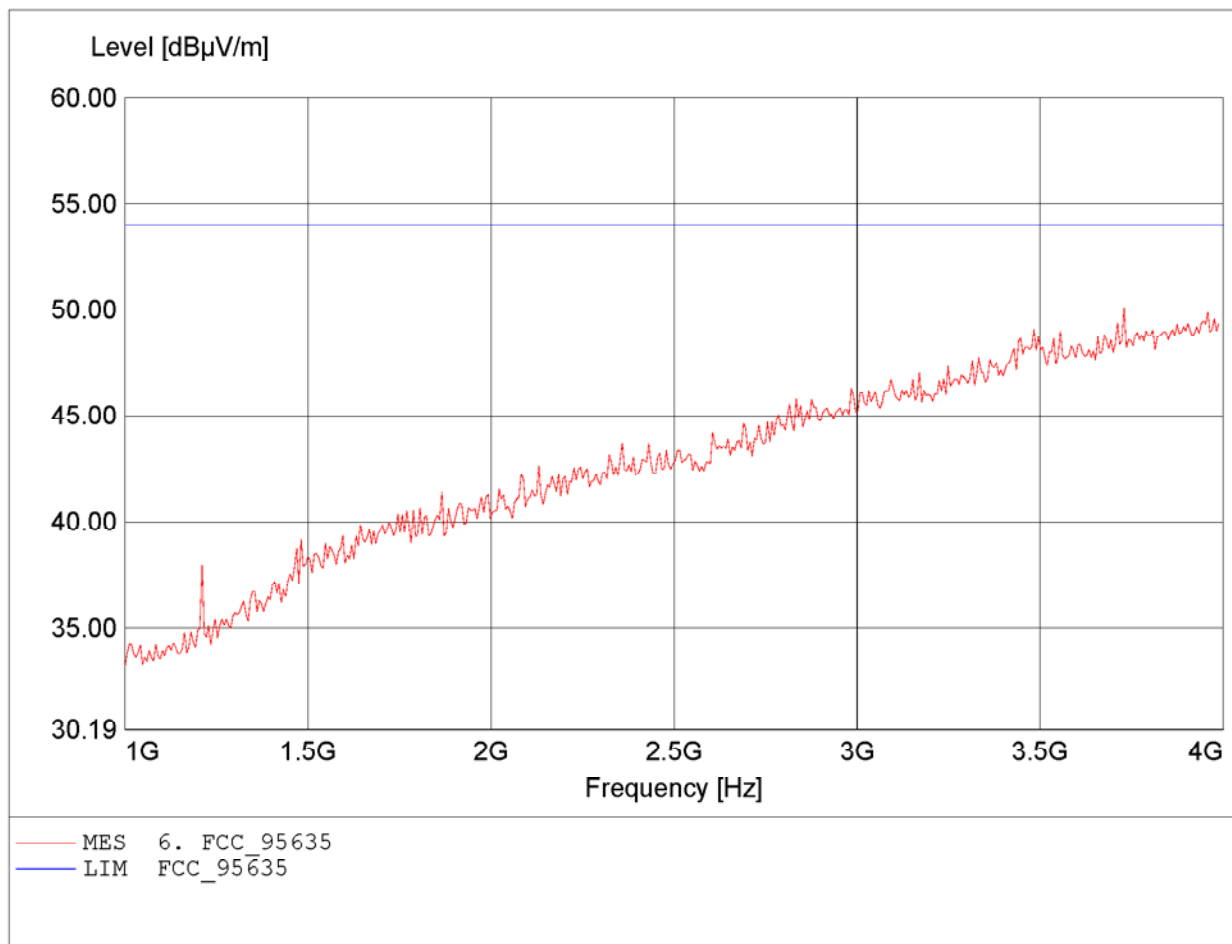


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.856GHz, Emax: 43.56dBµV/m, RBW: 1MHz

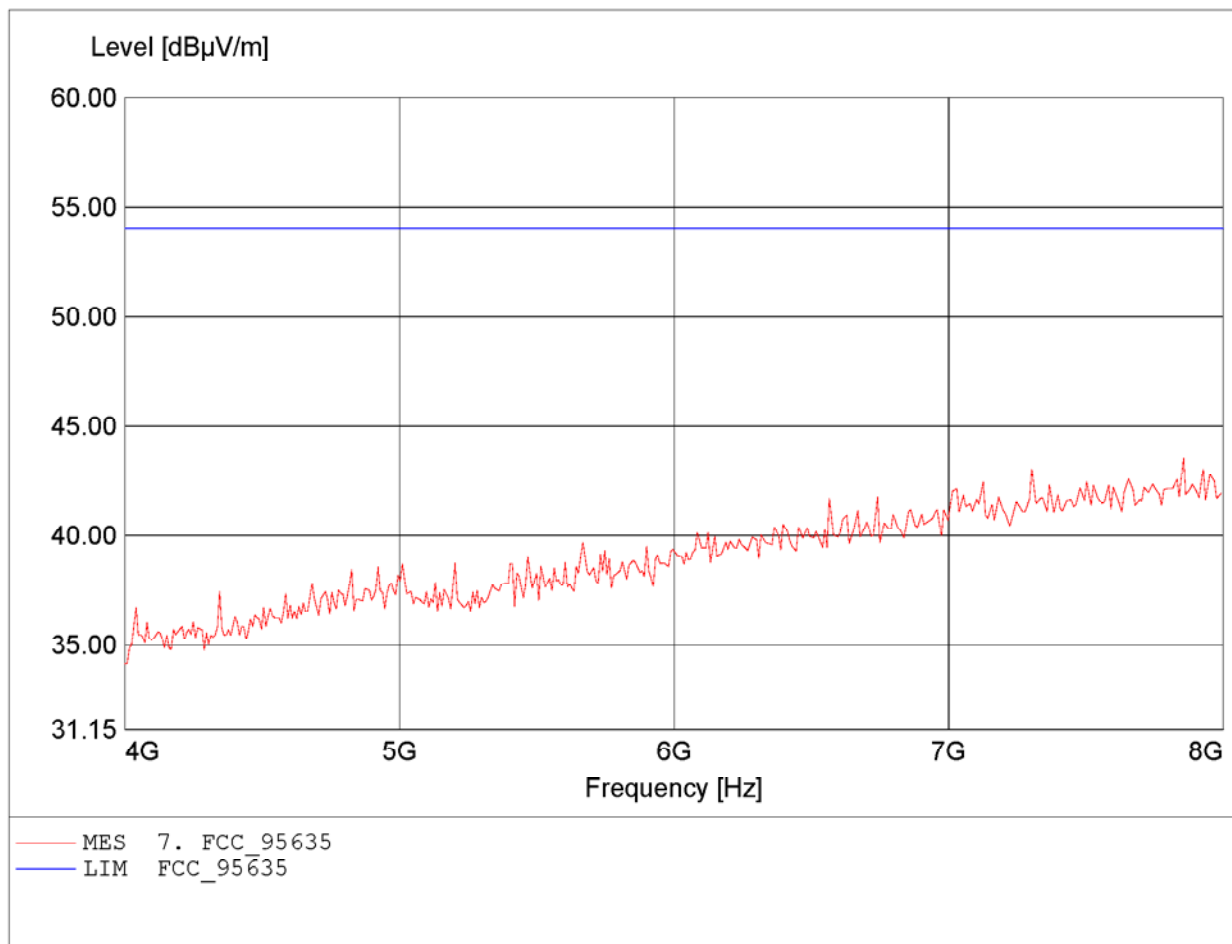


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24
Order-No.: GOM20712-0342 / Frequency: 404.85 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.760GHz, Emax: 43.38dBµV/m, RBW: 1MHz

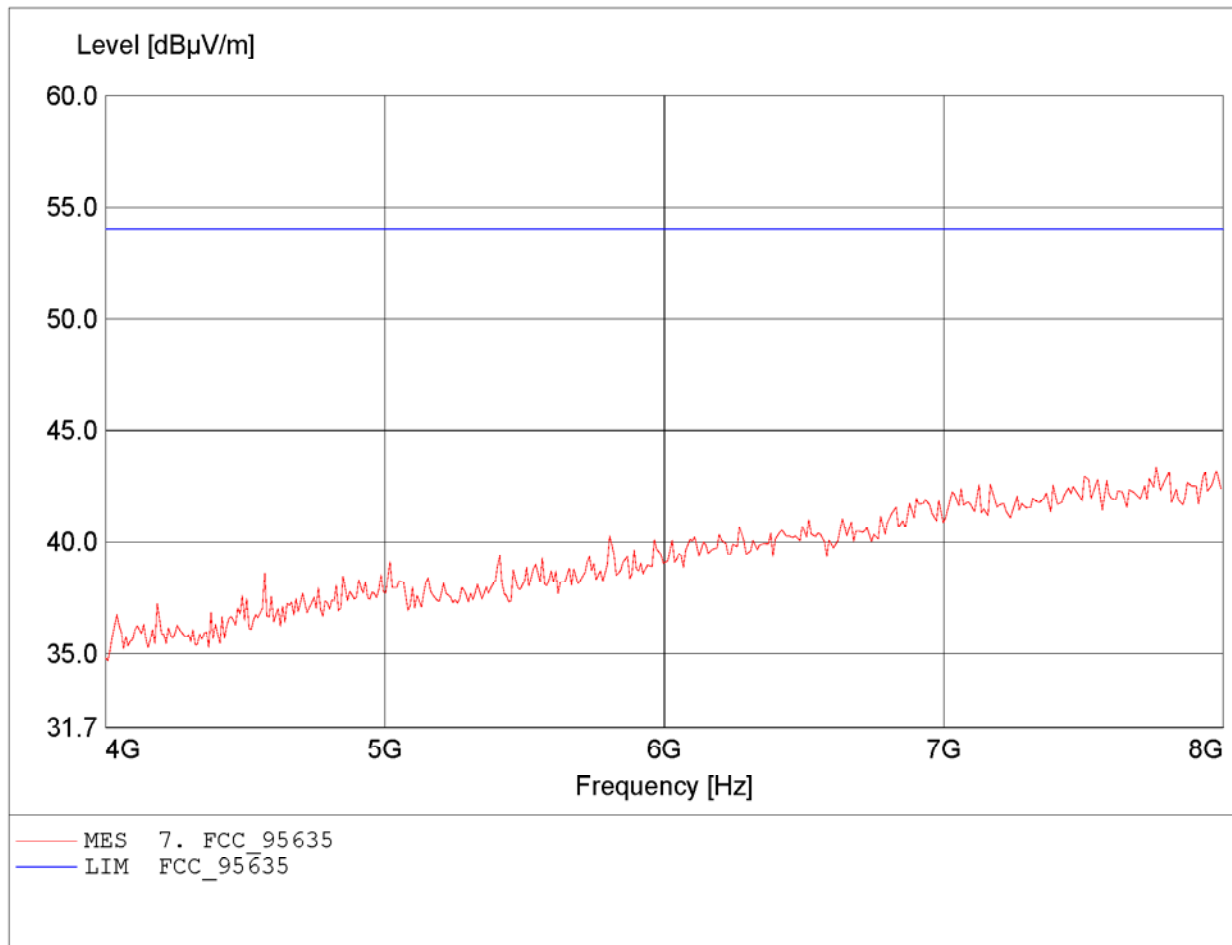


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.650MHz, Emax: 79.11dBuV/m, RBW: 100kHz

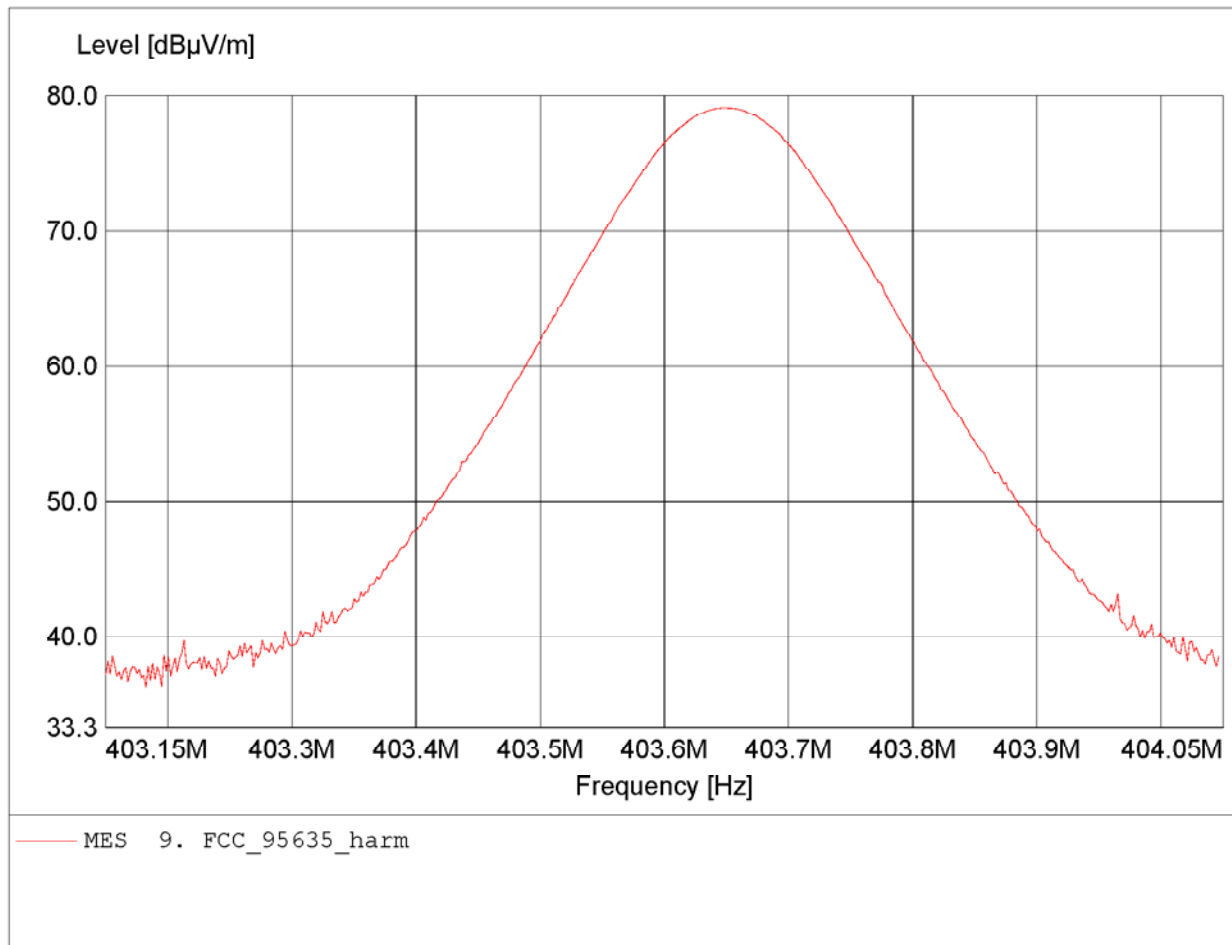


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.142MHz, Emax: 32.47dBµV/m, RBW: 100kHz

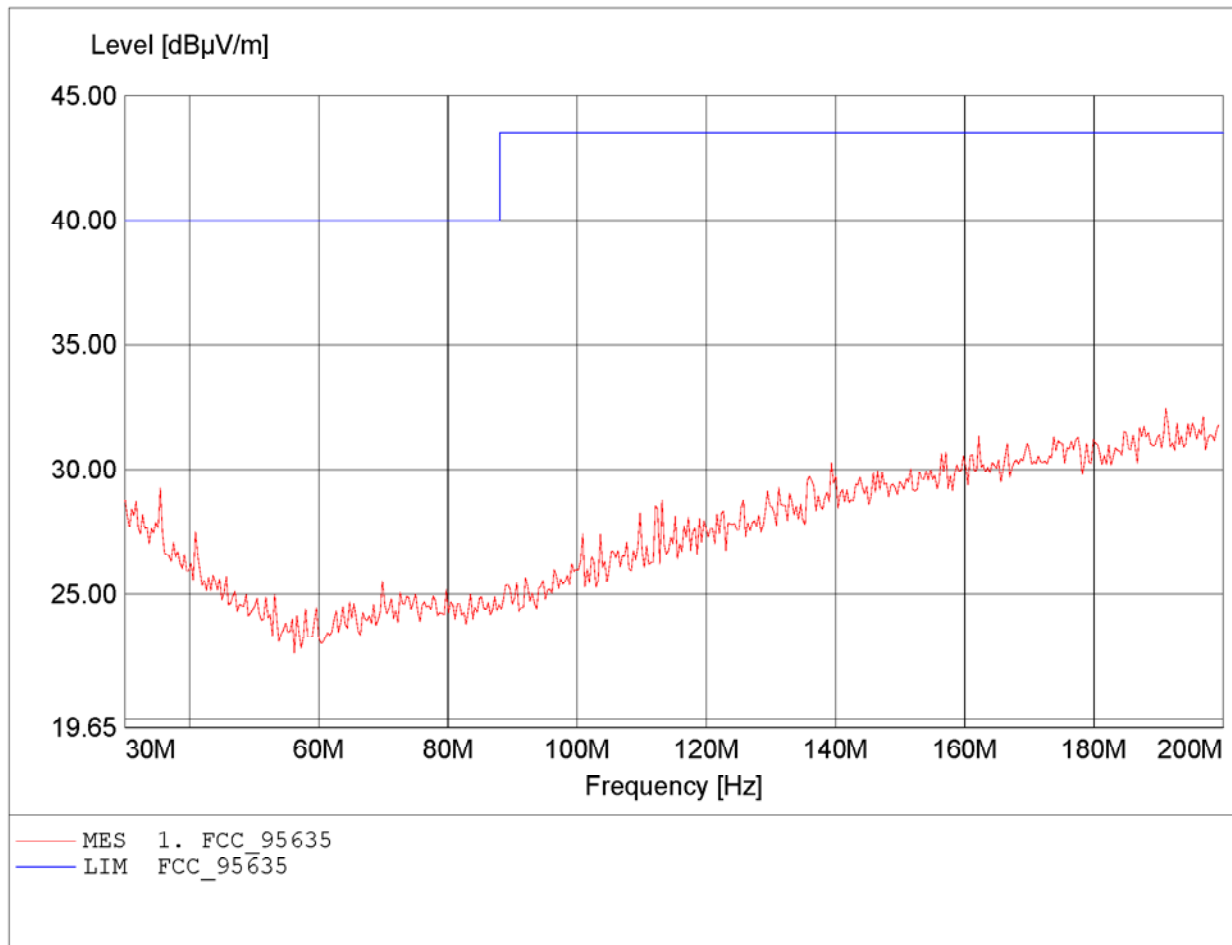


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 32.40dBµV/m, RBW: 100kHz

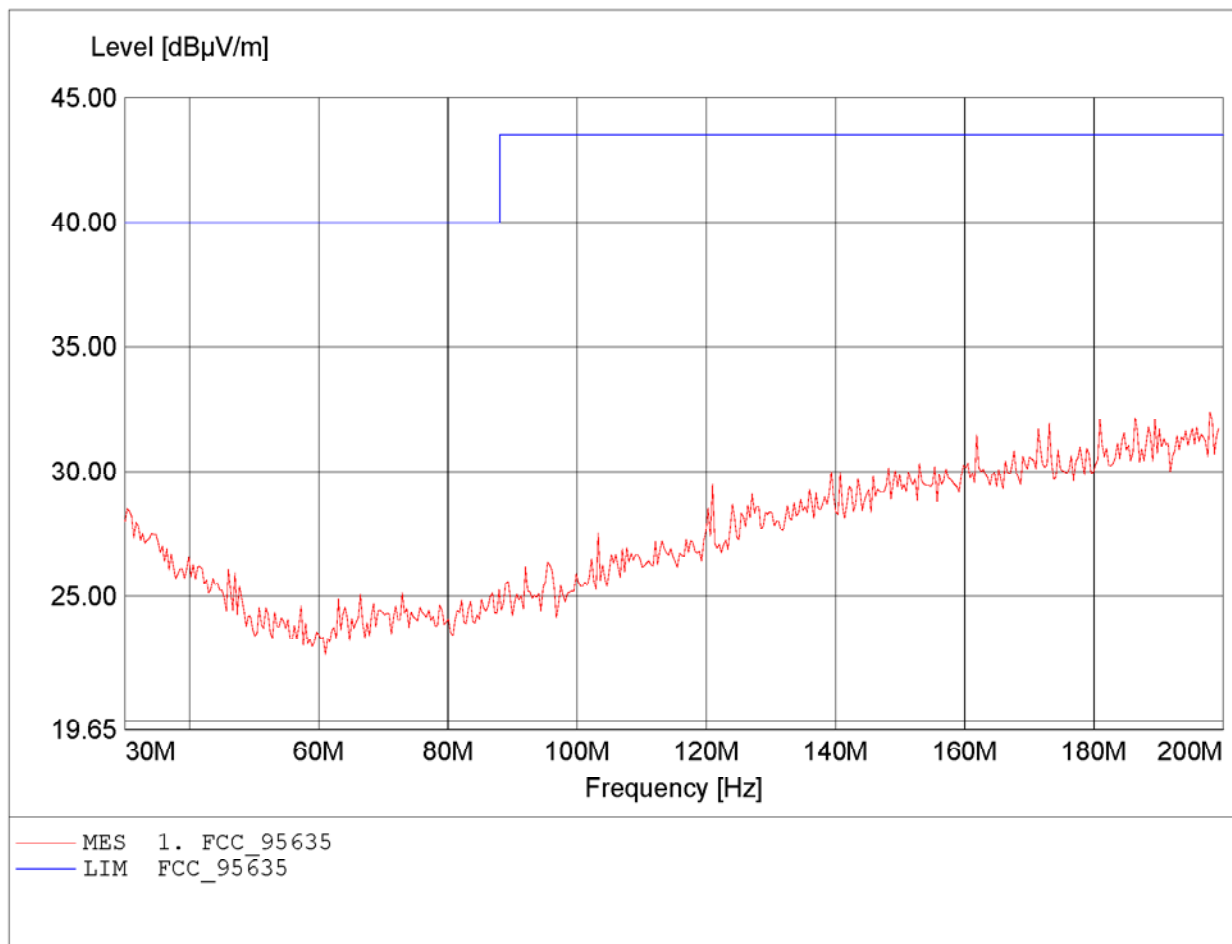


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 200.000MHz, Emax: 15.54dBµV/m, RBW: 100kHz

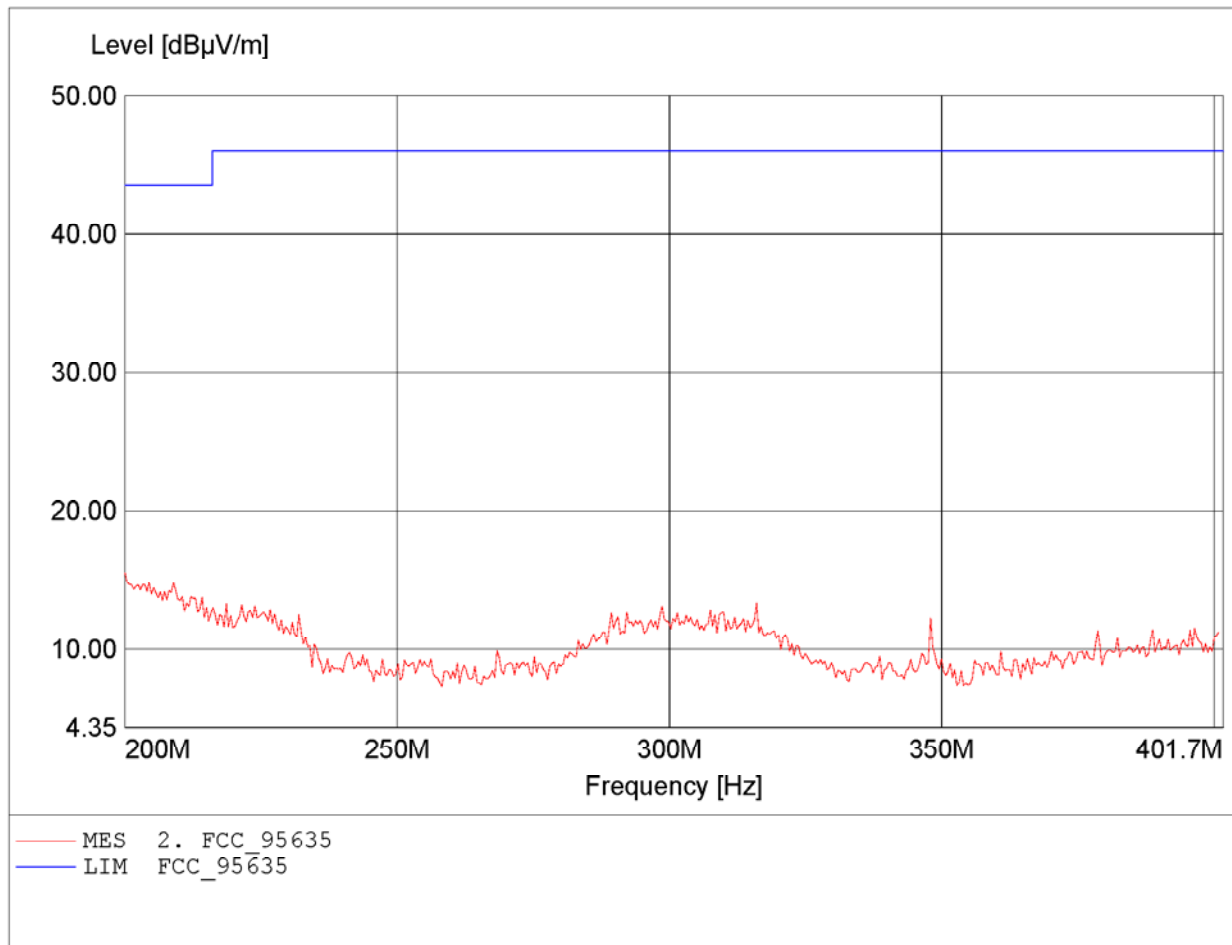


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 202.021MHz, Emax: 16.08dBµV/m, RBW: 100kHz

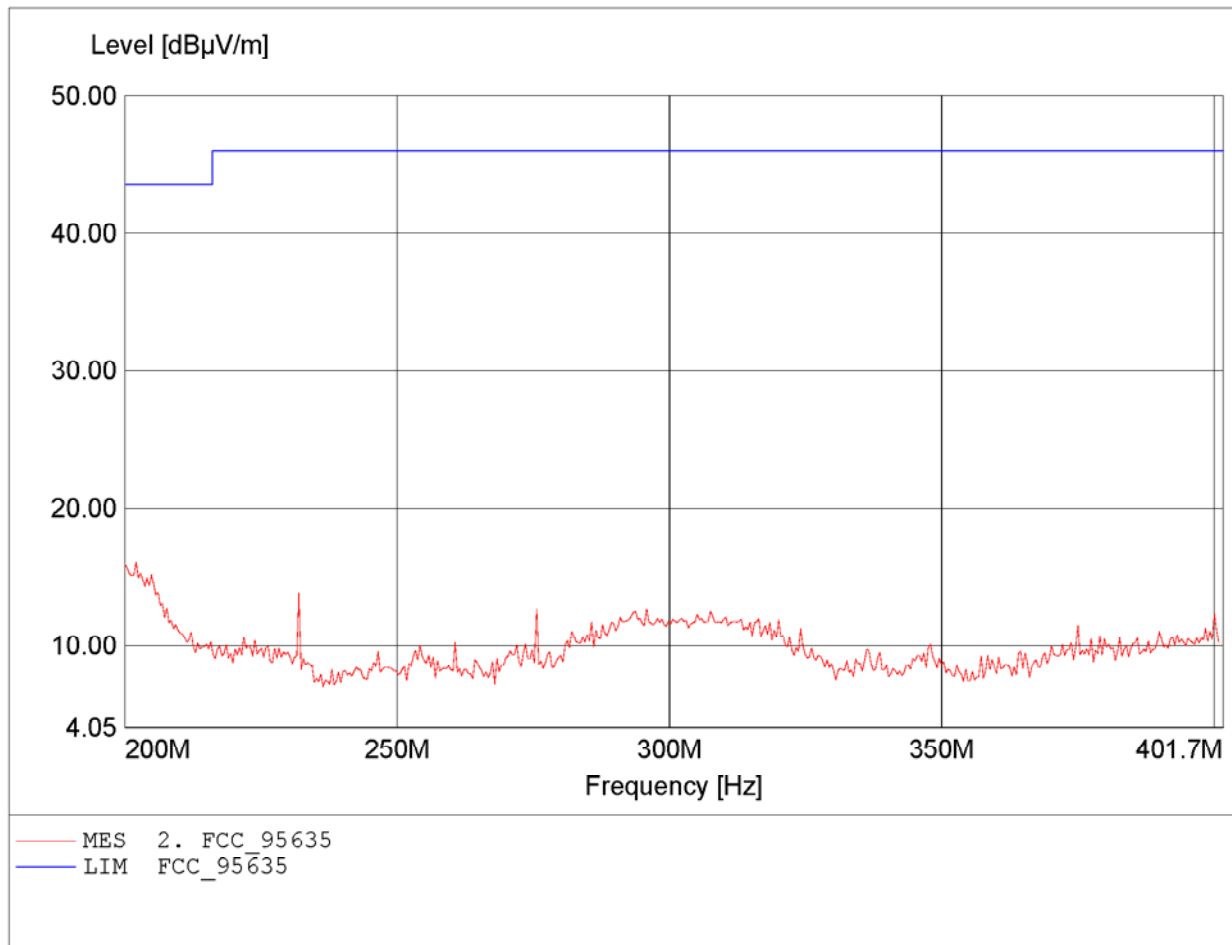


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.479MHz, Emax: 19.42dBµV/m, RBW: 3kHz

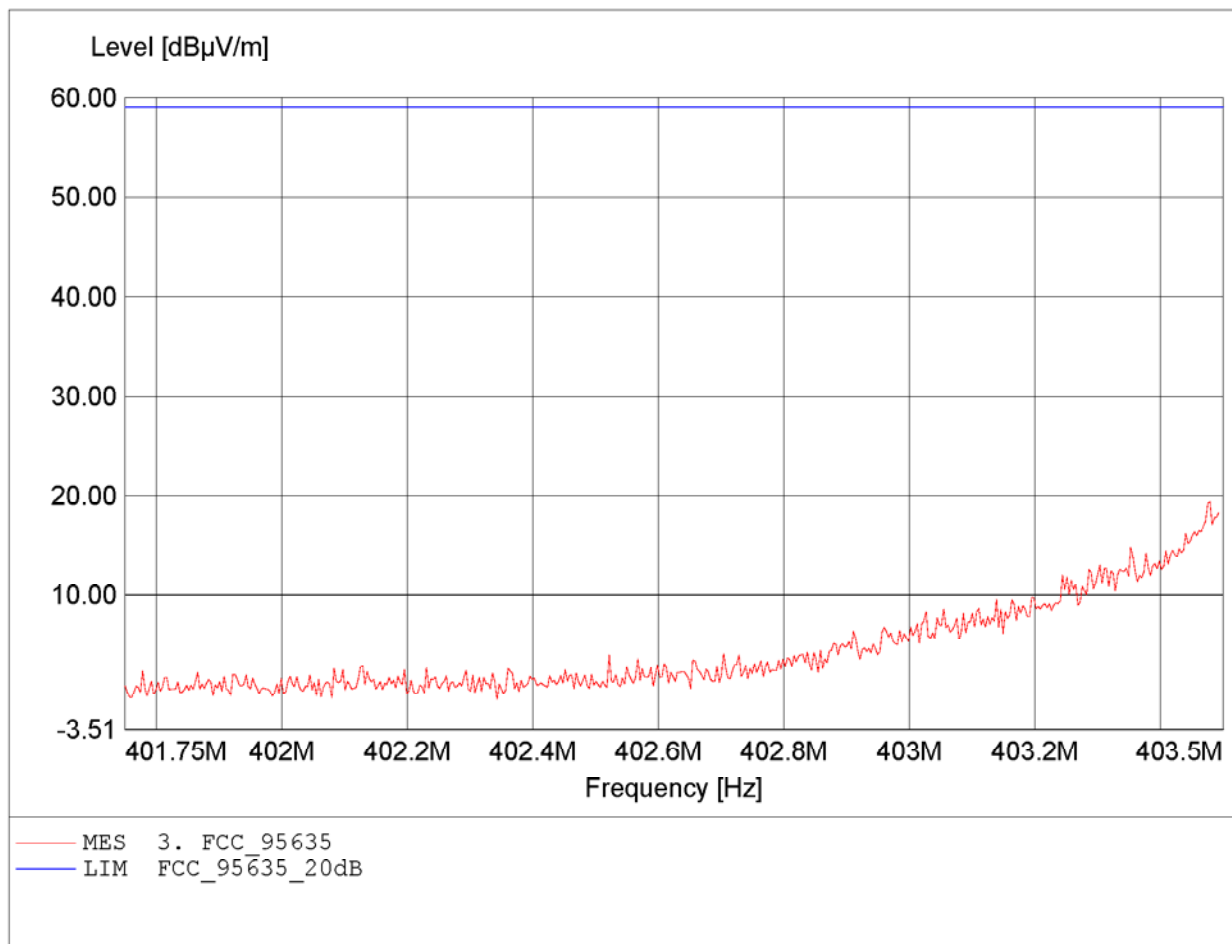


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.493MHz, Emax: 28.73dBµV/m, RBW: 3kHz

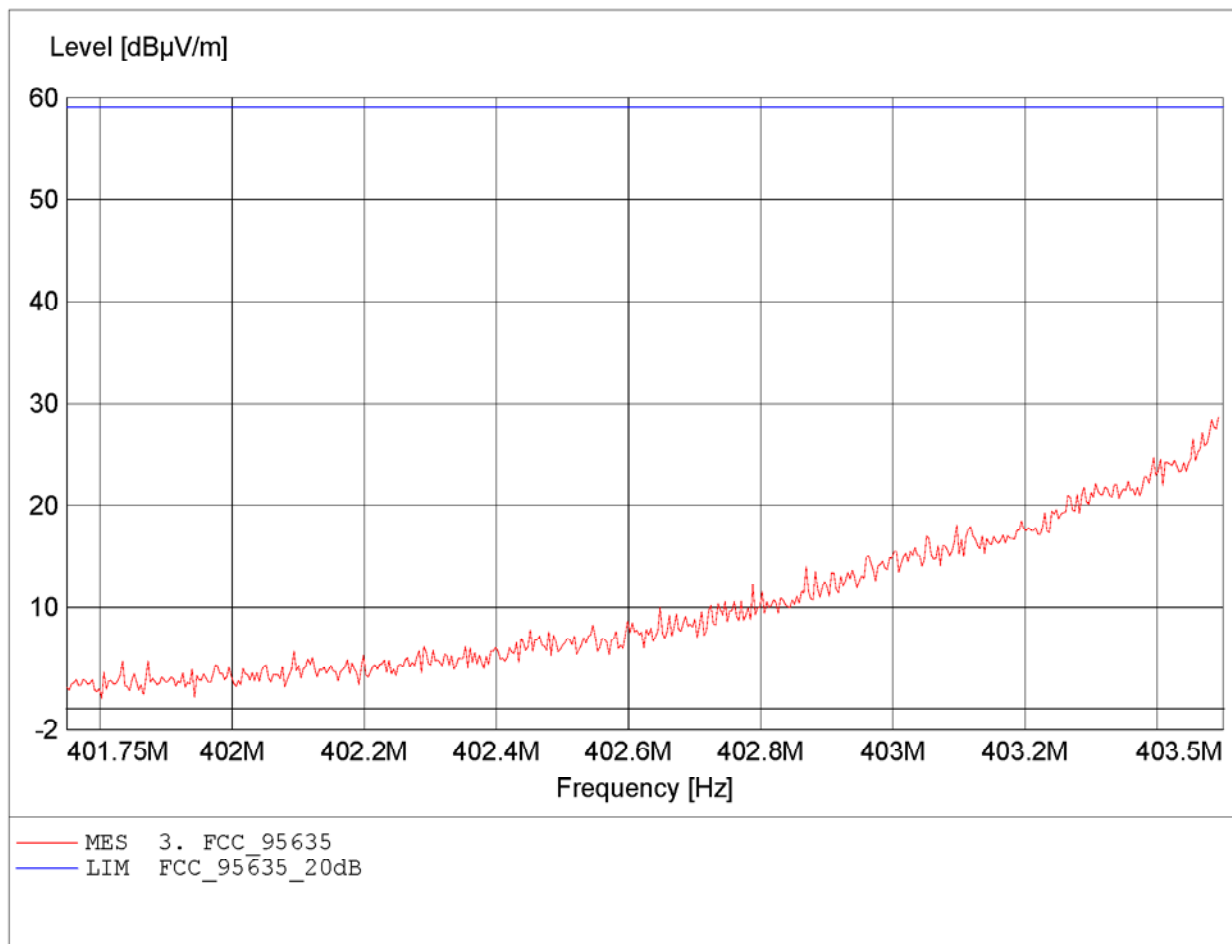


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.809MHz, Emax: 21.44dBµV/m, RBW: 3kHz

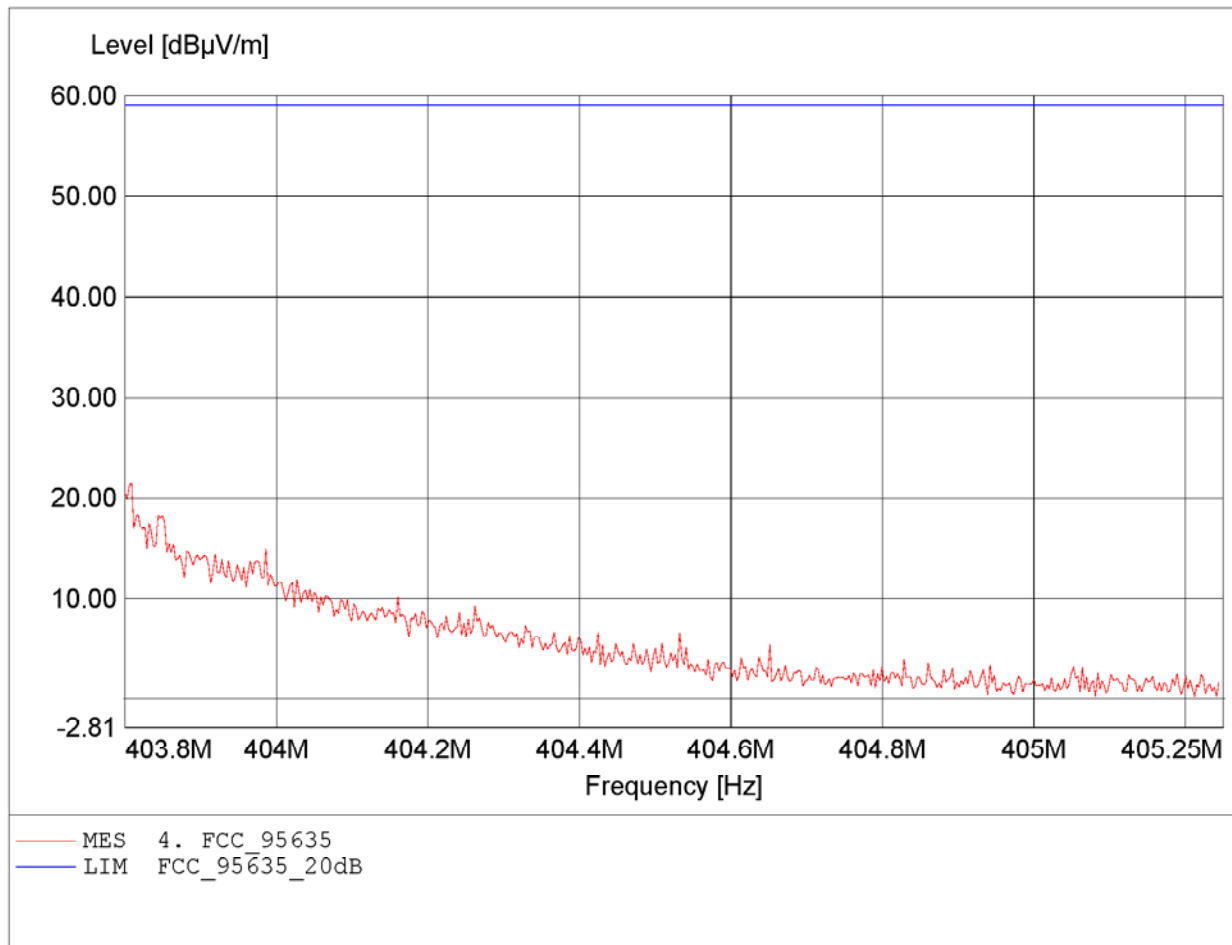


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.803MHz, Emax: 30.15dBµV/m, RBW: 3kHz

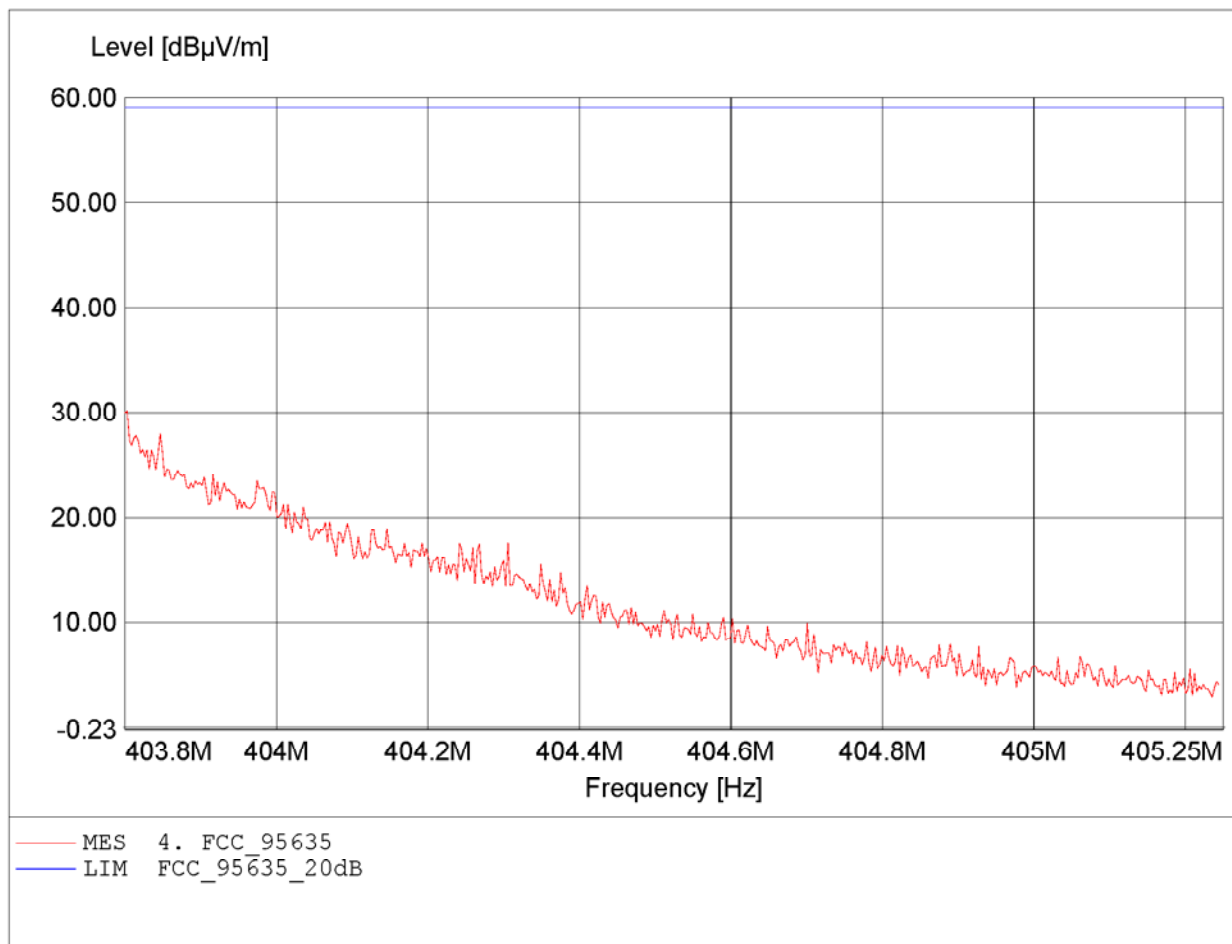


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 806.915MHz, Emax: 39.13dBµV/m, RBW: 100kHz

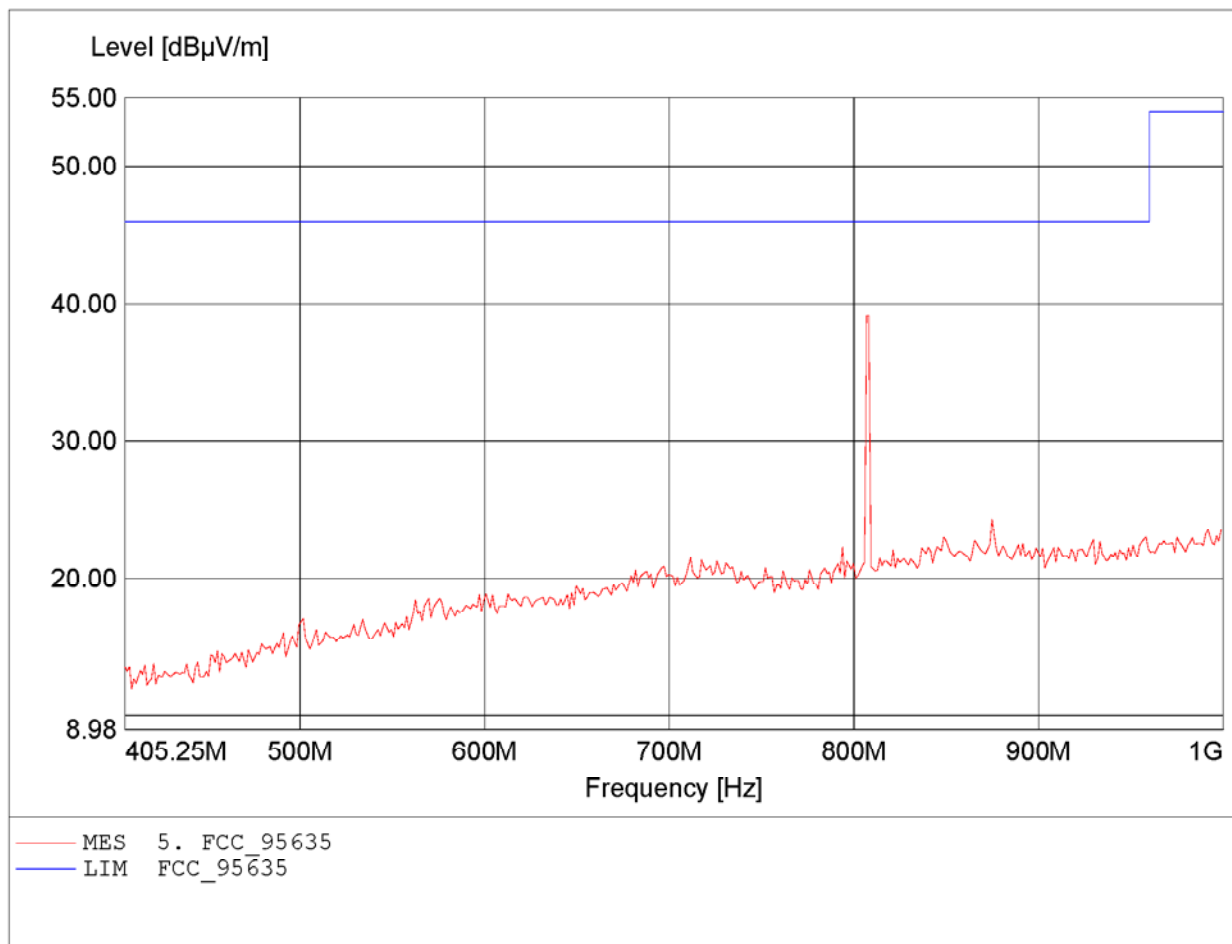


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 38.29dBµV/m, RBW: 100kHz

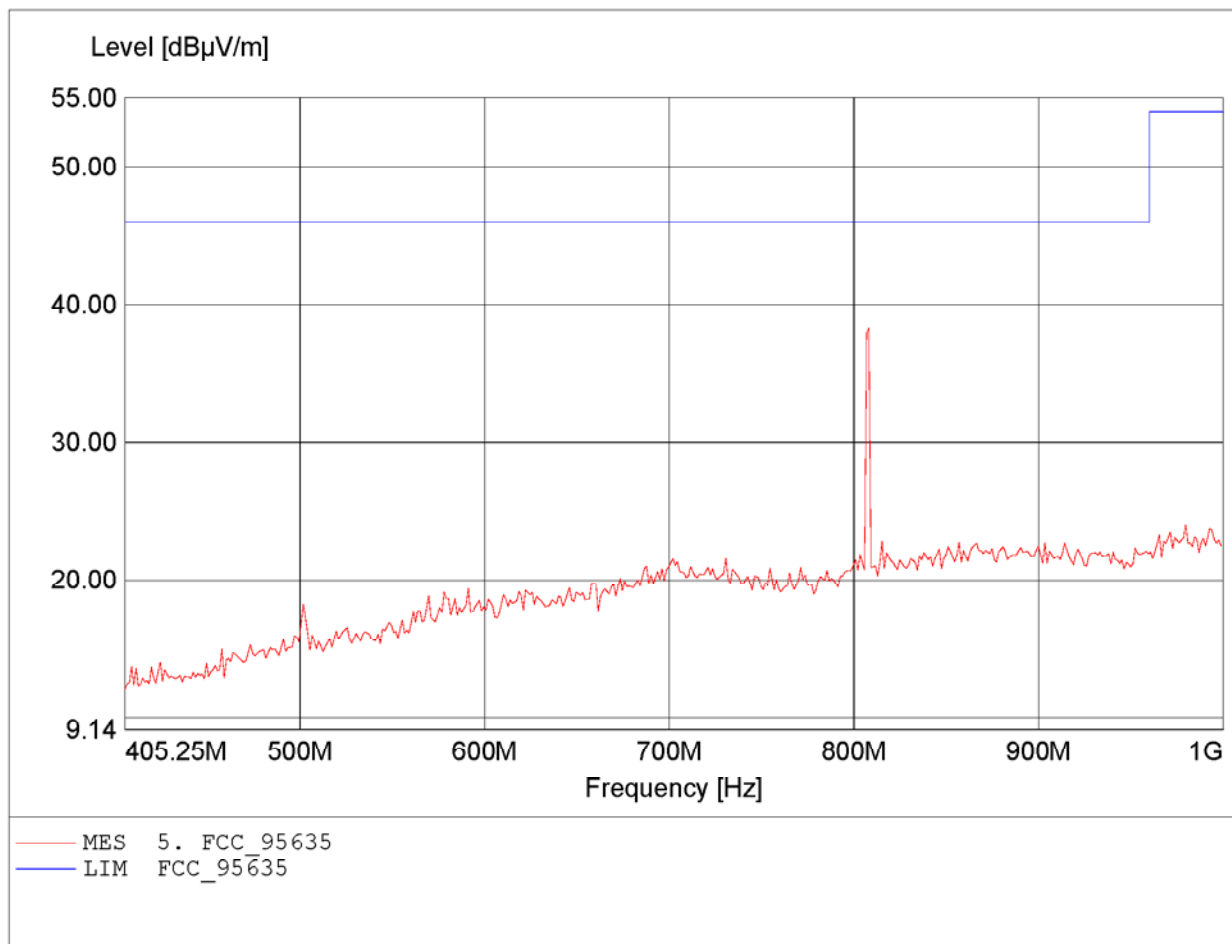


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.633GHz, Emax: 51.24dBµV/m, RBW: 100kHz

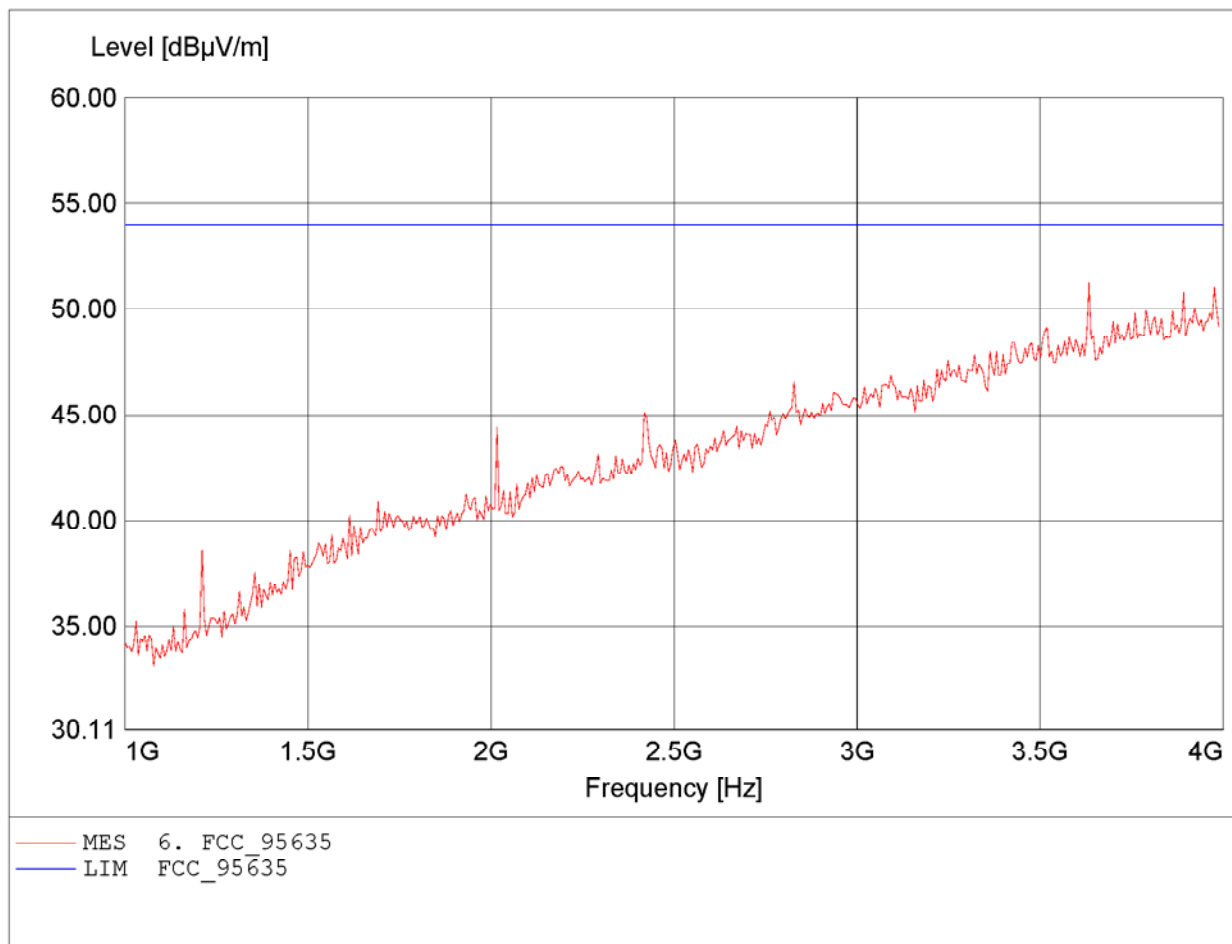


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.633GHz, Emax: 51.47dBµV/m, RBW: 100kHz

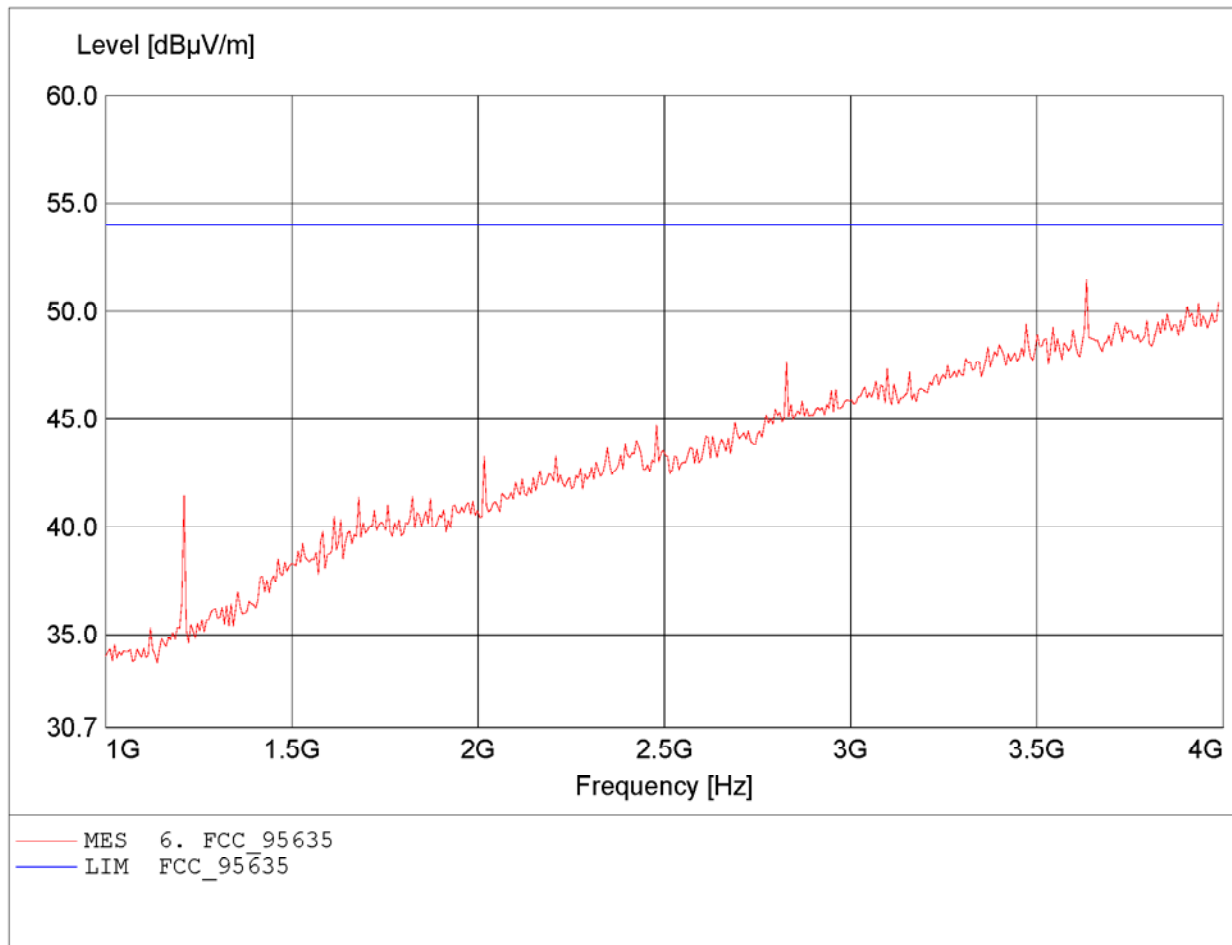


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.920GHz, Emax: 43.32dBµV/m, RBW: 1MHz

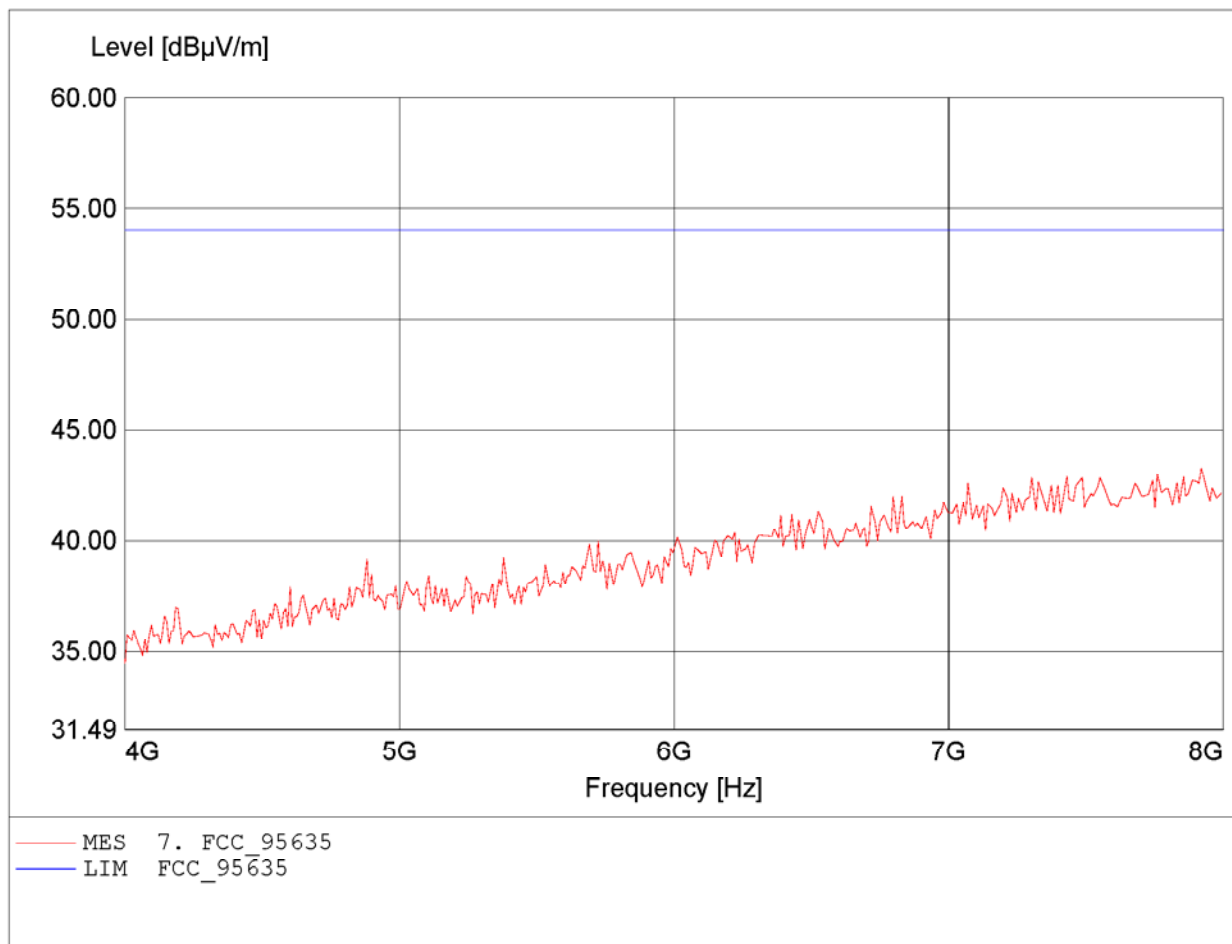


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.311GHz, Emax: 43.35dBµV/m, RBW: 1MHz

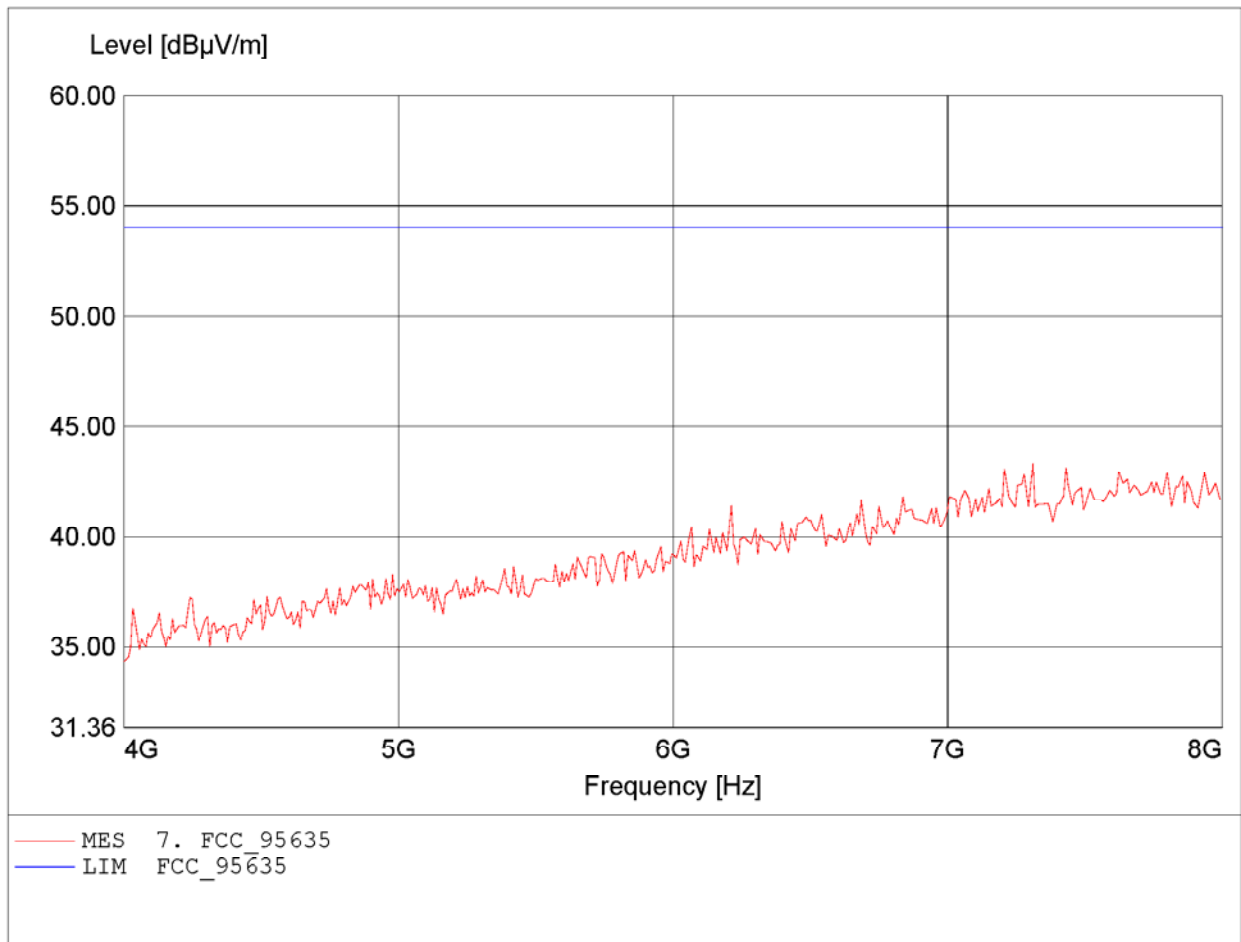


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.655MHz, Emax: 77.00dBuV/m, RBW: 100kHz

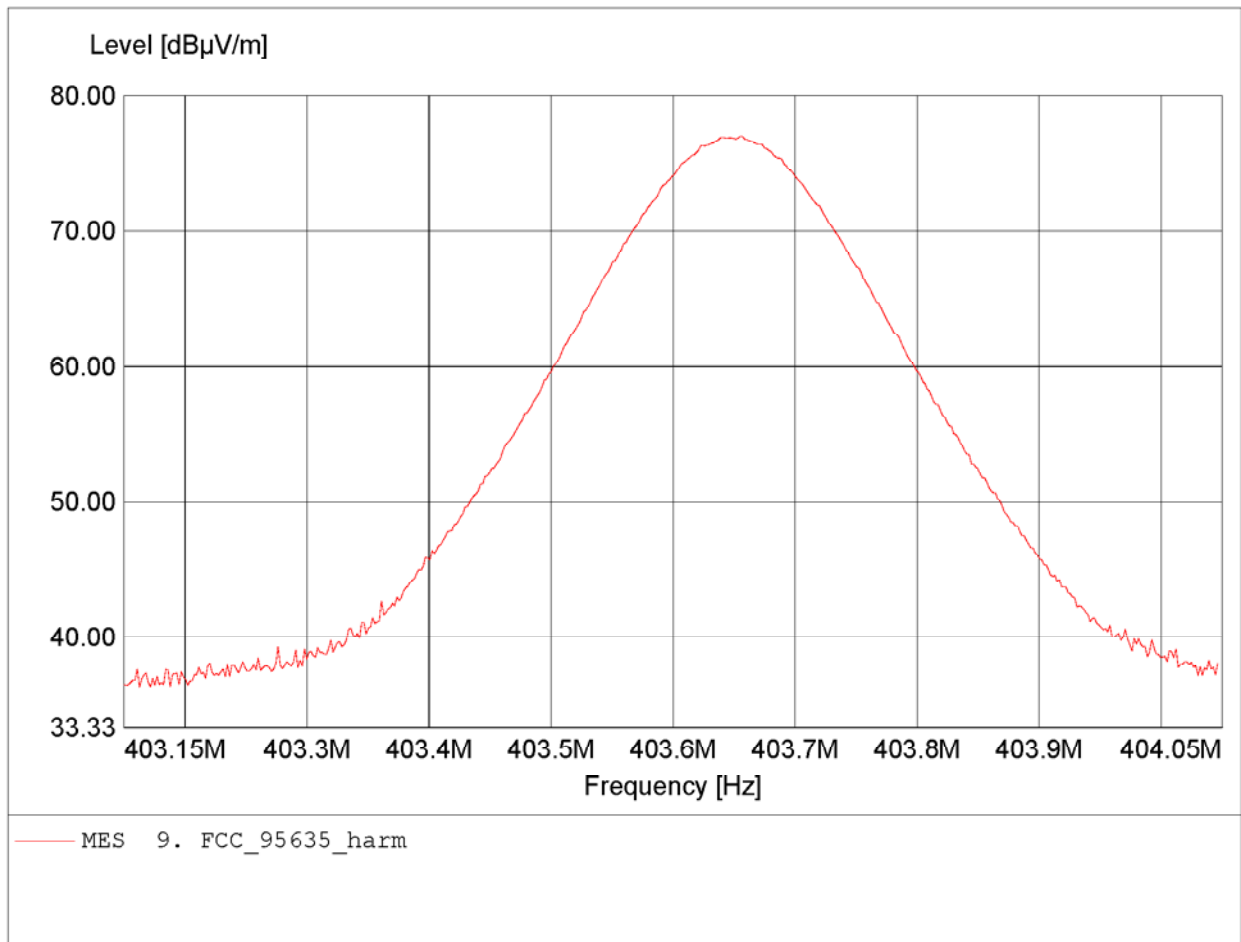


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.483MHz, Emax: 32.31dBµV/m, RBW: 100kHz

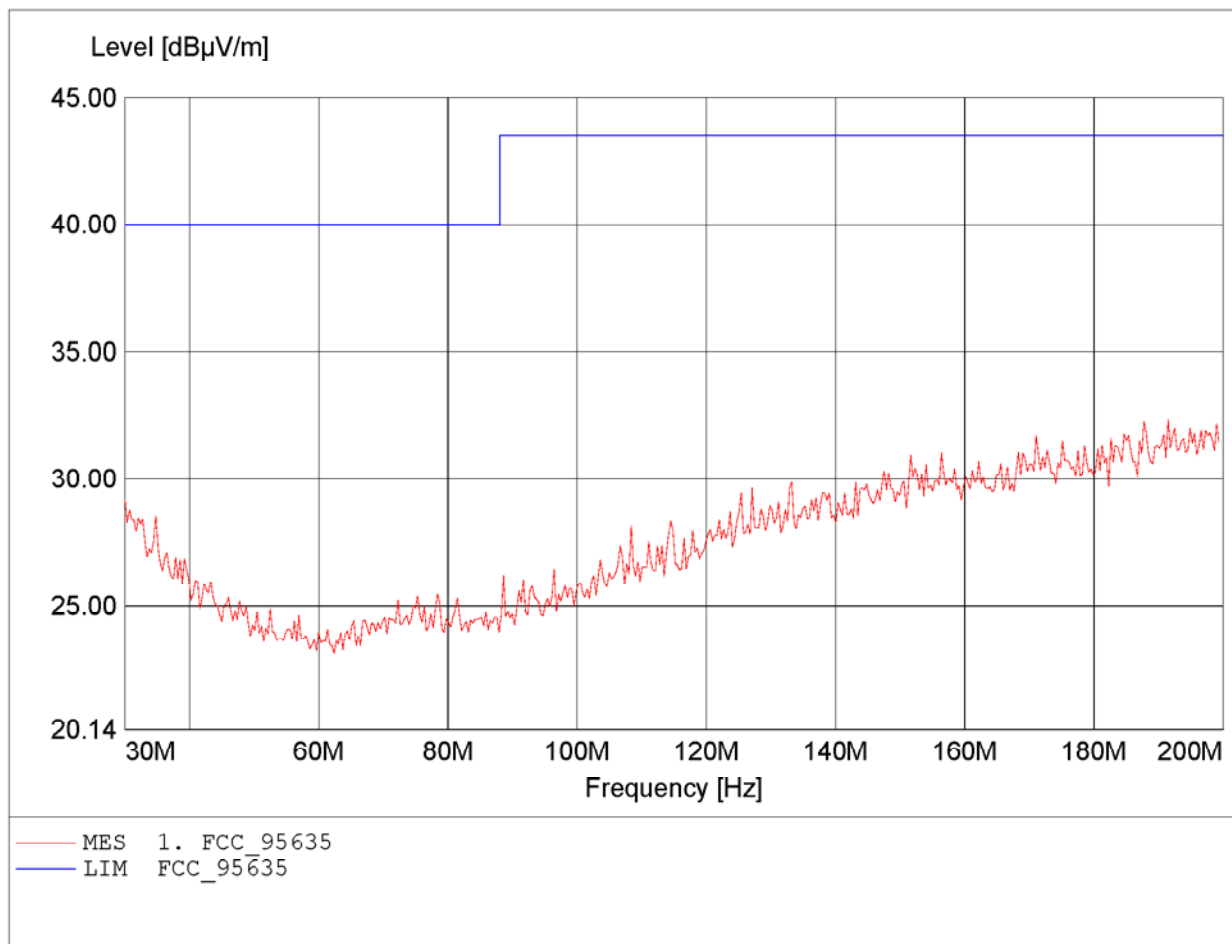


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 32.72dBµV/m, RBW: 100kHz

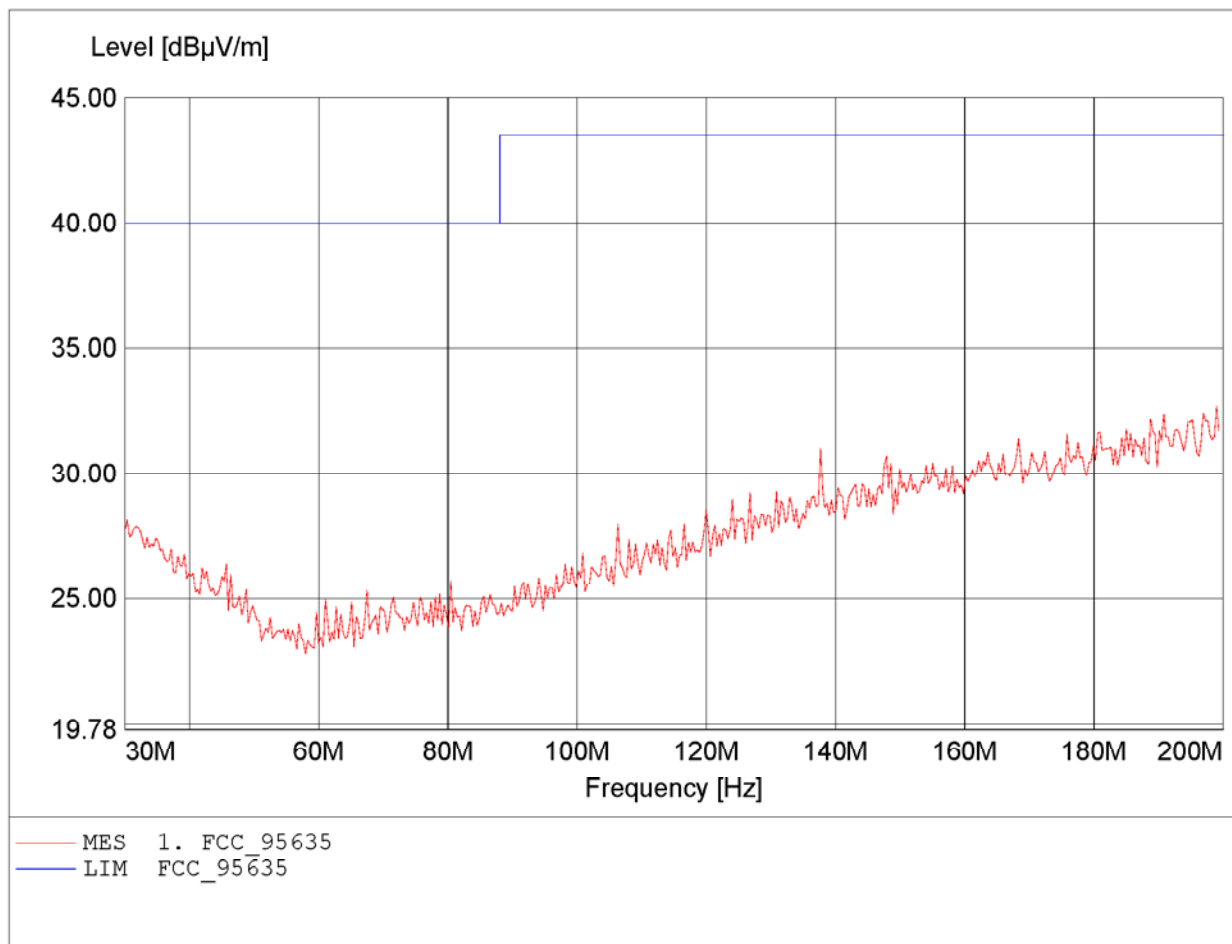


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 201.213MHz, Emax: 15.32dBµV/m, RBW: 100kHz

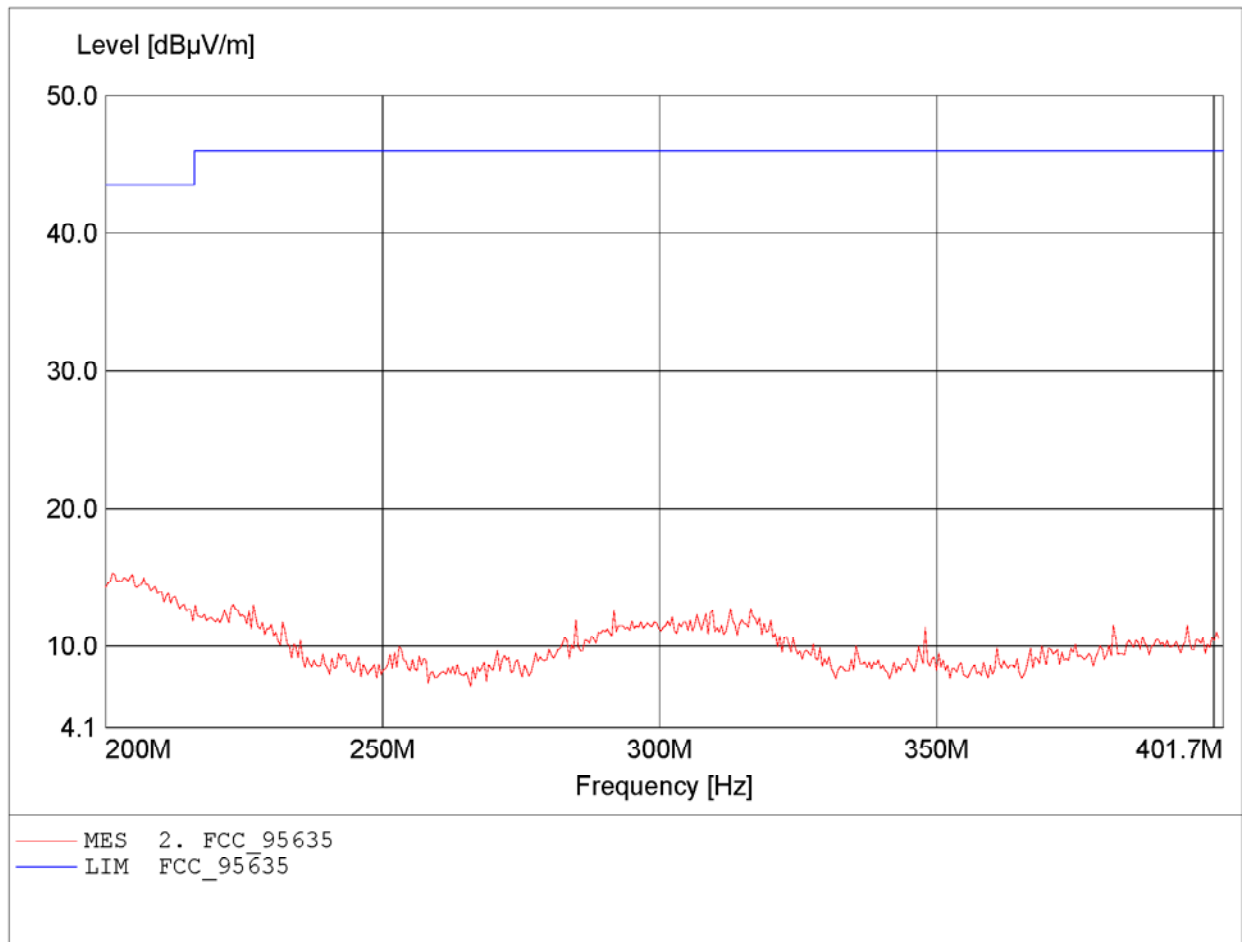


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 200.404MHz, Emax: 15.22dBµV/m, RBW: 100kHz

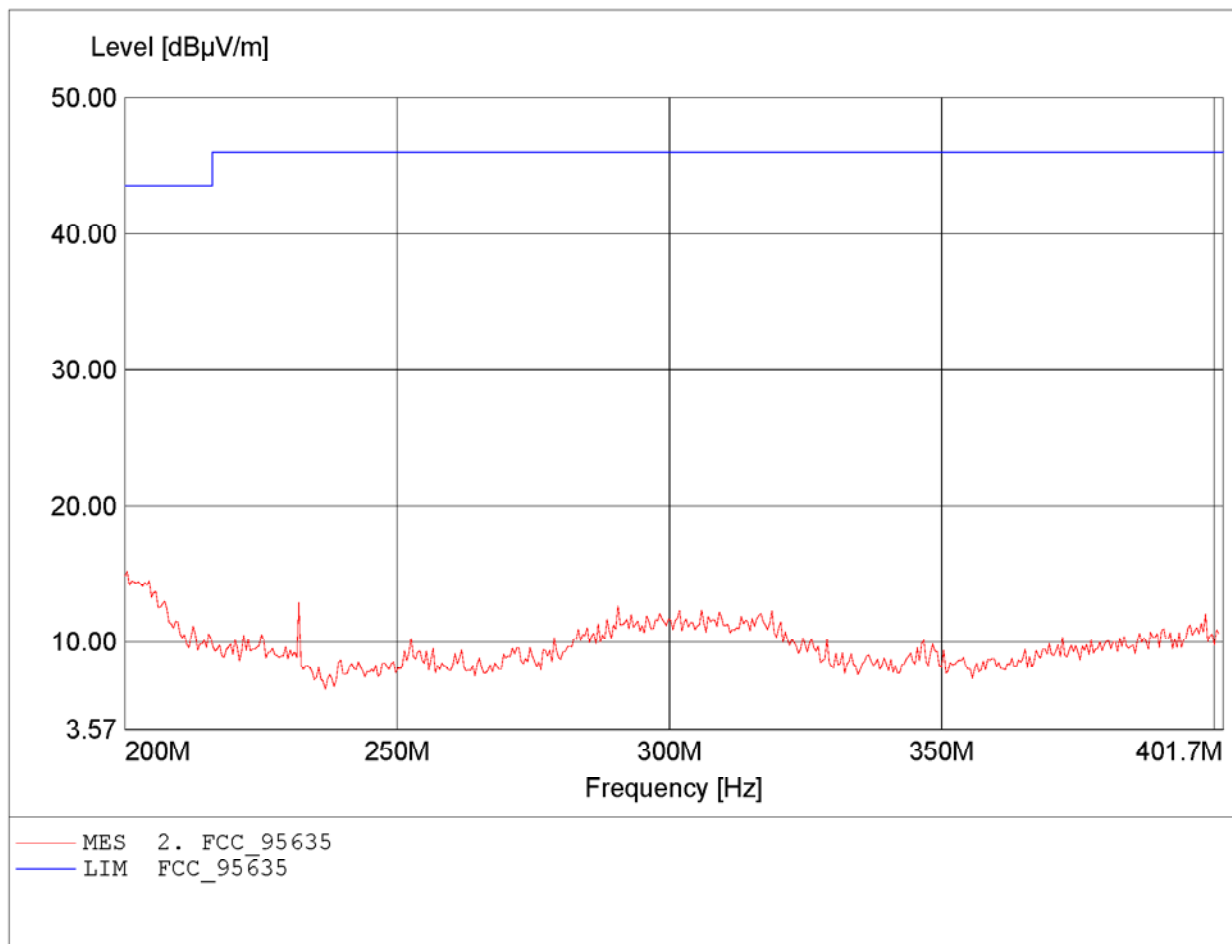


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.493MHz, Emax: 27.70dBµV/m, RBW: 3kHz

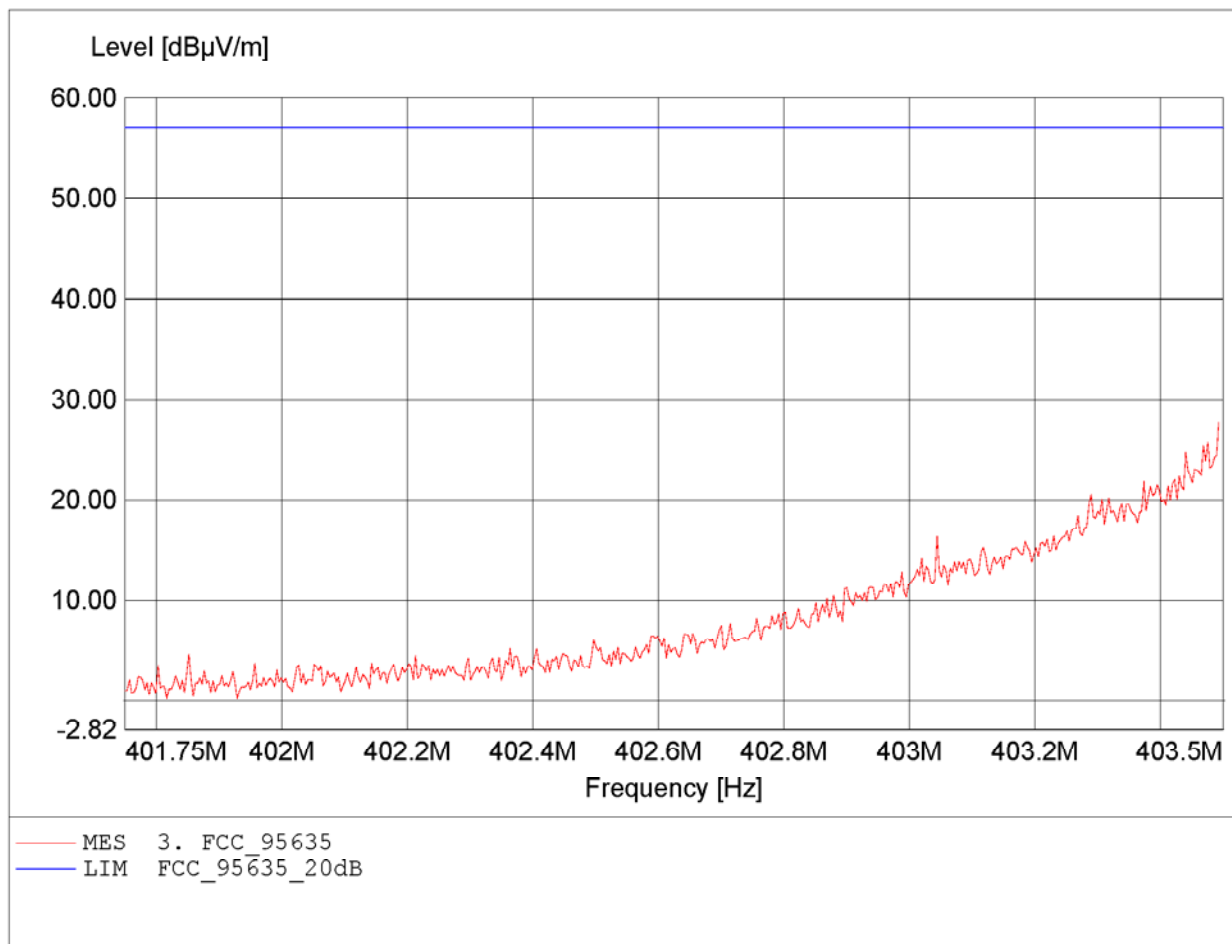


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.475MHz, Emax: 20.66dBµV/m, RBW: 3kHz

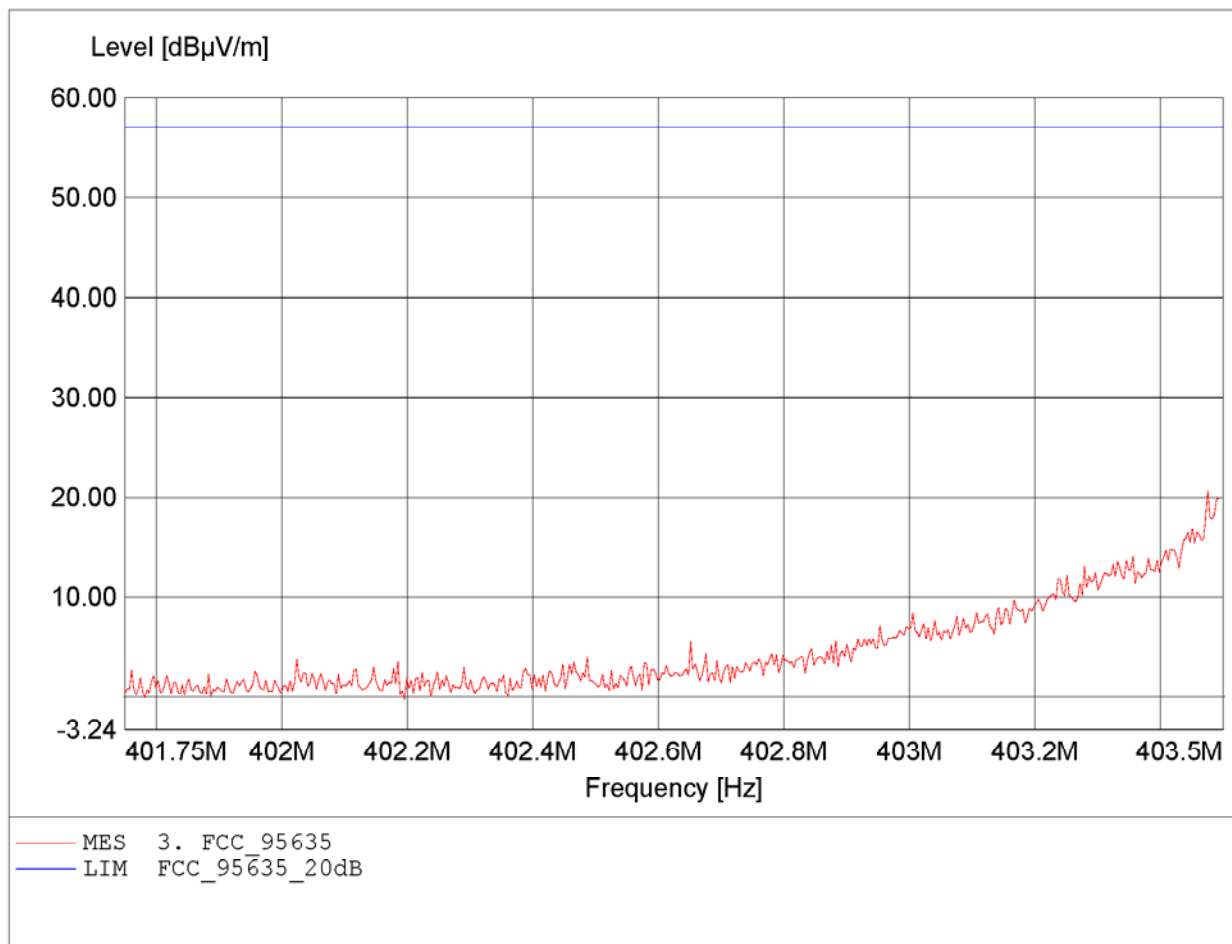


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.806MHz, Emax: 27.58dBµV/m, RBW: 3kHz

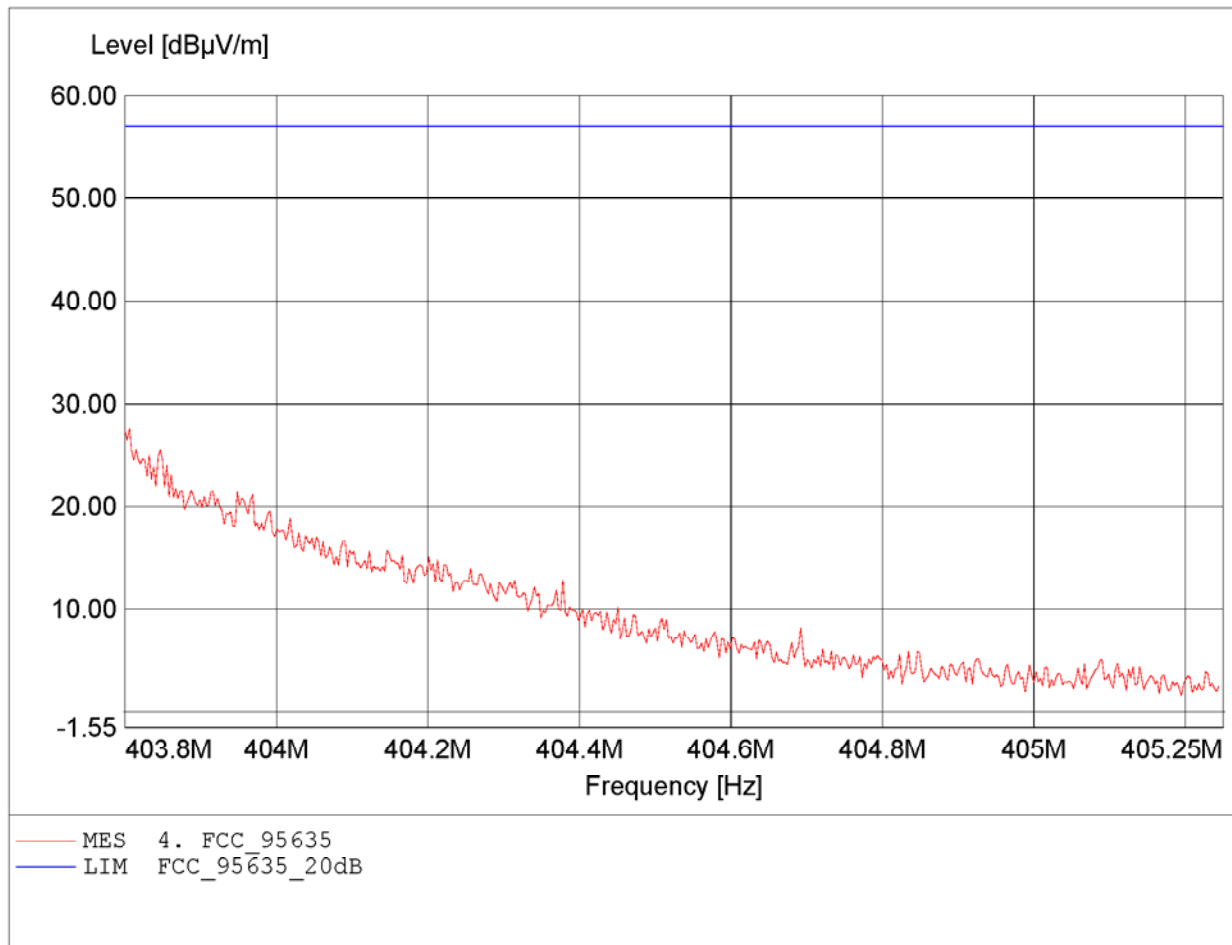


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.800MHz, Emax: 22.18dBµV/m, RBW: 3kHz

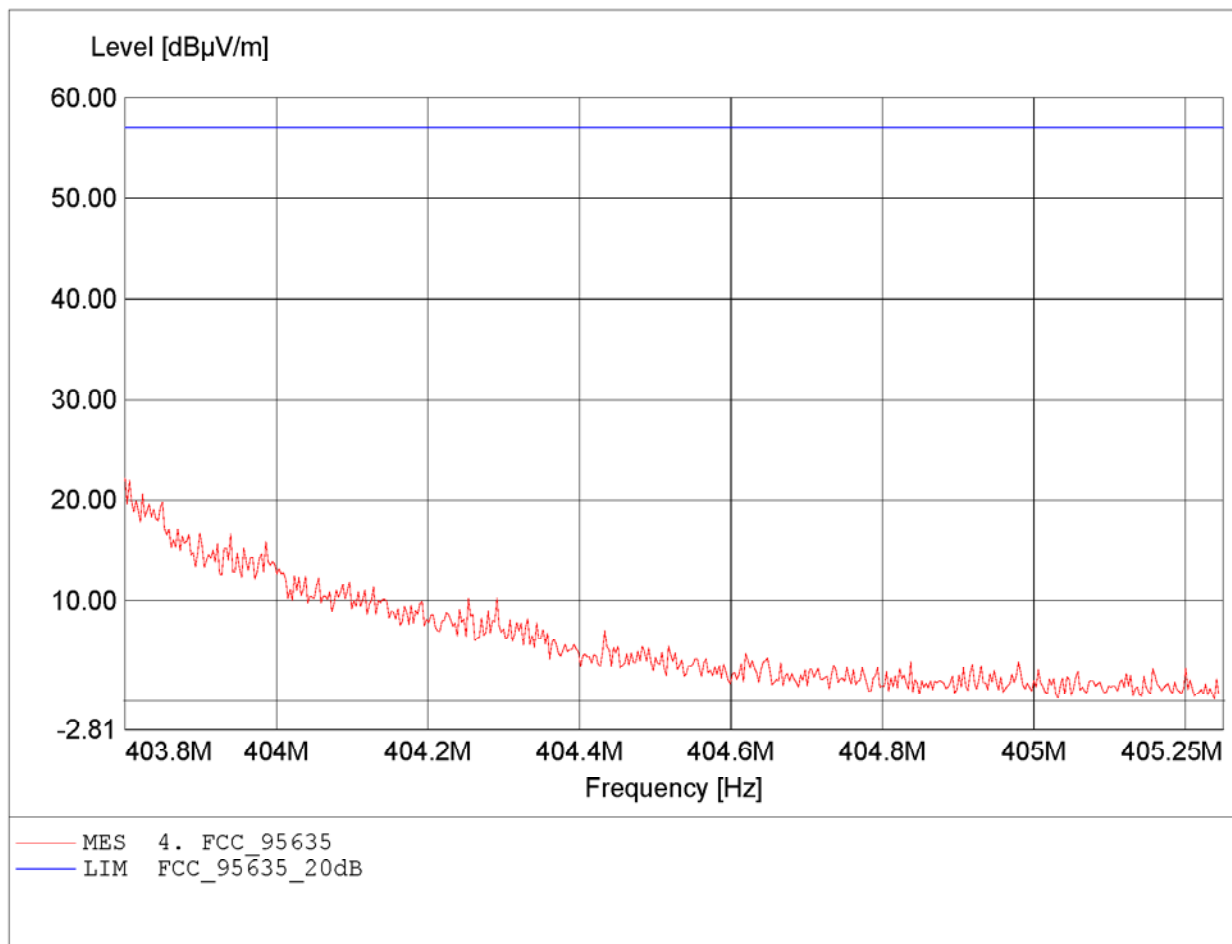


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 39.13dBµV/m, RBW: 100kHz

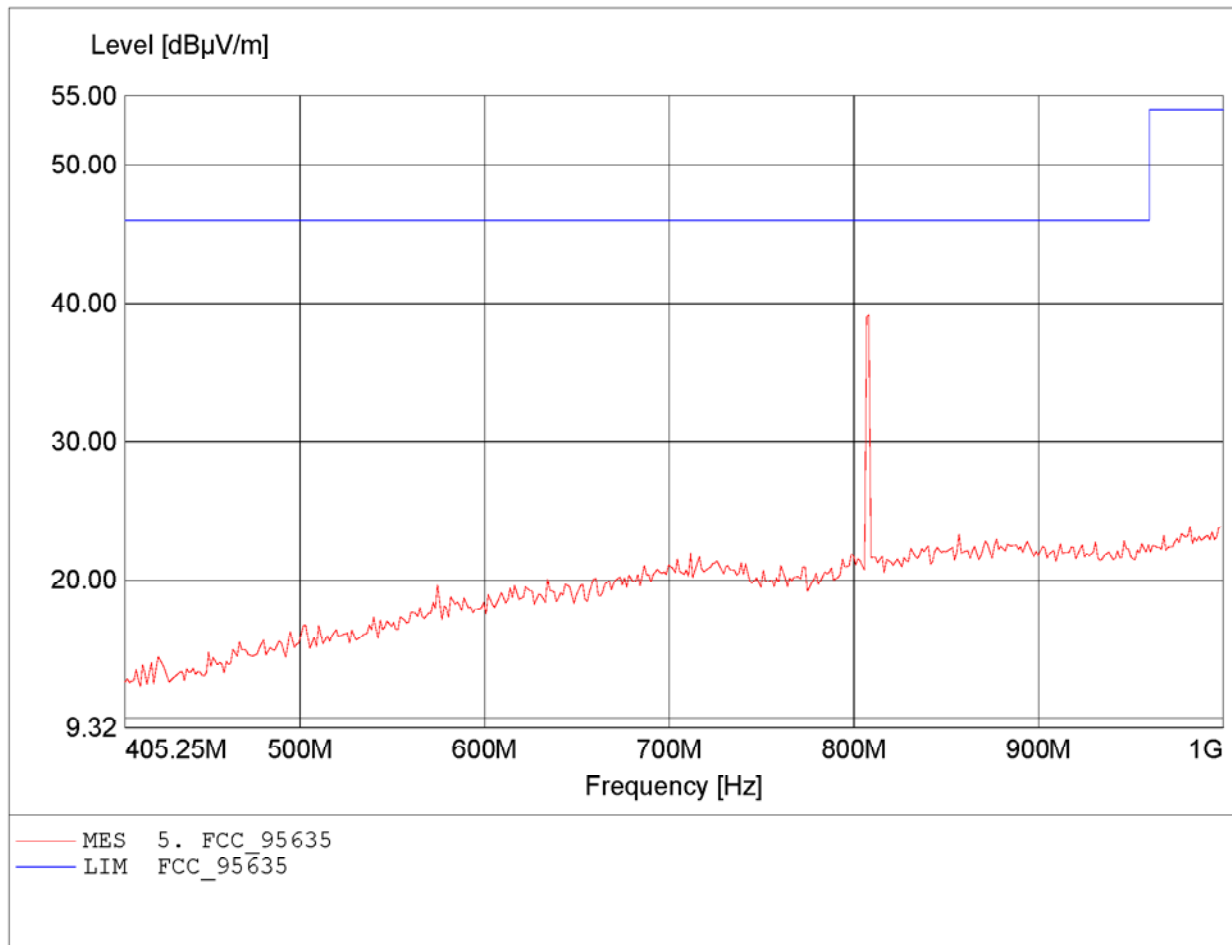


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 38.51dBµV/m, RBW: 100kHz

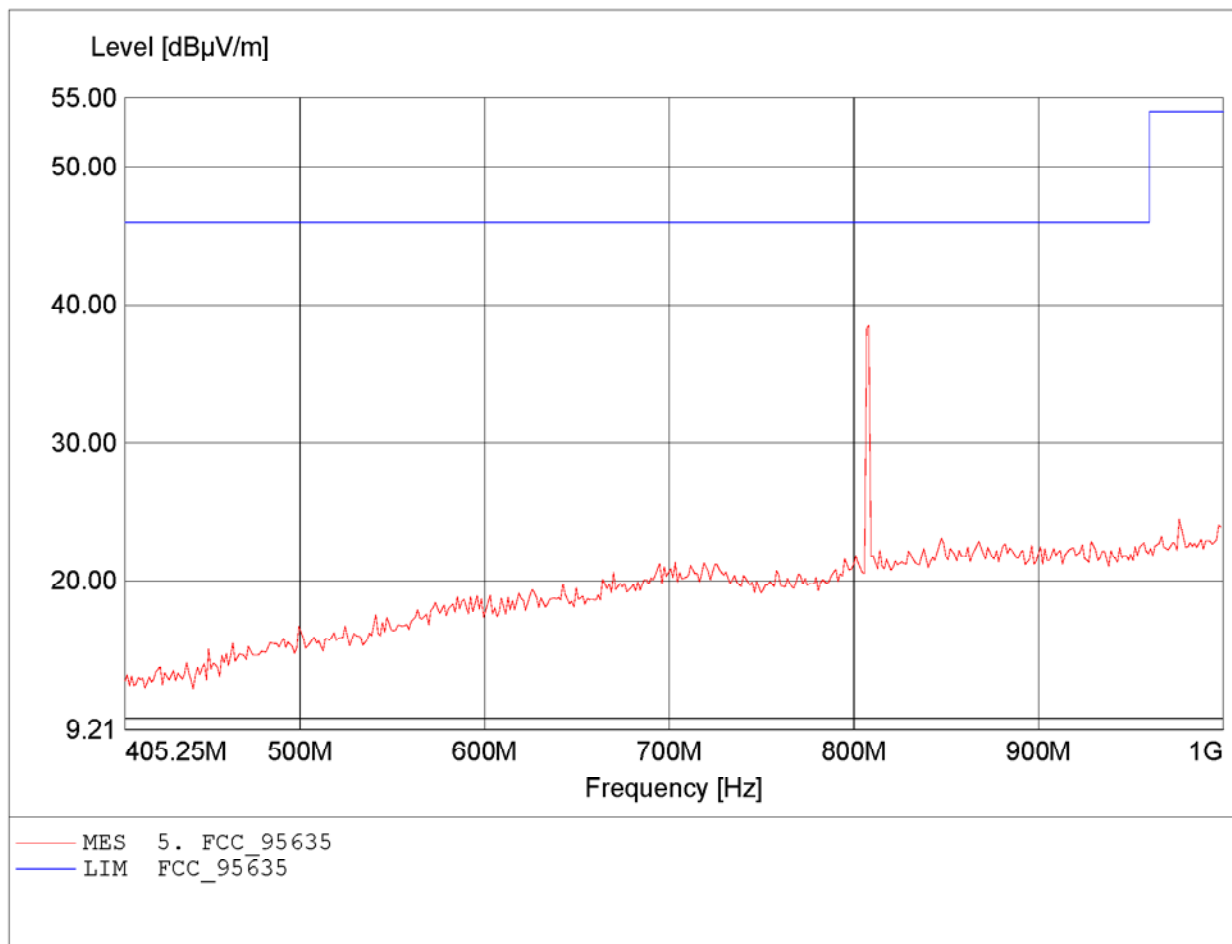


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.946GHz, Emax: 50.19dBµV/m, RBW: 100kHz

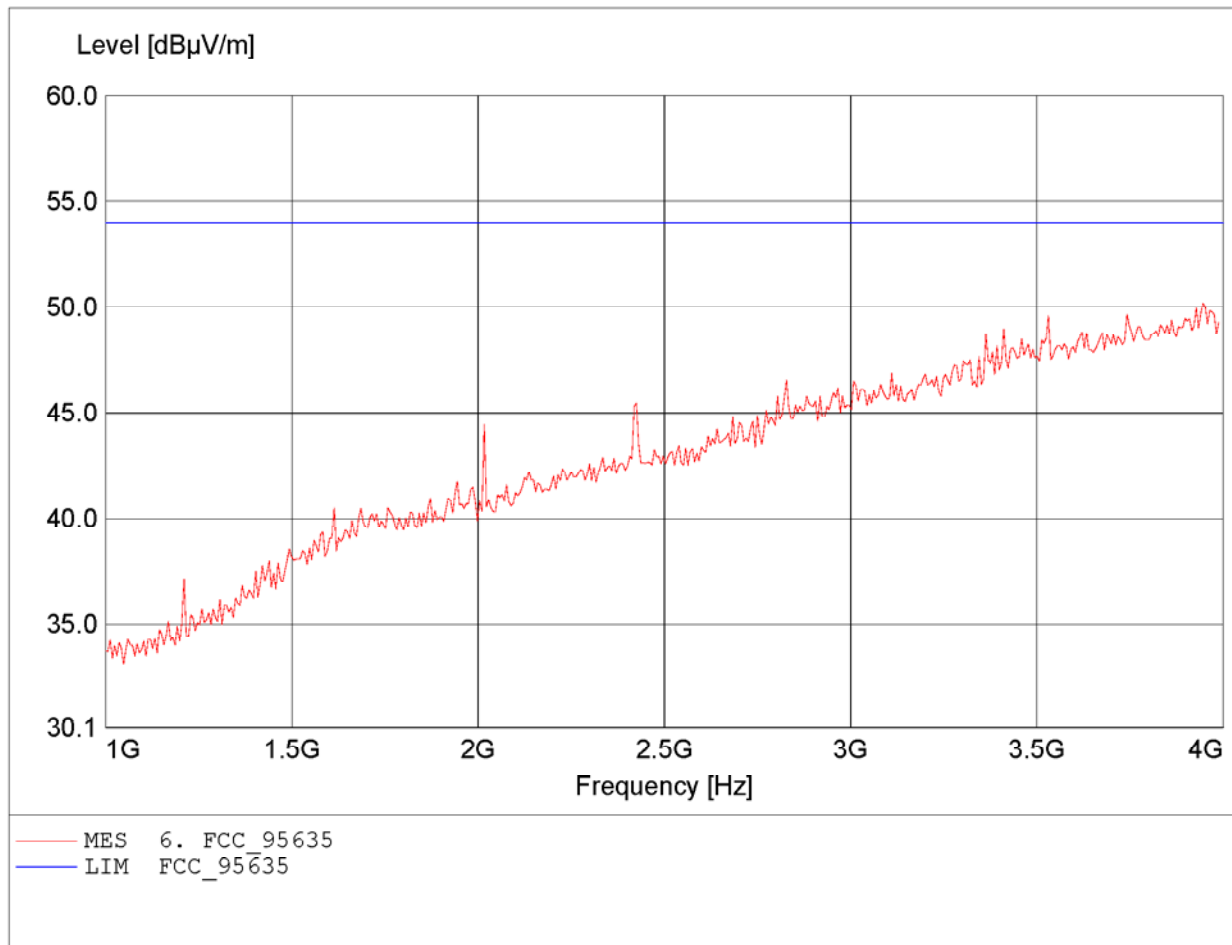


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.874GHz, Emax: 49.93dBµV/m, RBW: 100kHz

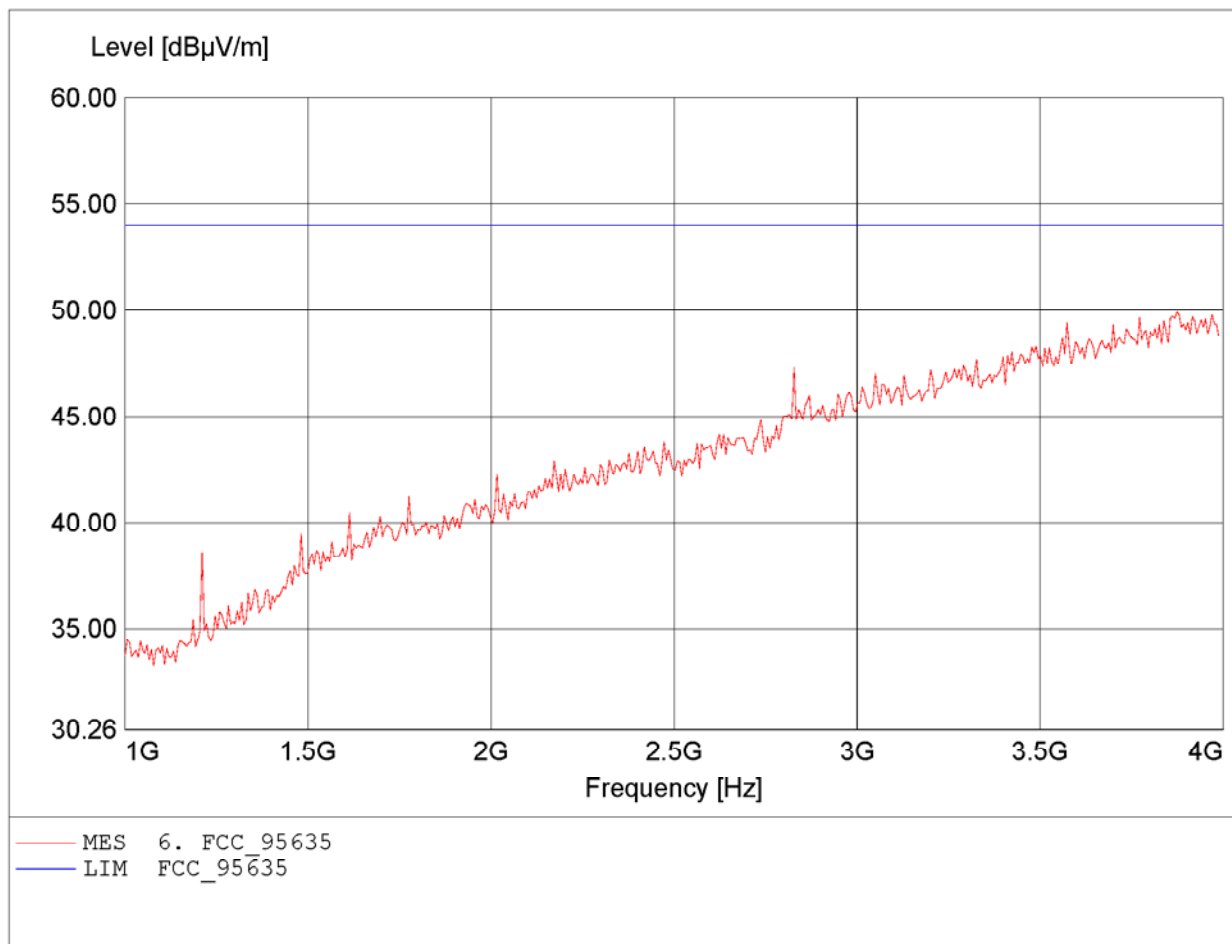


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.872GHz, Emax: 43.03dBµV/m, RBW: 1MHz

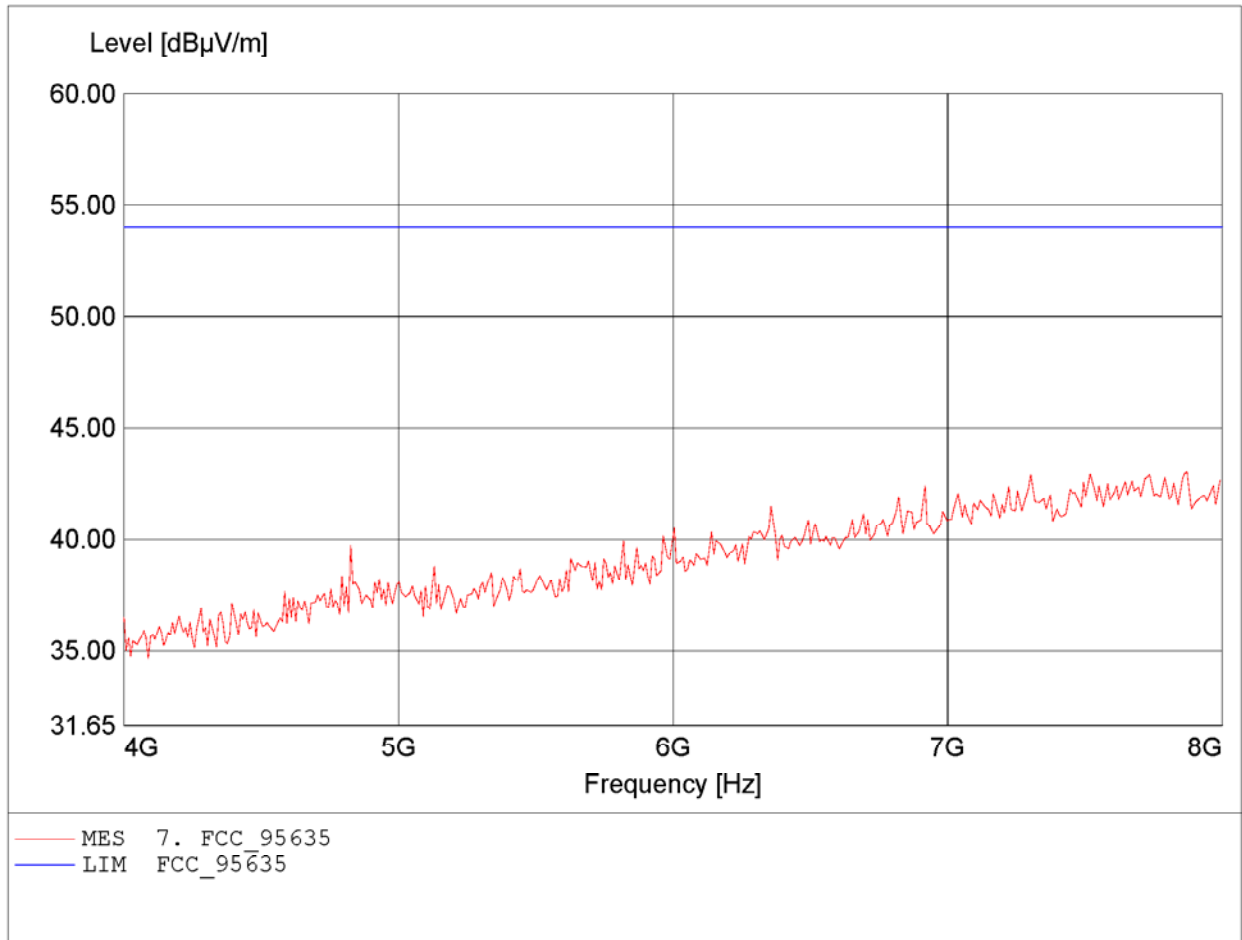


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S / G24L
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.559GHz, Emax: 42.93dBµV/m, RBW: 1MHz

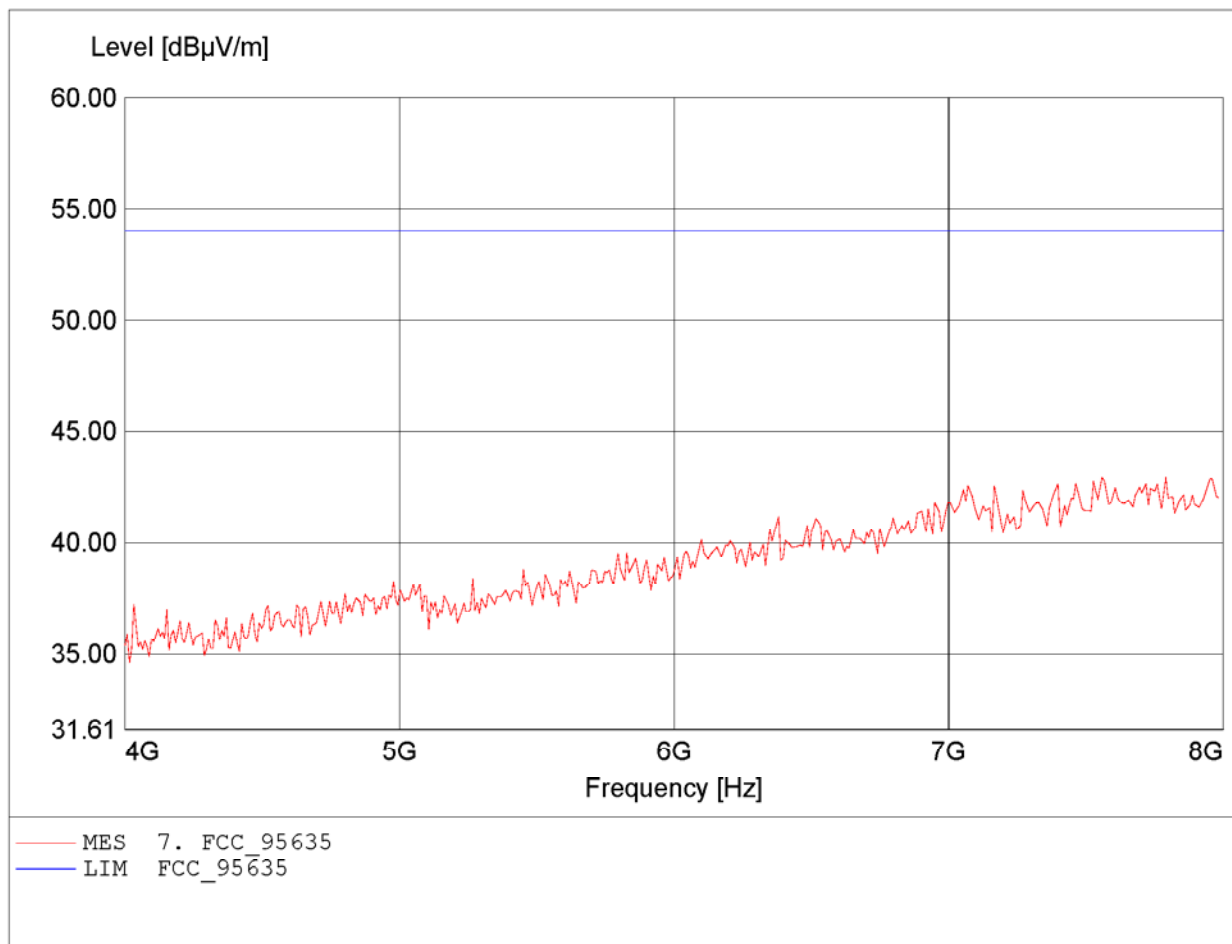


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.650MHz, Emax: 79.11dBuV/m, RBW: 100kHz

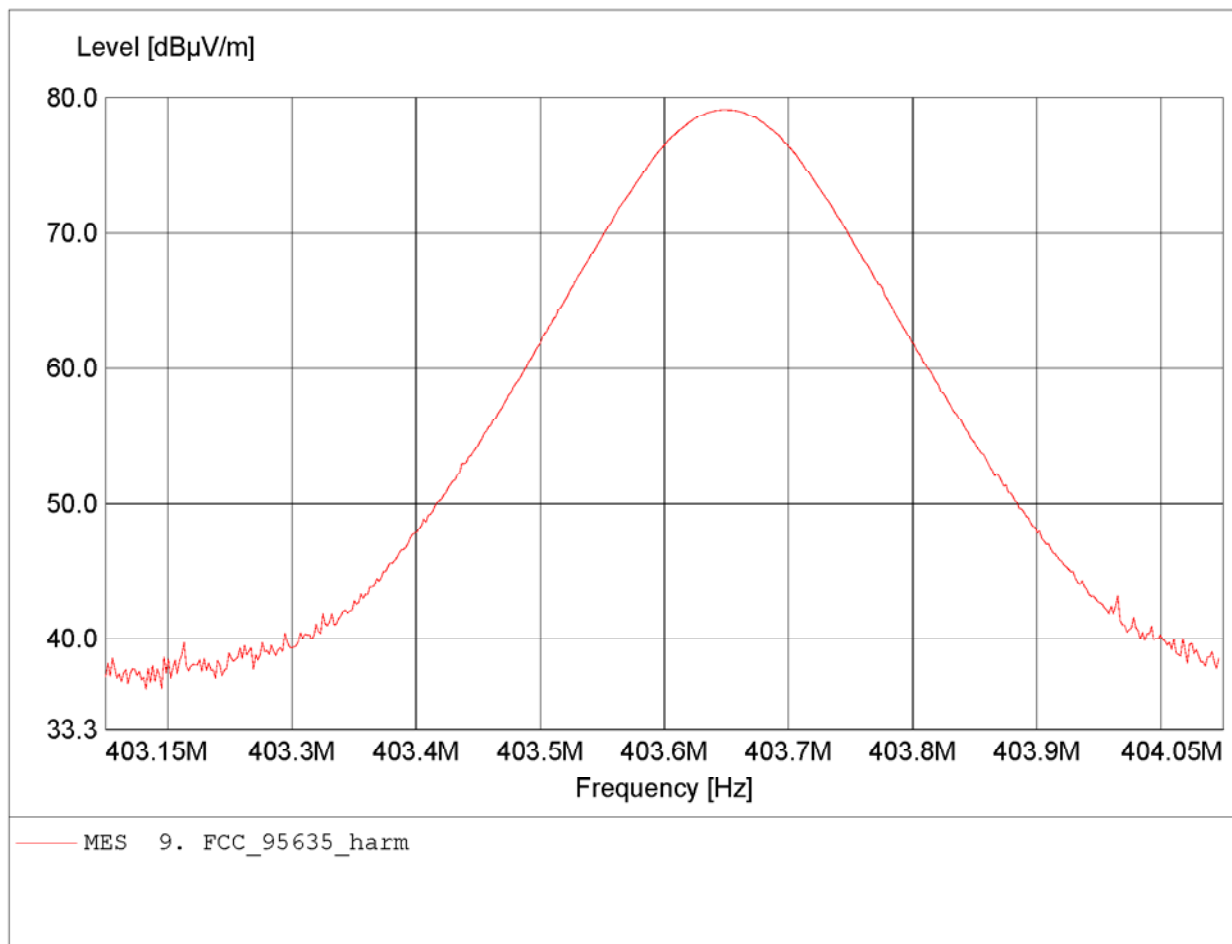


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.142MHz, Emax: 32.47dBµV/m, RBW: 100kHz

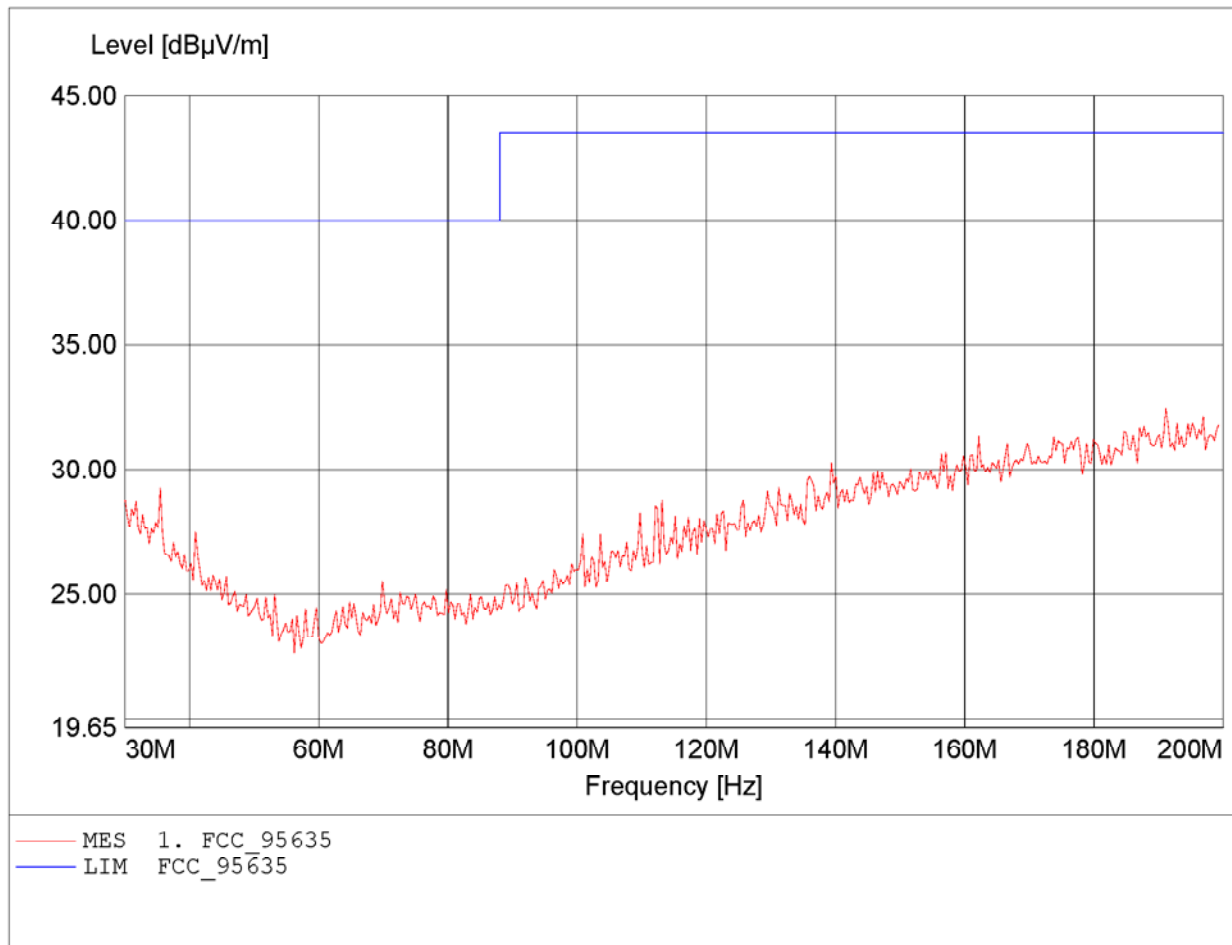


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 32.40dBµV/m, RBW: 100kHz

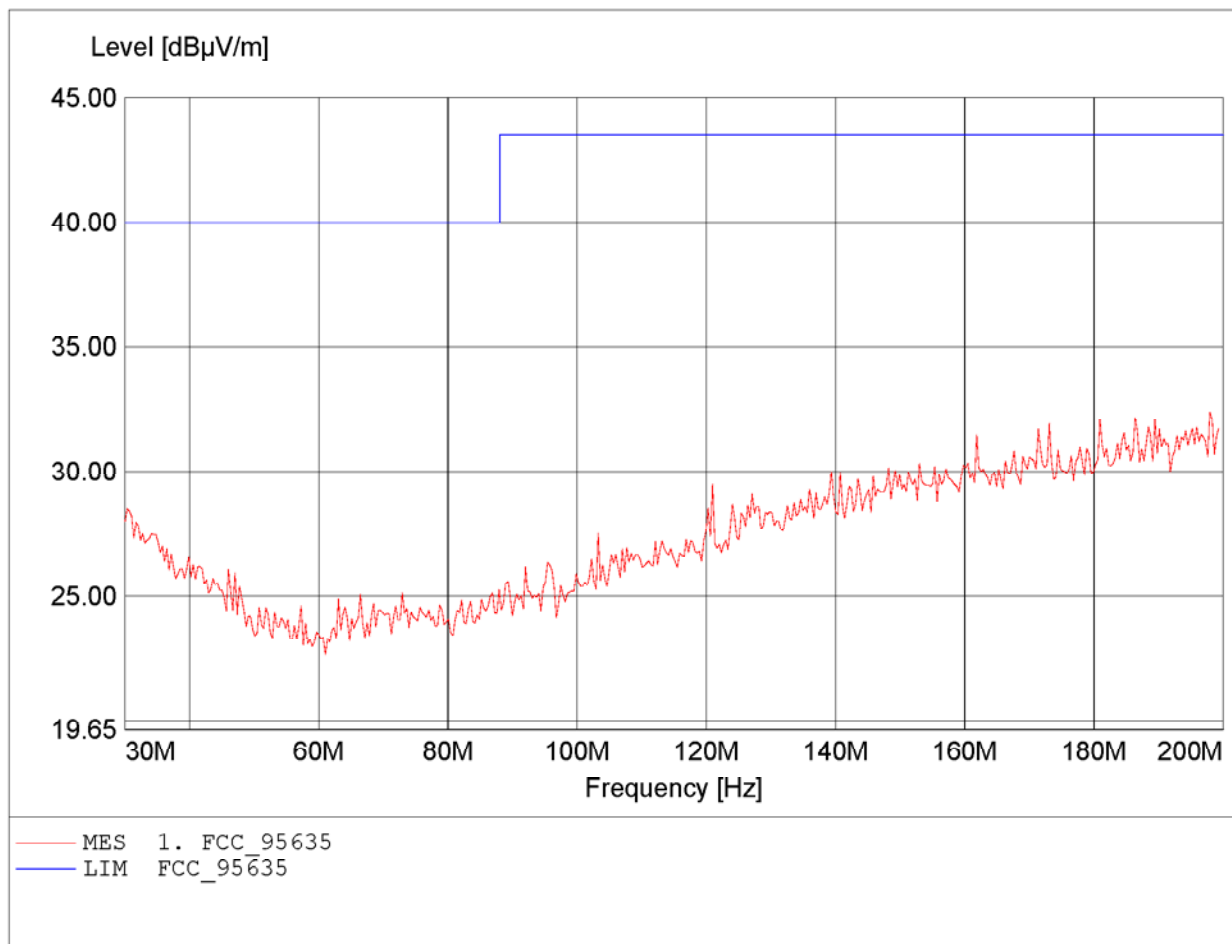


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 200.000MHz, Emax: 15.54dBµV/m, RBW: 100kHz

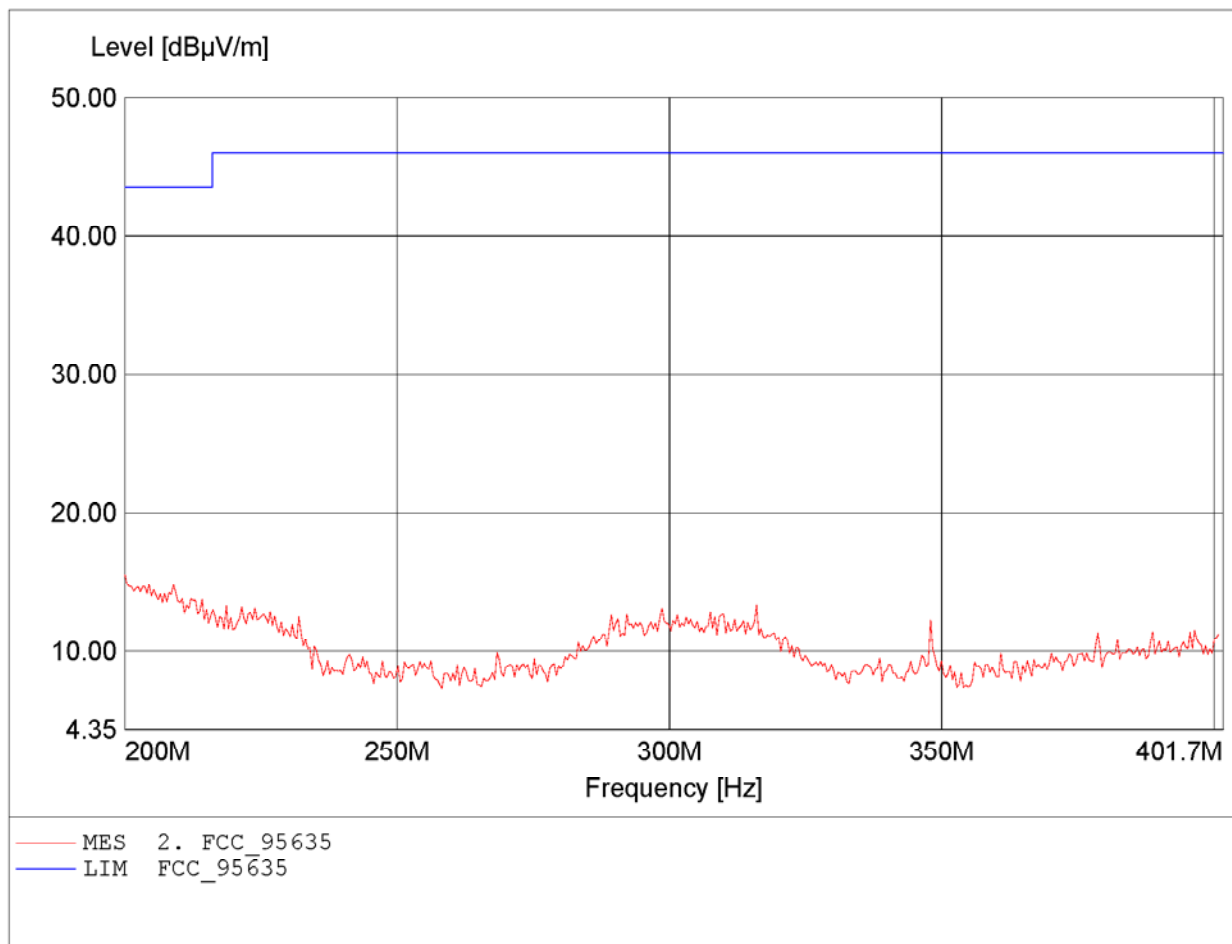


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 202.021MHz, Emax: 16.08dBµV/m, RBW: 100kHz

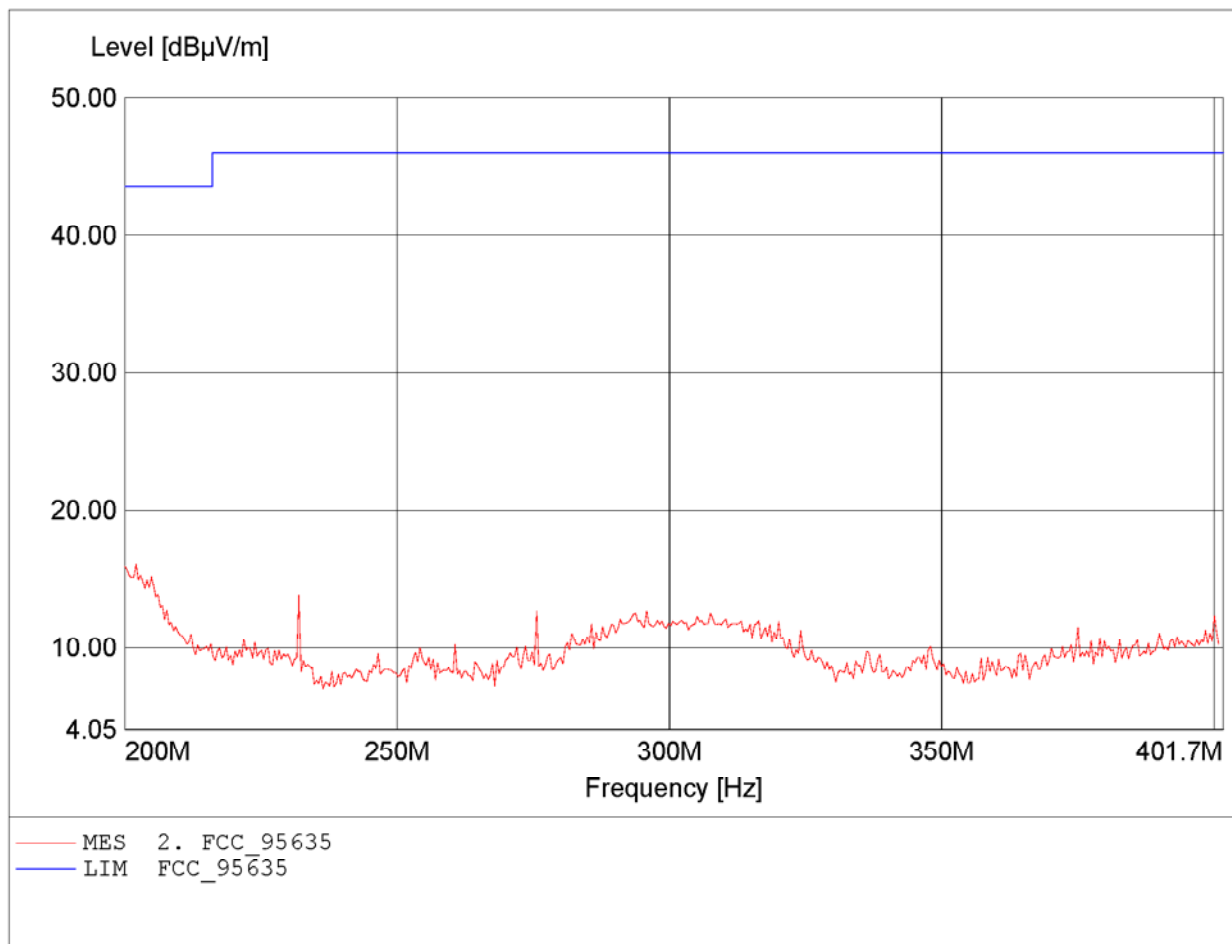


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.479MHz, Emax: 19.42dBµV/m, RBW: 3kHz

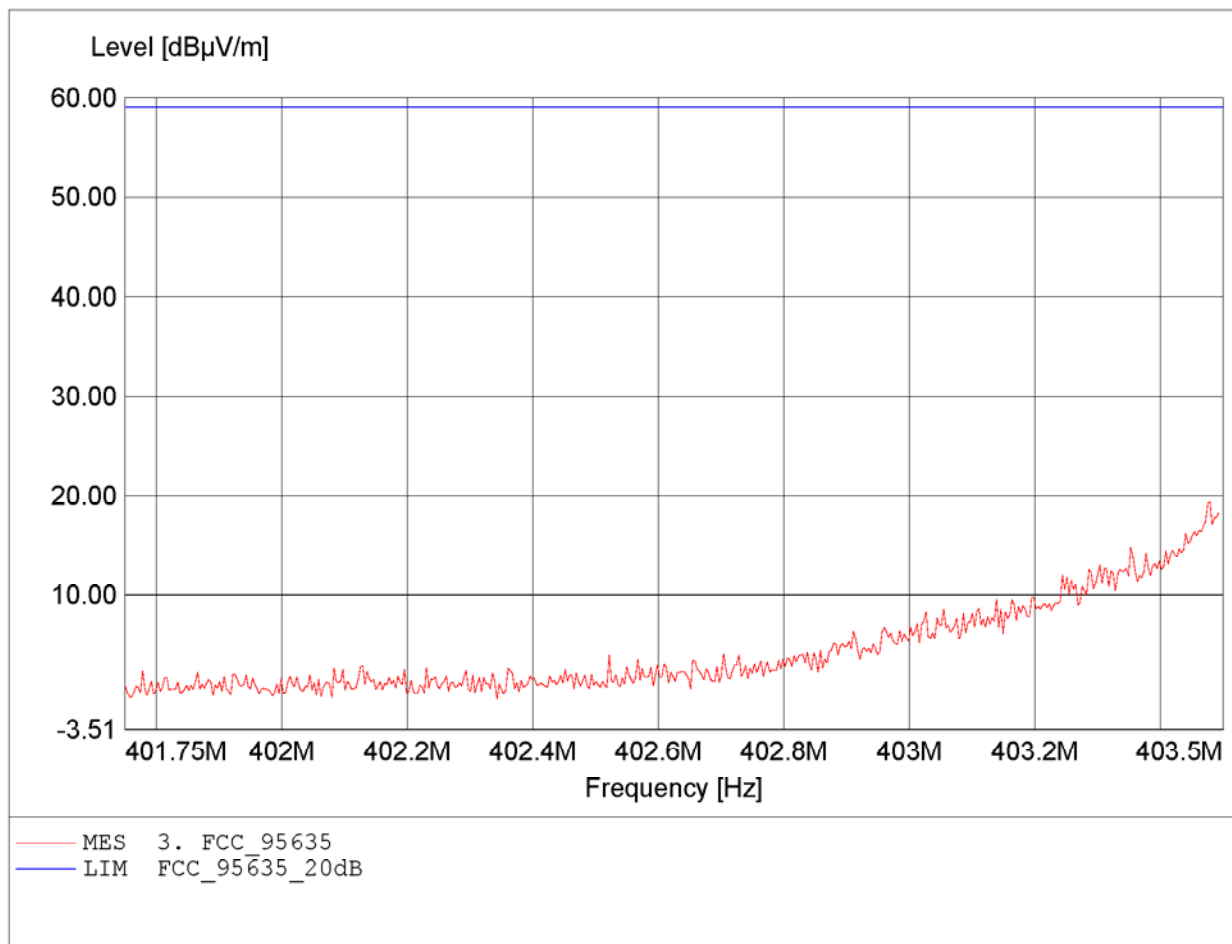


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.493MHz, Emax: 28.73dBµV/m, RBW: 3kHz

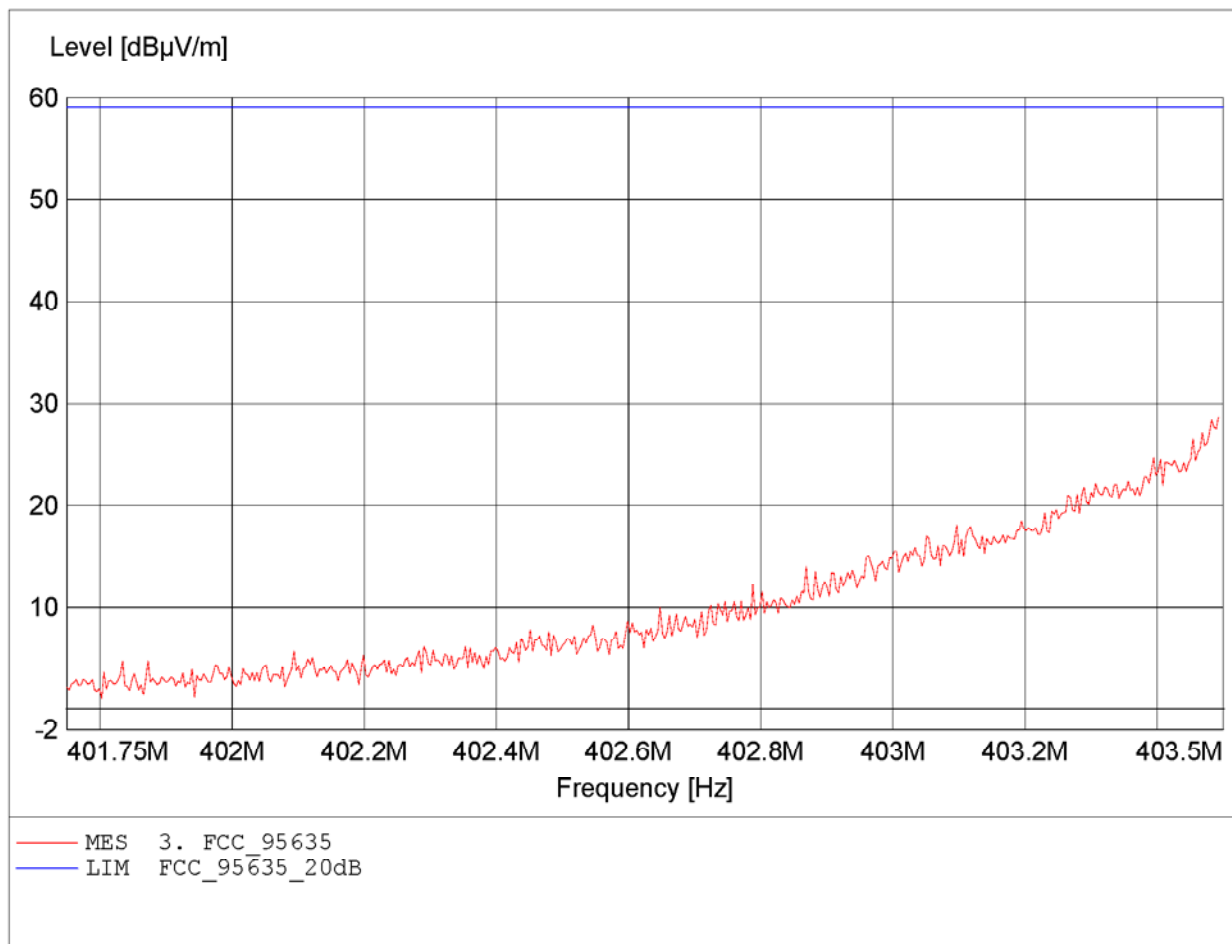


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.809MHz, Emax: 21.44dBµV/m, RBW: 3kHz

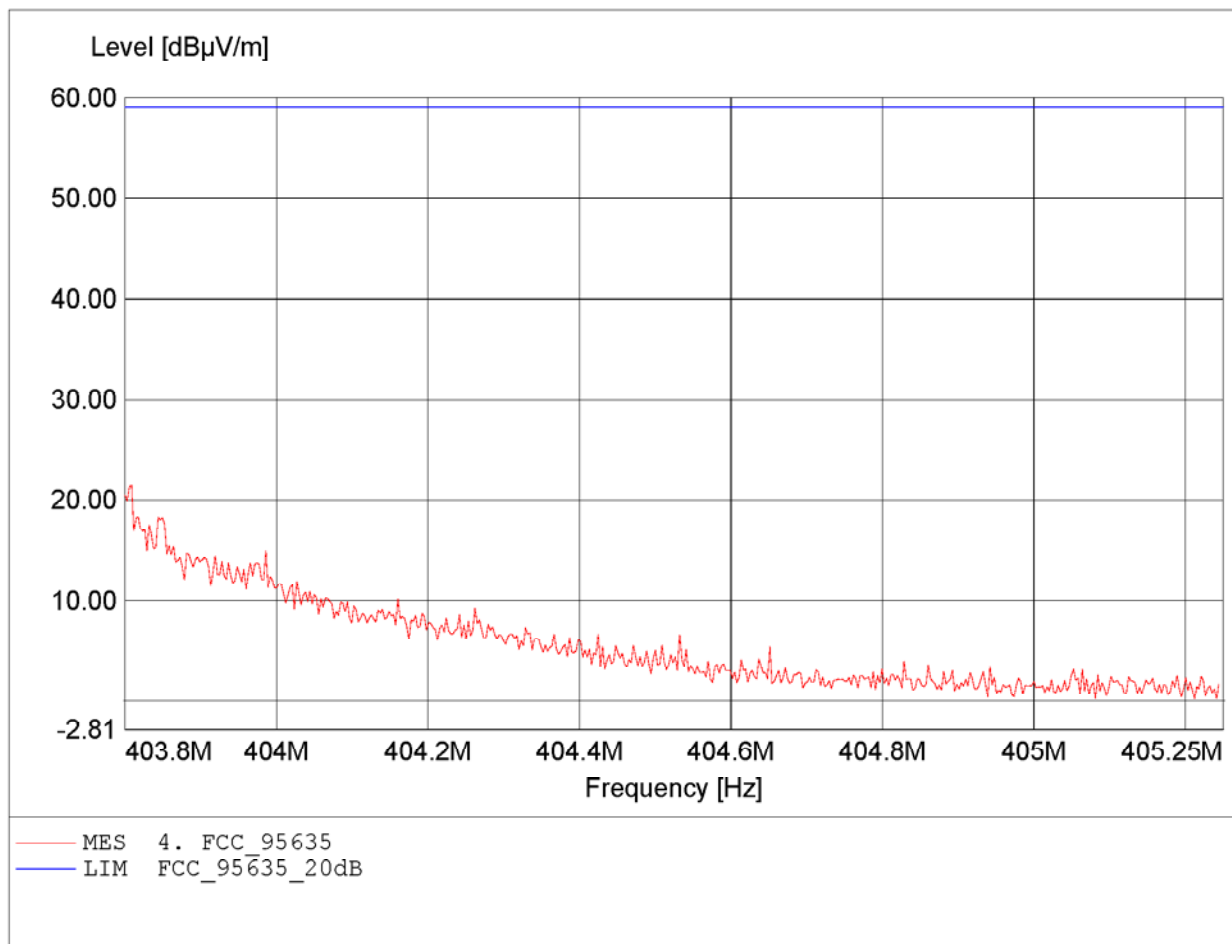


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.803MHz, Emax: 30.15dBµV/m, RBW: 3kHz

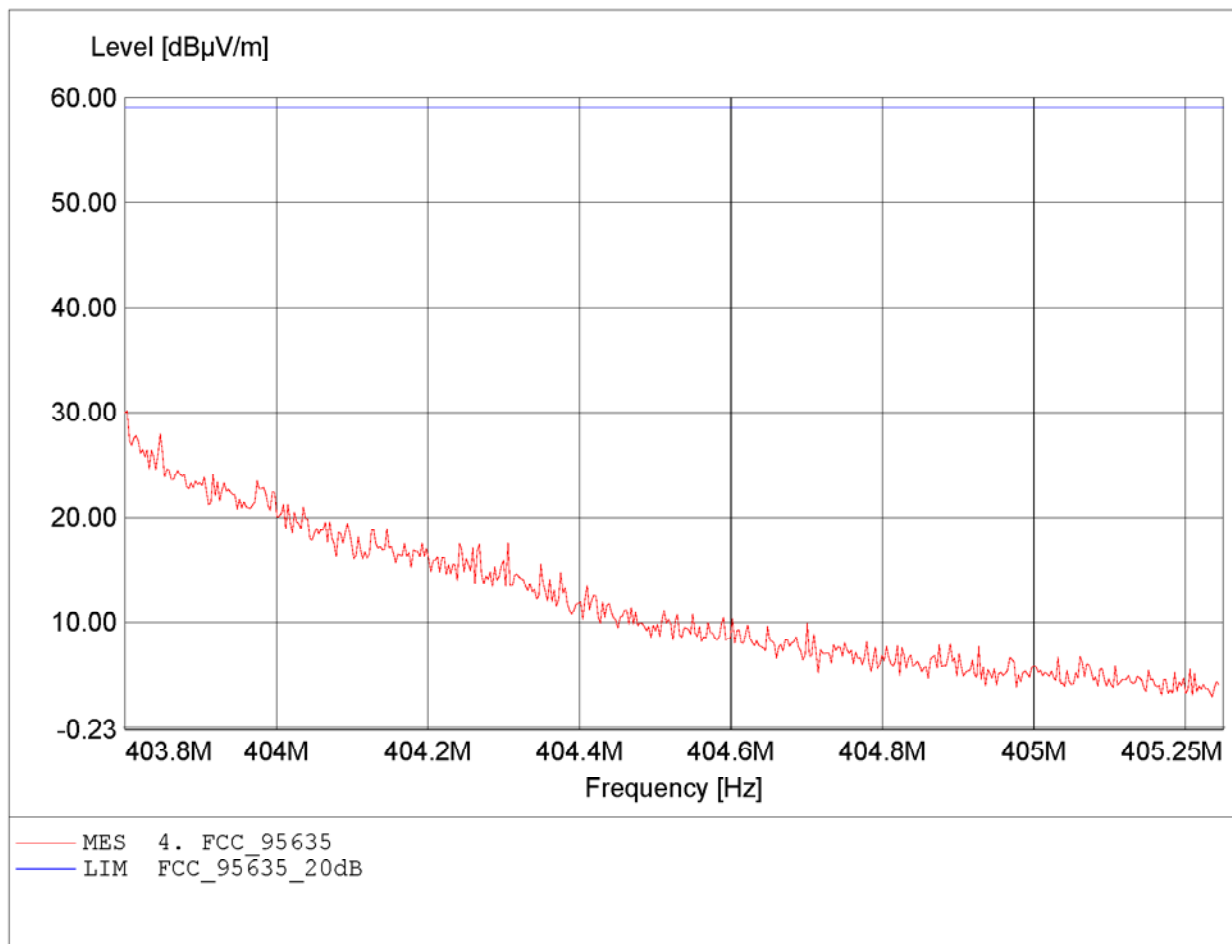


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 806.915MHz, Emax: 39.13dBµV/m, RBW: 100kHz

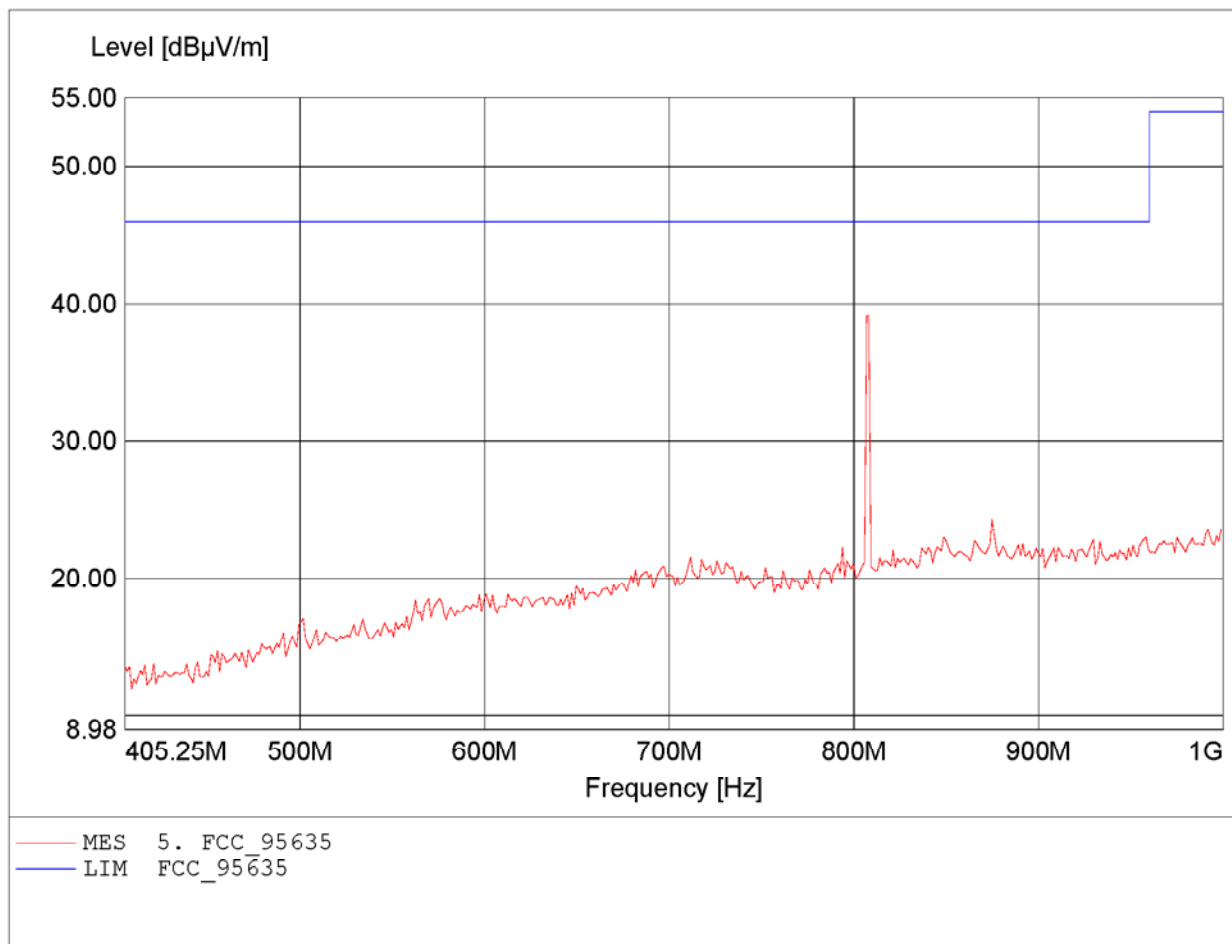


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 38.29dBµV/m, RBW: 100kHz

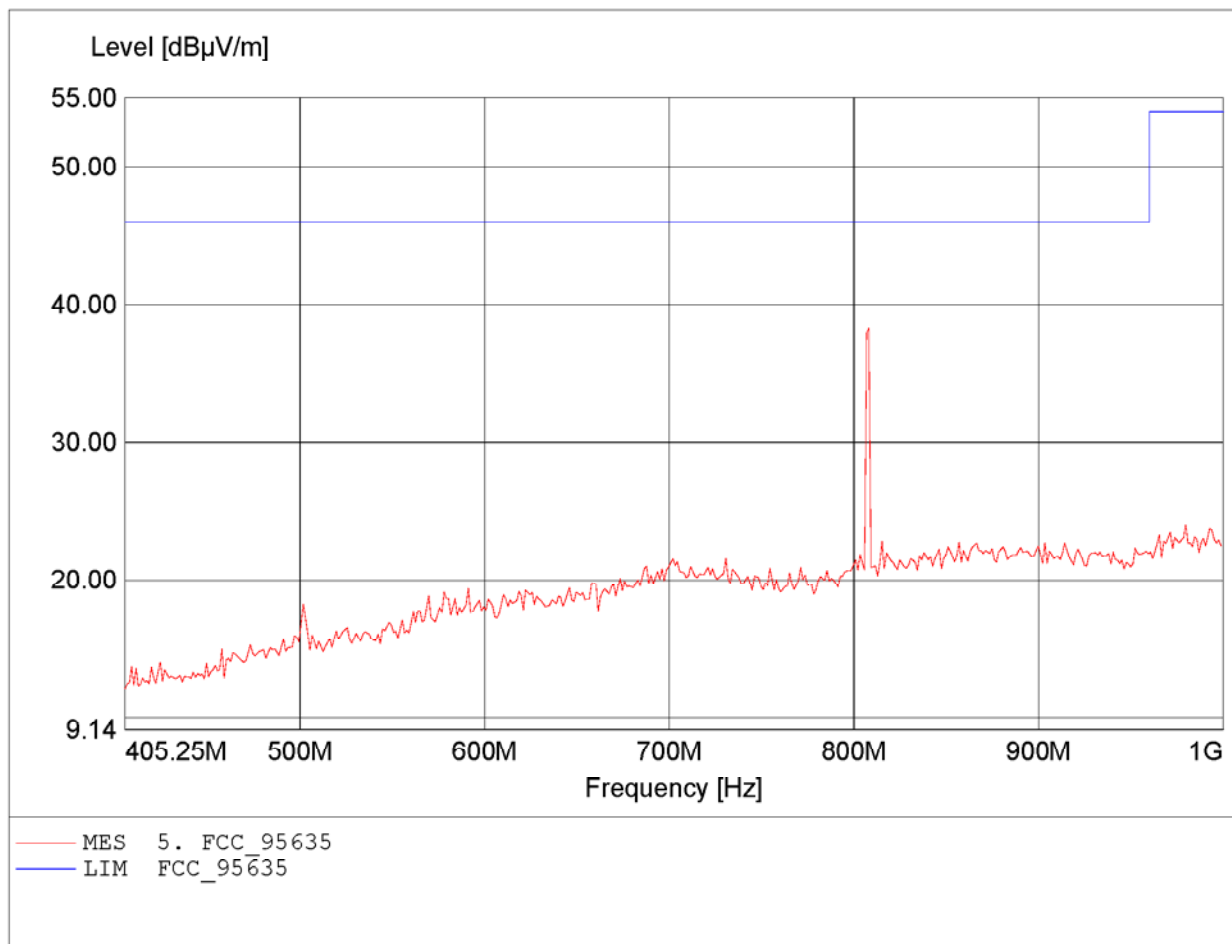


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.633GHz, Emax: 51.24dBµV/m, RBW: 100kHz

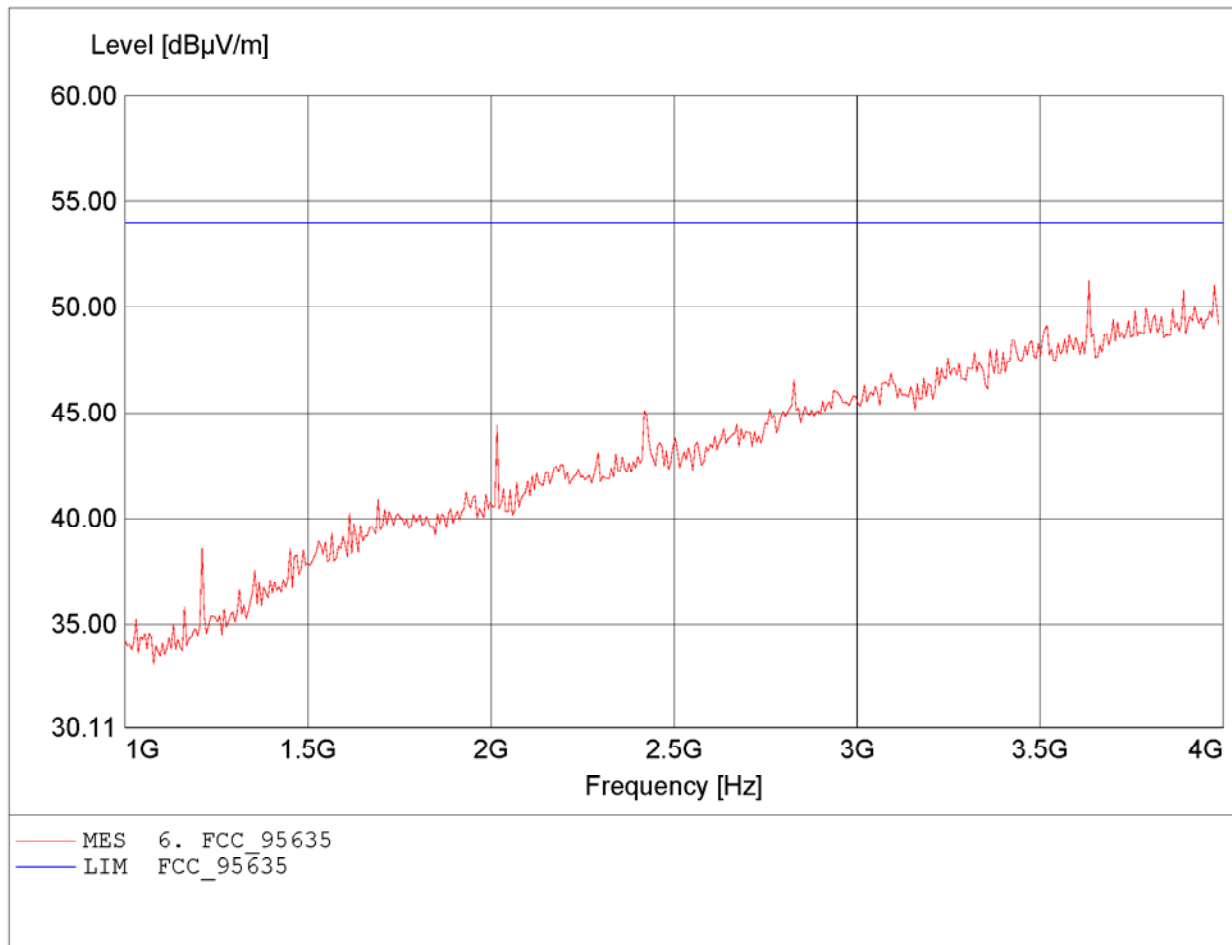


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.633GHz, Emax: 51.47dBµV/m, RBW: 100kHz

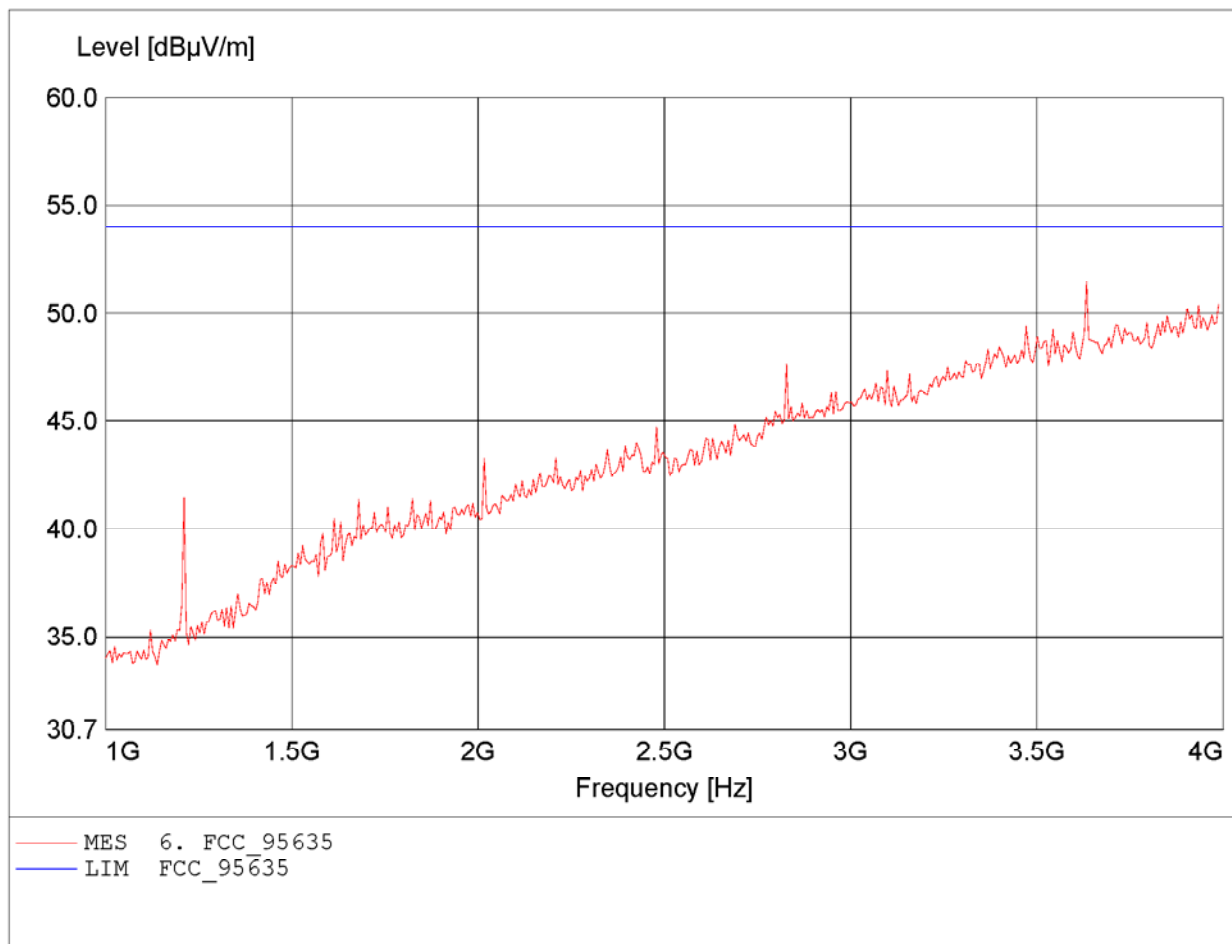


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.920GHz, Emax: 43.32dBµV/m, RBW: 1MHz

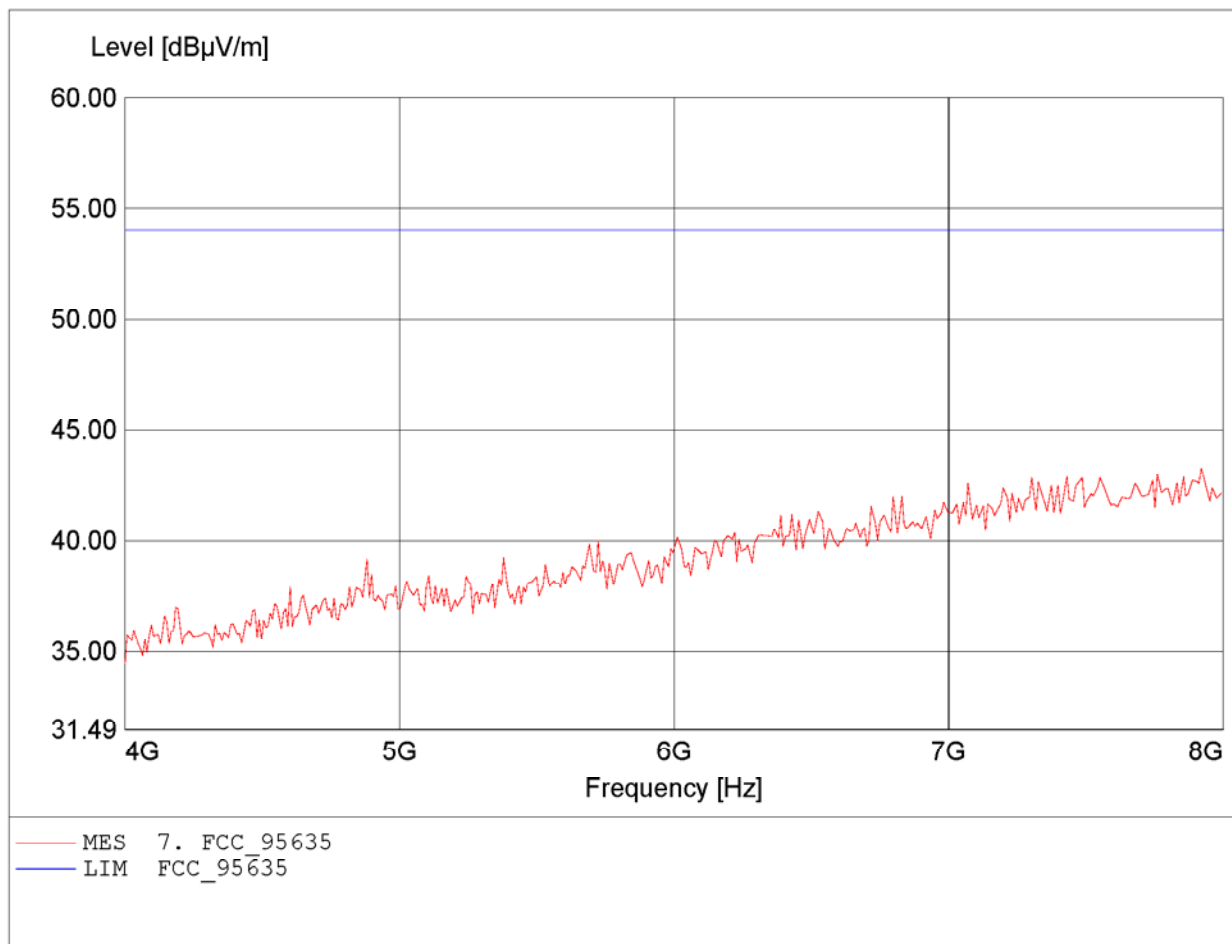


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.311GHz, Emax: 43.35dBµV/m, RBW: 1MHz

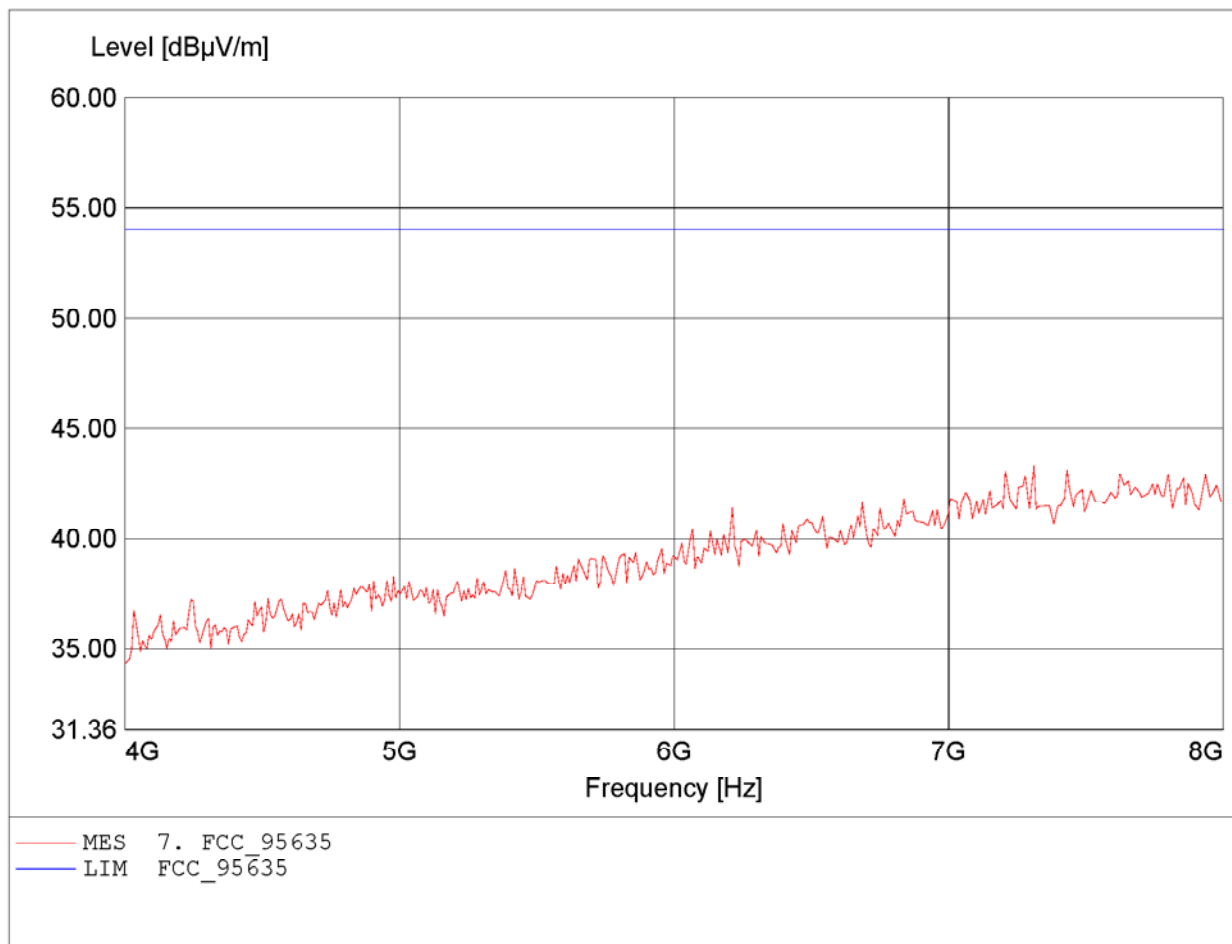


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.655MHz, Emax: 77.00dBuV/m, RBW: 100kHz

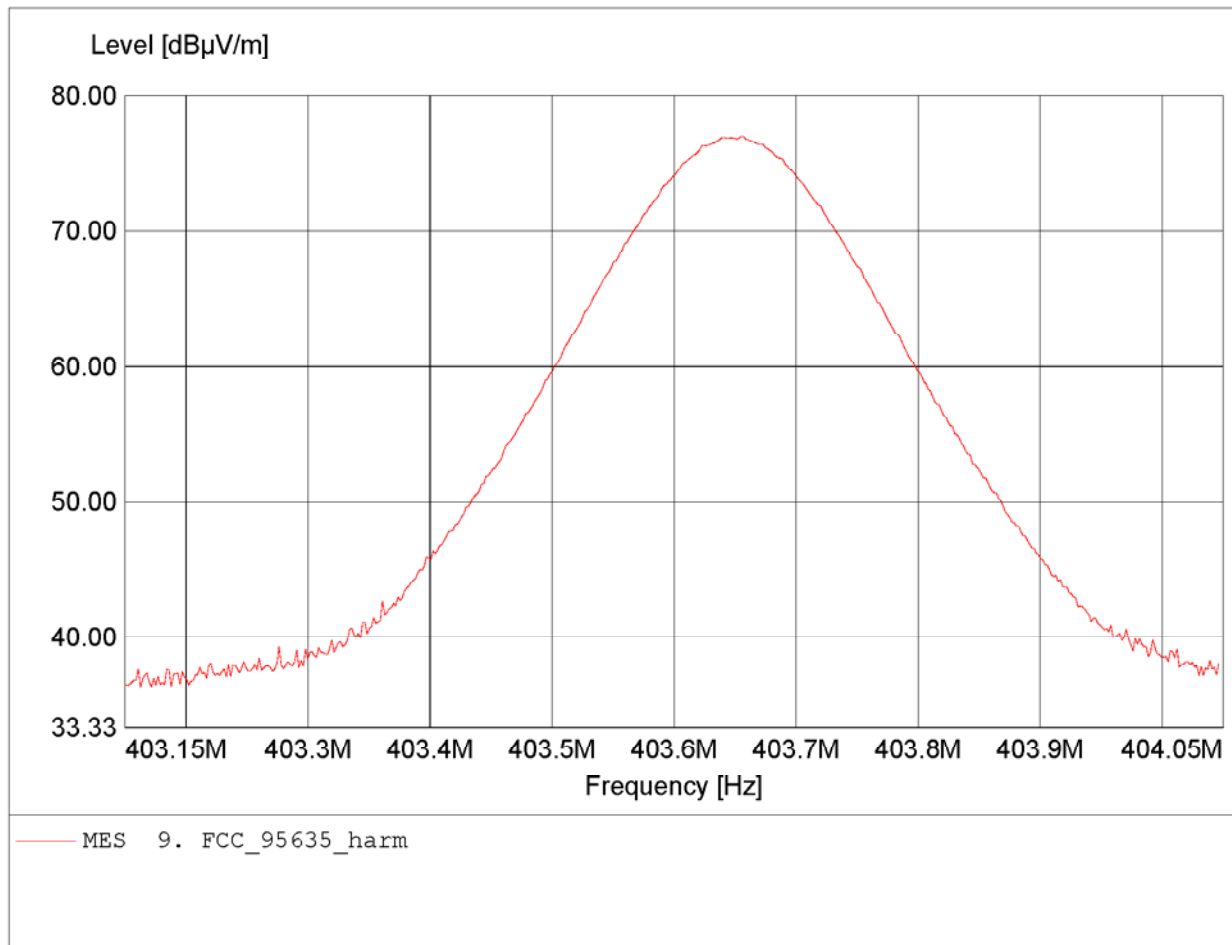


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.483MHz, Emax: 32.31dBµV/m, RBW: 100kHz

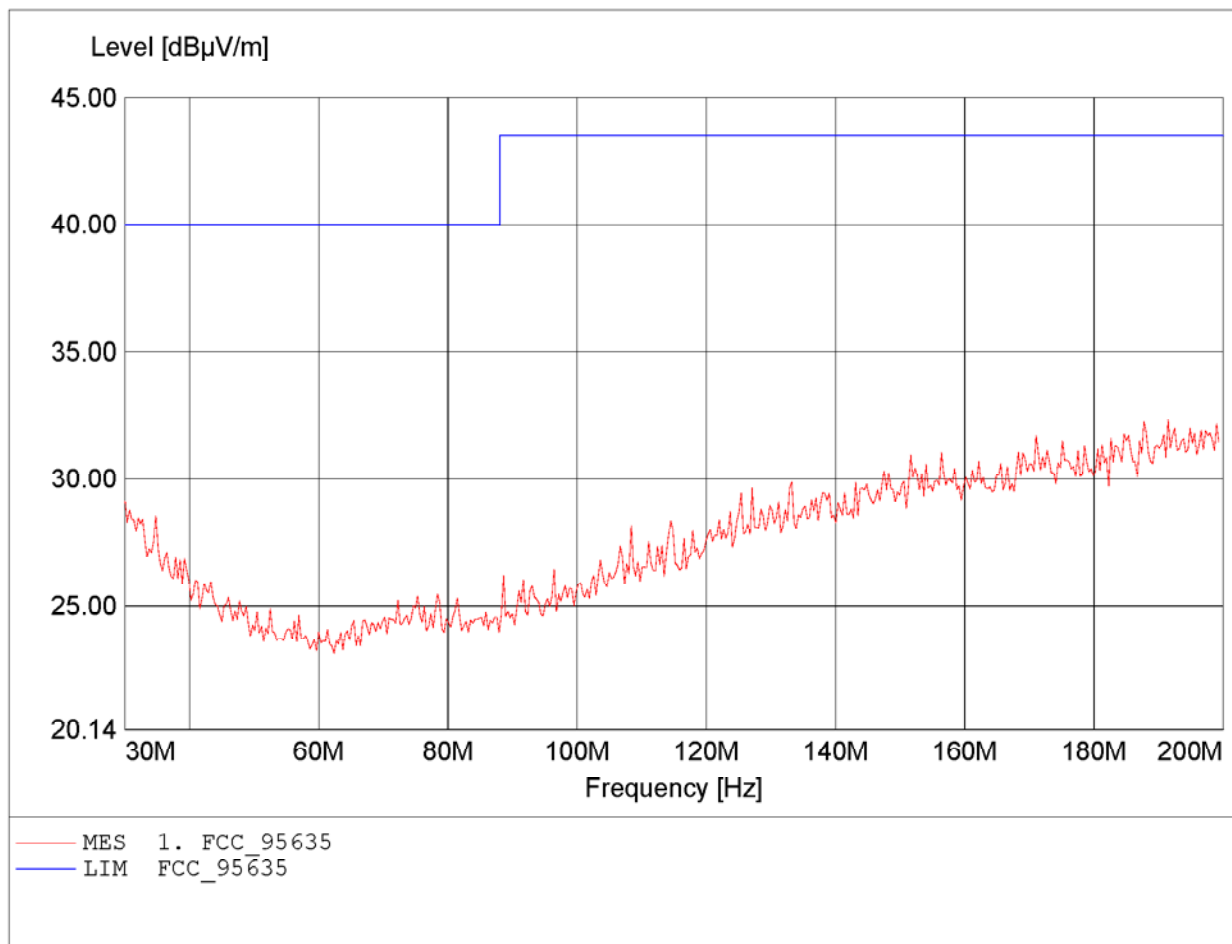


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 32.72dBµV/m, RBW: 100kHz

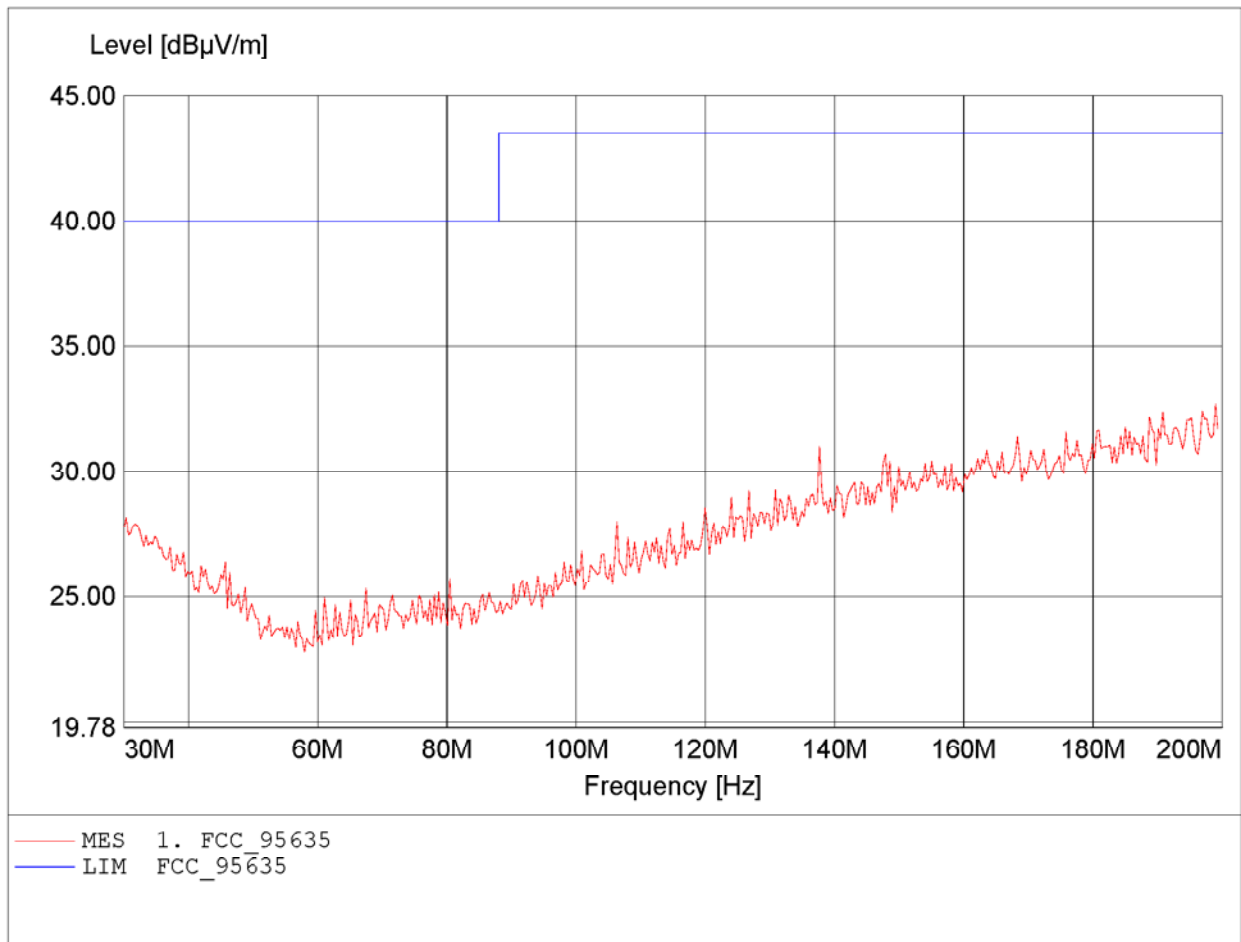


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 201.213MHz, Emax: 15.32dBµV/m, RBW: 100kHz

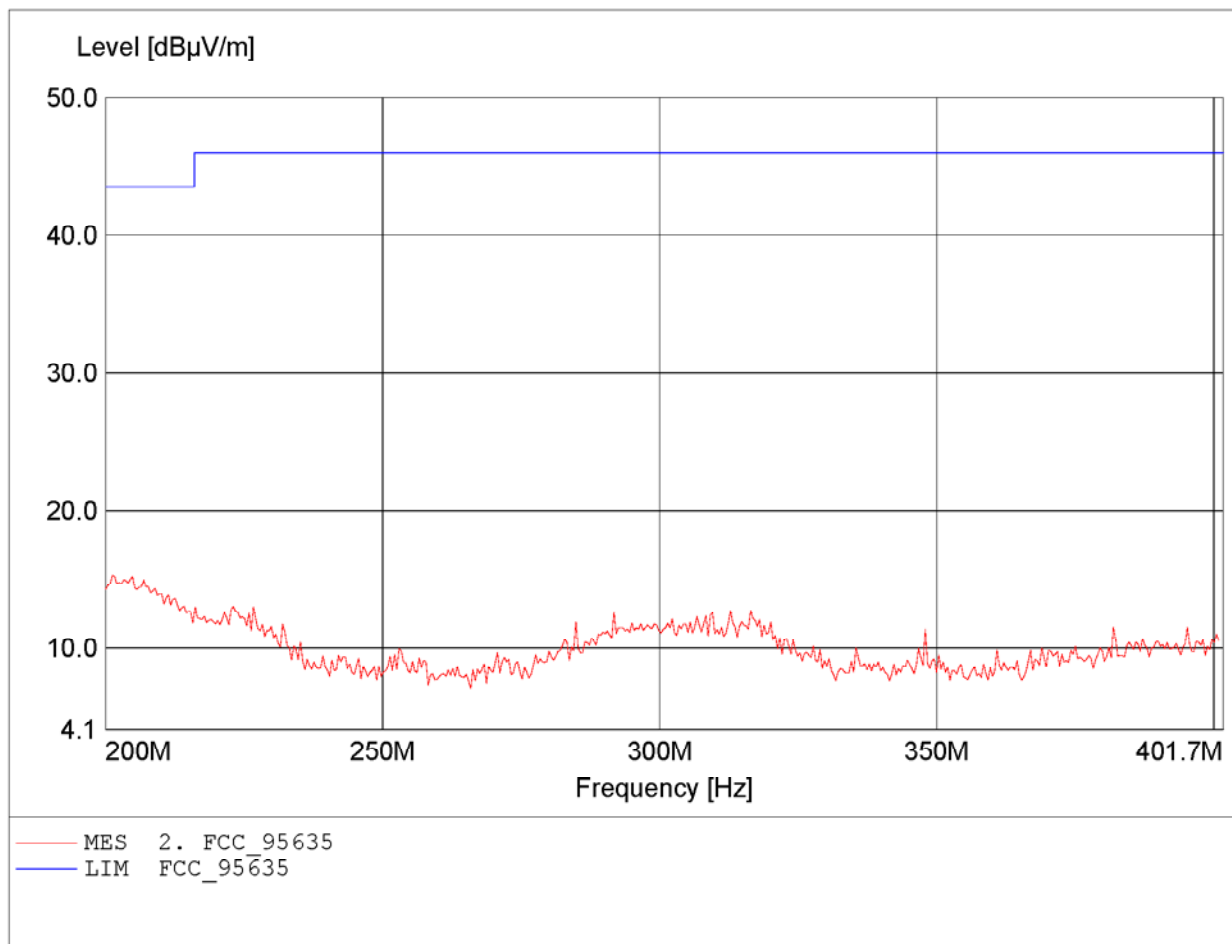


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 200.404MHz, Emax: 15.22dBµV/m, RBW: 100kHz

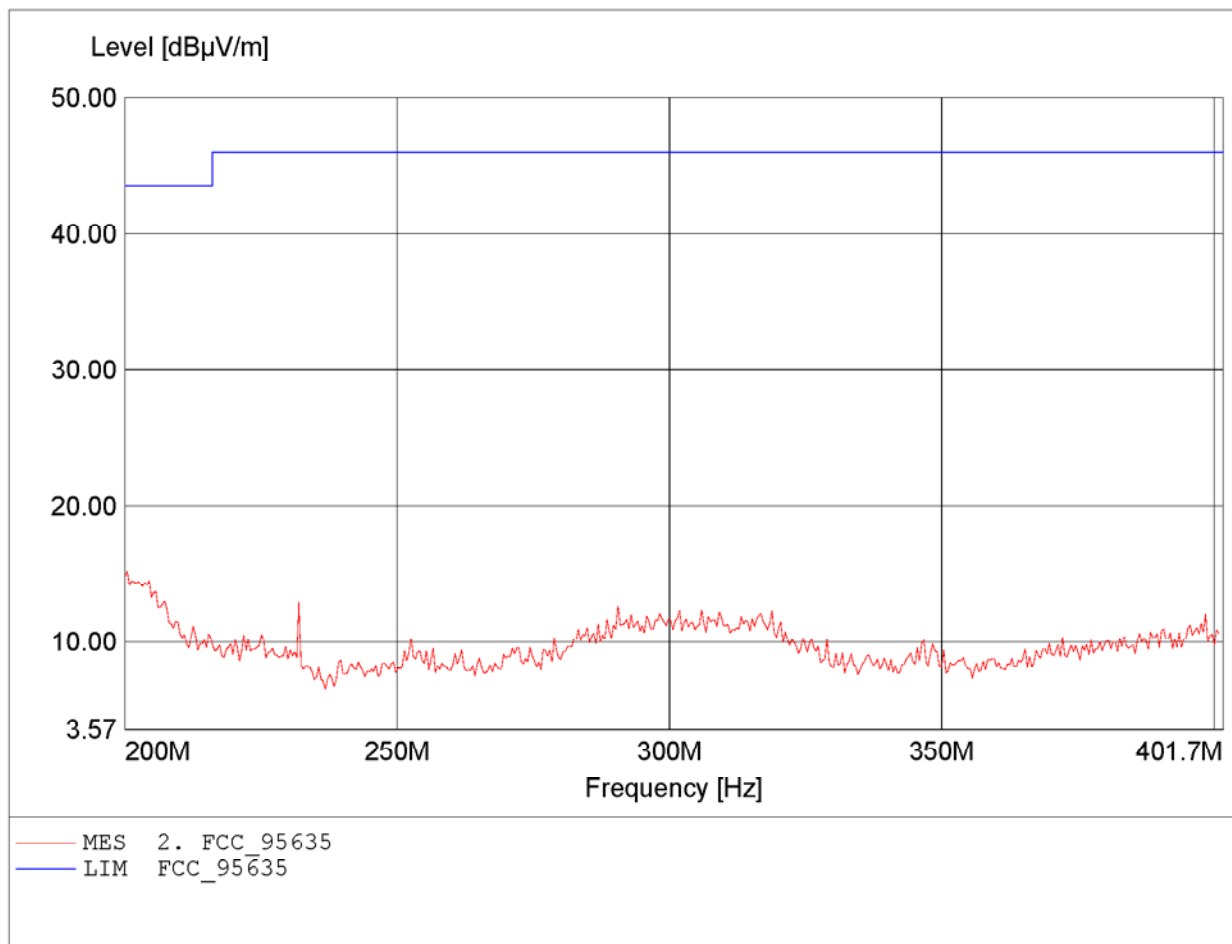


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.493MHz, Emax: 27.70dBµV/m, RBW: 3kHz

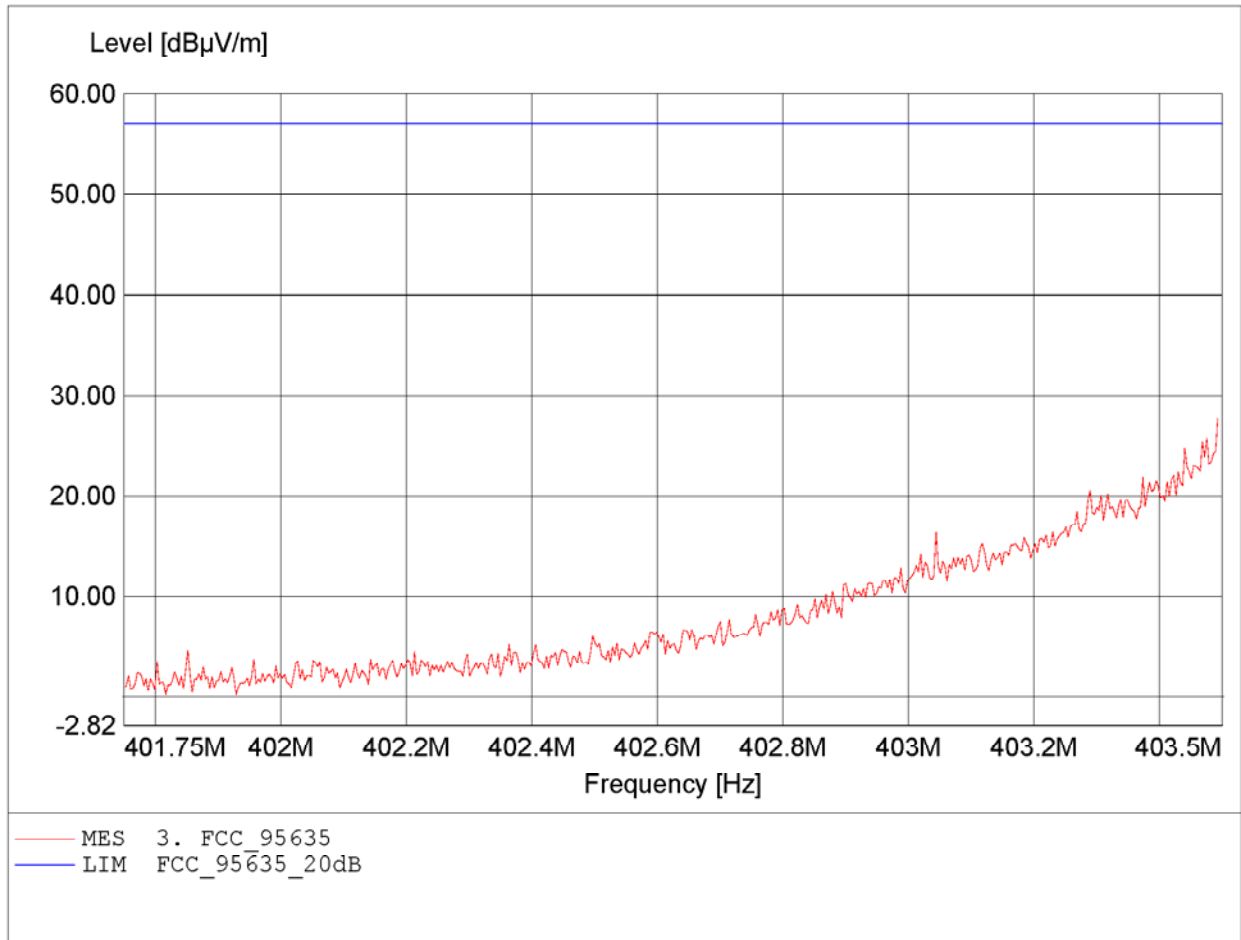


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.475MHz, Emax: 20.66dBµV/m, RBW: 3kHz

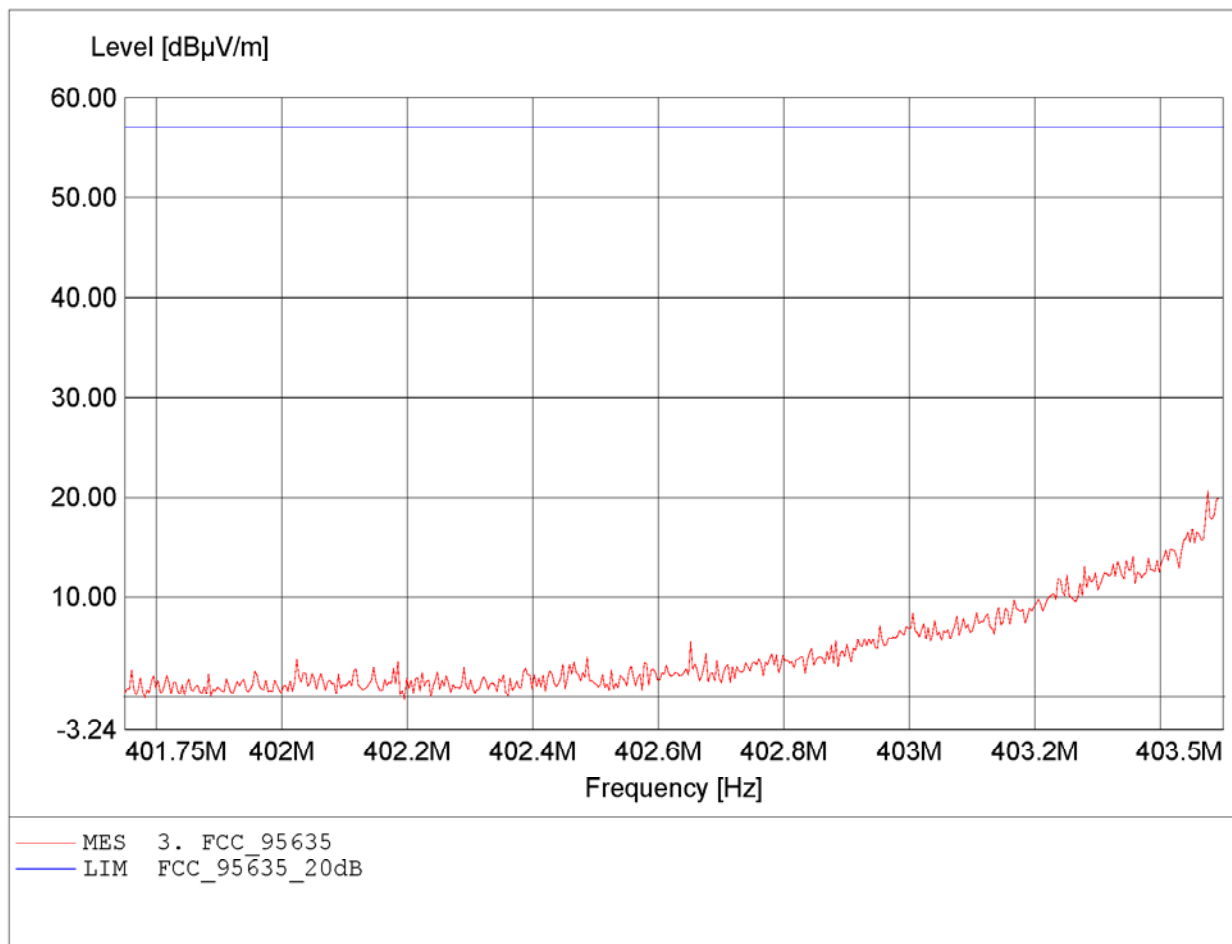


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.806MHz, Emax: 27.58dBµV/m, RBW: 3kHz

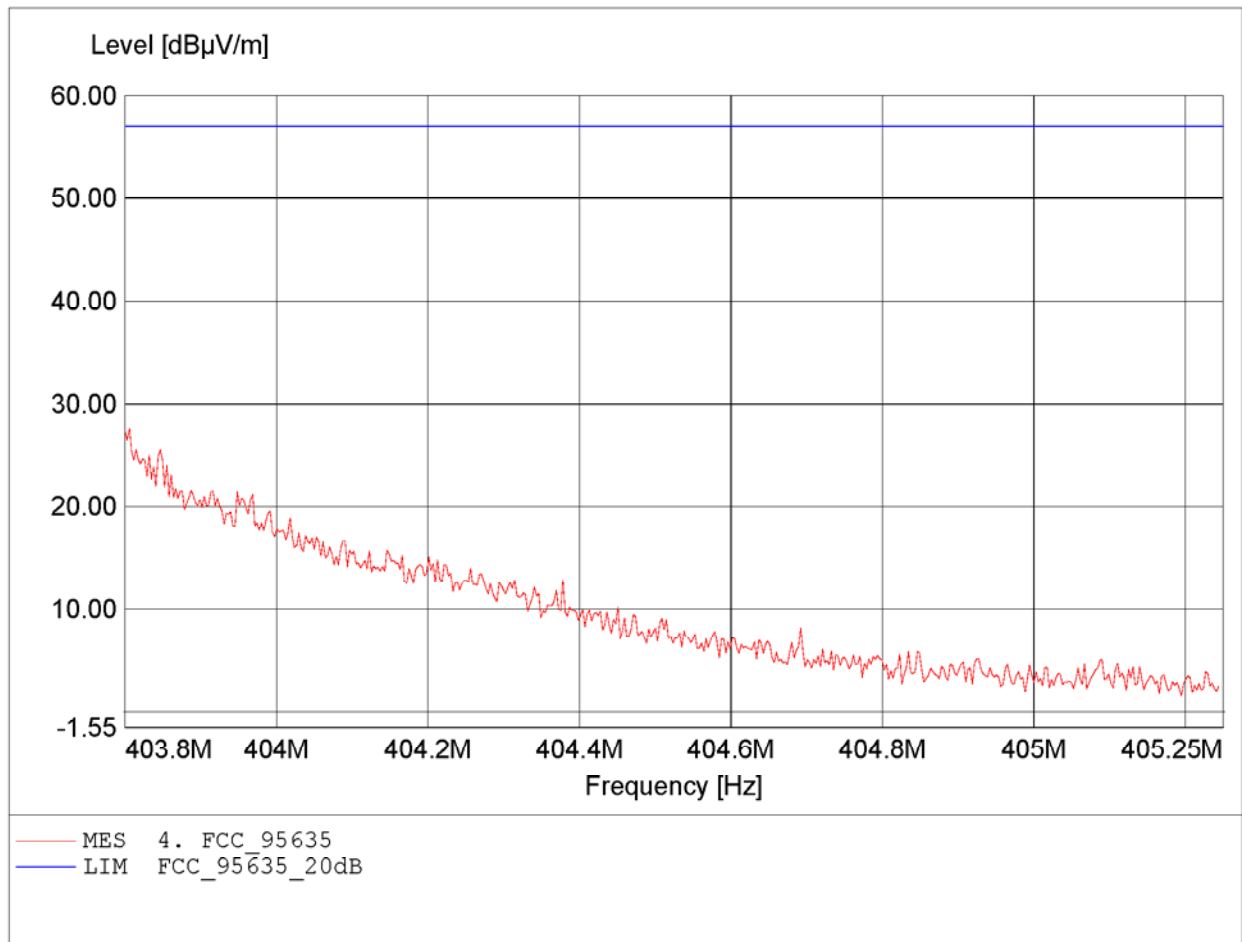


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.800MHz, Emax: 22.18dBµV/m, RBW: 3kHz

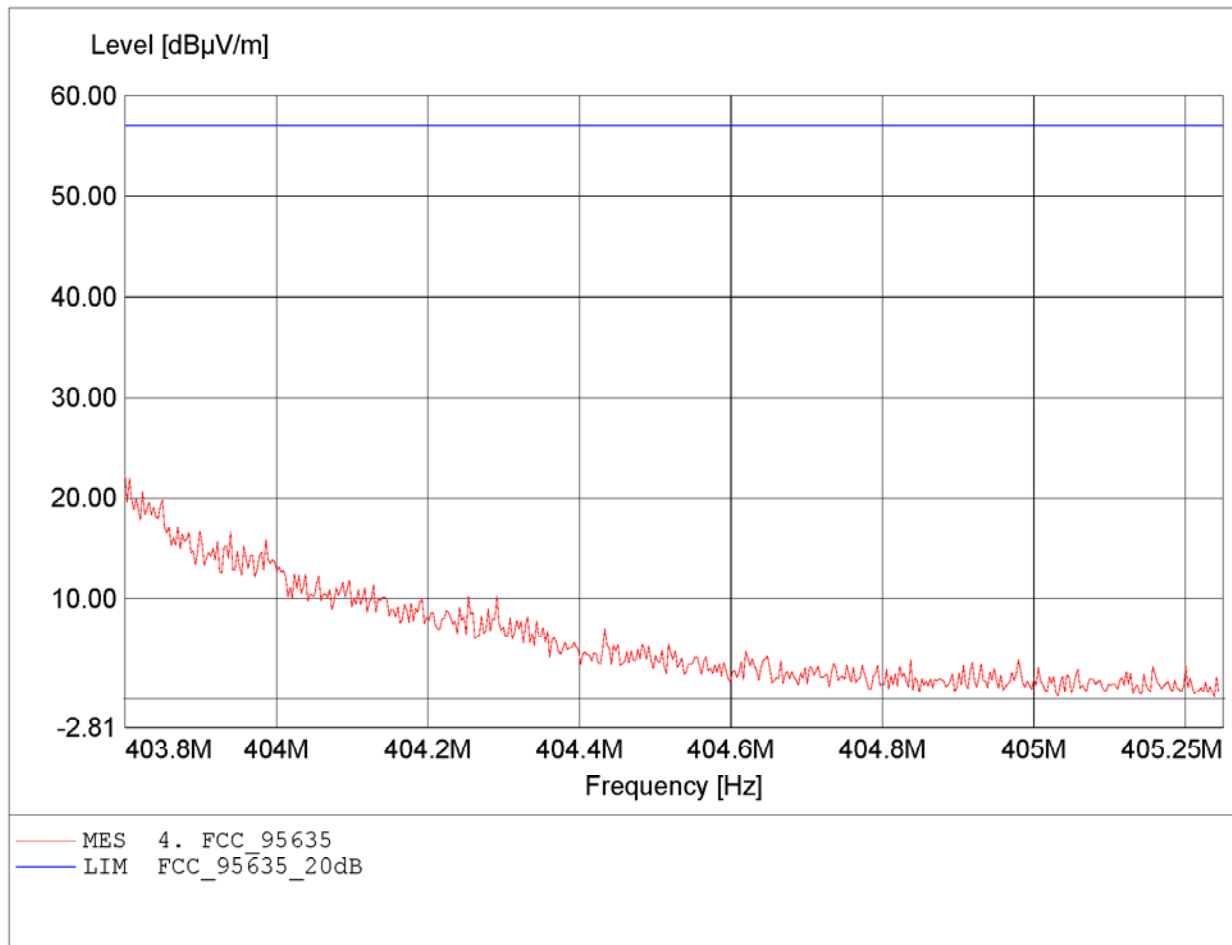


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 39.13dBµV/m, RBW: 100kHz

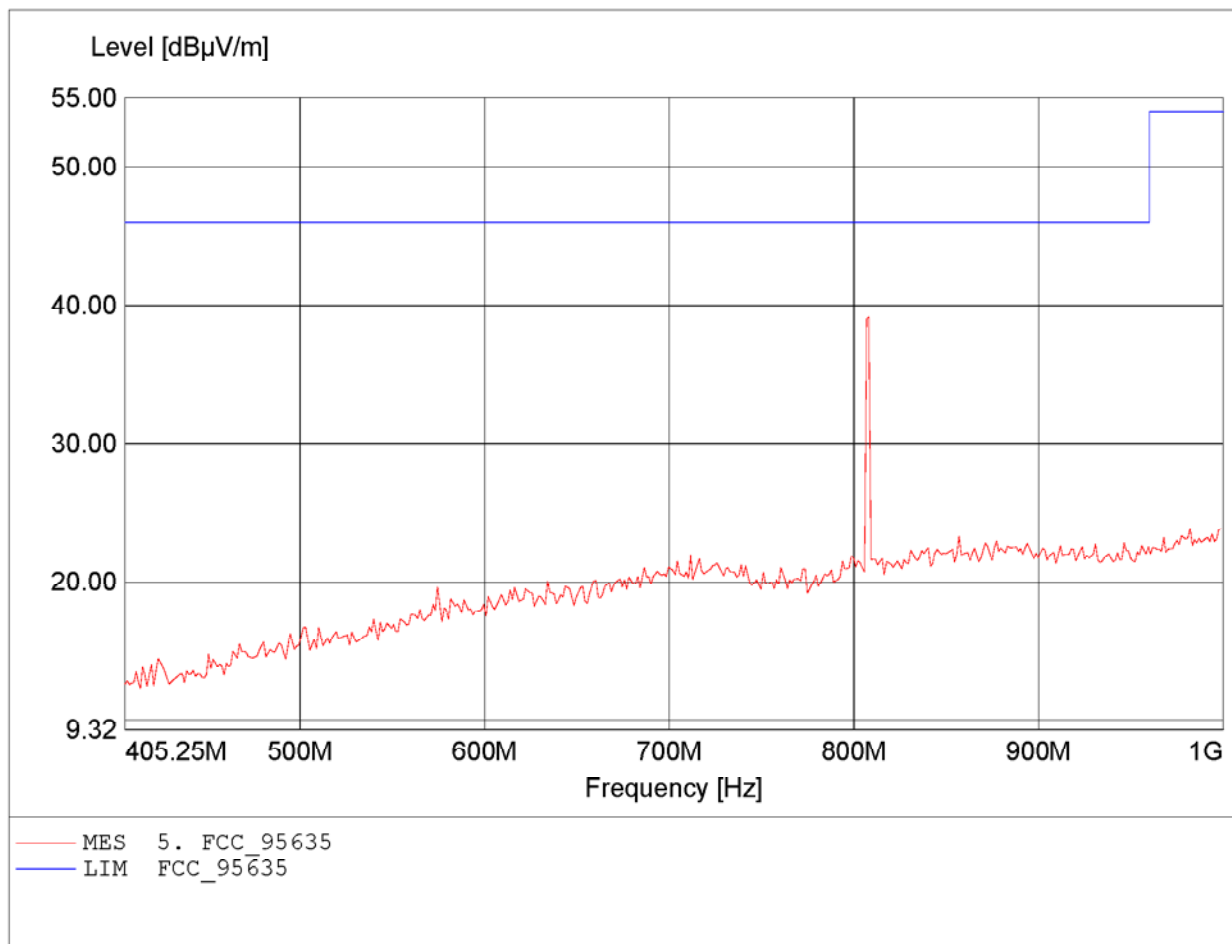


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 38.51dBµV/m, RBW: 100kHz

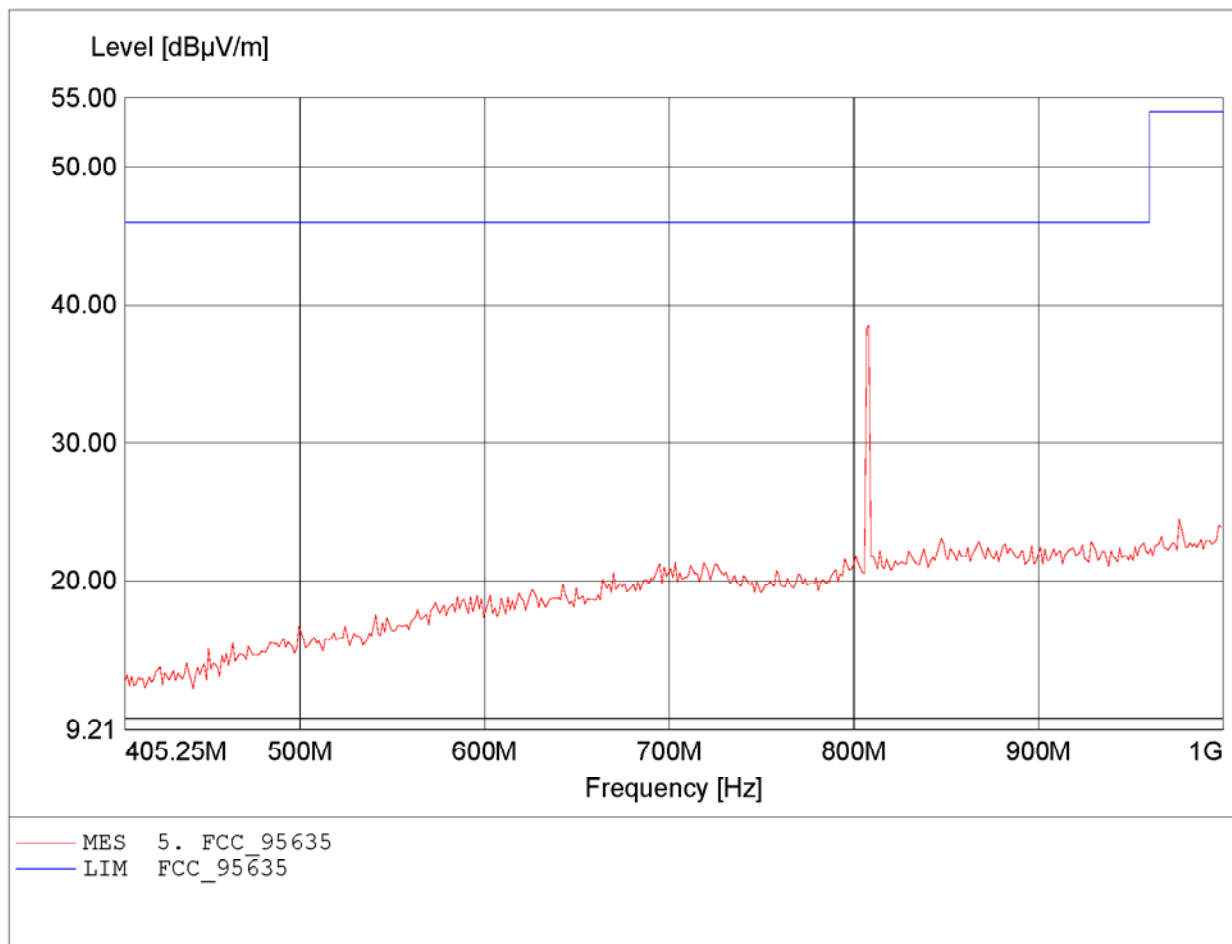


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.946GHz, Emax: 50.19dBµV/m, RBW: 100kHz

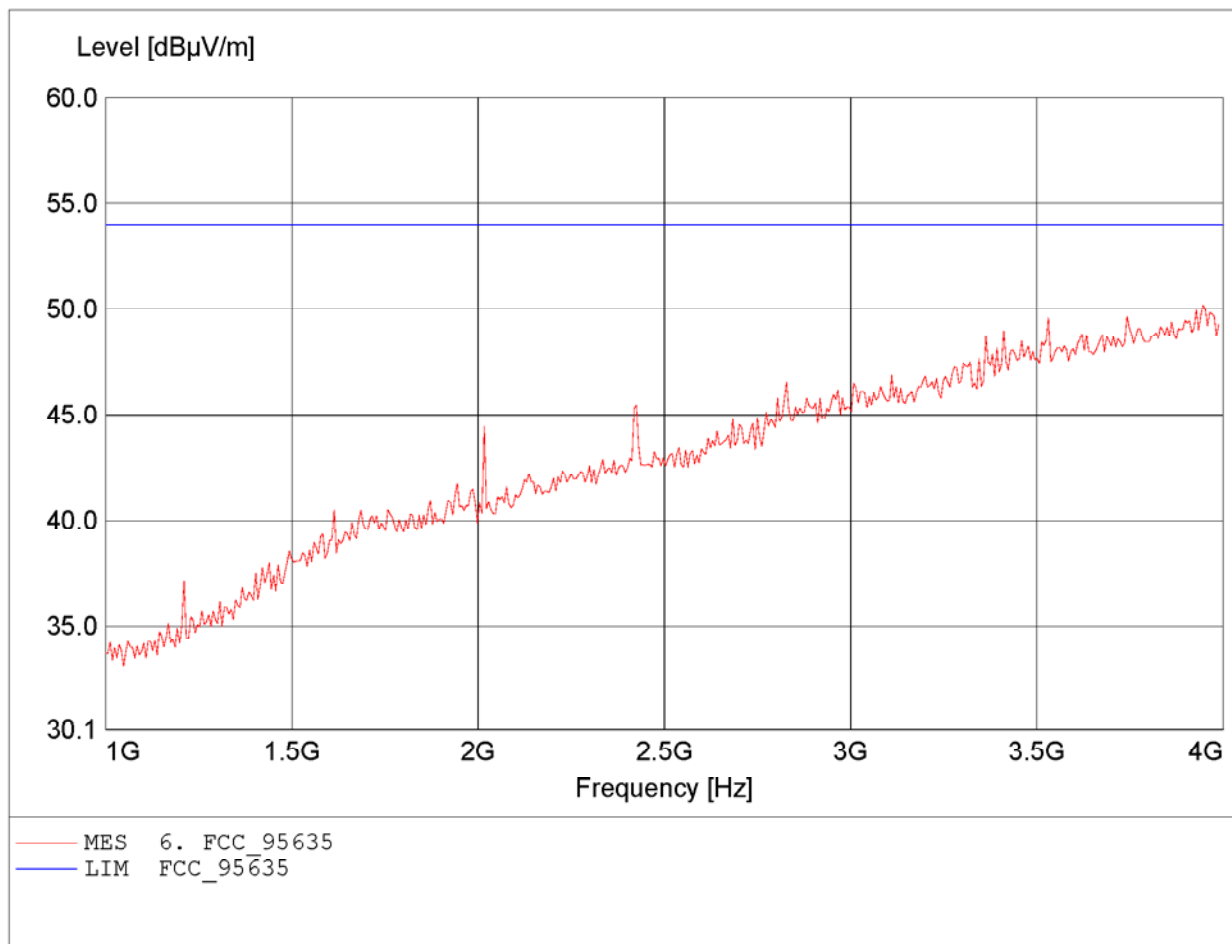


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.874GHz, Emax: 49.93dBµV/m, RBW: 100kHz

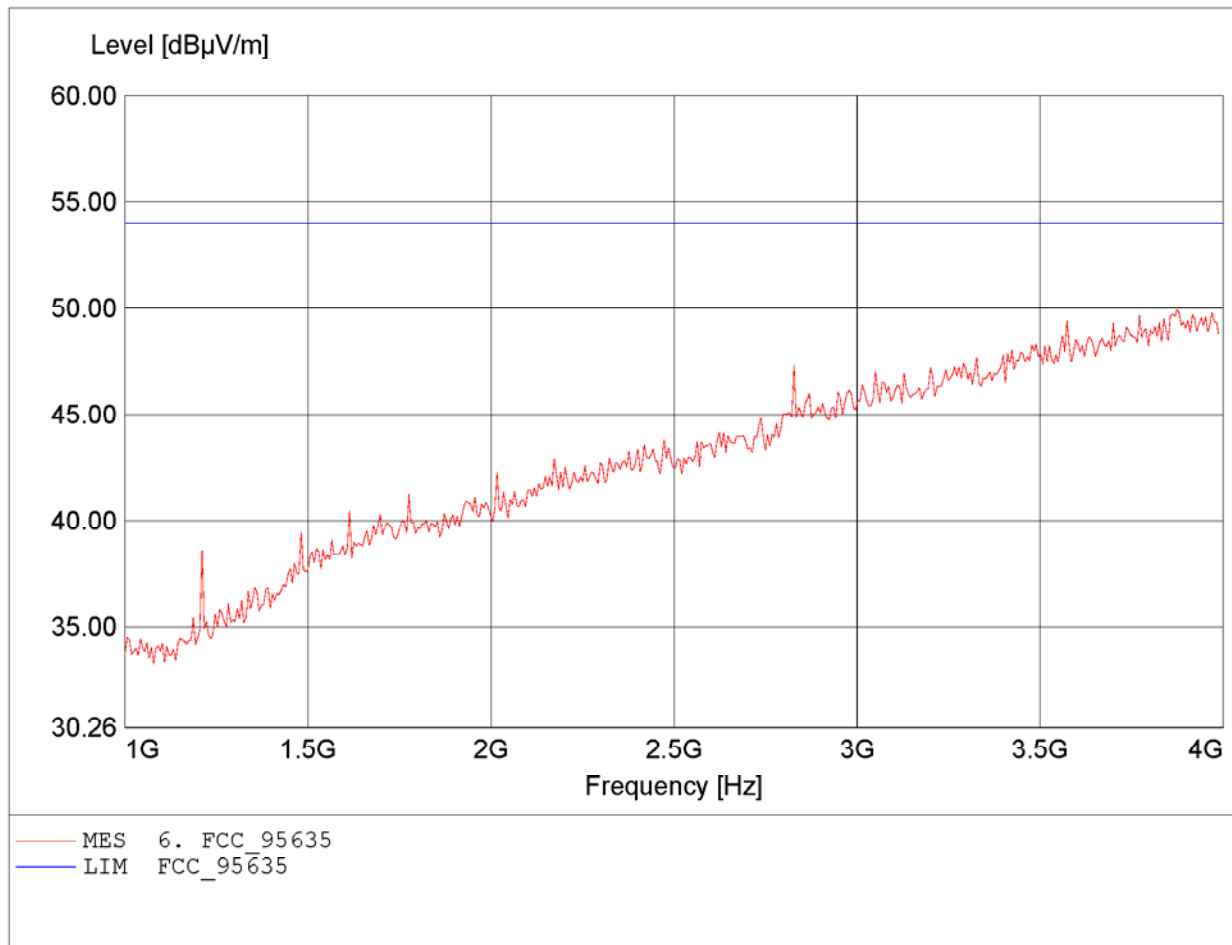


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.872GHz, Emax: 43.03dBµV/m, RBW: 1MHz

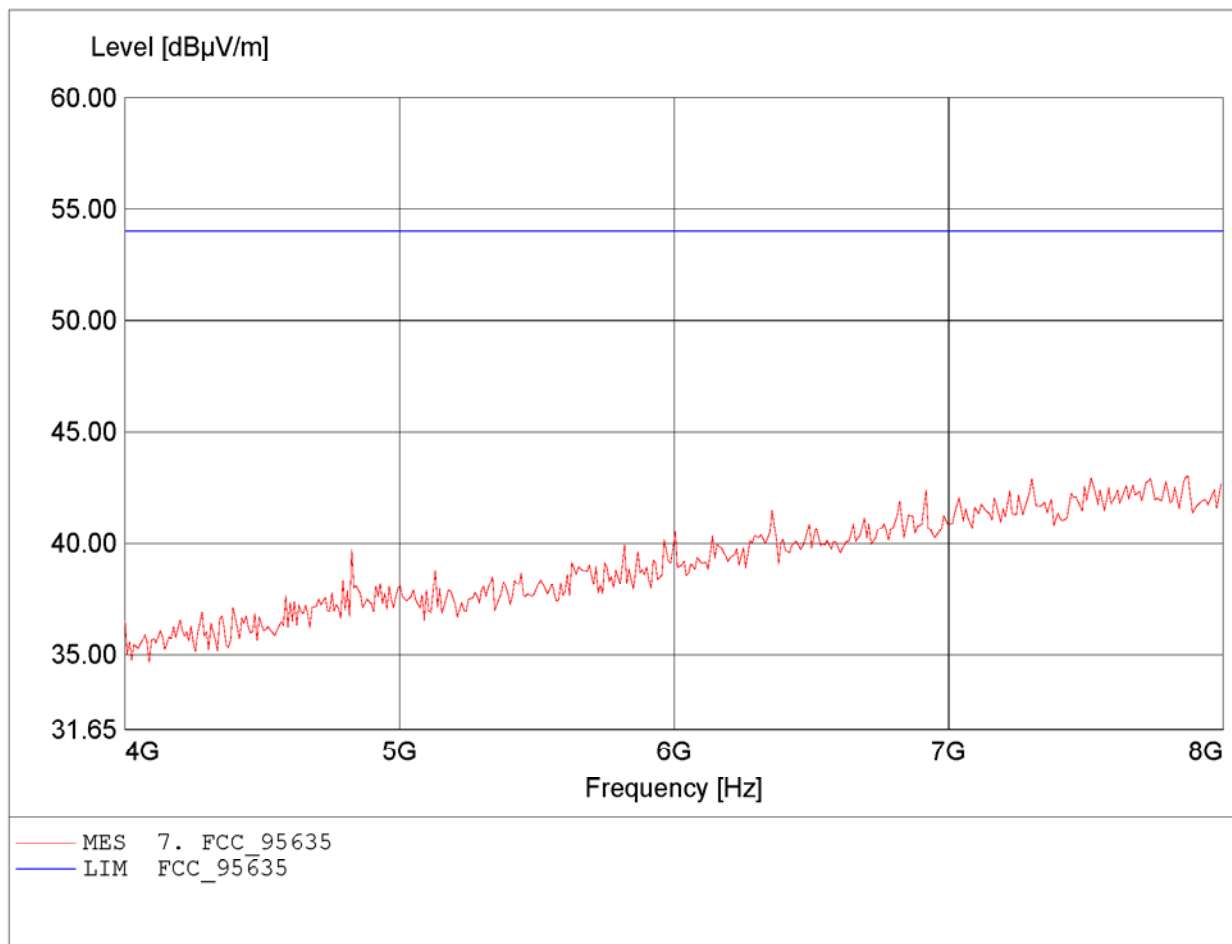


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT2456
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.559GHz, Emax: 42.93dBµV/m, RBW: 1MHz

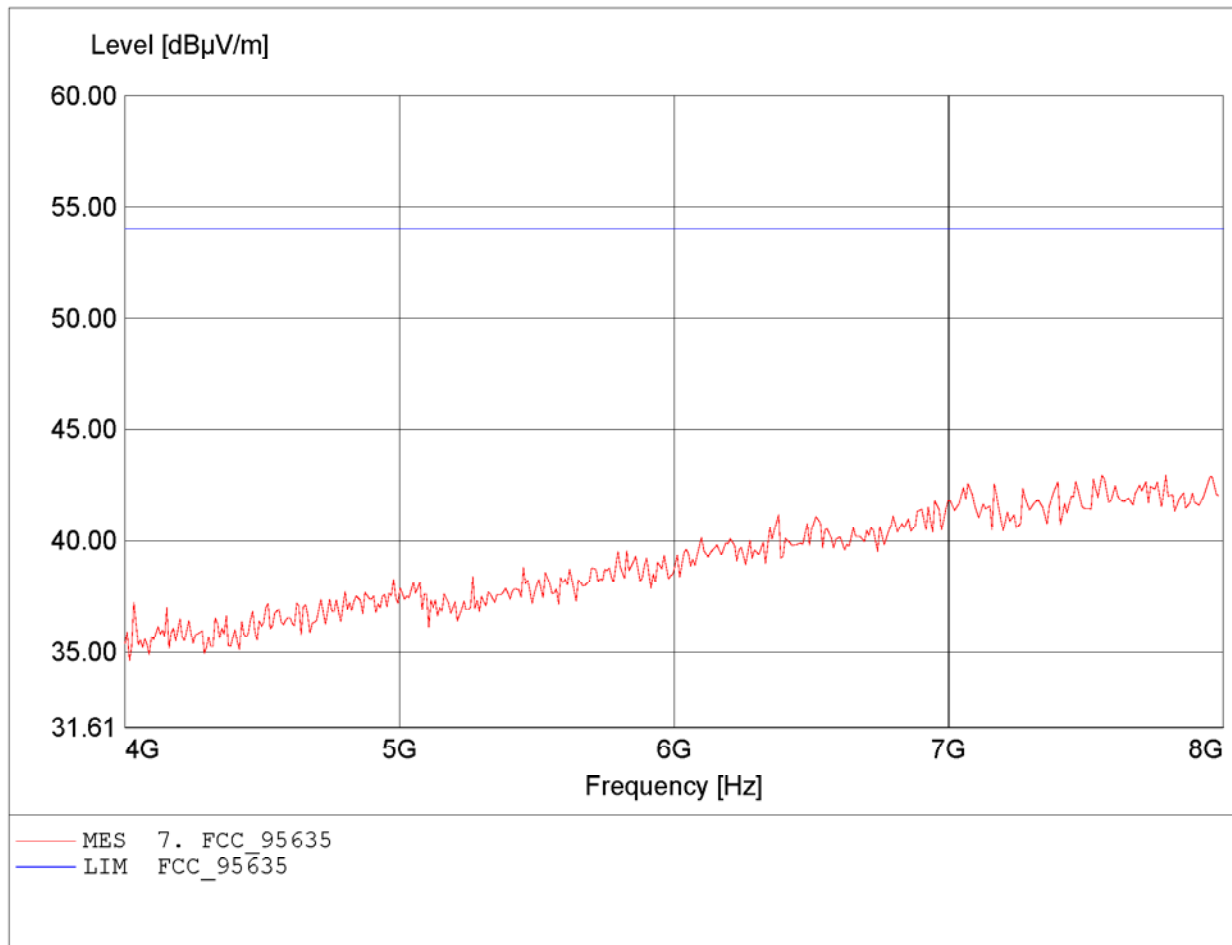


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.650MHz, Emax: 79.11dBuV/m, RBW: 100kHz

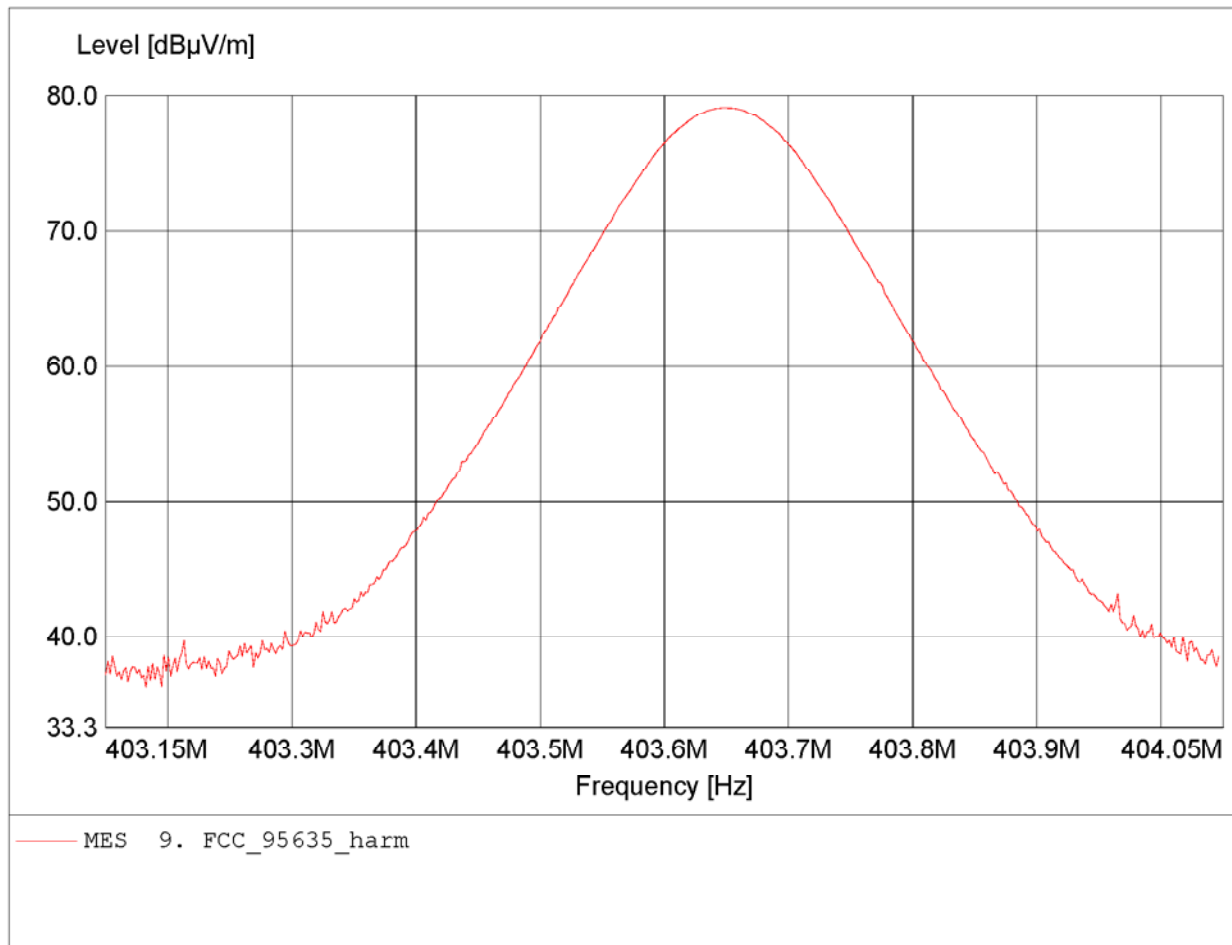


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.142MHz, Emax: 32.47dBµV/m, RBW: 100kHz

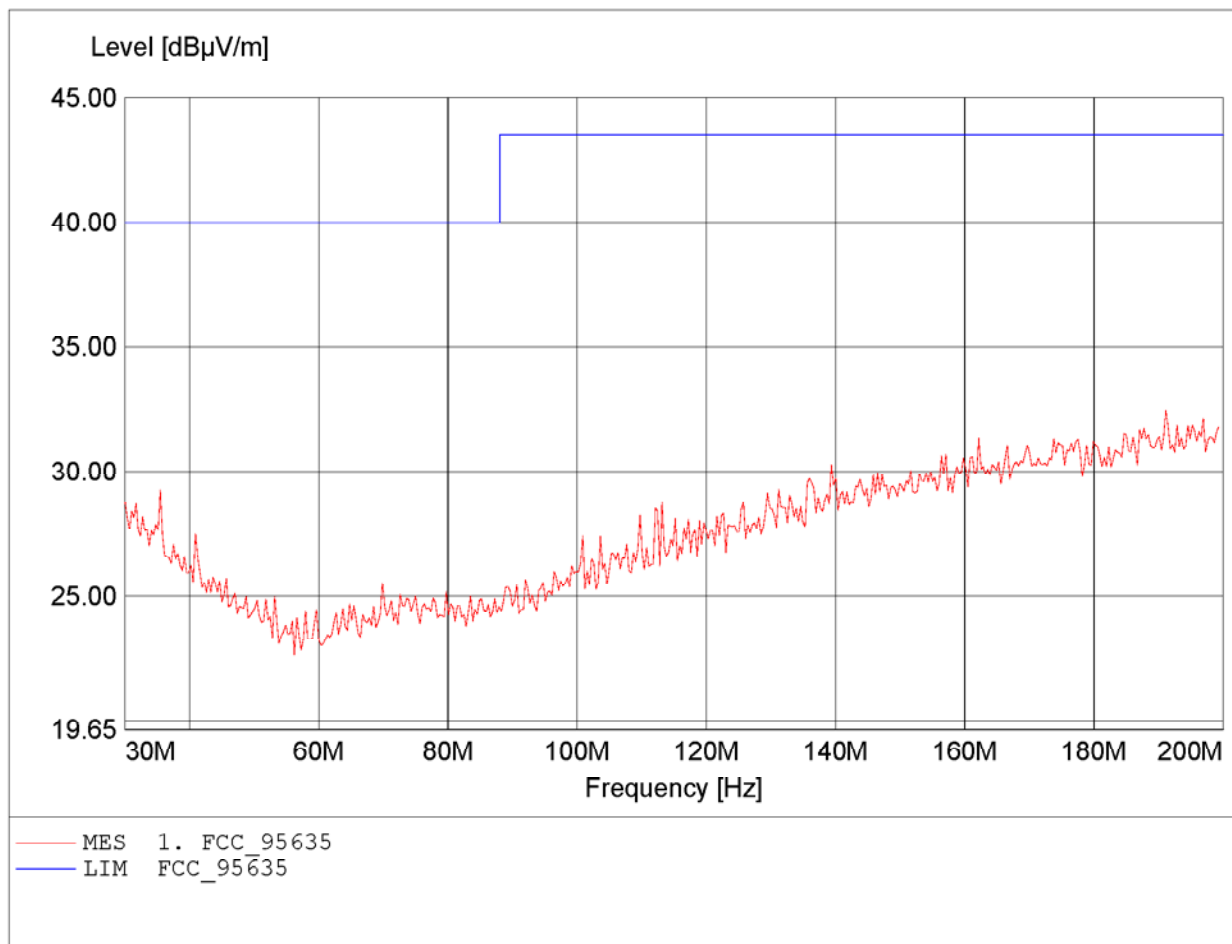


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 32.40dBµV/m, RBW: 100kHz

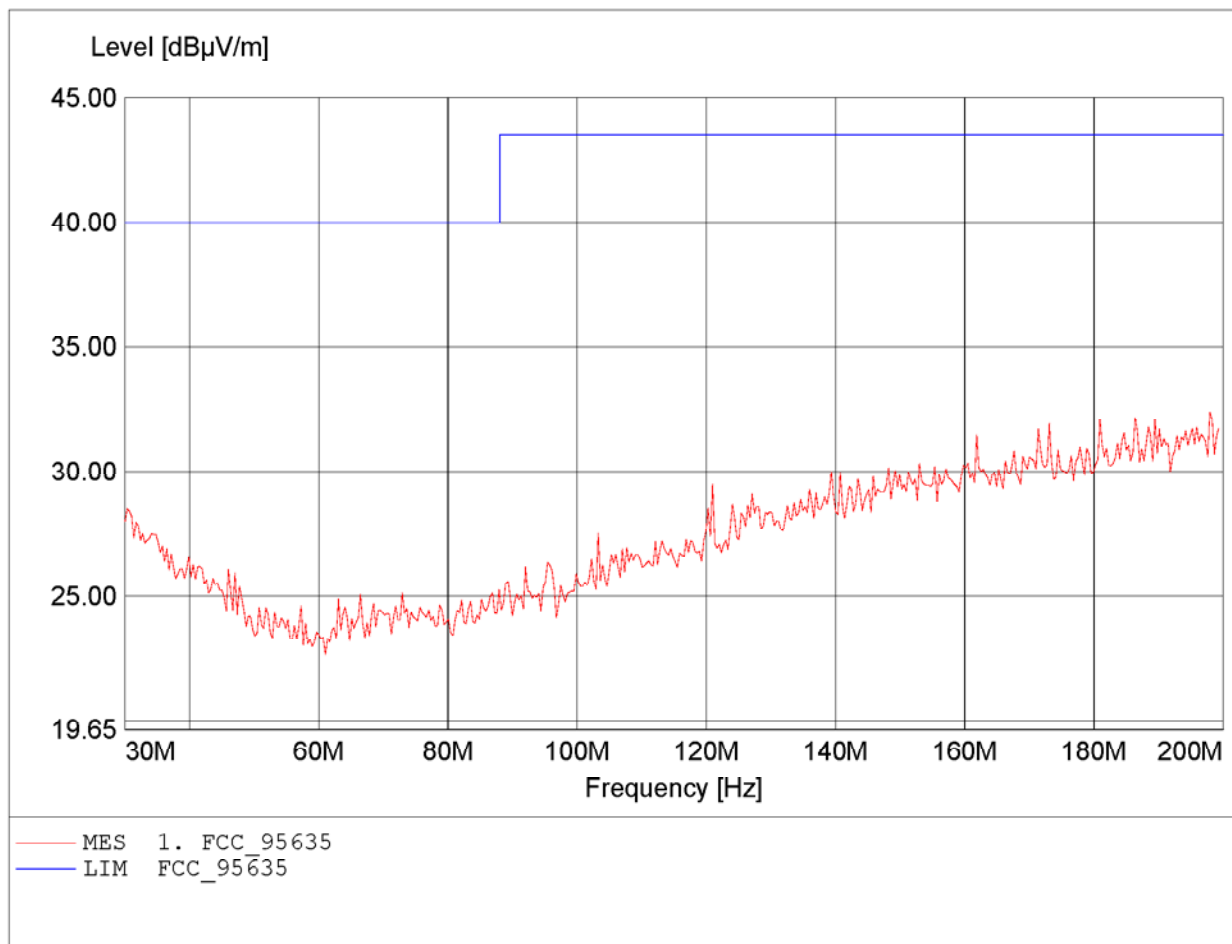


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 200.000MHz, Emax: 15.54dBµV/m, RBW: 100kHz

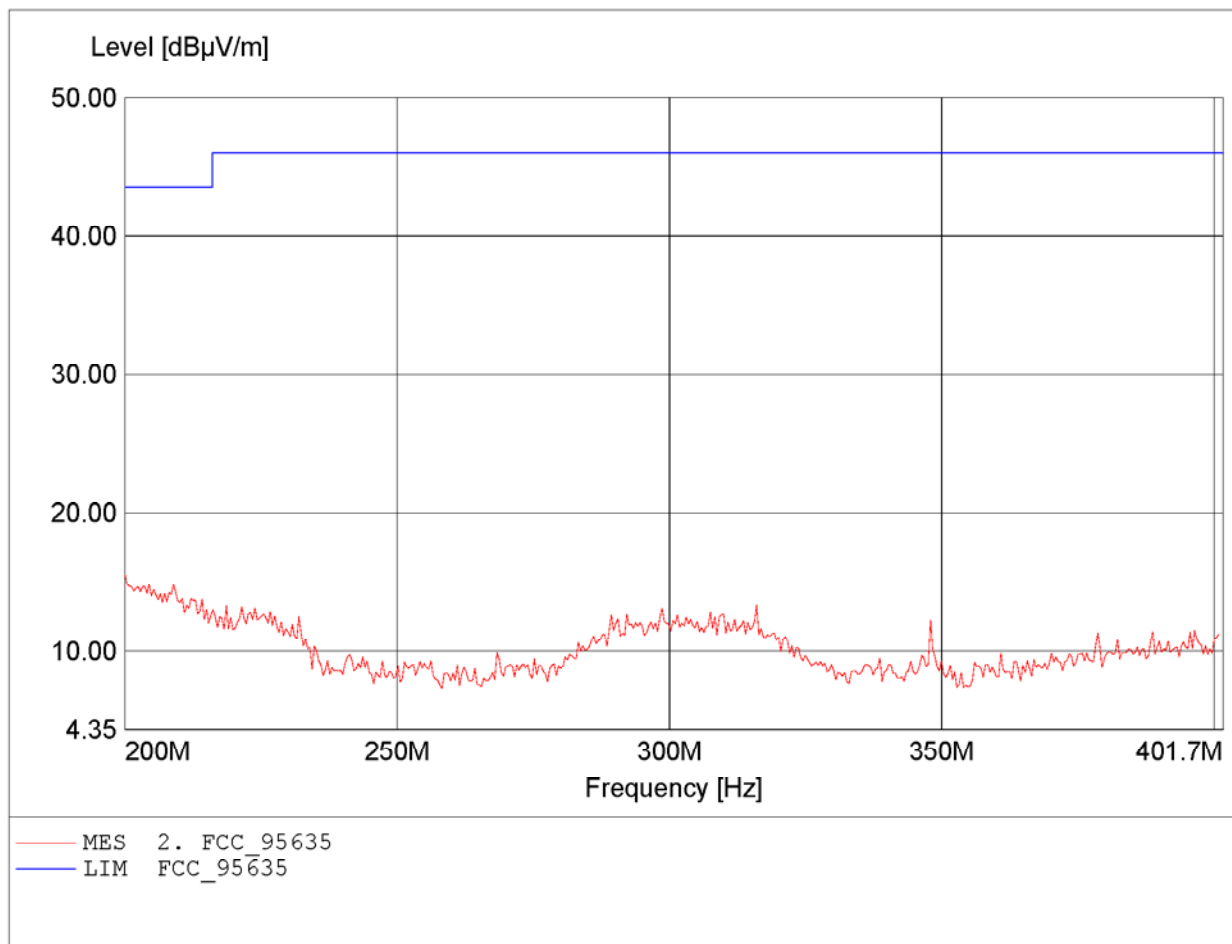


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 202.021MHz, Emax: 16.08dBµV/m, RBW: 100kHz

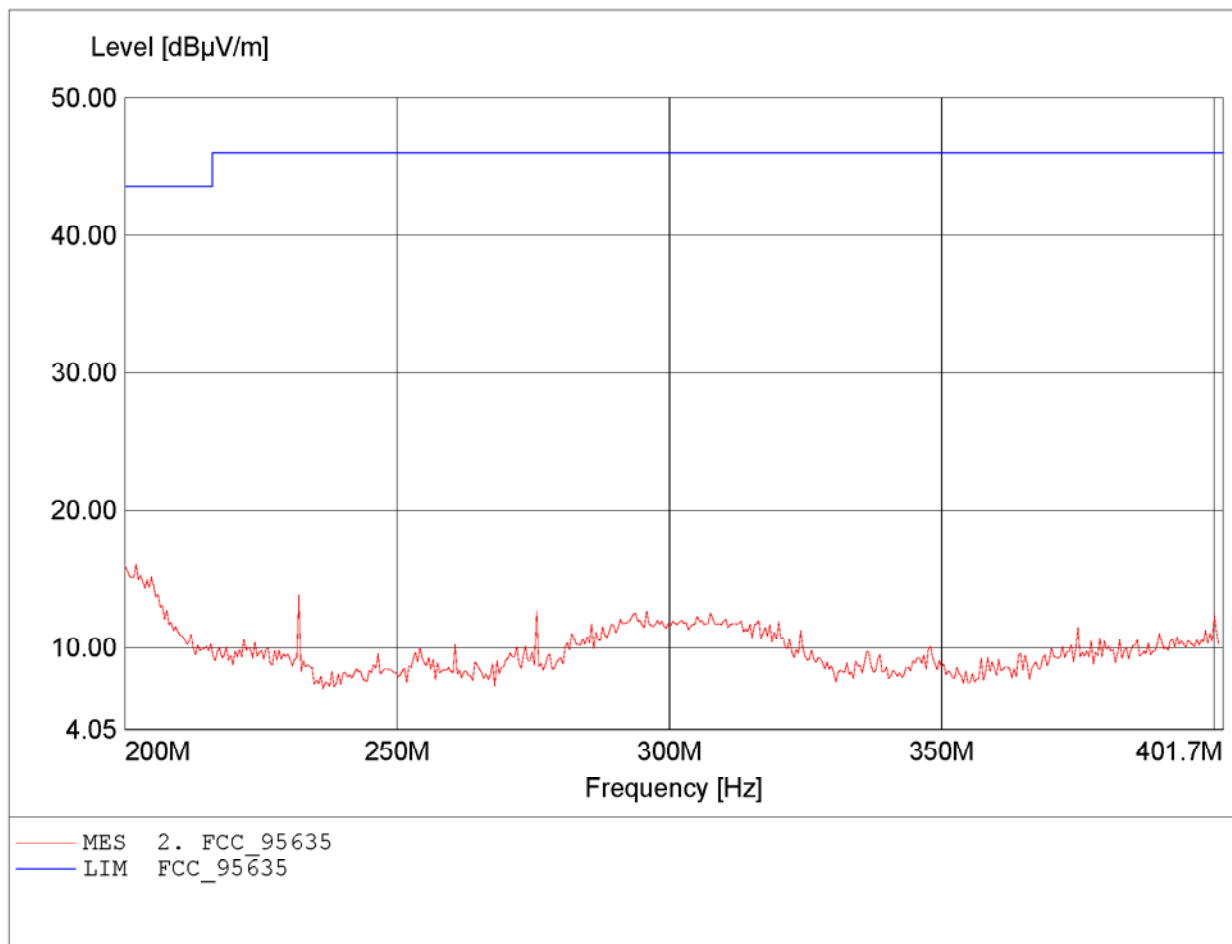


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.479MHz, Emax: 19.42dBµV/m, RBW: 3kHz

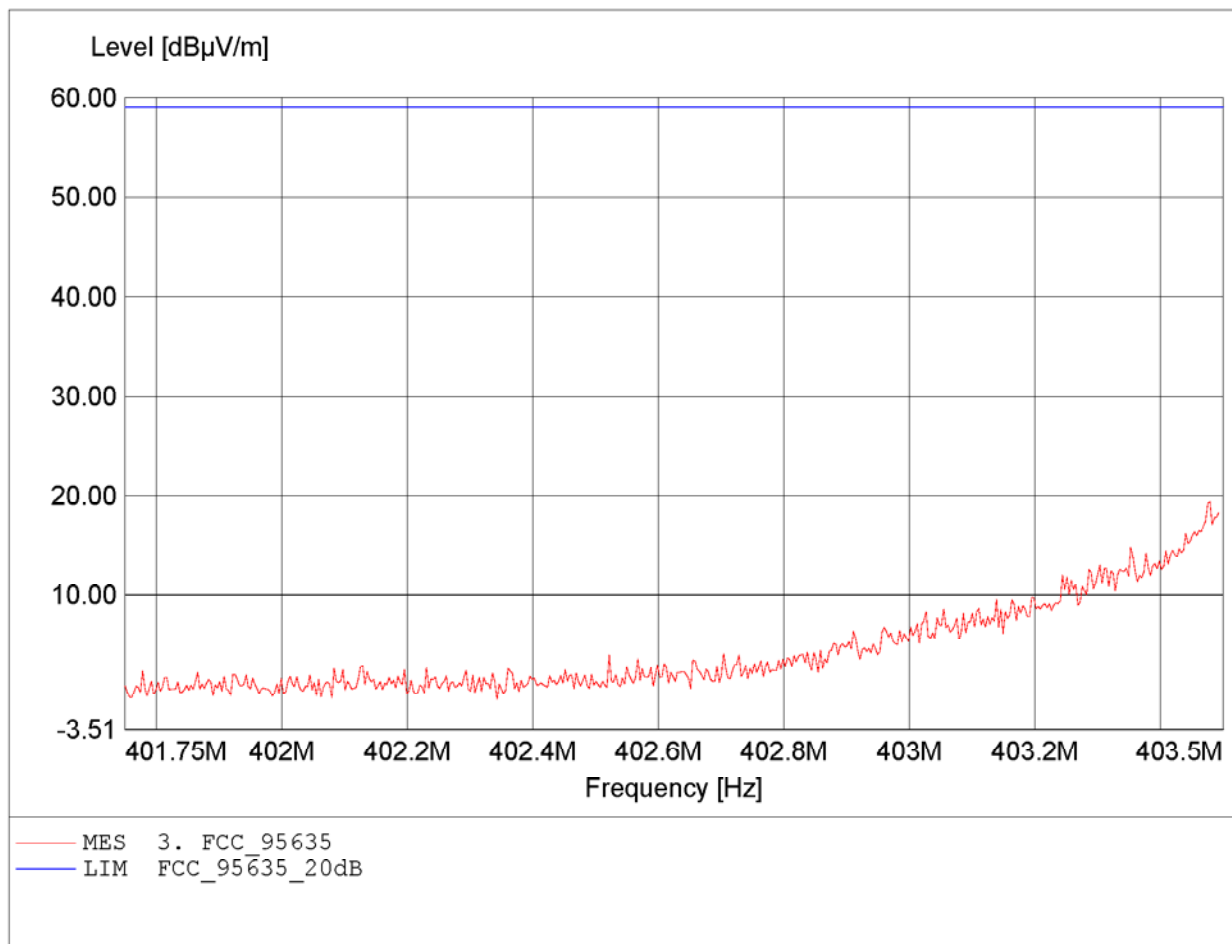


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.493MHz, Emax: 28.73dBµV/m, RBW: 3kHz

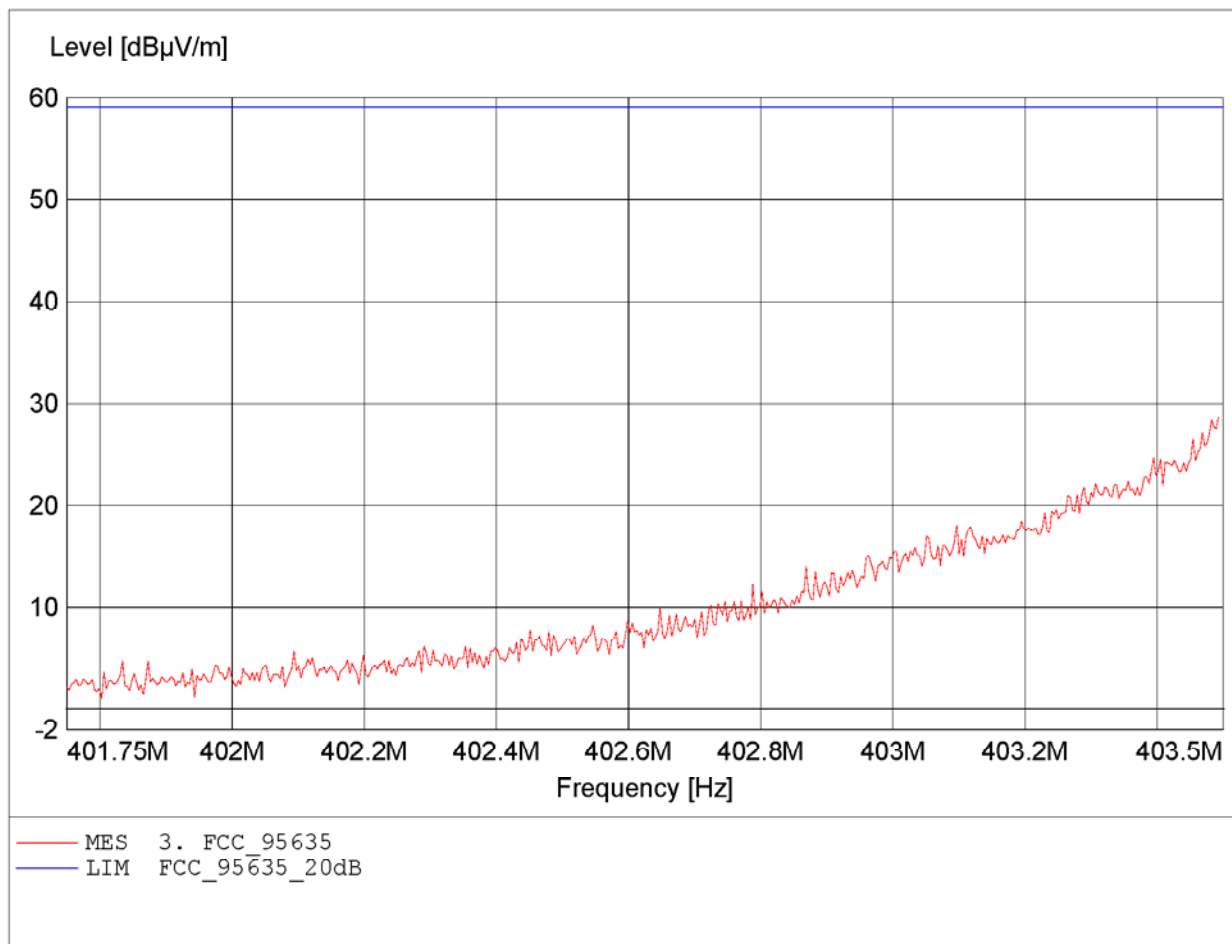


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.809MHz, Emax: 21.44dBµV/m, RBW: 3kHz

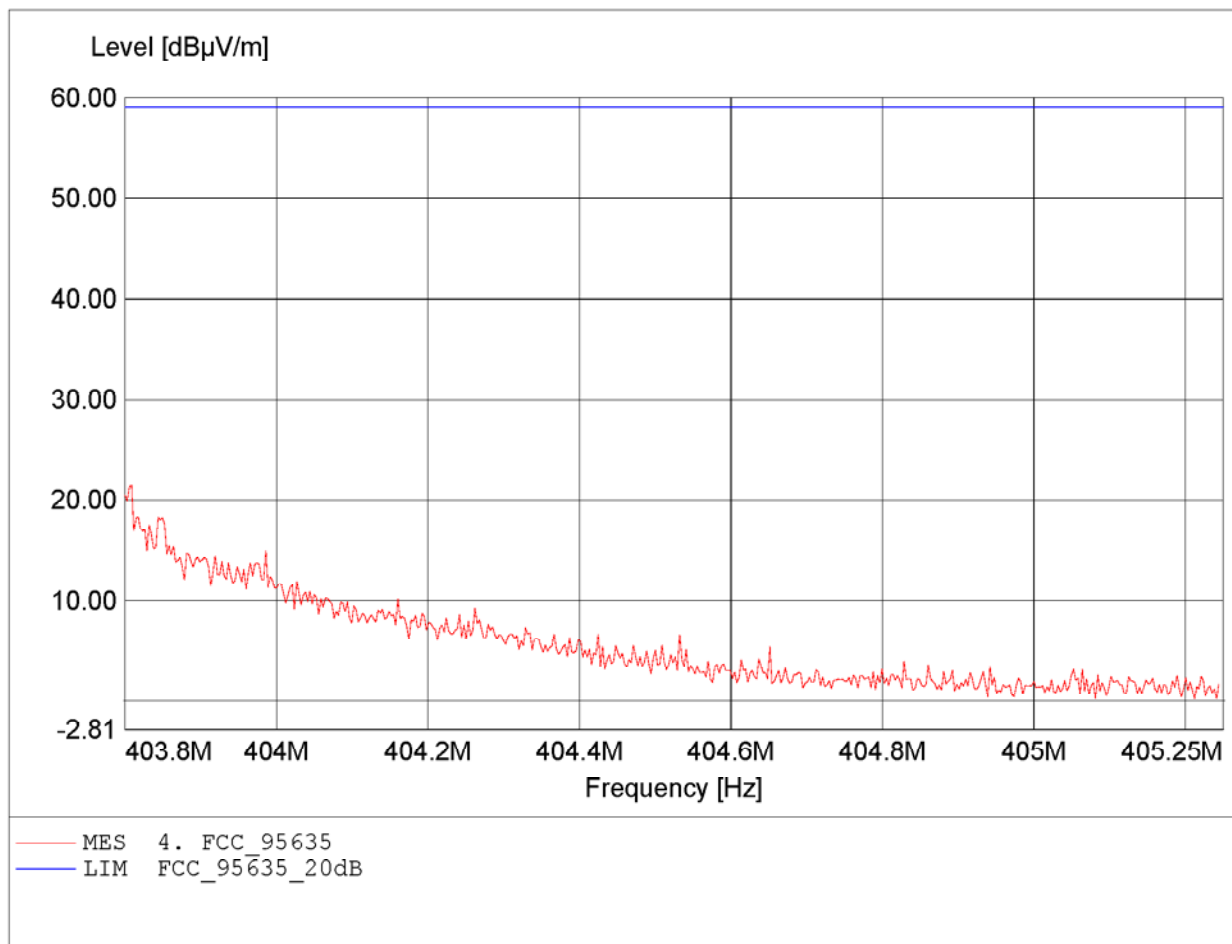


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.803MHz, Emax: 30.15dBµV/m, RBW: 3kHz

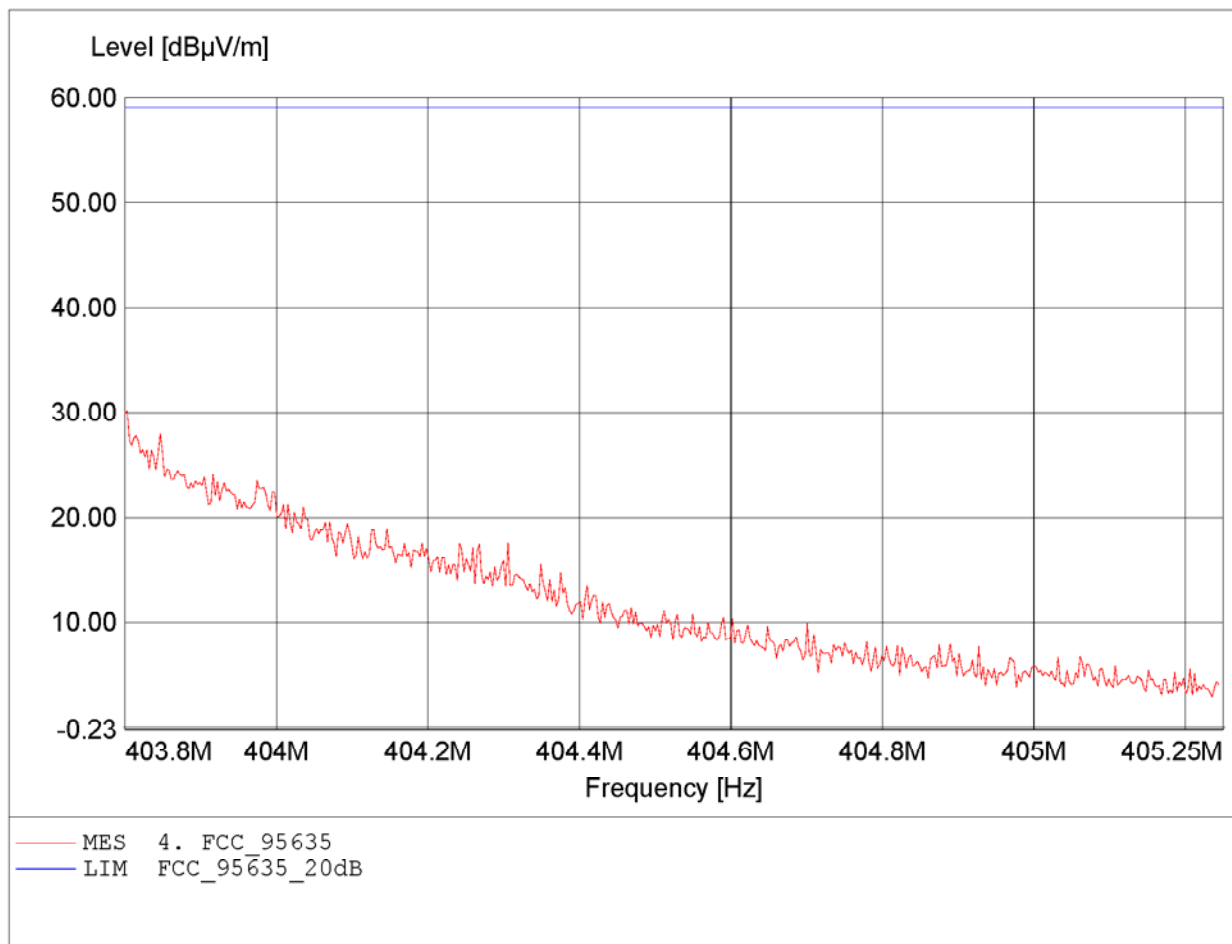


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 806.915MHz, Emax: 39.13dBµV/m, RBW: 100kHz

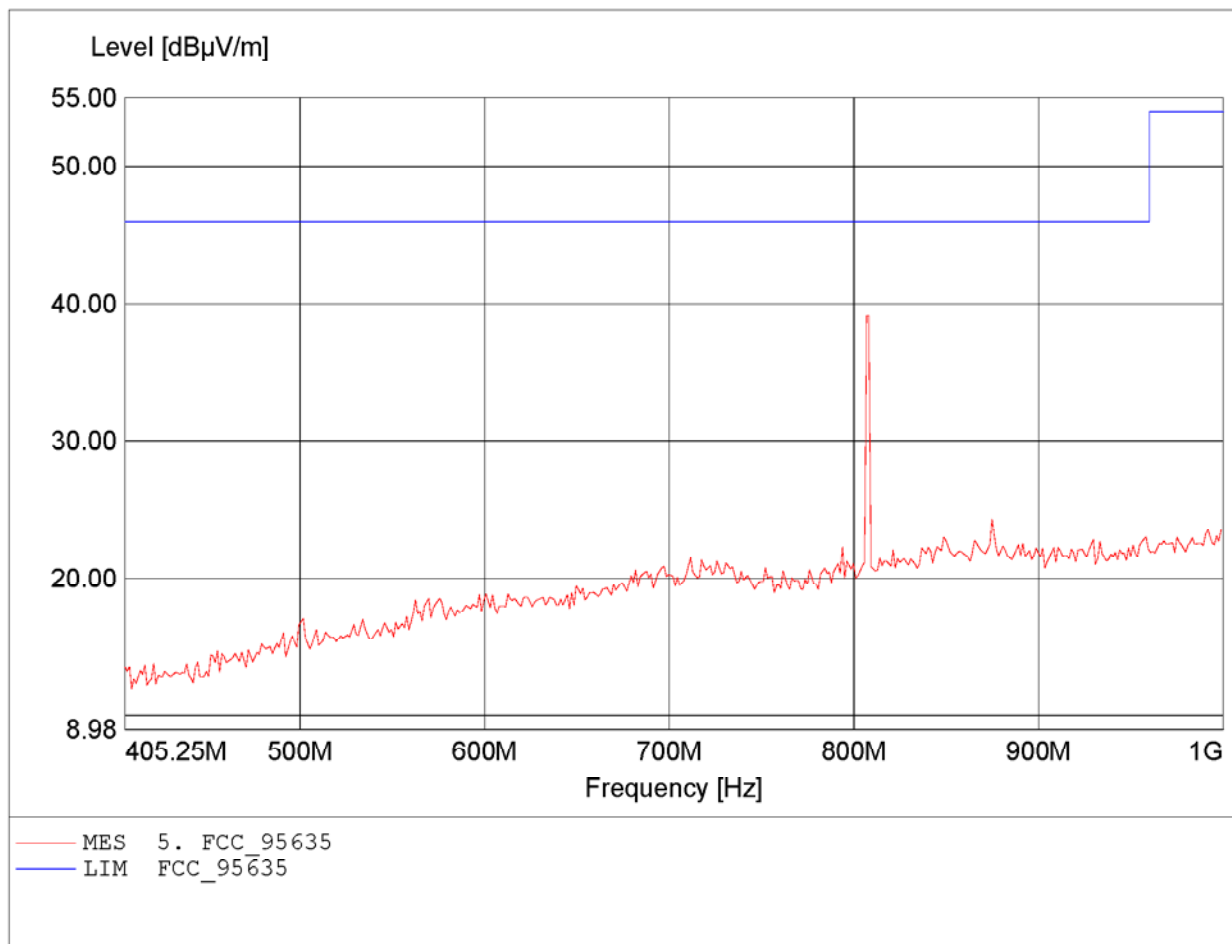


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 38.29dBµV/m, RBW: 100kHz

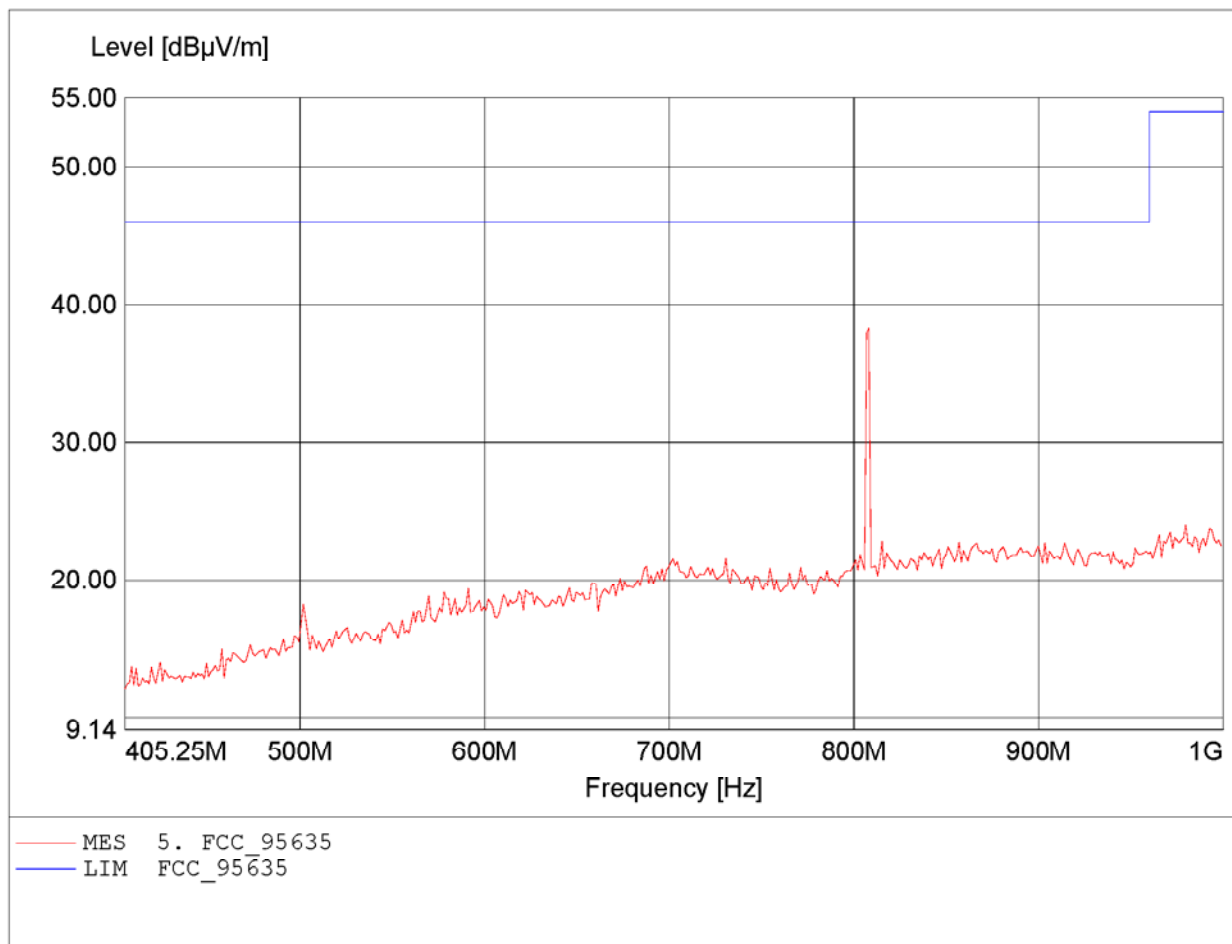


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.633GHz, Emax: 51.24dBµV/m, RBW: 100kHz

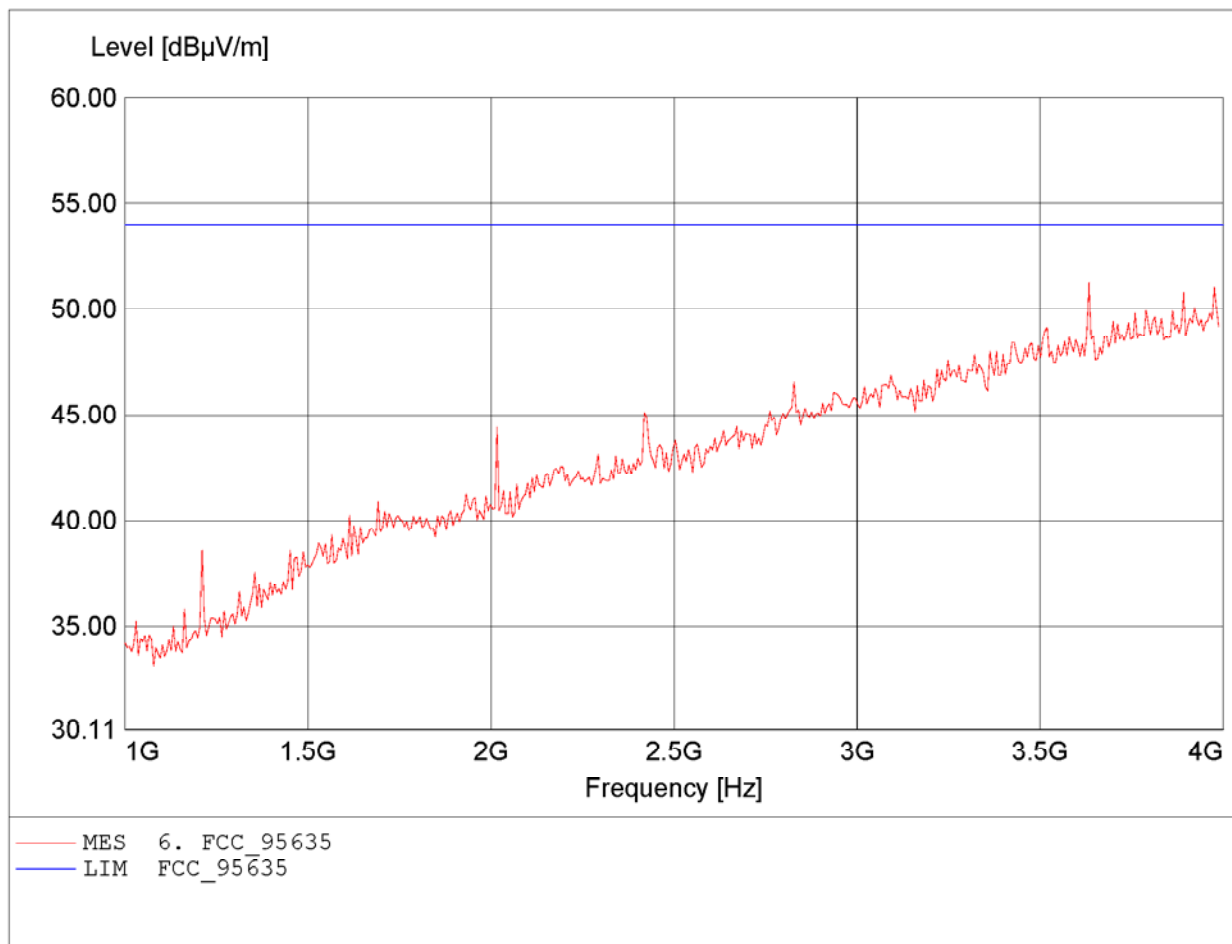


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.633GHz, Emax: 51.47dBµV/m, RBW: 100kHz

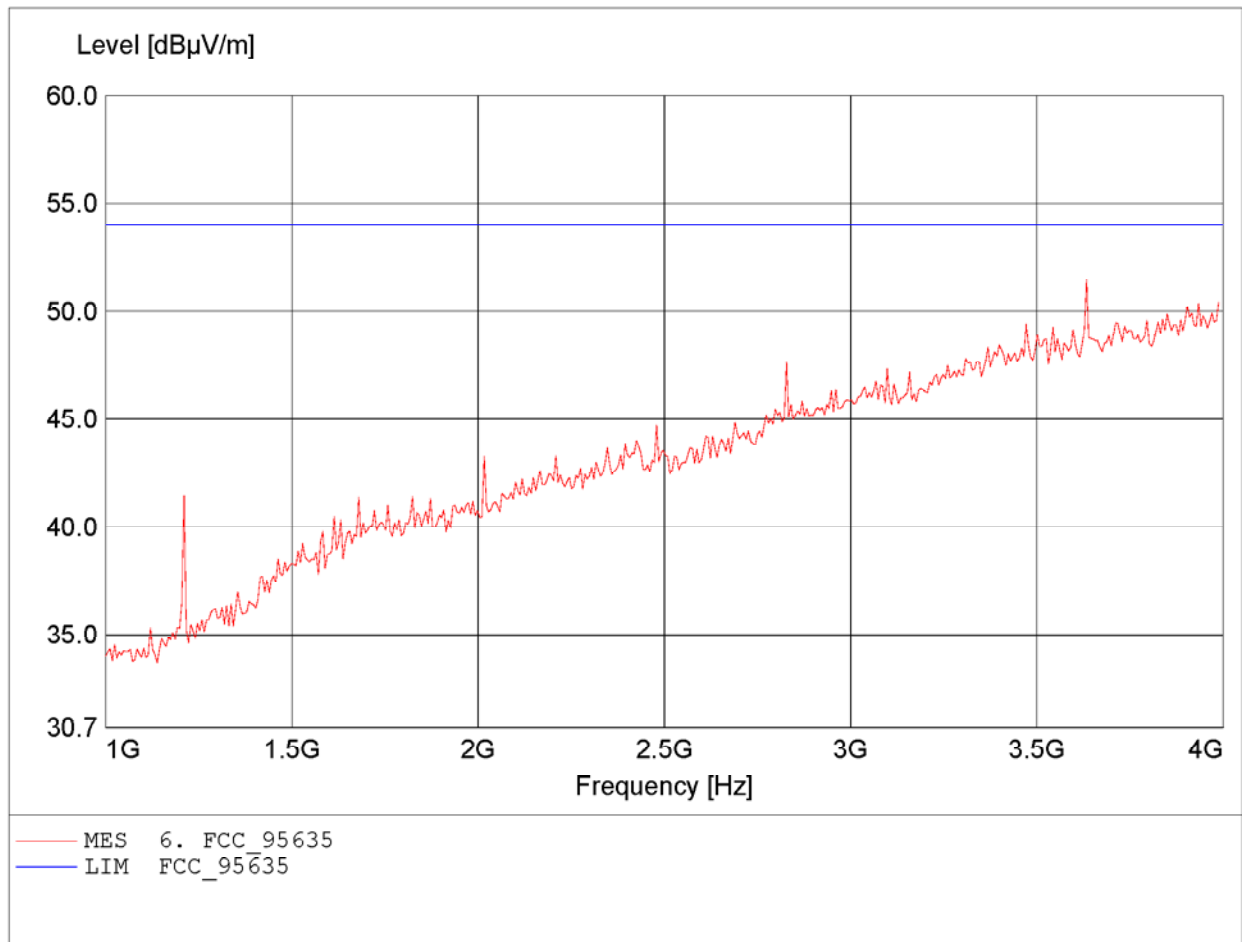


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.920GHz, Emax: 43.32dBµV/m, RBW: 1MHz

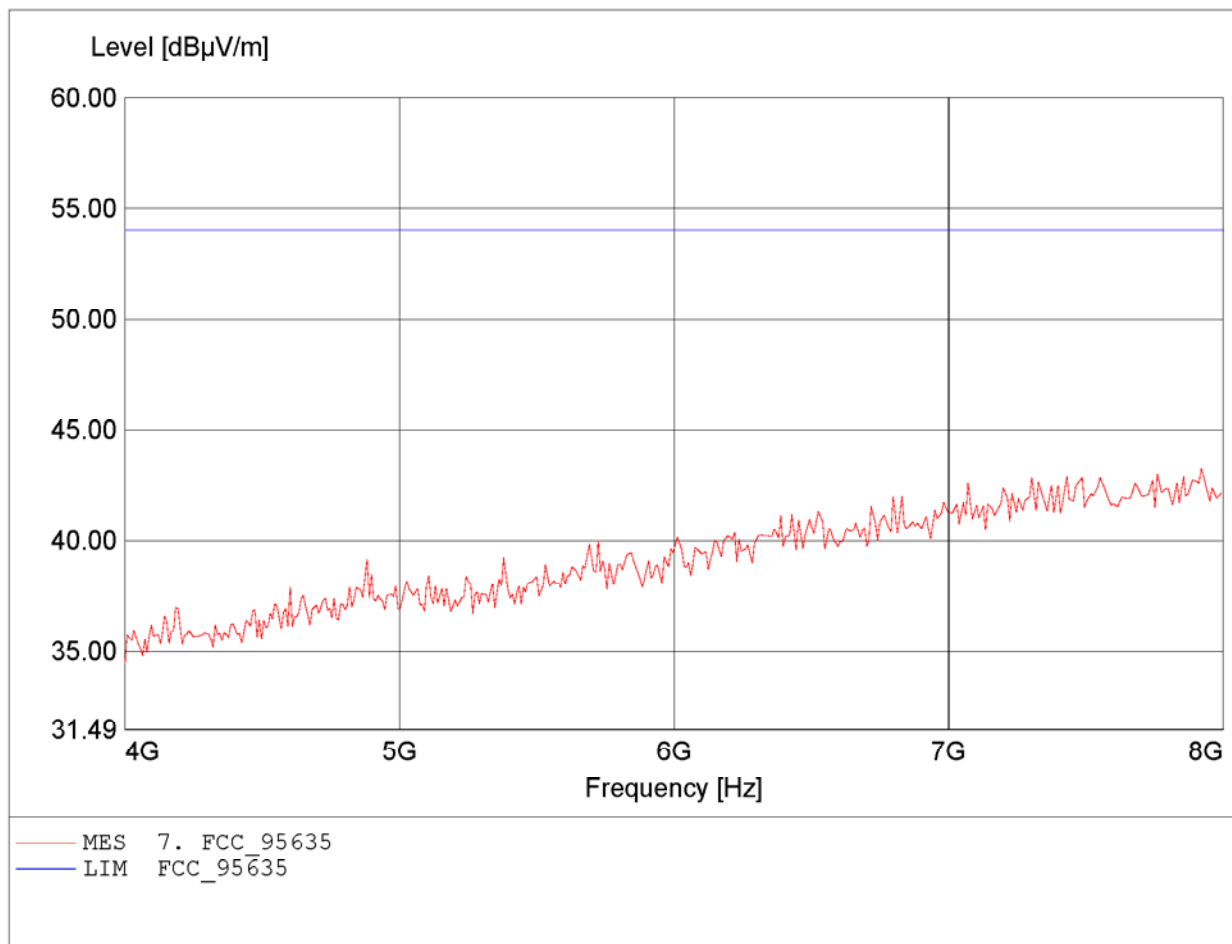


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 1
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.311GHz, Emax: 43.35dBµV/m, RBW: 1MHz

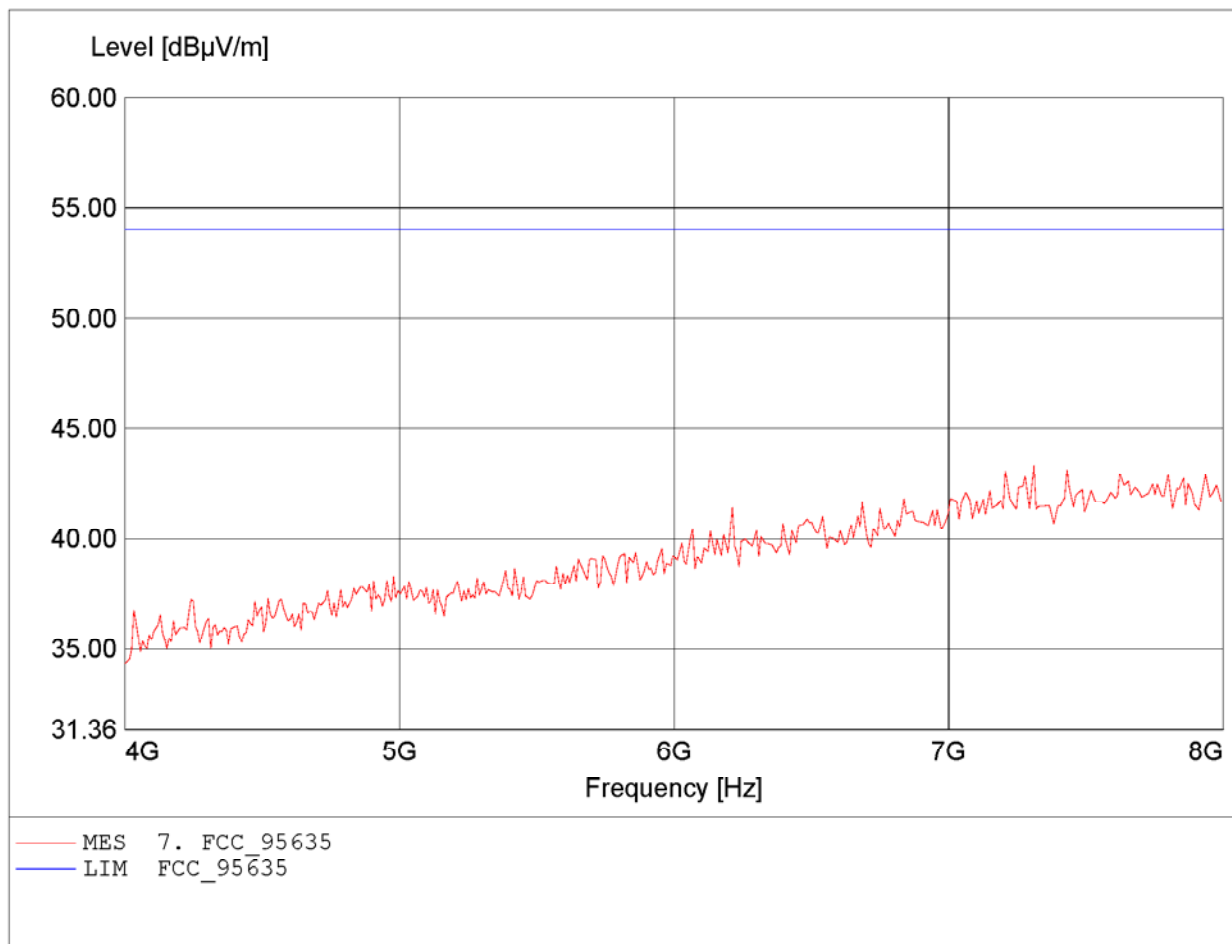


Carrier power (dBuV/m)
FCC RULES PART 95, SUBPART i

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 403.655MHz, Emax: 77.00dBuV/m, RBW: 100kHz

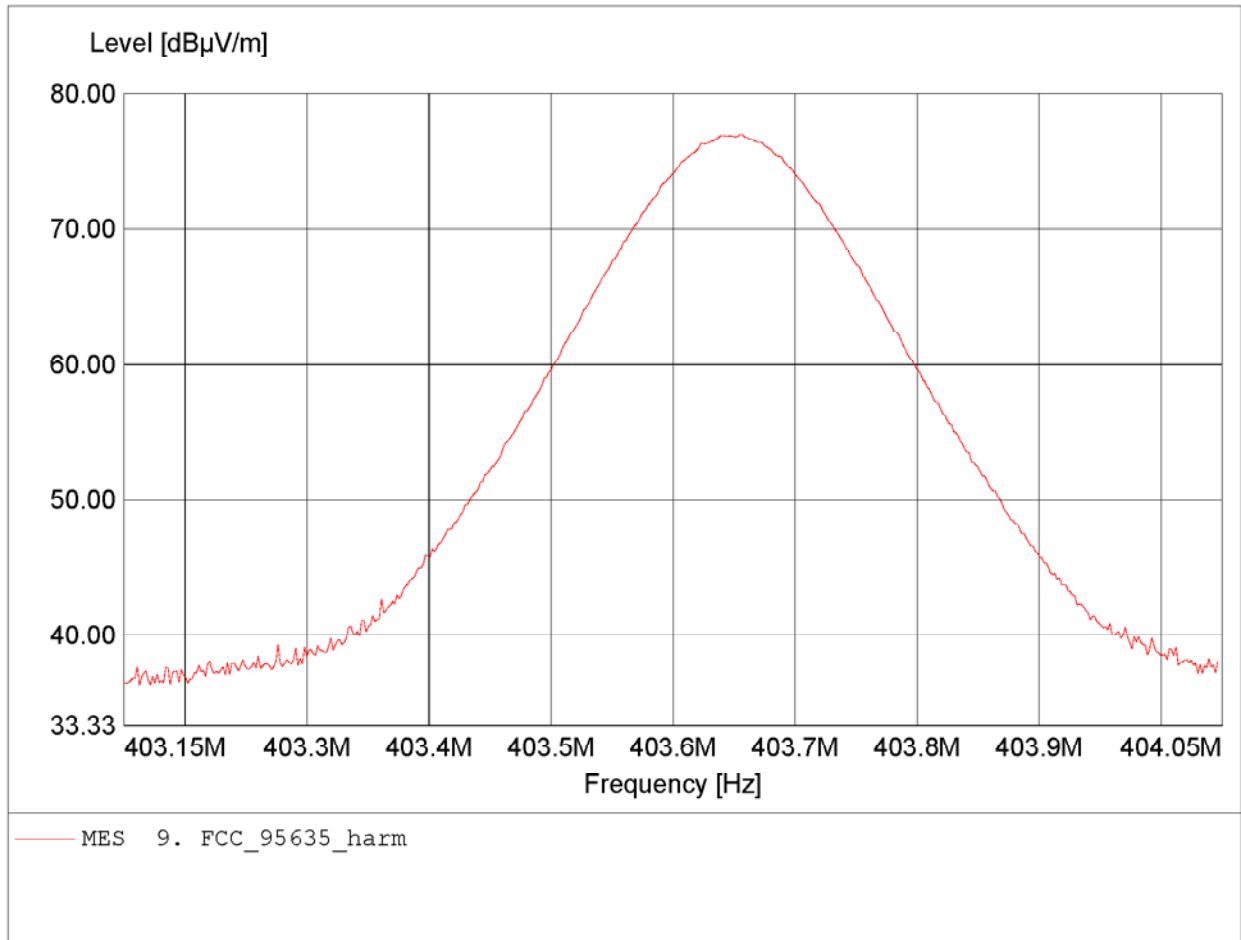


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.483MHz, Emax: 32.31dBµV/m, RBW: 100kHz

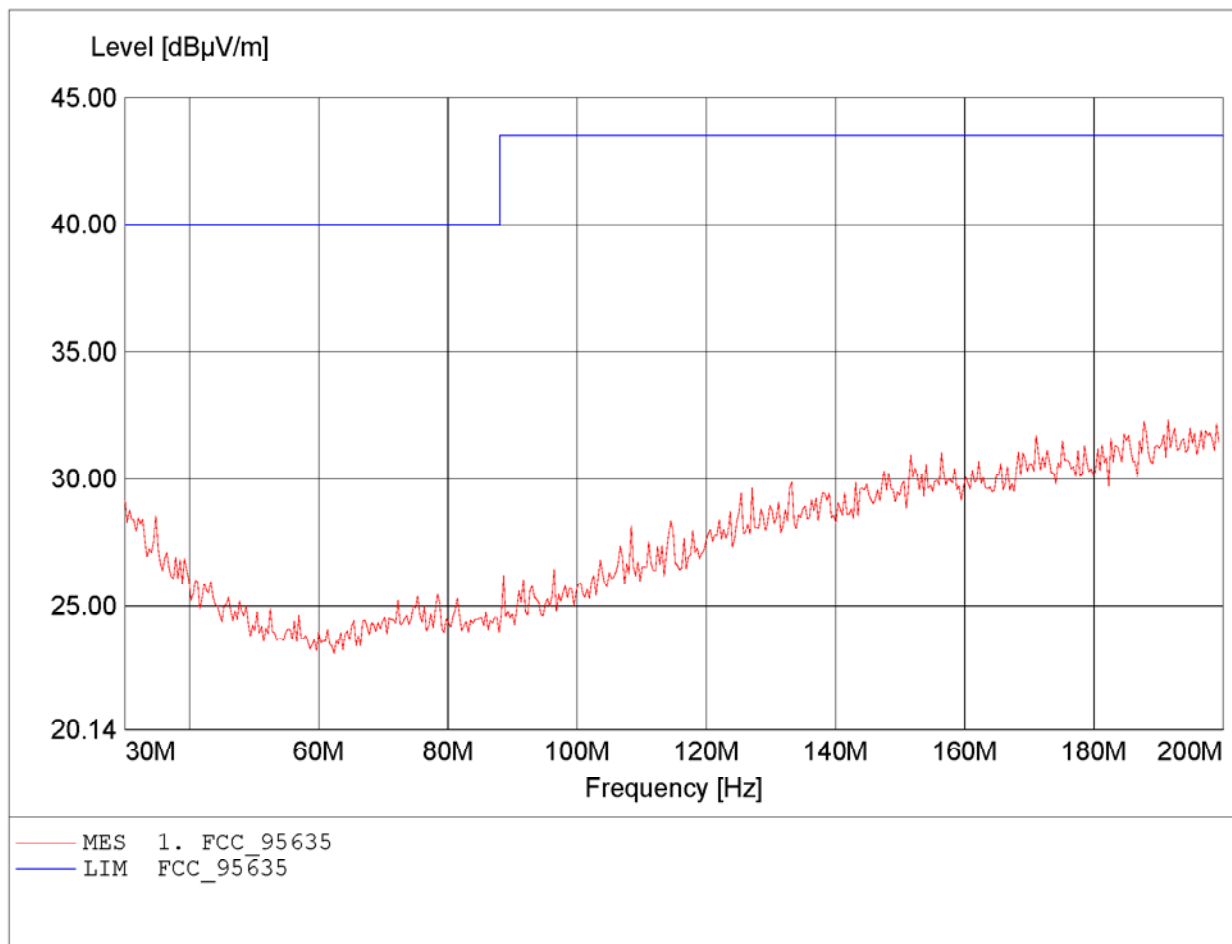


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 32.72dBµV/m, RBW: 100kHz

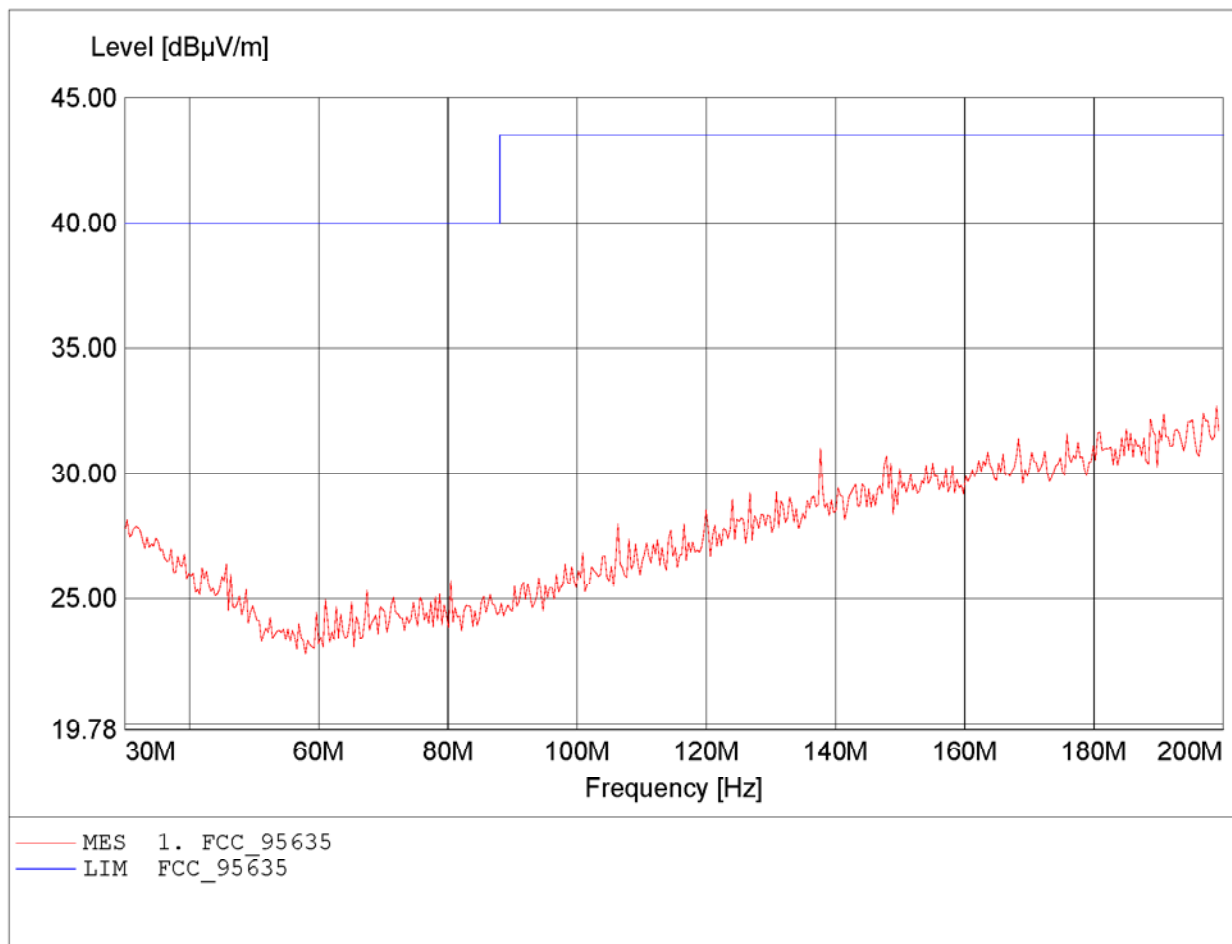


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 201.213MHz, Emax: 15.32dBµV/m, RBW: 100kHz

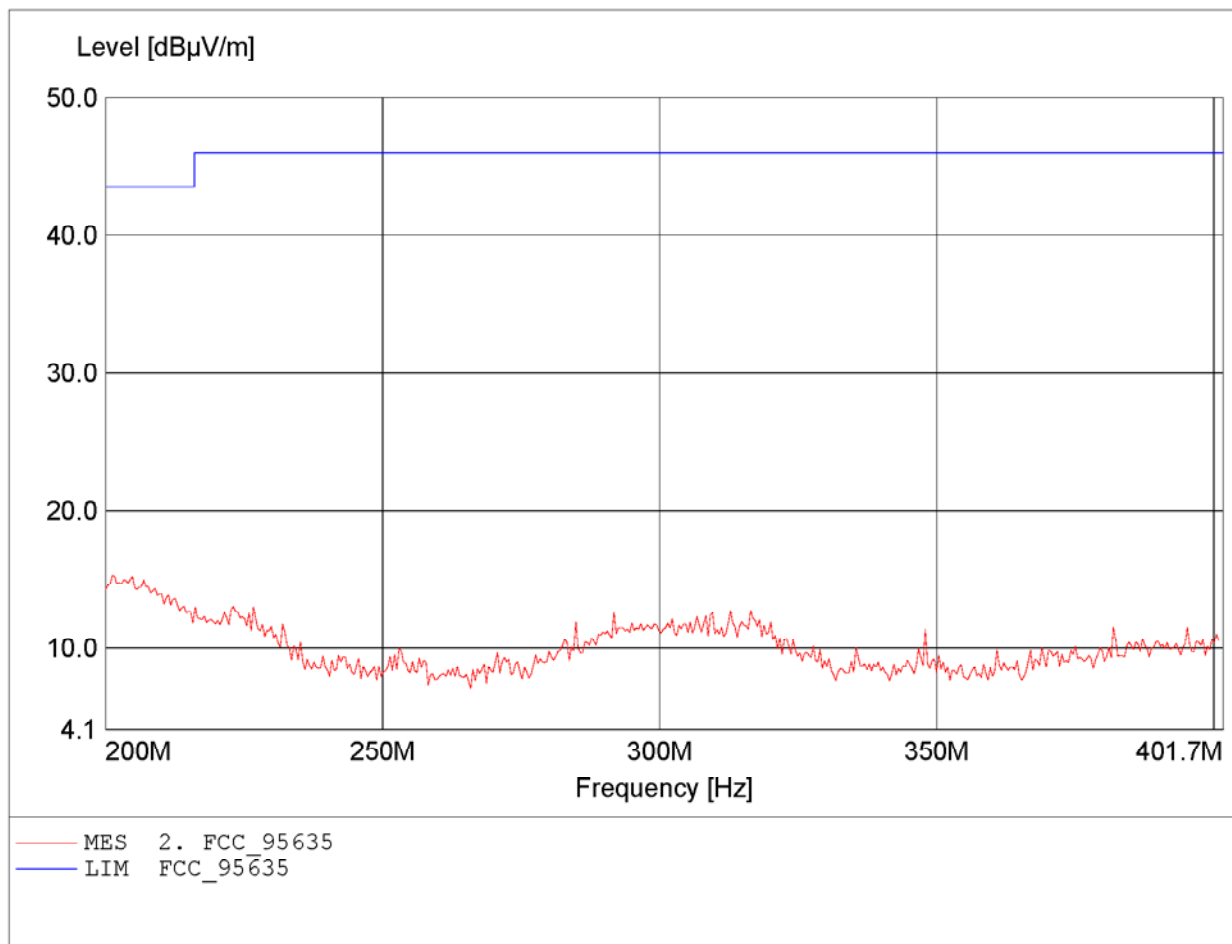


**Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D**

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 200.404MHz, Emax: 15.22dBµV/m, RBW: 100kHz

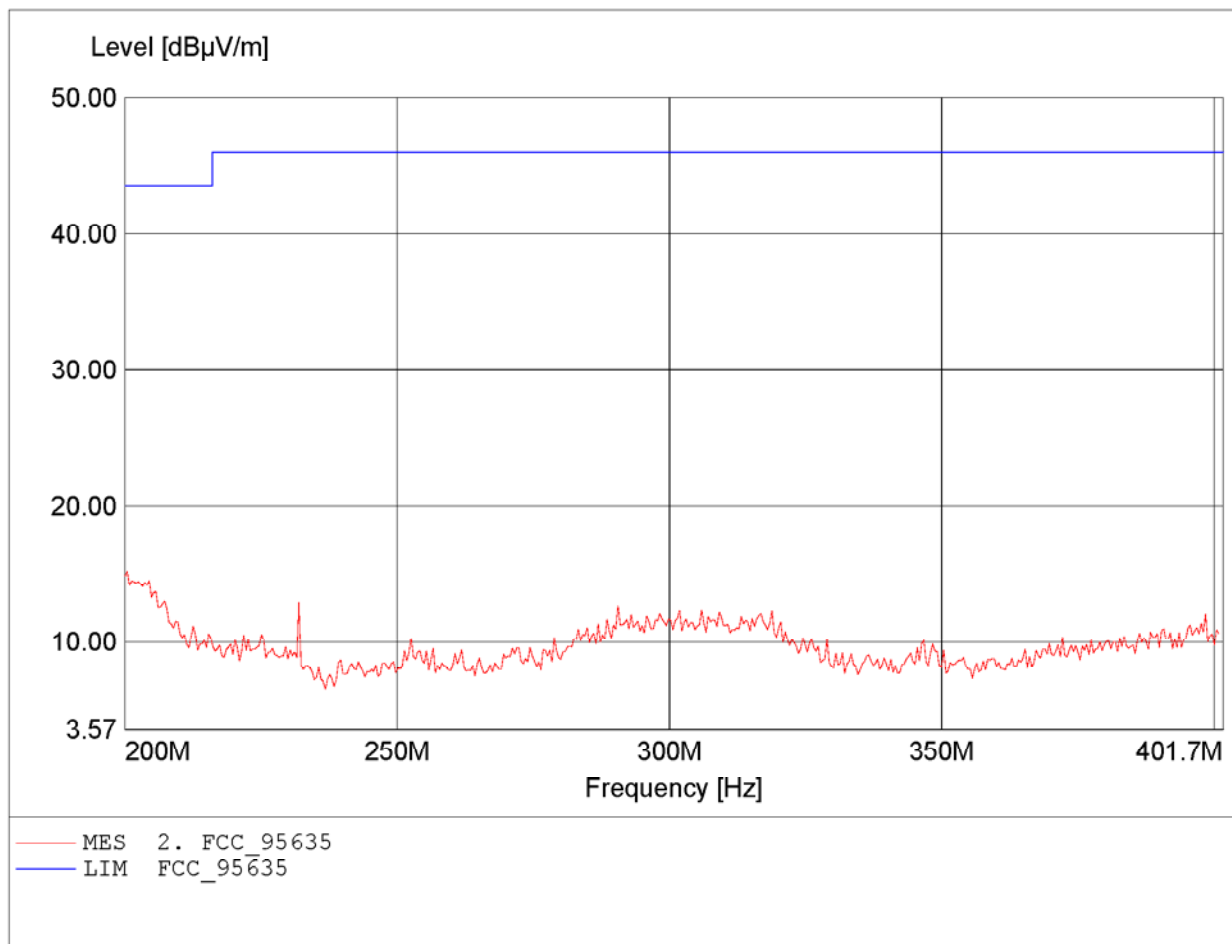


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.493MHz, Emax: 27.70dBµV/m, RBW: 3kHz

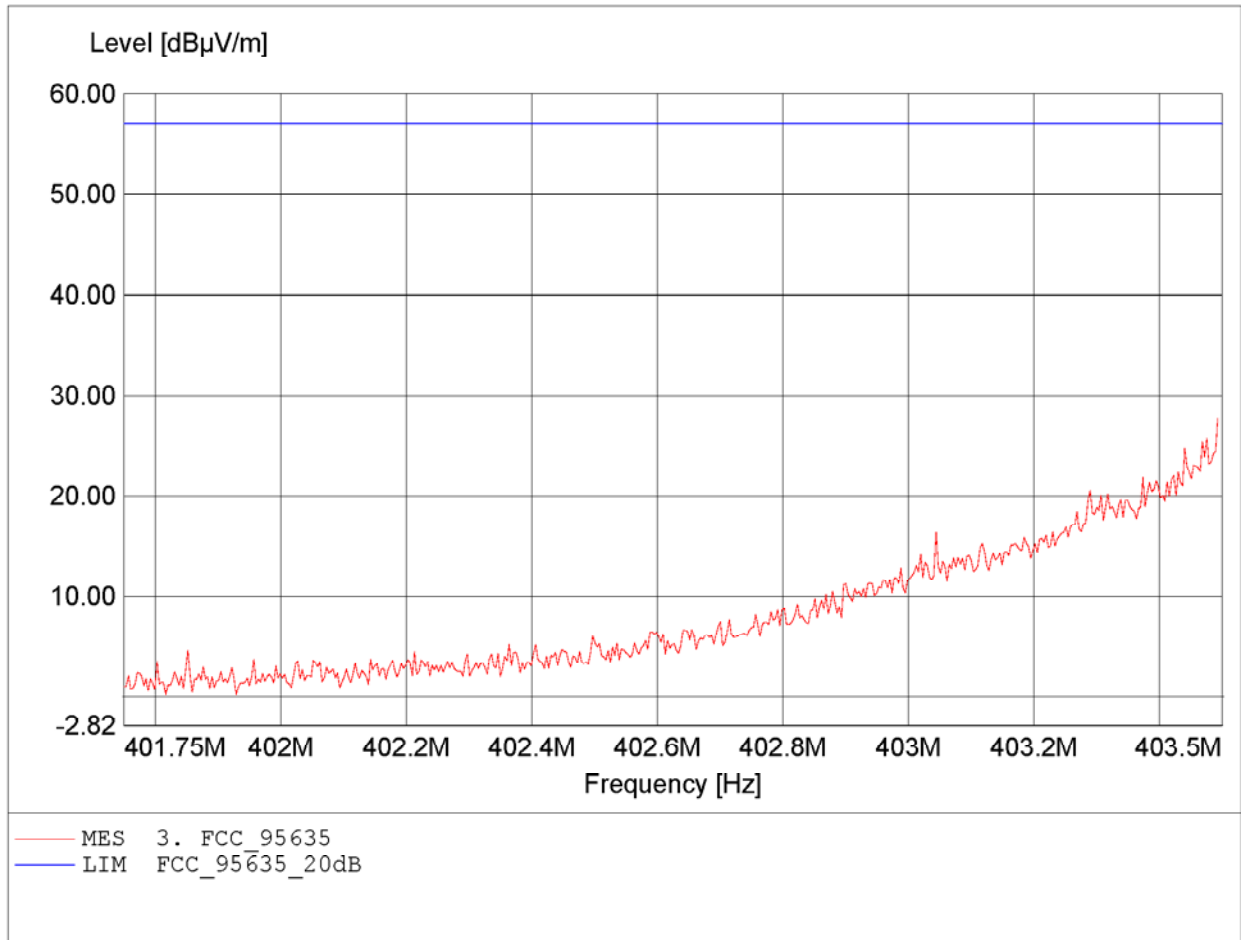


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.475MHz, Emax: 20.66dBµV/m, RBW: 3kHz

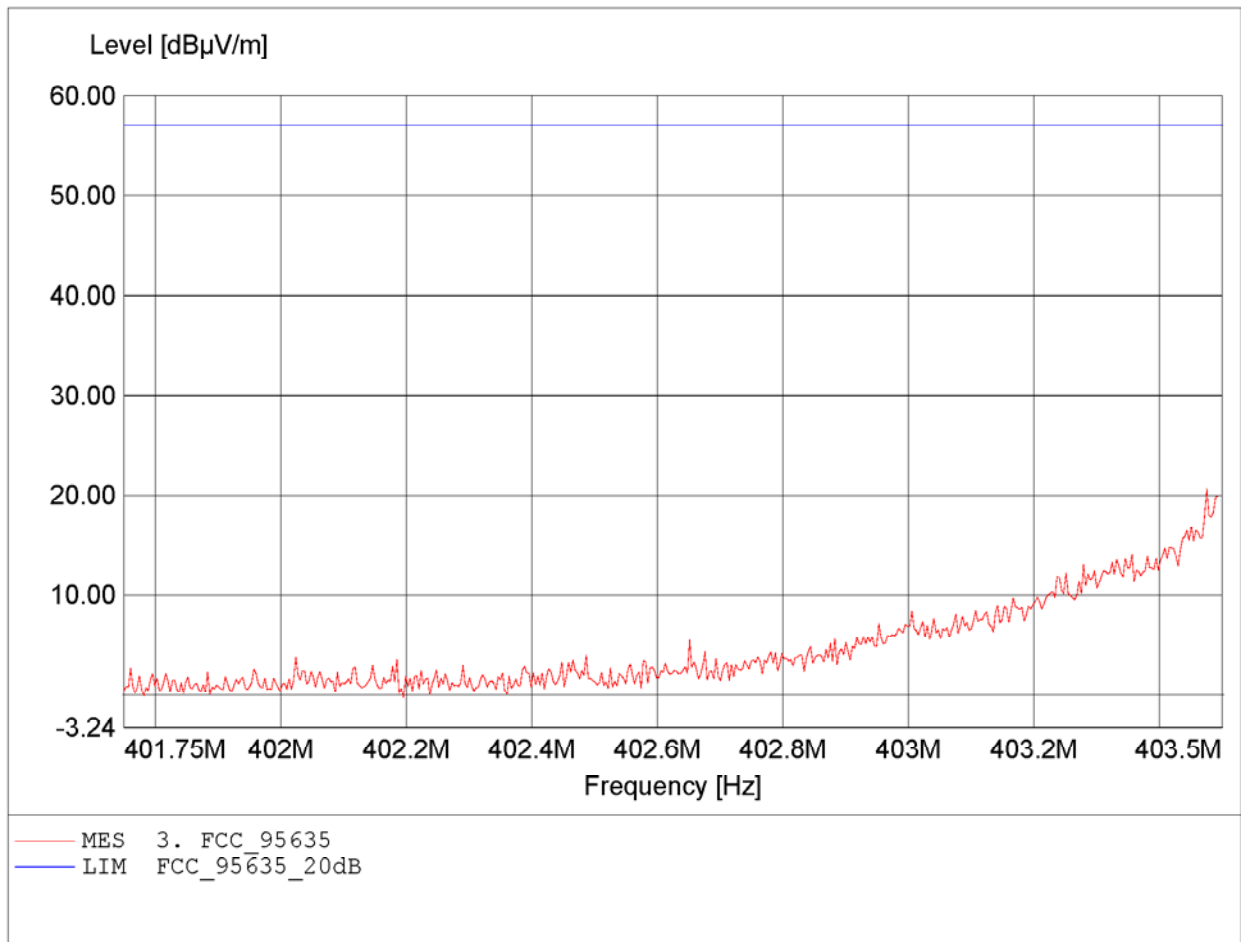


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.806MHz, Emax: 27.58dBµV/m, RBW: 3kHz

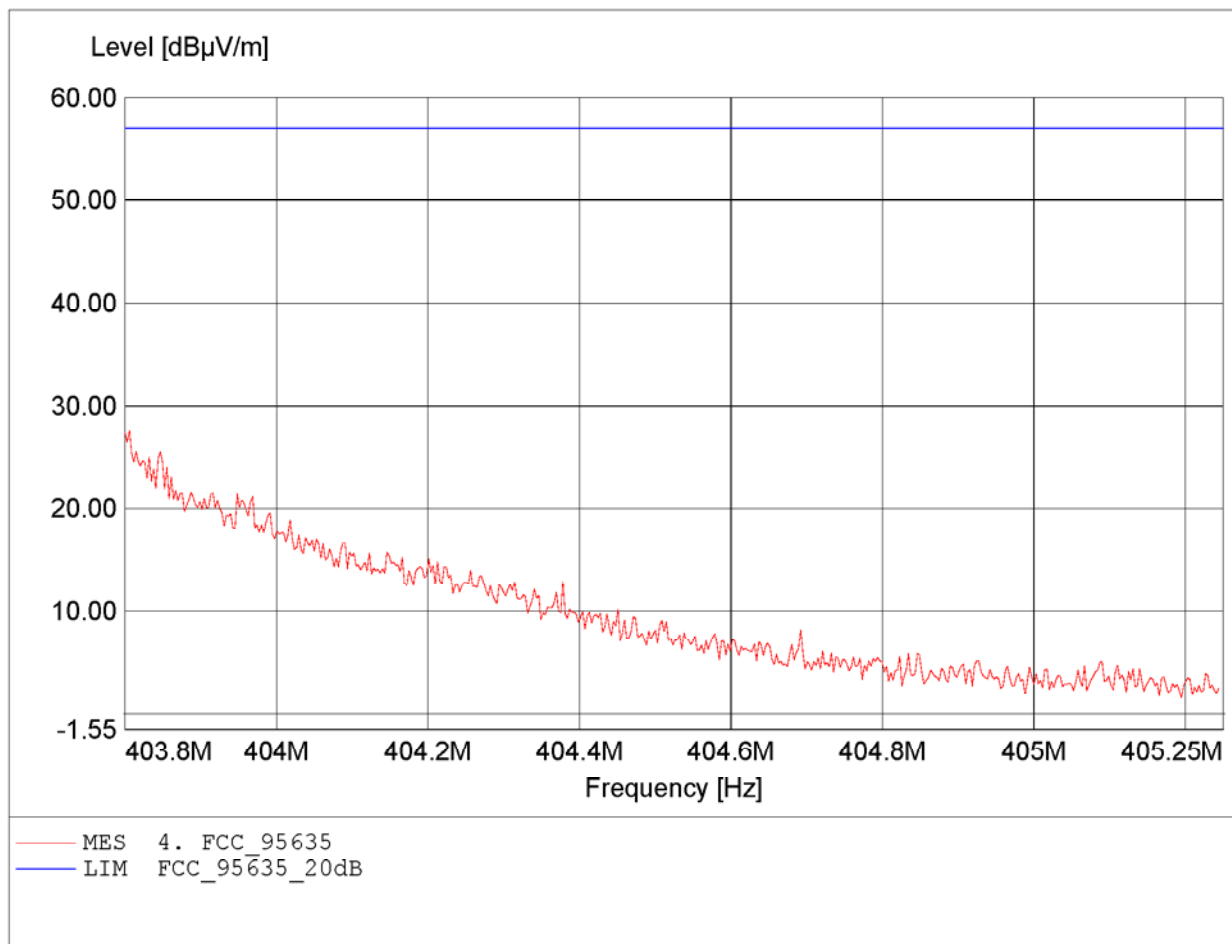


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 403.800MHz, Emax: 22.18dBµV/m, RBW: 3kHz

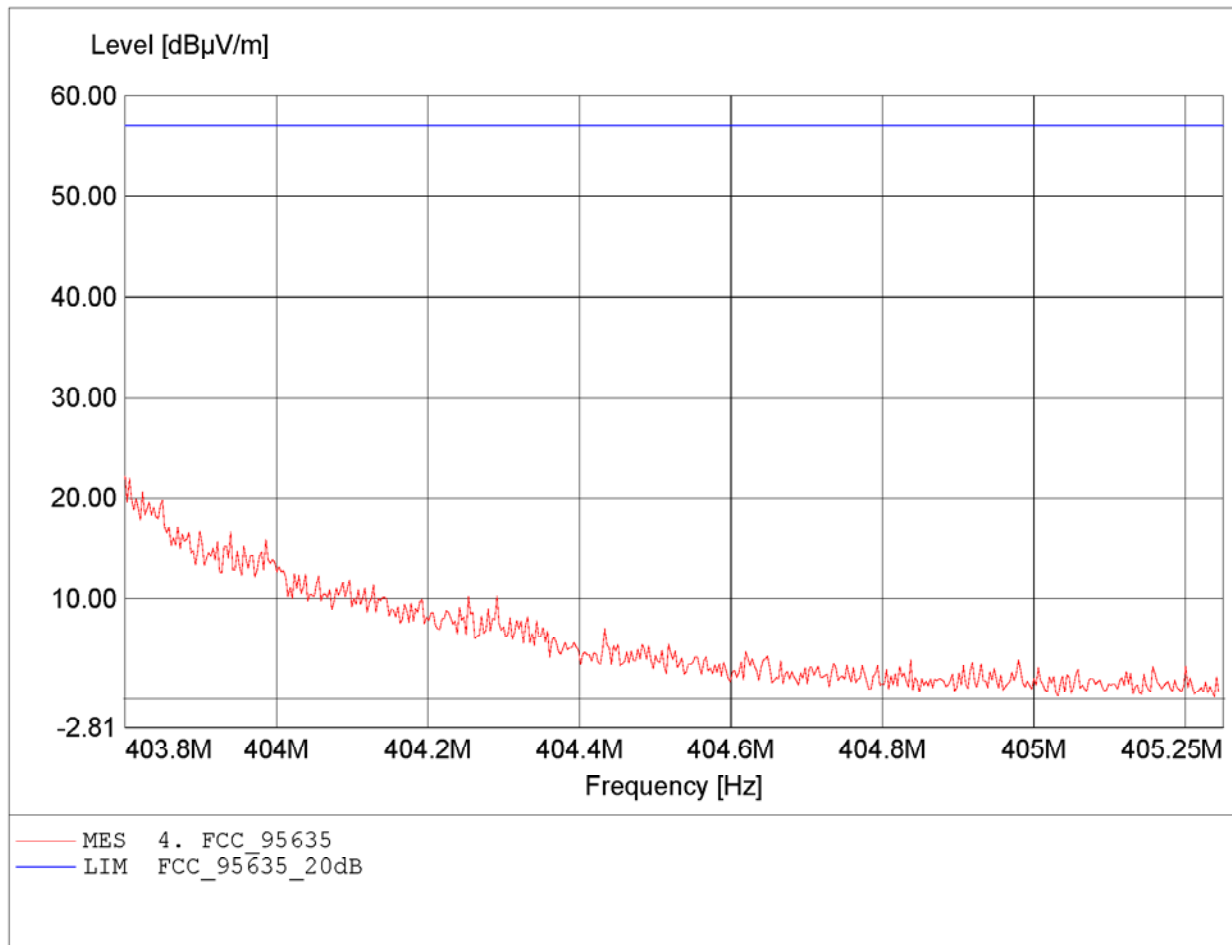


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 39.13dBµV/m, RBW: 100kHz

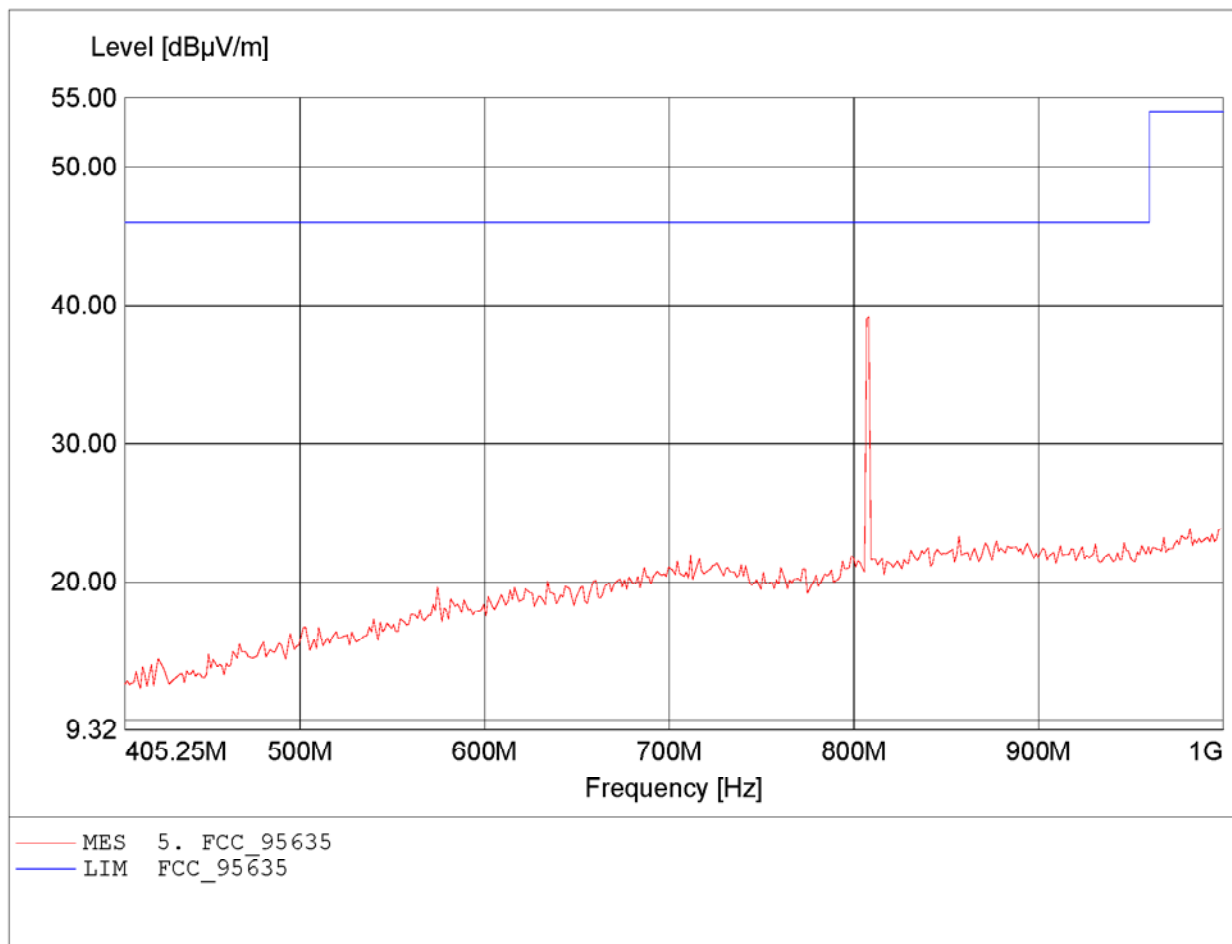


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 808.107MHz, Emax: 38.51dBµV/m, RBW: 100kHz

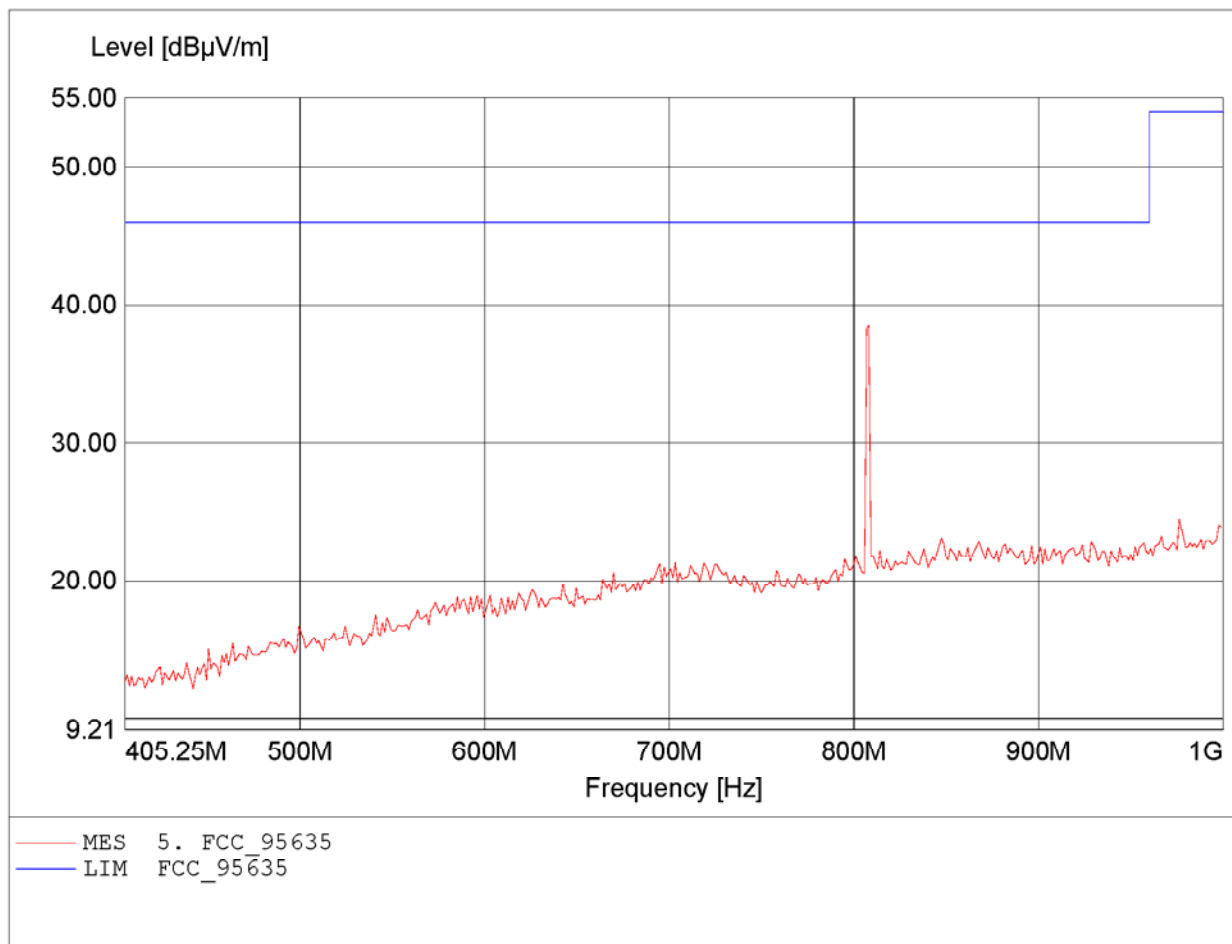


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.946GHz, Emax: 50.19dBµV/m, RBW: 100kHz

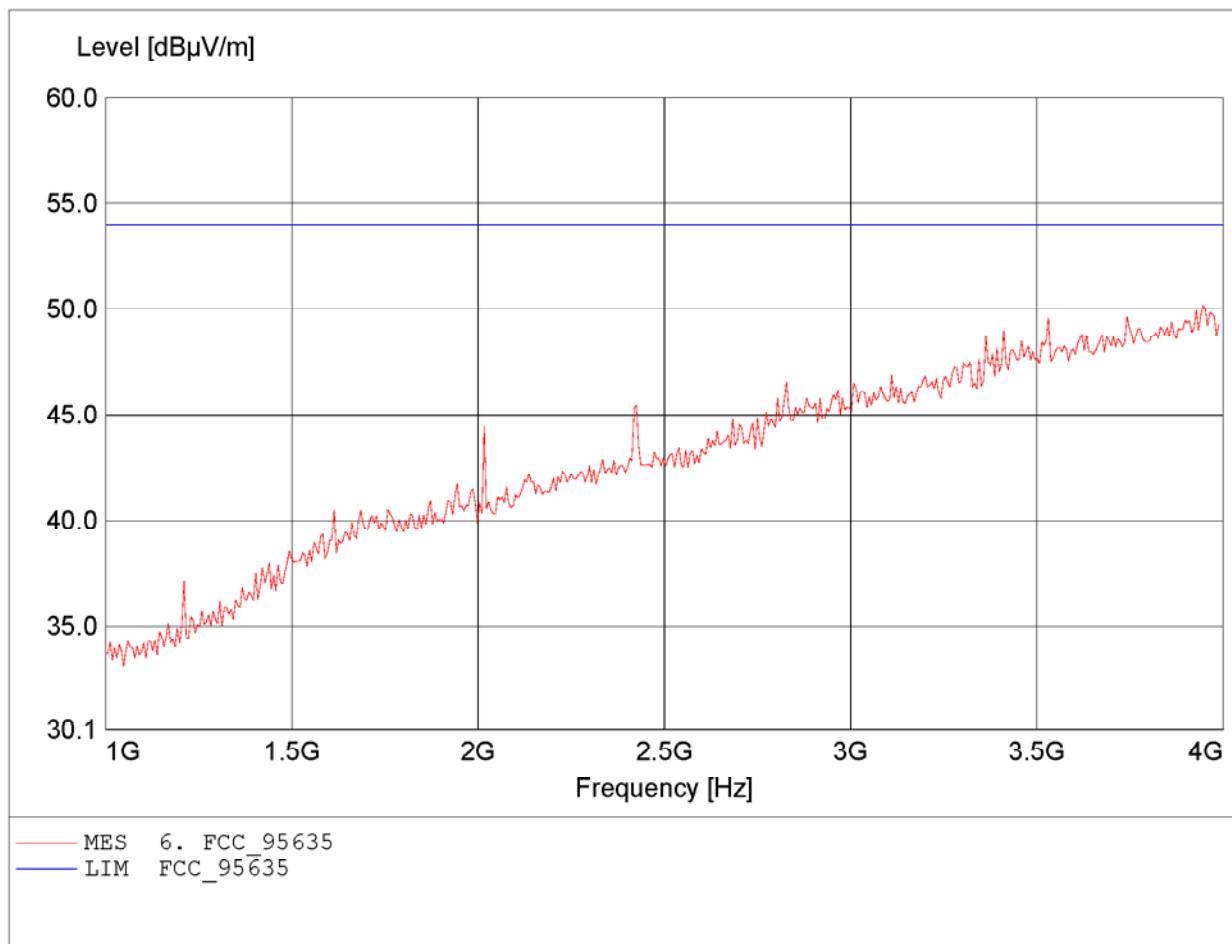


Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.874GHz, Emax: 49.93dBµV/m, RBW: 100kHz

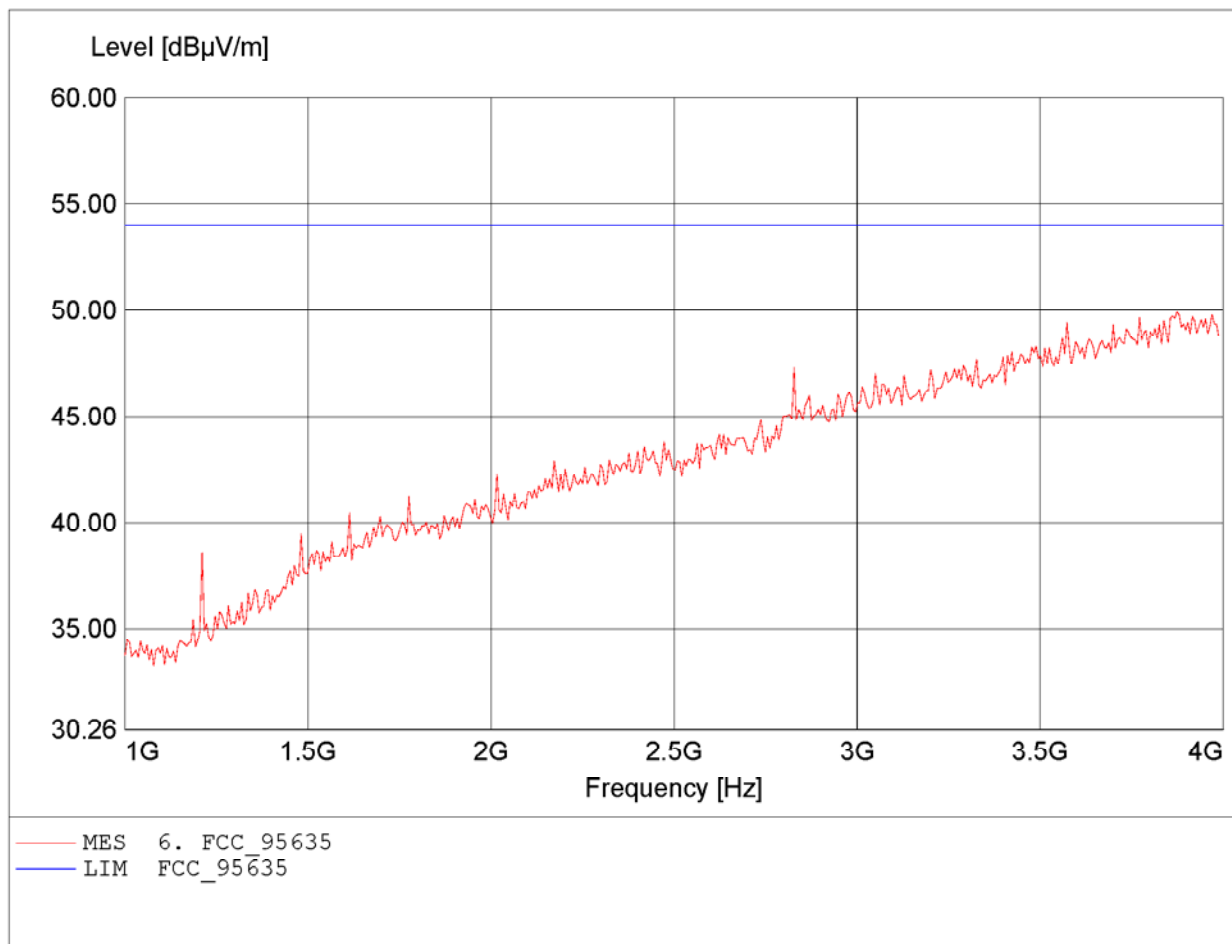

Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.872GHz, Emax: 43.03dBµV/m, RBW: 1MHz

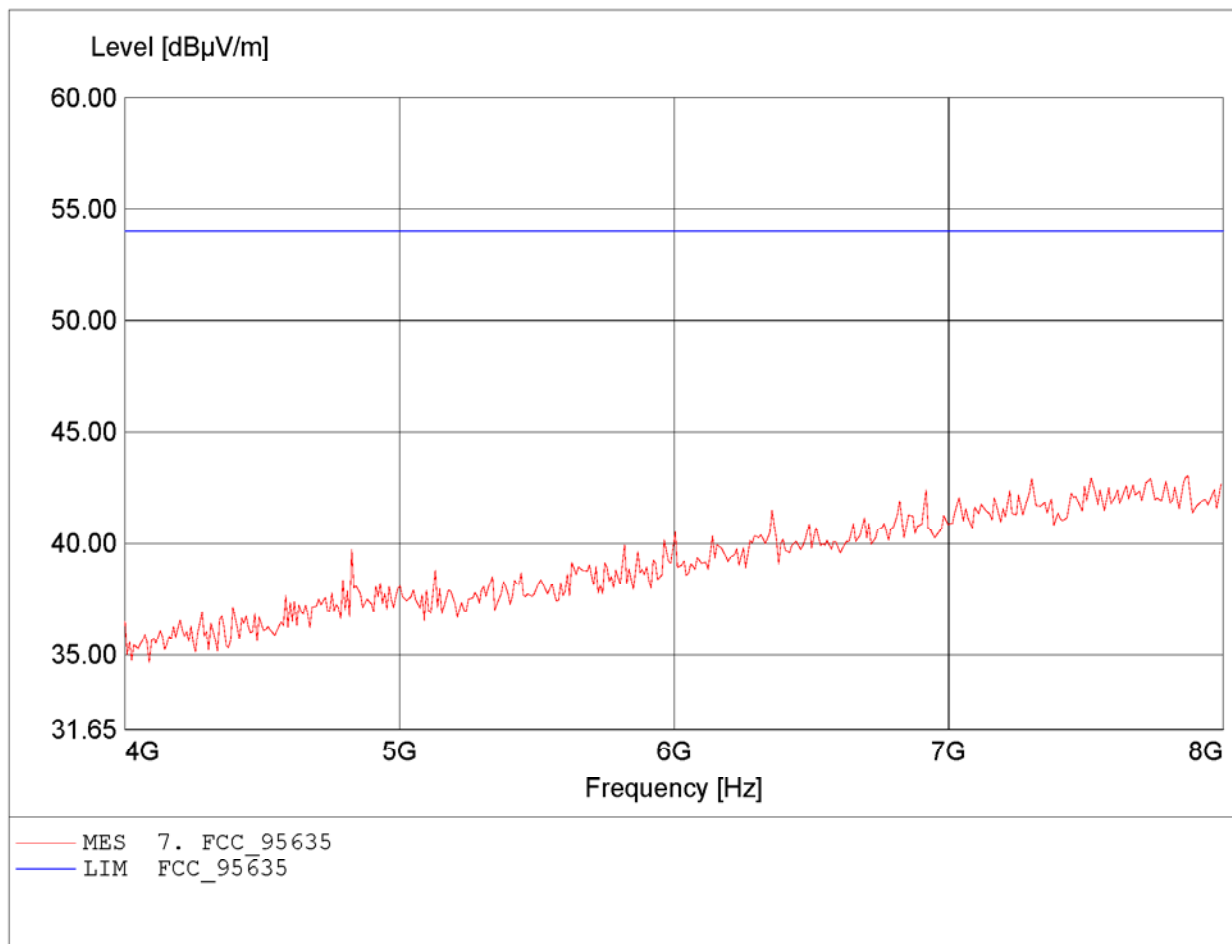

Spurious emissions Field Strength Tx
FCC RULES PART 95, SUBPART D

Approval Holder: BIOTRONIK GmbH & CO. KG
Model: CARDIOMESSENGER II-S TLINE / MT5656
Order-No.: GOM20712-0342 / Frequency: 403.65 MHz / Antenna: 2
Test Site / Operator: ETS Product Service AG / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 120 V AC (AC/DC-ADAPTOR)
Test Specification: according to §95.635, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 7.559GHz, Emax: 42.93dBµV/m, RBW: 1MHz

