

# FCC REPORT

**Applicant:** AZUMI S.A

**Address of Applicant:** Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza,  
Piso 16 of. 16-01, Marbella, Ciudad de Panamá City, Rep.  
Panamá

**Equipment Under Test (EUT)**

Product Name: Mobile phone

Model No.: A45T

**FCC ID:** QRP-AZUMIA45T

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B

**Date of sample receipt:** 27 Mar., 2015

**Date of Test:** 27 Mar., to 07 Apr., 2015

**Date of report issued:** 08 Apr., 2015

**Test Result:** Pass \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	08 Apr., 2015	Original

**Prepared by:** Sera Xiang **Date:** 08 Apr., 2015  
**Report Clerk**

**Reviewed by:** Abomb Yang **Date:** 08 Apr., 2015  
**Project Engineer**

## 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 TEST SUMMARY.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF E.U.T. ....	5
5.3 TEST MODE.....	5
5.4 DESCRIPTION OF SUPPORT UNITS .....	6
5.5 LABORATORY FACILITY .....	6
5.6 LABORATORY LOCATION .....	6
5.7 TEST INSTRUMENTS LIST.....	7
<b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>8</b>
6.1 CONDUCTED EMISSION.....	8
6.2 RADIATED EMISSION .....	11
<b>7 TEST SETUP PHOTO .....</b>	<b>17</b>
<b>8 EUT CONSTRUCTIONAL DETAILS .....</b>	<b>18</b>

## 4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	Pass
Radiated Emission	Part15.109	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	AZUMI S.A
Address of Applicant:	Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01, Marbella, Ciudad de Panamá City, Rep. Panamá
Manufacturer:	AZUMI HK LTD.
Address of Manufacturer:	FLAT/RM 18 BLK 1 14/F GOLDEN INDUSTRIAL BUILDING,16-26 KWAI TAK STREET,KWAI CHUNG, HONG KONG
Factory:	Longconn Electronics(Shenzhen) Co., Ltd.
Address of Factory:	(Xinchuangji Industrial park) NO.42, Xingye 1 Road, Phoenix 1st Industrial Zone, Fuyong Town, Baoan District, Shenzhen, China

### 5.2 General Description of E.U.T.

Product Name:	Mobile phone
Model No.:	A45T
Power supply:	Rechargeable Li-ion Battery DC3.8V-1700mAh
AC adapter :	Input:100-240V AC,50/60Hz 0.4A Output:5V DC MAX 1A

### 5.3 Test Mode

Operating mode	Detail description
PC mode	Keep the EUT in Downloading mode(Worst case)
Charging+recording mode	Keep the EUT in Charging+recording mode
Charging+Play mode	Keep the EUT in Charging+Play mode
FM mode	Keep the EUT in FM receiver mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

### 5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX745	N/A	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UJO	N/A	DoC
HP	Printer	CB495A	05257893	DoC
MERCURY	Wireless router	MW150R	12922104015	FCC ID

### 5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 817957**  
 Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.
- IC - Registration No.: 10106A-1**  
 The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- CNAS - Registration No.: CNAS L6048**  
 Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

### 5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
 Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China  
 Tel: +86-755-23118282  
 Fax: +86-755-23116366

## 5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	04-19-2014	04-19-2015
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	04-19-2014	04-19-2015
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	03-01-2015	02-28-2016
6	Coaxial Cable	CCIS	N/A	CCIS0017	03-01-2015	02-28-2016
7	Coaxial cable	CCIS	N/A	CCIS0018	03-01-2015	02-28-2016
8	Coaxial Cable	CCIS	N/A	CCIS0019	03-01-2015	02-28-2016
9	Coaxial Cable	CCIS	N/A	CCIS0087	03-01-2015	02-28-2016
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	03-01-2015	02-28-2016
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	06-09-2014	06-08-2015
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	03-01-2015	02-28-2016
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	03-01-2015	02-28-2016
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	04-19-2014	04-19-2015
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	03-01-2015	02-28-2016
18	Loop antenna	Laplace instrument	RF300	EMC0701	03-01-2015	02-28-2016
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	05-29-2014	05-28-2015
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	04-19-2014	04-19-2015

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	06-09-2014	06-08-2015
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	04-19-2014	04-19-2015
3	LISN	CHASE	MN2050D	CCIS0074	03-01-2015	02-28-2016
4	Coaxial Cable	CCIS	N/A	CCIS0086	03-01-2015	02-28-2016

## 6 Test results and Measurement Data


### 6.1 Conducted Emission

Test Requirement:	FCC Part 15 B Section 15.107														
Test Method:	ANSI C63.4:2003														
Test Frequency Range:	150kHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9kHz, VBW=30kHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>0.5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	0.5-30	60	50
	Frequency range (MHz)		Limit (dB $\mu$ V)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
	0.5-5	56	46												
0.5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test setup:	<p>Remark:  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>														
Test procedure	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol>														
Test environment:	Temp.: 23 °C Humid.: 56% Press.: 1 01kPa														
Measurement Record:	Uncertainty: 3.28dB														
Test Instruments:	Refer to section 5.7 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Pass														



**Measurement data:**

Line:

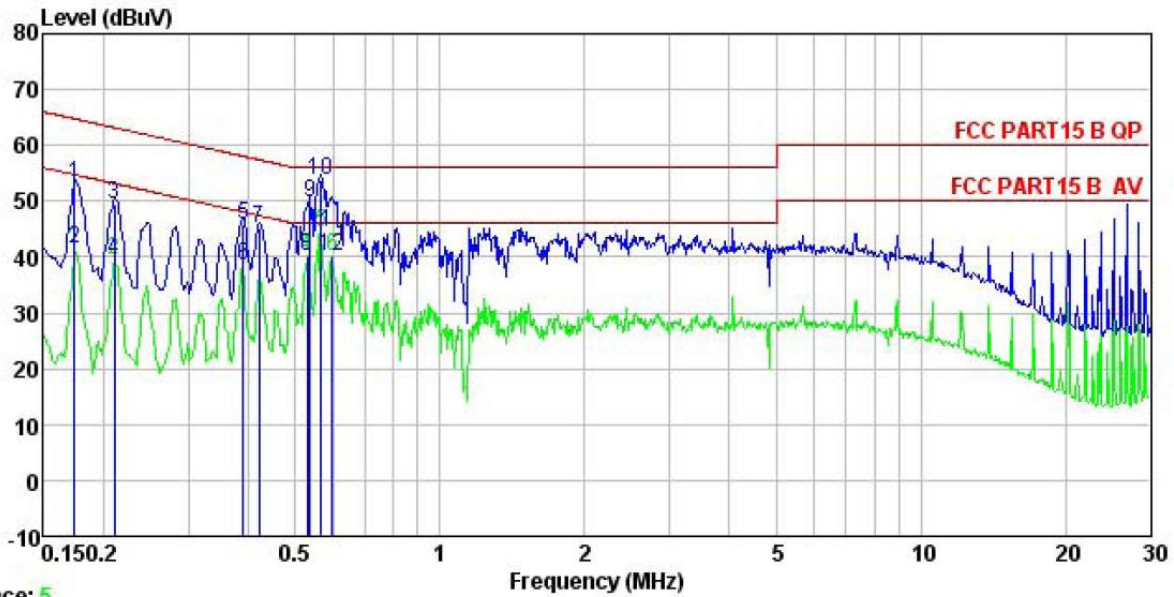


Trace: 5

Site : CCIS Shielding Room  
 Condition : FCC PART15 B QP LISN LINE  
 Pro : 206RF  
 EUT : Mobile Phone  
 Model : A45T  
 Test Mode : PC mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa  
 Test Engineer: Carey  
 Remark :

	Read	LISN	Cable	Limit	Over		
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.174	42.07	0.27	10.77	53.11	64.77	-11.66 QP
2	0.174	30.40	0.27	10.77	41.44	54.77	-13.33 Average
3	0.211	38.45	0.28	10.76	49.49	63.18	-13.69 QP
4	0.211	28.51	0.28	10.76	39.55	53.18	-13.63 Average
5	0.389	34.85	0.28	10.72	45.85	58.08	-12.23 QP
6	0.389	27.35	0.28	10.72	38.35	48.08	-9.73 Average
7	0.421	34.26	0.28	10.73	45.27	57.42	-12.15 QP
8	0.529	29.12	0.28	10.76	40.16	46.00	-5.84 Average
9	0.538	38.60	0.28	10.76	49.64	56.00	-6.36 QP
10	0.567	42.64	0.26	10.77	53.67	56.00	-2.33 QP
11	0.567	33.33	0.26	10.77	44.36	46.00	-1.64 Average
12	0.598	29.25	0.25	10.77	40.27	46.00	-5.73 Average

Neutral:

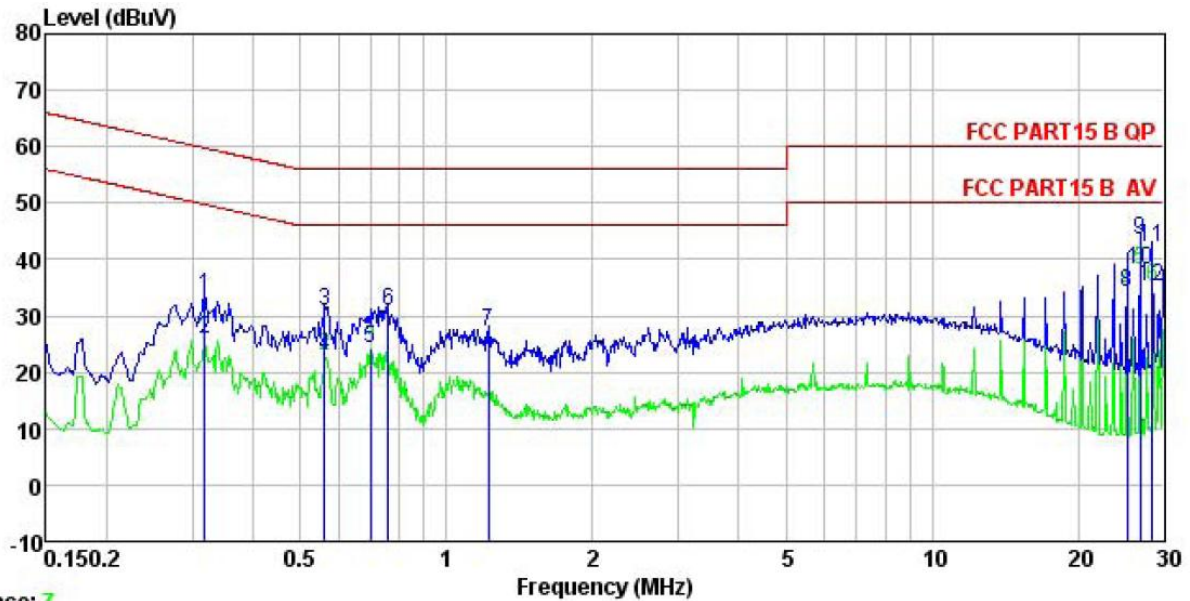

Trace: 7  
 Site : CCIS Shielding Room  
 Condition : FCC PART15 B QP LISN NEUTRAL  
 Pro : 206RF  
 EUT : Mobile Phone  
 Model : A45T  
 Test Mode : PC mode  
 Power Rating : AC 120V/60Hz  
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa  
 Test Engineer: Carey  
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.318	22.56	0.26	10.74	33.56	59.75	-26.19	QP
2	0.318	14.95	0.26	10.74	25.95	49.75	-23.80	Average
3	0.561	19.67	0.25	10.77	30.69	56.00	-25.31	QP
4	0.561	11.90	0.25	10.77	22.92	46.00	-23.08	Average
5	0.697	13.28	0.18	10.77	24.23	46.00	-21.77	Average
6	0.759	19.93	0.19	10.80	30.92	56.00	-25.08	QP
7	1.223	15.99	0.24	10.90	27.13	56.00	-28.87	QP
8	25.188	22.59	0.54	10.87	34.00	50.00	-16.00	Average
9	26.841	32.08	0.65	10.87	43.60	60.00	-16.40	QP
10	26.841	26.78	0.65	10.87	38.30	50.00	-11.70	Average
11	28.452	30.38	0.74	10.87	41.99	60.00	-18.01	QP
12	28.452	23.56	0.74	10.87	35.17	50.00	-14.83	Average

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## 6.2 Radiated Emission


Test Requirement:	FCC Part 15 B Section 15.109				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
Above 1GHz	54.0		Average Value		
	74.0		Peak Value		
Test setup:	Below 1GHz				
Test setup:	Above 1GHz				

<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p>Test environment:</p>	<p>Temp.: 25 °C    Humid.: 55%    Press.: 1 01kPa</p>
<p>Measurement Record:</p>	<p>Uncertainty: 4.88dB</p>
<p>Test Instruments:</p>	<p>Refer to section 5.7 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Passed</p>

**Measurement Data**

**Below 1GHz**


Horizontal:

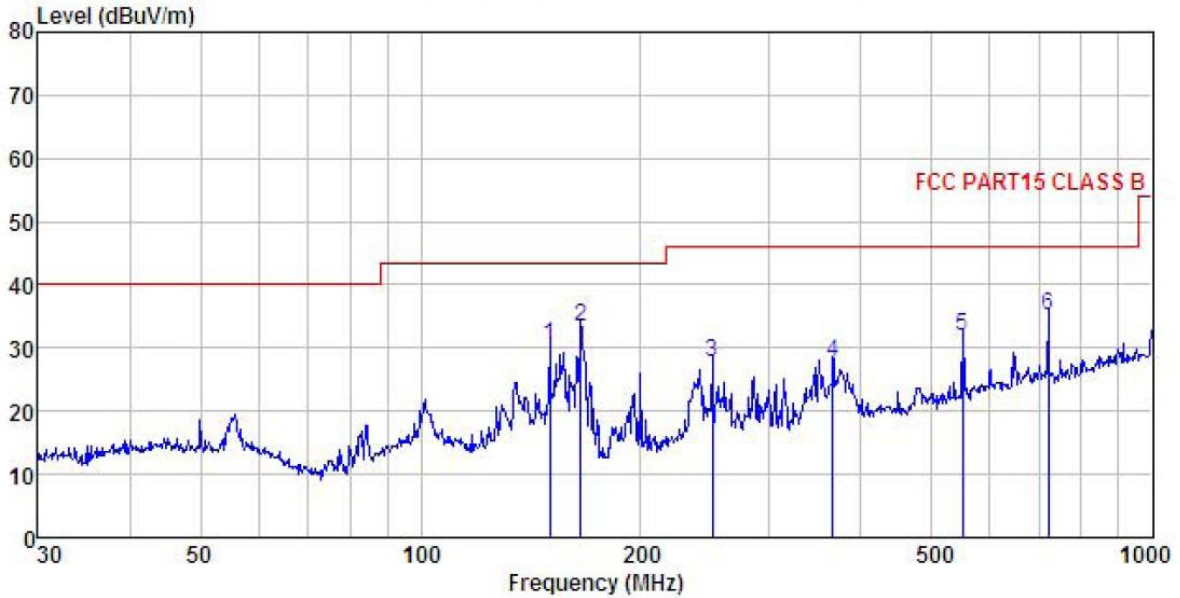

Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL  
 EUT : Mobile phone  
 Model : ,A45T  
 Test mode : PC Mode  
 Power Rating : AC120V/60Hz  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: Carey  
 REMARK :

	Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	150.011	50.10	8.26	1.32	29.22	30.46	43.50	-13.04	QP
2	165.487	52.34	8.82	1.34	29.09	33.41	43.50	-10.09	QP
3	250.301	42.55	12.07	1.62	28.54	27.70	46.00	-18.30	QP
4	365.539	39.90	14.48	2.00	28.63	27.75	46.00	-18.25	QP
5	550.948	40.96	17.57	2.54	29.10	31.97	46.00	-14.03	QP
6	721.726	41.76	19.10	2.97	28.58	35.25	46.00	-10.75	QP

Vertical:

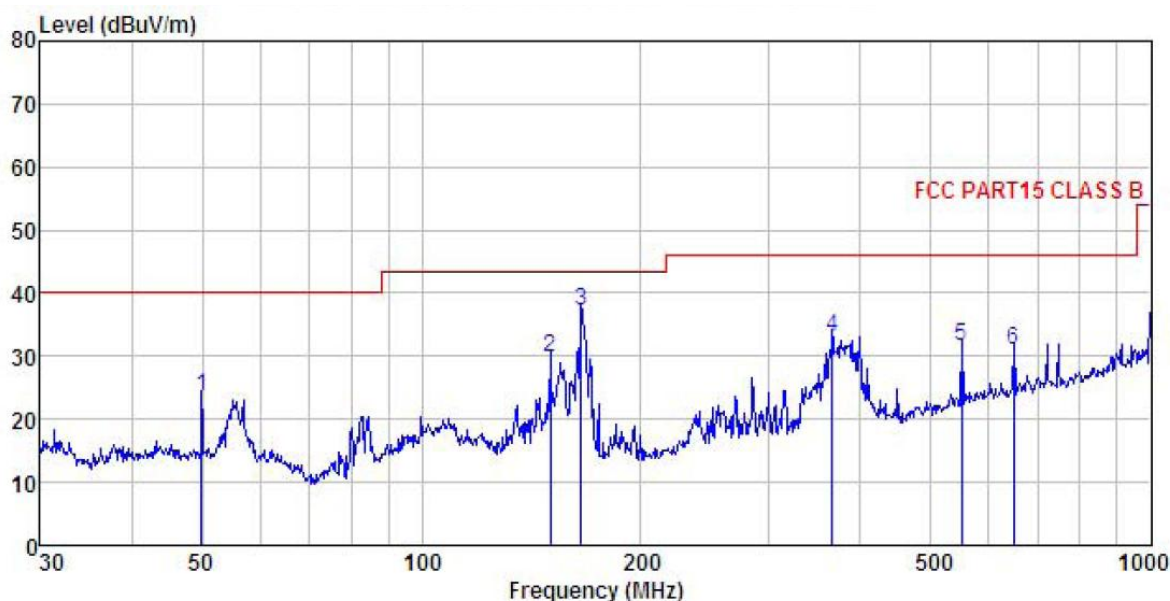


Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL  
 EUT : Mobile phone  
 Model : ,A45T  
 Test mode : PC Mode  
 Power Rating : AC120V/60Hz  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: Carey  
 REMARK :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	49.881	39.50	13.26	0.61	29.82	23.55	40.00 -16.45 QP
2	150.011	49.59	8.26	1.32	29.22	29.95	43.50 -13.55 QP
3	165.487	56.15	8.82	1.34	29.09	37.22	43.50 -6.28 QP
4	365.539	45.31	14.48	2.00	28.63	33.16	46.00 -12.84 QP
5	550.948	40.44	17.57	2.54	29.10	31.45	46.00 -14.55 QP
6	649.660	38.26	18.64	2.79	28.78	30.91	46.00 -15.09 QP

**Above 1GHz**


Horizontal:

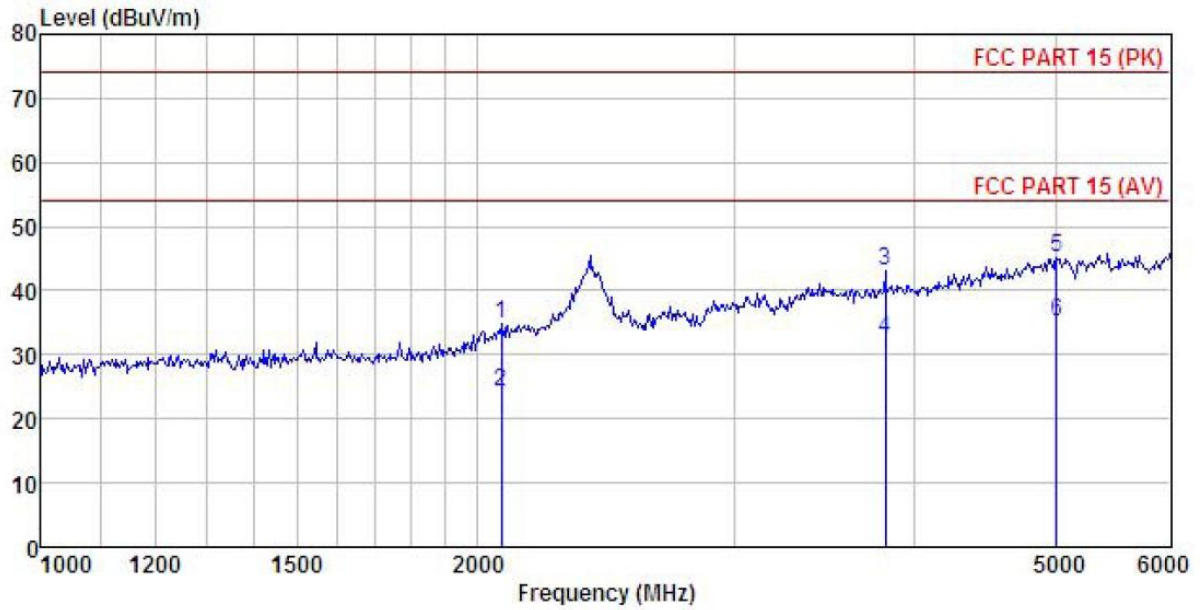

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL  
 EUT : Mobile phone  
 Model : A45T  
 Test mode : PC mode  
 Power Rating : AC120V/60Hz  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: Carey  
 REMARK :

	Freq	ReadAntenna	Cable Preamp	Limit	Over	Remark			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2076.259	43.85	26.71	4.97	40.62	34.91	74.00	-39.09	Peak
2	2076.259	33.23	26.71	4.97	40.62	24.29	54.00	-29.71	Average
3	3815.033	46.62	29.57	7.52	40.63	43.08	74.00	-30.92	Peak
4	3815.033	36.04	29.57	7.52	40.63	32.50	54.00	-21.50	Average
5	5009.426	44.21	31.85	9.12	39.99	45.19	74.00	-28.81	Peak
6	5009.426	34.11	31.85	9.12	39.99	35.09	54.00	-18.91	Average

Vertical:

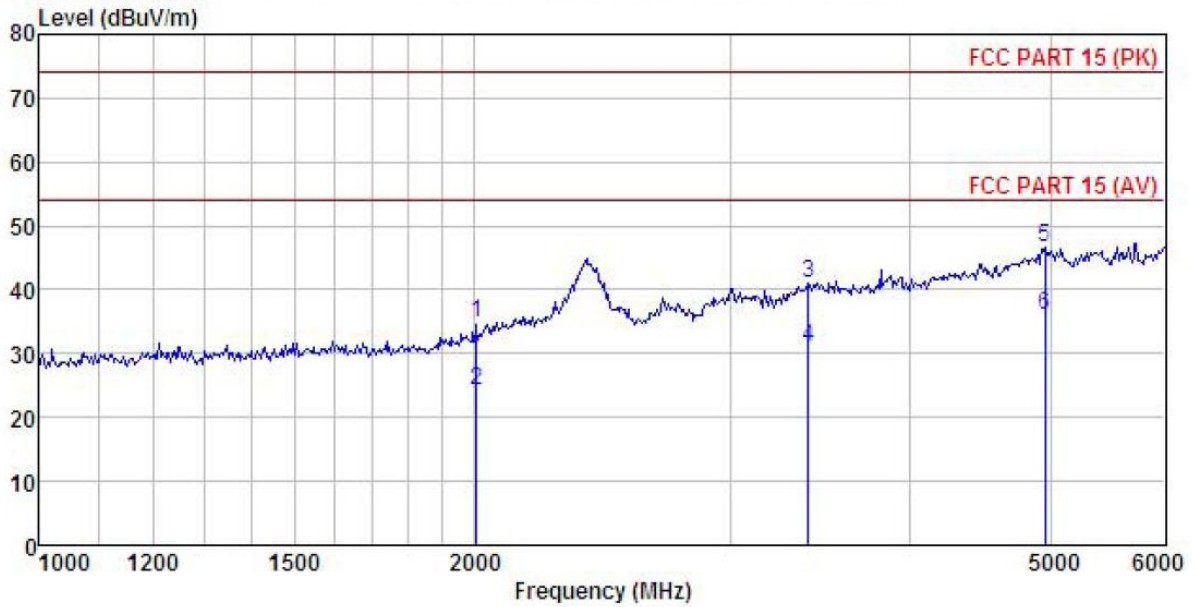

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL  
 EUT : Mobile phone  
 Model : A45T  
 Test mode : PC mode  
 Power Rating : AC120V/60Hz  
 Environment : Temp:25.5°C Humi:55%  
 Test Engineer: Carey  
 REMARK :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2003.569	44.78	26.13	4.83	40.84	34.90	74.00 -39.10 Peak
2	2003.569	34.01	26.13	4.83	40.84	24.13	54.00 -29.87 Average
3	3402.126	44.83	28.46	6.44	38.84	40.89	74.00 -33.11 Peak
4	3402.126	34.99	28.46	6.44	38.84	31.05	54.00 -22.95 Average
5	4958.678	45.81	31.69	9.08	40.03	46.55	74.00 -27.45 Peak
6	4958.678	35.22	31.69	9.08	40.03	35.96	54.00 -18.04 Average