

FCC REPORT (WIFI)

Applicant: AZUMI S.A

Address of Applicant: Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza,
Piso 16 of. 16-01, Marbella, Ciudad de Panamá City, Rep.
Panamá

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: KL35

FCC ID: QRP-AZUMI KL35

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 24 Mar., 2014

Date of Test: 24 Mar., to 01 Apr., 2014

Date of report issued: 02 Apr., 2014

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	02 Apr., 2014	Original

Prepared by:

Date:

02 Apr., 2014

Report Clerk

Reviewed by:

Date:

02 Apr., 2014

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 LABORATORY FACILITY.....	8
5.5 LABORATORY LOCATION	8
5.6 TEST INSTRUMENTS LIST.....	9
6 TEST RESULTS AND MEASUREMENT DATA.....	10
6.1 ANTENNA REQUIREMENT:.....	10
6.2 CONDUCTED EMISSION	11
6.3 CONDUCTED OUTPUT POWER	14
6.4 OCCUPY BANDWIDTH	19
6.5 POWER SPECTRAL DENSITY	28
6.6 BAND EDGE	33
6.6.1 Conducted Emission Method.....	33
6.6.2 Radiated Emission Method.....	36
6.7 SPURIOUS EMISSION.....	53
6.7.1 Conducted Emission Method.....	53
6.7.2 Radiated Emission Method.....	60
7 TEST SETUP PHOTO	88
8 EUT CONSTRUCTIONAL DETAILS	89

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	AZUMI S.A
Address of Applicant:	Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01, Marbella, Ciudad de Panamá City, Rep. Panamá
Manufacturer:	AZUMI (HK) Limited
Address of Manufacturer:	RM 2309, 23/F HO KING COMM CTR, 2-16 FAYUEN ST, MONGKOK KOWLOON, HONG KONG

5.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	KL35
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40))
Channel numbers:	11 for 802.11b/802.11g/802.11(H20) 7 for 802.11n(H40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	0.85 dBi
AC adapter:	Model:KL35 Input:100-240V AC,50/60Hz 0.1A Output:5.0V DC MAX500mA
Power supply:	Rechargeable Li-ion Battery DC3.7V-1450mAh

Operation Frequency each of channel For 802.11b/g/n(H20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel For 802.11n(H40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
		4	2427MHz	7	2442MHz		
		5	2432MHz	8	2447MHz		
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/802.11g/802.11n (H20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n (H40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Operation mode	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20) and 13.5 Mbps for 802.11n(H40). Duty cycle setting during the transmission is 100% with maximum power setting for all modulations.

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282

Fax: +86-755-23116366

5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2013	June 08 2014
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	May 25 2013	May 24 2014
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 25 2013	May 24 2014
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2014	Mar. 31 2015
6	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2014	Mar. 31 2015
7	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2014	Mar. 31 2015
8	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2014	Mar. 31 2015
9	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2014	Mar. 31 2015
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2014	Mar. 31 2015
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2013	June 08 2014
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2014	Mar. 31 2015
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2014	Mar. 29 2015
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 25 2013	May. 24 2014
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2014	Mar. 31 2015
18	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 12 2013	Aug. 11 2014
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	May. 25 2013	May. 24 2014
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	May. 25 2013	May. 24 2014

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2013	June 08 2014
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2013	May 24 2014
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2014	Mar. 31 2015
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2014	Mar. 31 2015
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement:


Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p>	
<p>15.247(c) (1)(i) requirement: <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
E.U.T Antenna:	
<p>The antenna is an internal antenna which cannot replace by end-user, the best case gain of the antenna is 0.85 dBi.</p>	
	

6.2 Conducted Emission

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.4: 2003																
Test Frequency Range:	150 kHz to 30 MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9 kHz, VBW=30 kHz																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test procedure	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 																
Test setup:	<p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test Instruments:	Refer to section 5.6 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Passed																

Measurement Data


Neutral:

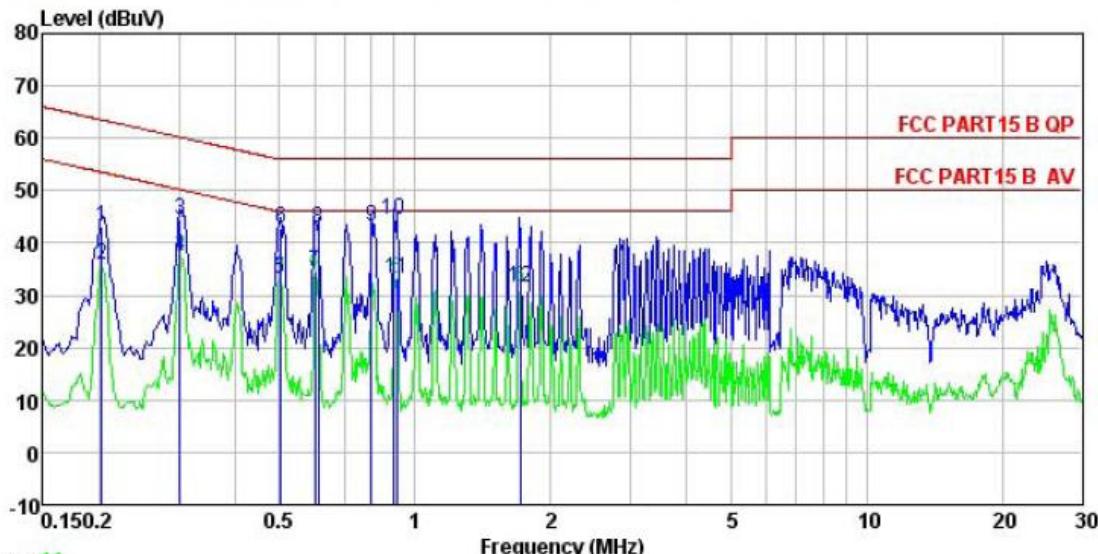

Site : CCIS Conducted test Site
 Condition : FCC PART15 B QP LISN NEUTRAL
 Job No. : 163RF
 EUT : Mobile phone
 Model : KL35
 Test Mode : WIFI mode
 Power Rating : AC 120V/ 60 Hz
 Environment : Temp: 23 °C Huni:56% Atmos:101KPa
 Test Engineer: Garen
 Remark :

Freq	Read	LISN	Cable	Limit	Over	Remark
	Level	Factor	Loss			
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.202	32.09	0.25	10.76	43.10	63.54 -20.44 QP
2	0.202	24.88	0.25	10.76	35.89	53.54 -17.65 Average
3	0.302	33.58	0.26	10.74	44.58	60.19 -15.61 QP
4	0.302	26.53	0.26	10.74	37.53	50.19 -12.66 Average
5	0.502	22.03	0.29	10.76	33.08	46.00 -12.92 Average
6	0.505	31.72	0.29	10.76	42.77	56.00 -13.23 QP
7	0.601	23.36	0.23	10.77	34.36	46.00 -11.64 Average
8	0.611	31.83	0.22	10.77	42.82	56.00 -13.18 QP
9	0.800	32.07	0.19	10.81	43.07	56.00 -12.93 QP
10	0.899	33.51	0.21	10.84	44.56	56.00 -11.44 QP
11	0.909	22.28	0.21	10.84	33.33	46.00 -12.67 Average
12	1.707	20.37	0.27	10.94	31.58	46.00 -14.42 Average

Line:

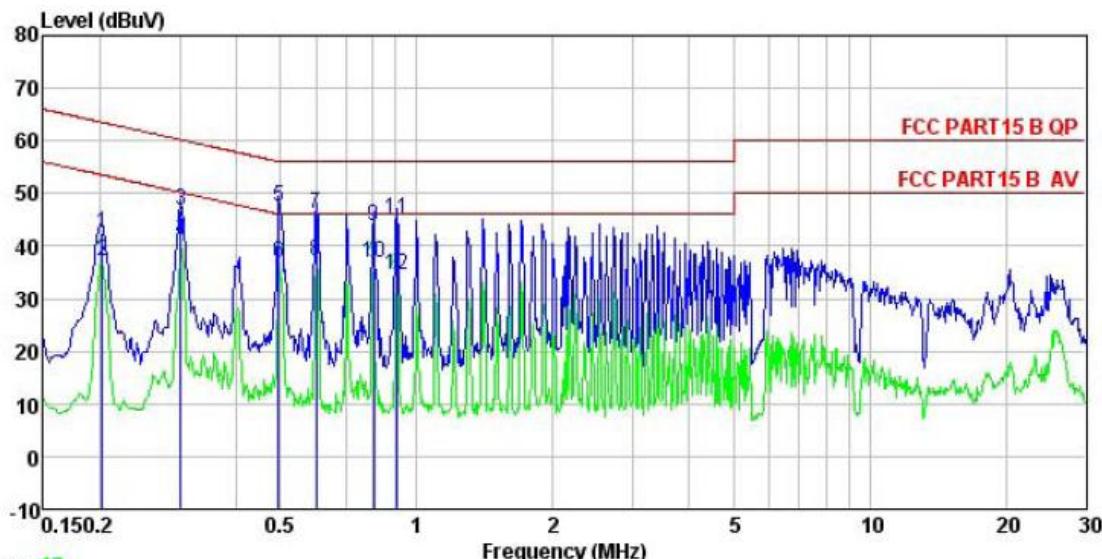


Site : CCIS Conducted test Site
 Condition : FCC PART15 B QP LISN LINE
 Job No. : 163RF
 EUT : Mobile phone
 Model : KL35
 Test Mode : WIFI mode
 Power Rating : AC 120V/ 60 Hz
 Environment : Temp: 23 °C Huni:56% Atmos:101KPa
 Test Engineer: Garen
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.202	31.51	0.28	10.76	42.55	63.54	-20.99	QP
2	0.202	26.04	0.28	10.76	37.08	53.54	-16.46	Average
3	0.302	35.80	0.26	10.74	46.80	60.19	-13.39	QP
4	0.302	30.18	0.26	10.74	41.18	50.19	-9.01	Average
5	0.497	36.29	0.29	10.76	47.34	56.05	-8.71	QP
6	0.497	25.63	0.29	10.76	36.68	46.05	-9.37	Average
7	0.601	35.20	0.25	10.77	46.22	56.00	-9.78	QP
8	0.601	26.26	0.25	10.77	37.28	46.00	-8.72	Average
9	0.804	32.83	0.23	10.81	43.87	56.00	-12.13	QP
10	0.804	25.71	0.23	10.81	36.75	46.00	-9.25	Average
11	0.904	34.17	0.24	10.84	45.25	56.00	-10.75	QP
12	0.904	23.36	0.24	10.84	34.44	46.00	-11.56	Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

6.3 Conducted Output Power

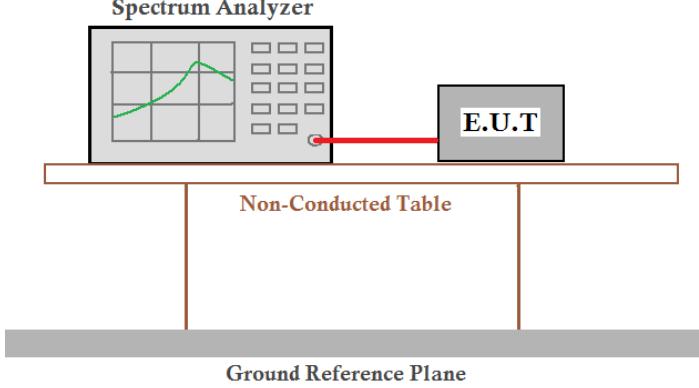Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup for conducted output power. A Spectrum Analyzer is positioned above a Non-Conducted Table. A red line connects the analyzer to the Equipment Under Test (E.U.T), which is a grey rectangular box. The entire setup rests on a horizontal grey bar representing the Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	Test method refer to KDB558074 (DTS Measure Guidance) section 8.2, option 1.


Measurement Data

Test CH	Maximum Conducted Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	16.08	12.56	12.61	11.52	30.00	Pass
Middle	16.26	14.69	14.76	13.17		
Highest	16.51	12.72	12.87	11.40		


Test plot as follows:

Test mode:


802.11b

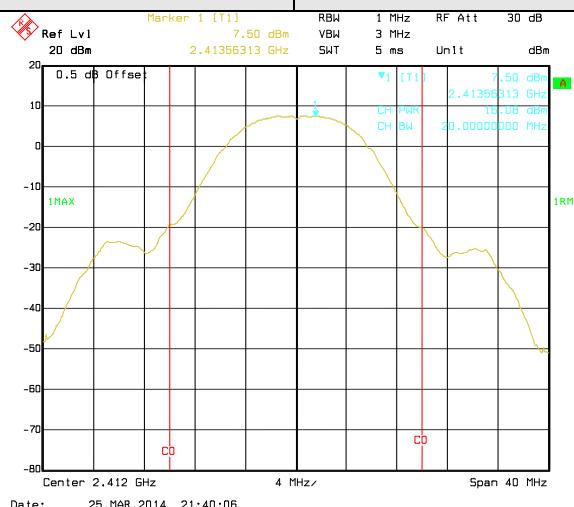


Lowest channel

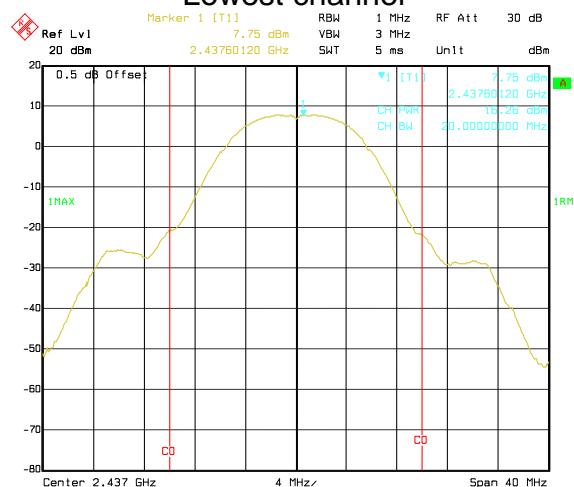



Middle channel

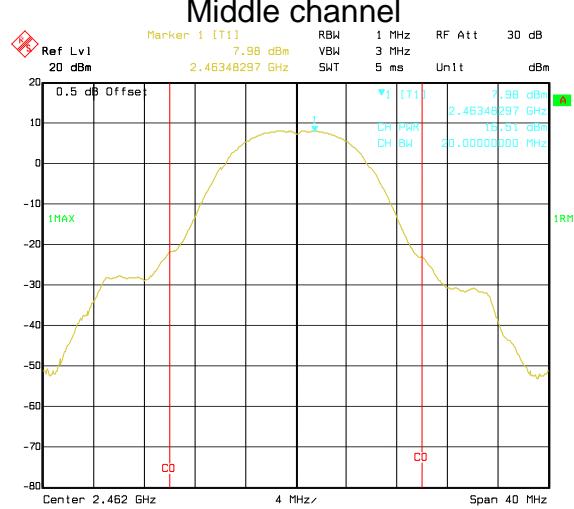


Highest channel

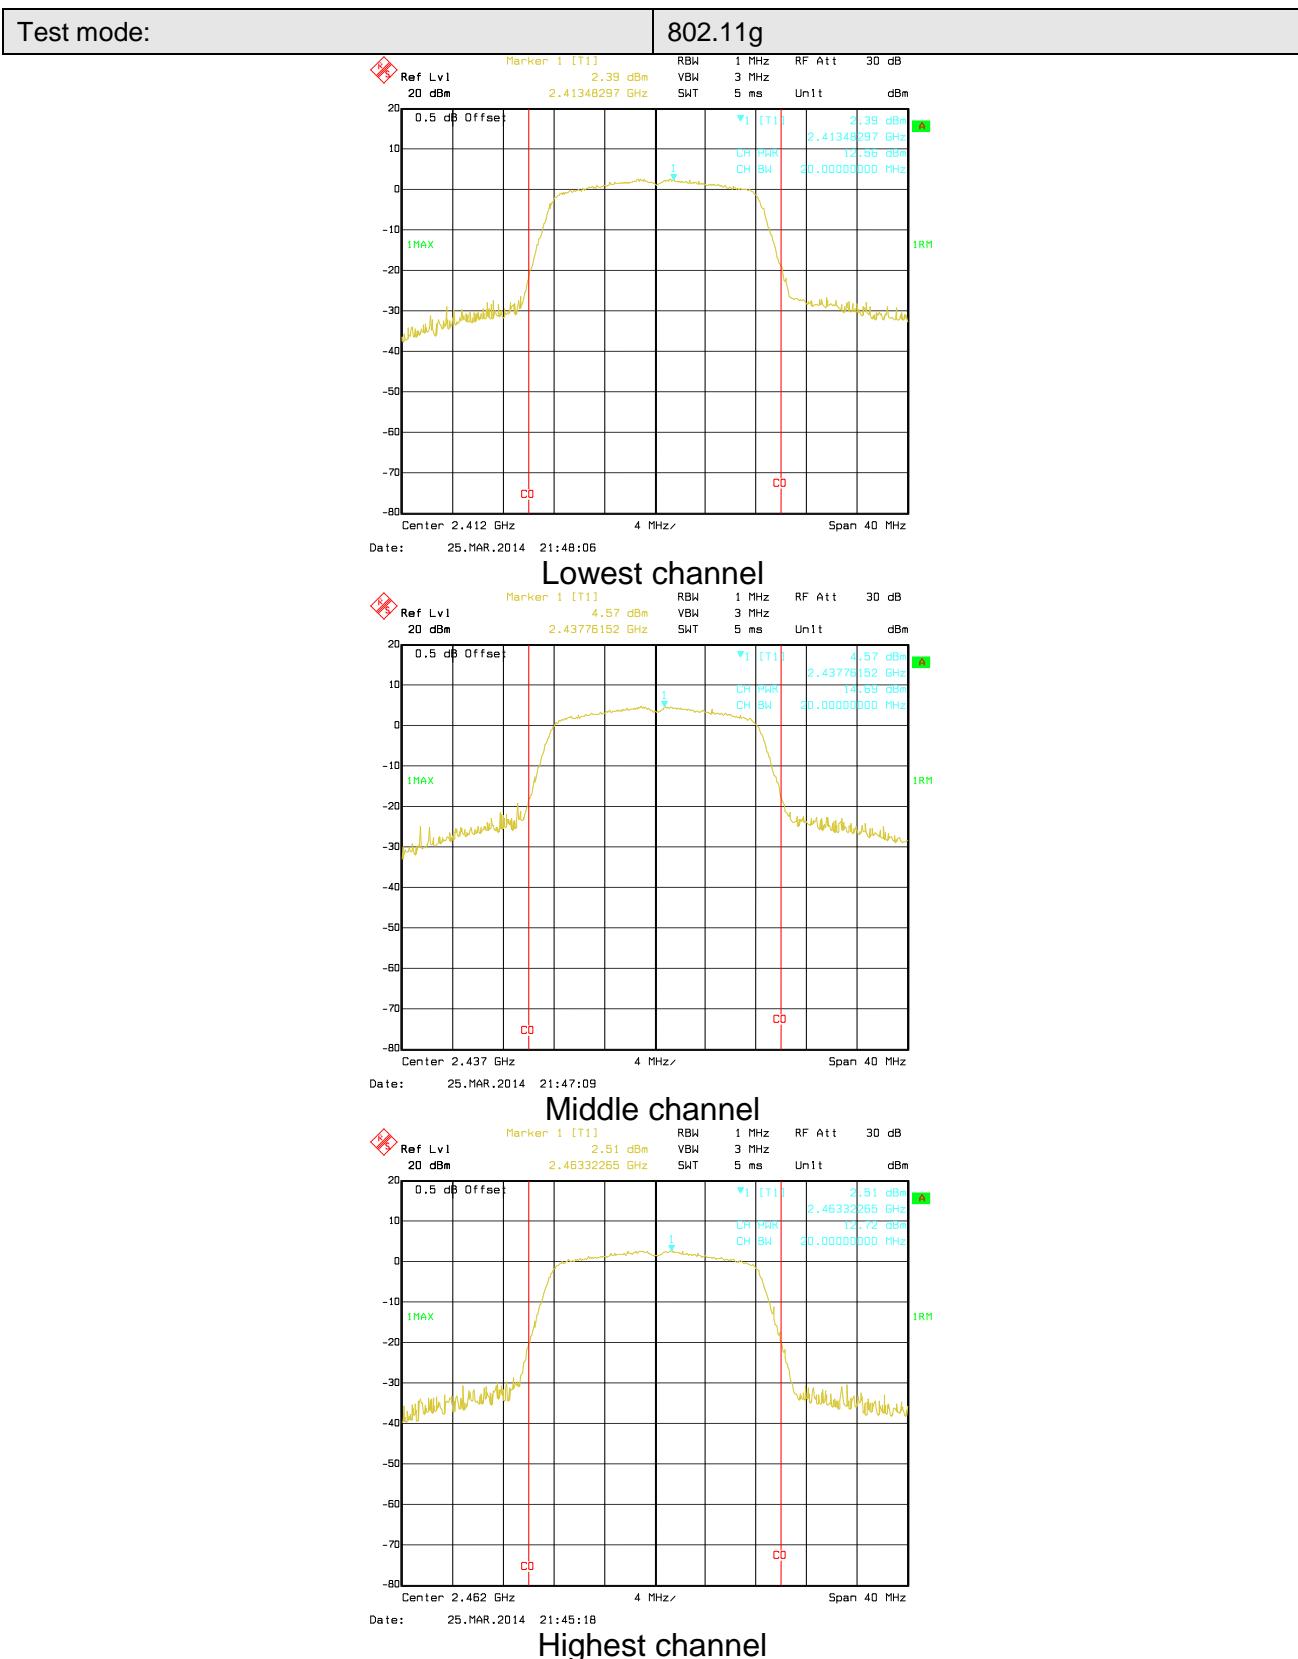

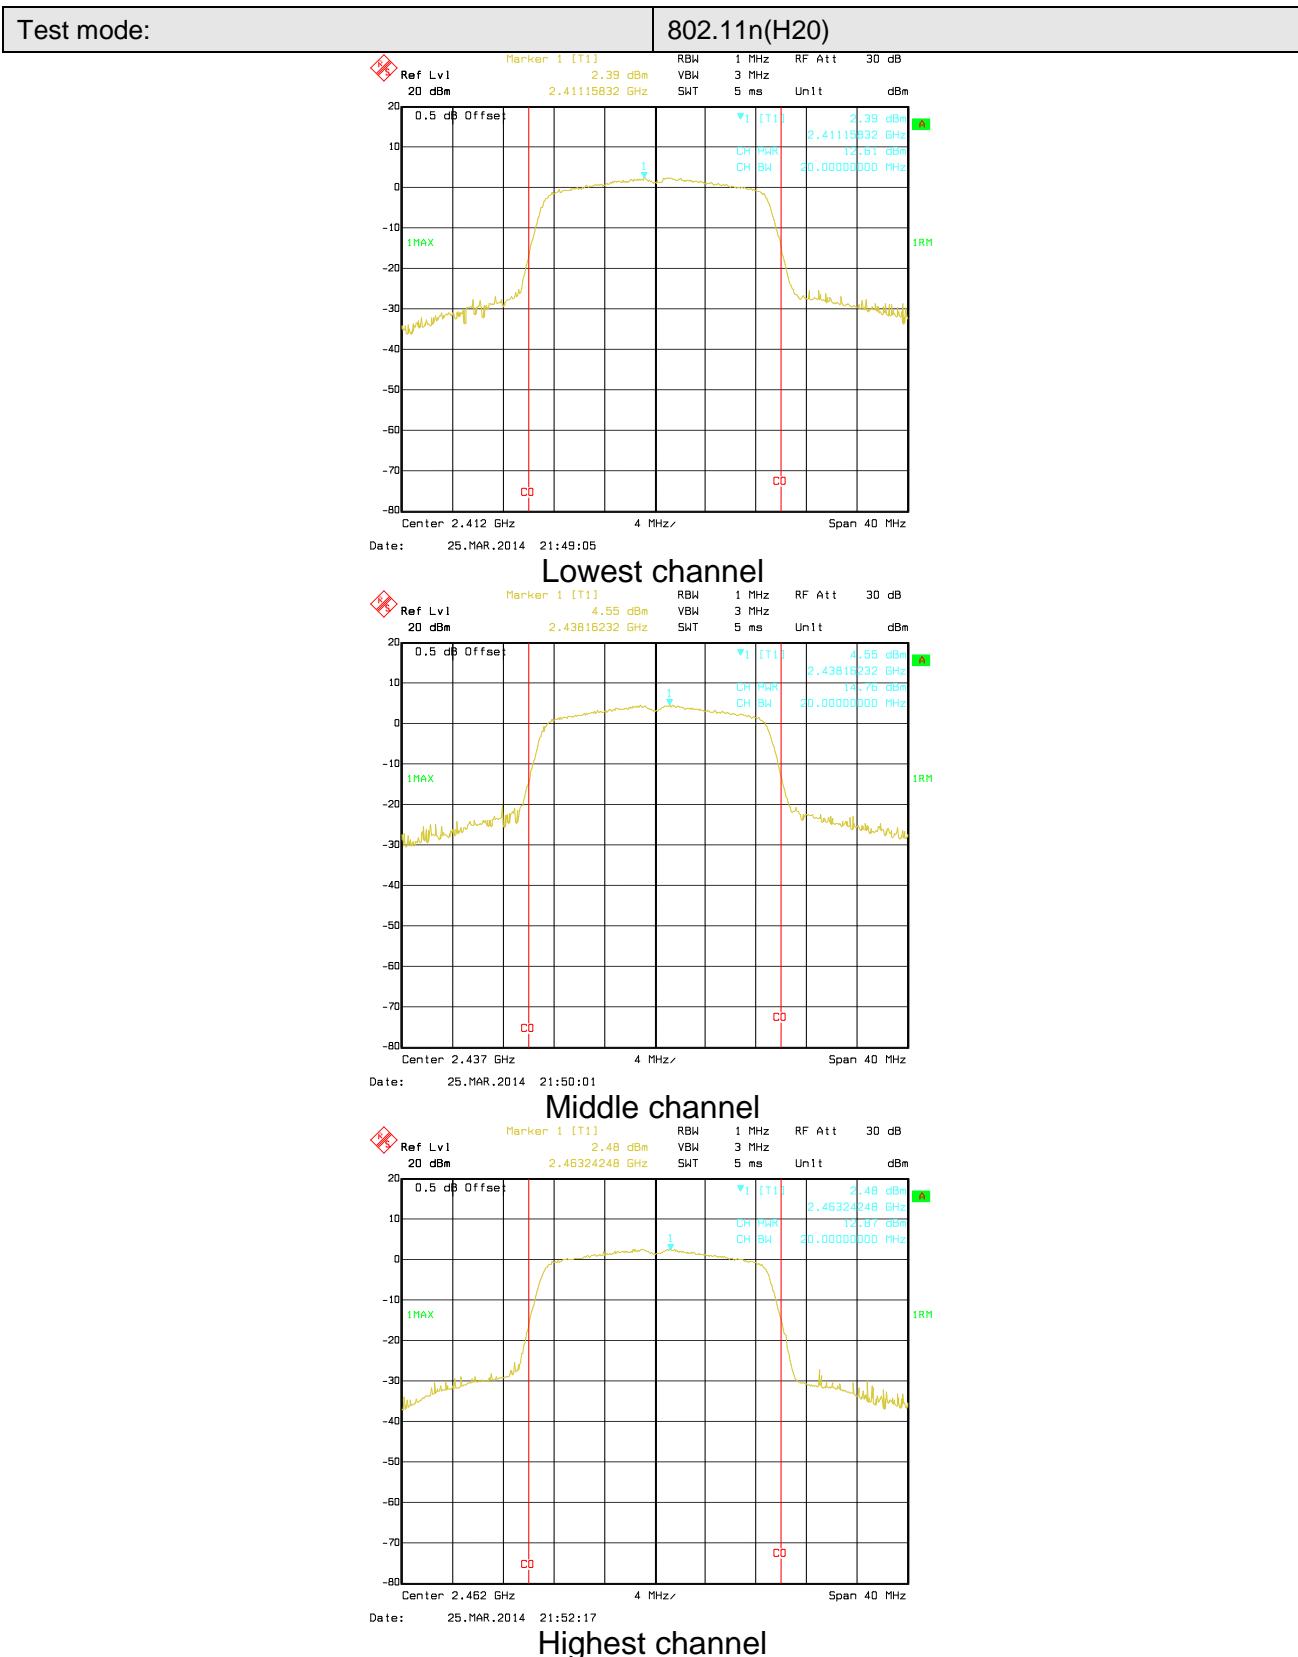

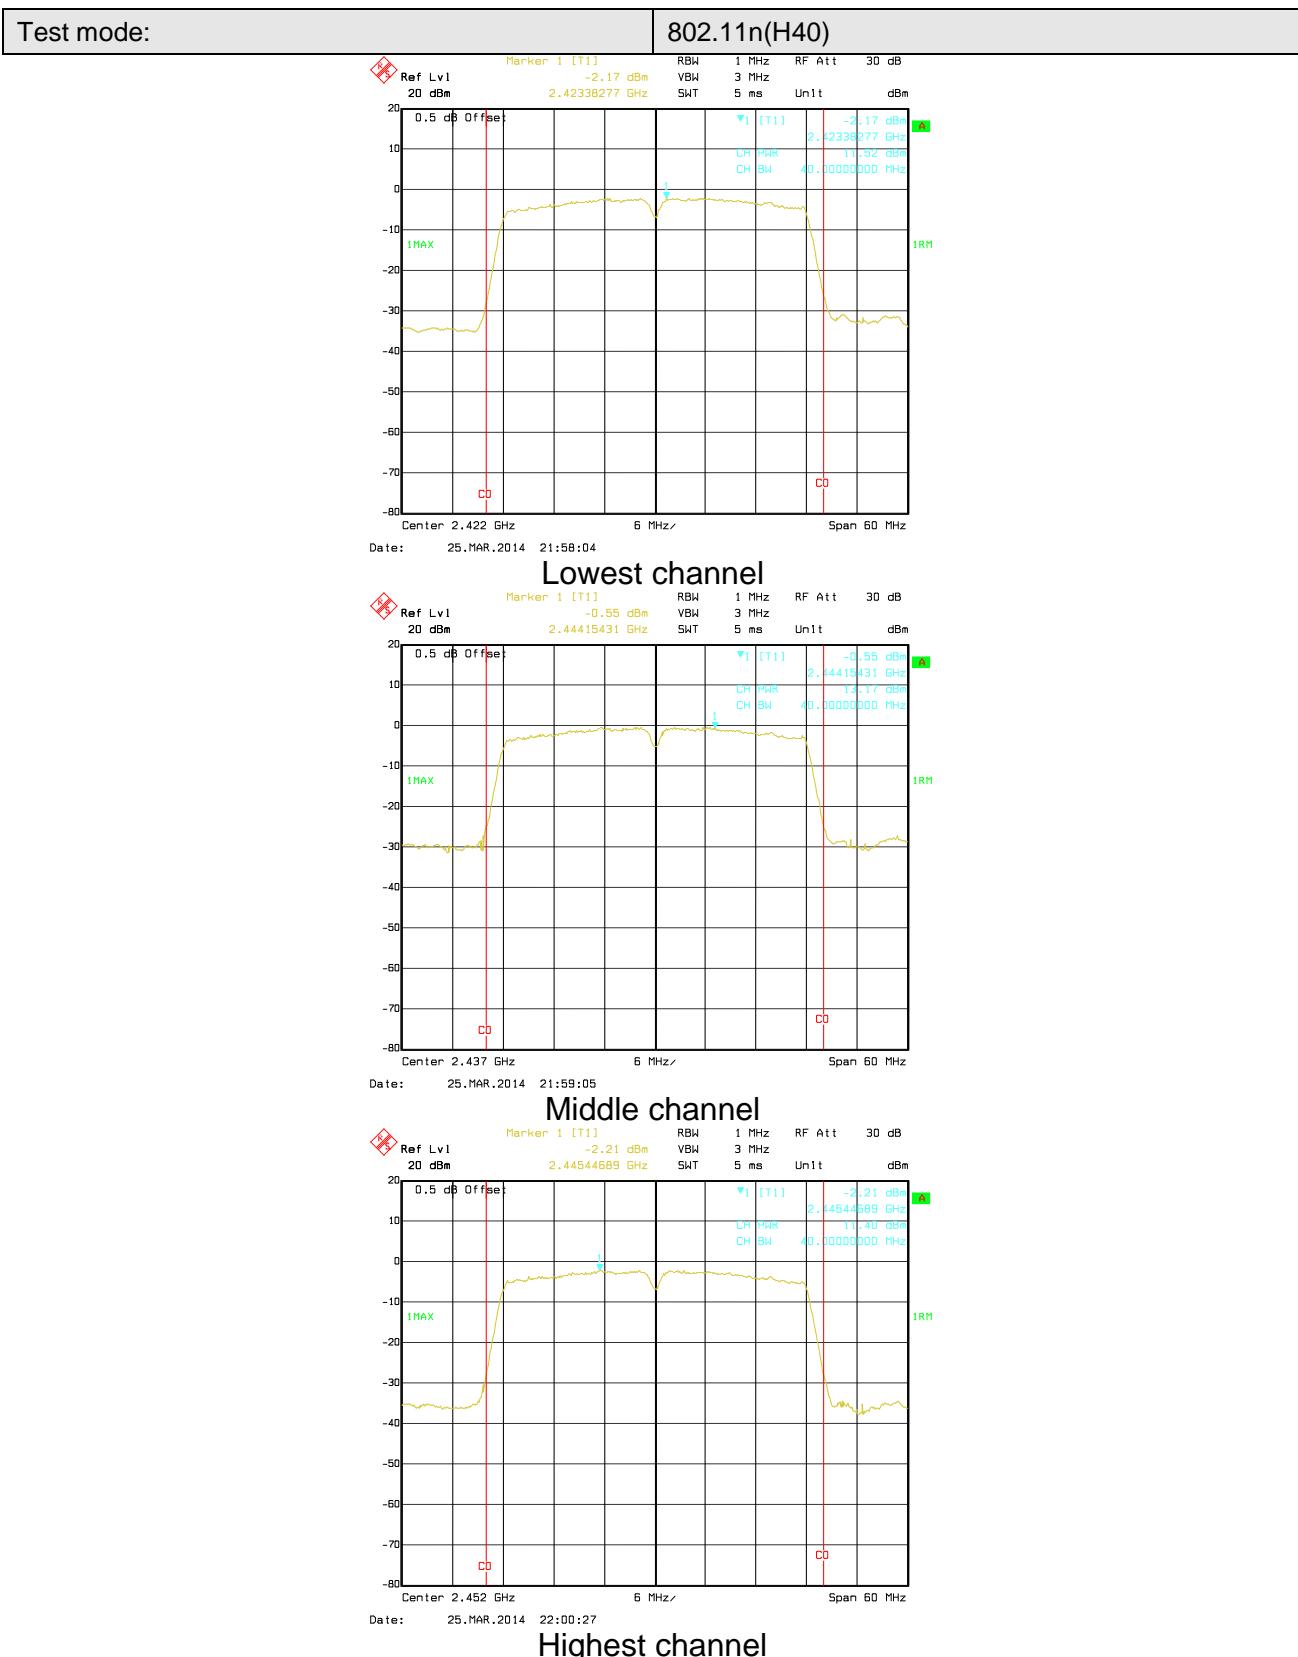

6.4 Occupy Bandwidth

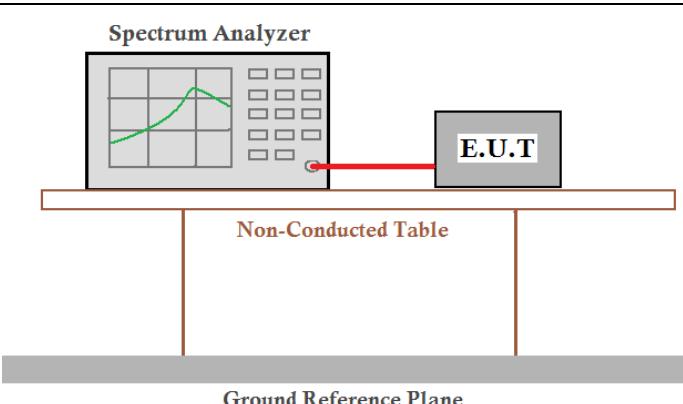
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	>500kHz
Test setup:	 <p>The diagram illustrates the test setup for measuring occupy bandwidth. A Spectrum Analyzer is connected to the Equipment Under Test (E.U.T) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data


Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	10.10	15.95	17.80	35.47	>500	Pass
Middle	10.10	16.59	17.80	35.83		
Highest	10.18	16.59	17.80	35.71		

Test CH	99% Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	13.31	16.43	17.56	35.83	N/A	N/A
Middle	13.15	16.43	17.72	35.83		
Highest	12.99	16.43	17.56	35.83		

Test plot as follows:

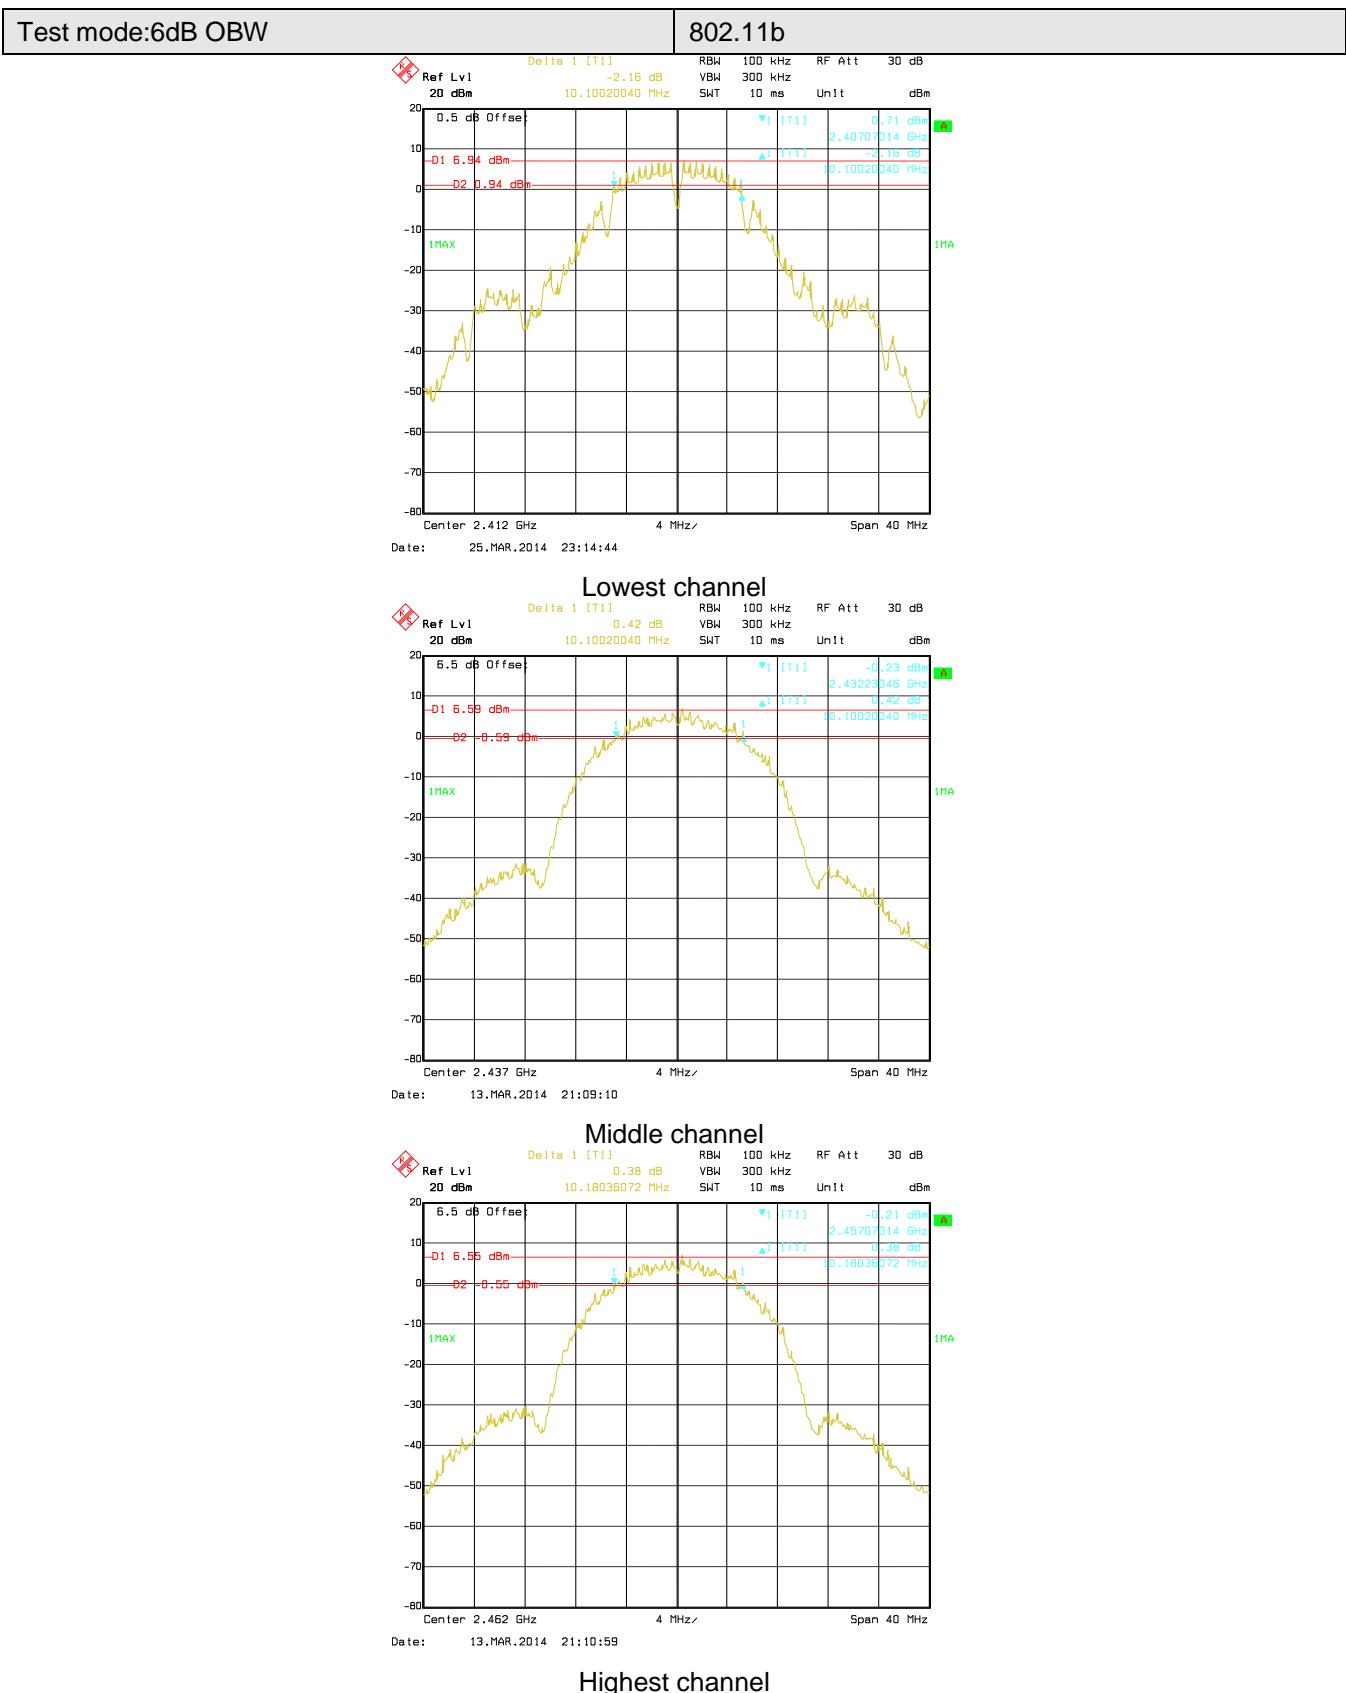

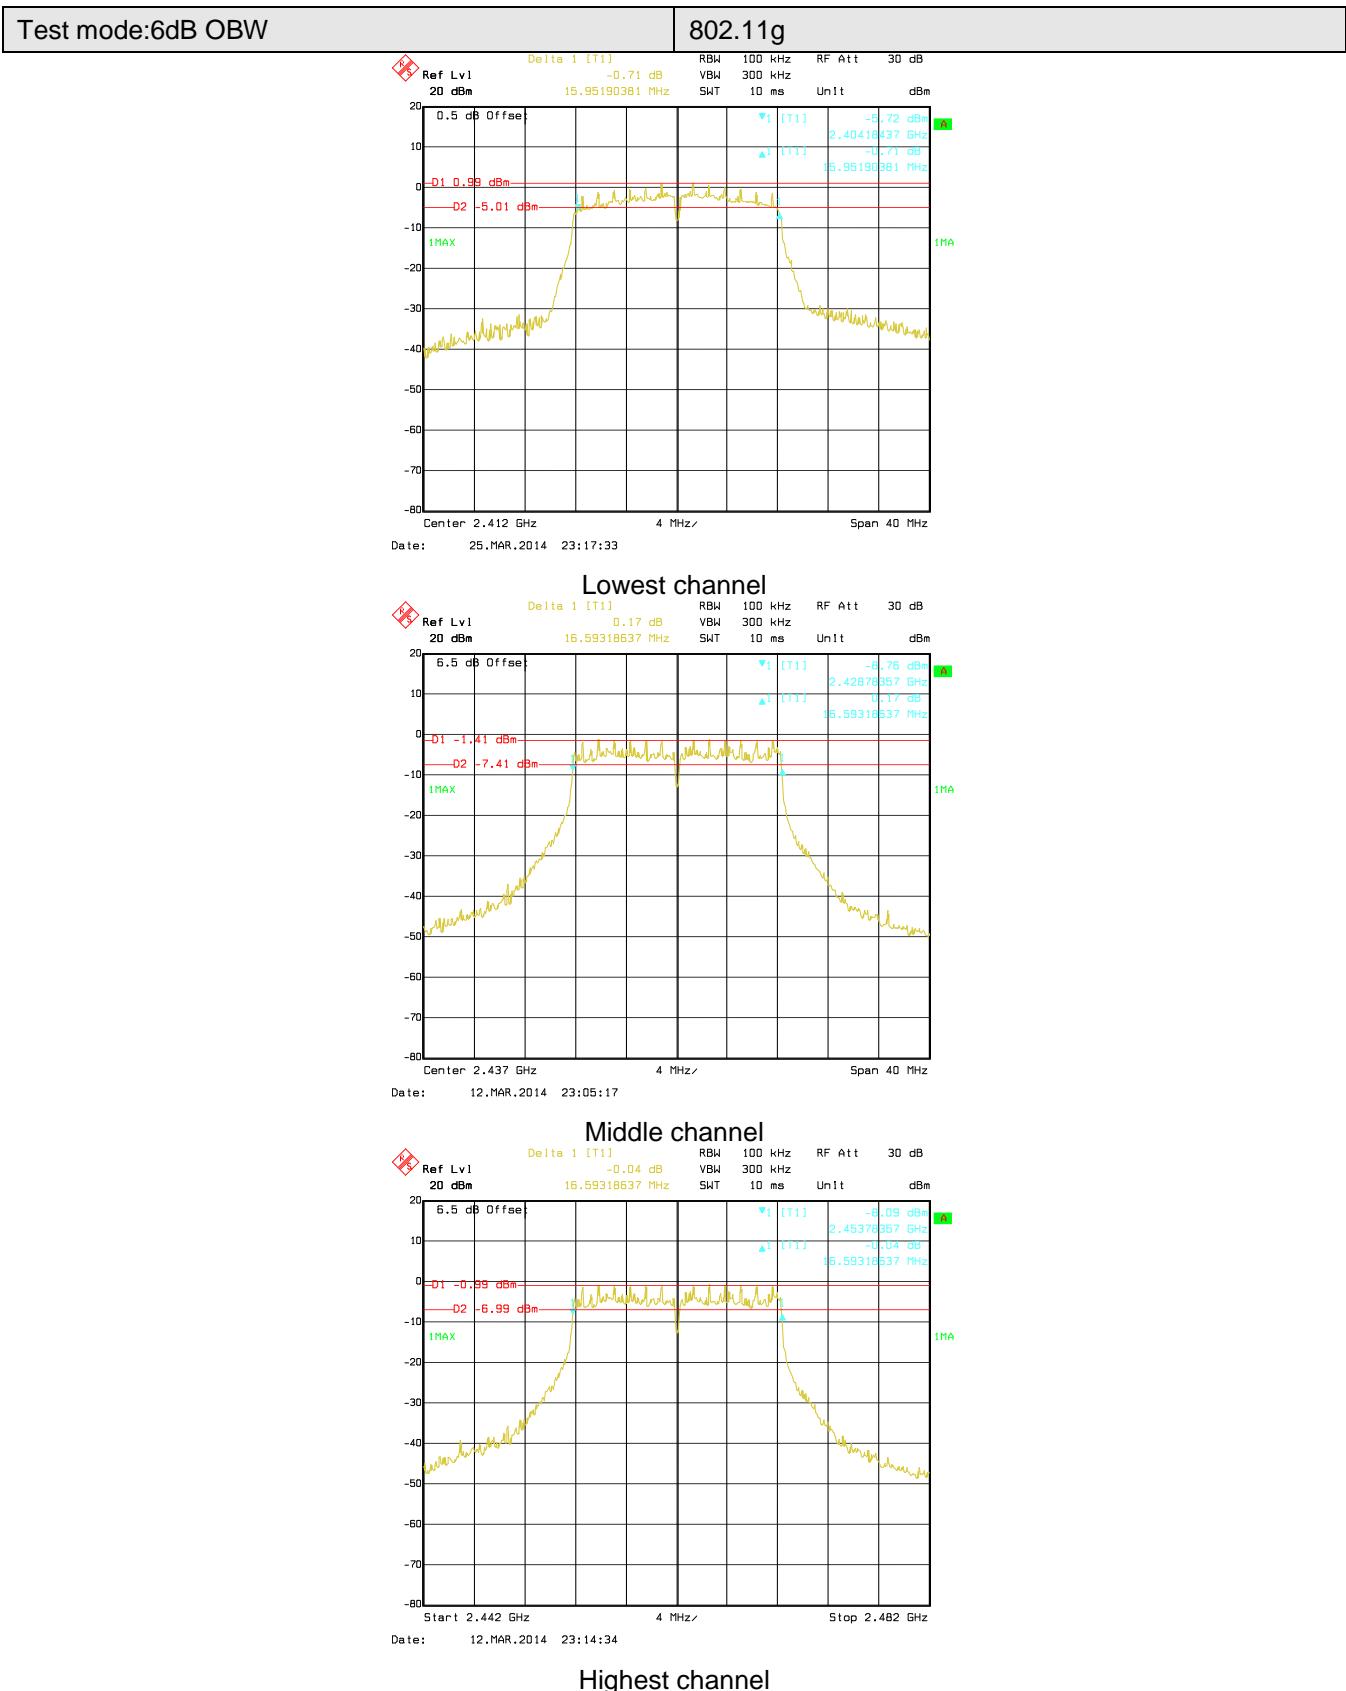

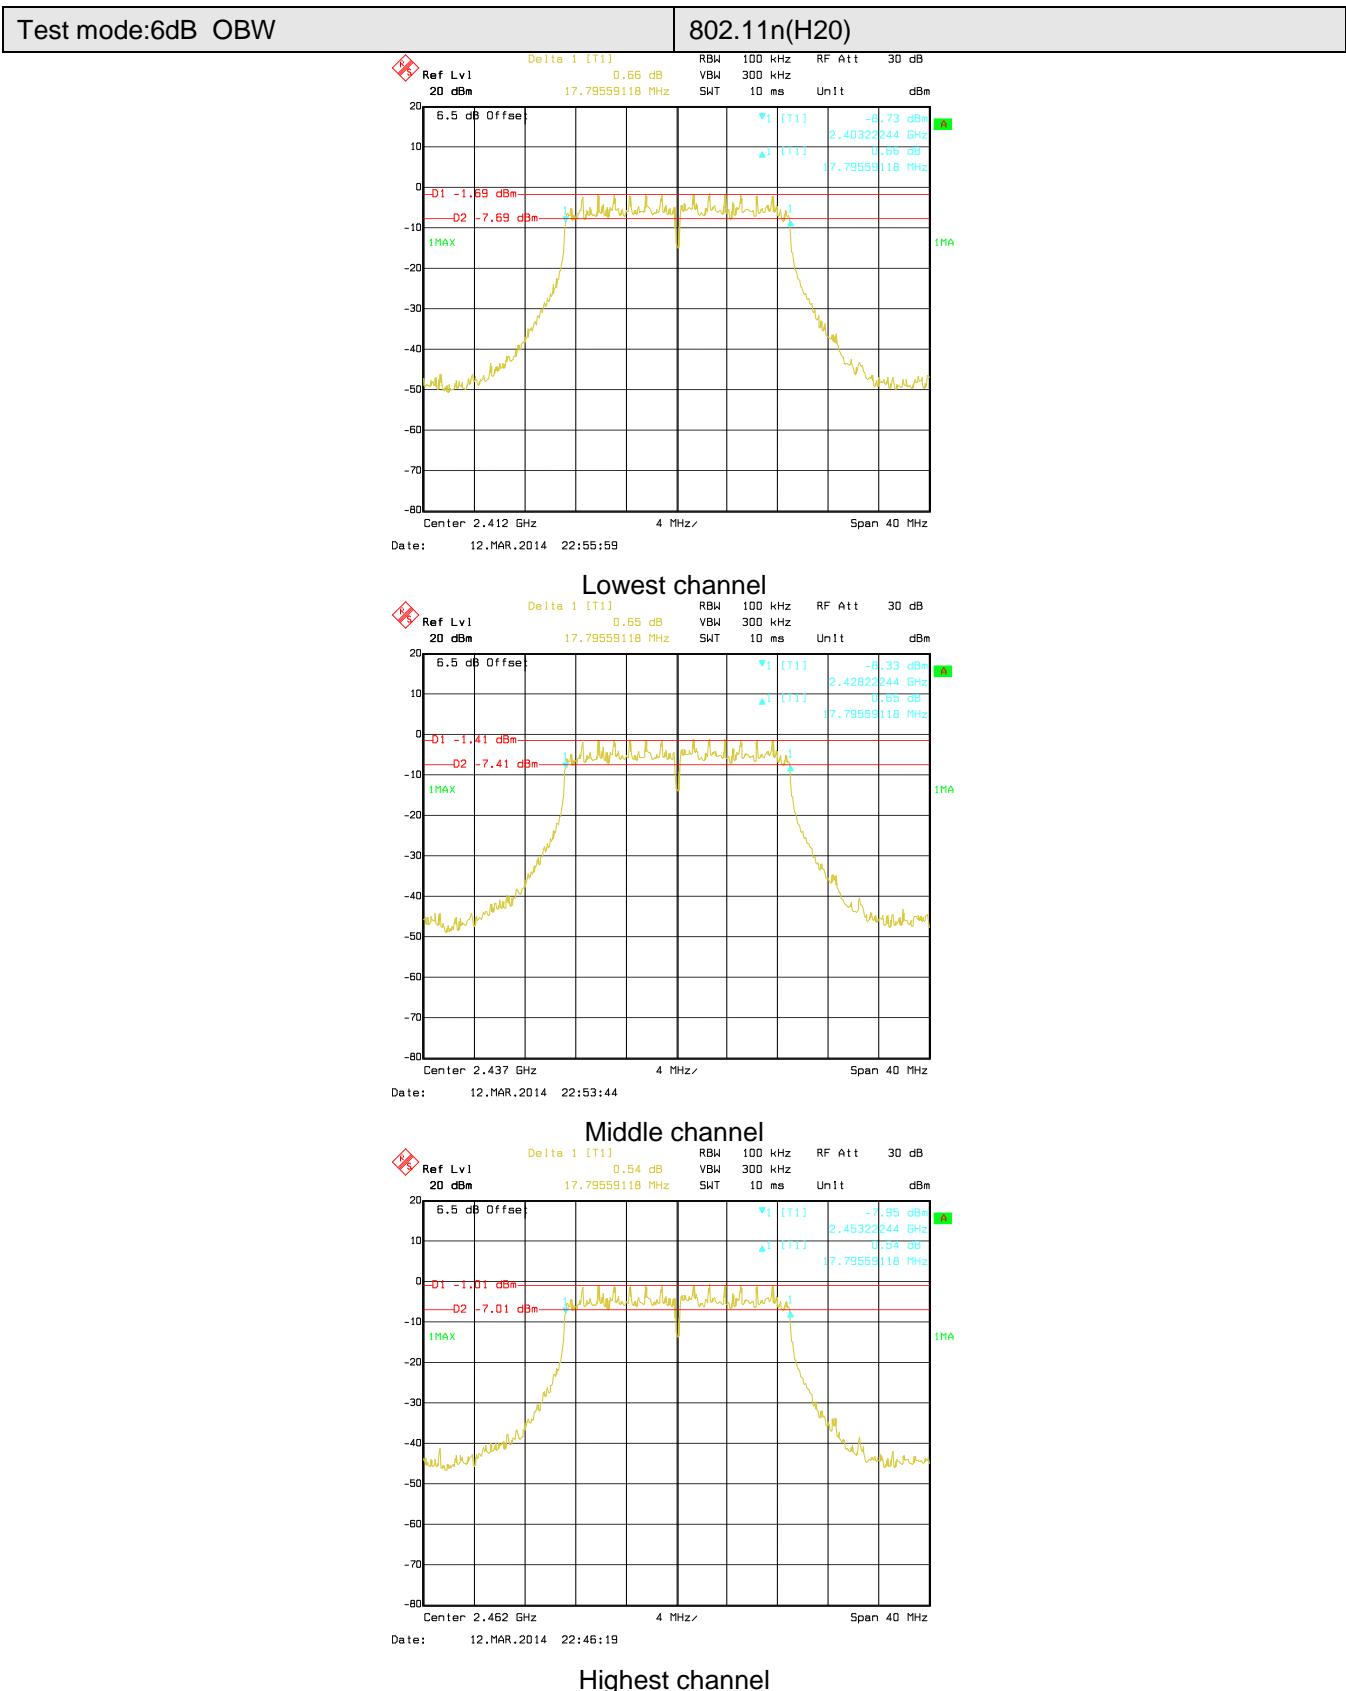

Test mode:6dB OBW

802.11n(H40)

Delta 1 [T1]
Ref Lvl 20 dBm
-0.27 dB 35.47094188 MHz

RBW 100 kHz
VBW 300 kHz
SWT 15 ms
Unit dBm

D1 -6.07 dBm
D2 -12.07 dBm
IMAX
T1 [T1] -12.28 dBm 2,40426453 GHz
T1I [T1I] -0.27 dB 35.47094188 MHz

Center 2.422 GHz 6 MHz Span 60 MHz

Date: 19.MAR.2014 16:07:42

Lowest channel

Delta 1 [T1]
Ref Lvl 20 dBm
-0.92 dB 35.83166333 MHz

RBW 100 kHz
VBW 300 kHz
SWT 15 ms
Unit dBm

D1 -3.66 dBm
D2 -9.66 dBm
IMAX
T1 [T1] -10.09 dBm 2,41914429 GHz
T1I [T1I] -0.92 dB 35.83166333 MHz

Center 2.437 GHz 6 MHz Span 60 MHz

Date: 19.MAR.2014 16:05:58

Middle channel

Delta 1 [T1]
Ref Lvl 20 dBm
-0.49 dB 35.71142285 MHz


RBW 100 kHz
VBW 300 kHz
SWT 15 ms
Unit dBm

D1 -5.46 dBm
D2 -11.46 dBm
IMAX
T1 [T1] -11.84 dBm 2,43414429 GHz
T1I [T1I] -0.49 dB 35.71142285 MHz

Center 2.452 GHz 6 MHz Span 60 MHz




Date: 19.MAR.2014 16:03:54

Highest channel

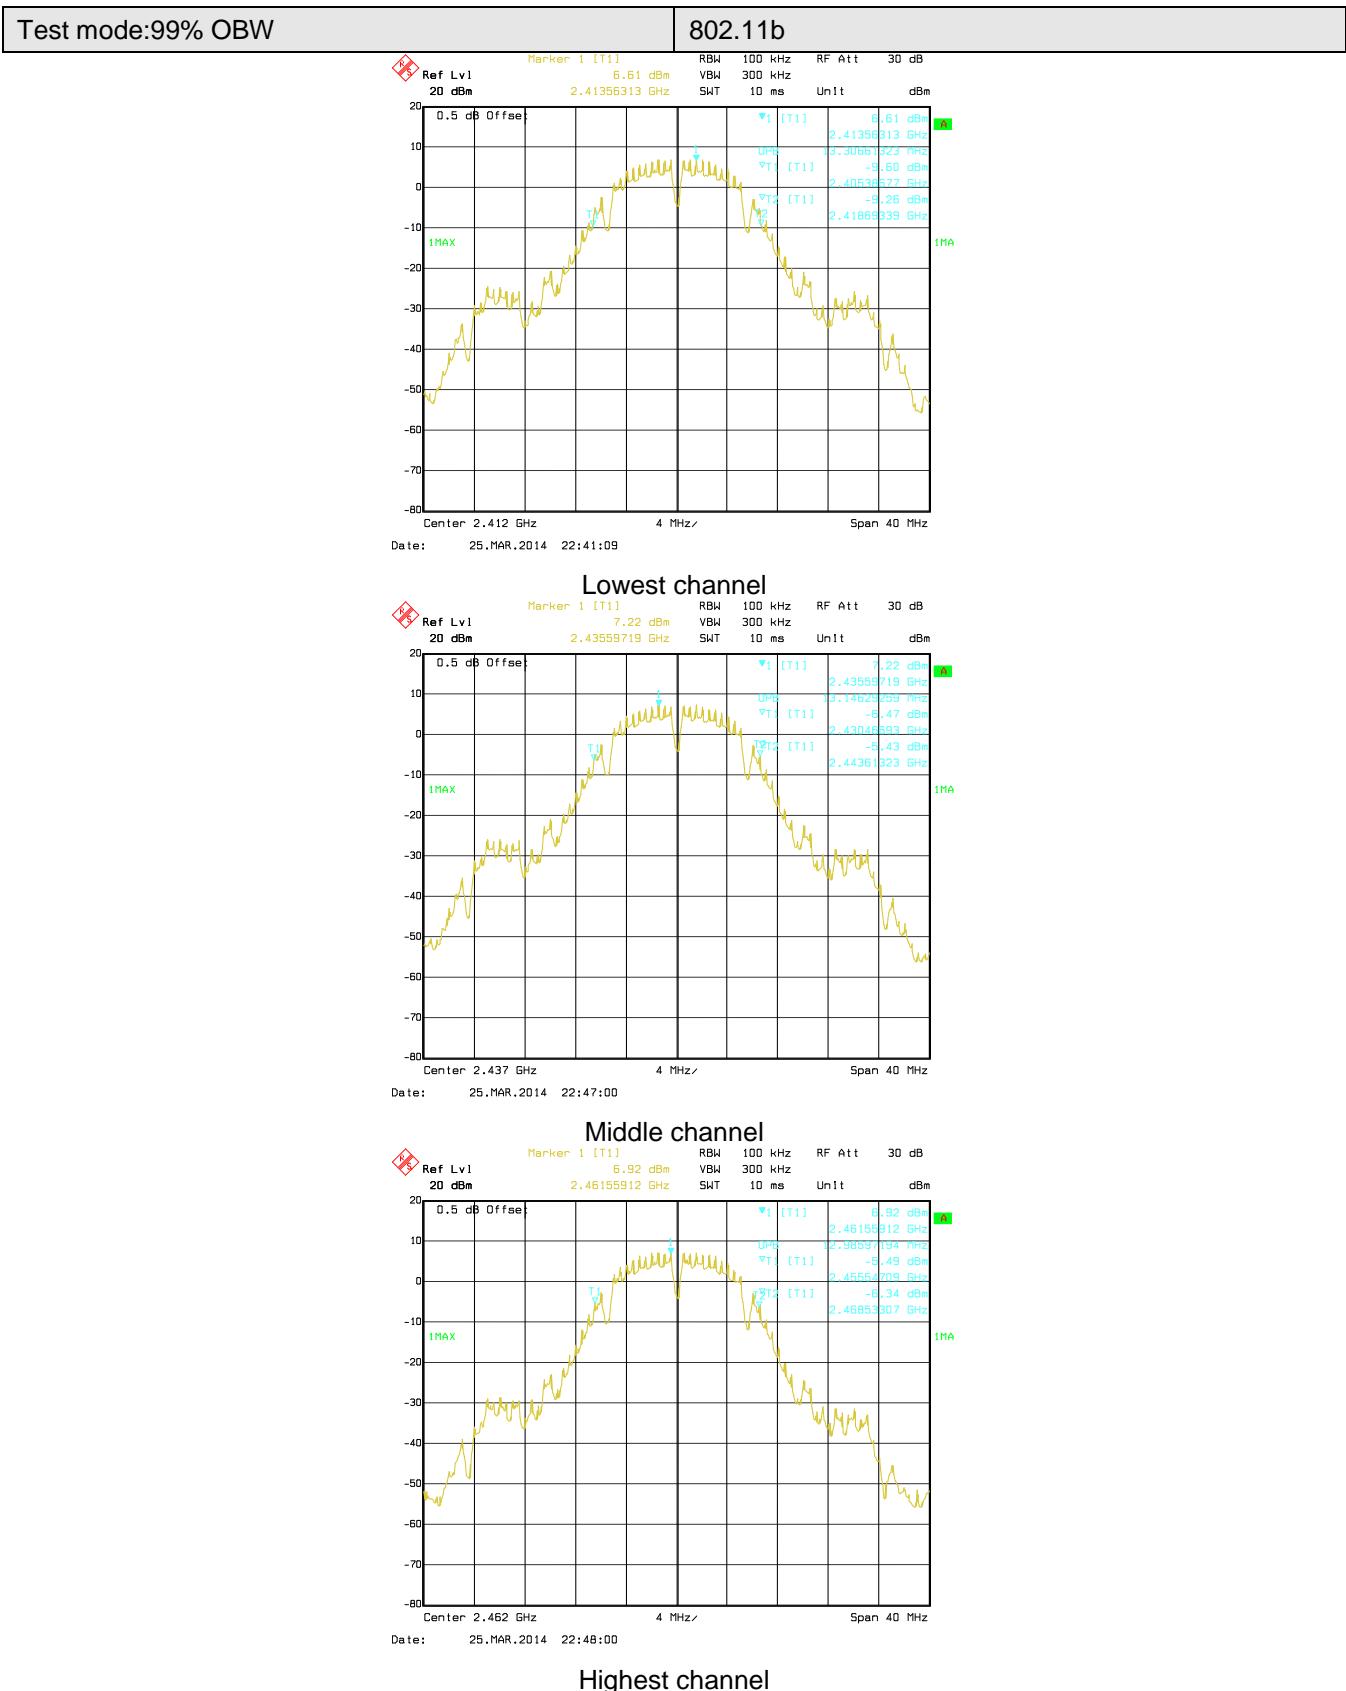

Test mode: 99% OBW




802.11g

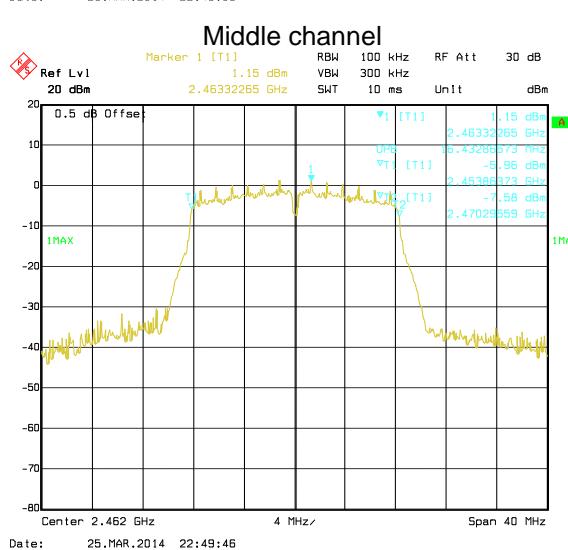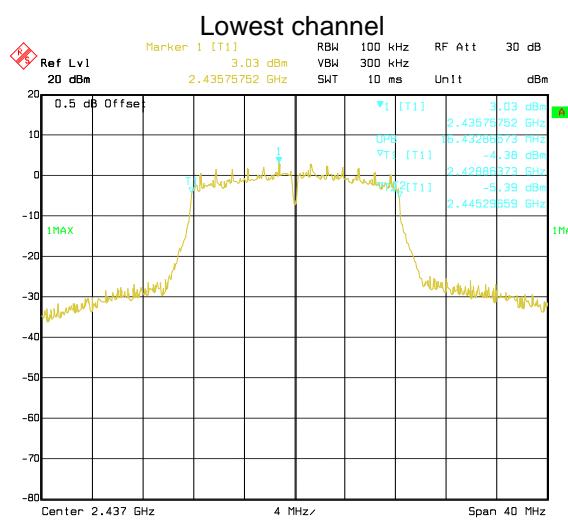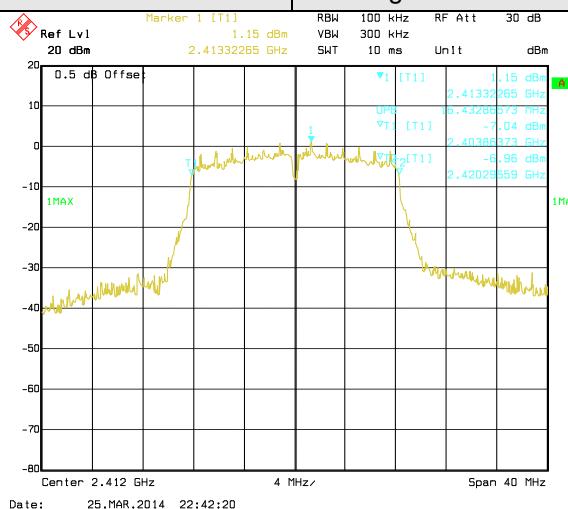

Highest channel

Test mode: 99% OBW




802.11n(H20)

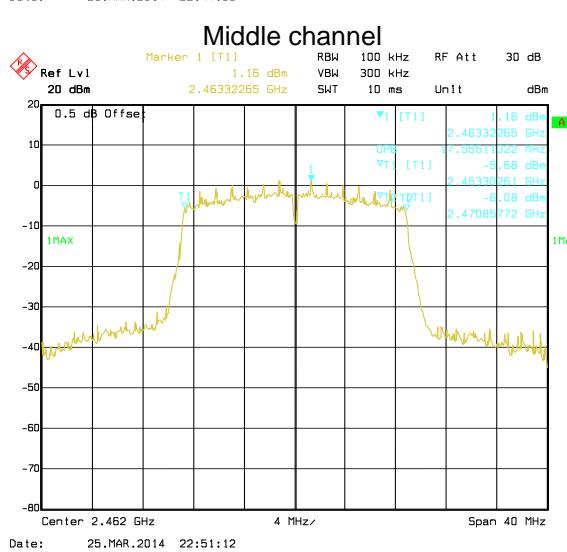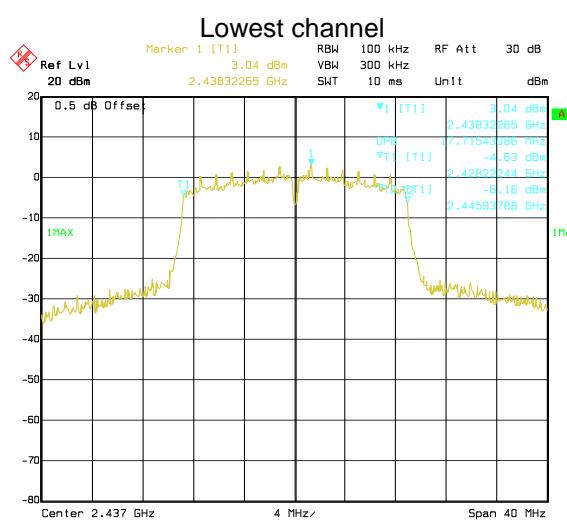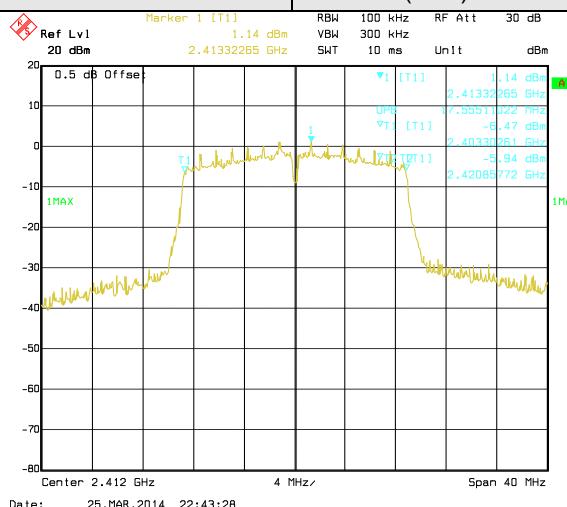

Highest channel


Test mode: 99% OBW

802.11n(H40)

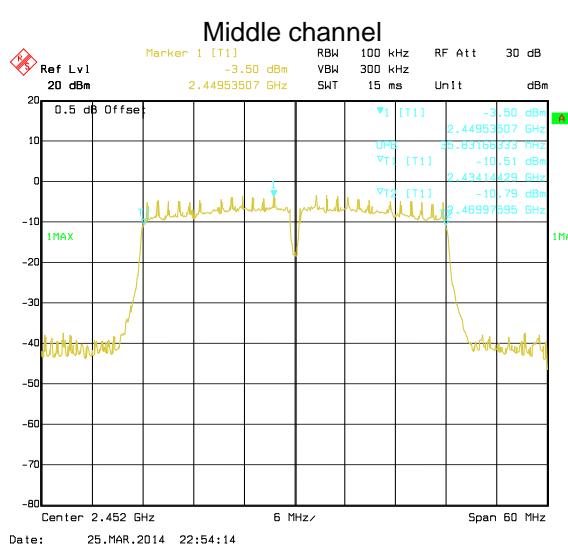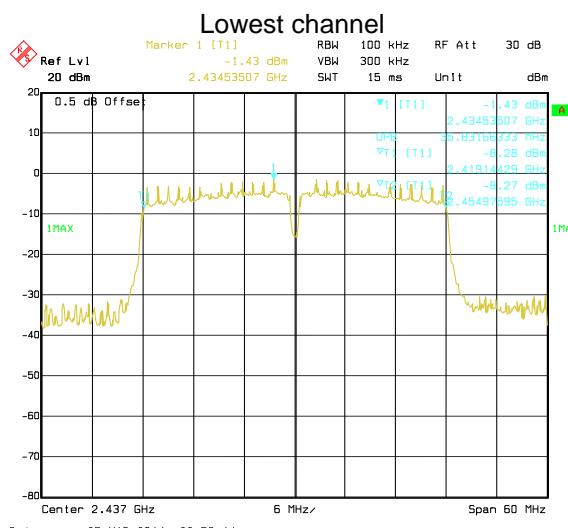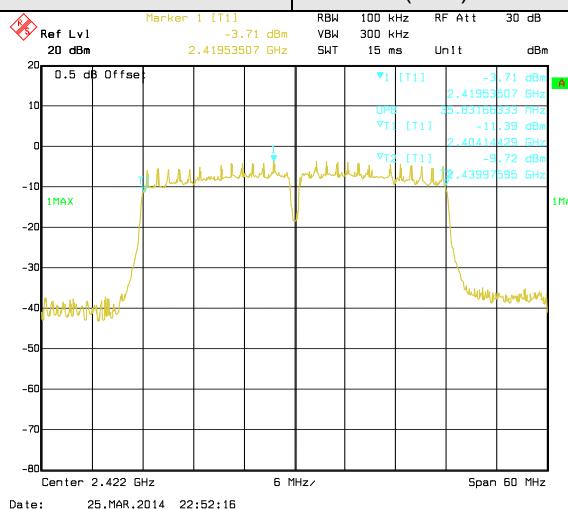

Highest channel

6.5 Power Spectral Density

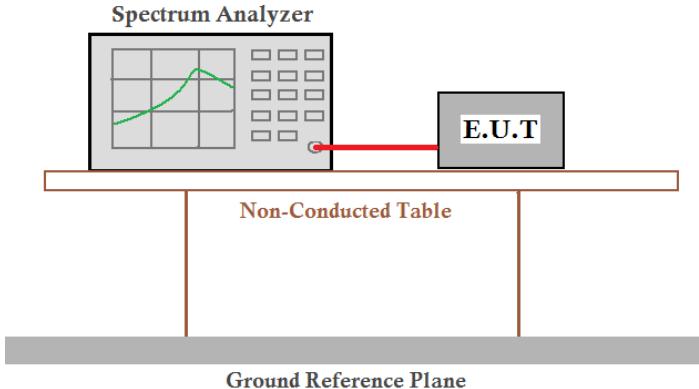Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	8dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is positioned at the top, connected by a red line to a gray rectangular box labeled 'E.U.T'. This box rests on a light-colored rectangular platform labeled 'Non-Conducted Table'. Below the table is a thick gray horizontal bar labeled 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed




Measurement Data

Test CH	Power Spectral Density (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	6.58	0.99	1.13	-3.70	8.00	Pass
Middle	7.07	3.21	3.03	-1.61		
Highest	7.25	1.28	1.18	-3.40		

Test plot as follows:

Test mode:




802.11b

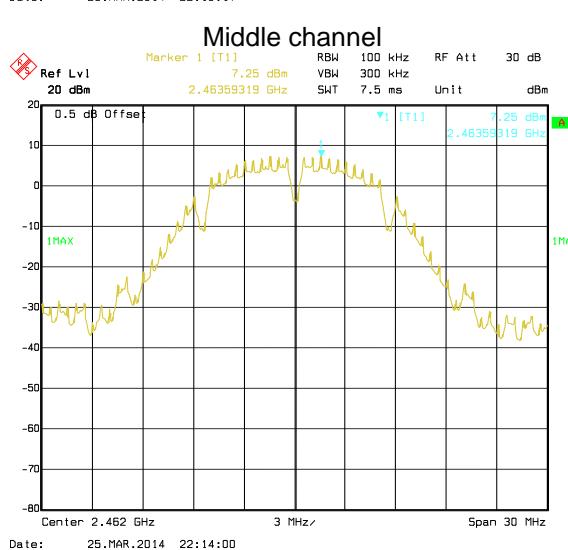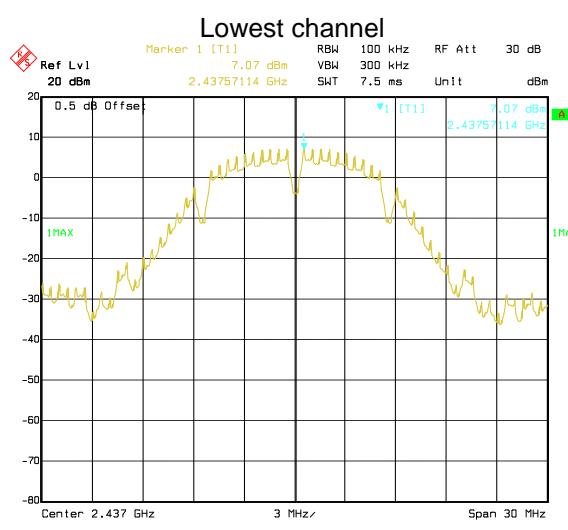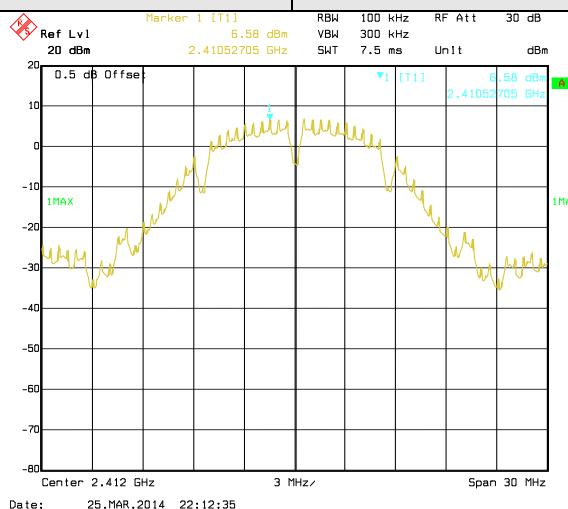

Highest channel

Test mode:




802.11g

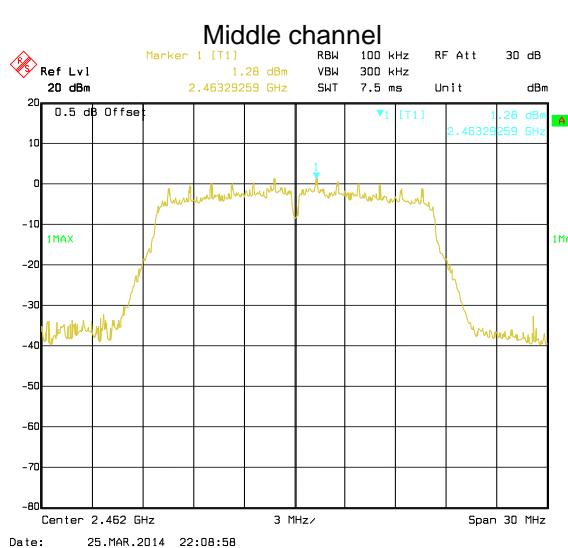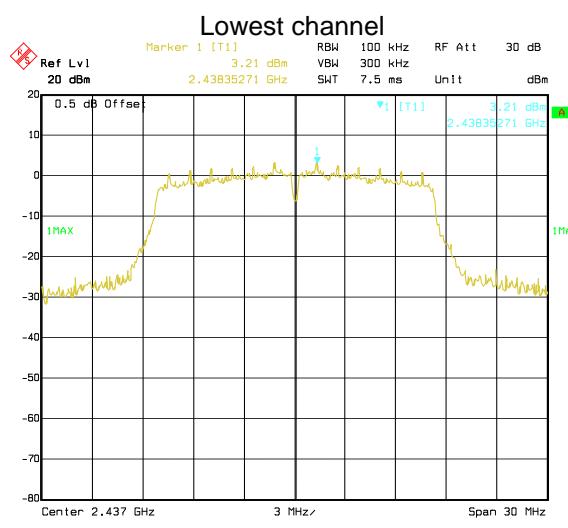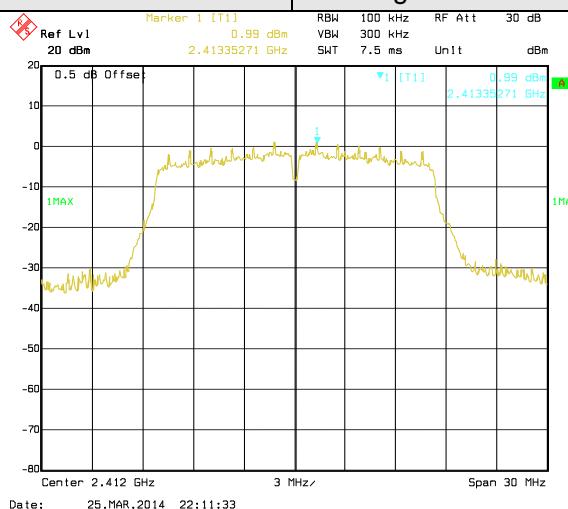

Highest channel

Test mode:




802.11n(H20)

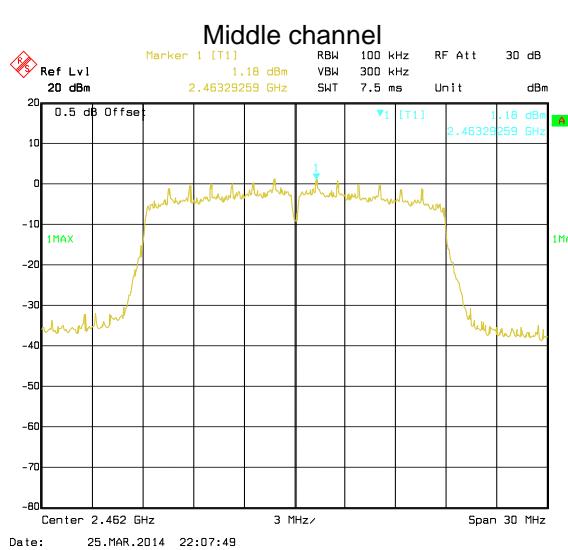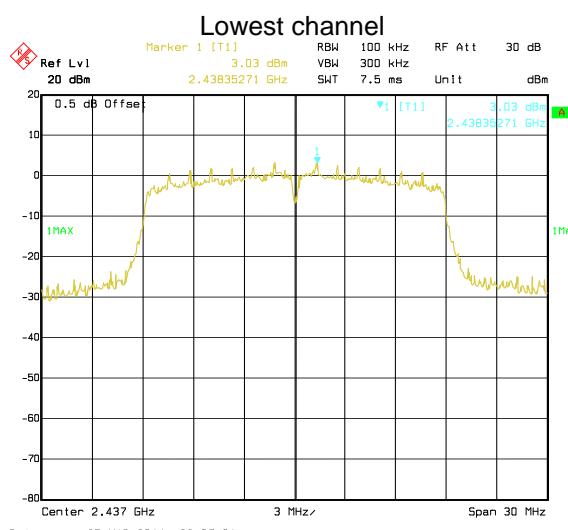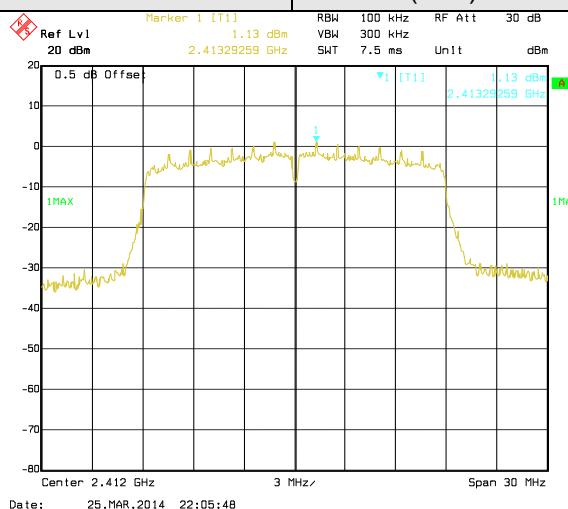

Highest channel

Test mode:


802.11n(H40)

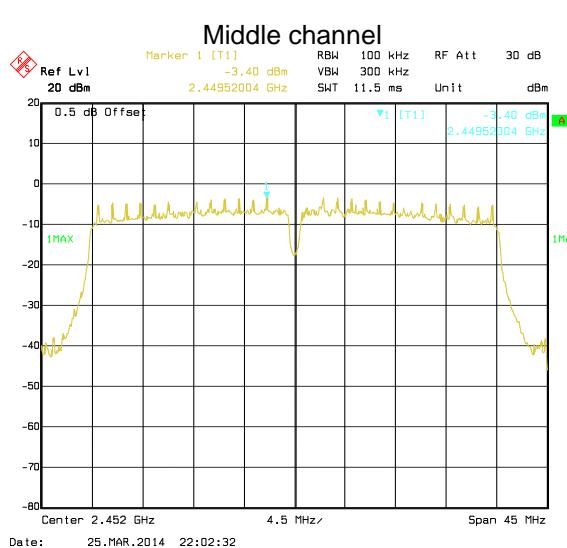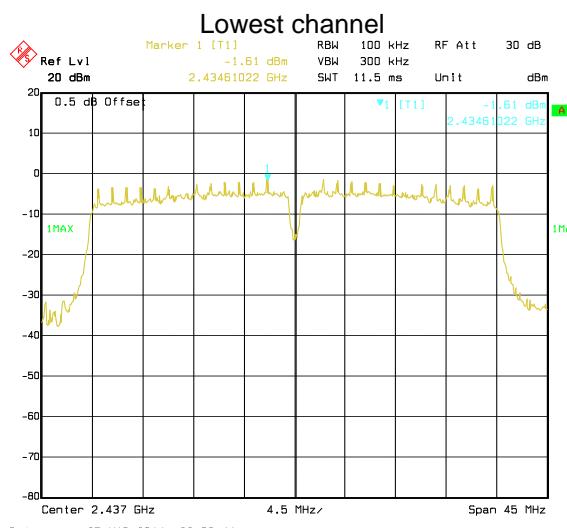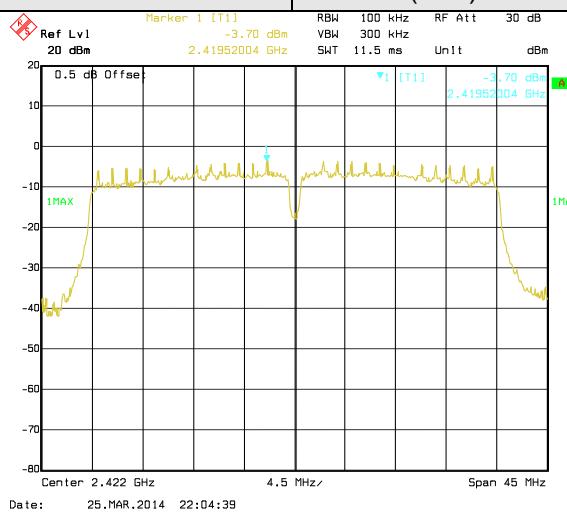



Highest channel



6.6 Band Edge

6.6.1 Conducted Emission Method

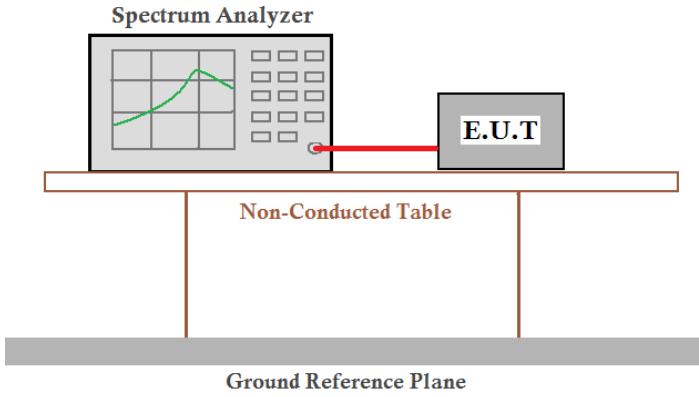Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

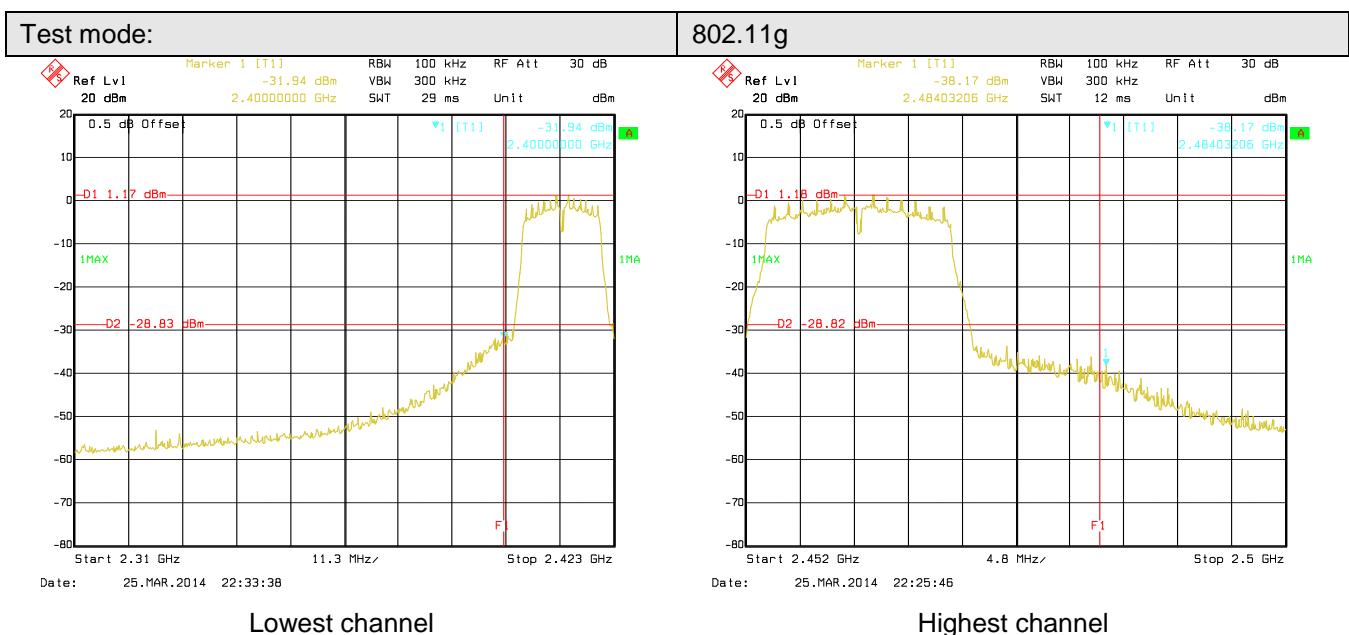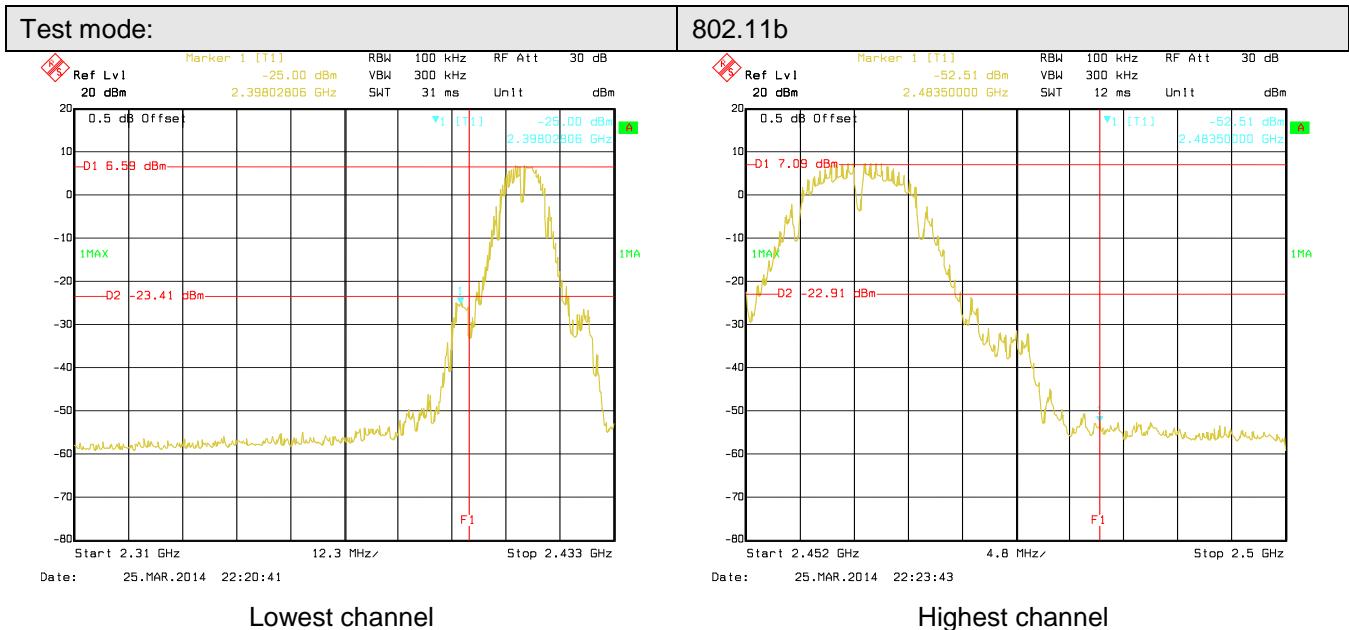

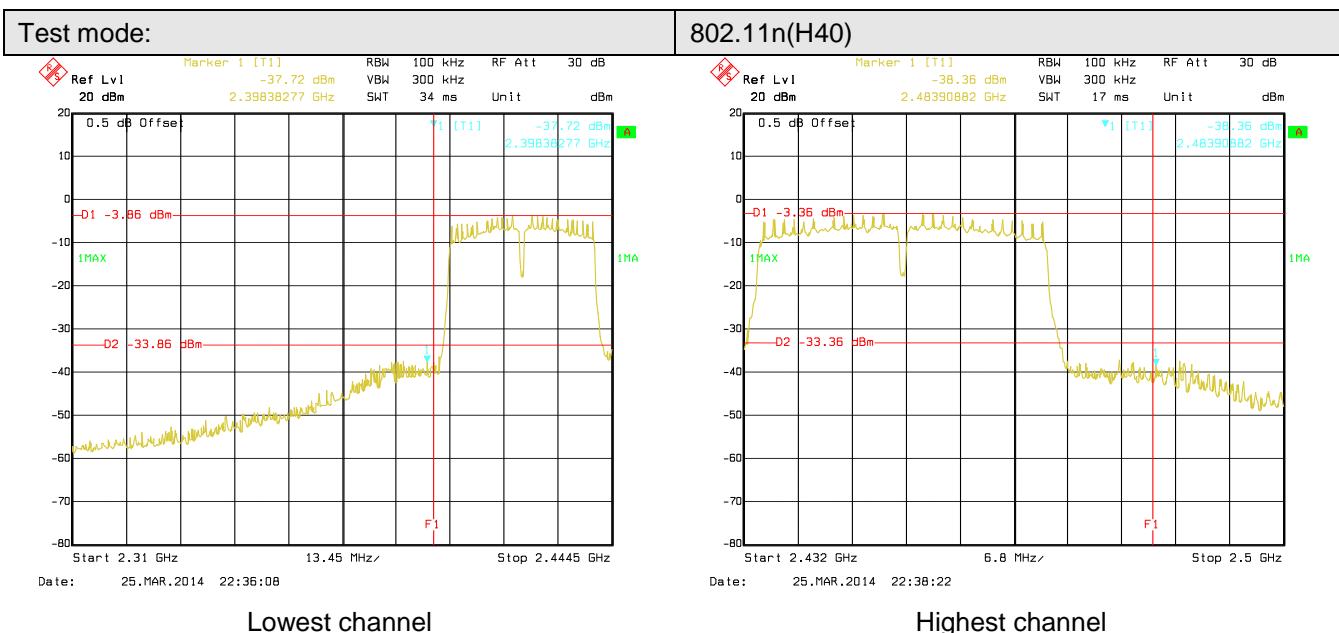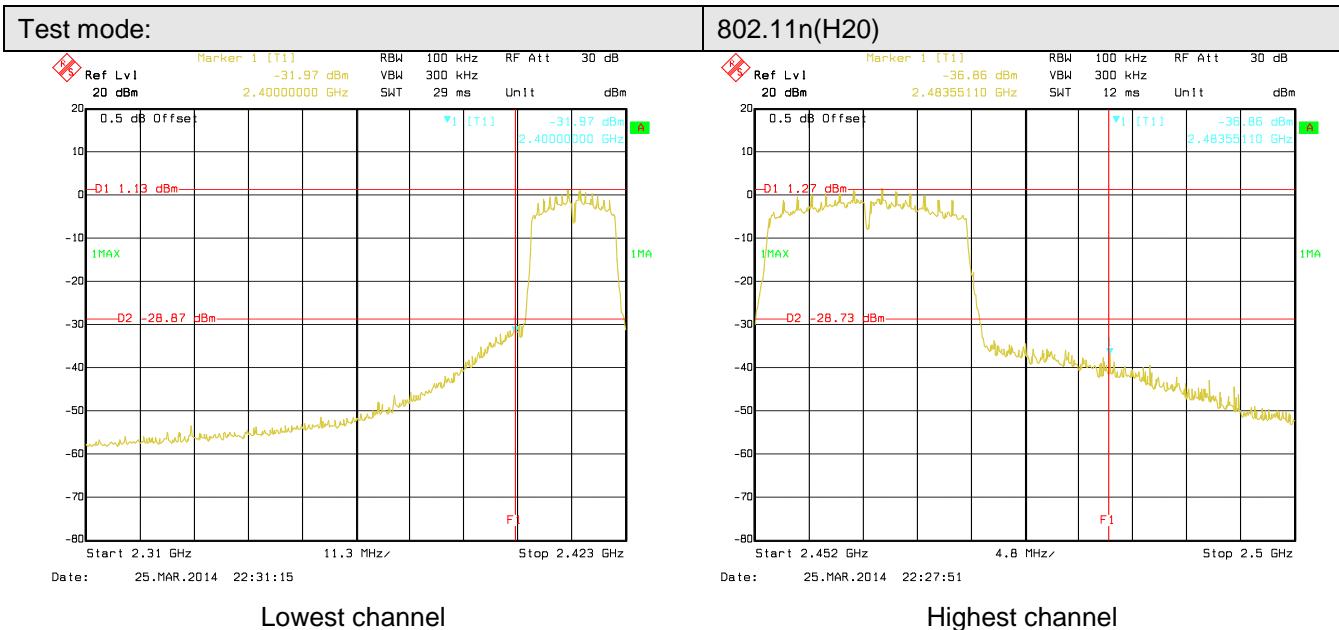


6.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																			
Test Method:	ANSI C63.4: 2003																			
Test Frequency Range:	2.3GHz to 2.5GHz																			
Test site:	Measurement Distance: 3m																			
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td></td> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value		Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark																
Above 1GHz	Peak	1MHz	3MHz	Peak Value																
	Peak	1MHz	10Hz	Average Value																
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>Above 1GHz</td> <td>54.00</td> <td>Average Value</td> </tr> <tr> <td></td> <td>74.00</td> <td>Peak Value</td> </tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.00	Average Value		74.00	Peak Value						
Frequency	Limit (dBuV/m @3m)	Remark																		
Above 1GHz	54.00	Average Value																		
	74.00	Peak Value																		
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																			
Test setup:																				
Test Instruments:	Refer to section 5.6 for details																			
Test mode:	Refer to section 5.3 for details																			
Test results:	Passed																			

802.11b

Test channel: Lowest

Horizontal:

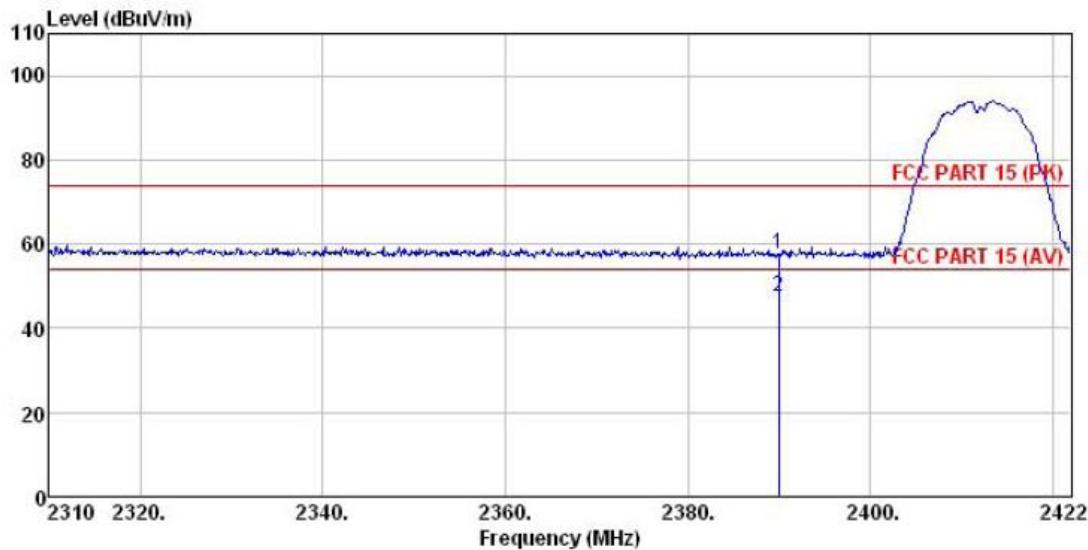


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL

Test mode : wifi tx mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Garen
Remark : B L CH

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Line	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2390.000	24.39	27.58	5.67	0.00	57.64	74.00 -16.36 Peak
2	2390.000	14.36	27.58	5.67	0.00	47.61	54.00 -6.39 Average

Vertical :

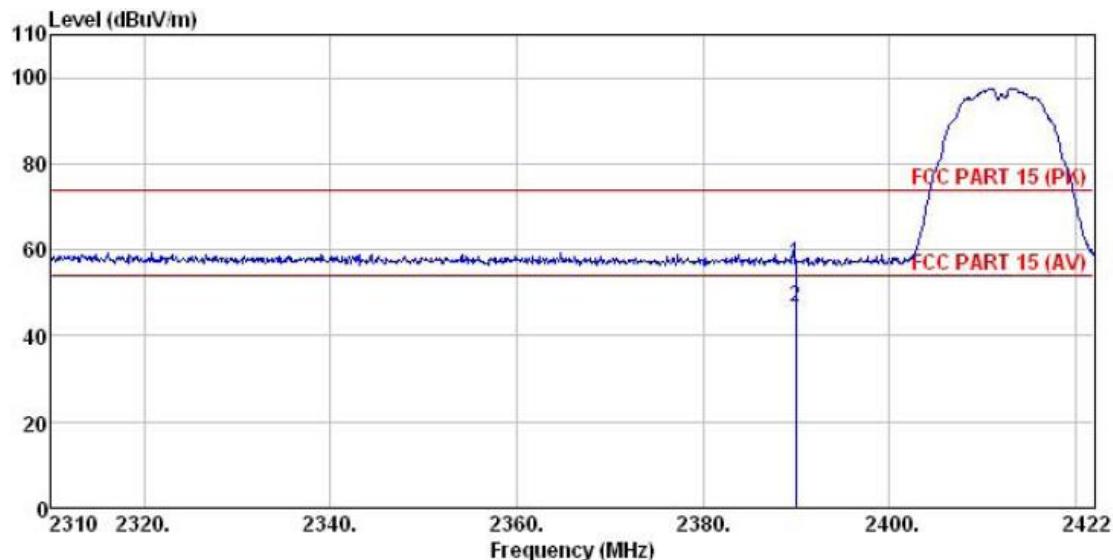


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Test mode : wifi tx mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Garen
Remark : B L CH

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	23.45	27.58	5.67	0.00	56.70	74.00	-17.30 Peak
2	2390.000	13.25	27.58	5.67	0.00	46.50	54.00	-7.50 Average

Test channel: Highest

Horizontal:

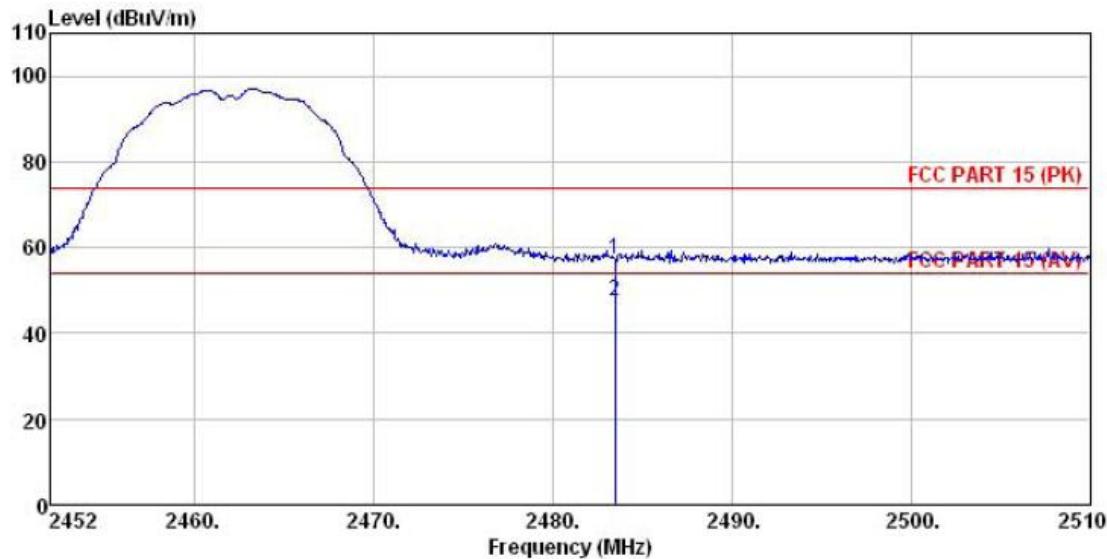

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL

Test mode : wifi tx mode

Power Rating : AC 120V/60Hz


Environment : Temp:25.5°C Huni:55%

Test Engineer: Garen

Remark : B H CH

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Limit Factor	Level dBuV/m	Line dBuV/m	Over Limit dB	Remark
1	2483.500	23.98	27.52	5.70	0.00	57.20	74.00	-16.80	Peak
2	2483.500	14.29	27.52	5.70	0.00	47.51	54.00	-6.49	Average

Vertical :

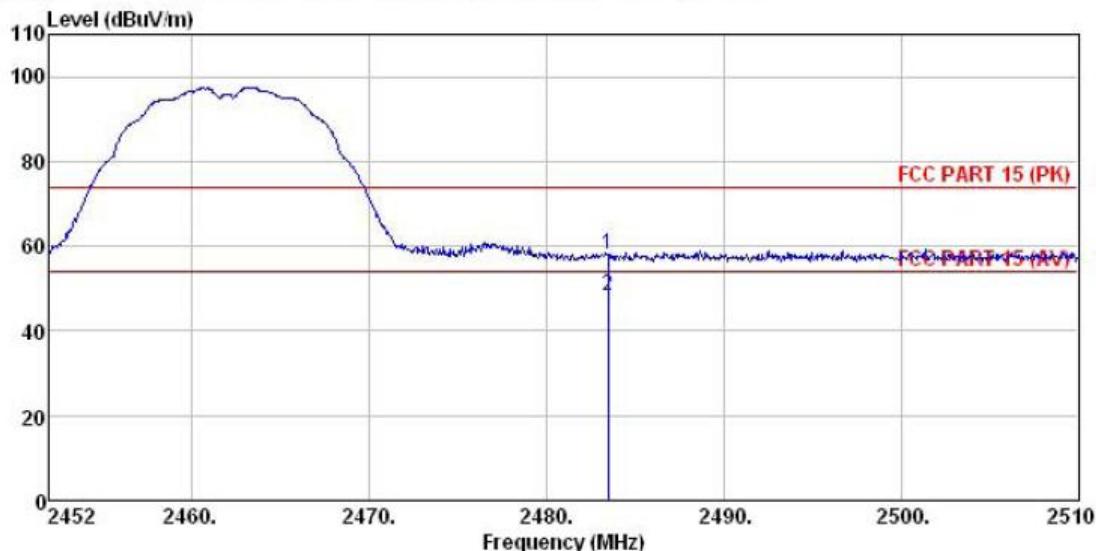

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL

Test mode : wifi tx mode

Power Rating : AC 120V/60Hz

Environment : Temp:25.5°C Huni:55%

Test Engineer: Garen


Remark : B H CH

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	24.77	27.52	5.70	0.00	57.99	74.00 -16.01 Peak
2	2483.500	15.26	27.52	5.70	0.00	48.48	54.00 -5.52 Average

802.11g

Test channel: Lowest

Horizontal :

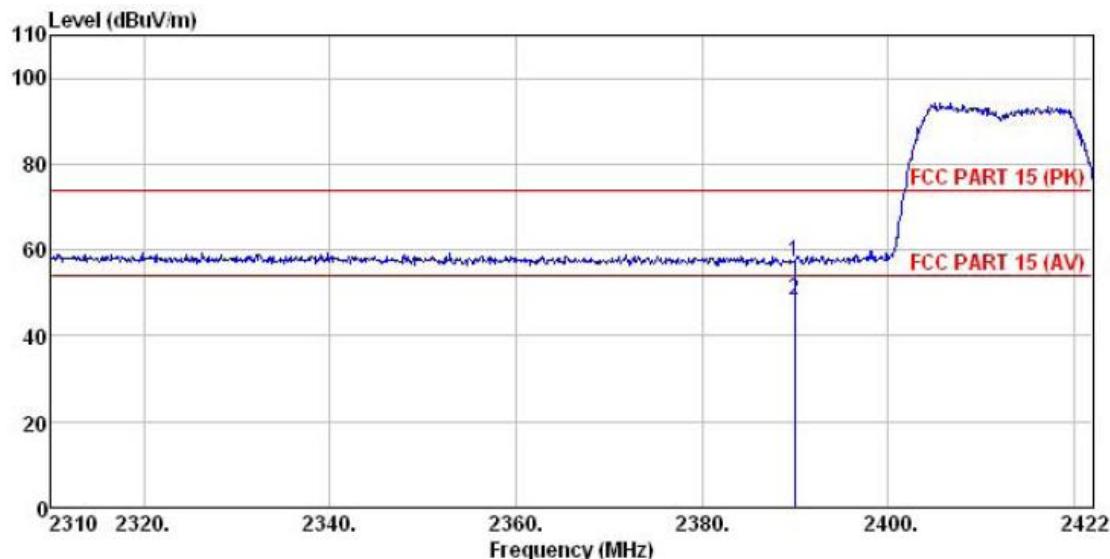

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL

Test mode : wifi tx mode

Power Rating : AC 120V/60Hz


Environment : Temp:25.5°C Huni:55%

Test Engineer: Garen

Remark : G L CH

Freq	Read	Antenna	Cable	Preamp	Limit		Over	Remark
					Level	Factor		
MHz	dBuV	dB/m		dB	dB	dBuV/m	dBuV/m	dB
1 2390.000	24.01	27.58	5.67	0.00	57.26	74.00	-16.74	Peak
2 2390.000	15.20	27.58	5.67	0.00	48.45	54.00	-5.55	Average


Vertical :

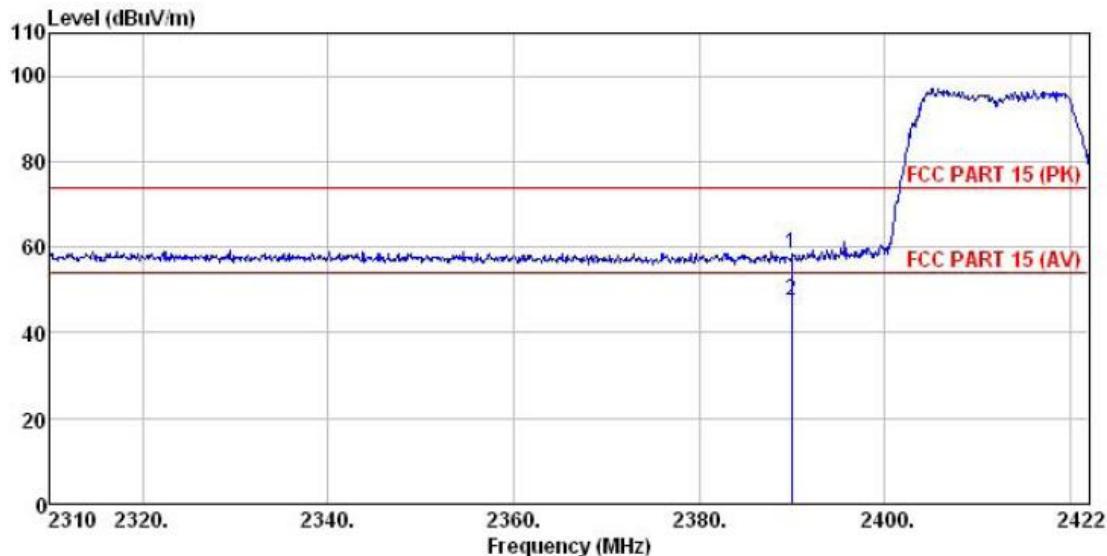

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Test mode : wifi tx mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Garen
Remark : G L CH

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Line	Remark
1	2390.000	25.40	27.58	5.67	0.00	58.65	74.00 -15.35 Peak
2	2390.000	14.26	27.58	5.67	0.00	47.51	54.00 -6.49 Average


Test channel: Highest

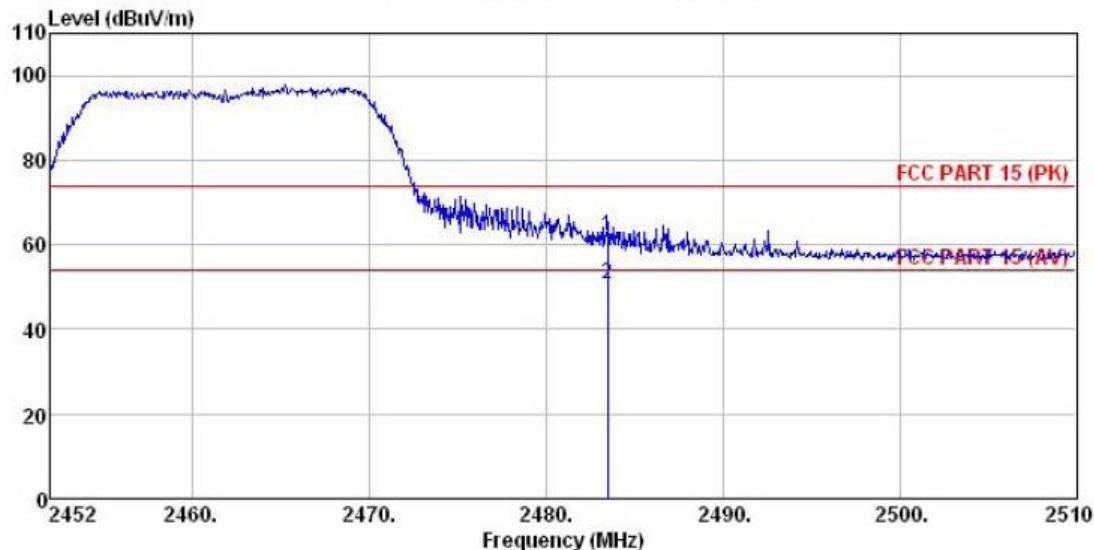

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
Test mode : wifi tx mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Garen
Remark : G H CH

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	28.94	27.52	5.70	0.00	62.16	74.00 -11.84 Peak
2	2483.500	17.32	27.52	5.70	0.00	50.54	54.00 -3.46 Average

Vertical :

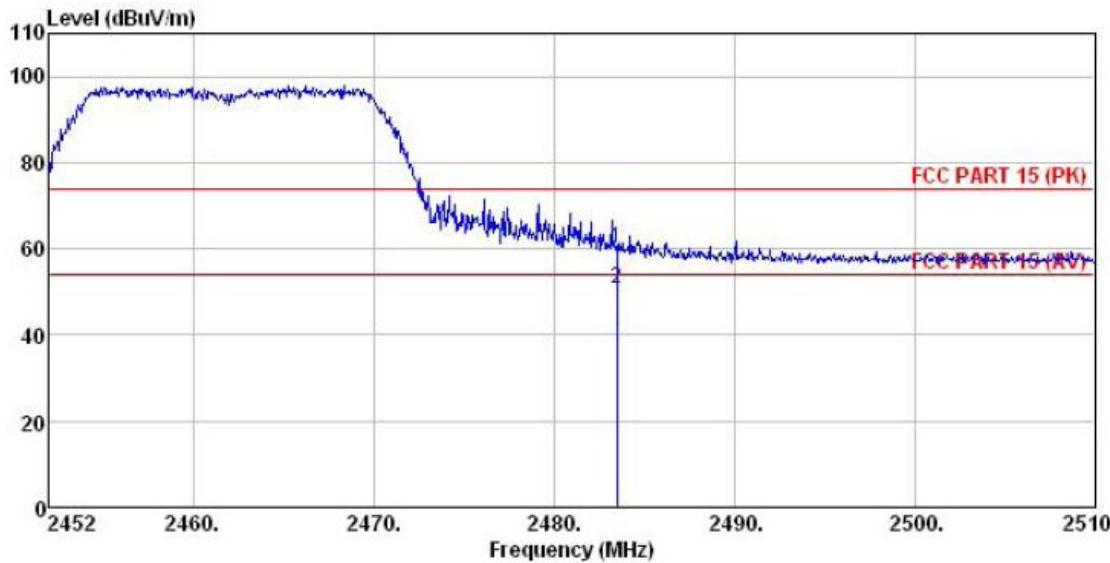

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL

Test mode : wifi tx mode

Power Rating : AC 120V/60Hz

Environment : Temp:25.5°C Huni:55%

Test Engineer: Garen


Remark : G H CH

Freq	Read	Antenna	Cable	Preamp	Limit		Over	Remark
	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	27.05	27.52	5.70	0.00	60.27	74.00	-13.73 Peak
2	2483.500	17.32	27.52	5.70	0.00	50.54	54.00	-3.46 Average

802.11n (H20)

Test channel: Lowest


Horizontal :

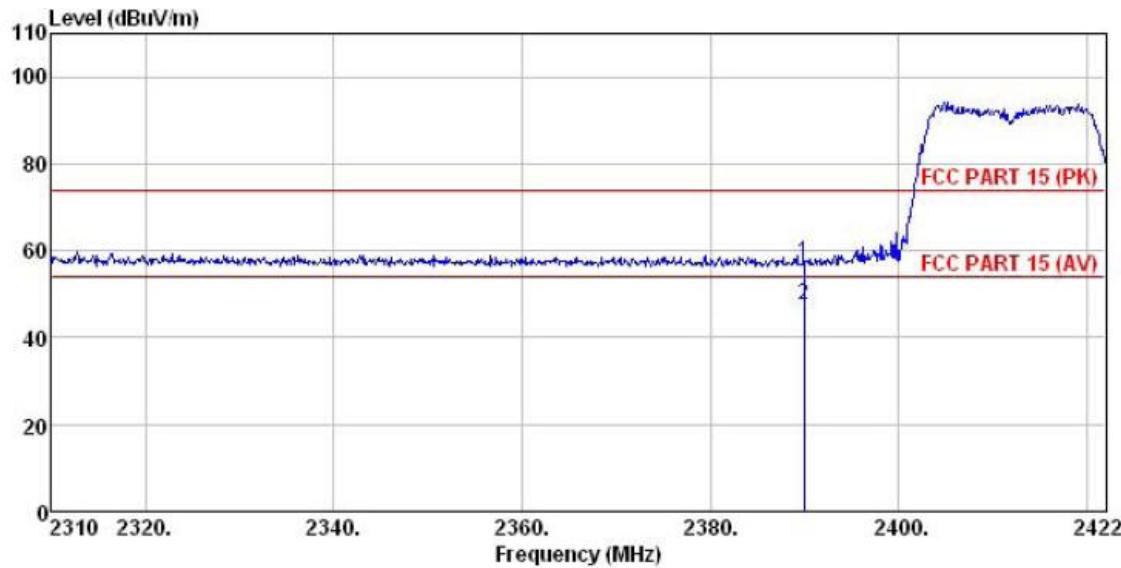

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
Test mode : wifi tx mode
Power Rating : AC 120W/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Garen
Remark : N20 L CH

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.000	24.06	27.58	5.67	0.00	57.31	74.00	-16.69 Peak
2 2390.000	14.28	27.58	5.67	0.00	47.53	54.00	-6.47 Average

Vertical :

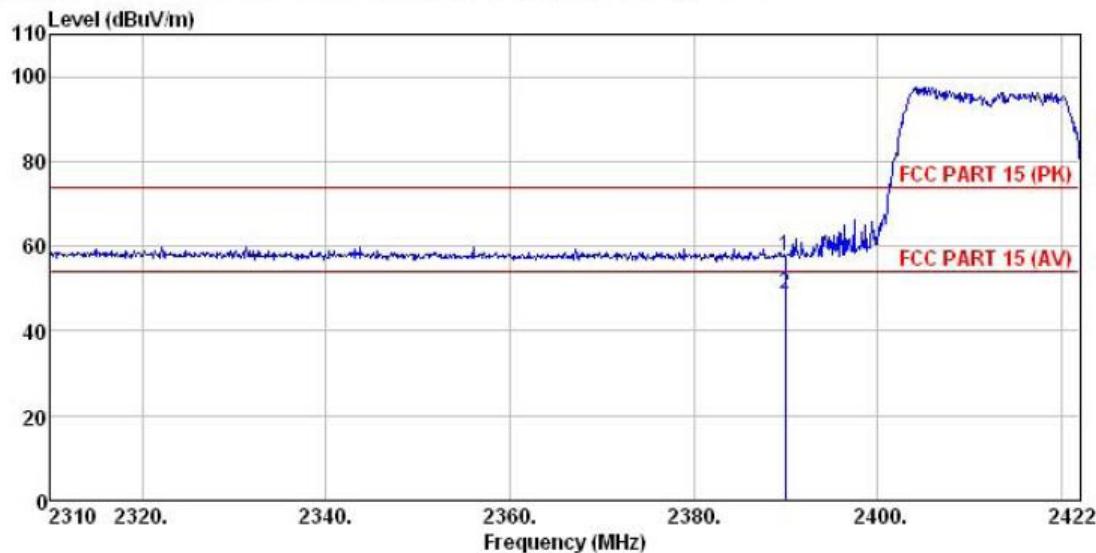


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Test mode : wifi tx mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Garen
Remark : N20 L CH

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
1	2390.000	24.32	27.58	5.67	0.00	57.57	74.00	-16.43 Peak
2	2390.000	15.36	27.58	5.67	0.00	48.61	54.00	-5.39 Average

Test channel: Highest

Horizontal :

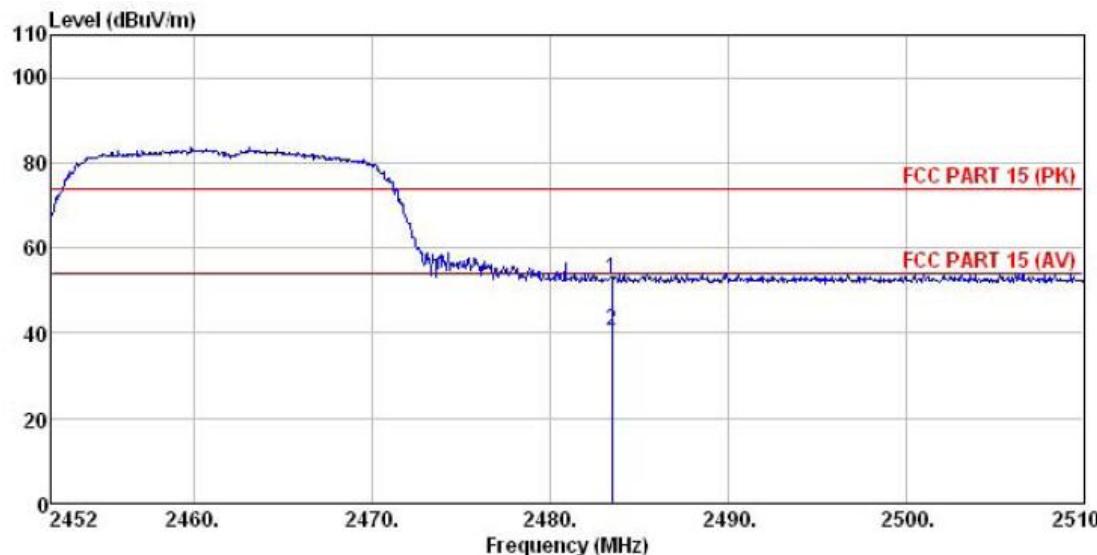

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL

Test mode : wifi tx mode

Power Rating : AC 120V/60Hz


Environment : Temp:25.5°C Huni:55%

Test Engineer: Garen

Remark : N20 H CH

	Read	Antenna	Cable	Preamp	Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	19.42	27.52	5.70	0.00	52.64	74.00	-21.36	Peak
2	2483.500	7.20	27.52	5.70	0.00	40.42	54.00	-13.58	Average

Vertical :

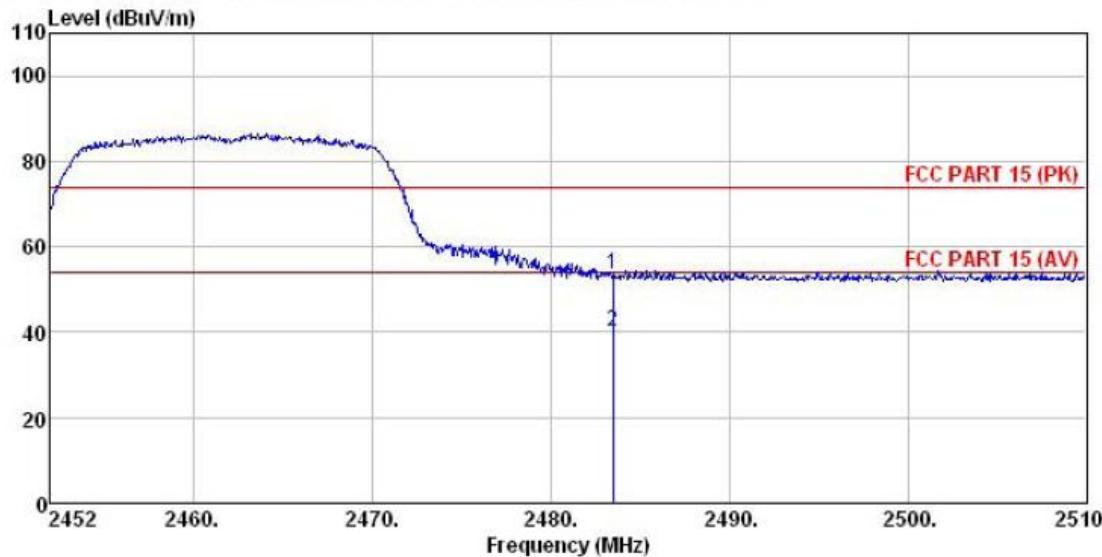

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL

Test mode : wifi tx mode

Power Rating : AC 120V/60Hz

Environment : Temp:25.5°C Humi:55%

Test Engineer: Garen


Remark : N20 H CH

	Read	Antenna	Cable	Preamp	Limit	Over	
	Freq	Level	Factor	Loss	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2483.500	20.30	27.52	5.70	0.00	53.52	74.00 -20.48 Peak
2	2483.500	7.03	27.52	5.70	0.00	40.25	54.00 -13.75 Average

802.11n (H40)

Test channel: Lowest

Horizontal :

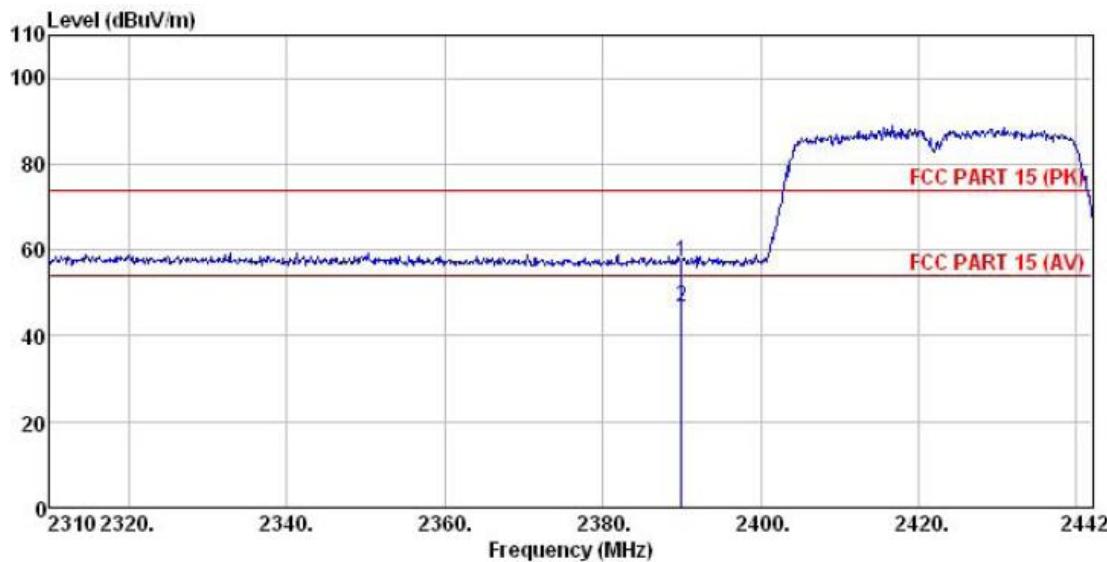

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL


Test mode : wifi tx mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%

Test Engineer: Garen

Remark : N40 L CH

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.000	24.14	27.58	5.67	0.00	57.39	74.00	-16.61 Peak
2 2390.000	13.25	27.58	5.67	0.00	46.50	54.00	-7.50 Average

Vertical :

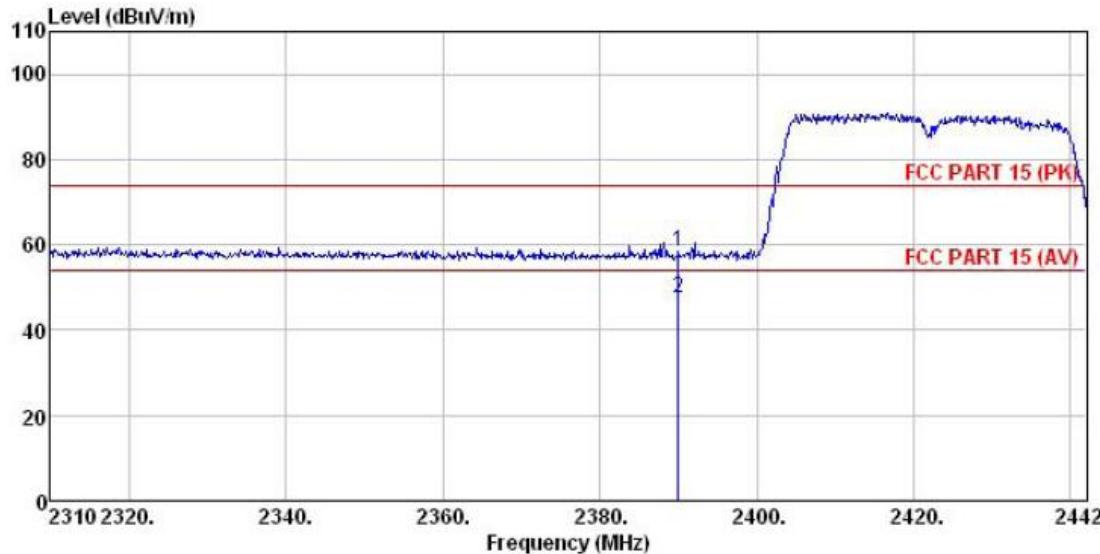


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
Test mode : wifi tx mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Garen
Remark : N40 L CH

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.000	25.10	27.58	5.67	0.00	58.35	74.00	-15.65 Peak
2 2390.000	14.08	27.58	5.67	0.00	47.33	54.00	-6.67 Average

Test channel: Highest

Horizontal :

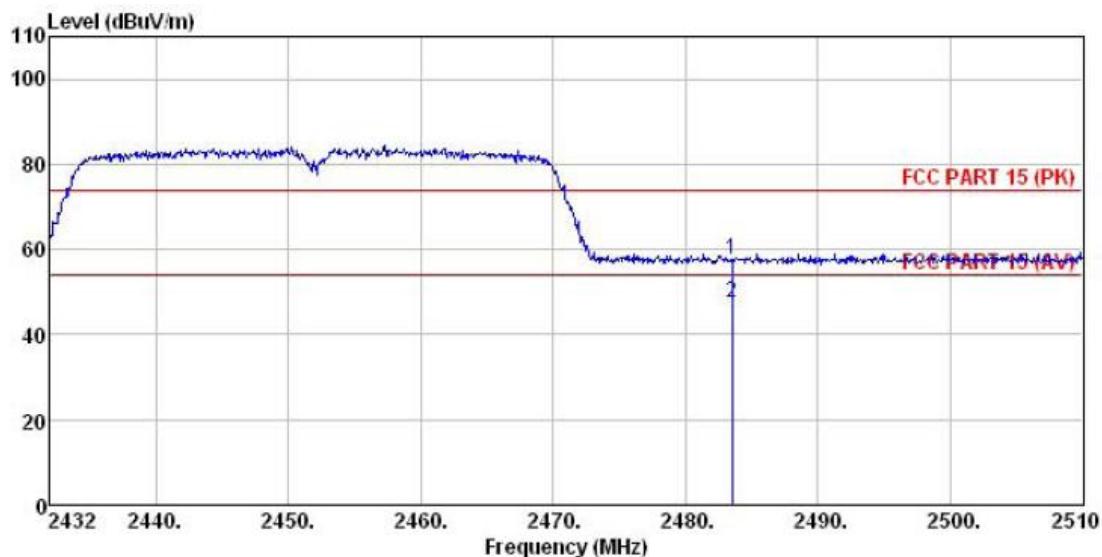

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL

Test mode : wifi tx mode

Power Rating : AC 120V/60Hz


Environment : Temp:25.5°C Huni:55%

Test Engineer: Garen

Remark : N40 H CH

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Line	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	24.23	27.52	5.70	0.00	57.45	74.00 -16.55 Peak
2	2483.500	14.21	27.52	5.70	0.00	47.43	54.00 -6.57 Average

Vertical :

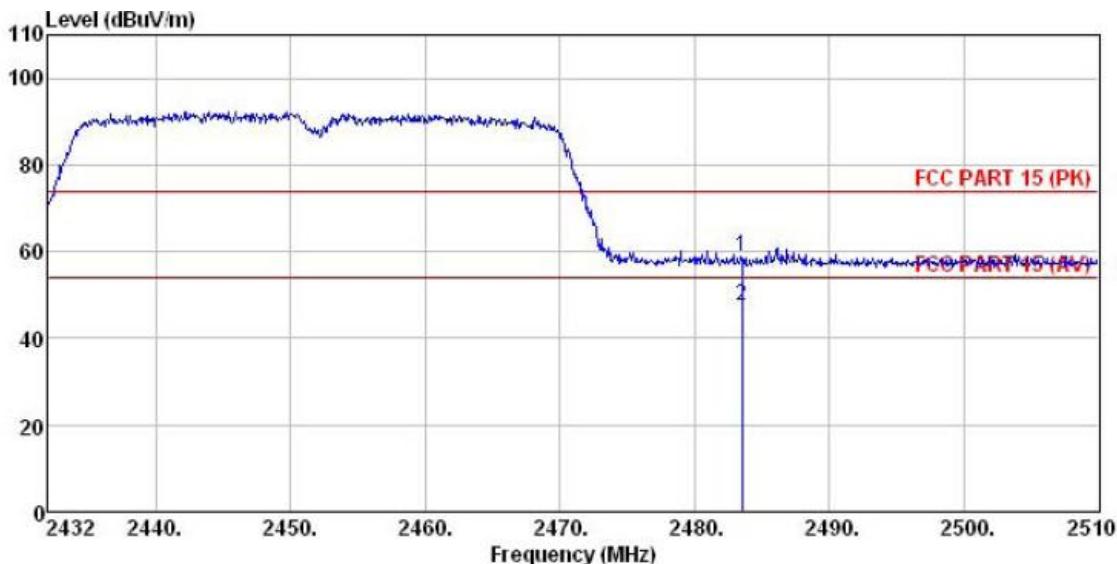

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Test mode : wifi tx mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Huni:55%
 Test Engineer: Garen
 Remark : N40 H CH

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	25.64	27.52	5.70	0.00	58.86	74.00	-15.14 Peak
2	2483.500	14.28	27.52	5.70	0.00	47.50	54.00	-6.50 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.