

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Cardbus 802.11g Wireless LAN Card

Model No. : 73-TMWGD-001

FCC ID : QS3WGDII1

Filing Type : Certification

Applicant : **TwinMOS Technologies Inc.**
303 No. 3, Tzu Chiang Rd.,
Hu Kou Xiang, Hsin Chu, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	3
2. Test Configuration of Equipment under Test.....	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Connection Diagram of Test System	6
3. Operation of Equipment under Test	7
4. General Information of Test.....	8
4.1. Test Voltage	8
4.2. Standard for Methods of Measurement.....	8
4.3. Test in Compliance with	8
4.4. Frequency Range Investigated	8
4.5. Test Distance	8
5. Report of Measurements and Examinations	9
5.1. List of Measurements and Examinations	9
5.2. 6dB Bandwidth	10
5.3. Peak Output Power	11
5.4. Power Spectral Density	12
5.5. Test of Conducted Emission	13
5.6. Test of Radiated Emission	20
5.7. Band Edges Measurement.....	40
5.8. Antenna Requirements	41
5.9. RF Exposure	42
6. Antenna Factor & Cable Loss	45
7. List of Measuring Equipments Used	46
8. Uncertainty of Test Site	47
Appendix A. Photographs of EUT.....	A1 ~ A4
Appendix B. Test pattern	B1 ~ B76

History of this test report

Original Report Issue Date: Sep. 22, 2003

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Cardbus 802.11g Wireless LAN Card

Model No. : 73-TMWGD-001

FCC ID : QS3WGDII1

Filing Type : Certification

Applicant : **TwinMOS Technologies Inc.**
303 No. 3, Tzu Chiang Rd.,
Hu Kou Xiang, Hsin Chu, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Sep. 19, 2003 at **SPORTON International Inc.** LAB.



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

FCC ID : QS3WGDII1
Page No. : 1 of 47
Issued Date : Sep. 22, 2003

1. General Description of Equipment under Test

1.1. Applicant

TwinMOS Technologies Inc.
303 No. 3, Tzu Chiang Rd.,
Hu Kou Xiang, Hsin Chu, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment	: Cardbus 802.11g Wireless LAN Card
Model No.	: 73-TMWGD-001
FCC ID.	: QS3WGDII1
Trade Name	: TwinMOS
Power Supply Type	: From notebook
AC Power Input	: N/A

1.4. Feature of Equipment under Test

Host/Radio Interface	DSSS
Type of Modulation	DBPSK,DQPSK,CCK,OFDM
Number of Channels	11
Frequency Band	2412Mhz-2484Mhz
Carrier Frequency of each channel	2412,2417,2422,2427,2432,2437,2442,2447,2452,2457,2462,2467,2472,2484
Bandwidth of each channel	22MHz
Output Power to Antenna	15.74dBm
Type of Antenna Connector (Ex: SMA,TNC, MCX, MMCX, UFC.....etc)	On PCB
Antenna Type / Class and Gain	Dipole / 2dBi
Function Type	Transceiver
Power Rating (DC/AC , Voltage)	3.3V
Duty Cycle	45%~55%
Basic function of product	Wireless LAN
Temperature Range (Operating)	0-55
Humidity	15%~95%

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with notebook and peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included COMPAQ NOTEBOOK, VIEWSONIC Monitor, LOGITECH PS/2 Keyboard, LOGITECH USB Mouse, EPSON Printer and EUT for EMI test.
- c. The EUT can operate on eleven channels from 2412.0MHz to 2462.0MHz. (as listed in section 1.4). According to 15.31(m), three channels (one near top, one near middle and one near bottom) were performed as following:
 - Mode 1: CH01 2412MHz (IEEE 802.11b)
 - Mode 2: CH06 2437MHz (IEEE 802.11b)
 - Mode 3: CH11 2462MHz (IEEE 802.11b)
 - Mode 4: CH01 2412MHz (IEEE 802.11g)
 - Mode 5: CH06 2437MHz (IEEE 802.11g)
 - Mode 6: CH11 2462MHz (IEEE 802.11g)
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Description of Test System

Support Unit 1. – Notebook (COMPAQ)

FCC ID	: N/A
Model No.	: PRESARIO 1500
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0039
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (VIEWSONIC)

FCC ID	: N/A
Model No.	: VCDTS21553-3P
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0050
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- PS/2 Keyboard (LOGITECH)

FCC ID : N/A
Model No. : Y-SJ17
Serial No. : SP0054
Data Cable : Shielded, 360 degree via metal backshells, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


Support Unit 4. -- USB Mouse (LOGITECH)

FCC ID : N/A
Model No. : M-BE58
Serial No. : SP0041
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 5. -- Printer (EPSON)

FCC ID : N/A
Model No. : STYLUS COLOR 680
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Shielded, 1.35m

2.3. Connection Diagram of Test System

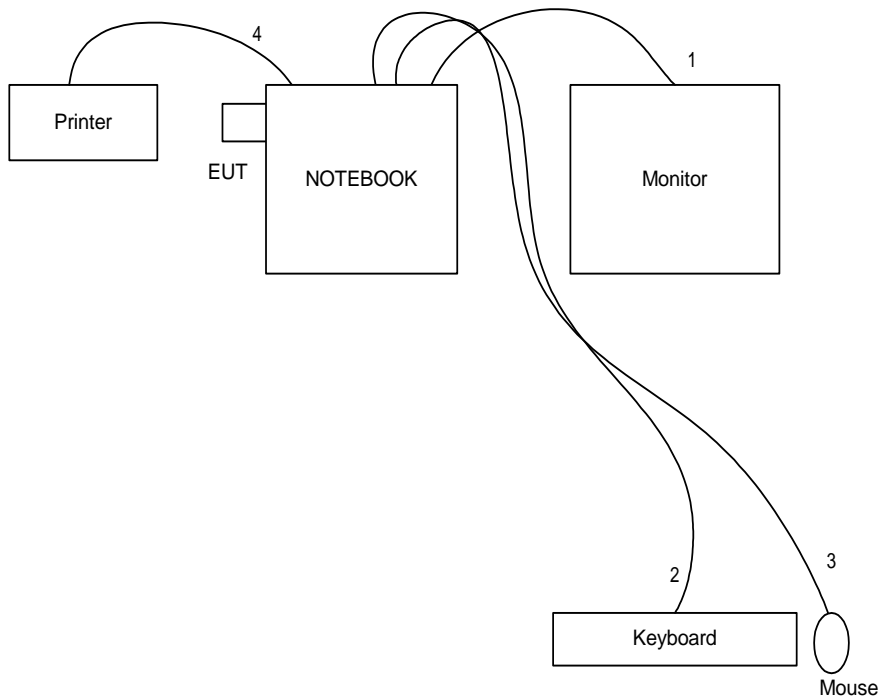

- 1. The I/O cable is connected from the NOTEBOOK to the support unit 2.
- 2. The I/O cable is connected from the NOTEBOOK to the support unit 3.
- 3. The I/O cable is connected from the NOTEBOOK to the support unit 4.
- 4. The I/O cable is connected from the NOTEBOOK to the support unit 5.

3. Operation of Equipment under Test

An executive programs, EMCTEST.EXE under WIN XP, which generate a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- f. Repeat the steps from c to e.

At the same time, "C TX Rx 1.7.0.exe " was executed to keep transmitting signals at fixed frequency.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/ 60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-2001 for conducted power line test and radiated emission test,
"Guidance on Measurements for Direct Sequence Spread Spectrum Systems" for test of 6dB Bandwidth
"Guidance on Measurements for Direct Sequence Spread Spectrum Systems" for test of Maximum Peak
Output Power
"Guidance on Measurements for Direct Sequence Spread Spectrum Systems" for test of 100kHz Bandwidth
of Frequency Band Edges
"Guidance on Measurements for Direct Sequence Spread Spectrum Systems" for test of Power Spectral
Density

4.3. Test in Compliance with

FCC Part 15, Subpart C

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.207	Conducted Emission	Pass
<u>15.247(a)(2)</u>	6dB Bandwidth	Pass
<u>15.247(b)</u>	Maximum Peak Output Power	Pass
15.209	Radiated Emission	Pass
<u>15.247(c)</u>	100kHz Bandwidth of Frequency Band Edges	Pass
<u>15.247(d)</u>	Power Spectral Density	Pass
<u>15.203</u>	Antenna Requirement	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass

5.2. 6dB Bandwidth


5.2.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.2.3. Test Setup Layout :



5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature : 26 °C
- Relative Humidity : 63%

▪ Test Mode : Mode 1

Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	11.44	0.5	1
06	2437	11.44	0.5	2
11	2462	11.44	0.5	3

▪ Test Mode : Mode 2

Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	16.32	0.5	1
06	2437	16.32	0.5	2
11	2462	16.36	0.5	3

5.3. Peak Output Power


5.3.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.3.2. Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

5.3.3. Test Setup Layout :



5.3.4. Test Result : See spectrum analyzer plots below

- Temperature : 26°C
- Relative Humidity : 63 %
- Antenna Gain: 2 dBi

- Test Mode: Mode 1

Channel	Frequency (MHz)	Measured Output Power (mWatt)	Measured Output Power (dBm)	Limits (Watt/dBm)
01	2412	17.17908387	12.35	1W/30 dBm
06	2437	18.03017741	12.56	1W/30 dBm
11	2462	15.38154640	11.87	1W/30 dBm

- Test Mode: Mode 2

Channel	Frequency (MHz)	Measured Output Power (mWatt)	Measured Output Power (dBm)	Limits (Watt/dBm)
01	2412	13.64111682	11.34	1W/30 dBm
06	2437	14.06047524	11.48	1W/30 dBm
11	2462	11.88502227	10.75	1W/30 dBm

- Comments : Maximum Peak Output Power < 30dBm (1Watt)

5.4. Power Spectral Density


5.4.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to spectrum analyzer through an attenuator.
2. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

5.4.3. Test Setup Layout :



5.4.4. Test Result : See spectrum analyzer plots below

- Temperature : 27°C
- Relative Humidity : 65 %
- Test Mode: Mode 1

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-13.10	8	1
06	2437	-9.45	8	2
11	2462	-15.23	8	3

- Test Mode: Mode 2

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-14.44	8	1
06	2437	-14.95	8	2
11	2462	-16.39	8	3

5.5. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.5.1. Major Measuring Instruments :

● Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.5.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.5.3. Test Result of Conducted Emission :

Frequency Range of Test : from 150KHz to 30 MHz

6dB Bandwidth : 9KHz

- Test Mode : Mode 1
- Temperature : 27.9°C
- Relative Humidity : 57 %

The test was passed at the minimum margin that marked by the frame in the following table

```


Site      : COOL-HY
Condition : CNS/VCCI/CISPR-B 2003 2001/008 LIME
EUT       : Wireless LAN Product Card Bus
Power     : 110V/60Hz
Model     : 802.11g
Memo      : TX CH01 2412MHz
           : 11b
    
```

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	45.14	-20.86	66.00	44.39	0.10	0.05	QP
2	0.150	29.11	-26.89	66.00	28.96	0.10	0.05	Average
3	0.186	44.56	-19.65	64.21	44.41	0.10	0.05	QP
4	0.186	40.89	-23.32	64.21	40.74	0.10	0.05	Average
5	1.034	24.15	-31.85	56.00	23.93	0.10	0.12	Average
6	1.034	30.62	-25.38	56.00	30.40	0.10	0.12	QP
7	2.031	19.20	-36.80	56.00	19.08	0.10	0.02	Average
8	2.031	27.20	-28.80	56.00	27.08	0.10	0.02	QP
9	4.050	23.53	-32.47	56.00	23.35	0.10	0.08	Average
10	4.050	30.07	-25.93	56.00	29.89	0.10	0.08	QP
11	13.620	31.32	-28.68	60.00	30.86	0.20	0.26	QP
12	13.620	26.25	-32.75	60.00	25.79	0.20	0.26	Average

```

Site      : COOL-HY
Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTPAL
EUT       : Wireless LAN Product Card Bus
Power     : 110V/60Hz
Model     : 802.11g
Memo      : TX CH01 2412MHz
           : 11b
    
```

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	28.77	-27.11	55.88	28.62	0.10	0.05	Average
2	0.152	44.32	-21.56	65.88	44.17	0.10	0.05	QP
3	0.189	39.56	-14.51	54.07	39.41	0.10	0.05	Average
4	0.189	42.19	-21.88	64.07	42.04	0.10	0.05	QP
5	1.040	24.35	-21.65	46.00	24.14	0.10	0.11	Average
6	1.040	28.88	-27.12	56.00	28.67	0.10	0.11	QP
7	1.910	21.56	-24.44	46.00	21.43	0.10	0.03	Average
8	1.910	26.62	-29.38	56.00	26.49	0.10	0.03	QP
9	4.290	23.72	-22.28	46.00	23.43	0.20	0.09	Average
10	4.290	28.41	-27.59	56.00	28.12	0.20	0.09	QP
11	14.140	25.85	-24.15	50.00	25.29	0.29	0.27	Average
12	14.140	31.23	-28.77	60.00	30.67	0.29	0.27	QP

Test Engineer : 
 John Huang

- Test Mode : Mode 2
- Temperature : 27.9°C
- Relative Humidity : 57 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CI3PR-B 2003 2001/008 LINE
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH06 2437MHz
 : 11b

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
	MHz	dBμV	dB	dBμV	dBμV	dB	dB	
1	0.154	35.67	-20.11	55.78	35.52	0.10	0.05	Average
2	0.154	45.45	-20.33	55.78	45.30	0.10	0.05	QP
3	0.197	39.39	-15.35	53.74	39.24	0.10	0.05	Average
4	0.197	40.97	-22.77	63.74	40.82	0.10	0.05	QP
5	1.040	27.64	-18.36	46.00	27.43	0.10	0.11	Average
6	1.040	30.83	-25.17	56.00	30.62	0.10	0.11	QP
7	1.550	19.28	-26.72	46.00	19.12	0.10	0.06	Average
8	1.550	25.64	-30.36	56.00	25.48	0.10	0.06	QP
9	4.180	22.94	-23.16	46.00	22.65	0.10	0.09	Average
10	4.180	29.23	-27.77	56.00	29.04	0.10	0.09	QP
11	14.670	30.59	-29.42	60.00	30.10	0.20	0.28	QP
12	14.670	25.50	-24.50	50.00	25.02	0.20	0.28	Average

Site : C001-HY
 Condition : CNS/VCCI/CI3PR-B 2003 2001/008 NEUTRAL
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH06 2437MHz
 : 11b

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
	MHz	dBμV	dB	dBμV	dBμV	dB	dB	
1	0.152	34.64	-21.25	55.89	34.49	0.10	0.05	Average
2	0.152	45.35	-20.54	65.89	45.20	0.10	0.05	QP
3	0.189	39.61	-15.46	54.07	39.46	0.10	0.05	Average
4	0.189	39.49	-24.58	64.07	39.34	0.10	0.05	QP
5	1.450	17.92	-28.08	46.00	17.75	0.10	0.07	Average
6	1.450	24.46	-31.54	56.00	24.29	0.10	0.07	QP
7	2.000	25.43	-30.57	56.00	25.31	0.10	0.02	QP
8	2.000	19.71	-27.29	46.00	19.59	0.10	0.02	Average
9	4.160	22.65	-23.35	46.00	22.37	0.20	0.08	Average
10	4.160	27.67	-29.33	56.00	27.39	0.20	0.08	QP
11	13.910	26.07	-23.93	50.00	25.53	0.28	0.26	Average
12	13.910	31.30	-28.70	60.00	30.76	0.28	0.26	QP

Test Engineer : 
 John Huang

- Test Mode : Mode 3
- Temperature : 27.9°C
- Relative Humidity : 57 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LIME
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TK CH11 2462MHz
 : 11b

	Freq	Level	Over	Limit	Lead	Probe	Cable	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	Remark
1	0.172	29.85	-25.01	54.86	29.70	0.10	0.05	Average
2	0.172	42.53	-22.33	64.86	42.38	0.10	0.05	QP
3	0.207	37.36	-15.96	53.32	37.20	0.10	0.06	Average
4	0.207	39.39	-23.93	63.32	39.23	0.10	0.06	QP
5	0.489	29.37	-16.81	46.18	29.13	0.10	0.14	Average
6	0.489	31.11	-25.07	56.18	30.87	0.10	0.14	QP
7	1.320	23.74	-22.26	46.00	23.56	0.10	0.08	Average
8	1.320	28.28	-27.72	56.00	28.10	0.10	0.08	QP
9	3.840	22.92	-23.08	46.00	22.74	0.10	0.08	Average
10	3.840	27.91	-28.09	56.00	27.73	0.10	0.08	QP
11	11.320	22.79	-27.21	50.00	22.37	0.20	0.22	Average
12	11.320	29.25	-30.75	60.00	28.83	0.20	0.22	QP

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TK CH11 2462MHz
 : 11b

	Freq	Level	Over	Limit	Lead	Probe	Cable	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	Remark
1	0.169	29.85	-26.16	55.01	29.70	0.10	0.05	Average
2	0.169	39.87	-25.14	65.01	39.72	0.10	0.05	QP
3	0.211	38.12	-15.05	53.17	37.96	0.10	0.06	Average
4	0.211	39.48	-23.69	63.17	39.32	0.10	0.06	QP
5	1.040	31.66	-24.34	56.00	31.45	0.10	0.11	QP
6	1.040	28.73	-17.27	46.00	28.52	0.10	0.11	Average
7	1.440	26.11	-29.89	56.00	25.94	0.10	0.07	QP
8	1.440	21.40	-24.60	46.00	21.23	0.10	0.07	Average
9	4.380	18.36	-27.64	46.00	18.07	0.20	0.09	Average
10	4.380	25.74	-30.26	56.00	25.45	0.20	0.09	QP
11	14.060	25.64	-24.36	50.00	25.09	0.28	0.27	Average
12	14.060	30.96	-29.14	60.00	30.31	0.28	0.27	QP

Test Engineer : 
 John Huang

- Test Mode : Mode 4
- Temperature : 27.9°C
- Relative Humidity : 57 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LIME
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.159	50.91	-14.62	65.53	50.77	0.10	0.04	QP
2	0.159	46.19	-9.34	55.53	46.05	0.10	0.04	Average
3	0.159	51.07	-14.43	65.50	50.93	0.10	0.04	QP
4	0.159	50.25	-5.25	55.50	50.11	0.10	0.04	Average
5	0.228	33.13	-29.38	62.51	32.97	0.10	0.06	QP
6	0.228	24.28	-28.23	52.51	24.12	0.10	0.06	Average
7	0.267	31.25	-29.97	61.22	31.08	0.10	0.07	QP
8	0.267	24.85	-26.37	51.22	24.68	0.10	0.07	Average
9	2.137	31.17	-24.83	56.00	30.96	0.10	0.11	QP
10	2.137	21.04	-24.96	46.00	20.83	0.10	0.11	Average
11	4.800	31.60	-24.40	56.00	31.30	0.12	0.18	QP
12	4.800	25.04	-20.96	46.00	24.74	0.12	0.18	Average
13	13.890	32.44	-27.56	60.00	31.87	0.20	0.37	QP
14	13.890	27.55	-22.45	50.00	26.98	0.20	0.37	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.174	48.00	-16.75	64.75	47.86	0.10	0.04	QP
2	0.174	41.38	-19.37	64.75	41.24	0.10	0.04	Average
3	0.176	47.52	-17.15	64.67	47.38	0.10	0.04	QP
4	0.176	40.54	-14.13	54.67	40.40	0.10	0.04	Average
5	0.187	44.85	-9.33	54.18	44.71	0.10	0.04	Average
6	0.187	48.27	-15.91	64.18	48.13	0.10	0.04	QP
7	0.879	22.81	-33.19	56.00	22.64	0.10	0.07	QP
8	0.879	12.19	-33.81	46.00	12.02	0.10	0.07	Average
9	2.949	30.47	-25.53	56.00	30.18	0.16	0.13	QP
10	2.949	23.26	-22.74	46.00	22.97	0.16	0.13	Average
11	4.431	25.06	-20.94	46.00	24.69	0.20	0.17	Average
12	4.431	31.58	-24.42	56.00	31.21	0.20	0.17	QP
13	11.545	32.34	-27.66	60.00	31.78	0.23	0.33	QP
14	11.545	27.40	-22.60	50.00	26.84	0.23	0.33	Average

Test Engineer : 
 John Huang

- Test Mode : Mode 5
- Temperature : 27.9°C
- Relative Humidity : 57 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-NY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.154	42.74	-13.04	55.78	42.60	0.10	0.04	Average
2	0.154	40.92	-24.86	65.78	40.78	0.10	0.04	QP
3	0.199	43.32	-20.33	63.65	43.18	0.10	0.04	QP
4	0.199	35.45	-18.20	53.65	35.31	0.10	0.04	Average
5	1.010	25.24	-20.76	46.00	25.08	0.10	0.06	Average
6	1.010	32.45	-23.55	56.00	32.29	0.10	0.06	QP
7	1.820	32.92	-23.08	56.00	32.72	0.10	0.10	QP
8	1.820	24.92	-21.08	46.00	24.72	0.10	0.10	Average
9	2.510	21.41	-24.59	46.00	21.19	0.10	0.12	Average
10	2.510	27.82	-28.18	56.00	27.60	0.10	0.12	QP
11	4.450	29.19	-26.81	56.00	28.91	0.11	0.17	QP
12	4.450	24.05	-21.95	46.00	23.77	0.11	0.17	Average

Site : C001-NY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	38.75	-17.19	55.94	38.61	0.10	0.04	Average
2	0.151	51.83	-14.11	65.94	51.69	0.10	0.04	QP
3	0.195	43.67	-18.13	61.82	43.53	0.10	0.04	Average
4	0.195	47.37	-16.43	63.82	47.23	0.10	0.04	QP
5	2.948	28.76	-27.24	56.00	28.67	0.16	0.13	QP
6	2.948	21.56	-24.44	46.00	21.27	0.16	0.13	Average
7	4.418	23.76	-22.24	46.00	23.39	0.20	0.17	Average
8	4.418	29.81	-26.19	56.00	29.44	0.20	0.17	QP
9	11.544	26.50	-23.50	50.00	25.94	0.23	0.33	Average
10	11.544	31.27	-28.73	60.00	30.71	0.23	0.33	QP
11	15.141	31.68	-28.32	60.00	31.00	0.30	0.38	QP
12	15.141	26.70	-23.30	50.00	26.02	0.30	0.38	Average

Test Engineer : 
 John Huang

- Test Mode : Mode 6
- Temperature : 27.9°C
- Relative Humidity : 57 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LIME
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	50.02	-15.44	65.46	49.88	0.10	0.04	QP
2	0.160	40.02	-15.44	55.46	39.88	0.10	0.04	Average
3	0.185	43.14	-21.10	64.24	43.00	0.10	0.04	QP
4	0.185	37.53	-16.71	54.24	37.39	0.10	0.04	Average
5	0.192	41.00	-22.94	63.94	40.86	0.10	0.04	QP
6	0.192	33.61	-20.33	53.94	33.47	0.10	0.04	Average
7	1.003	33.34	-22.66	56.00	33.18	0.10	0.06	QP
8	1.003	28.84	-17.16	46.00	28.68	0.10	0.06	Average
9	2.921	23.16	-22.84	46.00	22.93	0.10	0.13	Average
10	2.921	28.76	-27.24	56.00	28.53	0.10	0.13	QP
11	12.112	28.70	-21.30	50.00	28.16	0.20	0.34	Average
12	12.112	33.49	-26.51	60.00	32.95	0.20	0.34	QP

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Wireless LAN Product Card Bus
 Power : 110V/60Hz
 Model : 802.11g
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	48.53	-16.94	65.47	48.39	0.10	0.04	QP
2	0.160	44.88	-10.59	55.47	44.74	0.10	0.04	Average
3	0.171	47.85	-17.04	64.89	47.71	0.10	0.04	QP
4	0.171	39.07	-16.82	54.89	37.93	0.10	0.04	Average
5	0.198	37.95	-25.73	63.68	37.81	0.10	0.04	QP
6	0.198	27.62	-26.06	53.68	27.48	0.10	0.04	Average
7	0.999	32.51	-23.49	56.00	32.35	0.10	0.06	QP
8	0.999	28.97	-17.03	46.00	28.81	0.10	0.06	Average
9	4.611	28.86	-27.14	56.00	28.49	0.20	0.17	QP
10	4.611	23.49	-22.51	46.00	23.12	0.20	0.17	Average
11	12.454	32.08	-27.92	60.00	31.48	0.25	0.35	QP
12	12.454	27.42	-22.58	50.00	26.92	0.25	0.35	Average

Test Engineer : 
 John Huang

5.6. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.6.1. Major Measuring Instruments

- Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz

- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5 GHz


- Spectrum analyzer (R&S FSP40)
 - Attenuation 10 dB
 - Start Frequency 1 GHz
 - Stop Frequency 25 GHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 40 GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K – 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

5.6.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Typical Test Setup Layout of Radiated Emission

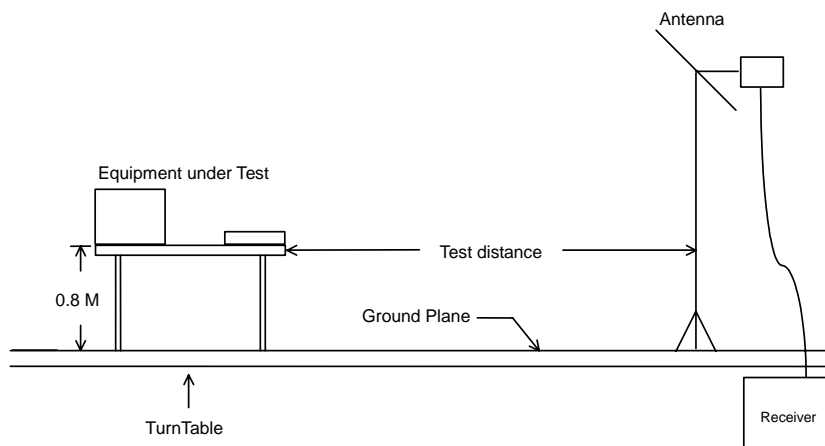

5.6.4. Test Result of Radiated Emission

- Test Mode: Mode 1 (2412MHz)
- Test Distance : 3 M
- Temperature : 26 °C
- Relative Humidity : 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	77.250	30.85	-9.15	40.00	50.76	5.58	1.56	27.05	Peak	---	---
2	133.140	32.11	-11.39	43.50	46.57	10.44	1.97	26.87	Peak	---	---
3	295.140	31.36	-14.64	46.00	43.72	11.41	2.83	26.60	Peak	---	---
1	318.900	38.33	-7.67	46.00	49.95	12.00	3.09	26.71	Peak	---	---
2	397.300	41.60	-4.40	46.00	50.73	14.54	3.51	27.18	Peak	100	205
3	786.500	38.58	-7.42	46.00	42.87	18.68	5.03	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	88.860	29.28	-14.22	43.50	46.20	8.65	1.45	27.02	Peak	---	---
2	114.780	32.90	-10.60	43.50	48.27	9.81	1.76	26.94	Peak	---	---
3	132.330	37.18	-6.32	43.50	51.64	10.45	1.96	26.87	Peak	---	---
1	397.300	37.62	-8.38	46.00	46.75	14.54	3.51	27.18	Peak	---	---
2	455.400	37.38	-8.62	46.00	45.88	15.40	3.58	27.48	Peak	---	---
3	495.300	33.38	-12.62	46.00	41.31	15.96	3.79	27.68	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1388.000	42.72	-31.28	74.00	53.63	25.06	4.53	40.50	Peak	---	---
2	1388.000	19.27	-34.73	54.00	30.18	25.06	4.53	40.50	Average	---	---
3	1590.000	44.09	-29.11	74.00	54.94	25.73	4.88	40.66	Peak	---	---
4	1590.000	23.63	-30.37	54.00	33.68	25.73	4.88	40.66	Average	---	---
5	2060.000	47.59	-26.41	74.00	55.24	27.53	5.76	40.94	Peak	---	---
6	2060.000	37.48	-16.52	54.00	45.13	27.53	5.76	40.94	Average	---	---
1	3916.000	52.00	-22.00	74.00	51.90	32.41	9.16	41.47	Peak	---	---
2	3916.000	46.11	-7.89	54.00	46.01	32.41	9.16	41.47	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1326.000	42.79	-31.21	74.00	53.88	24.91	4.44	40.44	Peak	---	---
2	1326.000	21.49	-32.51	54.00	32.58	24.91	4.44	40.44	Average	---	---
3	1454.000	42.23	-31.77	74.00	52.95	25.22	4.63	40.57	Peak	---	---
4	1454.000	23.08	-30.92	54.00	33.80	25.22	4.63	40.57	Average	---	---
5	1596.000	48.50	-25.50	74.00	58.52	25.75	4.89	40.66	Peak	---	---
6	1596.000	35.43	-18.57	54.00	45.45	25.75	4.89	40.66	Average	---	---

➤ For 5GHz ~ 25GHz

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2412.000	H	28.24	6.22	63.35	-	-	97.81	77714.13		Peak
2412.000	H	28.24	6.22	59.08	-	-	93.54	47533.52		AV
2412.000	V	28.24	6.22	57.09	-	-	91.55	37800.71		Peak
2412.000	V	28.24	6.22	53.69	-	-	88.15	25556.42		AV
4822.000	H						-			AV/Peak
4822.000	V	33.06	9.06	10.27	74.00	5011.87	52.39	416.39	-21.61	Peak
4822.000	V	33.06	9.06	4.59	54.00	501.19	46.71	216.52	-7.29	AV
7236.000	V/H						-			AV/Peak
9648.000	V/H						-			AV/Peak
12060.000	V/H						-			AV/Peak
14472.000	V/H						-			AV/Peak
16884.000	V/H						-			AV/Peak
19296.000	V/H						-			AV/Peak
21708.000	V/H						-			AV/Peak
24120.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve Chen
Steve Chen

- Test Mode: Mode 2 (2437 MHz)
- Test Distance : 3 M
- Temperature : 26 °C
- Relative Humidity : 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	55.650	28.67	-11.33	40.00	48.61	5.73	1.42	27.09	Peak	---	---
2	72.660	34.35	-5.65	40.00	55.02	4.87	1.51	27.05	Peak	100	200
3	165.810	31.08	-12.42	43.50	48.02	7.68	2.12	26.74	Peak	---	---
1	318.900	38.46	-7.54	46.00	50.08	12.00	3.09	26.71	Peak	---	---
2	397.300	38.79	-7.21	46.00	47.92	14.54	3.51	27.18	Peak	---	---
3	786.500	38.60	-7.40	46.00	42.89	18.68	5.03	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	88.860	29.87	-13.63	43.50	46.79	8.65	1.45	27.02	Peak	---	---
2	119.370	32.60	-10.90	43.50	47.77	9.96	1.79	26.92	Peak	---	---
3	132.330	37.20	-6.30	43.50	51.66	10.45	1.96	26.87	Peak	---	---
1	397.300	40.22	-5.78	46.00	49.35	14.54	3.51	27.18	Peak	---	---
2	455.400	40.11	-5.89	46.00	48.61	15.40	3.58	27.48	Peak	---	---
3	478.500	34.14	-11.86	46.00	42.29	15.74	3.70	27.59	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1390.000	43.75	-30.25	74.00	54.65	25.07	4.53	40.50	Peak	---	---
2	1390.000	32.29	-21.71	54.00	43.19	25.07	4.53	40.50	Average	---	---
3	1590.000	45.53	-28.47	74.00	55.58	25.73	4.88	40.66	Peak	---	---
4	1590.000	34.47	-19.53	54.00	44.52	25.73	4.88	40.66	Average	---	---
5	2084.000	48.39	-25.61	74.00	55.98	27.58	5.79	40.96	Peak	---	---
6	2084.000	37.61	-16.39	54.00	45.20	27.58	5.79	40.96	Average	---	---
7	2110.000	48.09	-25.91	74.00	55.60	27.63	5.83	40.97	Peak	---	---
8	2110.000	42.05	-11.95	54.00	49.56	27.63	5.83	40.97	Average	---	---
1	4044.000	51.63	-22.37	74.00	51.28	32.58	9.31	41.54	Peak	---	---
2	4044.000	45.18	-8.82	54.00	44.83	32.58	9.31	41.54	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	41.64	-32.36	74.00	53.51	24.27	4.03	40.17	Peak	---	---
2	1060.000	23.58	-30.42	54.00	35.45	24.27	4.03	40.17	Average	---	---
3	1324.000	43.01	-30.99	74.00	54.11	24.91	4.43	40.44	Peak	---	---
4	1324.000	24.38	-29.62	54.00	35.48	24.91	4.43	40.44	Average	---	---
5	1596.000	47.27	-26.73	74.00	57.29	25.75	4.89	40.66	Peak	---	---
6	1596.000	33.24	-20.76	54.00	43.26	25.75	4.89	40.66	Average	---	---

➤ For 5GHz ~ 25GHz

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2438.000	H	28.30	6.26	64.84	-	-	99.40	93325.43		Peak
2438.000	H	28.30	6.26	60.95	-	-	95.51	59634.83		AV
2438.000	V	28.30	6.26	60.98	-	-	95.54	59841.16		Peak
2438.000	V	28.30	6.26	57.26	-	-	91.82	38994.20		AV
4874.000	H						-			AV/Peak
4876.000	V	33.17	9.09	11.26	74.00	5011.87	53.52	474.24	-20.48	Peak
4876.000	V	33.17	9.09	5.22	54.00	501.19	47.48	236.59	-6.52	AV
7311.000	V/H						-			AV/Peak
9748.000	V/H						-			AV/Peak
12185.000	V/H						-			AV/Peak
14622.000	V/H						-			AV/Peak
17059.000	V/H						-			AV/Peak
19496.000	V/H						-			AV/Peak
21933.000	V/H						-			AV/Peak
24370.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve
Steve Chen

- Test Mode: Mode 3 (2462 MHz)
- Test Distance : 3 M
- Temperature : 26 °C
- Relative Humidity : 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	165.810	31.04	-12.46	43.50	47.98	7.68	2.12	26.74	Peak	---	---
2	171.210	34.64	-8.86	43.50	51.77	7.46	2.12	26.71	Peak	---	---
3	245.730	33.02	-12.98	46.00	45.88	11.16	2.58	26.60	Peak	---	---
1	318.900	38.55	-7.45	46.00	50.17	12.00	3.09	26.71	Peak	---	---
2	397.300	39.99	-6.01	46.00	49.12	14.54	3.51	27.18	Peak	100	271
3	786.500	37.29	-8.71	46.00	41.58	18.68	5.03	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	87.780	28.79	-11.21	40.00	46.00	8.32	1.49	27.02	Peak	---	---
2	117.210	31.92	-11.58	43.50	47.18	9.89	1.78	26.93	Peak	---	---
3	132.330	37.03	-6.47	43.50	51.49	10.45	1.96	26.87	Peak	---	---
1	397.300	39.25	-6.75	46.00	48.38	14.54	3.51	27.18	Peak	---	---
2	455.400	39.63	-6.37	46.00	48.13	15.40	3.58	27.48	Peak	---	---
3	696.200	36.14	-9.86	46.00	41.44	17.97	4.73	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1390.000	43.88	-30.12	74.00	54.78	25.07	4.53	40.50	Peak	---	---
2	1390.000	29.41	-24.59	54.00	40.31	25.07	4.53	40.50	Average	---	---
3	1588.000	45.46	-28.54	74.00	55.52	25.72	4.88	40.66	Peak	---	---
4	1588.000	31.20	-22.80	54.00	41.26	25.72	4.88	40.66	Average	---	---
5	2110.000	47.34	-26.66	74.00	54.85	27.63	5.83	40.97	Peak	---	---
6	2110.000	39.05	-14.95	54.00	46.56	27.63	5.83	40.97	Average	---	---
7	2140.000	48.04	-25.96	74.00	55.47	27.69	5.87	40.99	Peak	---	---
8	2140.000	38.34	-15.66	54.00	45.77	27.69	5.87	40.99	Average	---	---
1	4982.000	51.43	-22.57	74.00	51.48	33.39	9.15	42.59	Peak	---	---
2	4982.000	48.75	-5.25	54.00	48.80	33.39	9.15	42.59	Average	100	200

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11b

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1326.000	41.90	-32.10	74.00	52.99	24.91	4.44	40.44	Peak	---	---
2	1326.000	28.02	-25.98	54.00	39.11	24.91	4.44	40.44	Average	---	---
3	1454.000	42.09	-31.91	74.00	52.81	25.22	4.63	40.57	Peak	---	---
4	1454.000	29.81	-24.19	54.00	40.53	25.22	4.63	40.57	Average	---	---
5	1588.000	47.05	-26.95	74.00	57.11	25.72	4.88	40.66	Peak	---	---
6	1588.000	34.02	-19.98	54.00	44.08	25.72	4.88	40.66	Average	---	---

➤ For 5GHz ~ 25GHz

Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2462.000	H	28.35	6.29	62.08	-	-	96.72	68548.82		Peak
2462.000	H	28.35	6.29	57.82	-	-	92.46	41975.90		AV
2462.000	V	28.35	6.29	60.43	-	-	95.07	56689.16		Peak
2462.000	V	28.35	6.29	55.87	-	-	90.51	33535.13		AV
4924.000	H						-			AV/ Peak
4924.000	V	33.27	9.12	9.90	74.00	5011.87	52.29	411.62	-21.71	Peak
4924.000	V	33.27	9.12	3.40	54.00	501.19	45.79	194.76	-8.21	AV
7386.000	V/H						-			AV/ Peak
9848.000	V/H						-			AV/ Peak
12310.000	V/H						-			AV/ Peak
14772.000	V/H						-			AV/ Peak
17234.000	V/H						-			AV/ Peak
19696.000	V/H						-			AV/ Peak
22158.000	V/H						-			AV/ Peak
24620.000	V/H						-			AV/ Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve Chen
Steve Chen

- Test Mode: Mode 4 (2412MHz)
- Test Distance : 3 M
- Temperature : 26 °C
- Relative Humidity : 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 1lg

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	41.340	35.08	-4.92	40.00	50.87	10.16	1.15	27.10	Peak	---	---
2	240.060	34.23	-11.77	46.00	47.36	10.92	2.55	26.60	Peak	---	---
3	266.250	35.11	-10.89	46.00	47.34	11.68	2.69	26.60	Peak	---	---
1	318.900	36.96	-9.04	46.00	48.58	12.00	3.09	26.71	Peak	---	---
2	396.600	41.28	-4.72	46.00	50.43	14.52	3.51	27.18	Peak	100	205
3	478.500	36.88	-9.12	46.00	45.03	15.74	3.70	27.59	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 1lg

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	89.940	30.22	-13.28	43.50	47.03	8.78	1.43	27.02	Peak	---	---
2	119.370	33.69	-9.81	43.50	48.86	9.96	1.79	26.92	Peak	---	---
3	132.330	34.07	-9.43	43.50	48.53	10.45	1.96	26.87	Peak	---	---
1	343.400	31.94	-14.06	46.00	42.61	12.79	3.40	26.86	Peak	---	---
2	396.600	35.43	-10.57	46.00	44.58	14.52	3.51	27.18	Peak	---	---
3	531.000	32.34	-13.66	46.00	39.83	16.34	3.96	27.79	Peak	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	41.68	-32.32	74.00	53.55	24.27	4.03	40.17	Peak	---	---
2	1060.000	23.59	-30.41	54.00	35.46	24.27	4.03	40.17	Average	---	---
3	1326.000	42.91	-31.09	74.00	54.00	24.91	4.44	40.44	Peak	---	---
4	1326.000	30.11	-23.89	54.00	41.20	24.91	4.44	40.44	Average	---	---
5	1390.000	41.34	-32.66	74.00	52.24	25.07	4.53	40.50	Peak	---	---
6	1390.000	29.33	-24.67	54.00	40.23	25.07	4.53	40.50	Average	---	---
7	1524.000	42.47	-31.53	74.00	52.08	25.46	4.75	40.62	Peak	---	---
8	1524.000	28.67	-25.33	54.00	39.08	25.46	4.75	40.62	Average	---	---
9	1622.000	41.81	-32.19	74.00	51.69	25.86	4.94	40.68	Peak	---	---
10	1622.000	23.37	-30.63	54.00	33.25	25.86	4.94	40.68	Average	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH01 2412MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	39.40	-34.60	74.00	51.27	24.27	4.03	40.17	Peak	---	---
2	1060.000	23.58	-30.42	54.00	35.45	24.27	4.03	40.17	Average	---	---
3	1196.000	39.77	-34.23	74.00	51.24	24.60	4.24	40.31	Peak	---	---
4	1196.000	21.82	-32.18	54.00	33.29	24.60	4.24	40.31	Average	---	---
5	1324.000	43.38	-30.62	74.00	54.48	24.91	4.43	40.44	Peak	---	---
6	1324.000	29.01	-24.99	54.00	40.11	24.91	4.43	40.44	Average	---	---
7	1460.000	30.89	-23.11	54.00	41.58	25.24	4.64	40.57	Average	---	---
8	1460.000	42.32	-31.68	74.00	53.01	25.24	4.64	40.57	Peak	---	---
9	1596.000	44.62	-29.38	74.00	54.64	25.75	4.89	40.66	Peak	---	---
10	1596.000	31.63	-22.37	54.00	41.65	25.75	4.89	40.66	Average	---	---

➤ For 3GHz ~ 25GHz

Remark: Frequency from 3000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2414.000	H	28.25	6.23	55.30	-	-	89.78	30831.88		Peak
2414.000	H	28.25	6.23	44.95	-	-	79.43	9364.83		AV
2406.000	V	28.23	6.22	49.80	-	-	84.25	16311.73		Peak
2406.000	V	28.23	6.22	39.64	-	-	74.09	5064.07		AV
4822.000	H	33.06	9.06	10.41	74.00	5011.87	52.53	423.16	-21.47	Peak
4822.000	H	33.06	9.06	4.63	54.00	501.19	46.75	217.52	-7.25	AV
4822.000	V	33.06	9.06	9.80	74.00	5011.87	51.92	394.46	-22.08	Peak
4822.000	V	33.06	9.06	5.01	54.00	501.19	47.13	227.25	-6.87	AV
7236.000	V/H						-			AV/Peak
9648.000	V/H						-			AV/Peak
12060.000	V/H						-			AV/Peak
14472.000	V/H						-			AV/Peak
16884.000	V/H						-			AV/Peak
19296.000	V/H						-			AV/Peak
21708.000	V/H						-			AV/Peak
24120.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve
Steve Chen

- Test Mode: Mode 5 (2437 MHz)
- Test Distance : 3 M
- Temperature : 26 °C
- Relative Humidity : 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	232.770	29.83	-16.17	46.00	43.63	10.30	2.50	26.60	Peak	---	---
2	240.060	33.86	-12.14	46.00	46.99	10.92	2.55	26.60	Peak	---	---
3	265.980	34.81	-11.19	46.00	47.03	11.69	2.69	26.60	Peak	---	---
1	318.900	37.01	-8.99	46.00	48.63	12.00	3.09	26.71	Peak	---	---
2	397.300	42.10	-3.90	46.00	51.23	14.54	3.51	27.18	Peak	100	200
3	478.500	37.02	-8.98	46.00	45.17	15.74	3.70	27.59	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	36.210	29.24	-10.76	40.00	42.90	12.38	1.06	27.10	Peak	---	---
2	88.050	30.22	-13.28	43.50	47.37	8.39	1.48	27.02	Peak	---	---
3	133.140	33.51	-9.99	43.50	47.97	10.44	1.97	26.07	Peak	---	---
1	343.400	32.32	-13.68	46.00	42.99	12.79	3.40	26.86	Peak	---	---
2	397.300	37.13	-8.87	46.00	46.26	14.54	3.51	27.18	Peak	---	---
3	694.100	34.08	-11.92	46.00	39.39	17.96	4.73	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	40.63	-33.37	74.00	52.50	24.27	4.03	40.17	Peak	---	---
2	1060.000	21.57	-32.43	54.00	33.44	24.27	4.03	40.17	Average	---	---
3	1190.000	39.57	-34.43	74.00	51.06	24.58	4.23	40.30	Peak	---	---
4	1190.000	22.20	-31.80	54.00	33.69	24.58	4.23	40.30	Average	---	---
5	1324.000	43.21	-30.79	74.00	54.31	24.91	4.43	40.44	Peak	---	---
6	1324.000	27.69	-26.91	54.00	38.79	24.91	4.43	40.44	Average	---	---
7	1622.000	42.05	-31.15	74.00	52.73	25.86	4.94	40.68	Peak	---	---
8	1622.000	29.76	-24.24	54.00	39.64	25.86	4.94	40.68	Average	---	---
9	1718.000	43.28	-30.72	74.00	52.62	26.26	5.14	40.74	Peak	---	---
10	1718.000	27.52	-26.48	54.00	36.86	26.26	5.14	40.74	Average	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH06 2437MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	40.08	-33.92	74.00	51.95	24.27	4.03	40.17	Peak	---	---
2	1060.000	23.38	-30.62	54.00	35.25	24.27	4.03	40.17	Average	---	---
3	1326.000	41.01	-32.99	74.00	52.10	24.91	4.44	40.44	Peak	---	---
4	1326.000	27.65	-26.35	54.00	38.74	24.91	4.44	40.44	Average	---	---
5	1374.000	41.08	-32.92	74.00	52.03	25.03	4.51	40.49	Peak	---	---
6	1374.000	26.46	-27.54	54.00	37.41	25.03	4.51	40.49	Average	---	---
7	1454.000	41.75	-32.25	74.00	52.47	25.22	4.63	40.57	Peak	---	---
8	1454.000	26.17	-27.83	54.00	36.89	25.22	4.63	40.57	Average	---	---
9	1590.000	45.72	-28.28	74.00	55.77	25.73	4.88	40.66	Peak	---	---
10	1590.000	28.74	-25.26	54.00	38.79	25.73	4.88	40.66	Average	---	---

➤ For 3GHz ~ 25GHz

Remark: Frequency from 3000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2430.000	H	28.28	6.25	54.08	-	-	88.61	26946.35		Peak
2430.000	H	28.28	6.25	44.50	-	-	79.03	8943.35		AV
2430.000	V	28.28	6.25	50.34	-	-	84.87	17518.62		Peak
2430.000	V	28.28	6.25	39.88	-	-	74.41	5254.12		AV
4876.000	H	33.17	9.09	10.29	74.00	5011.87	52.55	424.13	-21.45	Peak
4876.000	H	33.17	9.09	1.46	54.00	501.19	43.72	153.46	-10.28	AV
4876.000	V	33.17	9.09	10.14	74.00	5011.87	52.40	416.87	-21.60	Peak
4876.000	V	33.17	9.09	4.76	54.00	501.19	47.02	224.39	-6.98	AV
7311.000	V/H						-			AV/Peak
9748.000	V/H						-			AV/Peak
12185.000	V/H						-			AV/Peak
14622.000	V/H						-			AV/Peak
17059.000	V/H						-			AV/Peak
19496.000	V/H						-			AV/Peak
21933.000	V/H						-			AV/Peak
24370.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve
Steve Chen

- Test Mode: Mode 6 (2462 MHz)
- Test Distance : 3 M
- Temperature : 26 °C
- Relative Humidity : 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3a 03CH03-MAT HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	232.770	29.85	-16.15	46.00	43.65	10.30	2.50	26.60	Peak	---	---
2	240.060	33.93	-12.07	46.00	47.06	10.92	2.55	26.60	Peak	---	---
3	265.980	34.94	-11.06	46.00	47.16	11.69	2.69	26.60	Peak	---	---
1	318.900	36.47	-9.53	46.00	48.09	12.00	3.09	26.71	Peak	---	---
2	397.300	41.99	-4.01	46.00	51.12	14.54	3.51	27.18	Peak	100	205
3	478.500	37.00	-9.00	46.00	45.15	15.74	3.70	27.59	Peak	---	---

Site : 03CH03-HY
 Condition : 3a 03CH03-MAT VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	49.980	31.15	-8.85	40.00	50.35	6.47	1.43	27.10	Peak	---	---
2	89.130	29.22	-14.28	43.50	46.06	8.74	1.44	27.02	Peak	---	---
3	132.330	34.36	-9.14	43.50	48.82	10.45	1.96	26.87	Peak	---	---
1	343.400	30.54	-15.46	46.00	41.21	12.79	3.40	26.86	Peak	---	---
2	397.300	37.27	-8.73	46.00	46.40	14.54	3.51	27.18	Peak	---	---
3	665.400	32.20	-13.80	46.00	37.79	17.75	4.66	28.00	Peak	---	---

Site : 03CH03-NY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	40.88	-33.12	74.00	52.75	24.27	4.03	40.17	Peak	---	---
2	1060.000	20.24	-33.76	54.00	32.11	24.27	4.03	40.17	Average	---	---
3	1326.000	43.67	-30.33	74.00	54.76	24.91	4.44	40.44	Peak	---	---
4	1326.000	22.52	-31.48	54.00	33.61	24.91	4.44	40.44	Average	---	---
5	1524.000	42.23	-31.77	74.00	52.64	25.46	4.75	40.62	Peak	---	---
6	1524.000	23.11	-30.89	54.00	33.52	25.46	4.75	40.62	Average	---	---

Site : 03CH03-NY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless Lan Product Card Bus
 Power : FOR N/B
 MODEL : 802.11g
 MEMO : TX CH11 2462MHz
 : F382007
 : 11g

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	41.28	-32.72	74.00	53.15	24.27	4.03	40.17	Peak	---	---
2	1060.000	23.91	-30.09	54.00	35.70	24.27	4.03	40.17	Average	---	---
3	1326.000	42.31	-31.69	74.00	53.40	24.91	4.44	40.44	Peak	---	---
4	1326.000	27.65	-26.35	54.00	38.74	24.91	4.44	40.44	Average	---	---
5	1374.000	40.27	-33.73	74.00	51.22	25.03	4.51	40.49	Peak	---	---
6	1374.000	23.51	-30.49	54.00	34.46	25.03	4.51	40.49	Average	---	---
7	1460.000	41.03	-32.97	74.00	51.72	25.24	4.64	40.57	Peak	---	---
8	1460.000	23.16	-30.84	54.00	33.05	25.24	4.64	40.57	Average	---	---
9	1590.000	44.16	-29.84	74.00	54.21	25.73	4.88	40.66	Peak	---	---
10	1590.000	26.52	-27.48	54.00	36.57	25.73	4.88	40.66	Average	---	---

➤ For 3GHz ~ 25GHz

Remark: Frequency from 3000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2462.000	H	28.35	6.29	54.27	-	-	88.91	27893.31		Peak
2462.000	H	28.35	6.29	39.22	-	-	73.86	4931.74		AV
2462.000	V	28.35	6.29	49.71	-	-	84.35	16500.61		Peak
2462.000	V	28.35	6.29	39.31	-	-	73.95	4983.10		AV
4924.000	H	33.27	9.12	8.56	74.00	5011.87	50.95	352.78	-23.05	Peak
4924.000	H	33.27	9.12	1.28	54.00	501.19	43.67	152.58	-10.33	AV
4924.000	V	33.27	9.12	9.10	74.00	5011.87	51.49	375.40	-22.51	Peak
4924.000	V	33.27	9.12	2.73	54.00	501.19	45.12	180.30	-8.88	AV
7386.000	V/H						-			AV/ Peak
9848.000	V/H						-			AV/ Peak
12310.000	V/H						-			AV/ Peak
14772.000	V/H						-			AV/ Peak
17234.000	V/H						-			AV/ Peak
19696.000	V/H						-			AV/ Peak
22158.000	V/H						-			AV/ Peak
24620.000	V/H						-			AV/ Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve
Steve Chen

5.7. Band Edges Measurement

5.7.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

- Test Result in lower band (Channel 1) : PASS
- Test Result in higher band(Channel 11) : PASS

5.7.4. Note on Band edge Emission

The band edge emission plot on appendix B page B14. shows 45.18dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

- Test Mode: Mode 1

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
H	96.72	51.54	74.00	-22.46	Peak
H	92.46	47.28	54.00	-6.72	Average
V	95.07	49.89	74.00	-24.11	Peak
V	90.51	45.33	54.00	-8.67	Average

The band edge emission plot on appendix B page B16. shows 40.98dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

- Test Mode: Mode 2

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
H	88.91	47.93	74.00	-26.07	Peak
H	73.86	32.88	54.00	-21.12	Average
V	84.35	43.37	74.00	-30.63	Peak
V	73.95	32.97	54.00	-21.03	Average

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

5.8. Antenna Requirements

The EUT use a undetachable antenna on PCB board external connector. It is considered meet antenna requirement of FCC.

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connected Construction

The maximum Gain antenna used in this product is dipole antenna. On PCB board, No antenna connector.

5.9. RF Exposure

FCC Rules and Regulations Part 1.1307,1.1310,2.1091,2.1093:

RF Exposure Compliance

5.9.1. Limit For Maximum Permissible Exposure (MPE)

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

*Plane-wave equivalent power density

5.9.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

- E = Electric field (V/m)
- P = Peak output power (mW)
- G = Antenna numeric gain (numeric)
- d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 10 W/m². We can change the formula to:

$$d = \sqrt{\frac{30 \times P \times G}{3770}}$$

• Test Mode: Mode 1

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated RF Exposure Separation Distance (cm)	Minimum RF Exposure Separation Distance (cm)
Channel 01	2.00	1.58	12.35	17.2	1.47	20
Channel 06	2.00	1.58	12.56	18.0	1.51	20
Channel 11	2.00	1.58	11.87	15.4	1.39	20

• Test Mode: Mode 2

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated RF Exposure Separation Distance (cm)	Minimum RF Exposure Separation Distance (cm)
Channel 01	2.00	1.58	11.34	13.6	1.31	20
Channel 06	2.00	1.58	11.48	14.1	1.33	20
Channel 11	2.00	1.58	10.75	11.9	1.22	20

5.9.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

6. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.10	3.92
35	13.63	1.04	2000	27.40	5.66
40	11.11	1.09	3000	30.00	7.20
45	10.59	1.24	4000	32.60	9.36
50	6.47	1.43	5000	33.40	9.16
55	5.83	1.39	6000	34.20	10.70
60	5.18	1.59	7000	35.30	12.16
65	4.81	1.41	8000	36.90	13.12
70	4.43	1.43	9000	38.10	13.81
75	5.10	1.55	10000	39.00	14.83
80	5.91	1.56	11000	38.60	15.83
85	7.33	1.62	12000	39.50	17.11
90	8.74	1.41	13000	39.30	17.62
95	9.05	1.81	14000	41.60	18.37
100	9.36	1.68	15000	40.60	19.10
110	9.65	1.73	16000	37.20	19.72
120	9.97	1.79	17000	40.20	21.98
130	10.51	1.93	18000	48.90	21.22
140	10.32	2.06	19000	37.60	23.90
150	9.42	2.09	20000	37.30	24.07
160	8.09	2.12	21000	37.00	25.49
170	7.43	2.12	22000	38.00	24.92
180	7.60	2.12	23000	38.70	25.60
190	7.43	2.21	24000	38.60	25.70
200	7.26	2.29	25000	24.10	3.92
220	9.11	2.42	14000	27.40	5.66
240	10.88	2.54	15000	30.00	7.20
260	11.75	2.66	16000	32.60	9.36
280	11.55	2.76	17000	33.40	9.16
300	11.36	2.85	18000	34.20	10.70
320	12.03	3.10	19000	35.30	12.16
340	12.69	3.36	20000	36.90	13.12
360	13.33	3.49	21000	38.10	13.81
380	14.00	3.50	22000	39.00	14.83
400	14.63	3.51	23000	38.60	15.83
450	15.33	3.55	24000	39.50	17.11
500	16.03	3.81	25000	39.30	17.62
550	16.65	4.05			
600	17.29	4.23			
650	17.64	4.63			
700	18.00	4.74			
750	18.39	4.95			
800	18.79	5.06			
850	19.10	5.18			
900	19.42	5.40			
950	19.58	5.91			
1000	19.75	5.58			

7. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM009	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHz~40GHz	Aug. 07, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz –1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted

Calibration Interval of instruments listed above is one year.

8. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty Ue(y)	normal	±2.7
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.4

$U = \{((1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\} = 2.2$ for 10m test distance

$U = \{((1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\} = 2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty Ue(y)	normal	±1.66
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±3.32

$U = \{(0.3/2)^2 + (2^2+1.5^2+0.2^2)/3+(0.2)^2/2\} = 1.66$