

Straubing, 20 September 2005

**TEST - REPORT**

**No. 55426-050412 (Edition 2)**

**for**

**sd605**

**Inductive TAG Reader Module**

**Applicant:** SKIDATA AG

**Test Specifications:** FCC Code of Federal Regulations,  
CFR 47, Part 15,  
Sections 15.205, 15.207, 15.215 and 15.225

Radio Standards Specification  
RSS-GEN, Sections 4.5, 7.2.2 and 7.2.4  
and  
RSS-210 Issue 6, Sections 2.2, 2.7 and  
Annex 2.6

**Note:**

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

## Table of Contents

|      |   |    |
|------|---|----|
| 1    | Description of the Equipment Under Test (EUT) .....             | 3  |
| 2    | Administrative Data .....                                       | 4  |
| 3    | Identification of the Test Laboratory .....                     | 5  |
| 4    | Summary .....   | 6  |
| 5    | Operation Mode and Configuration of EUT.....                    | 7  |
| 6    | Measurement Procedures.....                                     | 8  |
| 6.1  | Bandwidth Measurements .....                                    | 8  |
| 6.2  | Pulse Train Measurement .....                                   | 9  |
| 6.3  | Conducted AC Powerline Emission.....                            | 10 |
| 6.4  | Radiated Emission Measurement 9 kHz to 30 MHz .....             | 12 |
| 6.5  | Radiated Emission in Fully or Semi Anechoic Room.....           | 14 |
| 6.6  | Radiated Emission at Open Field Test Site.....                  | 16 |
| 6.7  | Carrier Frequency Stability .....                               | 17 |
| 7    | Photographs Taken During Testing .....                          | 19 |
| 8    | Test Results.....   | 31 |
| 8.1  | Occupied Bandwidth.....   | 33 |
| 8.2  | Emission Bandwidth .....  | 38 |
| 8.3  | Designation of Emissions .....                                  | 43 |
| 8.4  | Pulse Train Measurement .....                                   | 44 |
| 8.5  | Restricted Bands of Operation .....                             | 47 |
| 8.6  | Conducted Powerline Emission Measurement 150 kHz to 30 MHz..... | 48 |
| 8.7  | Spectrum Mask.....  | 49 |
| 8.8  | Radiated Emission Measurement 9 kHz to 30 MHz .....             | 51 |
| 8.9  | Radiated Emission Measurement 30 MHz to 1 GHz .....             | 56 |
| 8.10 | Carrier Frequency Stability .....                               | 59 |
| 8.11 | Exposure of Humans to RF Fields.....                            | 62 |
| 9    | Referenced Regulations .....                                    | 64 |
| 10   | Charts taken during testing .....                               | 65 |

## 1 Description of the Equipment Under Test (EUT)

| General data of EUT                        |  |
|--|--|
| Type designation <sup>1</sup> :            | sd605  |
| Parts <sup>2</sup> : and Serial number(s): | sd605 (V4.2): D052000585<br>Antenna sd611 (V1.2): D044500823<br>Antenna sd612 (V1.2): D052500149<br>Antenna sd647 (V2.1): D051000069<br>Antenna sd648 (V1.1): D051000071 |
| Manufacturer:                              | SKIDATA AG   |
| Type of equipment:                         | Inductive TAG Reader Module  |
| Version:                                   | As delivered   |
| FCC ID:                                    | QSS-SD605  |
| Additional parts/accessories:              |  |

| Technical data of EUT                   |   |
|---|---|
| Application frequency range:            | 119 - 127 kHz and 13.553 - 13.567 MHz   |
| Frequency range:                        | 119 - 127 kHz and 13.553 - 13.567 MHz   |
| Operating frequency:                    | 122 kHz and 13.56 MHz   |
| Type of modulation:                     | ASK   |
| Pulse train:                            | ---   |
| Pulse width:                            | ---   |
| Number of RF-channels:                  | 2 (122 kHz and 13.56 MHz)   |
| Channel spacing:                        | Not Applicable  |
| Designation of emissions <sup>3</sup> : | 10K0A1D   |
| Type of antenna:                        | Up to two external antennas   |
| Size/length of antenna:                 | Antenna sd611 (V1.2): 145 x 95 mm<br>Antenna sd612 (V1.2): 90 x 90 mm<br>Antenna sd647 (V2.1): 52 x 40 mm<br>Antenna sd648 (V1.1): 70 x 52 mm |
| Connection of antenna:                  | <input checked="" type="checkbox"/> detachable <input type="checkbox"/> not detachable  |
| Type of power supply:                   | DC supply   |
| Specifications for power supply:        | nominal voltage:      5.00 V<br>minimum voltage:    4.75 V<br>maximum voltage:    5.25 V  |

<sup>1</sup> Type designation of the system if EUT consists of more than one part.

<sup>2</sup> Type designations of the parts of the system, if applicable.

<sup>3</sup> Also known as "Class of Emission".

## 2 Administrative Data

| Application details       |  |
|---------------------------|--|
| Applicant (full address): | SKIDATA AG<br>Untersbergstraße 40<br>A-5083 Grödig |
| Contact person:           | Mr. Christoph Sonderegger                          |
| Contract identification:  | ---  |
| Receipt of EUT:           | 25 August 2005                                     |
| Date(s) of test:          | September 2005                                     |
| Note(s):                  | ---  |

| Report details |                   |
|----------------|-------------------|
| Report number: | 55426-050412      |
| Edition:       | 2                 |
| Issue date:    | 20 September 2005 |

### 3 Identification of the Test Laboratory

| Details of the Test Laboratory          |  |
|---|--|
| Company name:                           | Senton GmbH EMI/EMC Test Center                              |
| Address:                                | Aeussere Fruehlingstrasse 45<br>D-94315 Straubing<br>Germany |
| Laboratory accreditation:               | DAR-Registration No. DAT-P-171/94-02                         |
| FCC test site registration number       | 90926  |
| Industry Canada test site registration: | IC 3050  |
| Contact person:                         | Mr. Johann Roidt   |
|   | Phone: (+49) (0)9421 5522-0<br>Fax: (+49) (0)9421 5522-99    |

## 4 Summary

### Summary of test results

The tested sample complies with the requirements set forth in the

**Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225**

of the Federal Communication Commission (FCC) and the

**Radio Standards Specification RSS-GEN, Sections 4.5, 7.2.2 and 7.2.4  
and**

**RSS-210 Issue 6, Sections 2.2, 2.7 and Annex 2.6**

of Industry Canada (IC).

### Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

## 5 Operation Mode and Configuration of EUT

### Operation Mode(s)

- Continuous transmission, alternating frequency, waiting for TAG.
- Reading 122 kHz TAG continuous, 13.56 MHz frequency not active.
- Reading 13.56 MHz TAG continuous, 122 kHz frequency not active.

### Configuration(s) of EUT

EUT was configured as stand alone device.  
 The EUT owns two electric identical channels, thus for measurements the EUT was configured with one of the four delivered antennas.

### List of ports and cables

| <i>Port</i> | <i>Description</i>          | <i>Classification<sup>4</sup></i> | <i>Cable type</i> | <i>Cable length</i> |
|-------------|-----------------------------|-----------------------------------|-------------------|---------------------|
| 1           | DC 5 V supply               | dc power                          | Unshielded        | < 1m <sup>5</sup>   |
| 2           | Antenna port X1 (122 kHz)   | signal/control port               | Unshielded        | < 1m <sup>5</sup>   |
| 3           | Antenna port X2 (122 kHz)   | signal/control port               | Unshielded        | < 1m <sup>5</sup>   |
| 4           | Antenna port X3 (13.56 MHz) | signal/control port               | Unshielded        | < 1m <sup>5</sup>   |
| 5           | Antenna port X4 (13.56 MHz) | signal/control port               | Unshielded        | < 1m <sup>5</sup>   |

### List of devices connected to EUT

| <i>Item</i> | <i>Description</i> | <i>Type Designation</i> | <i>Serial no. or ID</i> | <i>Manufacturer</i> |
|-------------|--------------------|-------------------------|-------------------------|---------------------|
| 1           | sd611              | Antenna                 | D044500823              | SKIDATA AG          |
| 2           | sd612              | Antenna                 | D052500149              | SKIDATA AG          |
| 3           | sd647              | Antenna                 | D051000069              | SKIDATA AG          |
| 4           | sd648              | Antenna                 | D051000071              | SKIDATA AG          |

### List of support devices

Not Applicable


<sup>4</sup> Ports shall be classified as ac power, dc power or signal/control port

<sup>5</sup> EUT is intended for internal usage in a system.

## 6 Measurement Procedures

### 6.1 Bandwidth Measurements


| Measurement Procedure:   |   |
|--|---|
| Rules and specifications:  | CFR 47 Part 2, section 2.202(a)<br>CFR 47 Part 15, section 15.215(c)<br>IC RSS-GEN Issue 1, section 4.4.1<br>IC RSS-210 Issue 6, section annex 1.1.3<br>ANSI C63.4, annex H.6 |
| Guide:   | ANSI C63.4 / IC RSS-GEN Issue 1, section 4.4.1  |
| Measurement setup:   | <input type="checkbox"/> Conducted: See below<br><input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.4)                            |
| <p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p> |   |

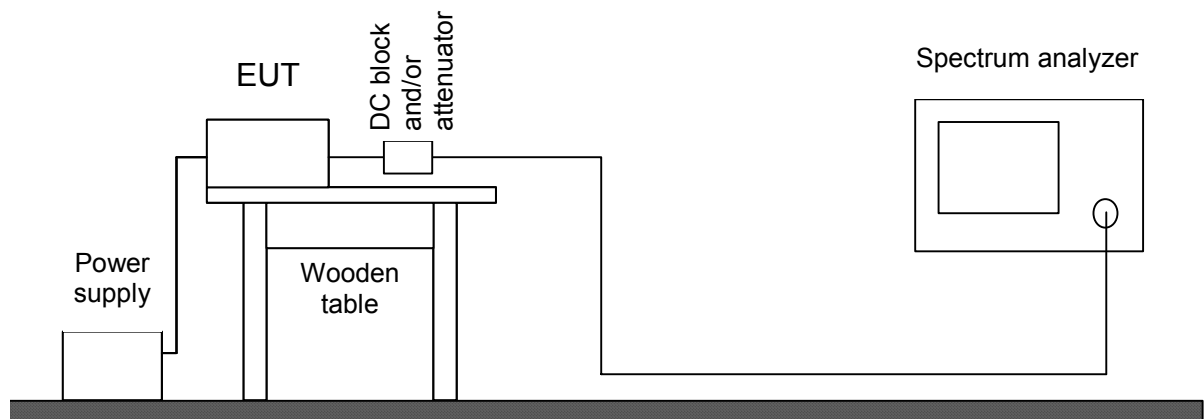




## 6.2 Pulse Train Measurement

| Measurement Procedure:   |  |
|--|--|
| Rules and specifications:  | CFR 47 Part 15, section 15.35(c)<br>IC RSS-GEN Issue 1, section 4.3  |
| Guide:   | ANSI C63.4   |
| Measurement setup:   | <input type="checkbox"/> Conducted: See below (direct connection or via test fixture)<br><input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.4) |
| <p>If antenna is detachable pulse train measurements shall be performed at the antenna connector (conducted measurement). The RF output terminals are connected to a spectrum analyzer or to a diode detector in combination with an oscilloscope. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If antenna is not detachable a test fixture may be used instead of direct connection to RF output terminals.</p> <p>If radiated measurements are performed similar test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. However, the spectrum analyzer may be replaced by a diode detector connected to an oscilloscope.</p> |  |

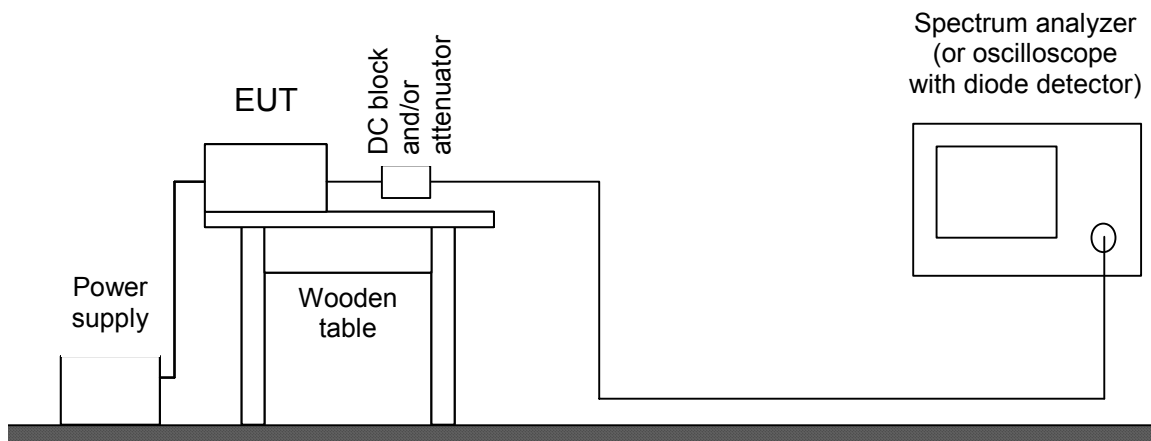

### 6.3 Conducted AC Powerline Emission

| Measurement Procedure:  |   |
|---|---|
| Rules and specifications:   | CFR 47 Part 15, section 15.207<br>IC RSS-GEN Issue 1, section 7.2.2 |
| Guide:  | ANSI C63.4 / CISPR 22   |
| <p>Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:</p> <p>First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average (CFR 47 Part 15) or quasi-peak (IC RSS-210) limit are retested with detector set to quasi-peak.</p> <p>If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.</p> <p>According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.</p> <p>Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.</p> |   |

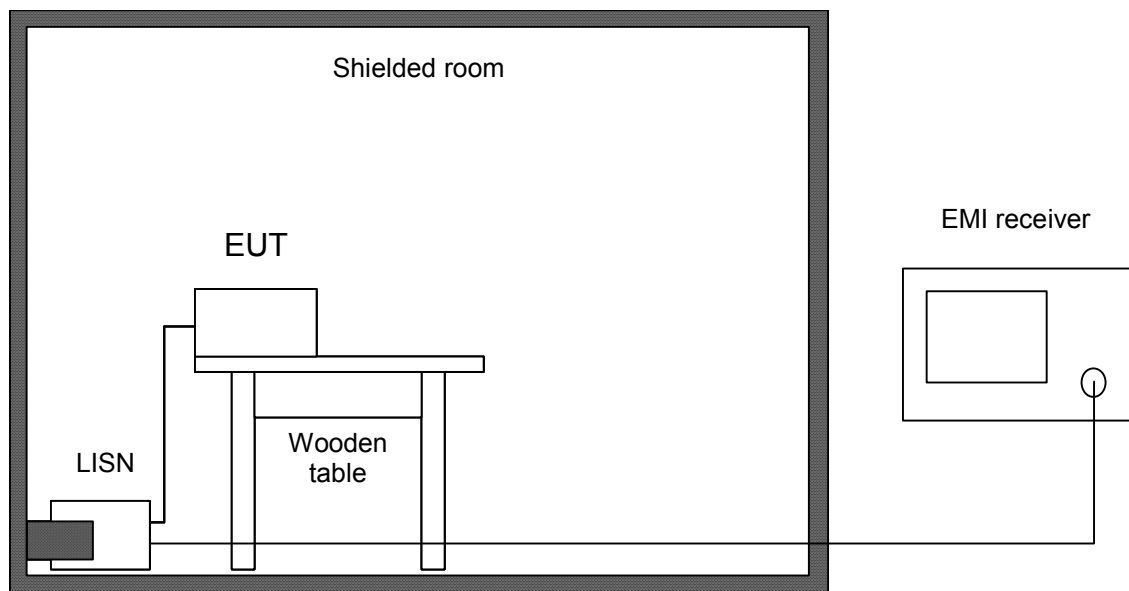


Test instruments used:

| Used                                | Type                     | Model    | Serial No. or ID | Manufacturer       |
|-------------------------------------|--------------------------|----------|------------------|--------------------|
| <input checked="" type="checkbox"/> | EMI receiver             | ESHS 10  | 860043/016       | Rohde & Schwarz    |
| <input checked="" type="checkbox"/> | LISN                     | ESH3-Z5  | 862770/021       | Rohde & Schwarz    |
| <input type="checkbox"/>            | LISN                     | ESH3-Z5  | 830952/025       | Rohde & Schwarz    |
| <input type="checkbox"/>            | Artificial mains network | ESH 2-Z5 | 842966/004       | Rohde & Schwarz    |
| <input checked="" type="checkbox"/> | Shielded room            | No. 1    | 1451             | Albatross Projects |
| <input type="checkbox"/>            | Shielded room            | No. 4    | 3FD-100 544      | Euroshield         |

## 6.4 Radiated Emission Measurement 9 kHz to 30 MHz

| Measurement Procedure:   |  |
|--|--|
| Rules and specifications:  | CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d)<br>IC RSS-210 Issue 6, sections 2.2(b)-(c), 2.7 Table 3 and Annex 2.6 |
| Guide:   | ANSI C63.4   |
| <p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. Due to fixed polarization of the loop antenna, if possible, the EUT is put into a position that gives the maximum levels of emissions.</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> |  |

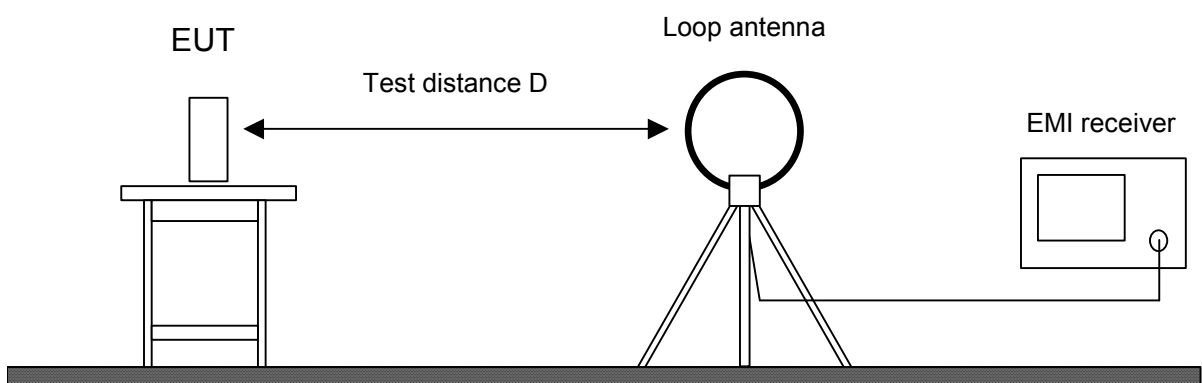


Test instruments used:

| Used                                | Type                 | Model    | Serial No. or ID         | Manufacturer       |
|-------------------------------------|----------------------|----------|--------------------------|--------------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer    | FSP 30   | 100063                   | Rohde & Schwarz    |
| <input type="checkbox"/>            | EMI test receiver    | ESMI     | 839379/013<br>839587/006 | Rohde & Schwarz    |
| <input type="checkbox"/>            | Test receiver        | ESHS 10  | 860043/016               | Rohde & Schwarz    |
| <input checked="" type="checkbox"/> | Test receiver        | ESCI 3   | 10008                    | Rohde & Schwarz    |
| <input type="checkbox"/>            | Preamplifier         | CPA9231A | 3393                     | Schaffner          |
| <input checked="" type="checkbox"/> | Loop antenna         | HFH2-Z2  | 882964/1                 | Rohde & Schwarz    |
| <input checked="" type="checkbox"/> | Fully anechoic room  | No. 2    | 1452                     | Albatross Projects |
| <input type="checkbox"/>            | Semi-anechoic room   | No. 3    | 1453                     | Siemens            |
| <input checked="" type="checkbox"/> | Open field test site | EG 1     | 1450                     | Senton             |

## 6.5 Radiated Emission in Fully or Semi Anechoic Room

| Measurement Procedure:  |   |
|---|---|
| Rules and specifications:   | CFR 47 Part 15, sections 15.205(b) and 15.225(d)<br>IC RSS-210 Issue 6, sections 2.2(b)-(c) and 2.7 Table 2 |
| Guide:  | ANSI C63.4  |
| <p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.</p> |   |

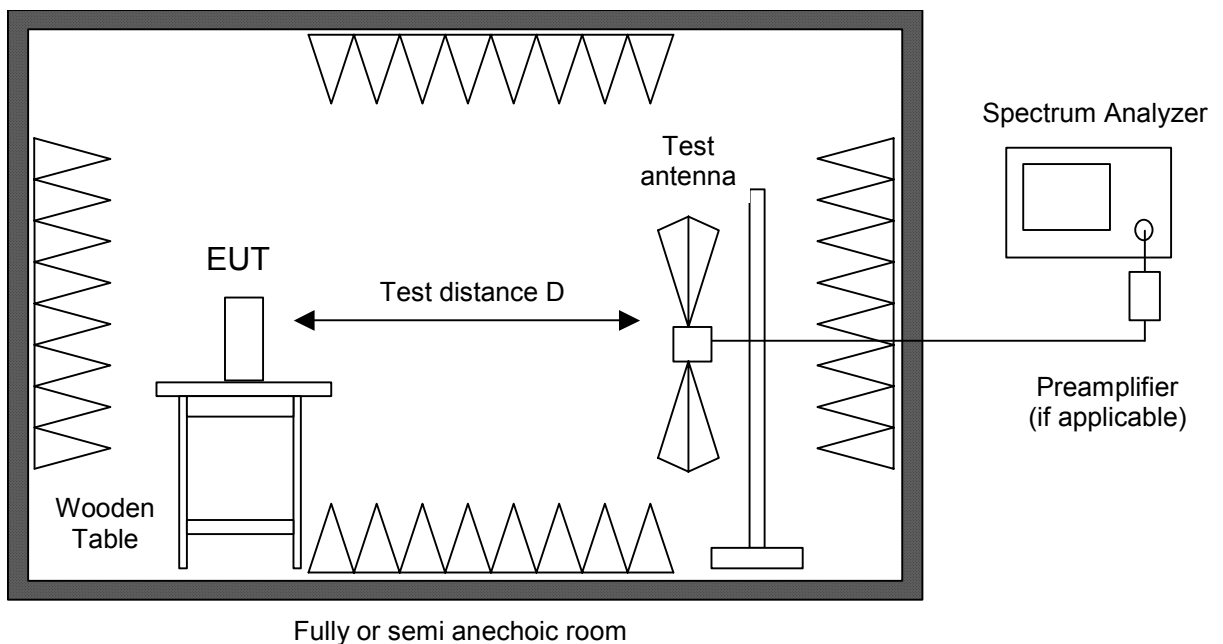


Test instruments used:

| Used                                | Type                     | Model                | Serial No. or ID         | Manufacturer       |
|-------------------------------------|--------------------------|----------------------|--------------------------|--------------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer        | FSP 30               | 100063                   | Rohde & Schwarz    |
| <input type="checkbox"/>            | Spectrum analyzer        | R 3271               | 05050023                 | Advantest          |
| <input type="checkbox"/>            | EMI test receiver        | ESMI                 | 839379/013<br>839587/006 | Rohde & Schwarz    |
| <input checked="" type="checkbox"/> | Preamplifier             | CPA9231A             | 3393                     | Schaffner          |
| <input type="checkbox"/>            | Preamplifier             | R14601               |                          | Advantest          |
| <input type="checkbox"/>            | Preamplifier 1-8 GHz     | AFS3-00100800-32-LN  | 847743                   | Miteq              |
| <input type="checkbox"/>            | Preamplifier 0.5-8 GHz   | AMF-4D-005080-25-13P | 860149                   | Miteq              |
| <input type="checkbox"/>            | Preamplifier 8-18 GHz    | ACO/180-3530         | 32641                    | CTT                |
| <input type="checkbox"/>            | External Mixer           | WM782A               | 845881/005               | Tektronix          |
| <input type="checkbox"/>            | Harmonic Mixer           | FS-Z30               | 843389/007               | Rohde & Schwarz    |
|                                     | Accessories              |                      |                          |                    |
| <input checked="" type="checkbox"/> | Trilog broadband antenna | VULB 9163            | 9163-188                 | Schwarzbeck        |
| <input type="checkbox"/>            | Horn antenna             | 3115                 | 9508-4553                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-03              | 9112-1003                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-04              | 9112-1001                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-05              | 9112-1001                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-06              | 9112-1001                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-07              | 9112-1008                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-08              | 9112-1002                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-09              | 9403-1025                | EMCO               |
| <input type="checkbox"/>            | Horn antenna             | 3160-10              | 399185                   | EMCO               |
| <input checked="" type="checkbox"/> | Fully anechoic room      | No. 2                | 1452                     | Albatross Projects |
| <input type="checkbox"/>            | Semi-anechoic room       | No. 3                | 1453                     | Siemens            |

## 6.6 Radiated Emission at Open Field Test Site

| Measurement Procedure:  |   |
|---|---|
| Rules and specifications:   | CFR 47 Part 15, sections 15.205(b) and 15.225(d)<br>IC RSS-210 Issue 6, sections 2.2(b)-(c) and 2.7 Table 2 |
| Guide:  | ANSI C63.4  |
| <p>Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p> |   |

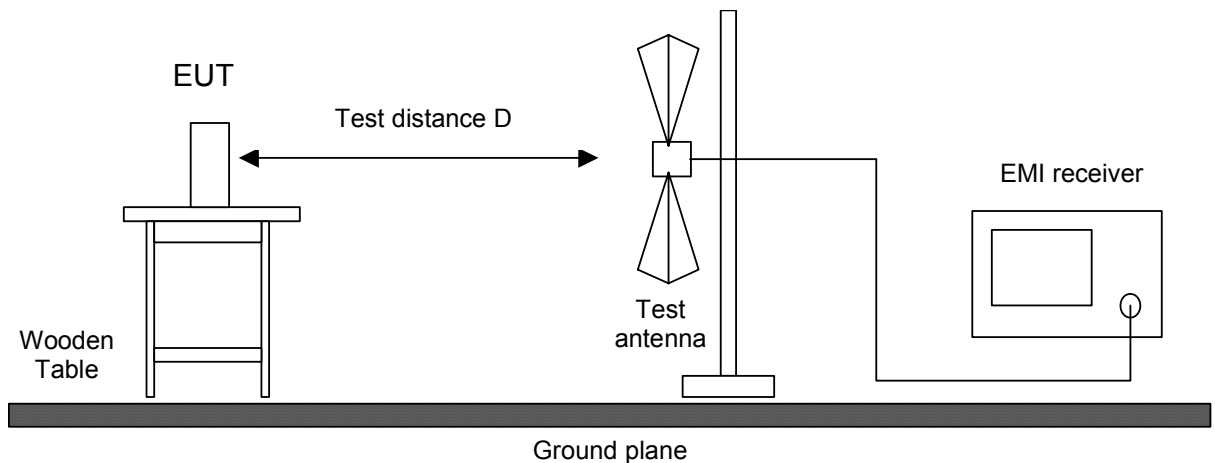


Test instruments used:

| Used                                | Type                 | Model       | Serial No. or ID | Manufacturer    |
|-------------------------------------|----------------------|-------------|------------------|-----------------|
| <input checked="" type="checkbox"/> | EMI receiver         | ESVP        | 881414/009       | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Biconical antenna    | EG 1 HK 116 | 842204/001       | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Log. per. antenna    | EG 1 HL 223 | 841516/023       | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Open field test site | EG 1        | 1450             | Senton          |



## 6.7 Carrier Frequency Stability

| Measurement Procedure:   |   |
|--|---|
| Rules and specifications:  | CFR 47 Part 15, section 15.225(e)<br>IC RSS-GEN Issue 6, sections 4.5 and 7.2.4 |
| Guide:   | ANSI C63.4  |
| <p>The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.</p> <p>If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.</p> <p>For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:</p> <ul style="list-style-type: none"> <li>• the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage</li> <li>• the battery nominal voltage</li> <li>• 85% of the battery nominal voltage</li> <li>• the battery operating end point voltage which shall be specified by the equipment manufacturer</li> </ul> <p>The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.</p> <p>If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.</p> |   |

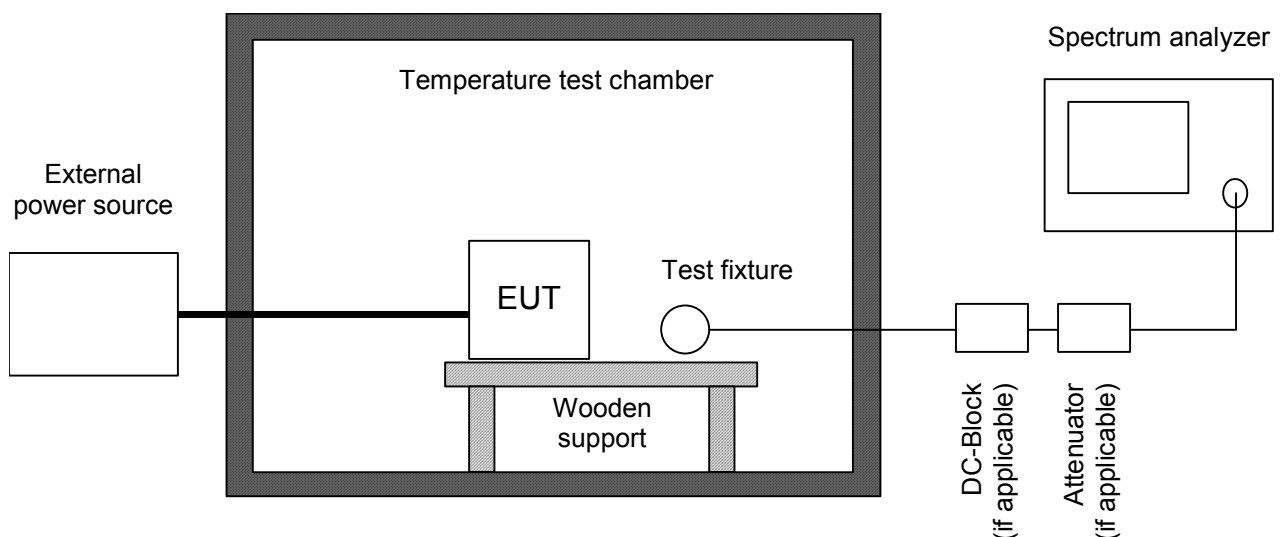

Test instruments used:



| Used                                | Type                     | Model      | Serial No. or ID         | Manufacturer    |
|-------------------------------------|--------------------------|------------|--------------------------|-----------------|
| <input type="checkbox"/>            | Spectrum Analyzer        | FSP 30     | 100063                   | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | EMI test receiver        | ESPI7      | 836914/0002              | Rohde & Schwarz |
| <input type="checkbox"/>            | EMI test receiver        | ESMI       | 839379/013<br>839587/006 | Rohde & Schwarz |
| <input type="checkbox"/>            | DC-block                 | 7006       | A2798                    | Weinschel       |
| <input type="checkbox"/>            | Attenuator               | 4776-10    | 9412                     | Narda           |
| <input type="checkbox"/>            | Attenuator               | 4776-20    | 9503                     | Narda           |
| <input checked="" type="checkbox"/> | Test probe               | TP01       | 001                      | Senton          |
| <input checked="" type="checkbox"/> | DC power supply          | NGSM 32/10 | 203                      | Rohde & Schwarz |
| <input type="checkbox"/>            | Isolating transformer    | RT 5A      | 10387                    | Grundig         |
| <input type="checkbox"/>            | Isolating transformer    | RT 5A      | 10416                    | Grundig         |
| <input checked="" type="checkbox"/> | Temperature test chamber | HT4010     | 07065550                 | Heraeus         |

## **7 Photographs Taken During Testing**

**Test setup for conducted DC powerline emission measurement**




**Test setup for radiated emission measurement 9 kHz – 30 MHz**

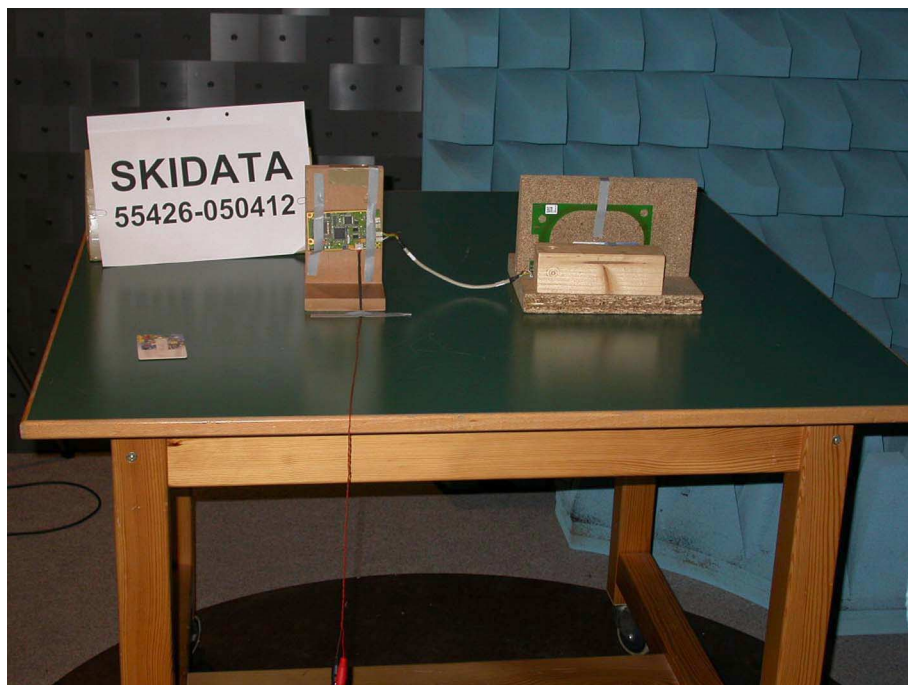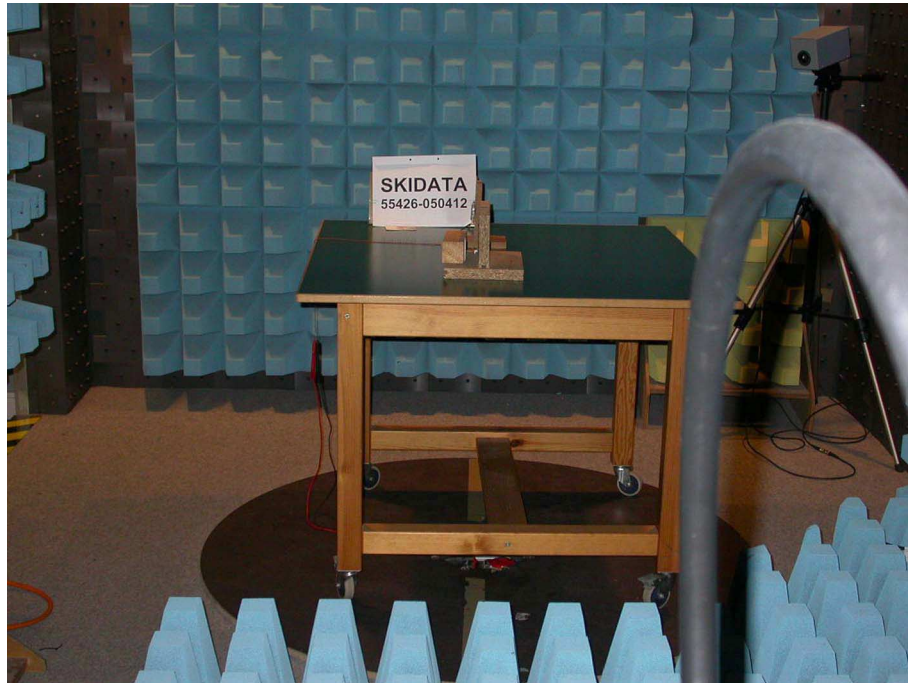




**Test setup for radiated emission measurement 9 kHz – 30 MHz  
- continued -**

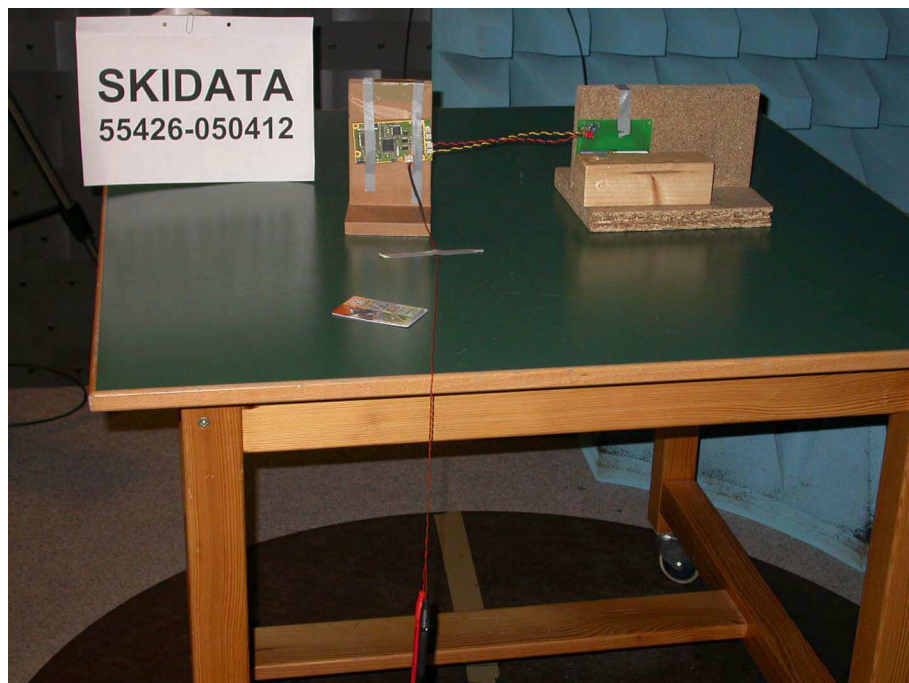


**Test setup for radiated emission measurement 9 kHz – 30 MHz  
- continued -**

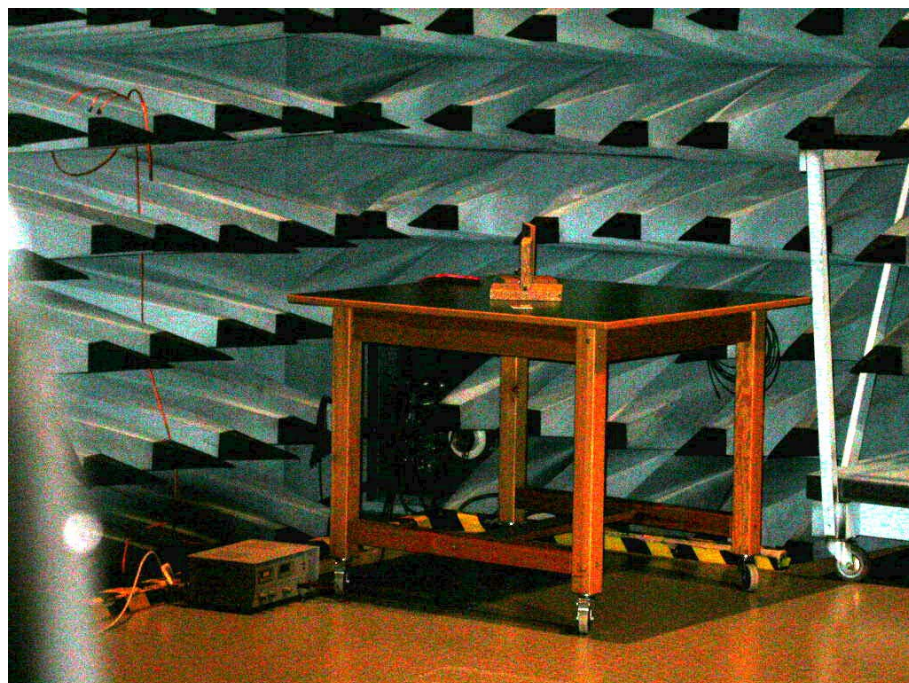

Setup for measurement for Restricted Bands Requirement




**Test setup for radiated emission measurement  
(fully anechoic room)**

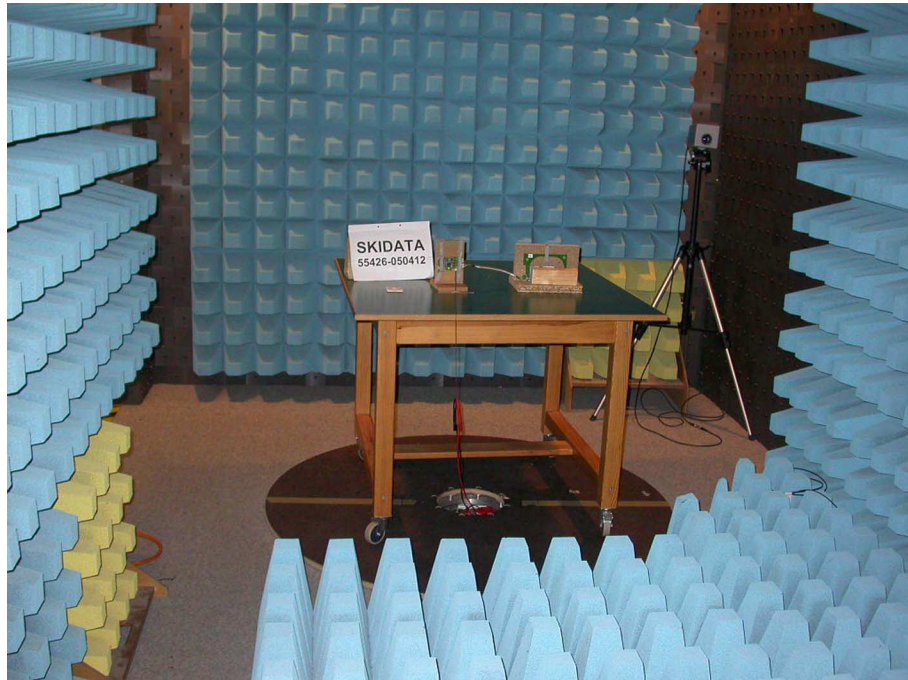



**Test setup for radiated emission measurement  
(fully anechoic room) - continued -**

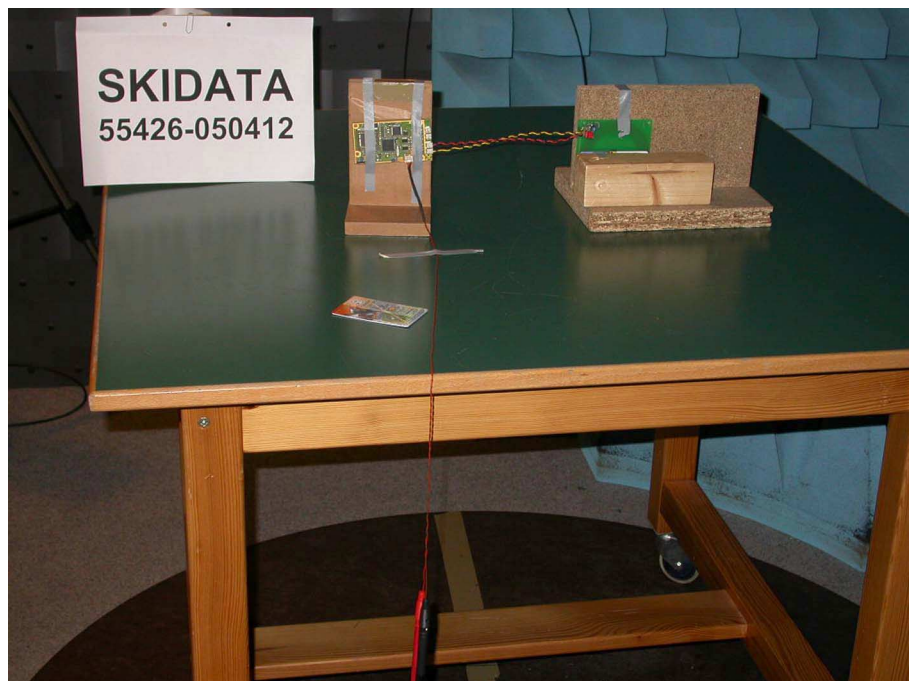

**Test setup for radiated emission measurement  
(fully anechoic room) - continued -**



**Test setup for radiated emission measurement  
(open field test site)**





**Test setup for radiated emission measurement  
(open field test site) - continued -**



**Test setup for radiated emission measurement  
(open field test site) - continued -**





**Test setup for radiated emission measurement  
(open field test site) - continued -**



## 8 Test Results

| FCC CFR 47 Parts 2 and 15            |   |             |                |
|--------------------------------------|---|-------------|----------------|
| <i>Section(s)</i>                    | <i>Test</i>   | <i>Page</i> | <i>Result</i>  |
| 2.1046(a)                            | Conducted output power  | ---         | Not applicable |
| 2.202(a)                             | Occupied bandwidth  | 33          | Recorded       |
| 15.215(c)                            | Bandwidth of the emission   | 38          | Test passed    |
| 2.201, 2.202                         | Class of emission   | 43          | Calculated     |
| 15.35(c)                             | Pulse train measurement for pulsed operation                      | 44          | Recorded       |
| 15.205(a)<br>15.205(d)(7)            | Restricted bands of operation                                     | 47          | Test passed    |
| 15.207                               | Conducted AC powerline emission<br>150 kHz to 30 MHz <sup>6</sup> | 48          | Test passed    |
| 15.225(a)-(d)                        | Spectrum Mask   | 49          | Test passed    |
| 15.205<br>15.215(b)<br>15.225(a)-(d) | Radiated emission<br>9 kHz to 30 MHz                              | 51          | Test passed    |
| 15.205(b)<br>15.225(d)               | Radiated emission<br>30 MHz to 1 GHz                              | 56          | Test passed    |
| 15.225(e)                            | Carrier frequency stability                                       | 59          | Test passed    |

<sup>6</sup> Performed as “Conducted DC powerline emissions”

**IC RSS-GEN Issue 1**

| <i>Section(s)</i> | <i>Test</i>   | <i>Page</i> | <i>Result</i>  |
|-------------------|---|-------------|----------------|
| 7.2.3.1           | Antenna conducted output power  | ---         | Not applicable |
| 4.4.1             | Occupied bandwidth  | 38          | Recorded       |
| 3.2               | Designation of emissions  | 43          | Calculated     |
| 4.3               | Pulsed operation  | 44          | Recorded       |
| 7.2.2             | Transmitter AC wireline conducted emissions<br>150 kHz to 30 MHz <sup>7</sup> | 48          | Test passed    |
| 4.5<br>7.2.4      | Carrier frequency stability   | 59          | Test passed    |
| 5.5               | Exposure of Humans to RF fields   | 62          | Calculated     |

**IC RSS-210 Issue 6**

| <i>Section(s)</i>                      | <i>Test</i>  | <i>Page</i>     | <i>Result</i> |
|--|--|-----------------|---------------|
| Annex 2.6<br>2.2(a)<br>2.7 Table 1     | Restricted bands and unwanted emission frequencies | 47 <sup>8</sup> | Test passed   |
| Annex 2.6                              | Spectrum Mask                                      | 49              | Test passed   |
| Annex 2.6<br>2.2(b)-(c)<br>2.7 Table 3 | Field strength of emissions<br>9 kHz to 30 MHz     | 51              | Test passed   |
| 2.2(b)-(c)<br>2.7 Table 2              | Field strength of emissions<br>30 MHz to 1 GHz     | 56              | Test passed   |

<sup>7</sup> Performed as "Conducted DC powerline emissions"

<sup>8</sup> See "Spectrum Mask" and "Field strength of emissions".




## 8.1 Occupied Bandwidth

|  |  |                              |
|--|--|------------------------------|
| Rules and specifications:  | CFR 47 Part 2, section 2.202(a)<br>IC RSS-210 Issue 6, section 4.4.1<br>ANSI C63.4, annex H.6  |                              |
| Guide:   | ANSI C63.4   |                              |
| Description:   | <p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p> |                              |
|  | Fundamental frequency  | Minimum resolution bandwidth |
|  | 9 kHz to 30 MHz  | 1 kHz                        |
|  | 30 MHz to 1000 MHz   | 10 kHz                       |
|  | 1000 MHz to 40 GHz   | 100 kHz                      |
| The video bandwidth shall be at least three times greater than the resolution bandwidth. |  |                              |
| Measurement procedure:   | Bandwidth Measurements (6.1)   |                              |

|               |                                  |
|---------------|----------------------------------|
| Comment:      | For Carrier Frequency: 122 kHz   |
| Date of test: | 20 September 2005                |
| Test site:    | Fully anechoic room, cabin no. 2 |

### Occupied Bandwidth (99 %):

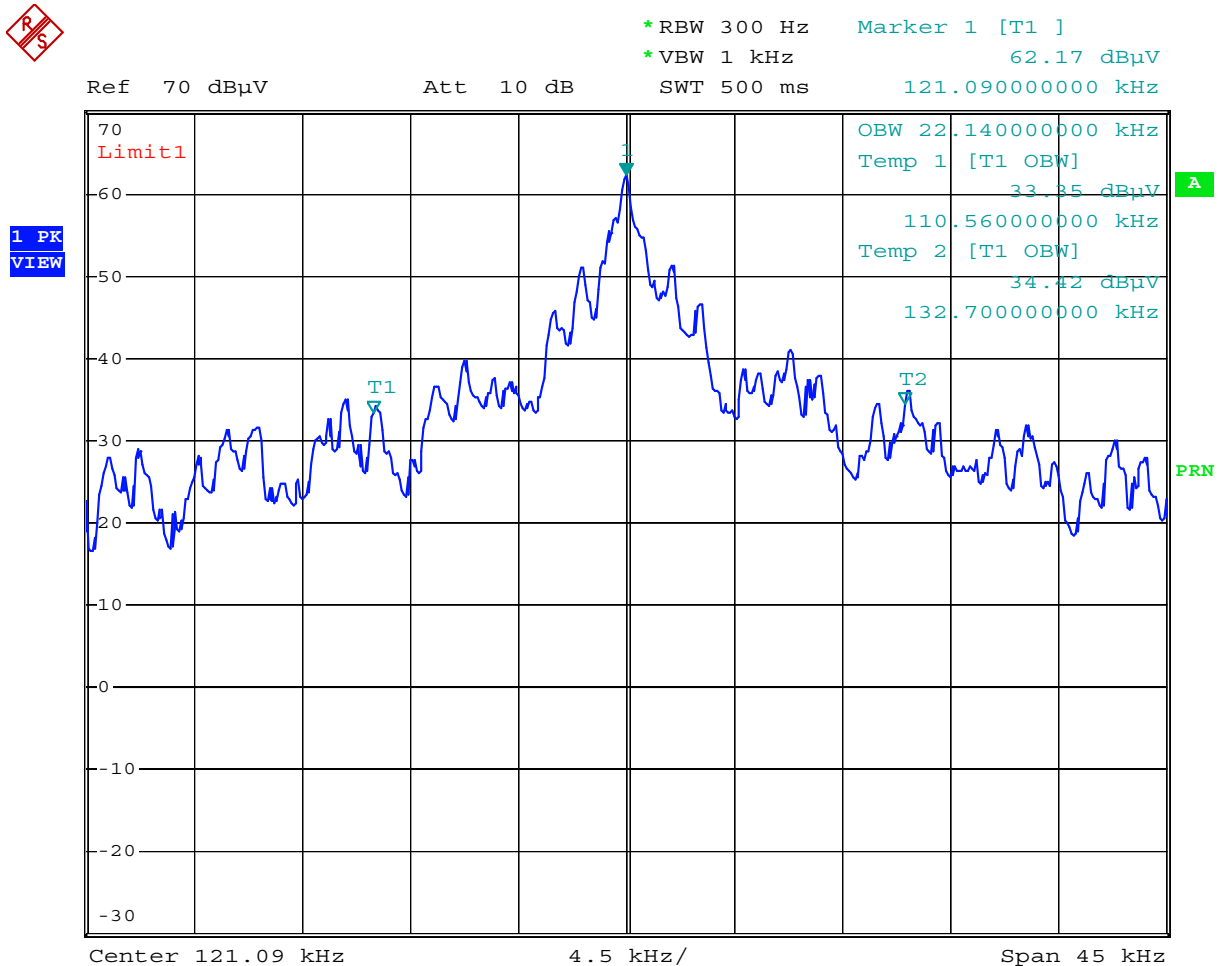


Comment: Skidata 050412: Occupied Bandwidth  
Date: 20.SEP.2005 14:44:11

|                            |                  |
|----------------------------|------------------|
| Occupied Bandwidth (99 %): | <b>22.14 kHz</b> |
|----------------------------|------------------|

**Occupied Bandwidth (-26 dB):**



\*RBW 300 Hz    Marker 3 [T1 ]  
 \*VBW 1 kHz                    35.40 dBμV  
 Ref 70 dBμV                    Att 10 dB                    SWT 500 ms                    132.970000000 kHz

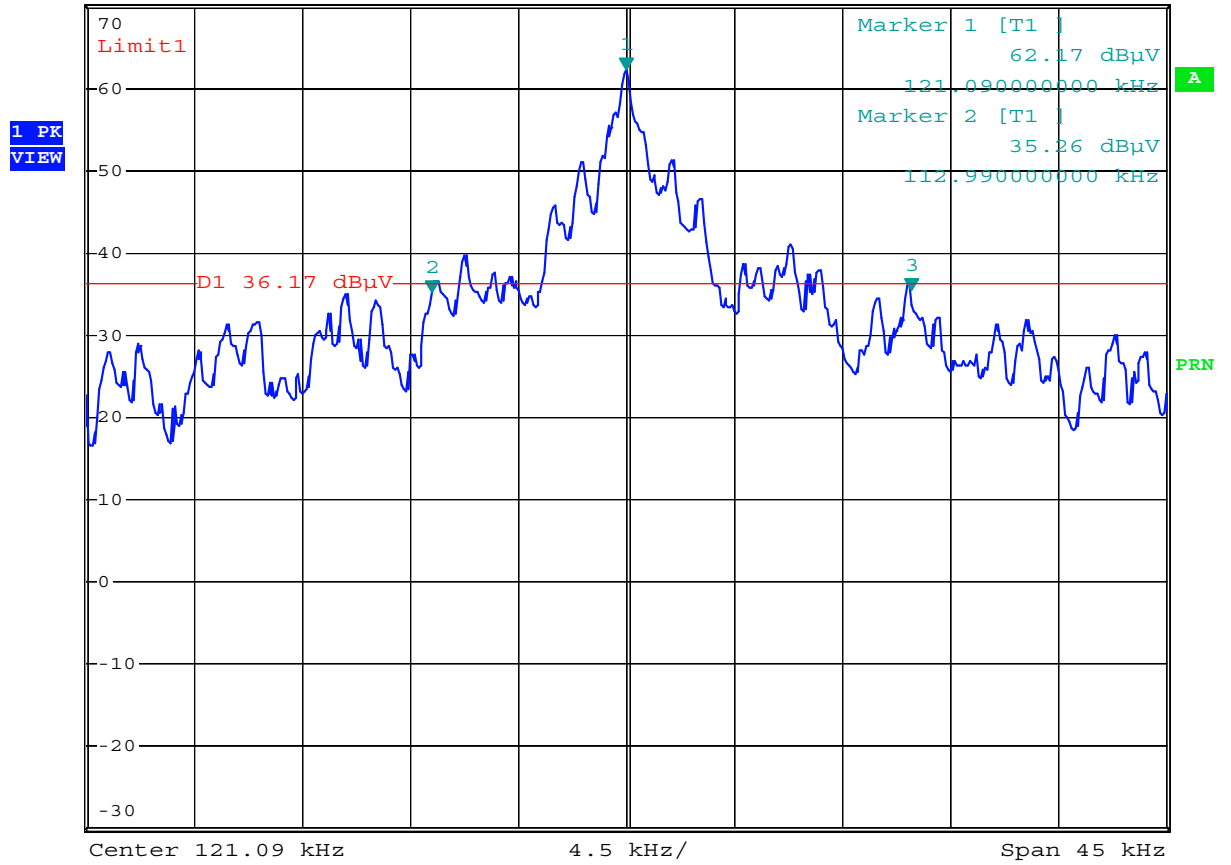


Comment: Skidata 050412: Occupied Bandwidth  
 Date: 20.SEP.2005 14:43:43

**Occupied Bandwidth (-26 dB): 19.98 kHz**

|               |                                  |
|---------------|----------------------------------|
| Comment:      | For Carrier Frequency: 13.56 MHz |
| Date of test: | 20 September 2005                |
| Test site:    | Fully anechoic room, cabin no. 2 |

### Occupied Bandwidth (99 %):

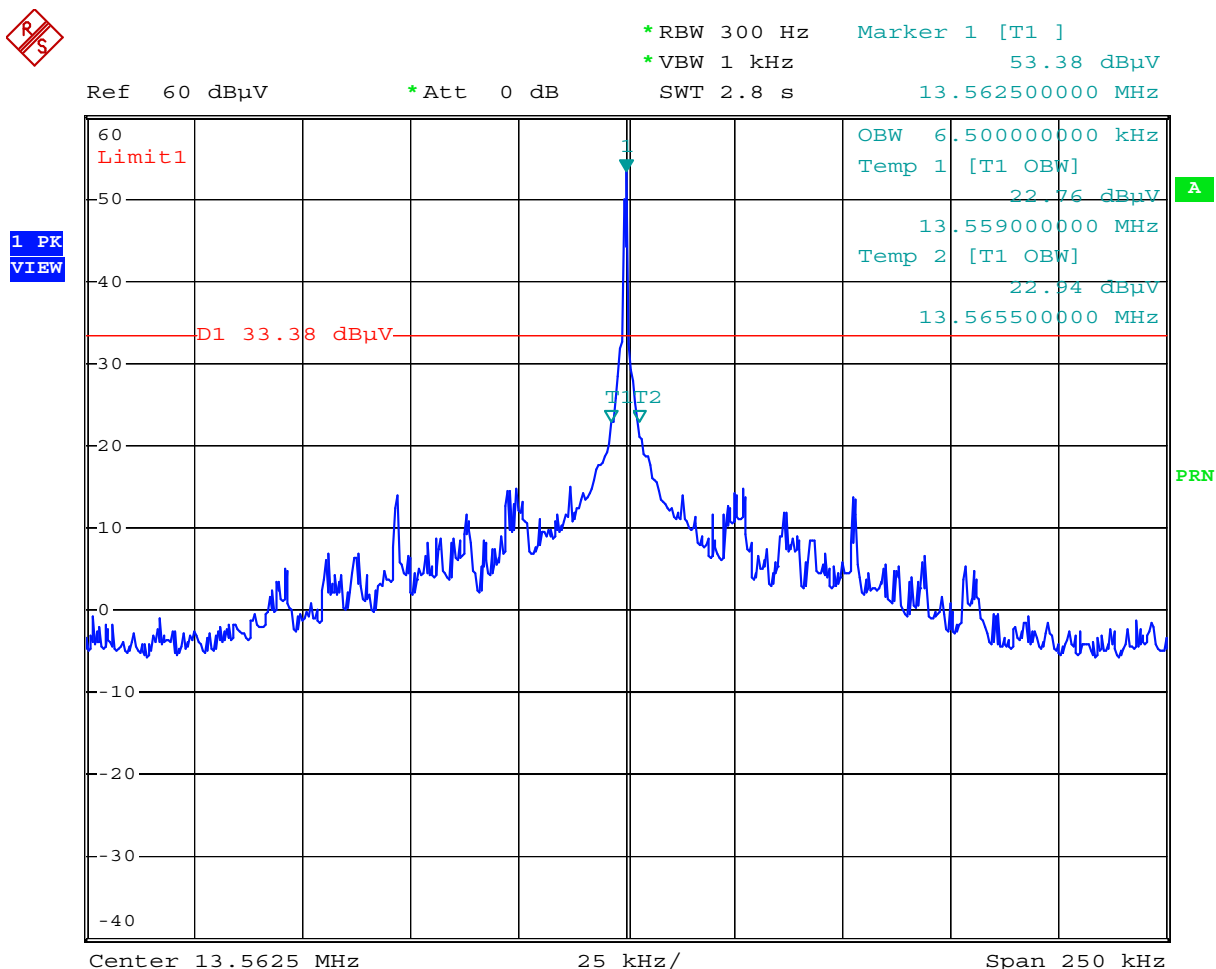


Comment: Skidata 050412: Occupied Bandwidth  
Date: 20.SEP.2005 13:54:00

Occupied Bandwidth (99 %): **6.5 kHz**

**Occupied Bandwidth (-26 dB):**



\*RBW 1 kHz      Marker 3 [T1 ]  
 \*VBW 10 kHz      23.06 dBµV  
 Ref 60 dBµV      \*Att 0 dB      SWT 250 ms      13.567500000 MHz

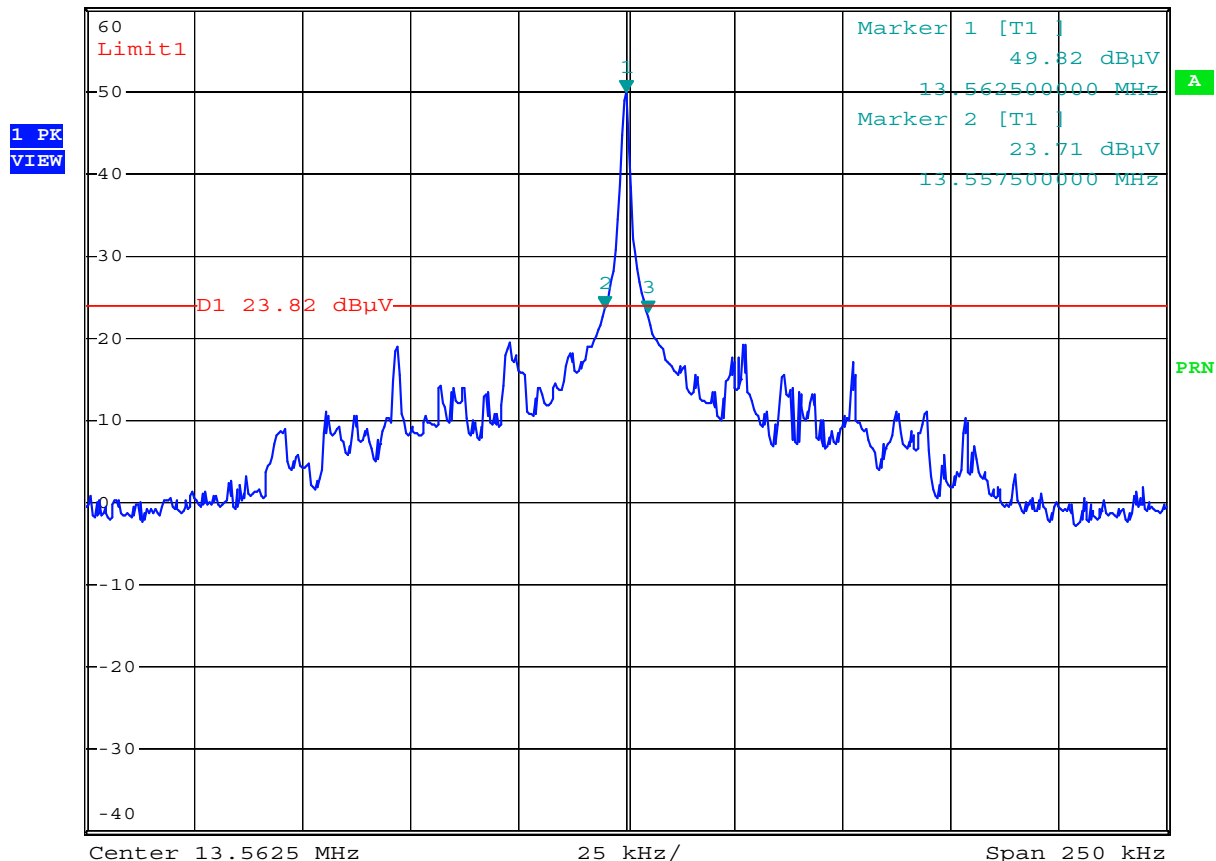

Comment: Skidata 050412: Occupied Bandwidth  
 Date: 20.SEP.2005 14:01:39


Occupied Bandwidth (-26 dB): **10.0 kHz**

## 8.2 Emission Bandwidth

|                           |  |
|---------------------------|--|
| Rules and specifications: | CFR 47 Part 15, section 15.215(c)  |
| Guide:                    | ANSI C63.4   |
| Description:              | The 20 dB bandwidth is measured at the points when the spectral density of the signal is 20 dB down from the inband spectral density of the modulated signal, with the transmitter modulated by a representative signal. Spectral density (power per unit bandwidth) is measured with a spectrum analyzer with resolution bandwidth set to 300 Hz or alternatively equal to approximately 1.0% of the emission bandwidth. The video bandwidth shall be at least three times greater than the resolution bandwidth. |
| Measurement procedure:    | Bandwidth Measurements (6.1)   |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |                                  |
|---------------|----------------------------------|
| Comment:      | For Carrier Frequency: 122 kHz   |
| Date of test: | 20 September 2005                |
| Test site:    | Fully anechoic room, cabin no. 2 |

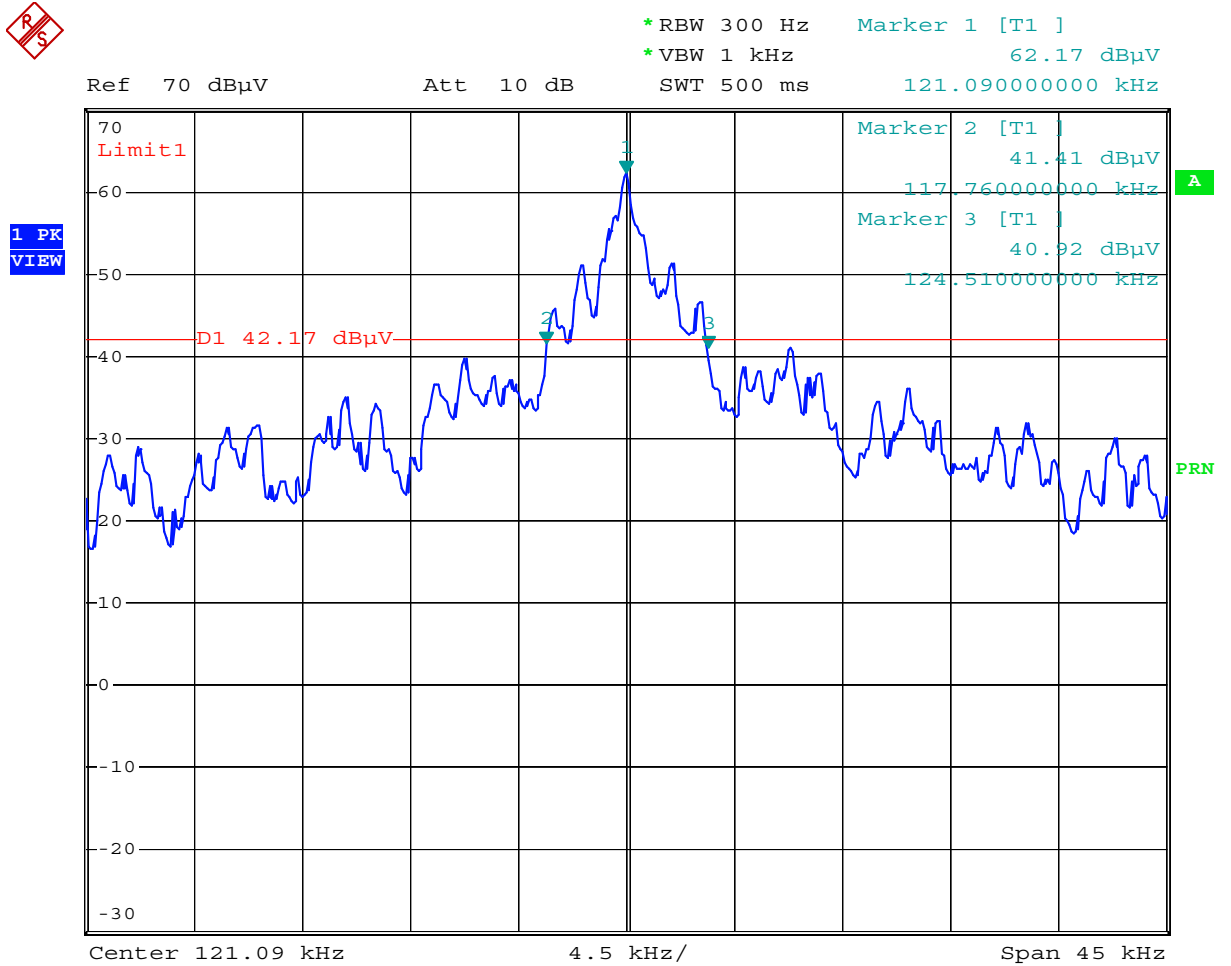

Comment: Skidata 050412: Emission Bandwidth  
 Date: 20.SEP.2005 14:42:33


|                                  |   |   |
|----------------------------------|---|---|
| Permitted frequency band:        | <b>119 – 127 kHz</b>                      |   |
| Emission frequency range:        | <b>119 – 127 kHz</b>                      |   |
| Emission bandwidth:              | <b>6.75 kHz</b>                           |   |
| Carrier frequency stability:     | <input type="checkbox"/> <b>specified</b> | <input checked="" type="checkbox"/> <b>not specified</b>                          |
| Maximum frequency tolerances:    | <b>+..... kHz</b><br><b>- ..... kHz</b>   |   |
| Frequency range of the emission: |   | <b>within permitted frequency band<sup>9</sup>:</b>                               |
| Bandwidth of the emission:       | <b>..... kHz</b>                          | <input checked="" type="checkbox"/> <b>yes</b> <input type="checkbox"/> <b>no</b> |

|              |                    |
|--------------|--------------------|
| Test Result: | <b>Test passed</b> |
|--------------|--------------------|

<sup>9</sup> If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.



|               |                                  |
|---------------|----------------------------------|
| Comment:      | For Carrier Frequency: 13.56 MHz |
| Date of test: | 20 September 2005                |
| Test site:    | Fully anechoic room, cabin no. 2 |

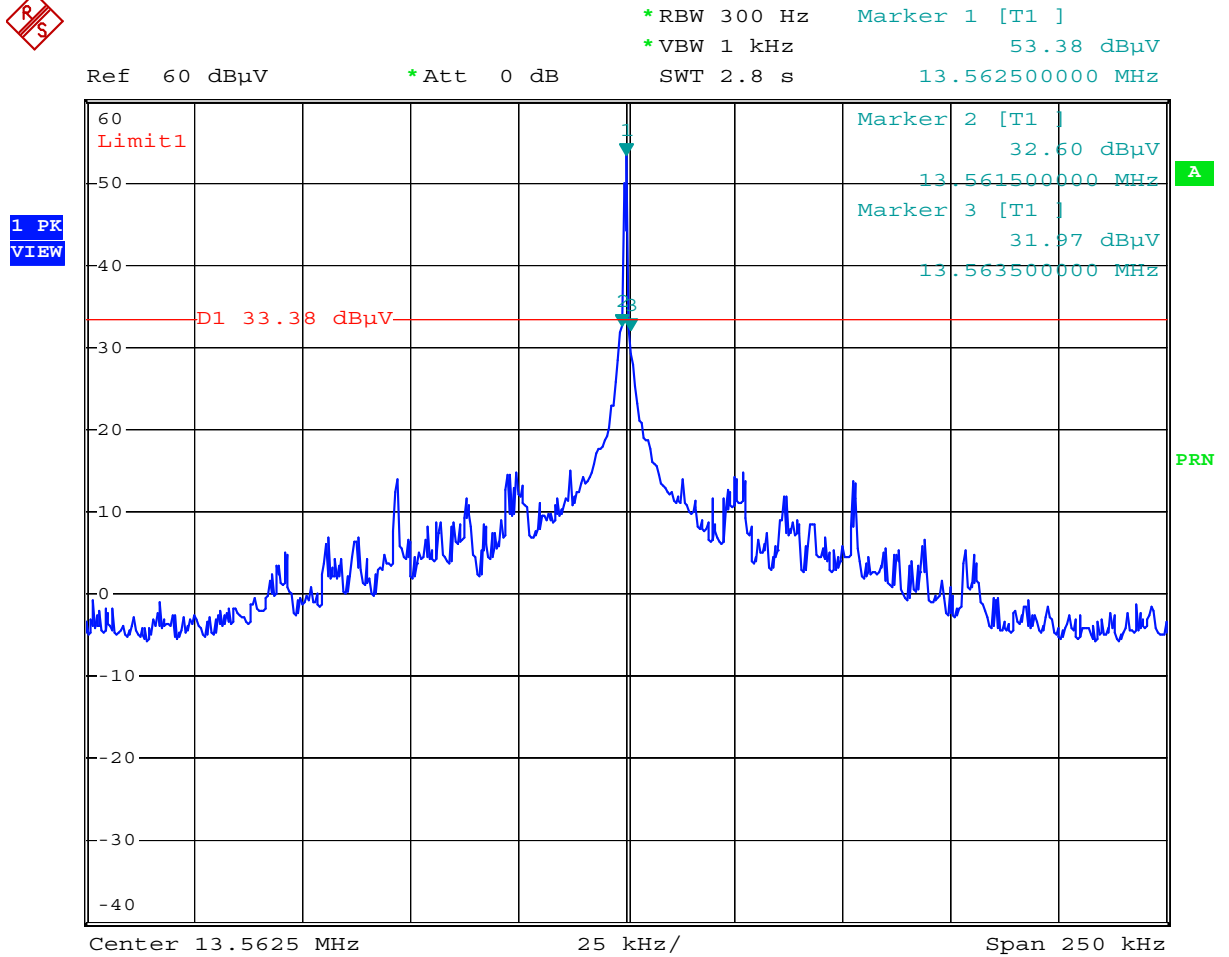

Comment: Skidata 050412: Emission Bandwidth  
 Date: 20.SEP.2005 13:53:16

|                                  |  |  |
|----------------------------------|--|--|
| Permitted frequency band:        | <b>13.553 – 13.567 MHz</b>                           |  |
| Emission frequency range:        | <b>13.5615 – 13.5635 MHz</b>                         |  |
| Emission bandwidth:              | <b>2.0 kHz</b>                                       |  |
| Carrier frequency stability:     | <input checked="" type="checkbox"/> <b>specified</b> | <input type="checkbox"/> <b>not specified</b>                          |
| Maximum frequency tolerances:    | <b>+0.021 kHz</b><br><b>- 0.096 kHz</b>              |  |
| Frequency range of the emission: | <b>13.55923 – 13.56344 MHz</b>                       | <b>within permitted frequency band<sup>10</sup>:</b>                   |
| Bandwidth of the emission:       | <b>4.2 kHz</b>                                       | <input type="checkbox"/> <b>yes</b> <input type="checkbox"/> <b>no</b> |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

<sup>10</sup> If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 8.3 Designation of Emissions

|                           |  |
|---------------------------|--|
| Rules and specifications: | CFR 47 Part 2, sections 2.201 and 2.202<br>IC RSS-GEN Issue 1, section 3.2 |
| Guide:                    | ANSI C63.4 / TRC-43  |

|                     |                      |
|---------------------|----------------------|
| Type of modulation: | Amplitude Modulation |
|---------------------|----------------------|

|                                |  |
|--------------------------------|--|
| $B_n$ = Necessary Bandwidth    | $B_n = 2BK$  |
| $B$ = Modulation rate          | $B = 5 \text{ kHz}$                                      |
| $K$ = Overall numerical factor | $K = 1$  |
| Calculation:                   | $B_n = 2 \cdot (5 \text{ kHz}) \cdot 1 = 10 \text{ kHz}$ |


|                           |                |
|---------------------------|----------------|
| Designation of Emissions: | <b>10K0A1D</b> |
|---------------------------|----------------|

## 8.4 Pulse Train Measurement

|                           |   |
|---------------------------|---|
| Rules and specifications: | CFR 47 Part 15, section 15.35(c)<br>IC RSS-GEN Issue 1, section 4.3 |
| Guide:                    | ANSI C63.4  |
| Measurement procedure:    | Pulse Train Measurement (6.2)                                       |


|               |   |
|---------------|---|
| Comment:      | Transmitting continuously without TAG (122 kHz) |
| Date of test: | 22 September 2005                               |
| Test site:    | Fully anechoic room, cabin no. 2                |

### Total Pulse Train:

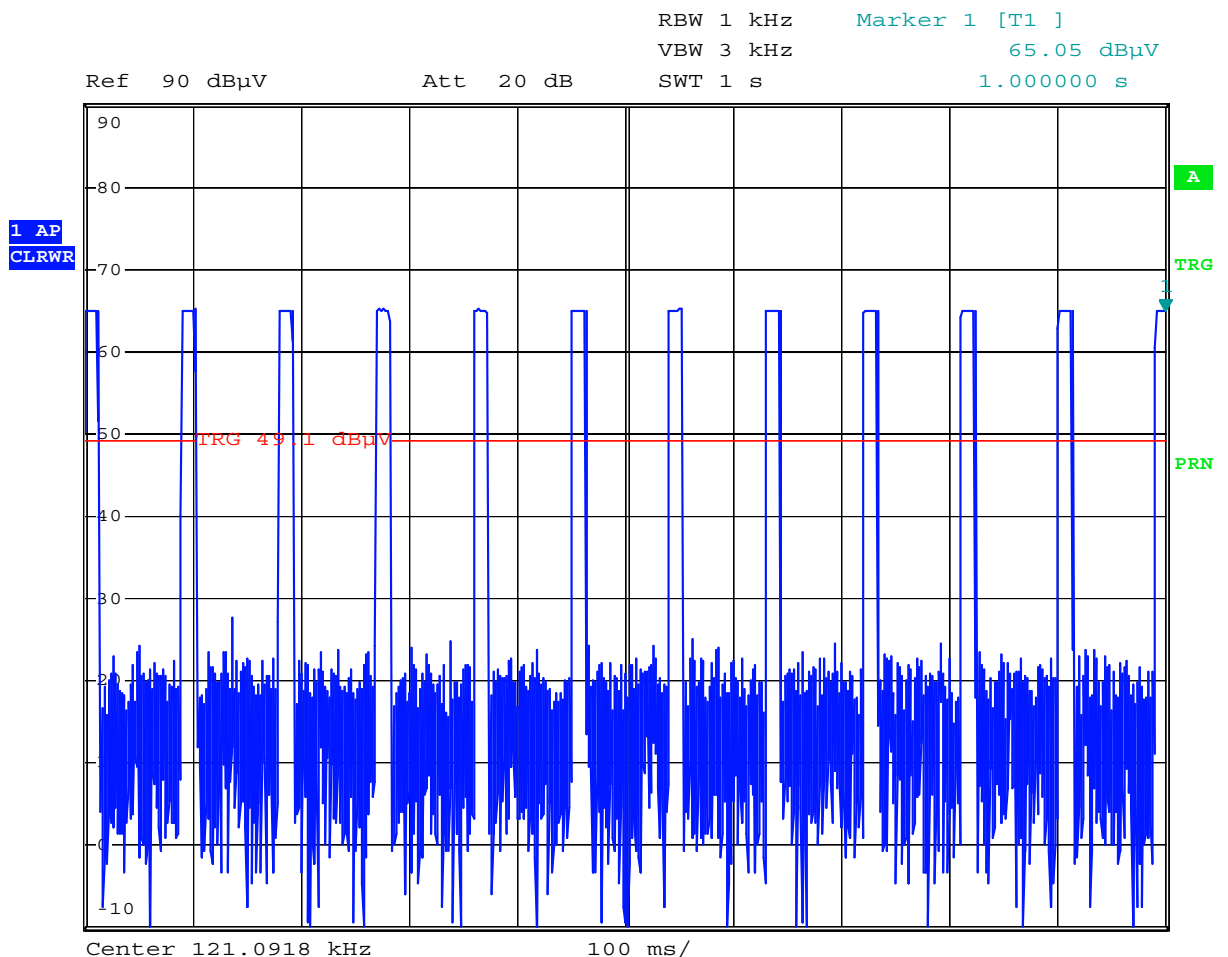

Comment: skidata 050412: Duty Cycle without TAG  
 Date: 22.SEP.2005 13:46:32

**Worst case 0.1 second interval:**

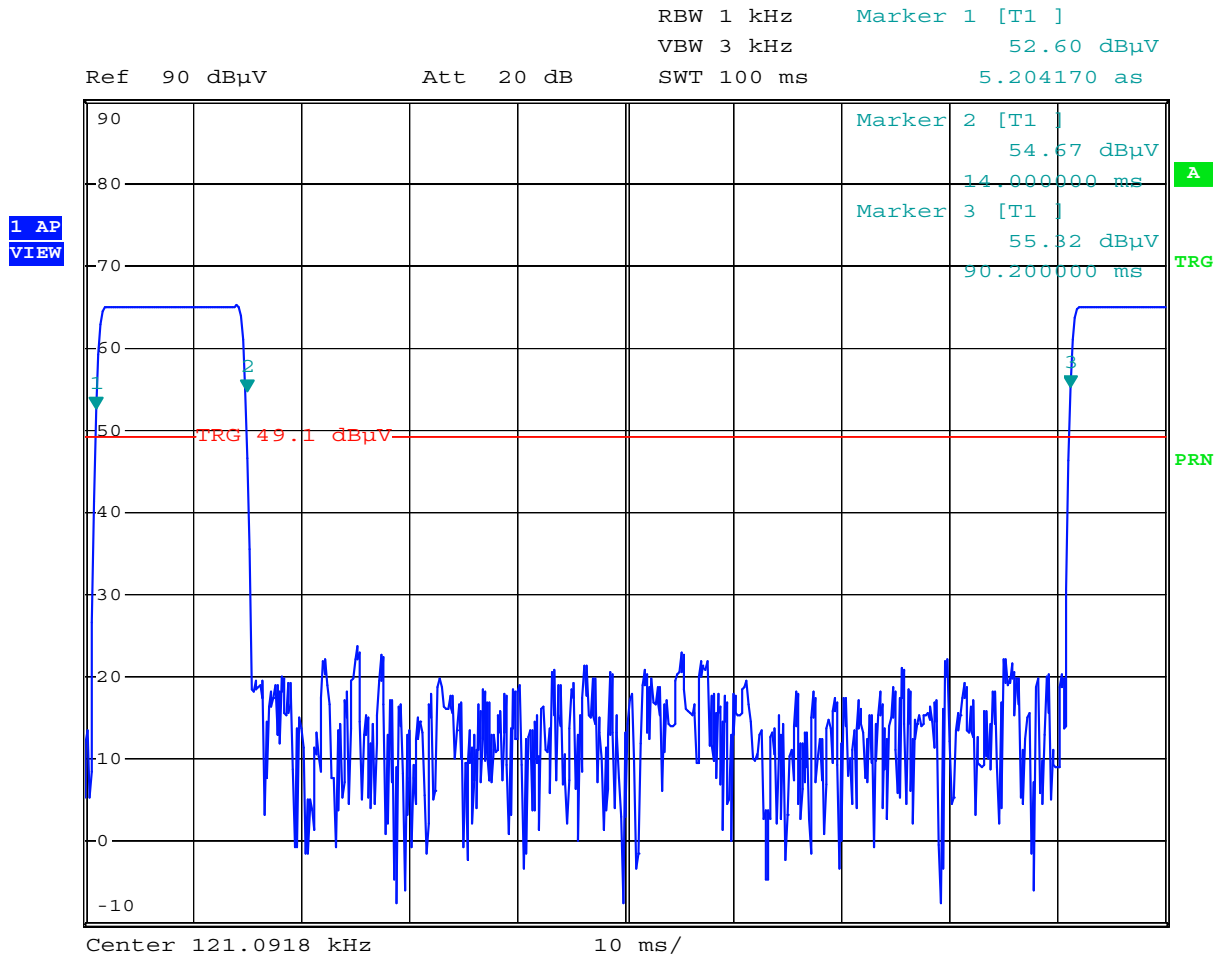


Comment: skidata 050412: Duty Cycle without TAG  
 Date: 22.SEP.2005 13:48:11

**Calculation of pulse train correction:**

|                          |              |   |   |
|--------------------------|--------------|---|---|
| TX-On-Time (worst case): | $T_{on}$     | = | 13.99 ms                                      |
| Pulse Train Time:        | $T_{pt}$     | = | 90.19 ms                                      |
| Period Time:             | $T_{period}$ | = | 90.19 ms                                      |
| Pulse Train Correction:  | $C_{pt}$     | = | $20 \cdot \text{Log}(T_{on} / T_{period})$ dB |
|                          |              | = | <b>-16.18 dB</b>                              |

|               |                                    |
|---------------|------------------------------------|
| Comment:      | Reading TAG continuously (122 kHz) |
| Date of test: | 22 September 2005                  |
| Test site:    | Fully anechoic room, cabin no. 2   |

**Total Pulse Train:**

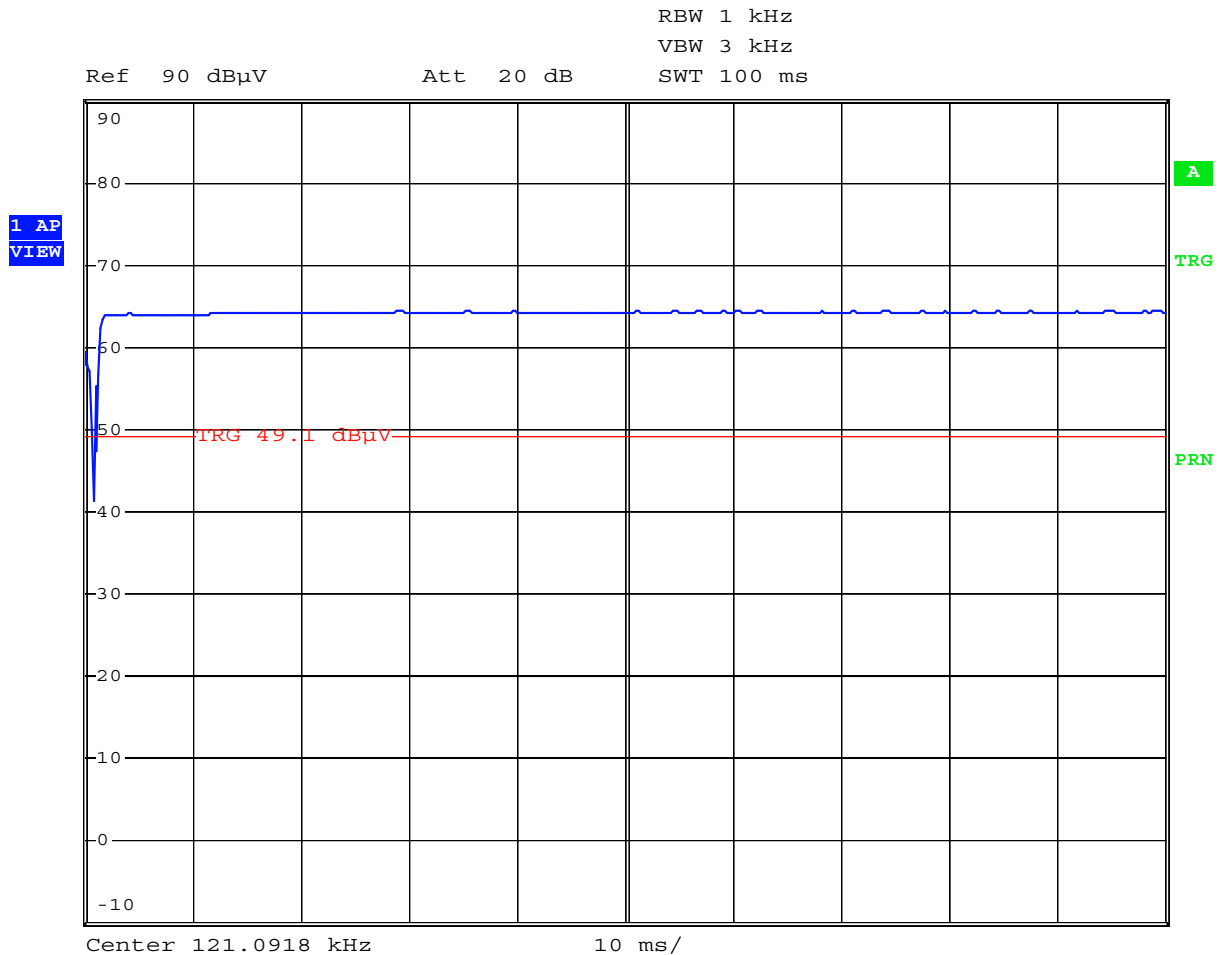

Comment: skidata 050412: Duty Cycle with TAG  
 Date: 22.SEP.2005 13:49:00

**Calculation of pulse train correction:**

|                          |              |   |   |
|--------------------------|--------------|---|---|
| TX-On-Time (worst case): | $T_{on}$     | = | 100 ms  |
| Pulse Train Time:        | $T_{pt}$     | = | 100 ms  |
| Period Time:             | $T_{period}$ | = | 100 ms  |
| Pulse Train Correction:  | $C_{pt}$     | = | $20 \cdot \text{Log}(T_{on} / T_{period})$ dB |
|                          |              | = | <b>0 dB</b>                                   |




## 8.5 Restricted Bands of Operation

|                           |  |
|---------------------------|--|
| Rules and specifications: | CFR 47 Part 15, sections 15.205(a), 15.205(d)(7)<br>IC RSS-210 Issue 6, sections 2.2(a), 2.7 Table 1, Annex 2.6  |
| Guide:                    | ANSI C63.4   |
| Limit:                    | Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 6, section 2.2(a). |
| Measurement procedure:    | Radiated Emission Measurement 9 kHz to 30 MHz (6.4)  |

|                |   |
|----------------|---|
| Comment:       | Antenna: sd611 (worst case)<br>Reading TAG continuously (122 kHz) |
| Date of test:  | 22 September 2005   |
| Test site:     | Fully anechoic room, cabin no. 3                                  |
| Test distance: | 8.5 meters  |

Ref. Level 47 dBuV  
5 dB/Div.

ATT 10 dB

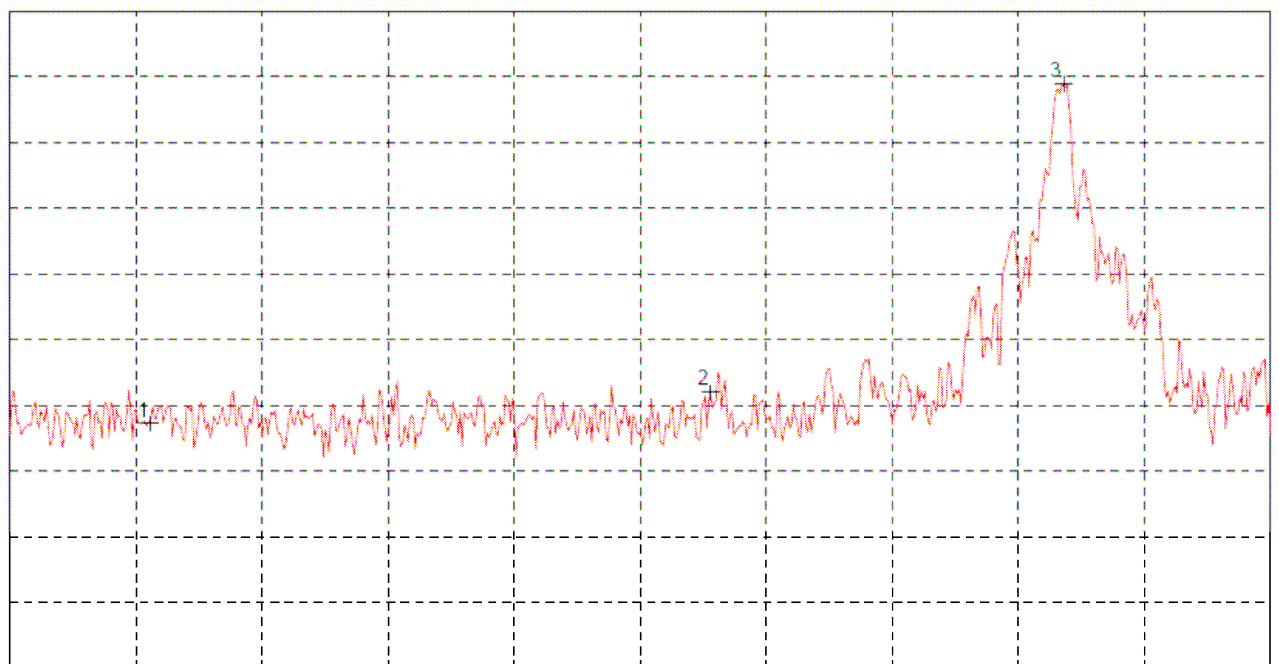

Start 85.000 kHz  
RBW 300 Hz

VBW 1 kHz

Stop 130.000 kHz  
SWP 1 s

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

## 8.6 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

|                           |   |                        |          |
|---------------------------|---|------------------------|----------|
| Rules and specifications: | CFR 47 Part 15, section 15.207<br>IC RSS-GEN Issue 1, section 7.2.2 |                        |          |
| Guide:                    | ANSI C63.4 / CISPR 22   |                        |          |
| Limit:                    | Frequency of Emission (MHz)   | Conducted Limit (dBµV) |          |
|                           |   | Quasi-peak             | Average  |
|                           | 0.15 - 0.5  | 66 to 56               | 56 to 46 |
|                           | 0.5 - 5<br>5 - 30   | 56<br>60               | 46<br>50 |
| Measurement procedure:    | Conducted AC Powerline Emission (6.3)                               |                        |          |

|               |  |
|---------------|--|
| Comment:      | Performed on DC 5 V supply of EUT<br>With 50 Ω termination of antenna connectors |
| Date of test: | 20 September 2005  |
| Test site:    | Shielded room, cabin no. 1   |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|            |      |
|------------|------|
| Tested on: | plus |
|------------|------|

| Frequency (MHz) | Detector   | Reading Value (dBµV) | Correction Factor (dB) | Final Value (dBµV) | Limit (dBµV) | Margin (dB) |
|-----------------|------------|----------------------|------------------------|--------------------|--------------|-------------|
| 13.560          | Quasi-Peak | 50.5                 | 0.0                    | 50.5               | 60.0         | 9.5         |
| 13.560          | Average    | 47.2                 | 0.0                    | 47.2               | 50.0         | <b>2.8</b>  |

|            |       |
|------------|-------|
| Tested on: | minus |
|------------|-------|

| Frequency (MHz) | Detector   | Reading Value (dBµV) | Correction Factor (dB) | Final Value (dBµV) | Limit (dBµV) | Margin (dB) |
|-----------------|------------|----------------------|------------------------|--------------------|--------------|-------------|
| 13.560          | Quasi-Peak | 46.8                 | 0.0                    | 46.8               | 60.0         | 13.2        |
| 13.560          | Average    | 42.1                 | 0.0                    | 42.1               | 50.0         | <b>7.9</b>  |

### Sample calculation of final values:



$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$

## 8.7 Spectrum Mask

|                           |  |   |  |                                 |
|---------------------------|--|---|--|---------------------------------|
| Rules and specifications: | CFR 47 Part 15, section 15.225(a)-(d)<br>IC RSS-210 Issue 6, section Annex 2.6   |   |  |                                 |
| Guide:                    | ANSI C63.4   |   |  |                                 |
| Description:              | Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth. |   |  |                                 |
| Limit:                    | Frequency of Emission (MHz)  | Field Strength ( $\mu\text{V}/\text{m}$ ) | Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) | Measurement Distance d (meters) |
|                           | 1.705 - 13.110   | 30  | 29.5   | 30                              |
|                           | 13.110 - 13.410  | 106                                       | 40.5   | 30                              |
|                           | 13.410 - 13.553  | 334                                       | 50.5   | 30                              |
|                           | 13.553 - 13.567  | 15848                                     | 84.0   | 30                              |
|                           | 13.567 - 13.710  | 334                                       | 50.5   | 30                              |
|                           | 13.710 - 14.010  | 106                                       | 40.5   | 30                              |
|                           | 14.010 - 30.000  | 30  | 29.5   | 30                              |
| Measurement procedure:    | Radiated Emission Measurement 9 kHz to 30 MHz (6.4)  |   |  |                                 |

|                       |                                  |
|-----------------------|----------------------------------|
| Comment:              |                                  |
| Date of test:         | 20 September 2005                |
| Test site:            | Fully anechoic room, cabin no. 2 |
| Test distance:        | 3 meters                         |
| Extrapolation Factor: | 40 dB/decade                     |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

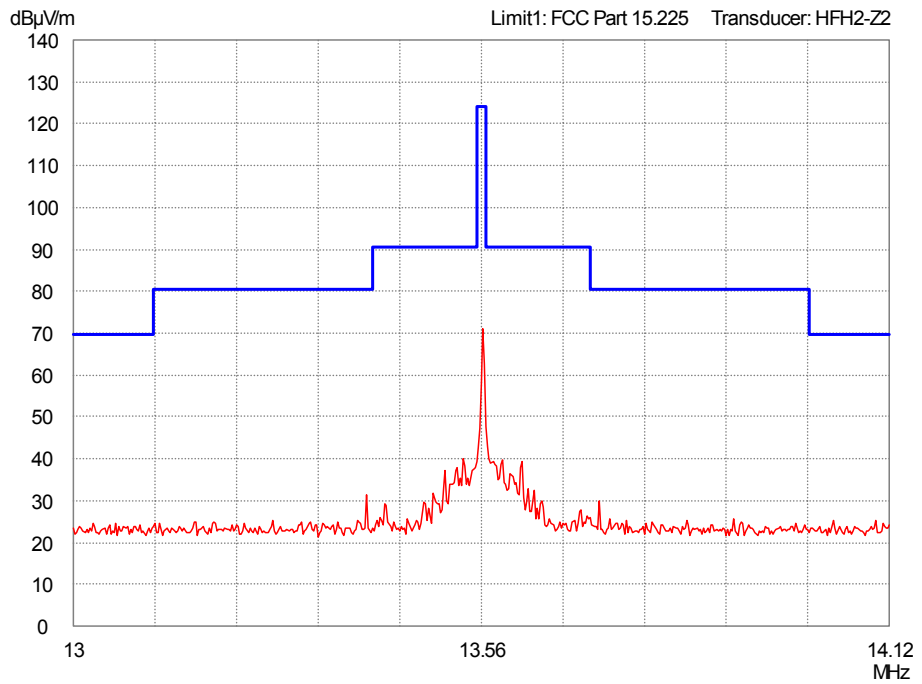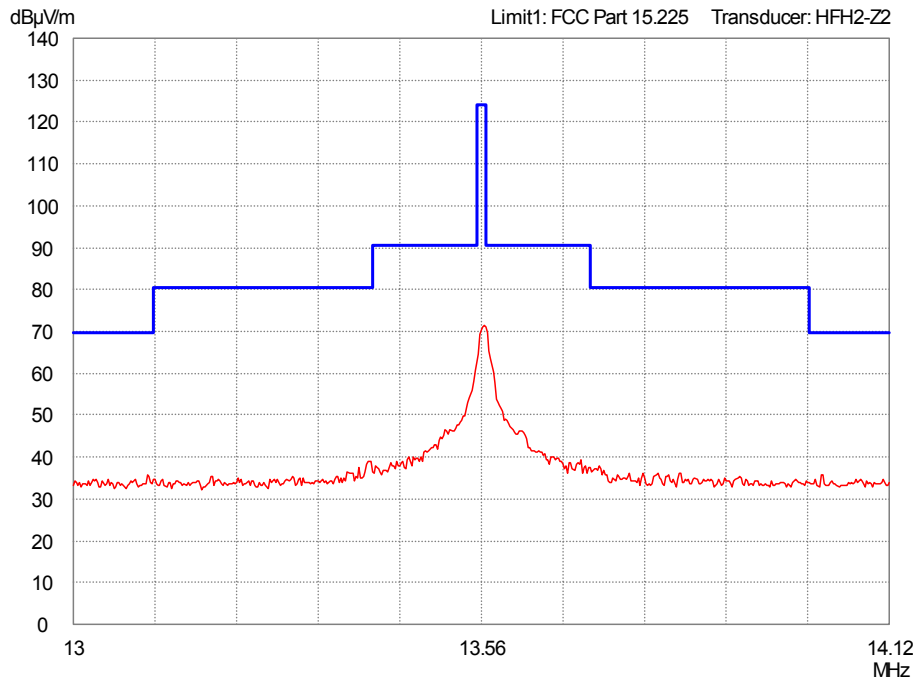

## 8.8 Radiated Emission Measurement 9 kHz to 30 MHz

|   |  |   |  |                                 |
|---|--|---|--|---------------------------------|
| Rules and specifications:   | CFR 47 Part 15, sections 15.205, 15.225(a)-(d) and 15.215(b)<br>IC RSS-210 Issue 6, sections 2.2(b)-(c), 2.7 Table 3 and Annex 2.6 |   |  |                                 |
| Guide:  | ANSI C63.4   |   |  |                                 |
| Limit:  | Frequency of Emission (MHz)  | Field Strength ( $\mu\text{V}/\text{m}$ ) | Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) | Measurement Distance d (meters) |
|   | 0.009 - 0.490  | 2400/F(kHz)                               | 67.6 - 20 · log(F(kHz))                            | 300                             |
|   | 0.490 - 1.705  | 24000/F(kHz)                              | 87.6 - 20 · log(F(kHz))                            | 30                              |
|   | 1.705 - 13.110   | 30  | 29.5   | 30                              |
|   | 13.110 - 13.410  | 106                                       | 40.5   | 30                              |
|   | 13.410 - 13.553  | 334                                       | 50.5   | 30                              |
|   | 13.553 - 13.567  | 15848                                     | 84.0   | 30                              |
|   | 13.567 - 13.710  | 334                                       | 50.5   | 30                              |
|   | 13.710 - 14.010  | 106                                       | 40.5   | 30                              |
|   | 14.010 - 30.000  | 30  | 29.5   | 30                              |
| Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission. |  |   |  |                                 |
| Measurement procedure:  | Radiated Emission Measurement 9 kHz to 30 MHz (6.4)<br>Loop antenna was rotated about the horizontal and vertical axis             |   |  |                                 |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

### Sample calculation of final values:

$$\text{Extrapolation Factor (dB/decade)} = \begin{cases} -40 \text{ (dB/decade)} & \text{if } d_1 = d_2 \\ \frac{\text{Reading Value } d_2 \text{ (dB}\mu\text{V)} - \text{Reading Value } d_1 \text{ (dB}\mu\text{V)}}{\text{Log}(d_2) - \text{Log}(d_1)} & \text{if } d_1 \neq d_2 \end{cases}$$

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_2)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V}/\text{m)} = \text{Reading Value } d_2 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

|               |  |
|---------------|--|
| Comment:      | Antenna: sd611<br>Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz) |
| Date of test: | 22 September 2005  |
| Test site:    | Open field test site   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 67.2                     | 39.3                     | 20.0                           | -53.4                   | -78.9 | -16.2                             | -35.8                      | 25.9              | 61.8           |
| 13.560             | QP       | 3                     | 10                    | 45.5                     | 34.8                     | 20.0                           | -20.4                   | -9.7  |                                   | 45.1                       | 84.0              | <b>38.9</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd611<br>Reading TAG continuously (122 kHz) |
| Date of test: | 22 September 2005                                    |
| Test site:    | Open field test site                                 |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 66.0                     | 38.4                     | 20.0                           | -52.9                   | -78.1 | 0.0                               | -19.7                      | 25.9              | <b>45.6</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd611<br>Reading TAG continuously (13.56 MHz) |
| Date of test: | 22 September 2005                                      |
| Test site:    | Open field test site                                   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |      | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB) |                                   |                            |                   |                |
| 13.560             | QP       | 3                     | 10                    | 45.7                     | 34.9                     | 20.0                           | -20.8                   | -9.9 |                                   | 45.0                       | 84.0              | <b>39.0</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd612<br>Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz) |
| Date of test: | 22 September 2005  |
| Test site:    | Open field test site   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 64.6                     | 36.1                     | 20.0                           | -54.5                   | -80.5 | -16.2                             | -40.6                      | 25.9              | 66.5           |
| 13.560             | QP       | 3                     | 10                    | 46.2                     | 36.0                     | 20.0                           | -19.5                   | -9.3  |                                   | 46.7                       | 84.0              | <b>37.3</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd612<br>Reading TAG continuously (122 kHz) |
| Date of test: | 22 September 2005                                    |
| Test site:    | Open field test site                                 |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 63.3                     | 33.4                     | 20.0                           | -57.0                   | -84.3 | 0.0                               | -30.8                      | 25.9              | <b>56.8</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd612<br>Reading TAG continuously (13.56 MHz) |
| Date of test: | 22 September 2005                                      |
| Test site:    | Open field test site                                   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |      | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB) |                                   |                            |                   |                |
| 13.560             | QP       | 3                     | 10                    | 44.5                     | 34.1                     | 20.0                           | -20.0                   | -9.5 |                                   | 44.5                       | 84.0              | <b>39.5</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|



|               |  |
|---------------|--|
| Comment:      | Antenna: sd647<br>Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz) |
| Date of test: | 22 September 2005  |
| Test site:    | Open field test site   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 51.6                     | 25.7                     | 20.0                           | -49.5                   | -73.1 | -16.2                             | -43.5                      | 25.9              | 69.5           |
| 13.560             | QP       | 3                     | 10                    | 46.7                     | 35.7                     | 20.0                           | -21.0                   | -10.0 |                                   | 45.6                       | 84.0              | <b>38.4</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd647<br>Reading TAG continuously (122 kHz) |
| Date of test: | 22 September 2005                                    |
| Test site:    | Open field test site                                 |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 50.0                     | 23.8                     | 20.0                           | -50.1                   | -74.0 | 0.0                               | -30.2                      | 25.9              | <b>56.2</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd647<br>Reading TAG continuously (13.56 MHz) |
| Date of test: | 22 September 2005                                      |
| Test site:    | Open field test site                                   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |      | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB) |                                   |                            |                   |                |
| 13.560             | QP       | 3                     | 10                    | 39.6                     | 32.4                     | 20.0                           | -13.9                   | -6.6 |                                   | 45.8                       | 84.0              | <b>38.2</b>    |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd648<br>Transmitting continuously without TAG, hopping (122 kHz / 13.56 MHz) |
| Date of test: | 22 September 2005  |
| Test site:    | Open field test site   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 54.0                     | 26.5                     | 20.0                           | -52.5                   | -77.6 | -16.2                             | -47.2                      | 25.9              | 73.2           |
| 13.560             | QP       | 3                     | 10                    | 51.9                     | 43.9                     | 20.0                           | -15.4                   | -7.3  |                                   | 56.5                       | 84.0              | 27.5           |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd648<br>Reading TAG continuously (122 kHz) |
| Date of test: | 22 September 2005                                    |
| Test site:    | Open field test site                                 |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |       | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|-------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB)  |                                   |                            |                   |                |
| 0.121              | PK       | 3                     | 10                    | 49.8                     | 22.8                     | 20.0                           | -51.6                   | -76.3 | 0.0                               | -33.5                      | 25.9              | 59.4           |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|               |  |
|---------------|--|
| Comment:      | Antenna: sd648<br>Reading TAG continuously (13.56 MHz) |
| Date of test: | 22 September 2005                                      |
| Test site:    | Open field test site                                   |

| Frequency<br>(MHz) | Detector | Distance              |                       | Reading Value            |                          | Correction<br>Factor<br>(dB/m) | Extrapolation<br>Factor |      | Pulse Train<br>Correction<br>(dB) | Final<br>Value<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------------|-------------------------|------|-----------------------------------|----------------------------|-------------------|----------------|
|                    |          | d <sub>1</sub><br>(m) | d <sub>2</sub><br>(m) | d <sub>1</sub><br>(dBµV) | d <sub>2</sub><br>(dBµV) |                                | (dB/dec)                | (dB) |                                   |                            |                   |                |
| 13.560             | QP       | 3                     | 10                    | 45.5                     | 37.2                     | 20.0                           | -15.8                   | -7.5 |                                   | 49.7                       | 84.0              | 34.3           |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

## 8.9 Radiated Emission Measurement 30 MHz to 1 GHz

|                           |   |   |  |
|---------------------------|---|---|--|
| Rules and specifications: | CFR 47 Part 15, sections 15.205(b) and 15.225(d)<br>IC RSS-210 Issue 6, sections 2.2(b)-(c) and 2.7 Table 2 |   |  |
| Guide:                    | ANSI C63.4  |   |  |
| Limit:                    | Frequency of Emission (MHz)   | Field Strength ( $\mu\text{V}/\text{m}$ ) | Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) |
|                           | 30 - 88   | 100                                       | 40.0   |
|                           | 88 - 216  | 150                                       | 43.5   |
|                           | 216 - 960   | 200                                       | 46.0   |
|                           | Above 960   | 500                                       | 54.0   |
|                           | Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.   |   |  |
| Comment:                  |   |   |  |
| Measurement procedures:   | Radiated Emission in Fully or Semi Anechoic Room (6.5)<br>Radiated Emission at Open Field Test Site (6.6)   |   |  |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

### Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V}/\text{m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

|                |  |
|----------------|--|
| Comment:       | Antenna: sd611<br>Mode: Transmitting continuously without TAG                                      |
| Date of test:  | 19 – 20 September 2005   |
| Test site:     | Frequencies ≤ 1 GHz: Open field test site<br>Frequencies > 1 GHz: Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters   |

| Frequency (MHz) | Antenna Polarization | Detector   | Receiver Reading (dBµV) | Correction Factor (dB/m) | Pulse Train Correction (dB) | Final Value (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|----------------------|------------|-------------------------|--------------------------|-----------------------------|----------------------|----------------|-------------|
| 40.670          | vertical             | Quasi-Peak | 27.4                    | 11.7                     |                             | 39.1                 | 40.0           | 0.9         |
| 135.600         | horizontal           | Quasi-Peak | 27.2                    | 13.0                     |                             | 40.2                 | 43.5           | 3.3         |
| 135.620         | vertical             | Quasi-Peak | 21.7                    | 13.0                     |                             | 34.7                 | 43.5           | 8.8         |
| 176.310         | horizontal           | Quasi-Peak | 26.0                    | 15.1                     |                             | 41.1                 | 43.5           | 2.4         |
| 189.870         | horizontal           | Quasi-Peak | 26.5                    | 16.3                     |                             | 42.8                 | 43.5           | 0.7         |
| 203.440         | horizontal           | Quasi-Peak | 26.4                    | 17.0                     |                             | 43.4                 | 43.5           | 0.1         |
| 216.990         | horizontal           | Quasi-Peak | 17.5                    | 17.5                     |                             | 35.0                 | 46.0           | 11.0        |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|                |  |
|----------------|--|
| Comment:       | Antenna: sd611<br>Mode: Reading TAG (13.56 MHz)  |
| Date of test:  |  |
| Test site:     | Frequencies ≤ 1 GHz: Open field test site<br>Frequencies > 1 GHz: Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters   |

| Frequency (MHz) | Antenna Polarization | Detector   | Receiver Reading (dBµV) | Correction Factor (dB/m) | Pulse Train Correction (dB) | Final Value (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|----------------------|------------|-------------------------|--------------------------|-----------------------------|----------------------|----------------|-------------|
| 40.680          | vertical             | Quasi-Peak | 28.1                    | 11.7                     |                             | 39.8                 | 40.0           | 0.2         |
| 149.190         | horizontal           | Quasi-Peak | 29.8                    | 13.6                     |                             | 43.4                 | 43.5           | 0.1         |
| 162.750         | horizontal           | Quasi-Peak | 20.1                    | 14.0                     |                             | 34.1                 | 43.5           | 9.4         |
| 203.440         | horizontal           | Quasi-Peak | 22.9                    | 17.0                     |                             | 39.9                 | 43.5           | 3.6         |
| 217.000         | horizontal           | Quasi-Peak | 22.7                    | 17.5                     |                             | 40.2                 | 46.0           | 5.8         |
| 230.560         | horizontal           | Quasi-Peak | 27.6                    | 17.4                     |                             | 45.0                 | 46.0           | 1.0         |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|                |  |
|----------------|--|
| Comment:       | Antenna: sd648<br>Mode: Transmitting continuously without TAG                                      |
| Date of test:  |  |
| Test site:     | Frequencies ≤ 1 GHz: Open field test site<br>Frequencies > 1 GHz: Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters   |

| Frequency (MHz) | Antenna Polarization | Detector   | Receiver Reading (dBμV) | Correction Factor (dB/m) | Pulse Train Correction (dB) | Final Value (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|------------|-------------------------|--------------------------|-----------------------------|----------------------|----------------|-------------|
| 135.600         | horizontal           | Quasi-Peak | 24.7                    | 13.0                     |                             | 37.7                 | 43.5           | 5.8         |
| 162.750         | horizontal           | Quasi-Peak | 19.2                    | 14.0                     |                             | 33.2                 | 43.5           | 10.3        |
| 189.870         | horizontal           | Quasi-Peak | 17.9                    | 16.3                     |                             | 34.2                 | 43.5           | 9.3         |
| 203.440         | horizontal           | Quasi-Peak | 22.2                    | 17.0                     |                             | 39.2                 | 43.5           | 4.3         |
| 216.990         | horizontal           | Quasi-Peak | 20.7                    | 17.5                     |                             | 38.2                 | 46.0           | 7.8         |
| 230.560         | horizontal           | Quasi-Peak | 26.6                    | 17.4                     |                             | 44.0                 | 46.0           | <b>2.0</b>  |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

|                |  |
|----------------|--|
| Comment:       | Antenna: sd648<br>Mode: Reading TAG (13.56 MHz)  |
| Date of test:  |  |
| Test site:     | Frequencies ≤ 1 GHz: Open field test site<br>Frequencies > 1 GHz: Fully anechoic room, cabin no. 2 |
| Test distance: | 3 meters   |

| Frequency (MHz) | Antenna Polarization | Detector   | Receiver Reading (dBμV) | Correction Factor (dB/m) | Pulse Train Correction (dB) | Final Value (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|------------|-------------------------|--------------------------|-----------------------------|----------------------|----------------|-------------|
| 149.190         | horizontal           | Quasi-Peak | 29.8                    | 13.6                     |                             | 43.4                 | 43.5           | <b>0.1</b>  |
| 162.750         | horizontal           | Quasi-Peak | 20.1                    | 14.0                     |                             | 34.1                 | 43.5           | 9.4         |
| 203.440         | horizontal           | Quasi-Peak | 22.9                    | 17.0                     |                             | 39.9                 | 43.5           | 3.6         |
| 217.000         | horizontal           | Quasi-Peak | 22.7                    | 17.5                     |                             | 40.2                 | 46.0           | 5.8         |
| 230.560         | horizontal           | Quasi-Peak | 27.6                    | 17.4                     |                             | 45.0                 | 46.0           | 1.0         |

|              |             |
|--------------|-------------|
| Test Result: | Test passed |
|--------------|-------------|

## 8.10 Carrier Frequency Stability


|                           |   |
|---------------------------|---|
| Rules and specifications: | CFR 47 Part 15, section 15.225(e)<br>IC RSS-GEN Issue 1, sections 4.5 and 7.2.4   |
| Guide:                    | ANSI C63.4  |
| Limit:                    | The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ ( $\pm 100$ ppm) of the carrier frequency under nominal conditions. |
| Temperature range:        | -20°C to +50°C (at normal supply voltage)   |
| Voltage range:            | 85% to 115% of the rated supply voltage (at a temperature of +20 °C)  |
| Measurement procedure:    | Carrier Frequency Stability (6.7)   |

|               |                   |
|---------------|-------------------|
| Comment:      |                   |
| Date of test: | 23 September 2005 |





### 8.10.2 Carrier Frequency Stability vs. Supply Voltage

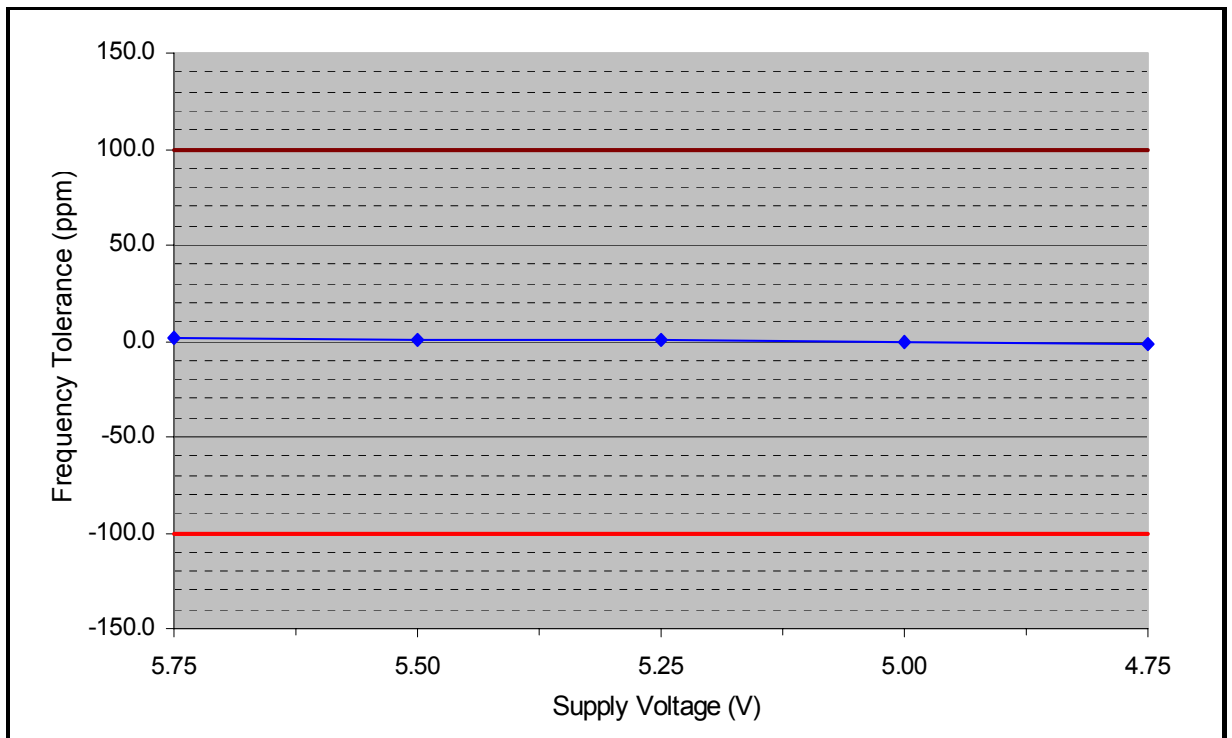

Temperature: +20 °C      Battery End Point: 4.60 V  
 Nominal frequency: 13.562418 MHz

| Supply Voltage (V) | Frequency (MHz) | Frequency Tolerance (Hz) | Frequency Tolerance (ppm) | Upper Limit (ppm) | Lower Limit (ppm) | Margin (ppm) |
|--------------------|-----------------|--------------------------|---------------------------|-------------------|-------------------|--------------|
| 5.75               | 13.562439       | 21                       | 1.5                       | +100.0            | -100.0            | 98.5         |
| 5.50               | 13.562432       | 14                       | 1.0                       | +100.0            | -100.0            | 99.0         |
| 5.25               | 13.562426       | 8                        | 0.6                       | +100.0            | -100.0            | 99.4         |
| 5.00               | 13.562418       | 0                        | 0.0                       | +100.0            | -100.0            | 100.0        |
| 4.75               | 13.562399       | -19                      | -1.4                      | +100.0            | -100.0            | 98.6         |

Test Result: Test passed

### 8.11 Exposure of Humans to RF Fields

|                           |                                 |
|---------------------------|---------------------------------|
| Rules and specifications: | IC RSS-GEN Issue 1, section 5.5 |
| Guide:                    | IC RSS-102 Issue 1, section 4.1 |

|               |                               |
|---------------|-------------------------------|
| Comment:      | For carrier frequency 122 kHz |
| Date of test: | 22 September 2005             |

| Exposure of Humans to RF Fields   | Applicable | Declared by applicant               | Measured                            | Exemption  |
|---|------------|-------------------------------------|-------------------------------------|--|
| <b>The transmitter is for</b>   |            |                                     |                                     |  |
| <input checked="" type="checkbox"/> fixed use <input type="checkbox"/> mobile use <input type="checkbox"/> portable use   |            | <input checked="" type="checkbox"/> |                                     | <input type="checkbox"/>   |
| <b>The antenna is</b>   |            |                                     |                                     |  |
| <input checked="" type="checkbox"/> detachable  |            |                                     |                                     |  |
| The output power (TP in watts) is measured at the antenna connector:<br>$TP = 32.36 \text{ mW}$<br>Numerical gain of the antenna: $G = 1$   |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |  |
| <input type="checkbox"/> not detachable   |            |                                     |                                     |  |
| <b>SAR and RF evaluation</b>  |            |                                     |                                     |  |
| $EIRP = G \cdot TP \Rightarrow EIRP = 32.36 \text{ mW}$   |            |                                     |                                     |  |
| <input checked="" type="checkbox"/> Transmitter is operating at frequencies below 1.0 GHz with an output power TP equal to or less than 200 milliwatts (mW).<br><input type="checkbox"/> Transmitter is operating at frequencies between 1.0 and 2.2 GHz with an output power TP equal to or less than 100 milliwatts (mW).<br><input type="checkbox"/> Transmitter is for mobile use and operating frequency is below 1.5 GHz with effective radiated power (ERP) of 1.5 watts or less (i.e. EIRP of 2.5 watts or less).<br><input type="checkbox"/> Transmitter is for mobile use and operating frequency is above 1.5 GHz with ERP of 3 watts or less (i.e. EIRP of 5 watts or less).<br><input type="checkbox"/> SAR and/or RF evaluation is documented in test report no. .... |            |                                     |                                     | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> |

|               |                                 |
|---------------|---------------------------------|
| Comment:      | For carrier frequency 13.56 MHz |
| Date of test: | 22 September 2005               |

| Exposure of Humans to RF Fields   | Applicable | Declared by applicant               | Measured                            | Exemption  |
|---|------------|-------------------------------------|-------------------------------------|--|
| <b>The transmitter is for</b>   |            |                                     |                                     |  |
| <input checked="" type="checkbox"/> fixed use <input type="checkbox"/> mobile use <input type="checkbox"/> portable use   |            | <input checked="" type="checkbox"/> |                                     | <input type="checkbox"/>   |
| <b>The antenna is</b>   |            |                                     |                                     |  |
| <input checked="" type="checkbox"/> detachable  |            |                                     |                                     |  |
| The output power (TP in watts) is measured at the antenna connector:<br>$TP = 58.61 \text{ mW}$<br>Numerical gain of the antenna: $G = 1$   |            |                                     |                                     |  |
| <input type="checkbox"/> not detachable   |            | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |  |
| <b>SAR and RF evaluation</b>  |            |                                     |                                     |  |
| $EIRP = G \cdot TP \Rightarrow EIRP = 58.61 \text{ mW}$   |            |                                     |                                     |  |
| <input checked="" type="checkbox"/> Transmitter is operating at frequencies below 1.0 GHz with an output power TP equal to or less than 200 milliwatts (mW).<br><input type="checkbox"/> Transmitter is operating at frequencies between 1.0 and 2.2 GHz with an output power TP equal to or less than 100 milliwatts (mW).<br><input type="checkbox"/> Transmitter is for mobile use and operating frequency is below 1.5 GHz with effective radiated power (ERP) of 1.5 watts or less (i.e. EIRP of 2.5 watts or less).<br><input type="checkbox"/> Transmitter is for mobile use and operating frequency is above 1.5 GHz with ERP of 3 watts or less (i.e. EIRP of 5 watts or less).<br><input type="checkbox"/> SAR and/or RF evaluation is documented in test report no. .... |            |                                     |                                     | <input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/><br><input type="checkbox"/> |

## 9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

|                                     |                          |   |  |
|-------------------------------------|--------------------------|---|--|
| <input checked="" type="checkbox"/> | CFR 47 Part 2            | Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)   | October 10, 2004                                     |
| <input checked="" type="checkbox"/> | CFR 47 Part 15           | Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)   | September 19, 2005                                   |
| <input checked="" type="checkbox"/> | ANSI C63.4               | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz   | December 11, 2003<br>(published on January 30, 2004) |
| <input checked="" type="checkbox"/> | RSS-Gen                  | Radio Standards Specification RSS-Gen Issue 1 containing General Requirements and Information for the Certification of Radiocommunication Equipmment, published by Industry Canada  | September 2005                                       |
| <input checked="" type="checkbox"/> | RSS-210                  | Radio Standards Specification RSS-210 Issue 6 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada   | September 2005                                       |
| <input type="checkbox"/>            | RSS-310                  | Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada  | September 2005                                       |
| <input checked="" type="checkbox"/> | RSS-102                  | Radio Standards Specification RSS-102 Issue 1: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields, published by Industry Canada | September 25, 1999                                   |
| <input type="checkbox"/>            | ICES-003                 | Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada  | February 7, 2004                                     |
| <input checked="" type="checkbox"/> | CISPR 22                 | Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"                                     | 1997   |
| <input type="checkbox"/>            | CAN/CSA-CEI/IEC CISPR 22 | Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment  | 2002   |
| <input checked="" type="checkbox"/> | TRC-43                   | Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada  | October 9, 1982                                      |

## 10 Charts taken during testing

# Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Shielded room, cabin no. 1

Tested on:  
Linecord  
plus

Date of test:  
2005-09-20

Operator:  
M. Steindl

Test performed:  
semi automatically

File name:

Mode:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: 50 Ohms termination
- transmitting continuously

Detector:

Peak / Final Results: QP


Final results:

20 dB Margin

25 Subranges

dB $\mu$ V

Limit1: FCC C / QP    Limit2: FCC C / AV

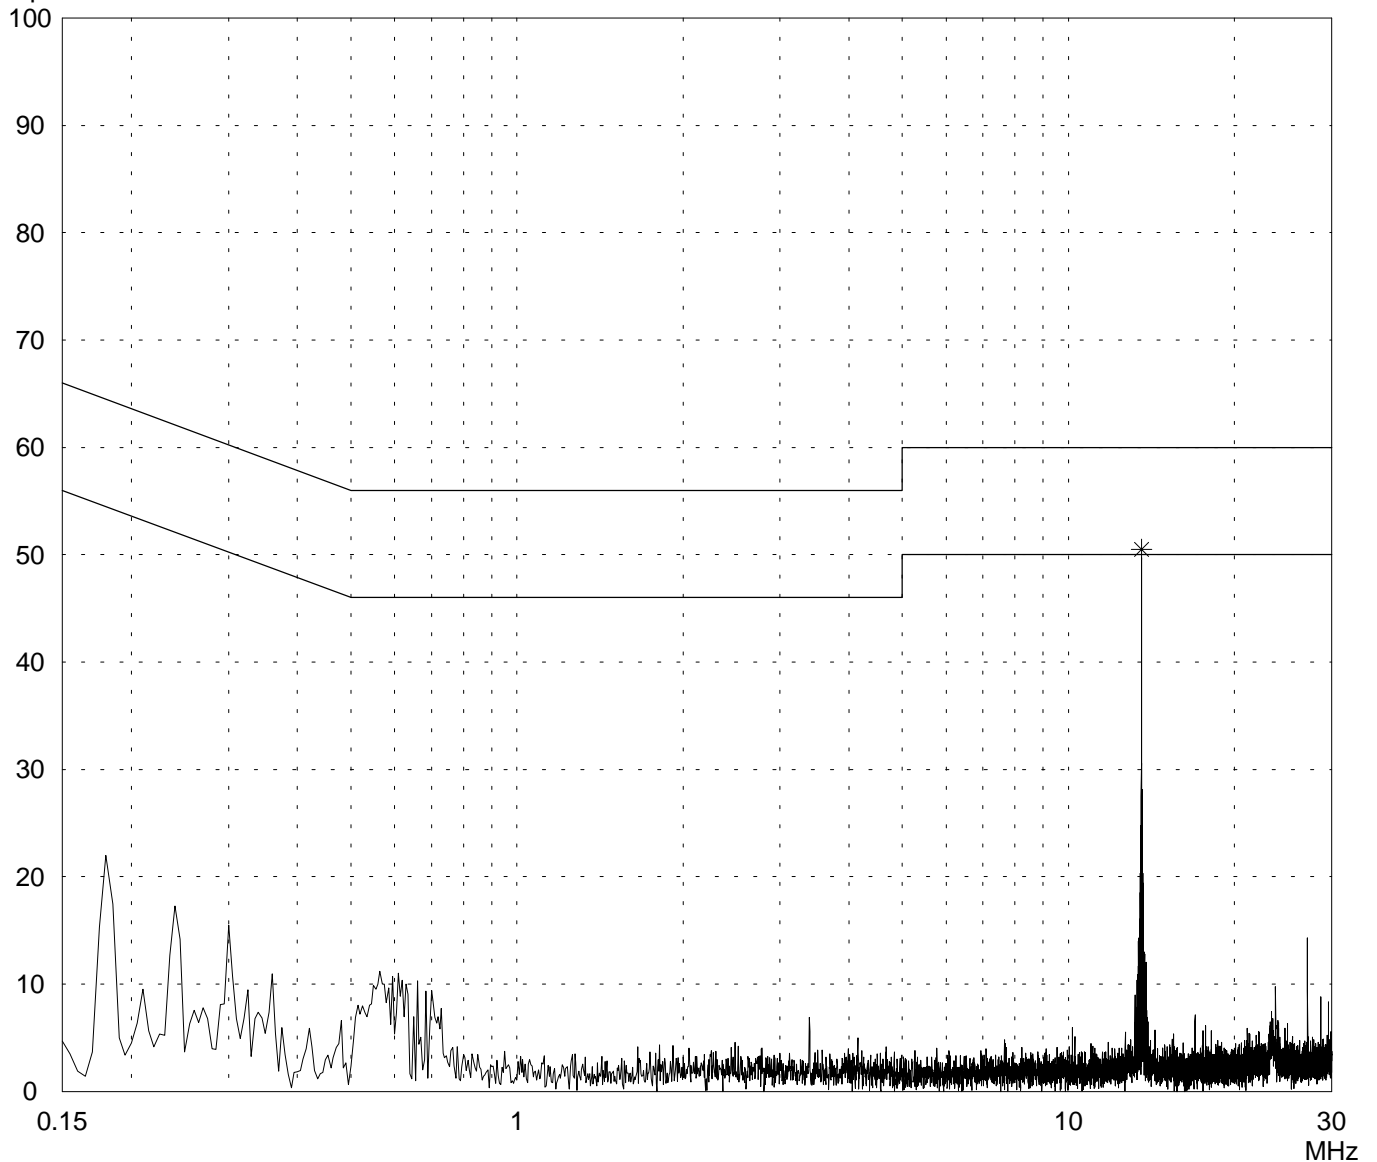

Result:  
Limit kept

Project file:  
55426-50412

Page    of    Pages


# Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

|  |                         |
|--|-------------------------|
| Model:<br>sd605                          |                         |
| Serial no.:<br>D052900585                |                         |
| Applicant:<br>SKIDATA AG                 |                         |
| Test site:<br>Shielded room, cabin no. 1 |                         |
| Tested on:<br>Linecord plus              |                         |
| Date of test:<br>2005-09-20              | Operator:<br>M. Steindl |
| Test performed:<br>automatically         | File name:              |

|   |
|---|
| Mode:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: 50 Ohms termination<br><br>- transmitting continuously |
|---|

|  |
|--|
| Detector:<br>Average / Final Results: AV |
|--|

|                                |              |
|--------------------------------|--------------|
| Final results:<br>20 dB Margin | 25 Subranges |
|--------------------------------|--------------|

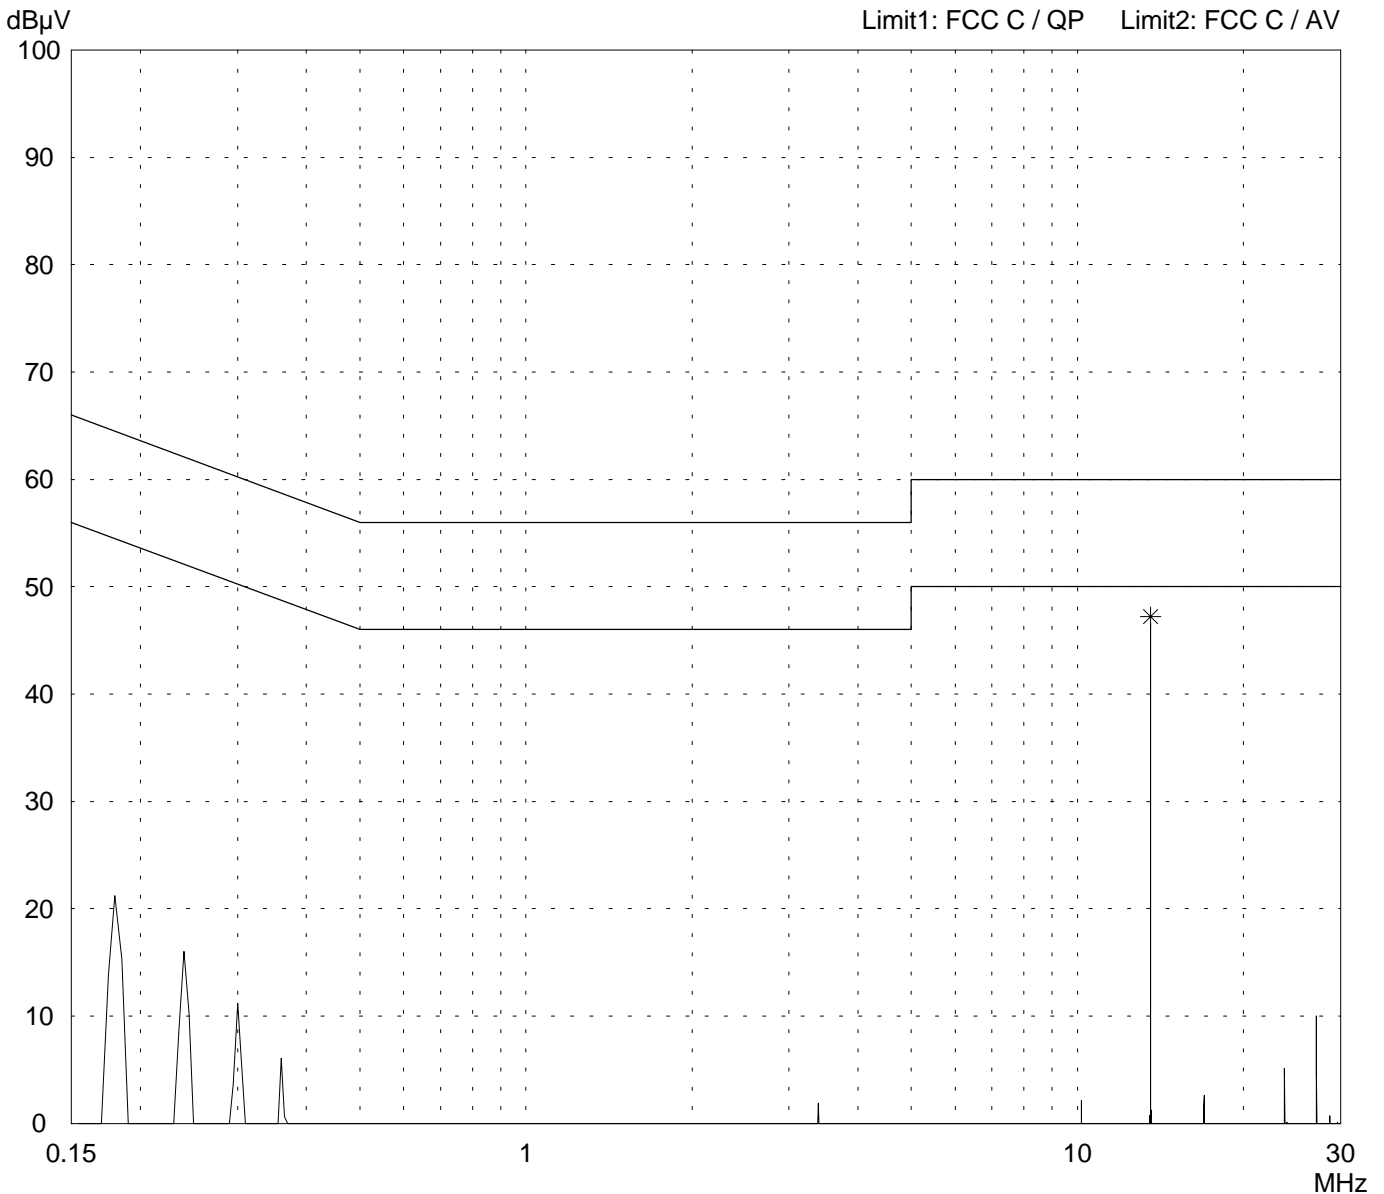

|                       |
|-----------------------|
| Result:<br>Limit kept |
|-----------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|



# Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Shielded room, cabin no. 1

Tested on:  
Linecord  
minus

Date of test:  
2005-09-20

Operator:  
M. Steindl

Test performed:  
semi automatically

File name:

Mode:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: 50 Ohms termination
- transmitting continuously

Detector:

Peak / Final Results: QP


Final results:

20 dB Margin

25 Subranges

dB $\mu$ V

Limit1: FCC C / QP    Limit2: FCC C / AV

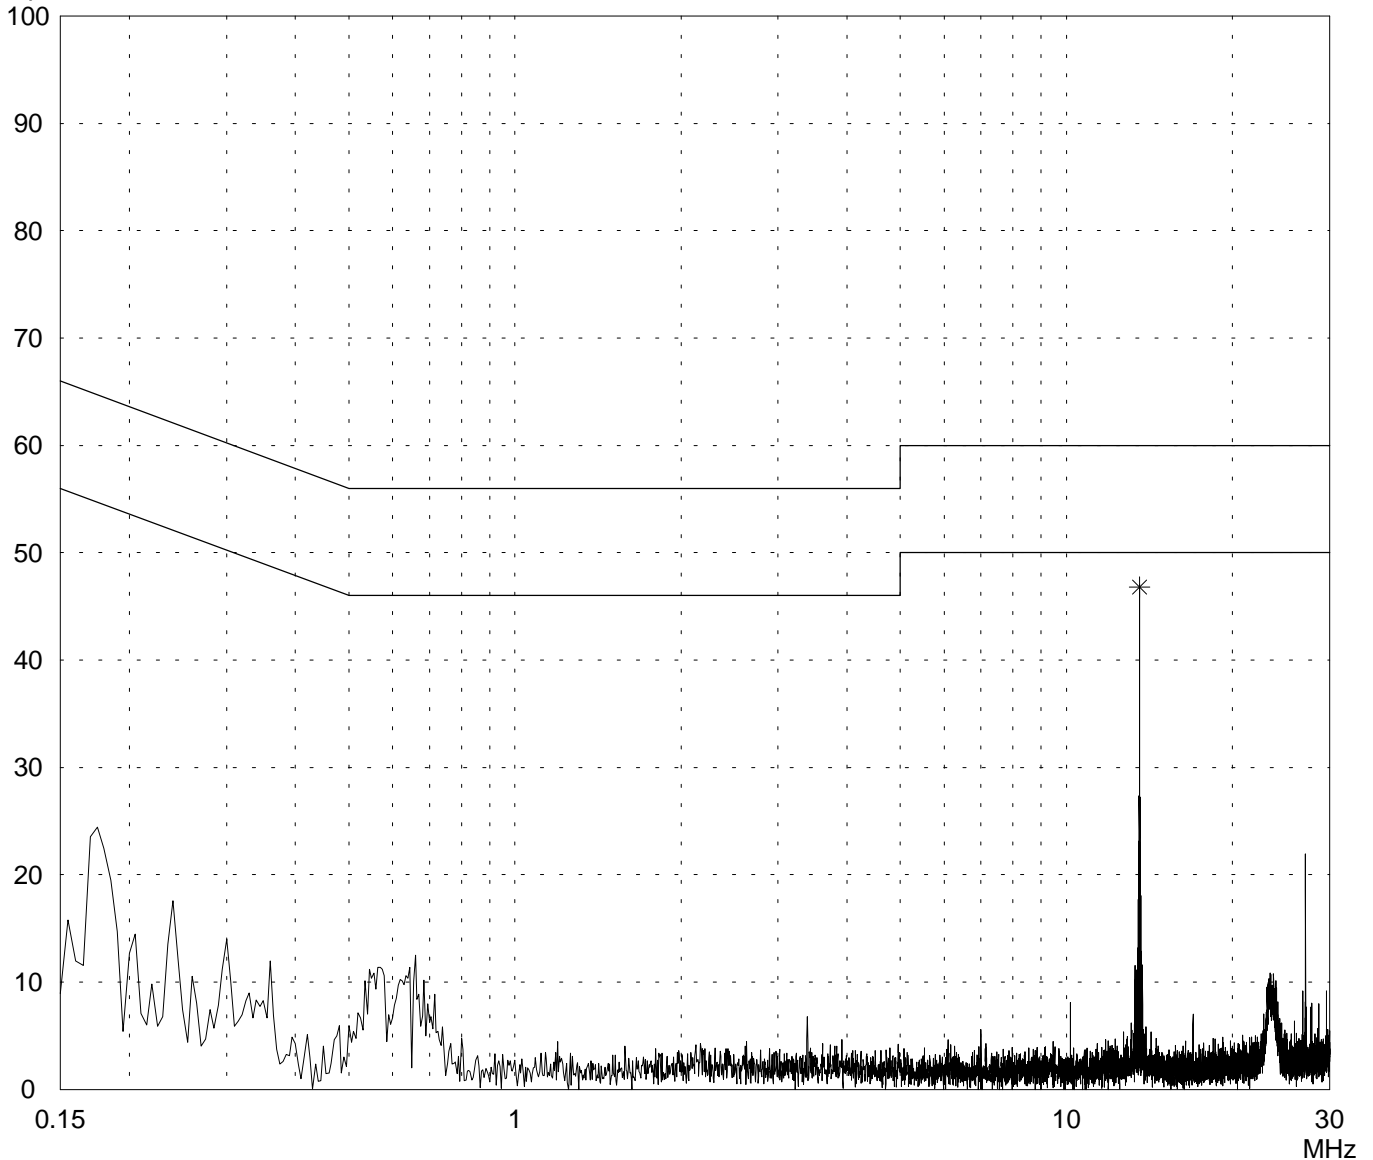

Result:  
Limit kept

Project file:  
55426-50412

Page    of    Pages


# Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

|  |                         |
|--|-------------------------|
| Model:<br>sd605                          |                         |
| Serial no.:<br>D052900585                |                         |
| Applicant:<br>SKIDATA AG                 |                         |
| Test site:<br>Shielded room, cabin no. 1 |                         |
| Tested on:<br>Linecord<br>minus          |                         |
| Date of test:<br>2005-09-20              | Operator:<br>M. Steindl |
| Test performed:<br>automatically         | File name:              |

|   |  |
|---|--|
| Mode:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: 50 Ohms termination<br><br>- transmitting continuously |  |
|---|--|

|  |
|--|
| Detector:<br>Average / Final Results: AV |
|--|

|                                |              |
|--------------------------------|--------------|
| Final results:<br>20 dB Margin | 25 Subranges |
|--------------------------------|--------------|

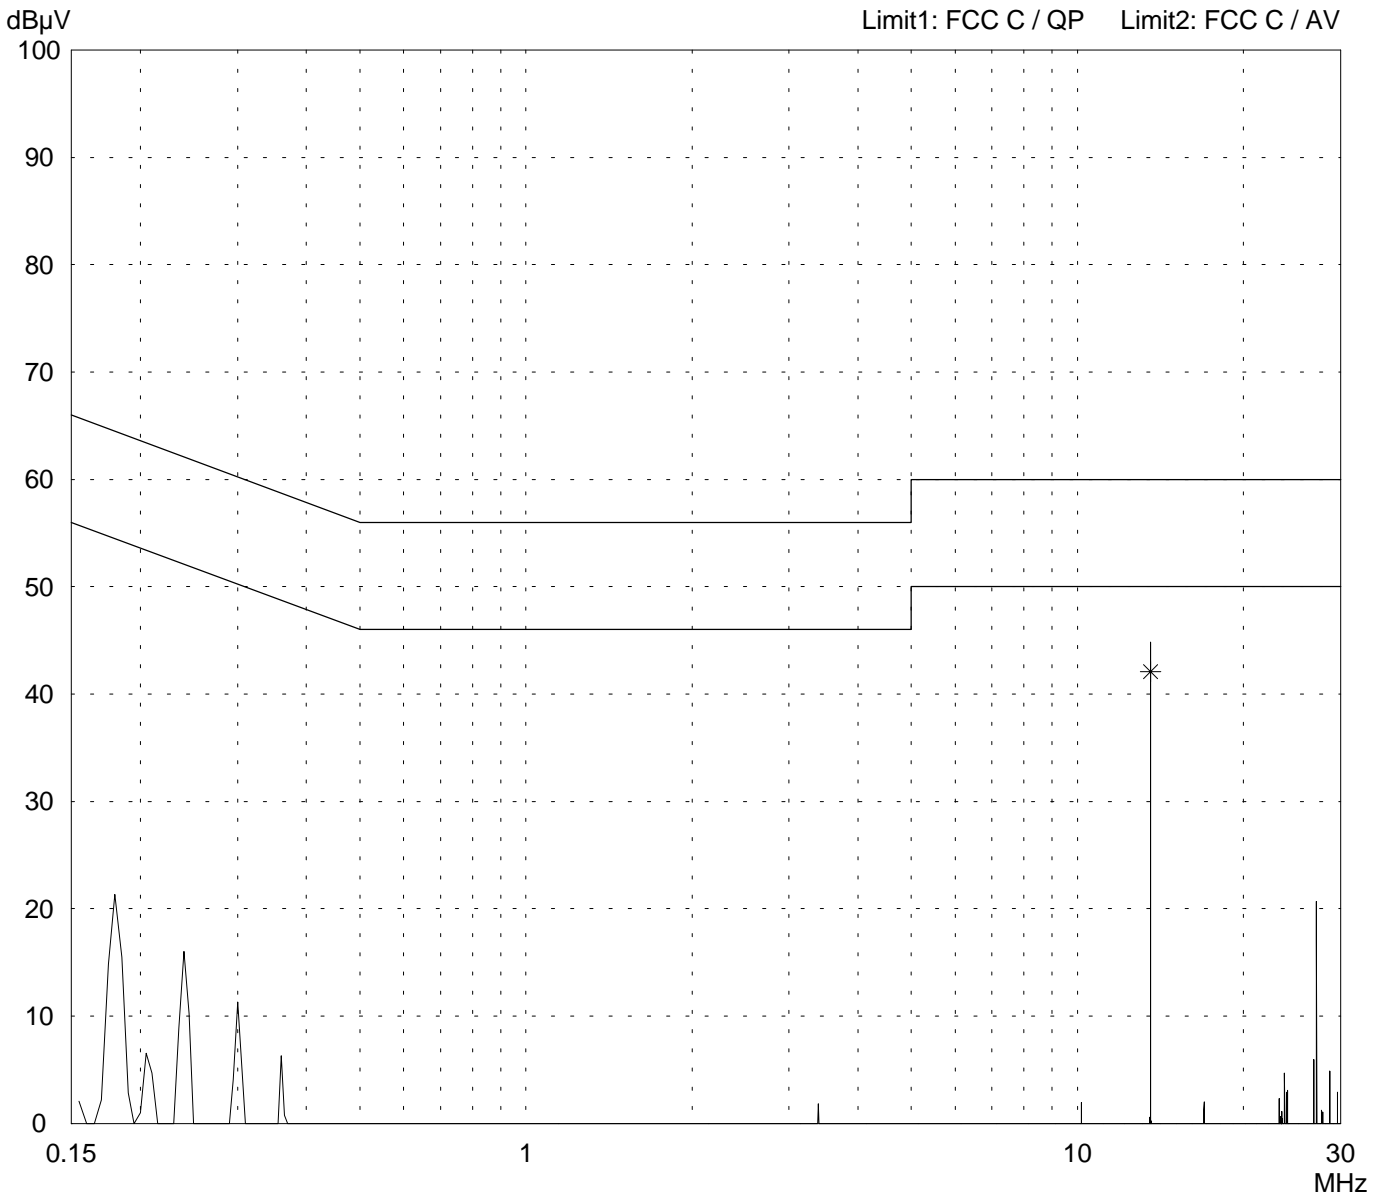

|                       |
|-----------------------|
| Result:<br>Limit kept |
|-----------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|  |                           |
|--|---------------------------|
| Model:<br>sd605                                |                           |
| Serial no.:<br>D052900585                      |                           |
| Applicant:<br>SKIDATA AG                       |                           |
| Test site:<br>Fully anechoic room, cabin no. 2 |                           |
| Tested on:<br>Test distance 3 metres           |                           |
| Date of test:<br>2005-09-19                    | Operator:<br>M. Steindl   |
| Test performed:<br>by hand                     | File name:<br>default.emi |

|   |
|---|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd611<br><br>- transmitting |
|---|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

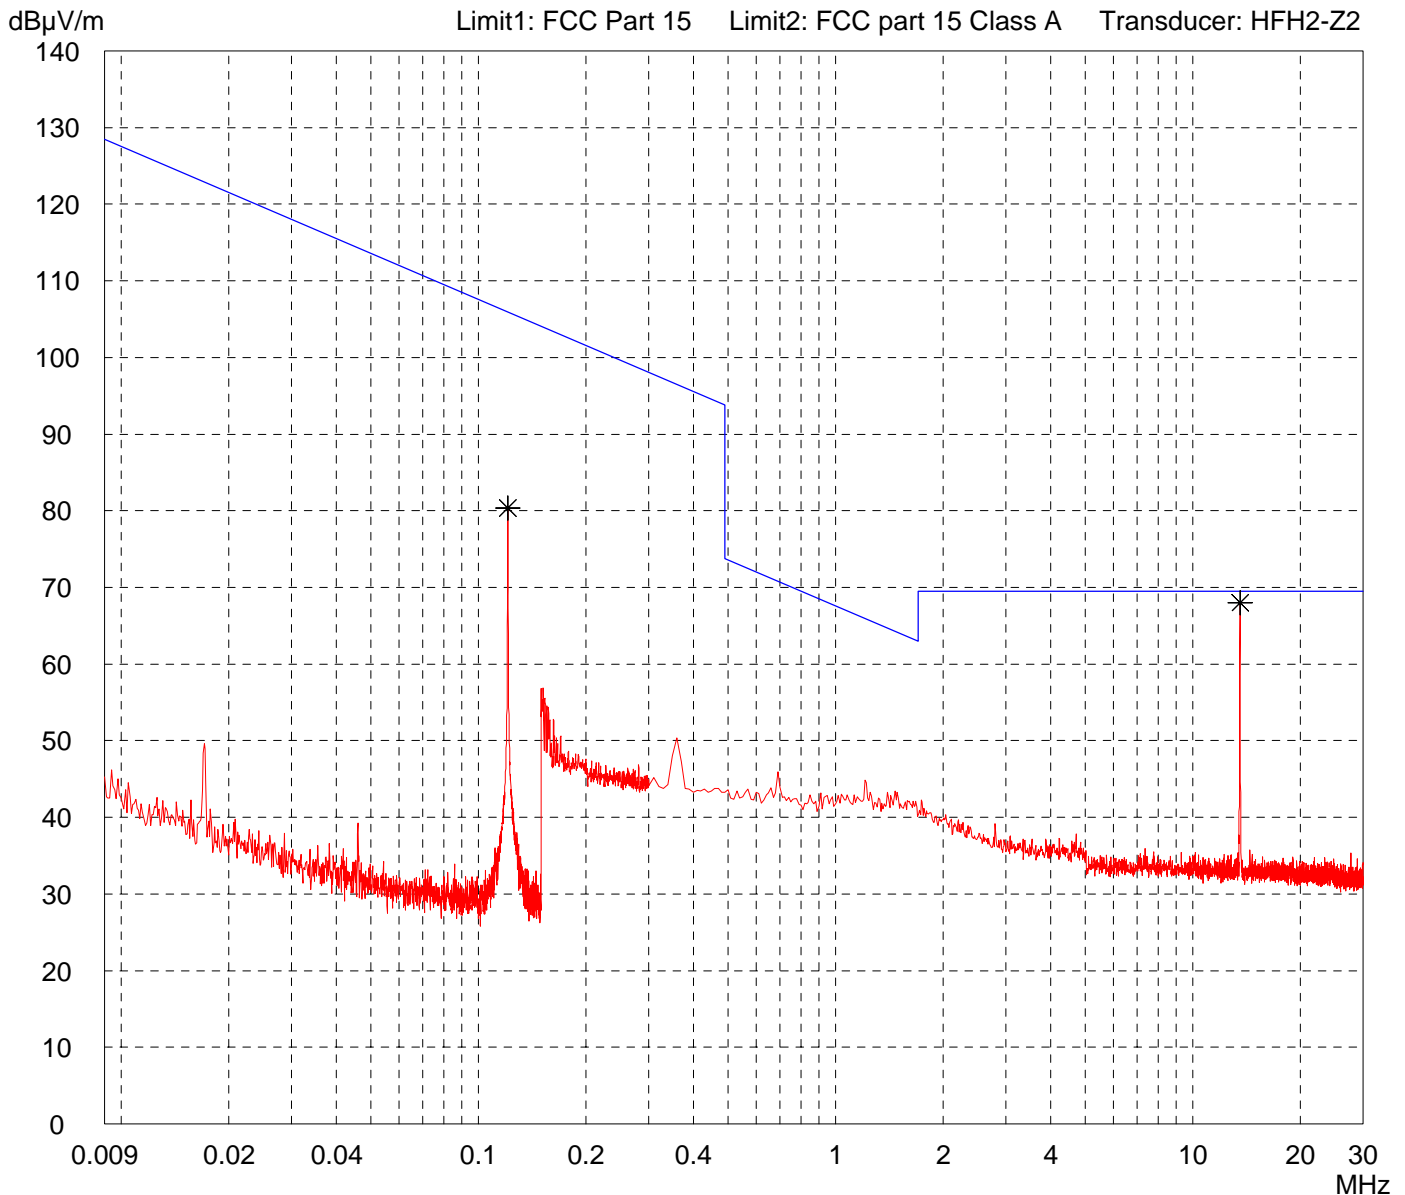

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
by hand


File name:  
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd611
- reading TAG (122 kHz)

Detector:  
Peak

List of values:  
Selected by hand

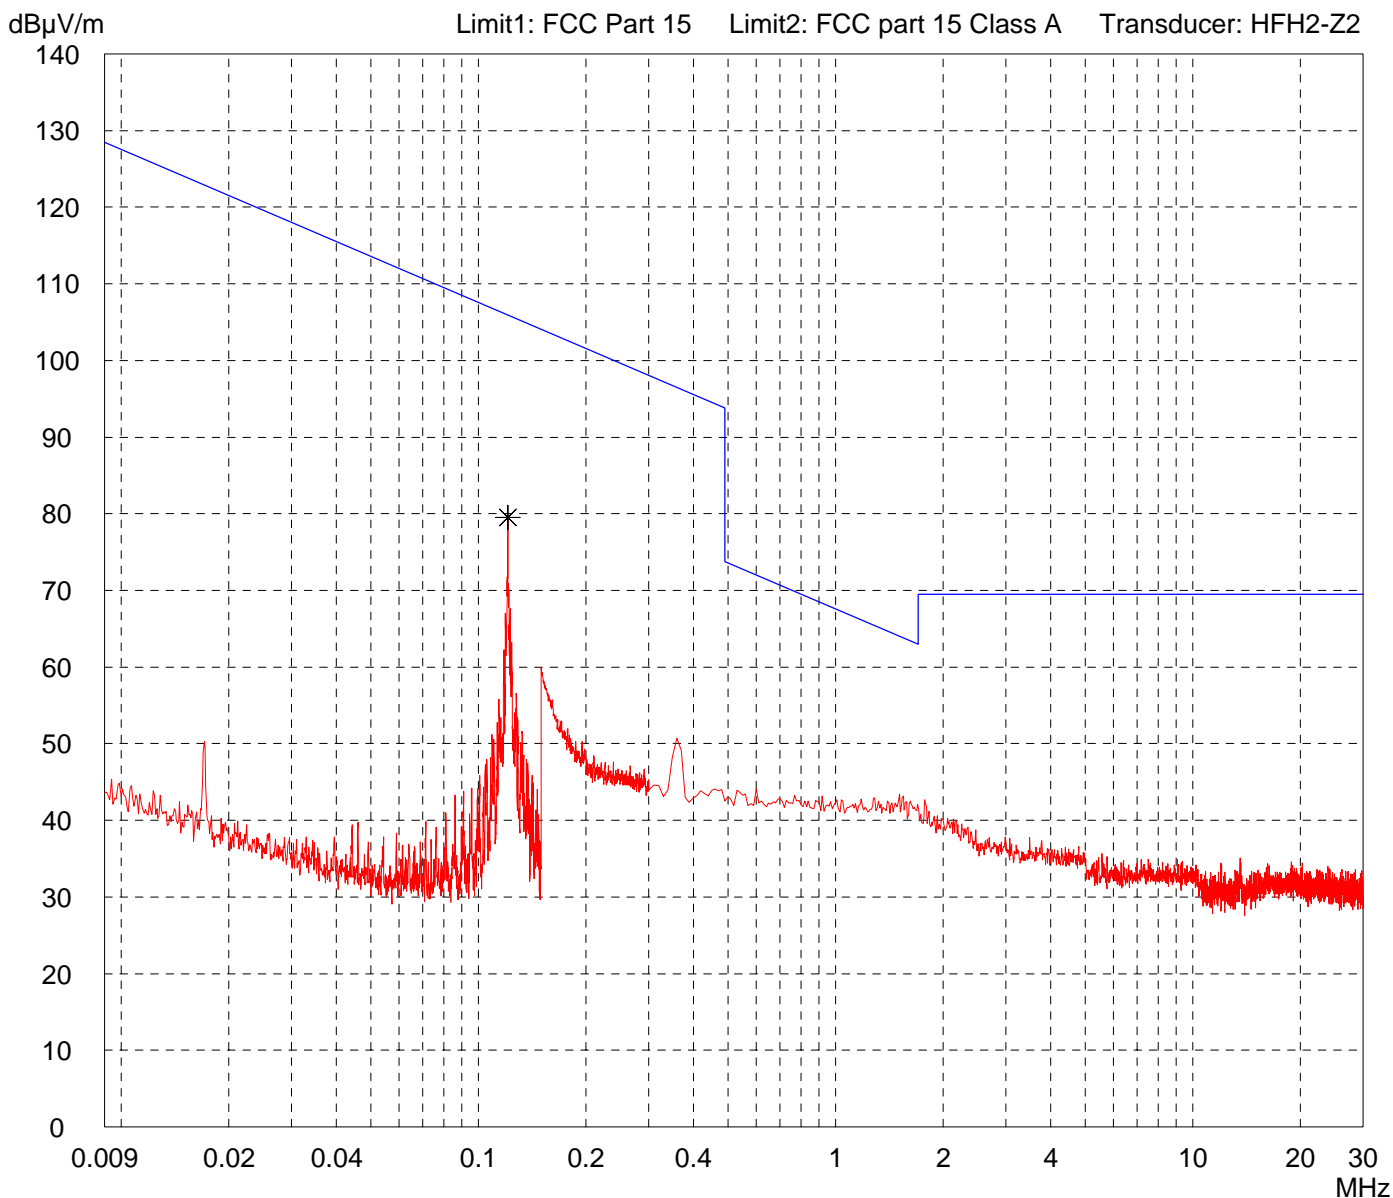

Result:  
Prescan

Project file:  
55426-50412

Page    of    Pages


# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|  |                           |
|--|---------------------------|
| Model:<br>sd605                                |                           |
| Serial no.:<br>D052900585                      |                           |
| Applicant:<br>SKIDATA AG                       |                           |
| Test site:<br>Fully anechoic room, cabin no. 2 |                           |
| Tested on:<br>Test distance 3 metres           |                           |
| Date of test:<br>2005-09-19                    | Operator:<br>M. Steindl   |
| Test performed:<br>by hand                     | File name:<br>default.emi |

|                            |  |
|----------------------------|--|
| Comment:                   |  |
| - DC 5 V power supply      |  |
| - Variant: Standard (V4.2) |  |
| - Antenna: sd611           |  |
| - reading TAG (13.56 MHz)  |  |

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                 |              |
|-----------------|--------------|
| List of values: |              |
| 10 dB Margin    | 50 Subranges |

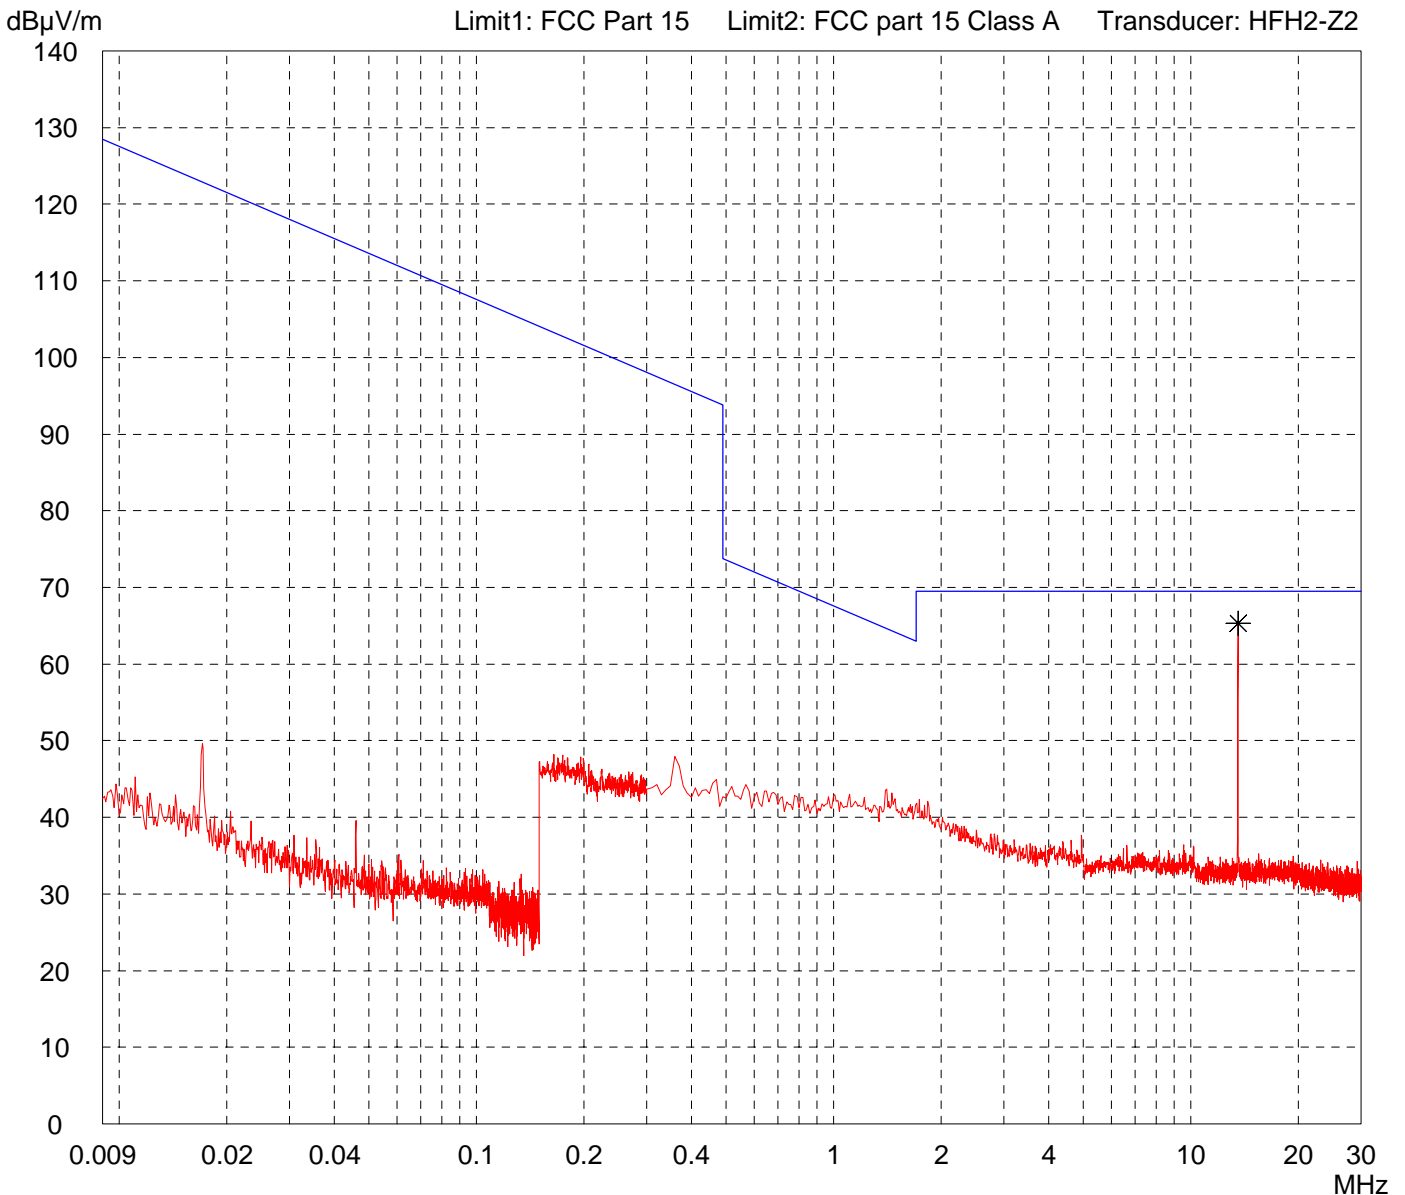

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
by hand


File name:  
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd612
- transmitting continuously

Detector:  
Peak

List of values:  
Selected by hand

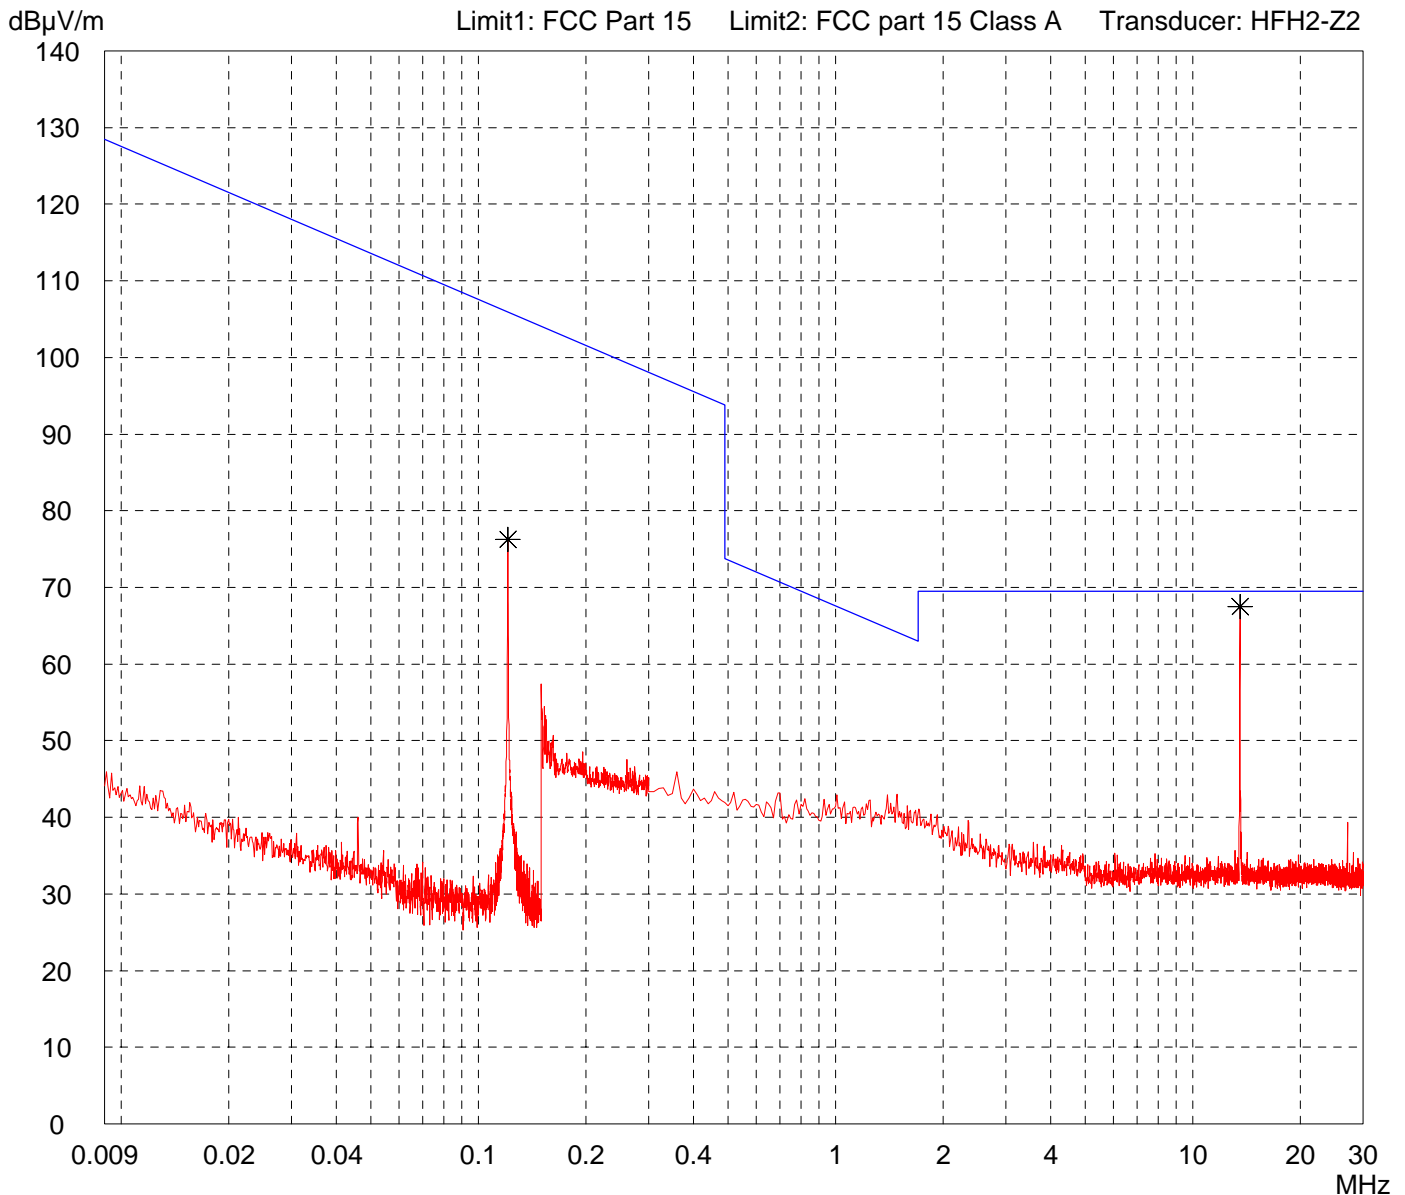

Result:  
Prescan

Project file:  
55426-50412

Page    of    Pages


# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|  |                           |
|--|---------------------------|
| Model:<br>sd605                                |                           |
| Serial no.:<br>D052900585                      |                           |
| Applicant:<br>SKIDATA AG                       |                           |
| Test site:<br>Fully anechoic room, cabin no. 2 |                           |
| Tested on:<br>Test distance 3 metres           |                           |
| Date of test:<br>2005-09-19                    | Operator:<br>M. Steindl   |
| Test performed:<br>by hand                     | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd612<br><br>- reading TAG (122 kHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

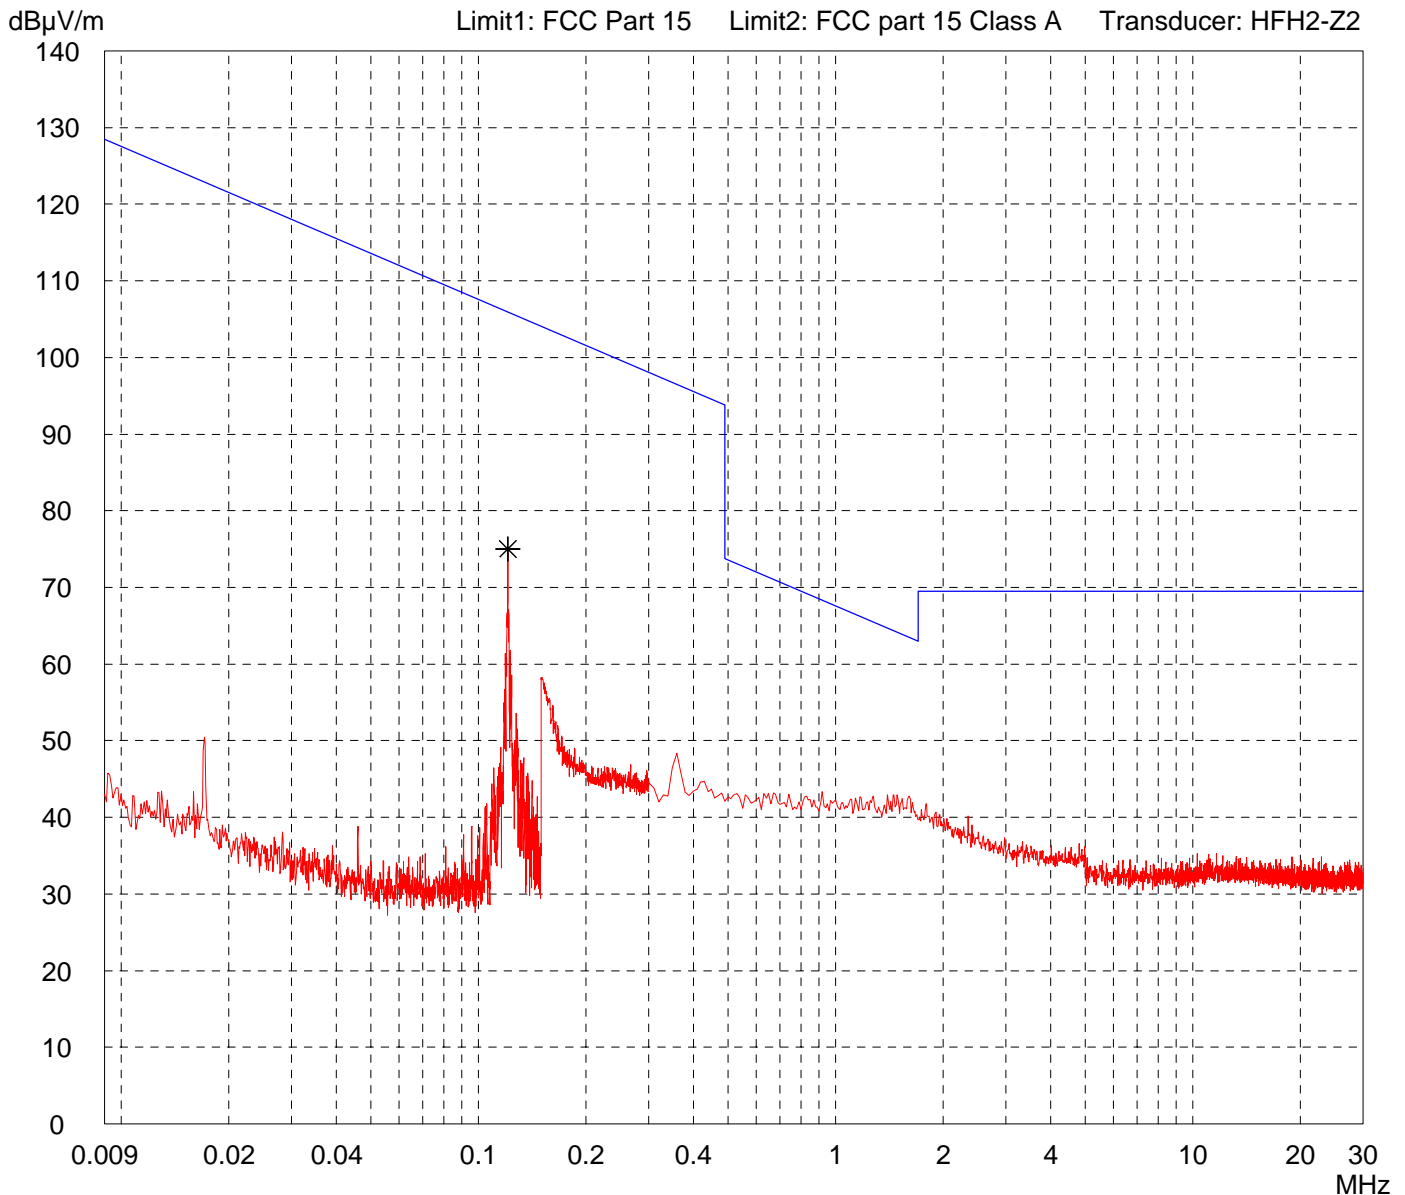

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|




# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|  |                           |
|--|---------------------------|
| Model:<br>sd605                                |                           |
| Serial no.:<br>D052900585                      |                           |
| Applicant:<br>SKIDATA AG                       |                           |
| Test site:<br>Fully anechoic room, cabin no. 2 |                           |
| Tested on:<br>Test distance 3 metres           |                           |
| Date of test:<br>2005-09-19                    | Operator:<br>M. Steindl   |
| Test performed:<br>by hand                     | File name:<br>default.emi |

|                            |  |
|----------------------------|--|
| Comment:                   |  |
| - DC 5 V power supply      |  |
| - Variant: Standard (V4.2) |  |
| - Antenna: sd612           |  |
| - reading TAG (13.56 MHz)  |  |

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                 |              |
|---------------------------------|--------------|
| List of values:<br>10 dB Margin | 50 Subranges |
|---------------------------------|--------------|

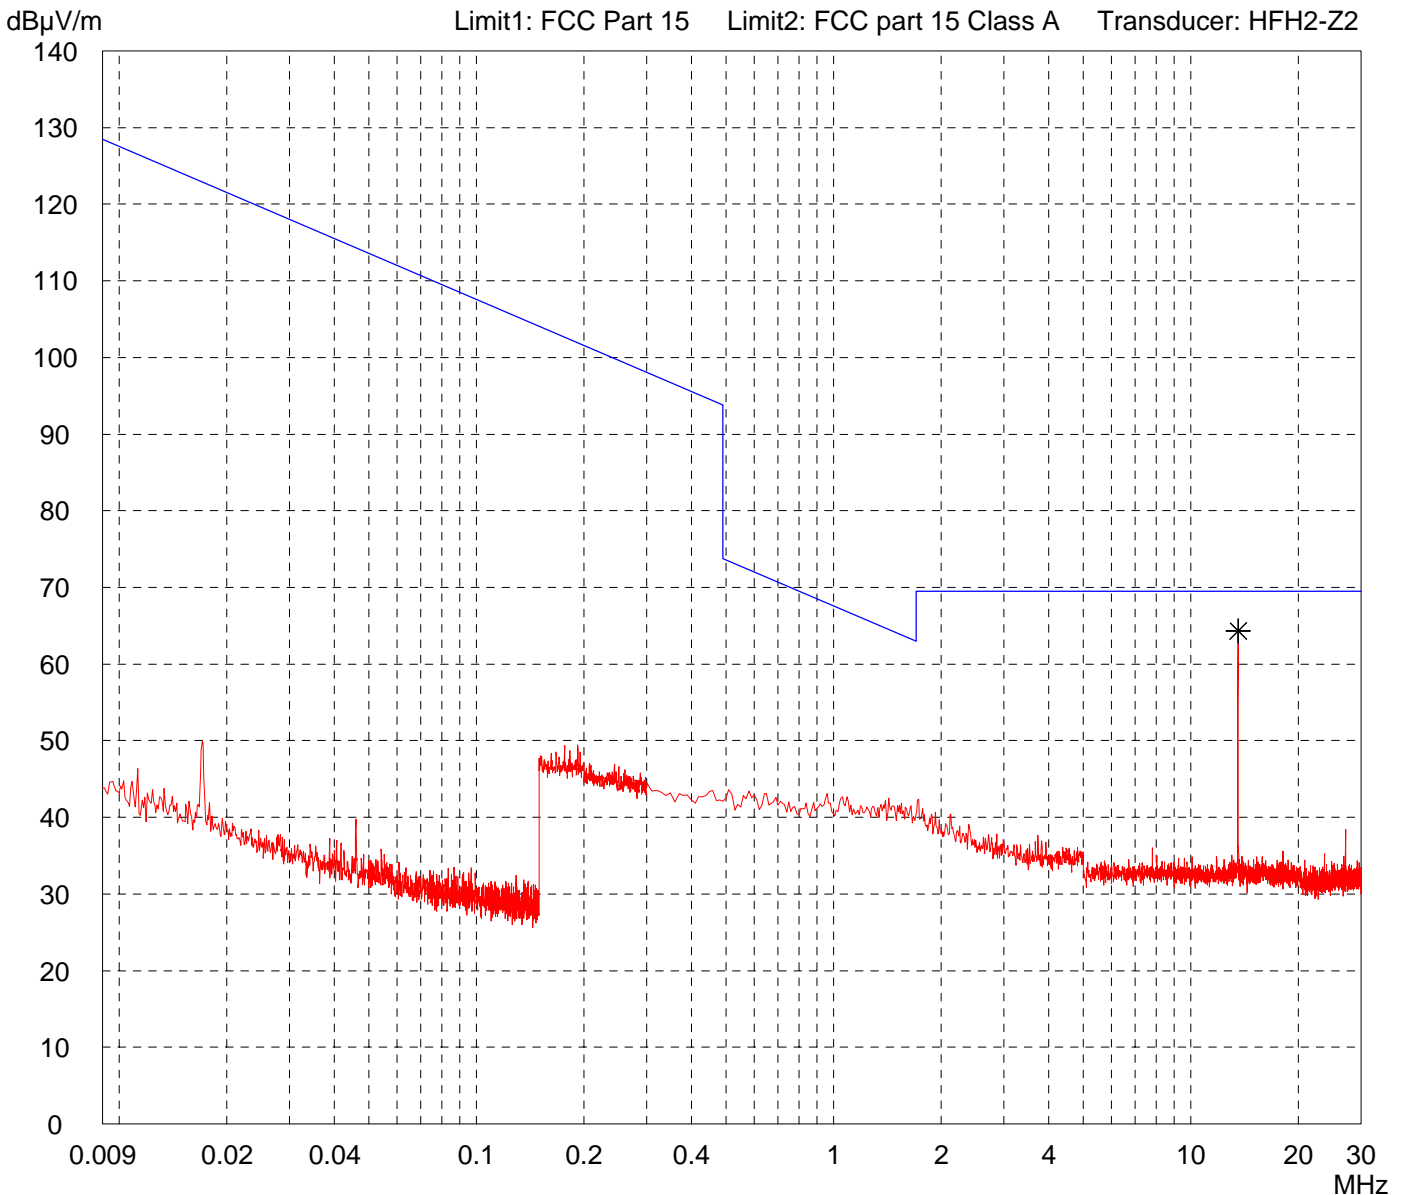


|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


|  |  |
|--|--|
| Model:<br>sd605                                | Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd647<br><br>- transmitting continuously |
| Serial no.:<br>D052900585                      |  |
| Applicant:<br>SKIDATA AG                       |  |
| Test site:<br>Fully anechoic room, cabin no. 2 |  |
| Tested on:<br>Test distance 3 metres           |  |
| Date of test:<br>2005-09-19                    | Operator:<br>M. Steindl  |
| Test performed:<br>by hand                     | File name:<br>default.emi  |
| Detector:<br>Peak                              | List of values:<br>Selected by hand  |

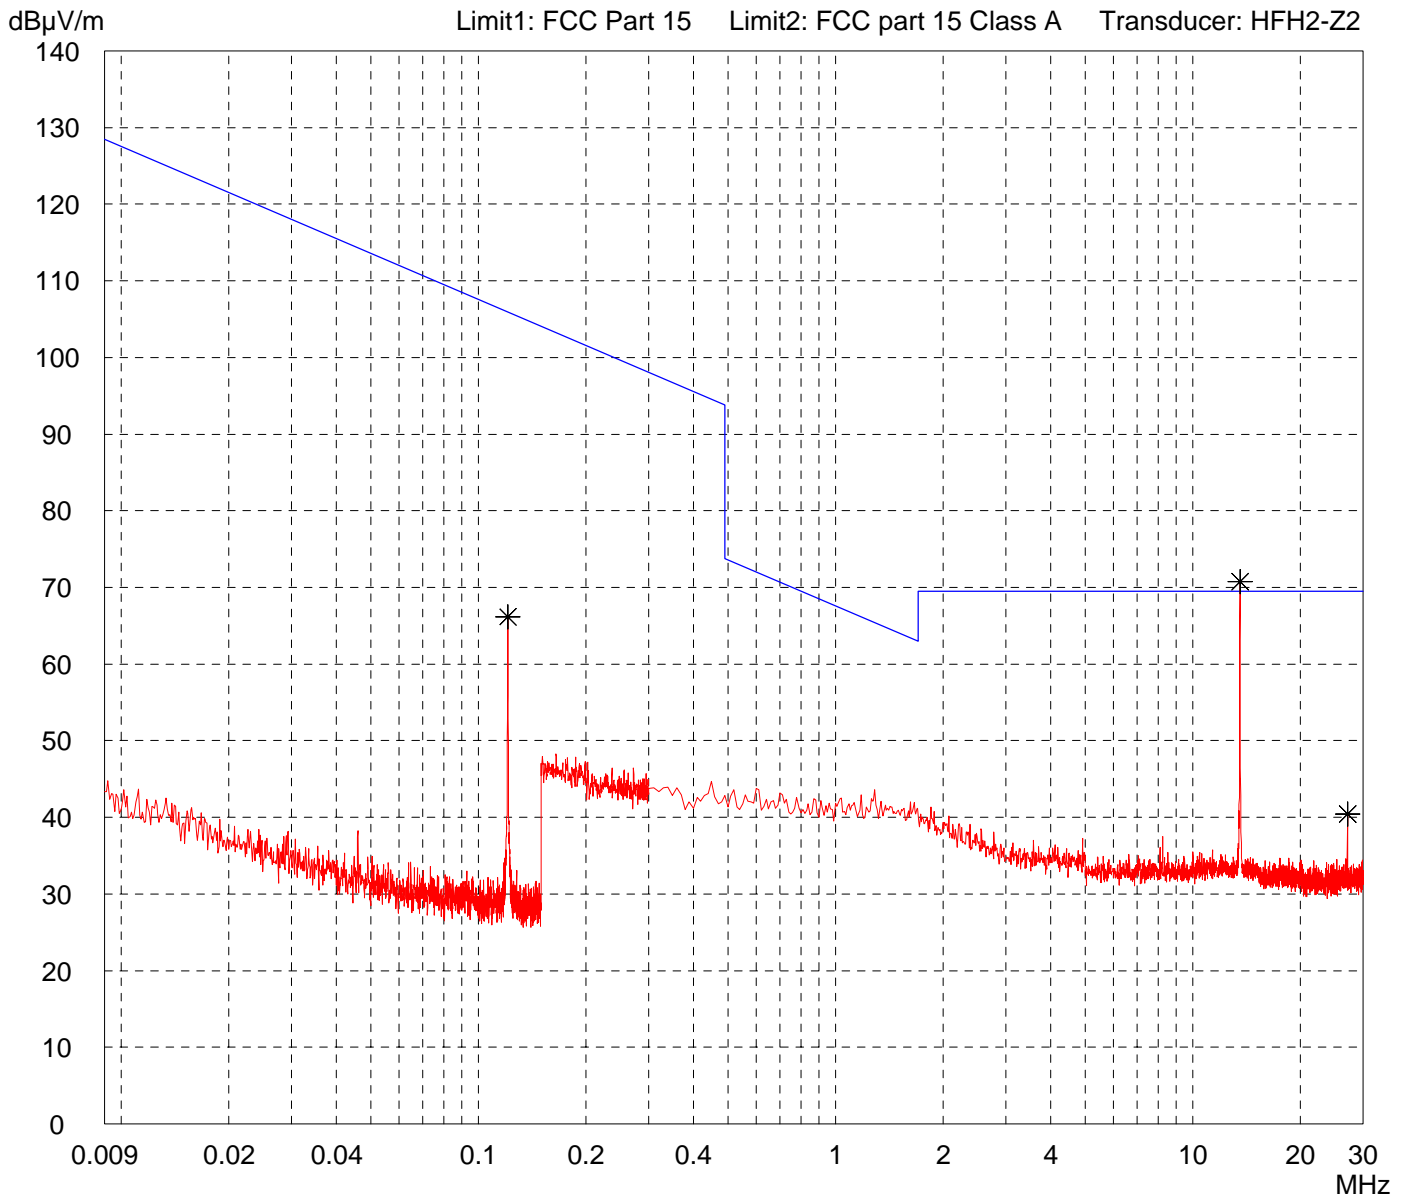

|                    |                              |                     |
|--------------------|------------------------------|---------------------|
| Result:<br>Prescan | Project file:<br>55426-50412 | Page    of    Pages |
|--------------------|------------------------------|---------------------|

# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|  |  |
|--|--|
| Model:<br>sd605                                | Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd647<br><br>- reading TAG (122 kHz) |
| Serial no.:<br>D052900585                      |  |
| Applicant:<br>SKIDATA AG                       |  |
| Test site:<br>Fully anechoic room, cabin no. 2 |  |
| Tested on:<br>Test distance 3 metres           |  |
| Date of test:<br>2005-09-19                    | Operator:<br>M. Steindl  |
| Test performed:<br>by hand                     | File name:<br>default.emi  |
| Detector:<br>Peak                              | List of values:<br>Selected by hand  |

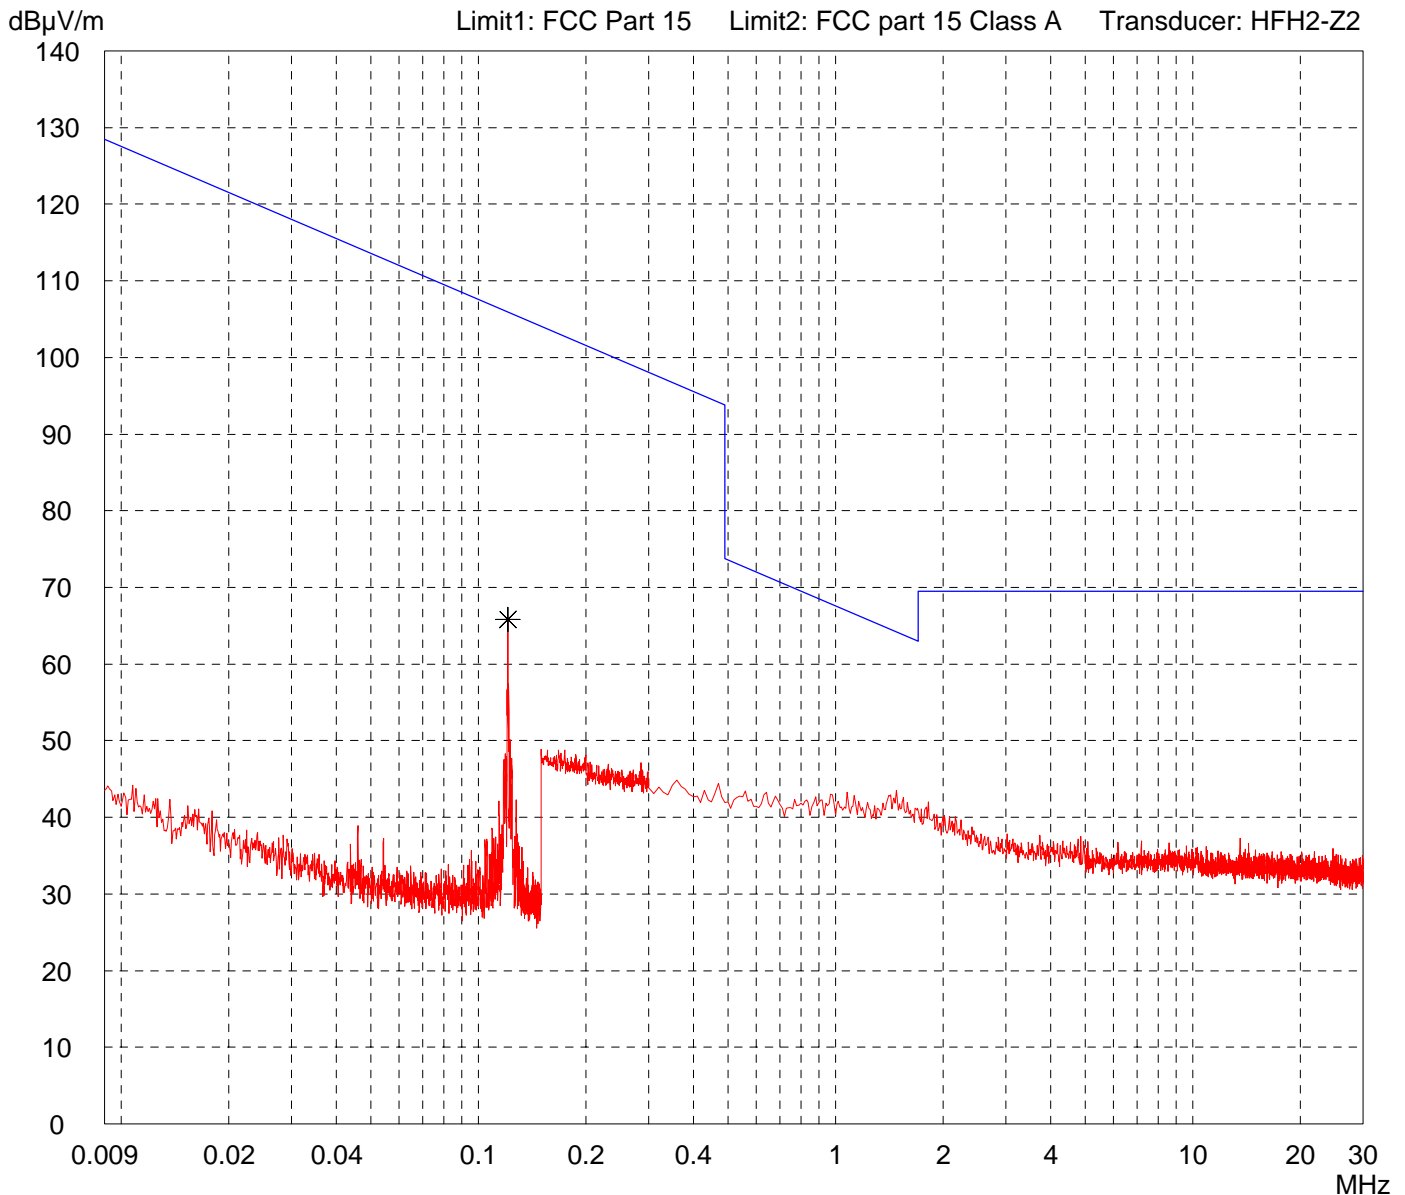

|                    |                              |                     |
|--------------------|------------------------------|---------------------|
| Result:<br>Prescan | Project file:<br>55426-50412 | Page    of    Pages |
|--------------------|------------------------------|---------------------|

# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
by hand


File name:  
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd647
- reading TAG (13.56 MHz)

Detector:  
Peak

List of values:  
Selected by hand

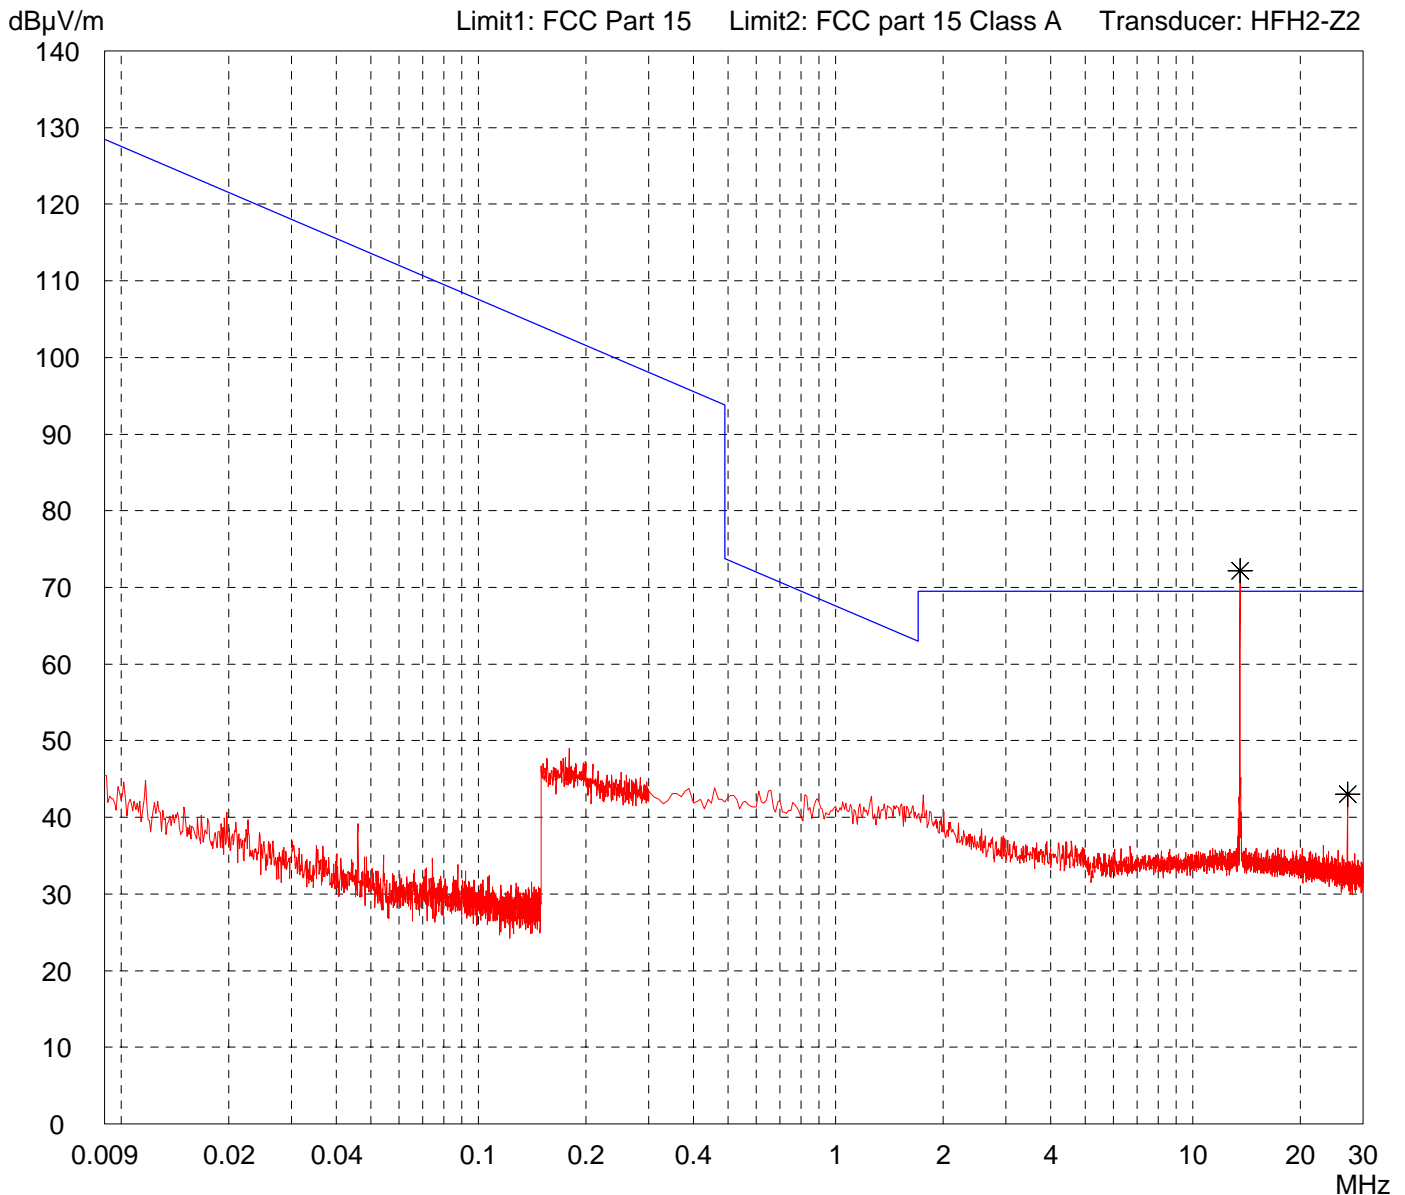

Result:  
Prescan

Project file:  
55426-50412

Page    of    Pages

# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
by hand


File name:  
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd648
- transmitting continuously

Detector:  
Peak

List of values:  
Selected by hand

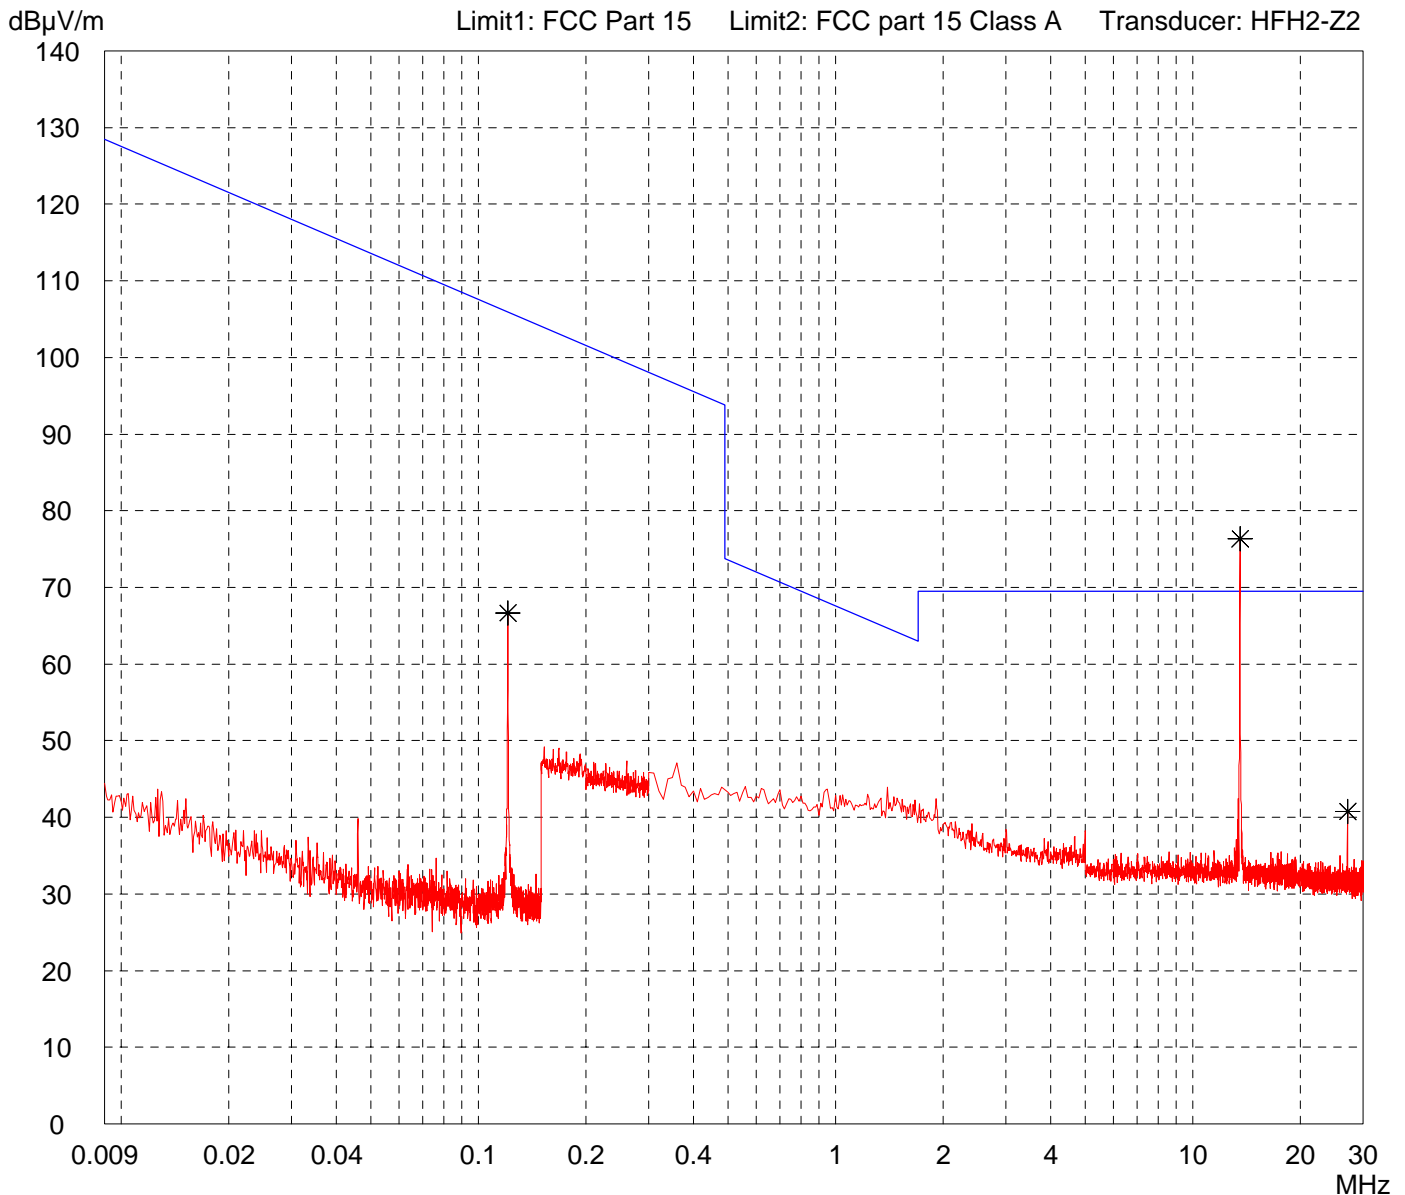

Result:  
Prescan

Project file:  
55426-50412

Page    of    Pages


# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|  |                           |
|--|---------------------------|
| Model:<br>sd605                                |                           |
| Serial no.:<br>D052900585                      |                           |
| Applicant:<br>SKIDATA AG                       |                           |
| Test site:<br>Fully anechoic room, cabin no. 2 |                           |
| Tested on:<br>Test distance 3 metres           |                           |
| Date of test:<br>2005-09-19                    | Operator:<br>M. Steindl   |
| Test performed:<br>by hand                     | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd648<br><br>- reading TAG (122 kHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

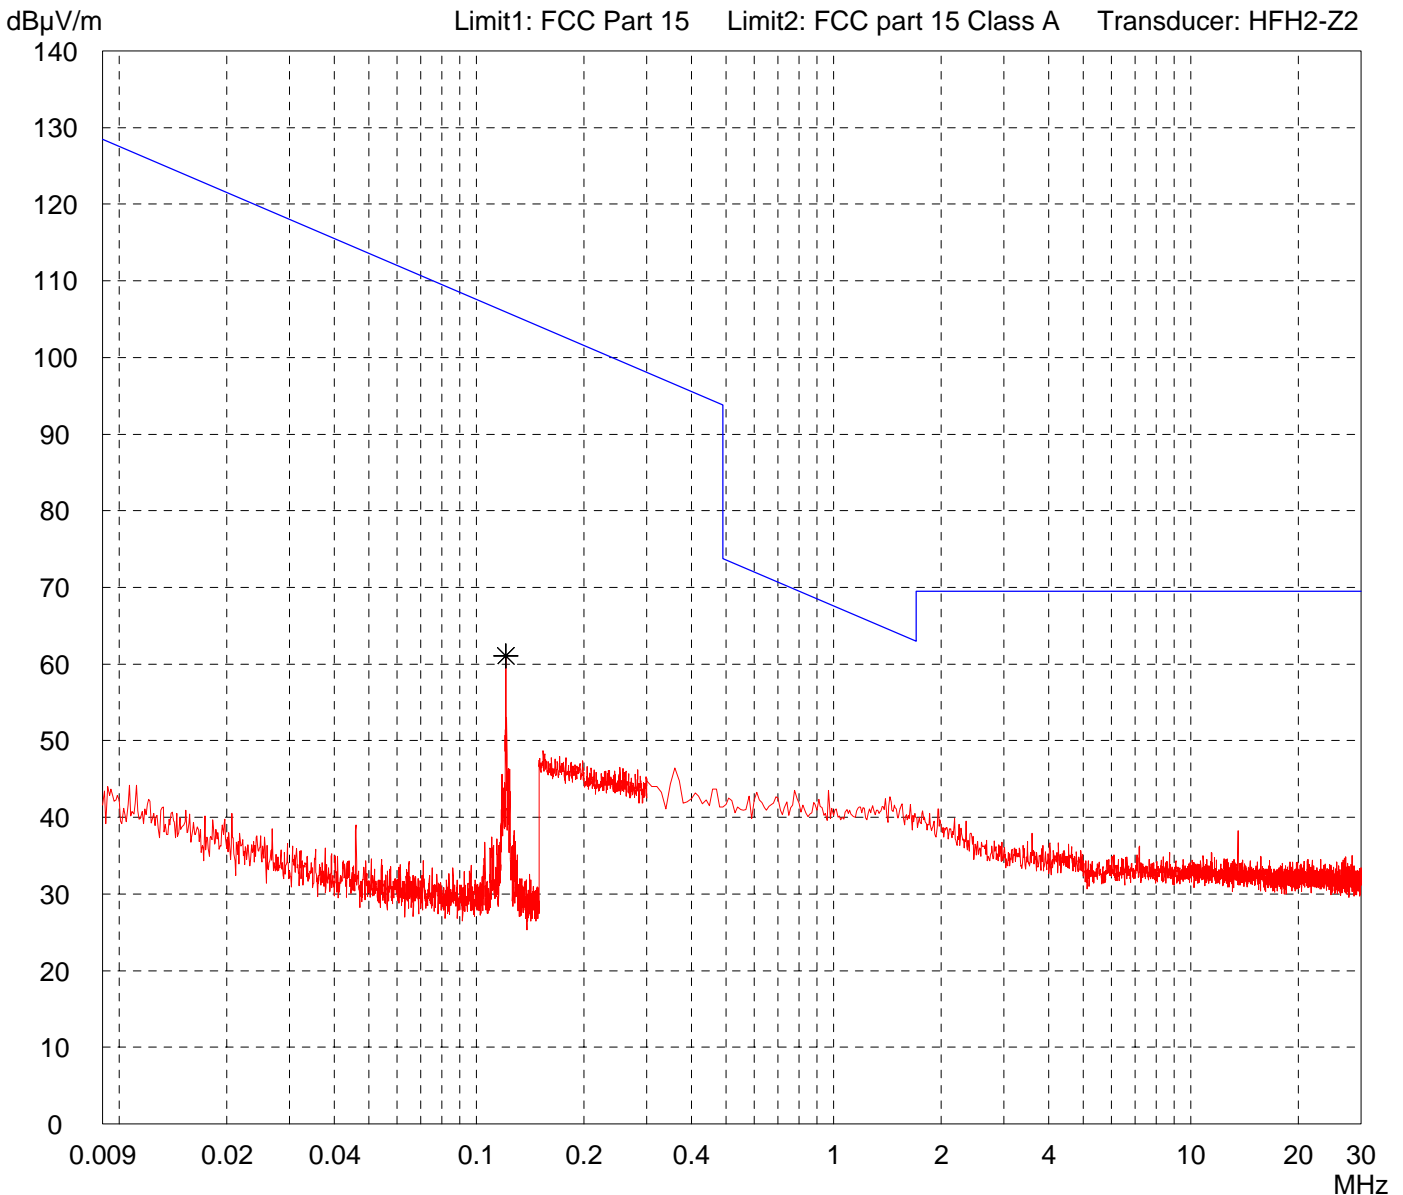

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                         |
|------------------------------|-------------------------|
| Project file:<br>55426-50412 | Page      of      Pages |
|------------------------------|-------------------------|

# Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
by hand


File name:  
default.emi

Comment:

- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd648
- reading TAG (13.56 MHz)

Detector:  
Peak

List of values:  
Selected by hand

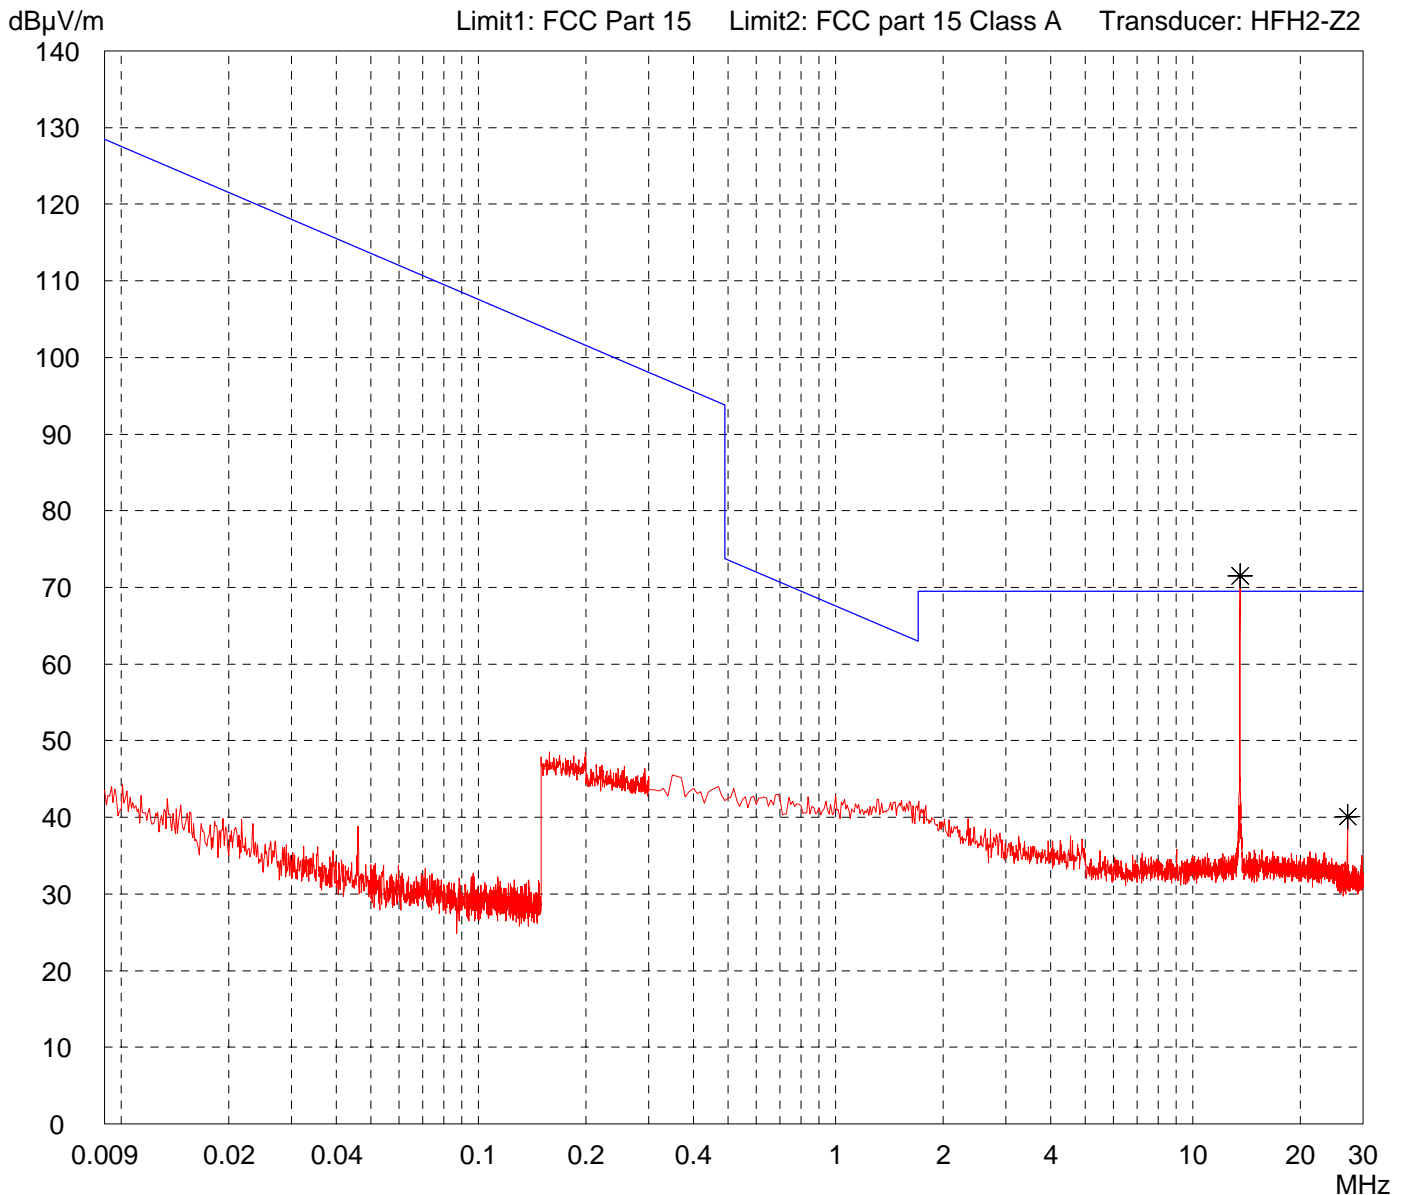

Result:  
Prescan

Project file:  
55426-50412

Page    of    Pages


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd611<br><br>- transmitting continuously |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

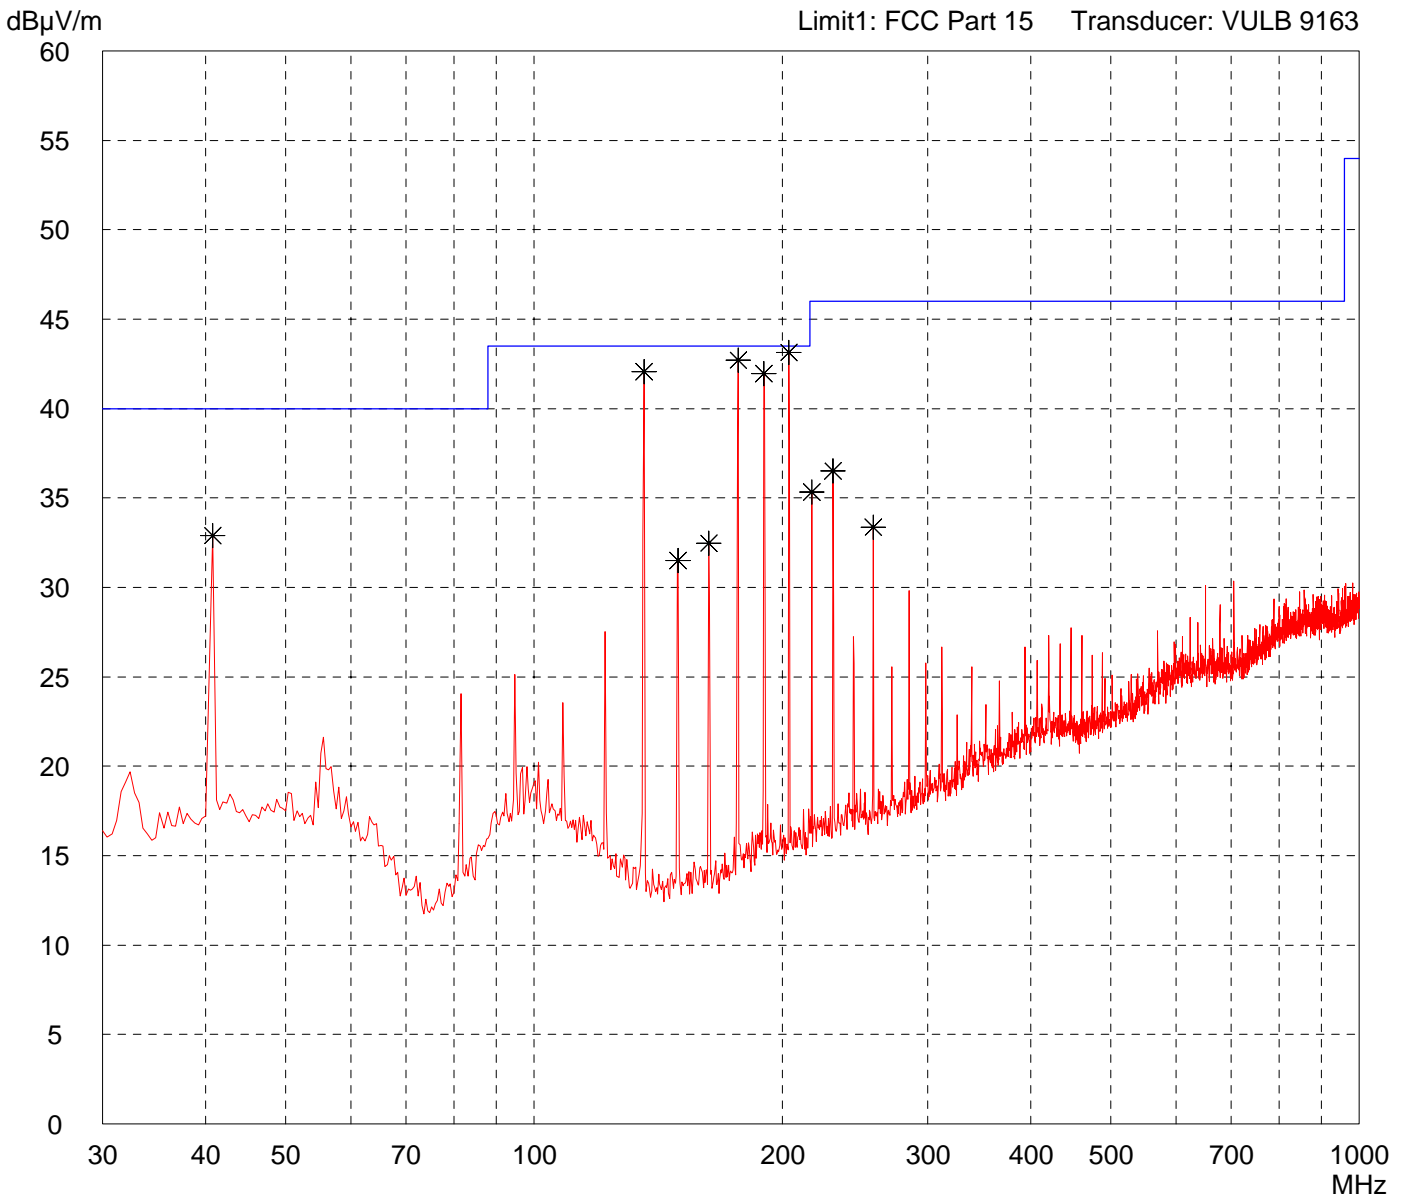

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|




# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|                             |  |
|-----------------------------|--|
| Comment:                    |  |
| - DC 5 V power supply       |  |
| - Variant: Standard (V4.2)  |  |
| - Antenna: sd611            |  |
| - transmitting continuously |  |

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                 |              |
|---------------------------------|--------------|
| List of values:<br>10 dB Margin | 50 Subranges |
|---------------------------------|--------------|

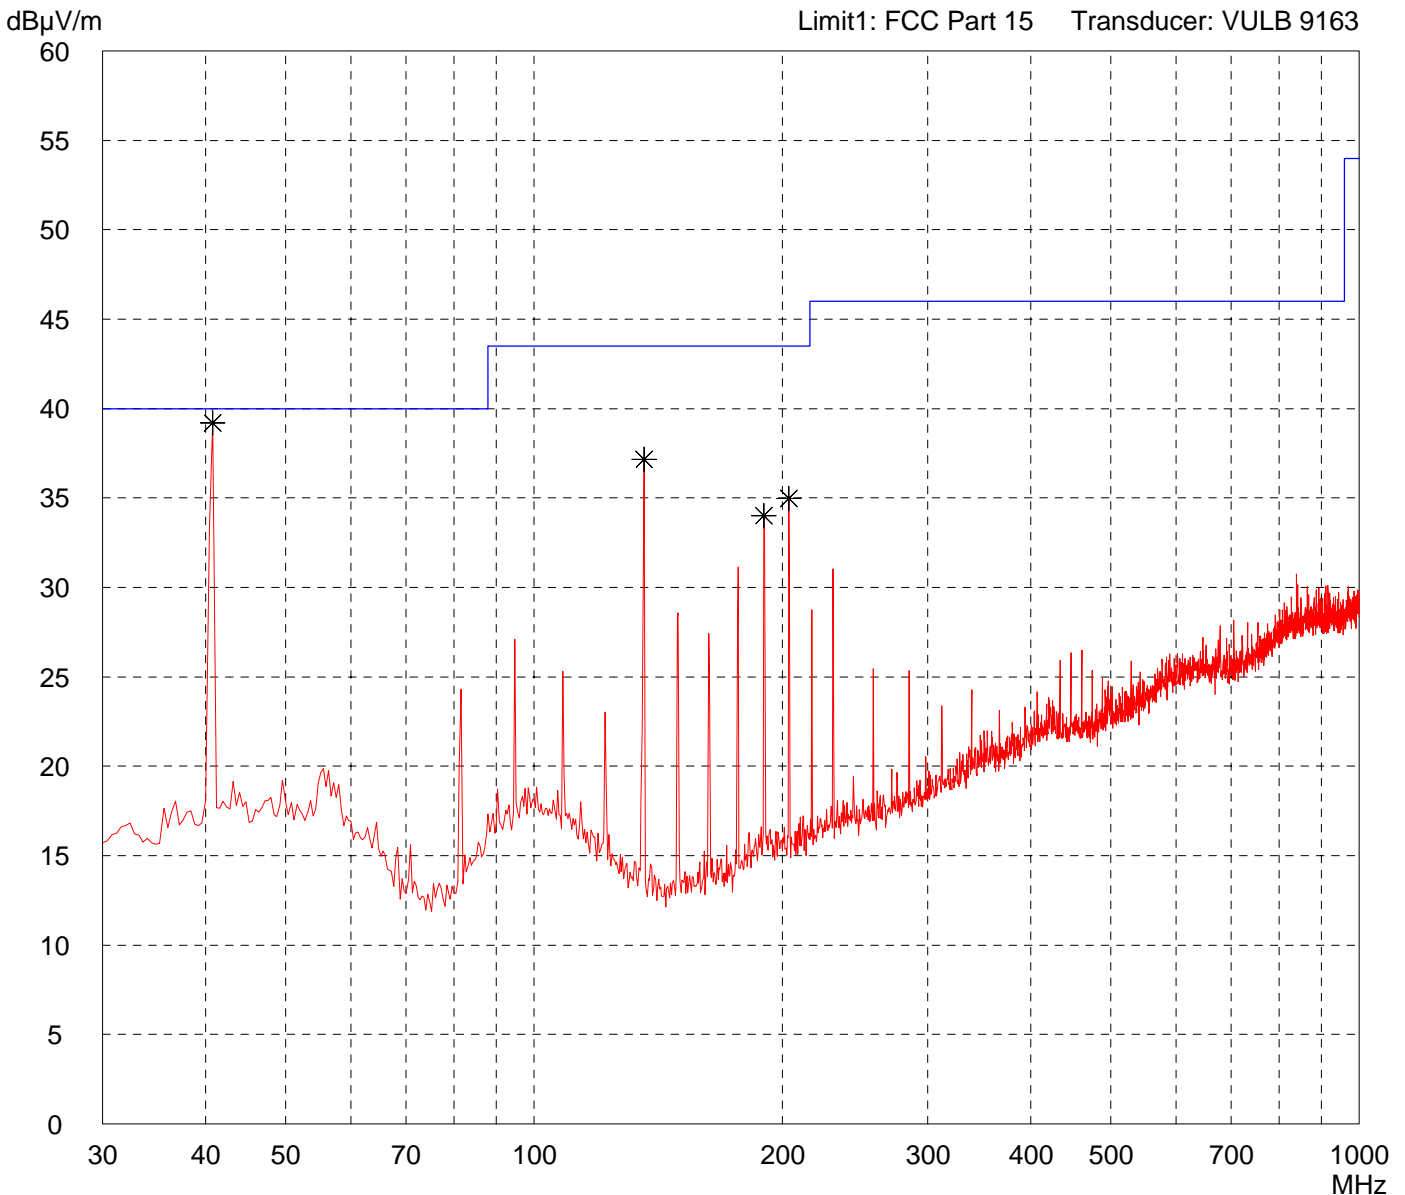

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd611<br><br>- reading TAG (13.56 MHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

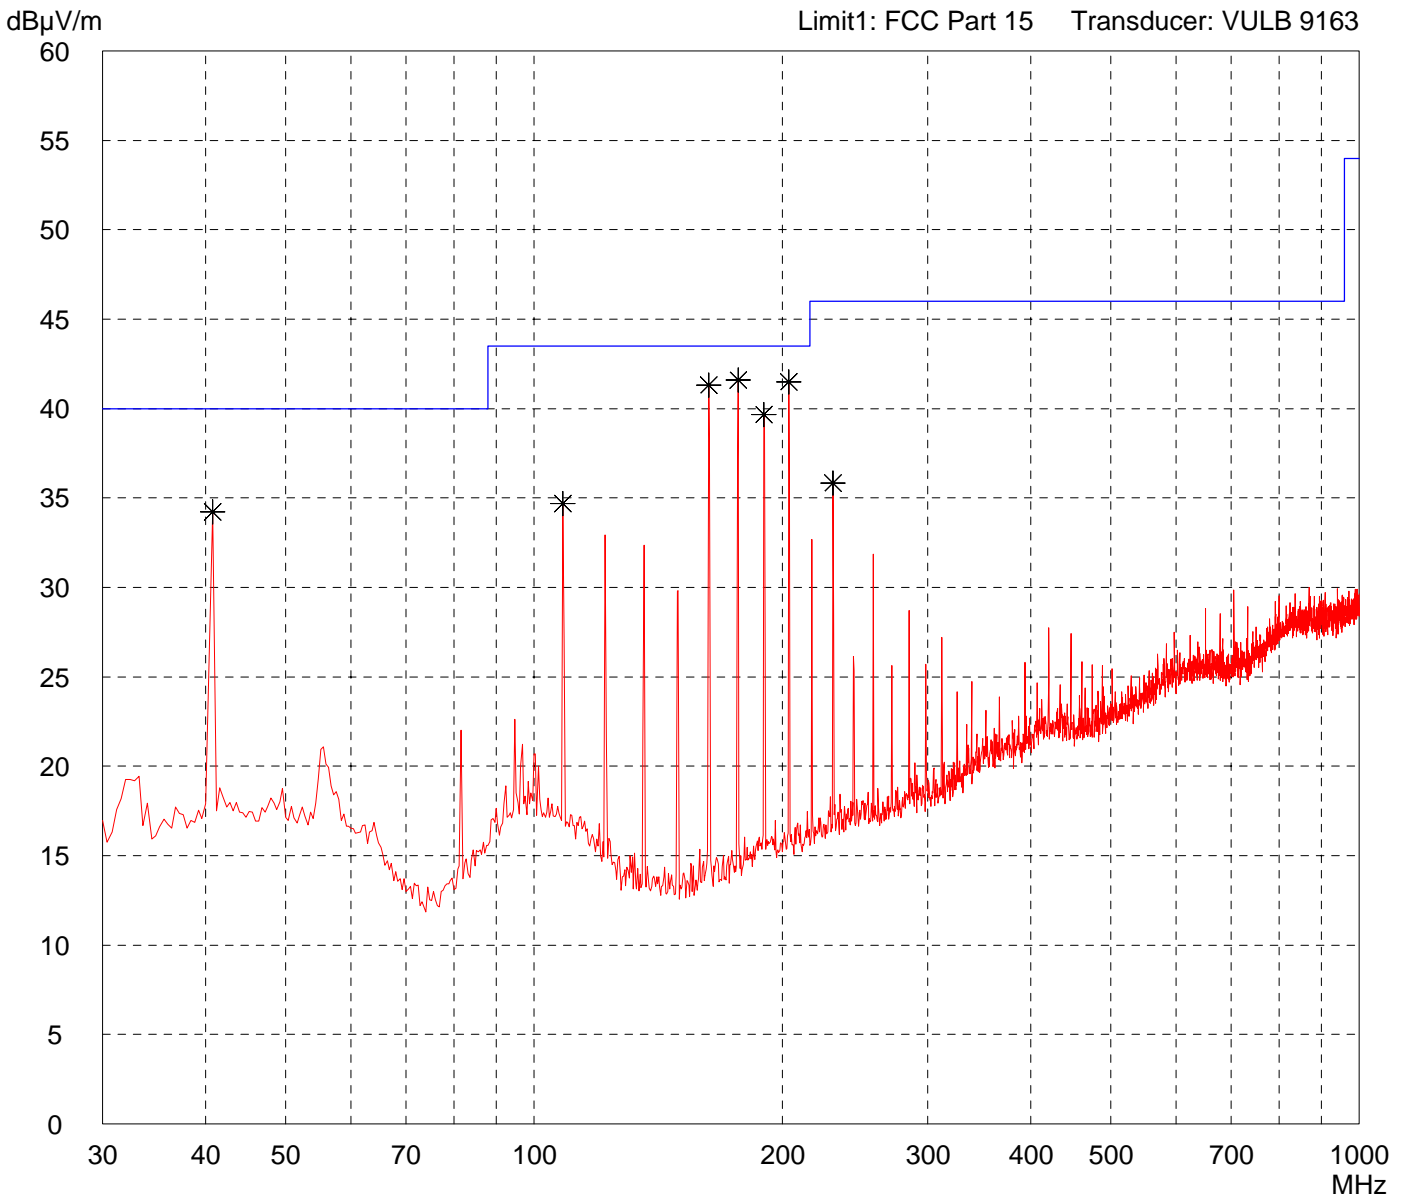

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd611<br><br>- reading TAG (13.56 MHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

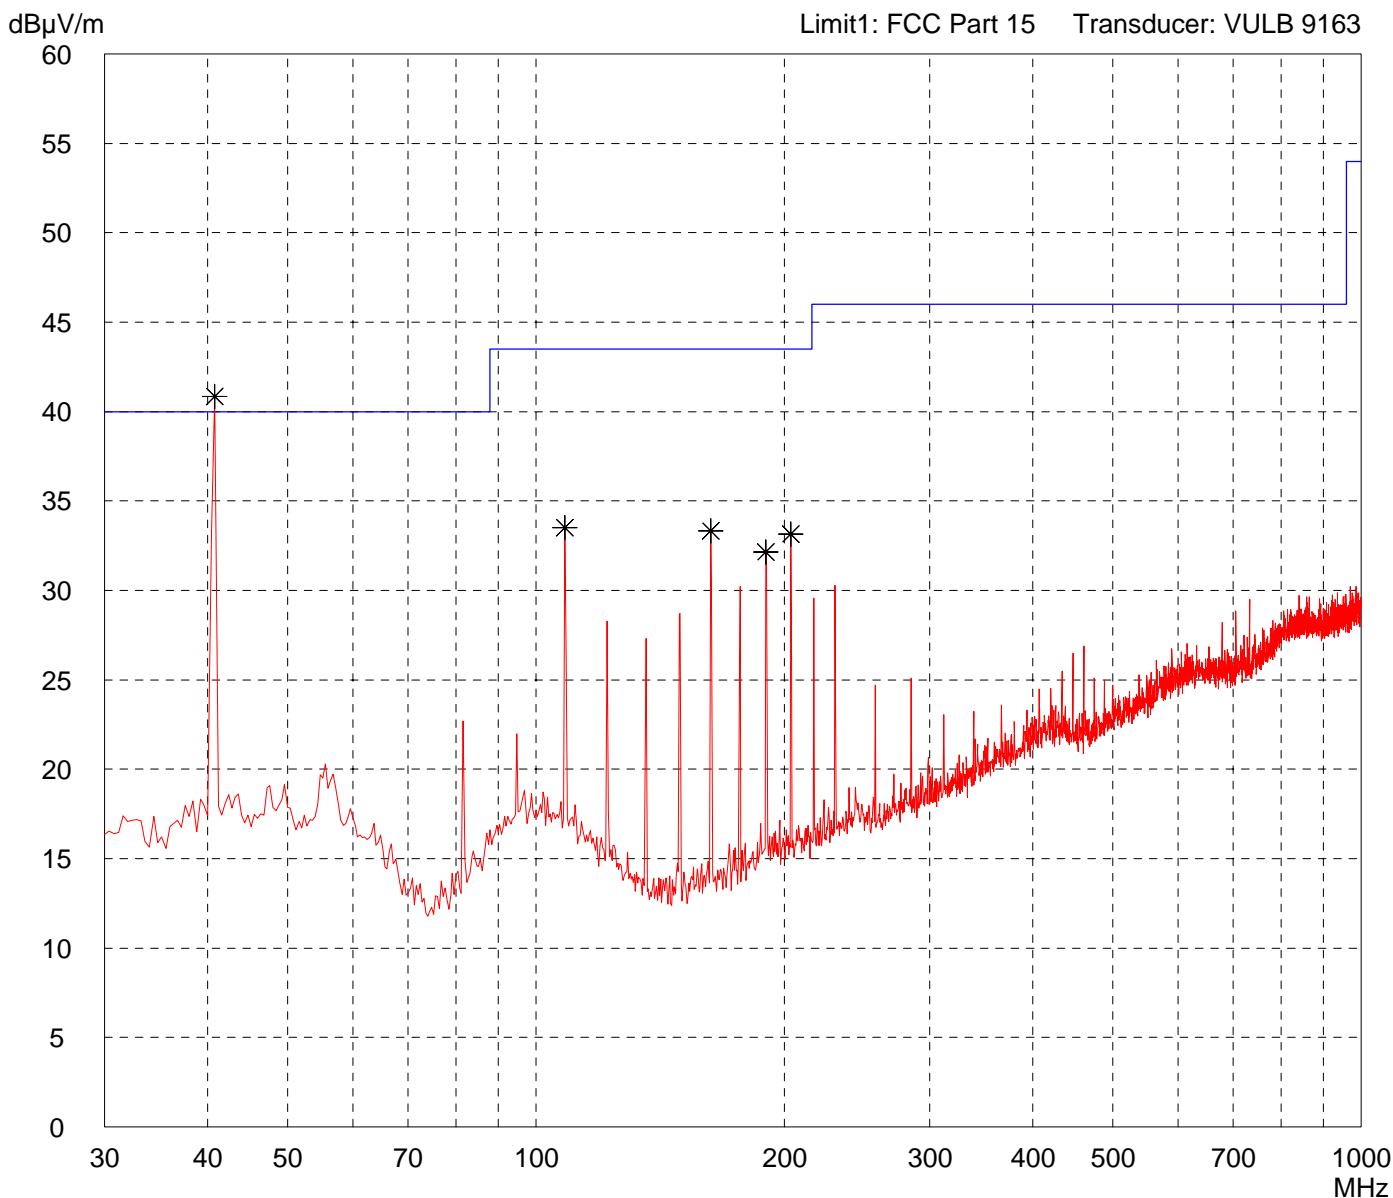

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres  
Horizontal Polarization

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
automatically

File name:  
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd611
- reading TAG (122 kHz)

Detector:  
Peak

List of values:  
Selected by hand

dB $\mu$ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

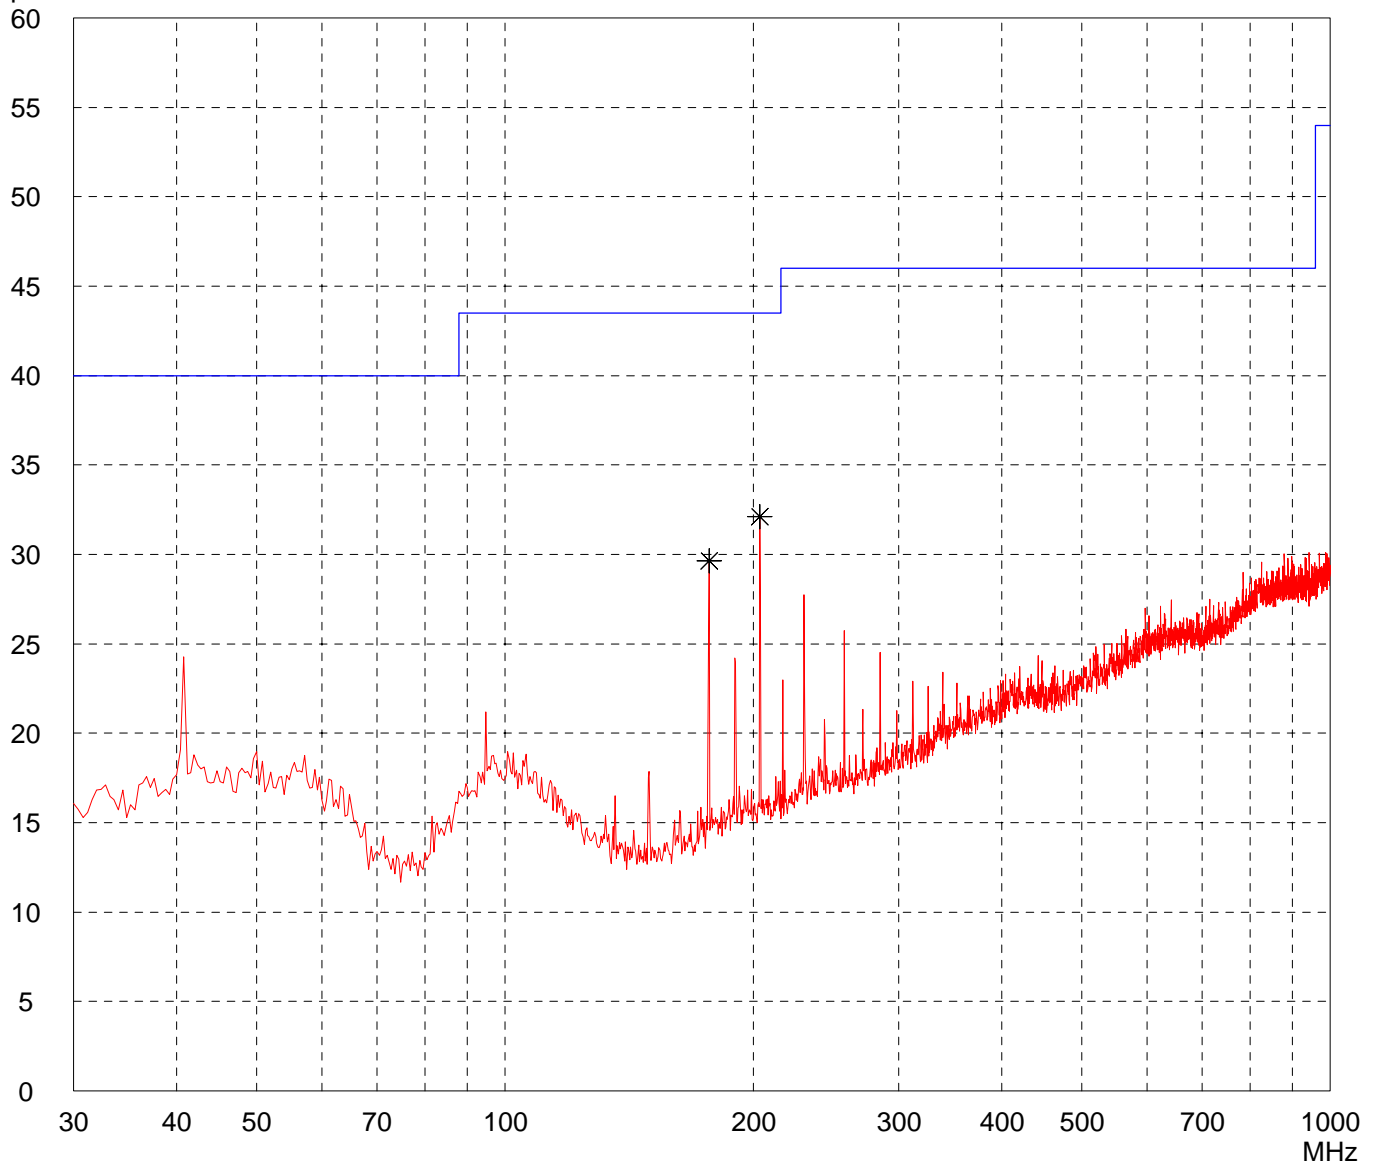

Result:  
Prescan

Project file:  
55426-50412

Page of Pages


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd611<br><br>- reading TAG (122 kHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

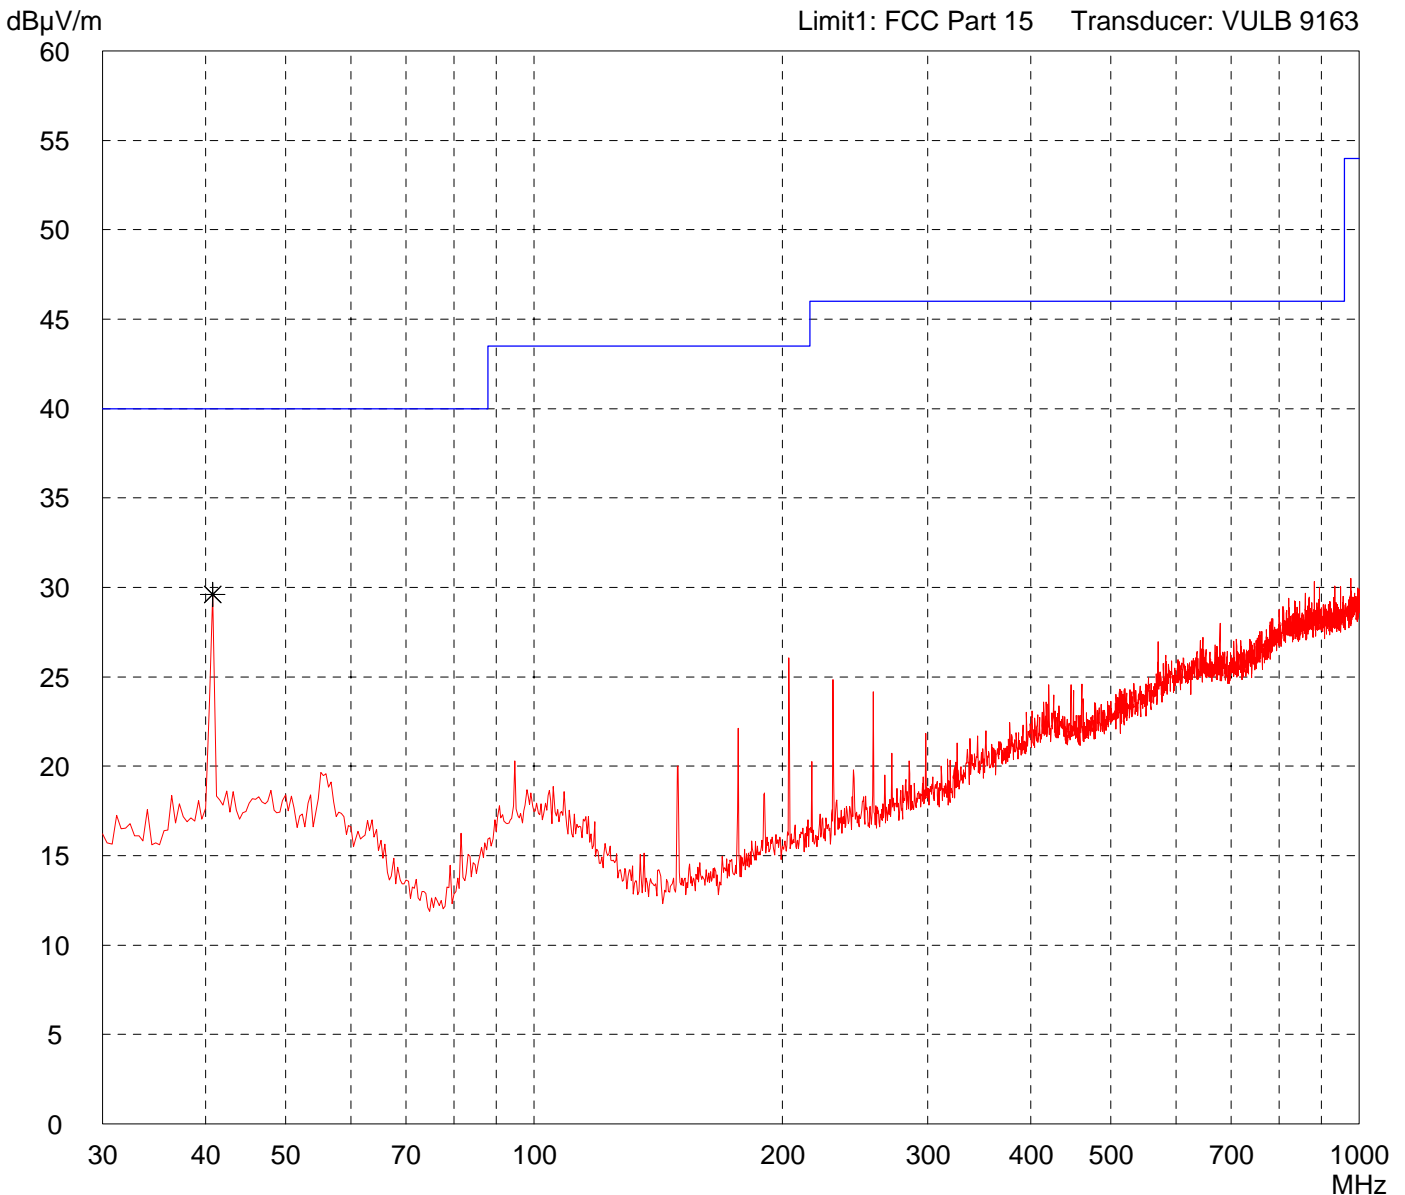

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd612<br><br>- transmitting continuously |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

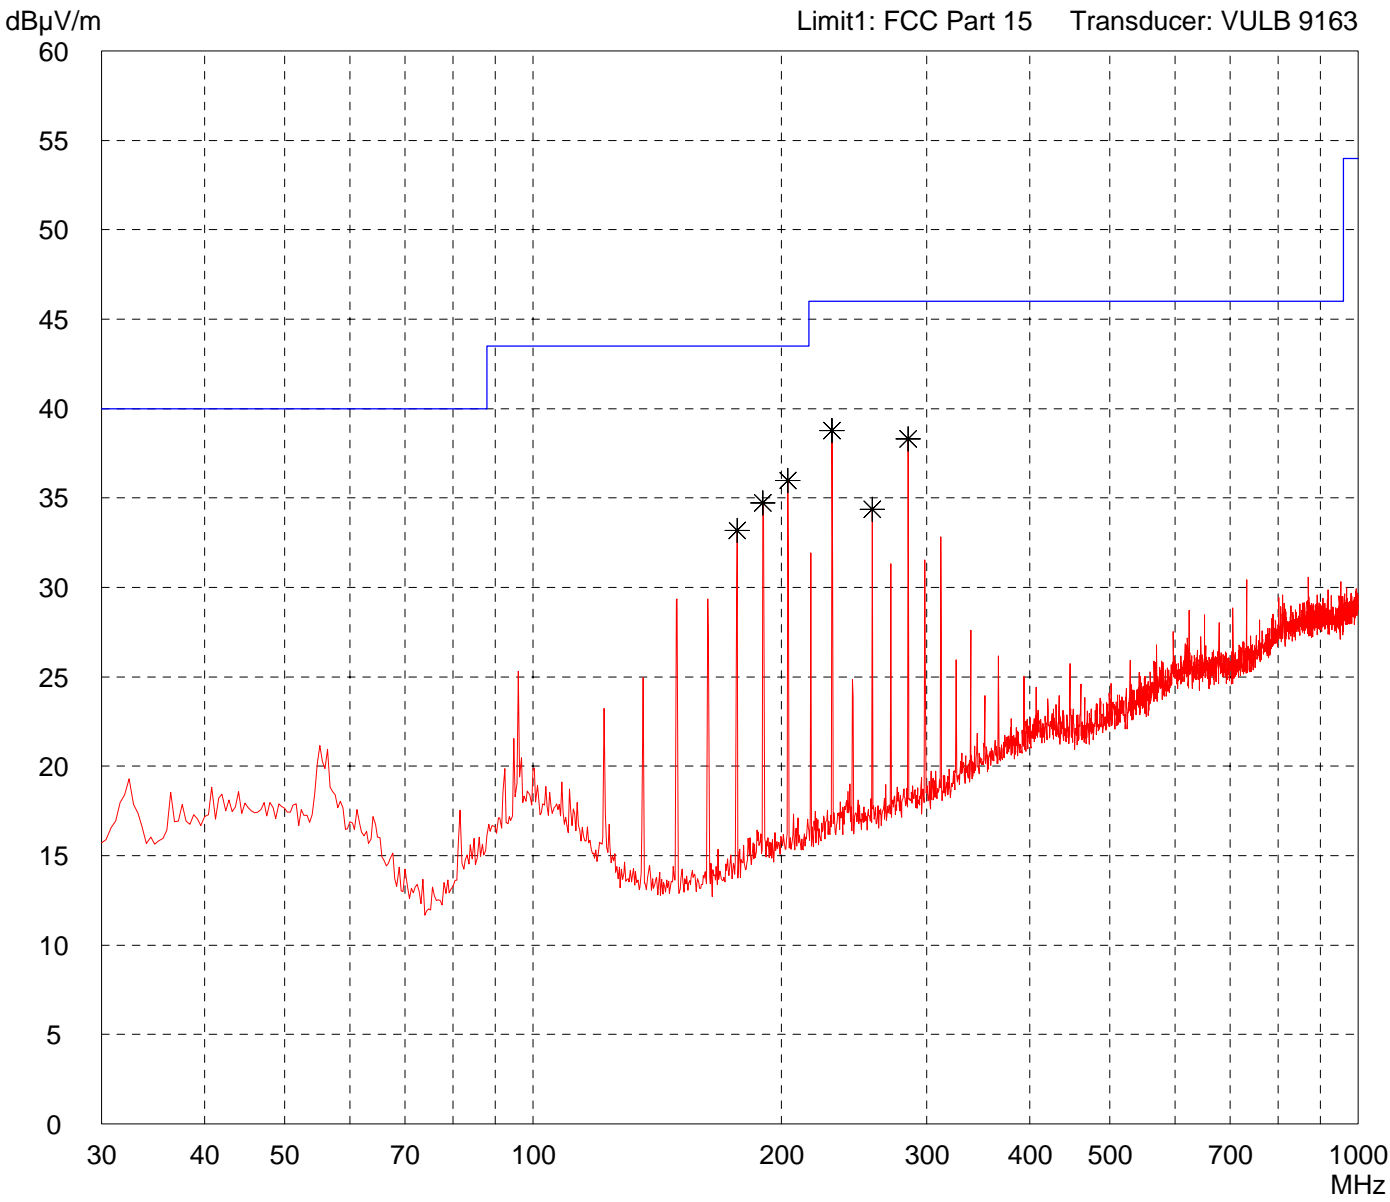

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd612<br><br>- transmitting continuously |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

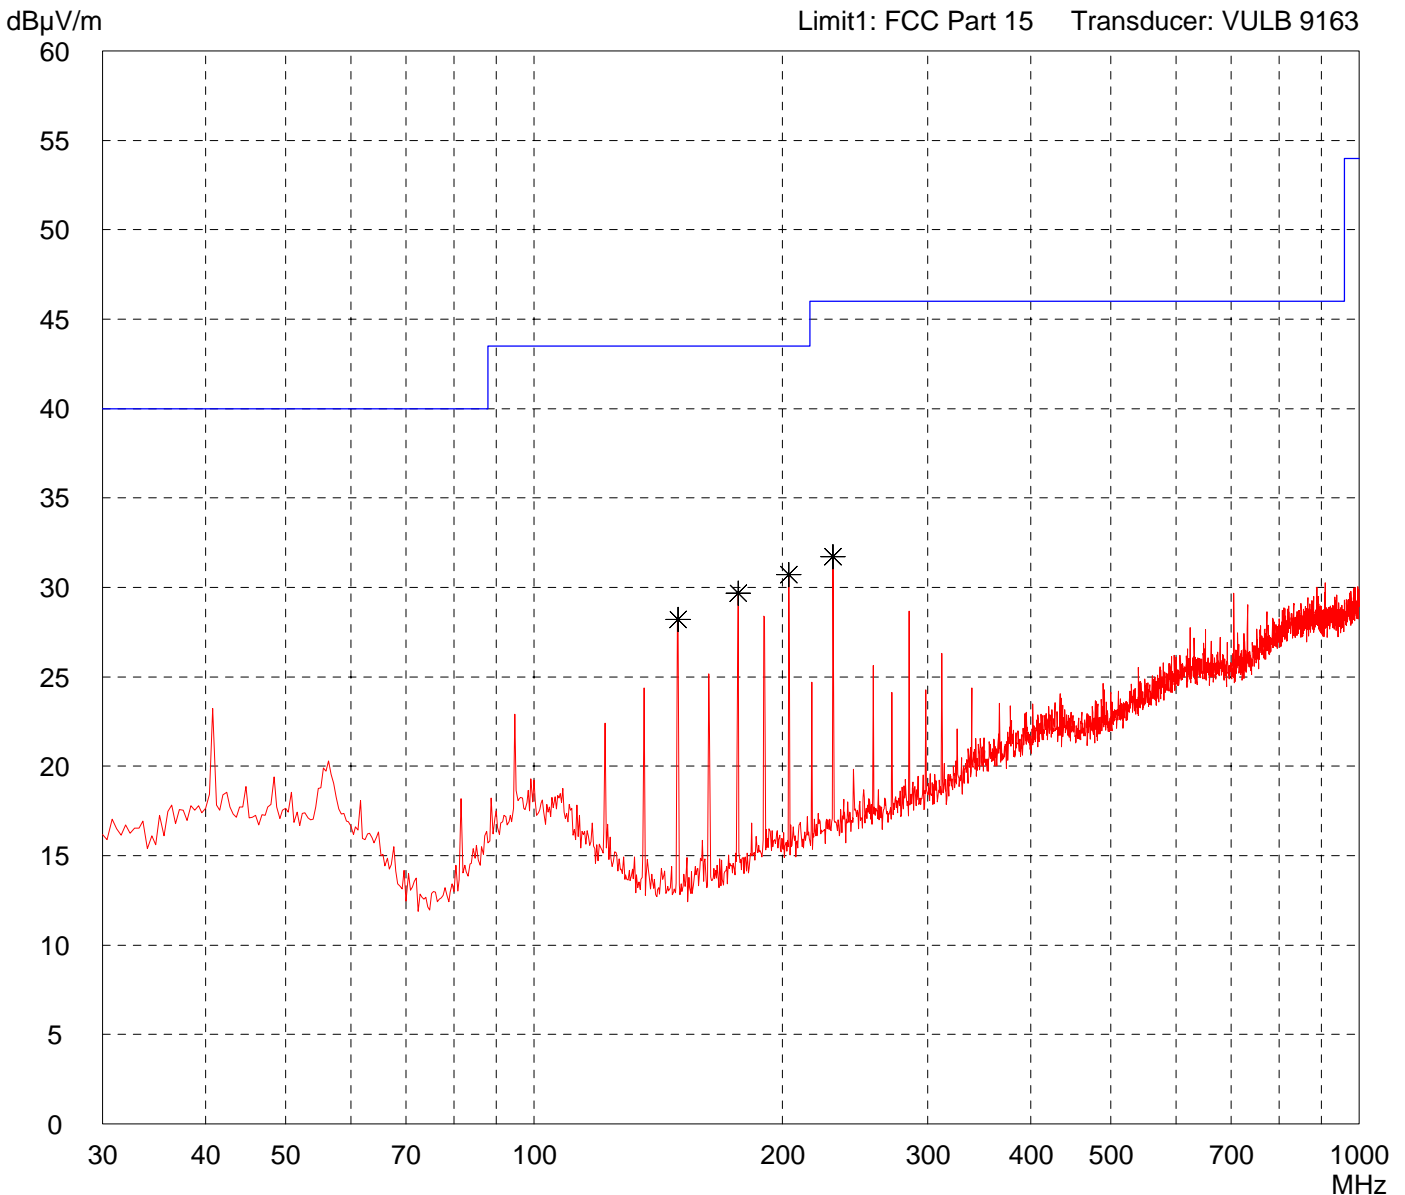

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd612<br><br>- reading TAG (122 kHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

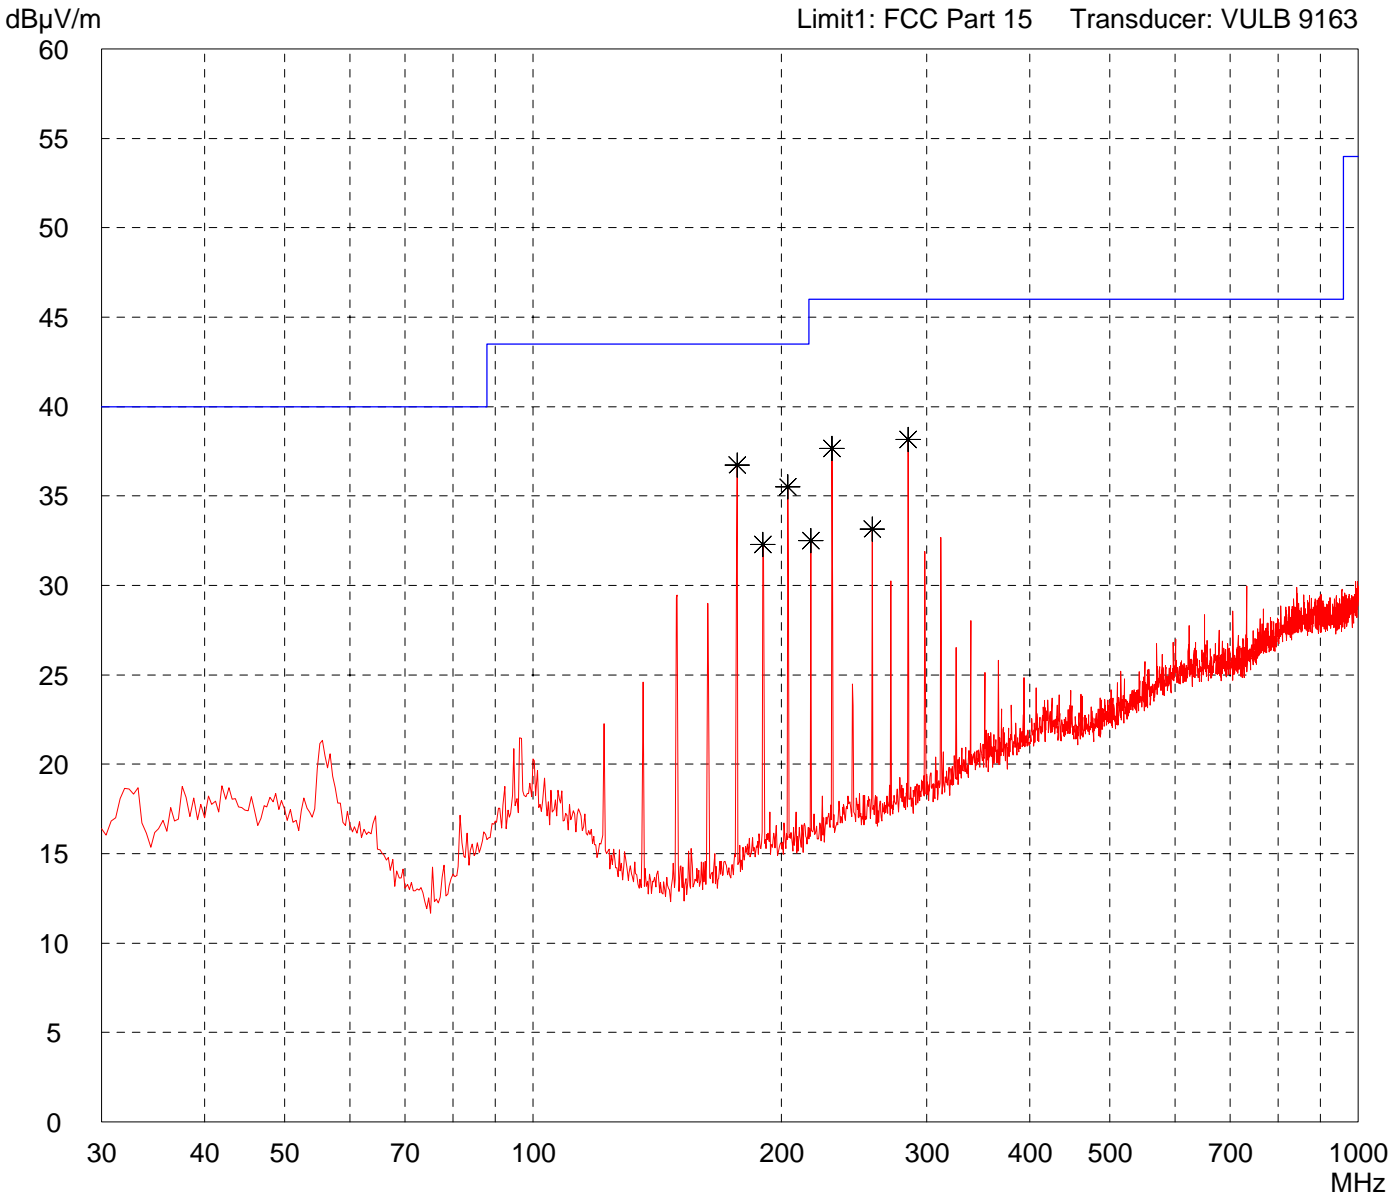

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|




# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd612<br><br>- reading TAG (122 kHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

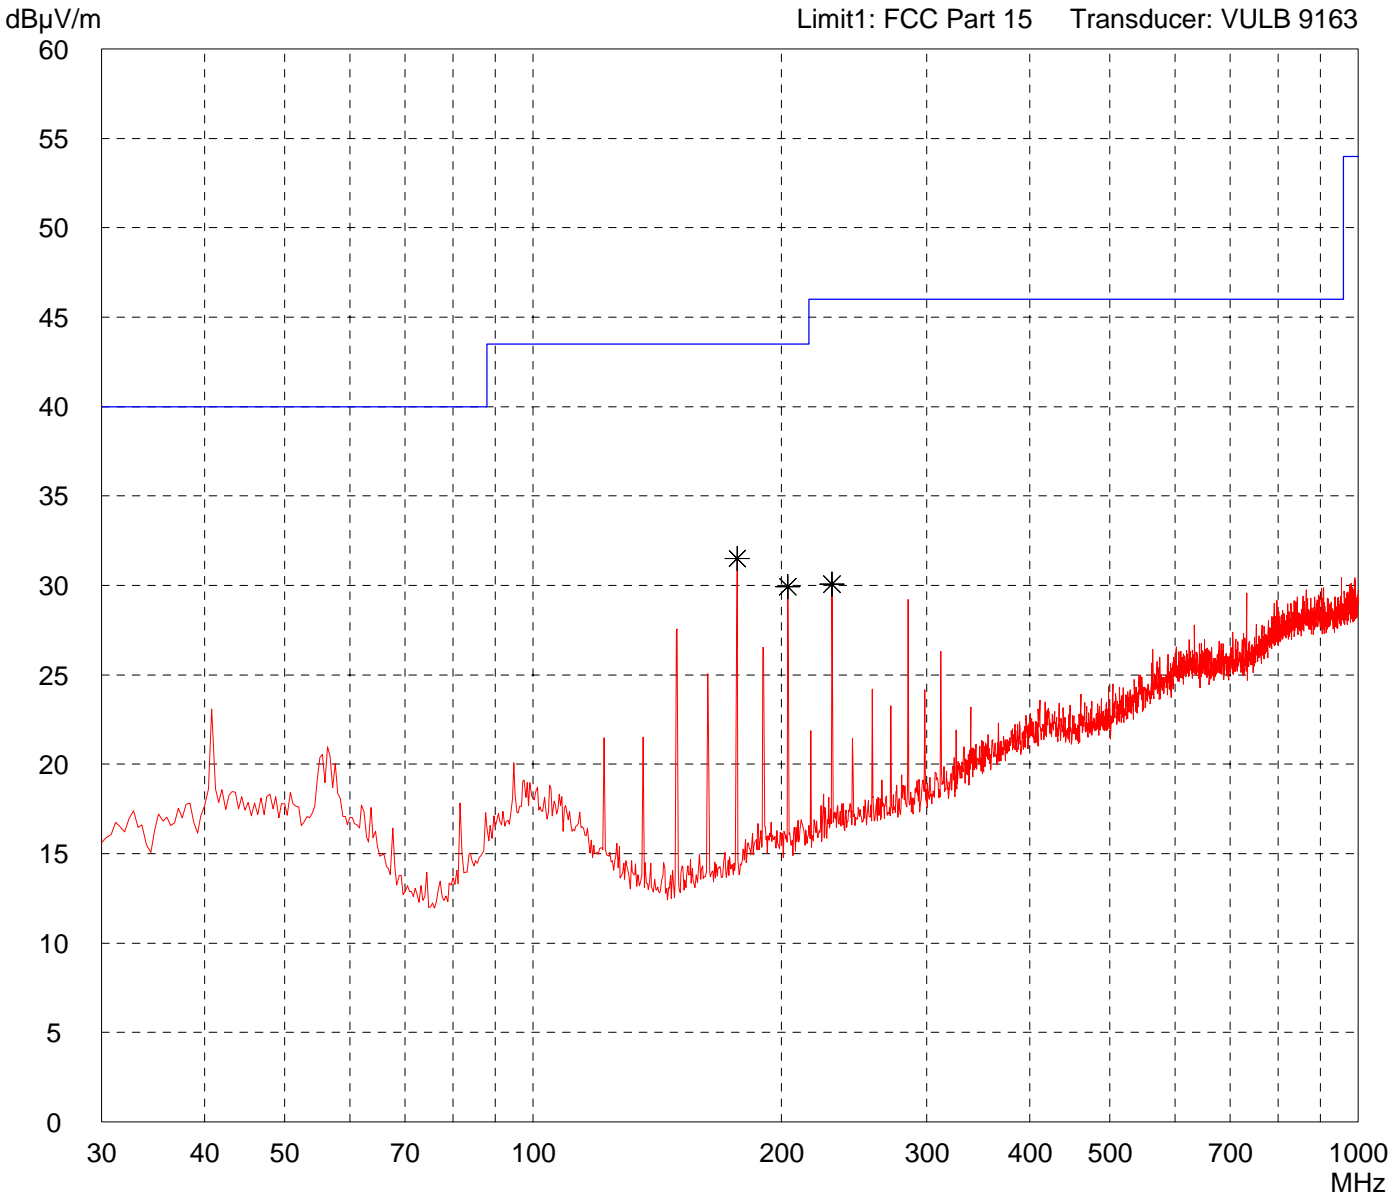

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd612<br><br>- reading TAG (13.56 MHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

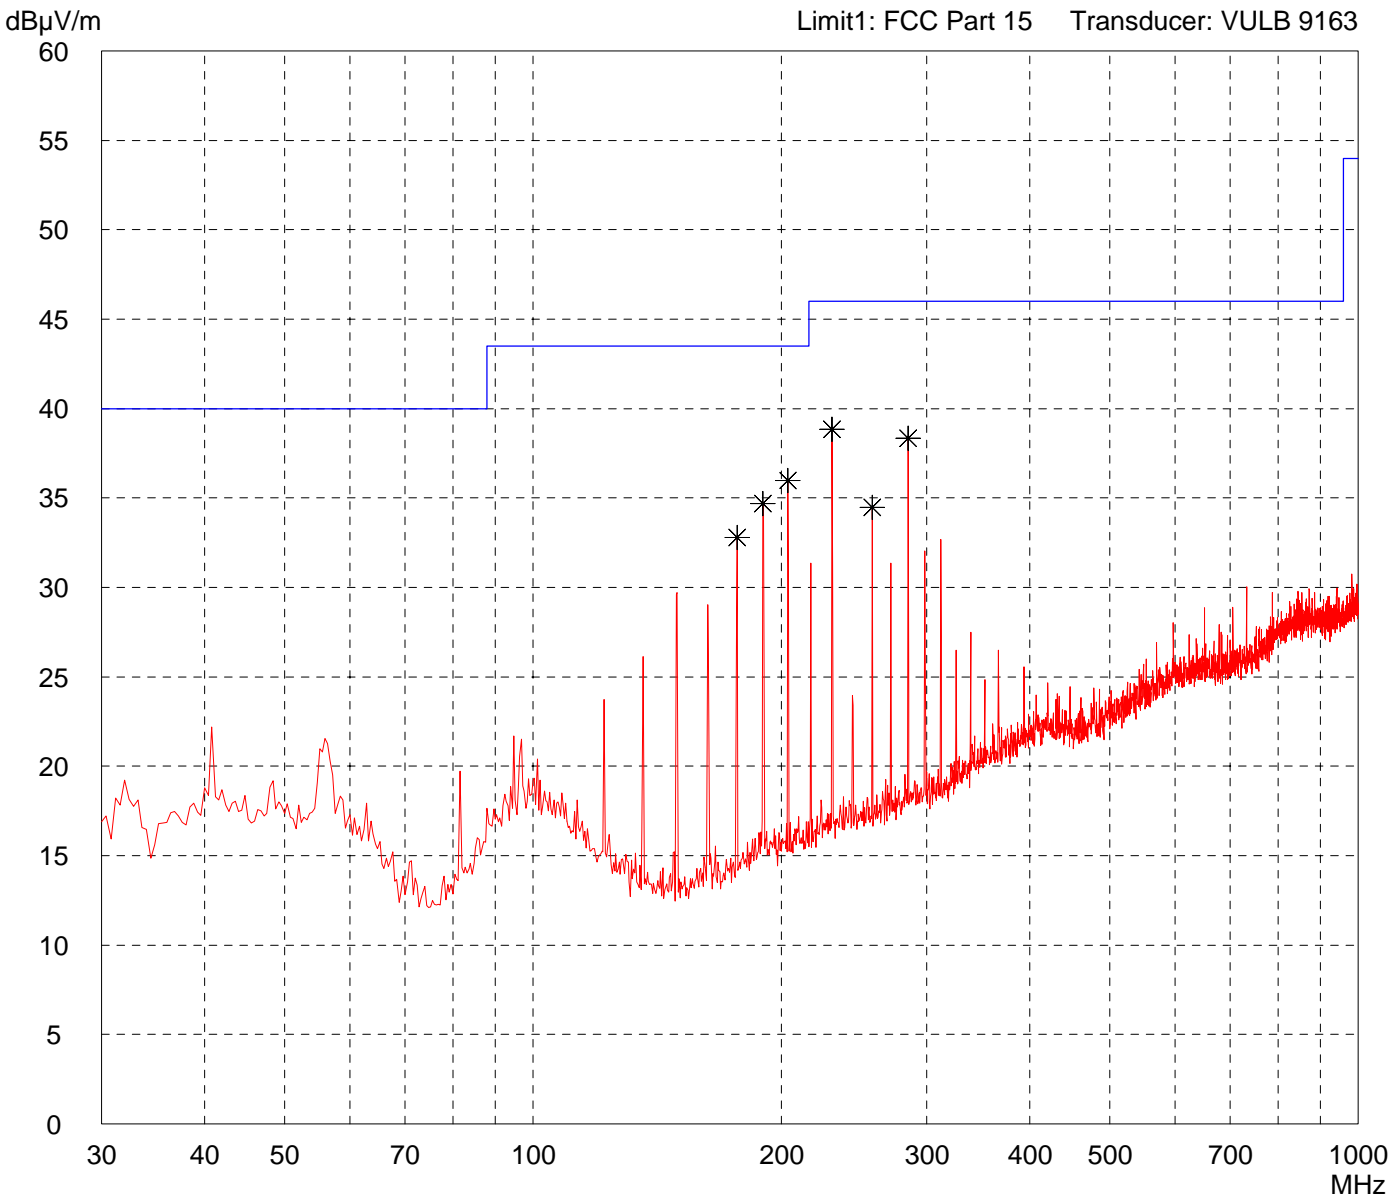

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd612<br><br>- reading TAG (13.56 MHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

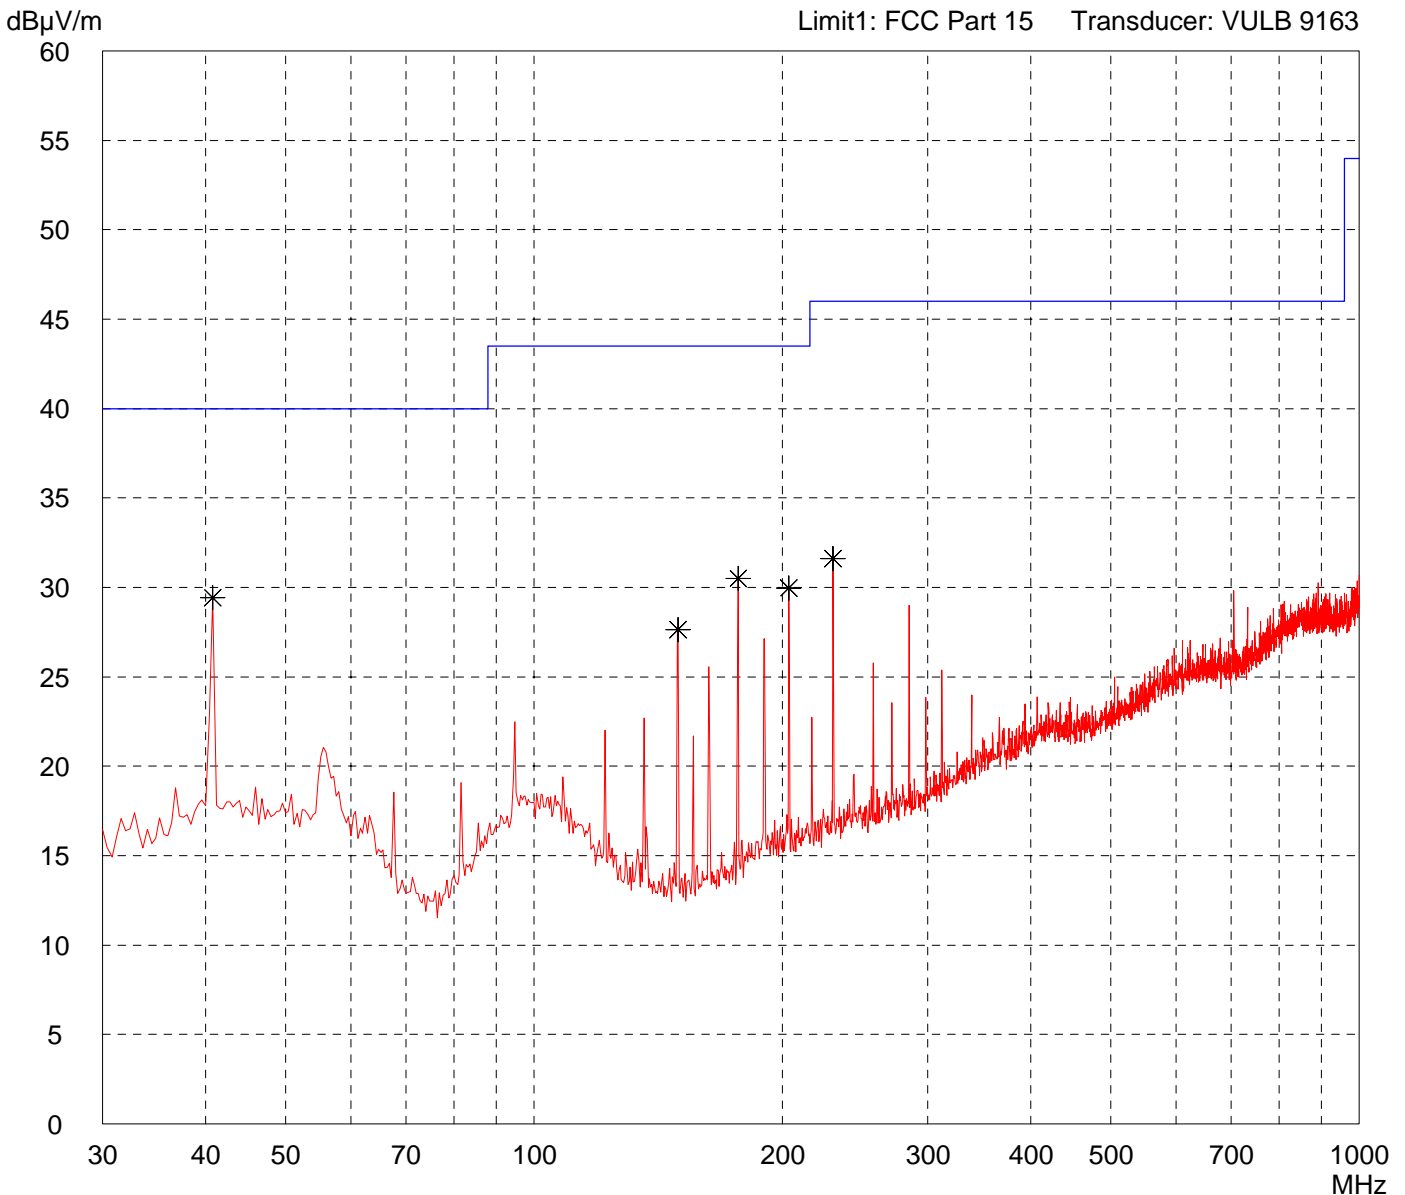

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd647<br><br>- transmitting continuously |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

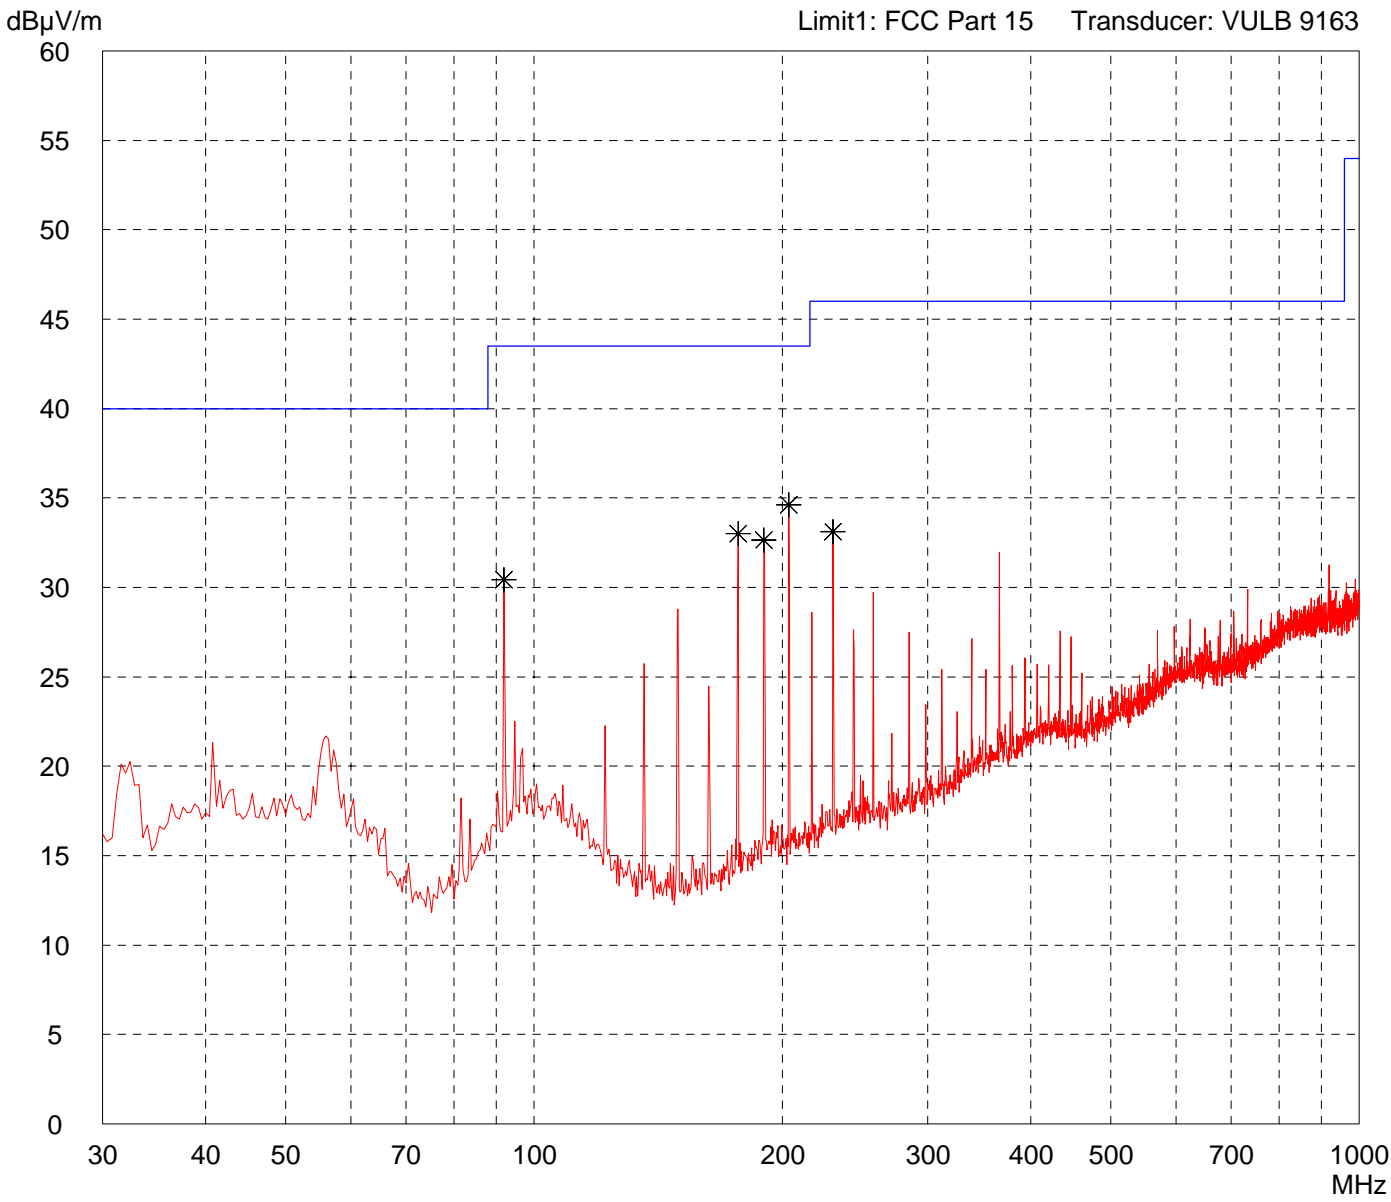

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres  
Vertical Polarization

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
automatically

File name:  
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd647
- transmitting continuously

Detector:  
Peak

List of values:  
Selected by hand

dB $\mu$ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

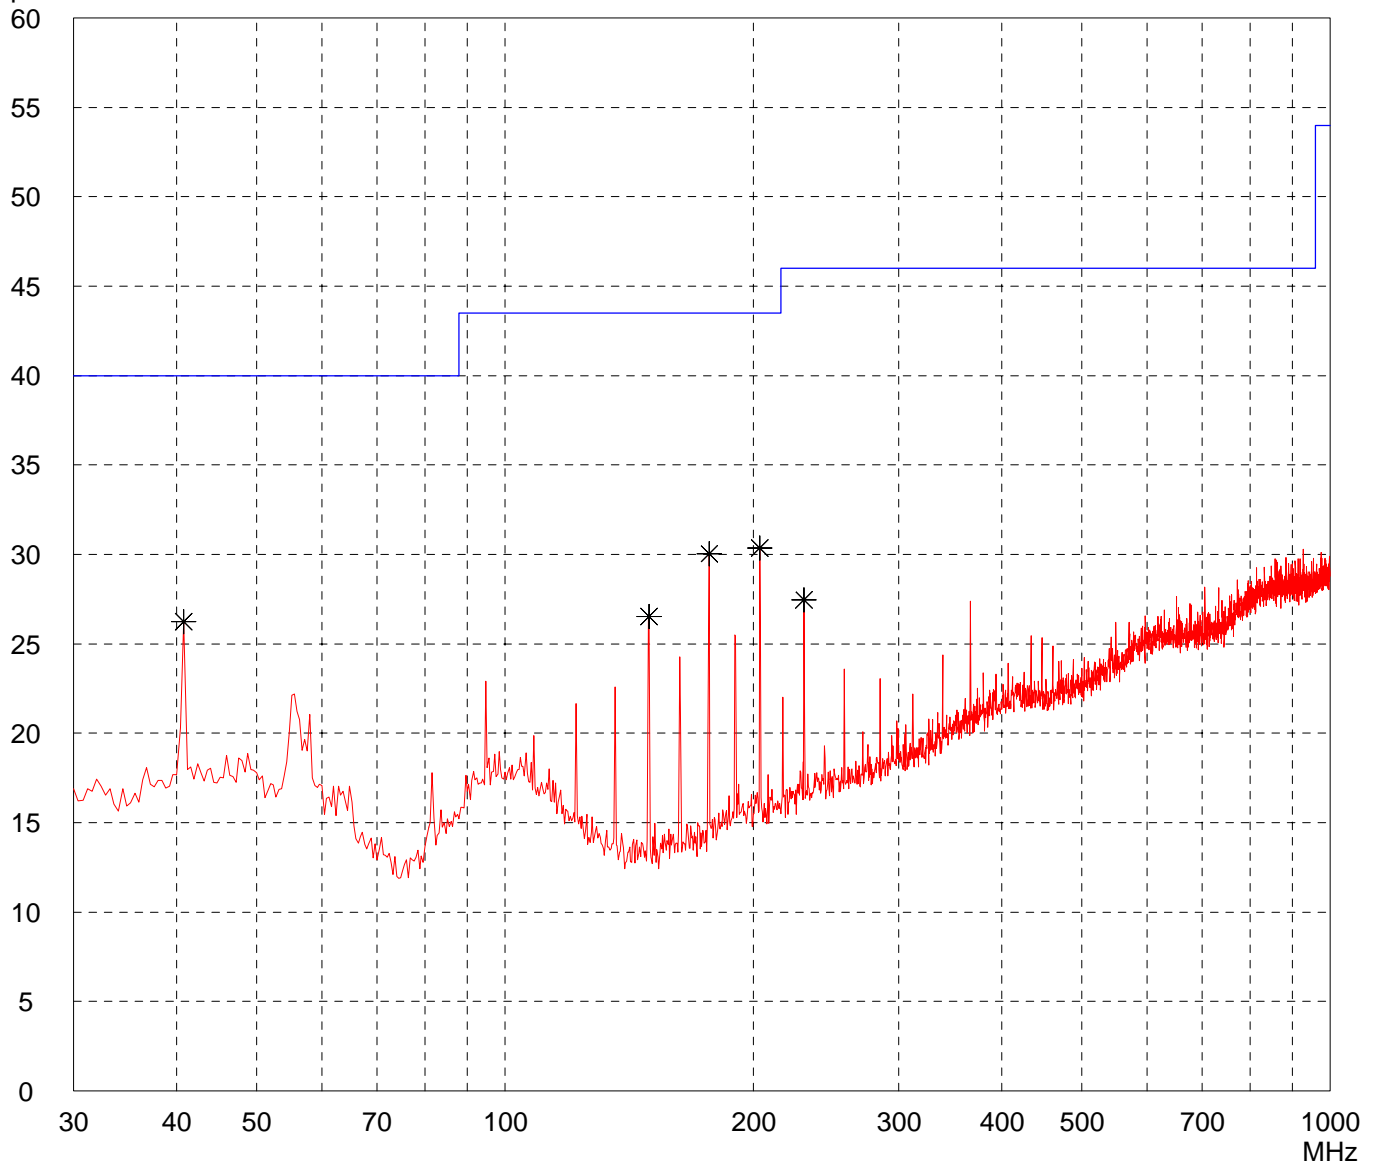

Result:  
Prescan

Project file:  
55426-50412

Page of Pages


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|                            |  |
|----------------------------|--|
| Comment:                   |  |
| - DC 5 V power supply      |  |
| - Variant: Standard (V4.2) |  |
| - Antenna: sd647           |  |
| - reading TAG (122 kHz)    |  |

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                 |              |
|-----------------|--------------|
| List of values: | 50 Subranges |
| 10 dB Margin    |              |

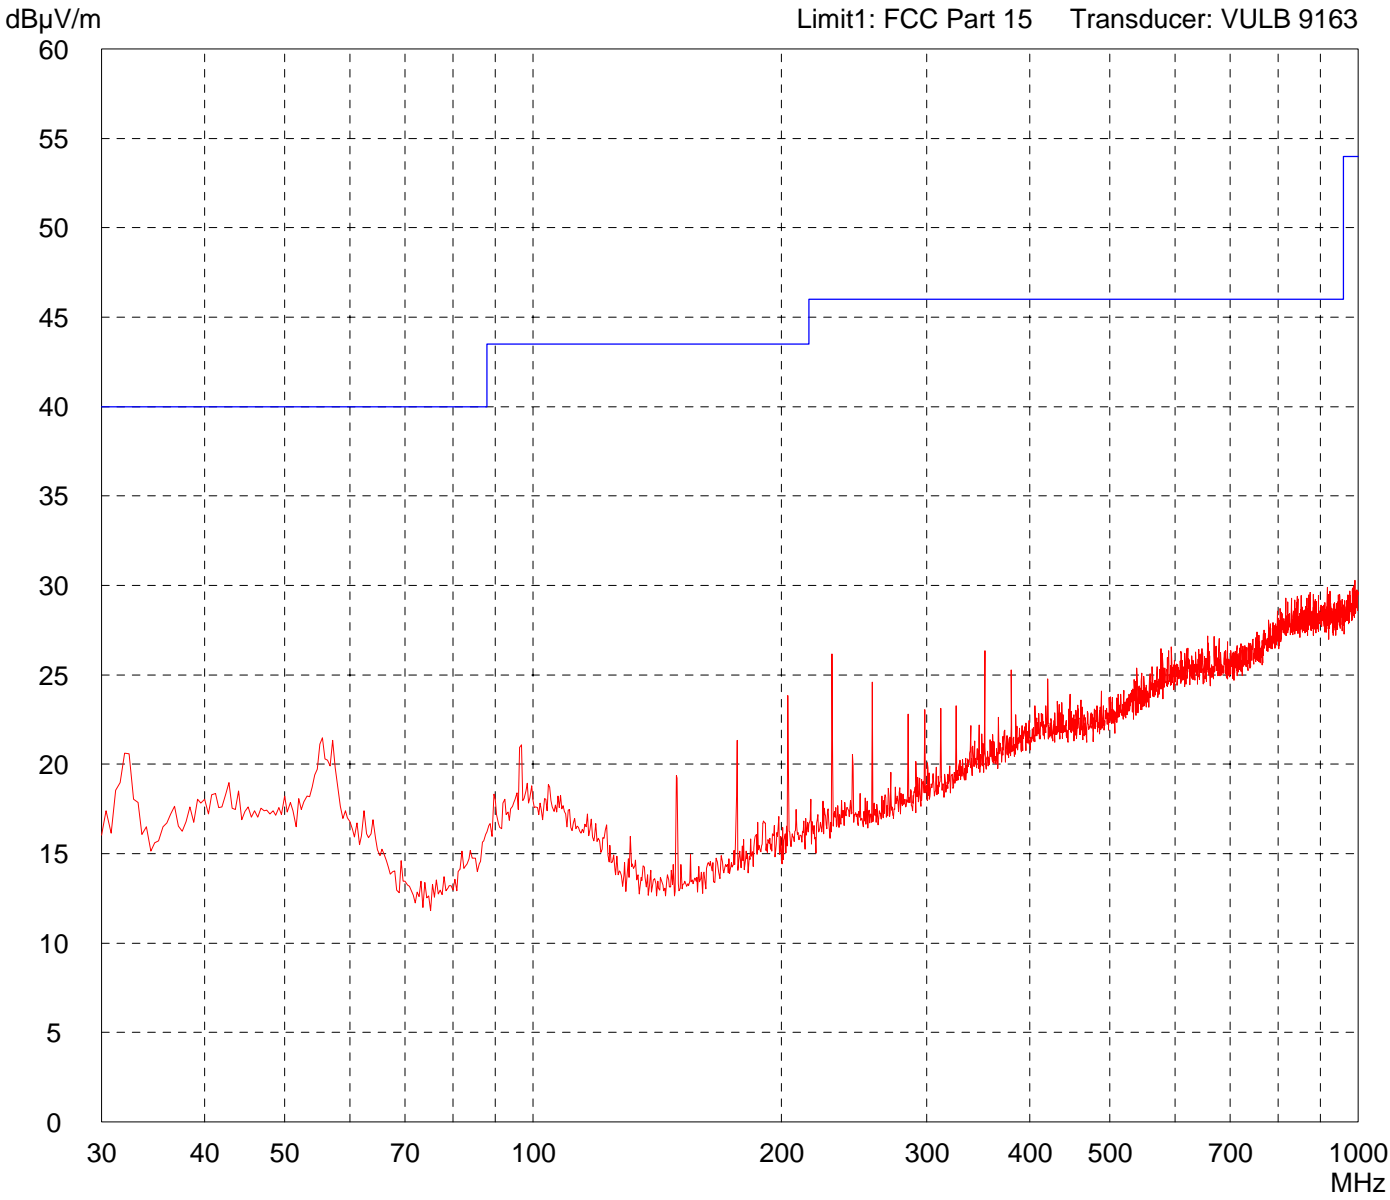

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres  
Vertical Polarization

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
automatically

File name:  
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd647
- reading TAG (122 kHz)

Detector:  
Peak

List of values:  
Selected by hand

dB $\mu$ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

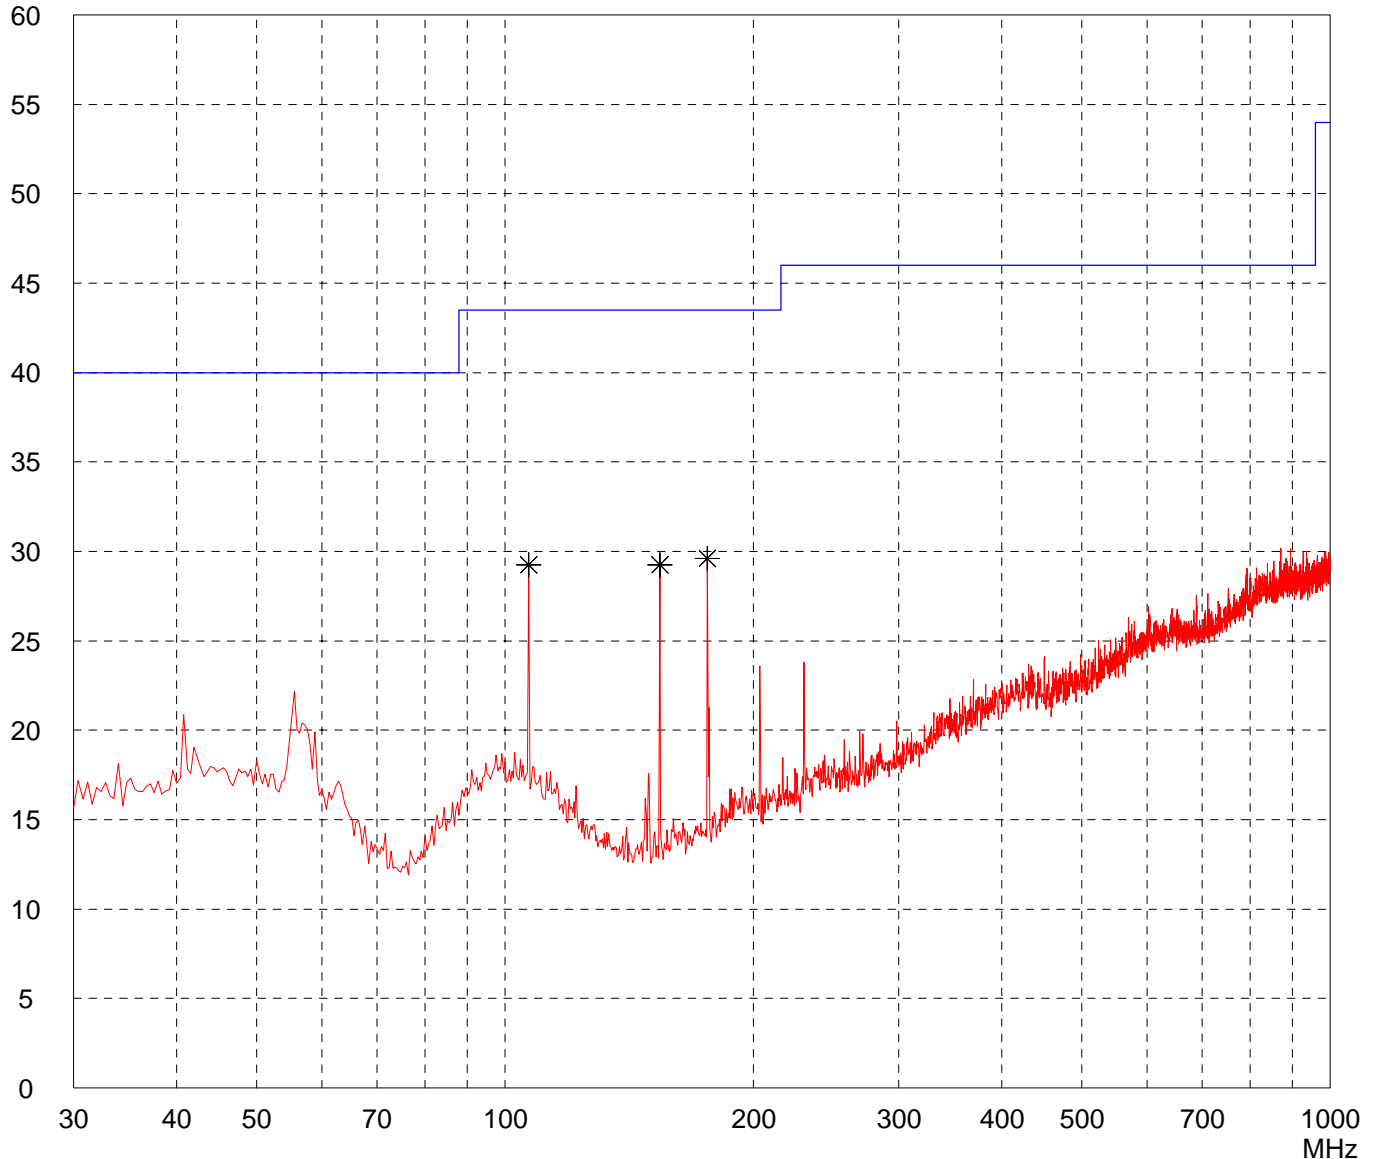

Result:  
Prescan

Project file:  
55426-50412

Page of Pages

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres  
Horizontal Polarization

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
automatically

File name:  
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd647
- reading TAG (13.56 MHz)

Detector:  
Peak

List of values:  
Selected by hand

dB $\mu$ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

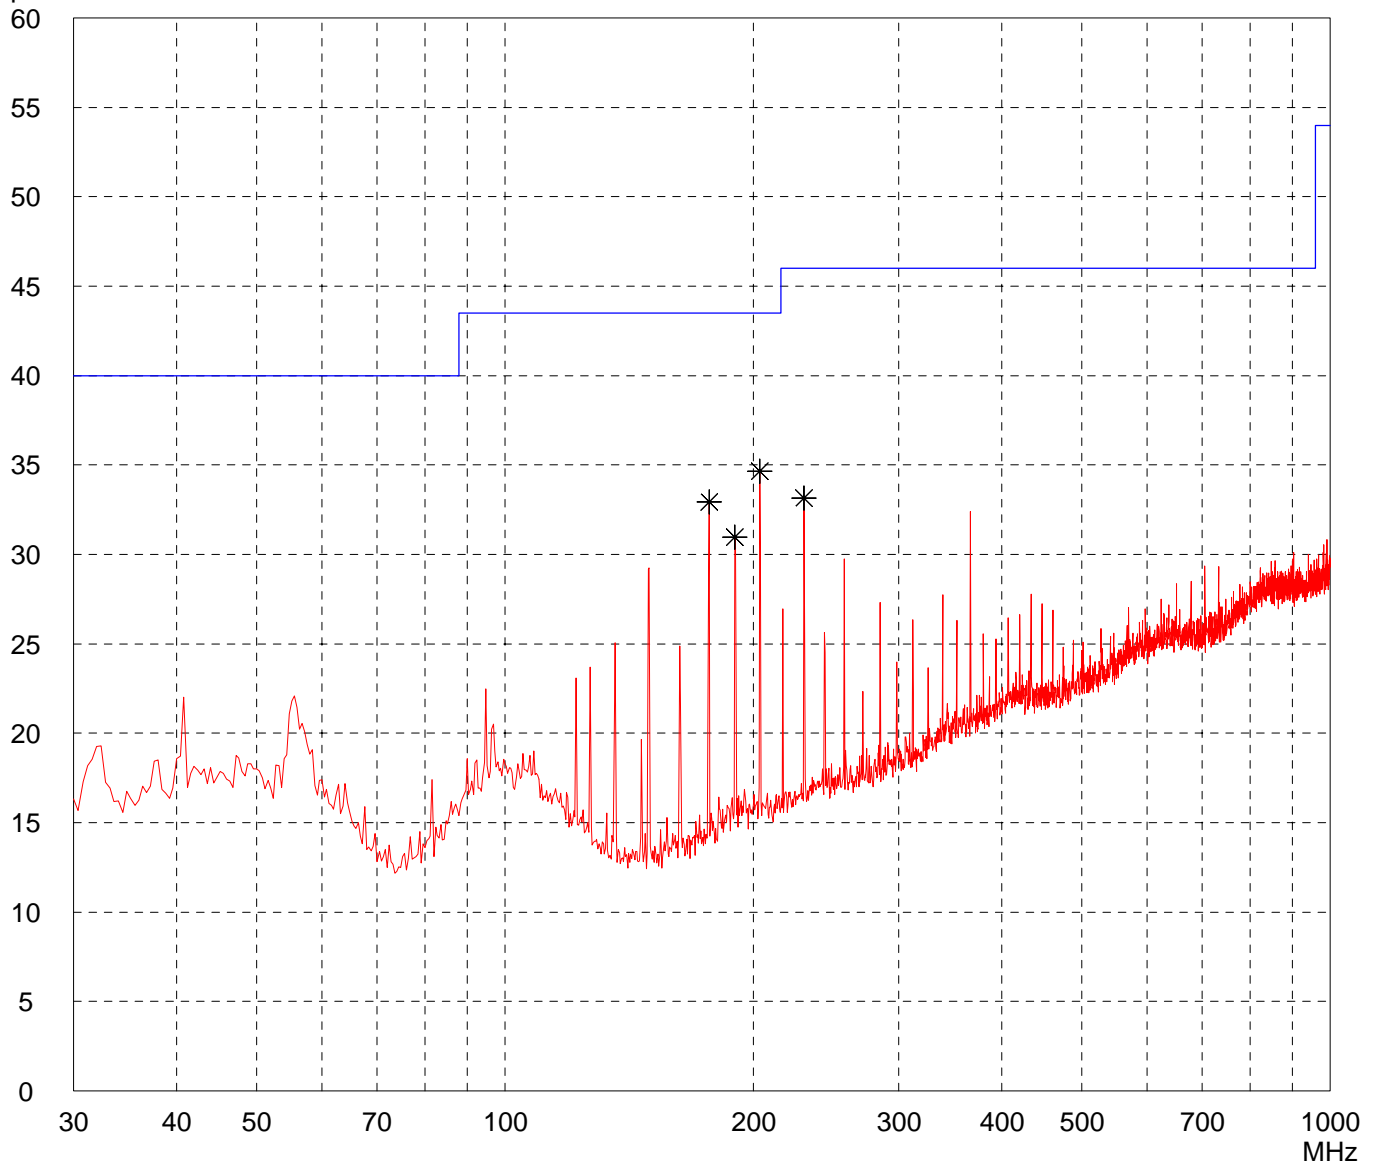

Result:  
Prescan

Project file:  
55426-50412

Page of Pages




# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd647<br><br>- reading TAG (13.56 MHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

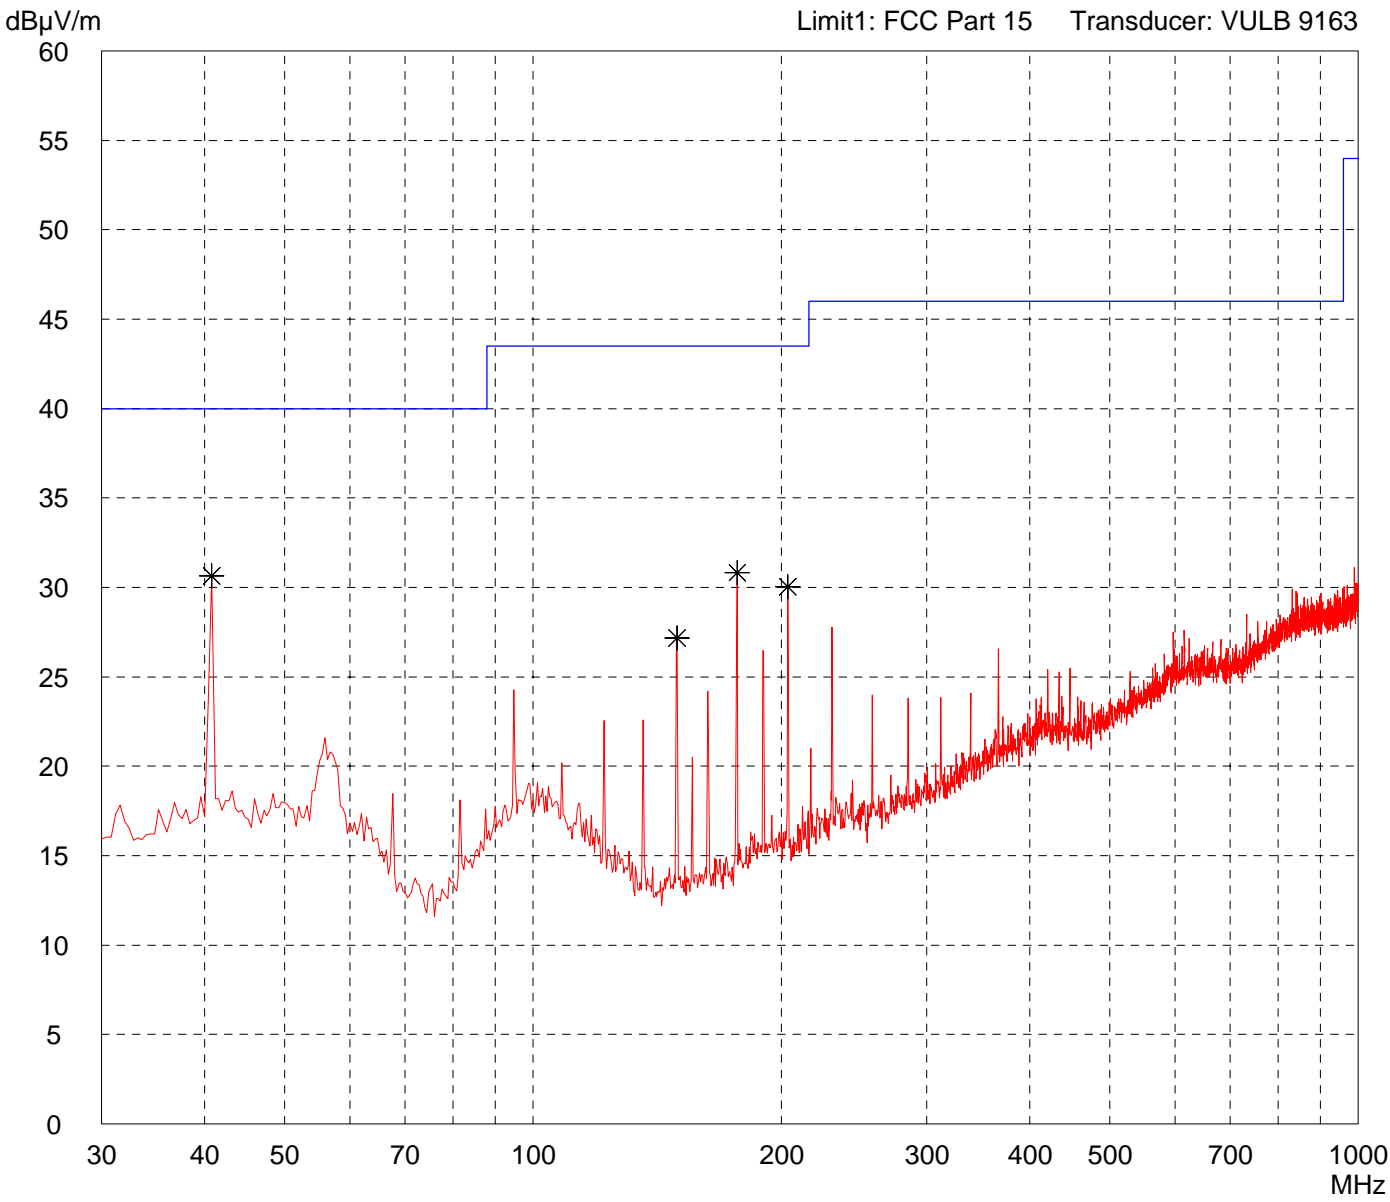

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|                             |  |
|-----------------------------|--|
| Comment:                    |  |
| - DC 5 V power supply       |  |
| - Variant: Standard (V4.2)  |  |
| - Antenna: sd648            |  |
| - transmitting continuously |  |

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                 |              |
|---------------------------------|--------------|
| List of values:<br>10 dB Margin | 50 Subranges |
|---------------------------------|--------------|

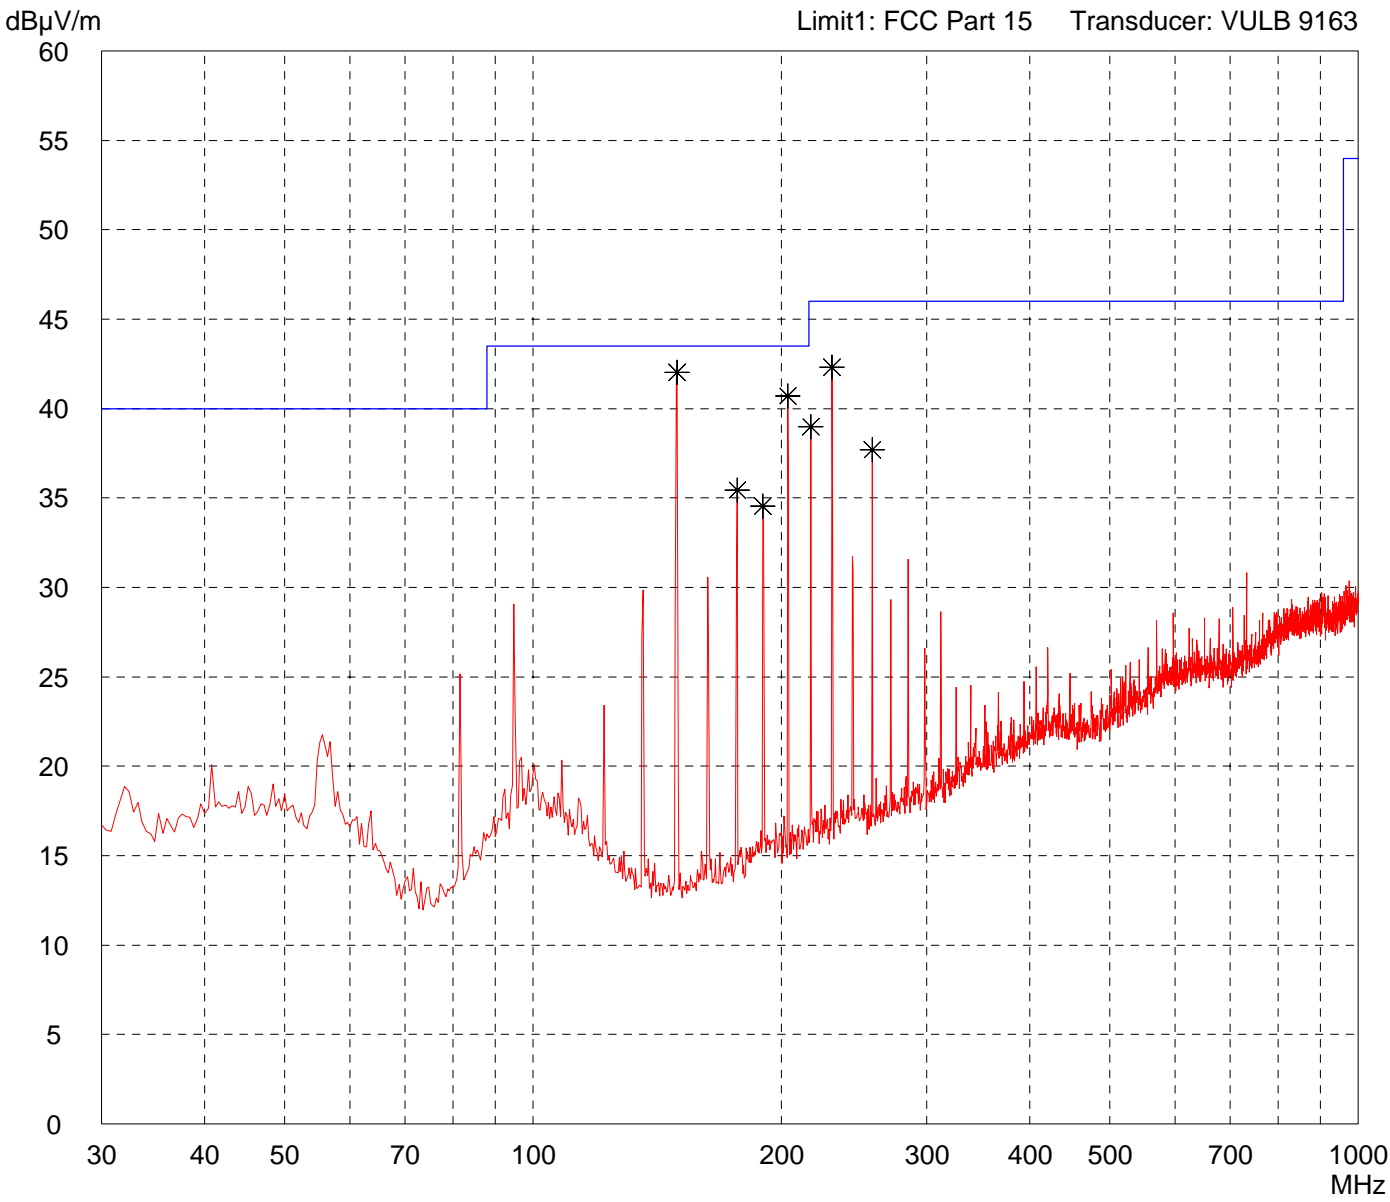

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd648<br><br>- transmitting continuously |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

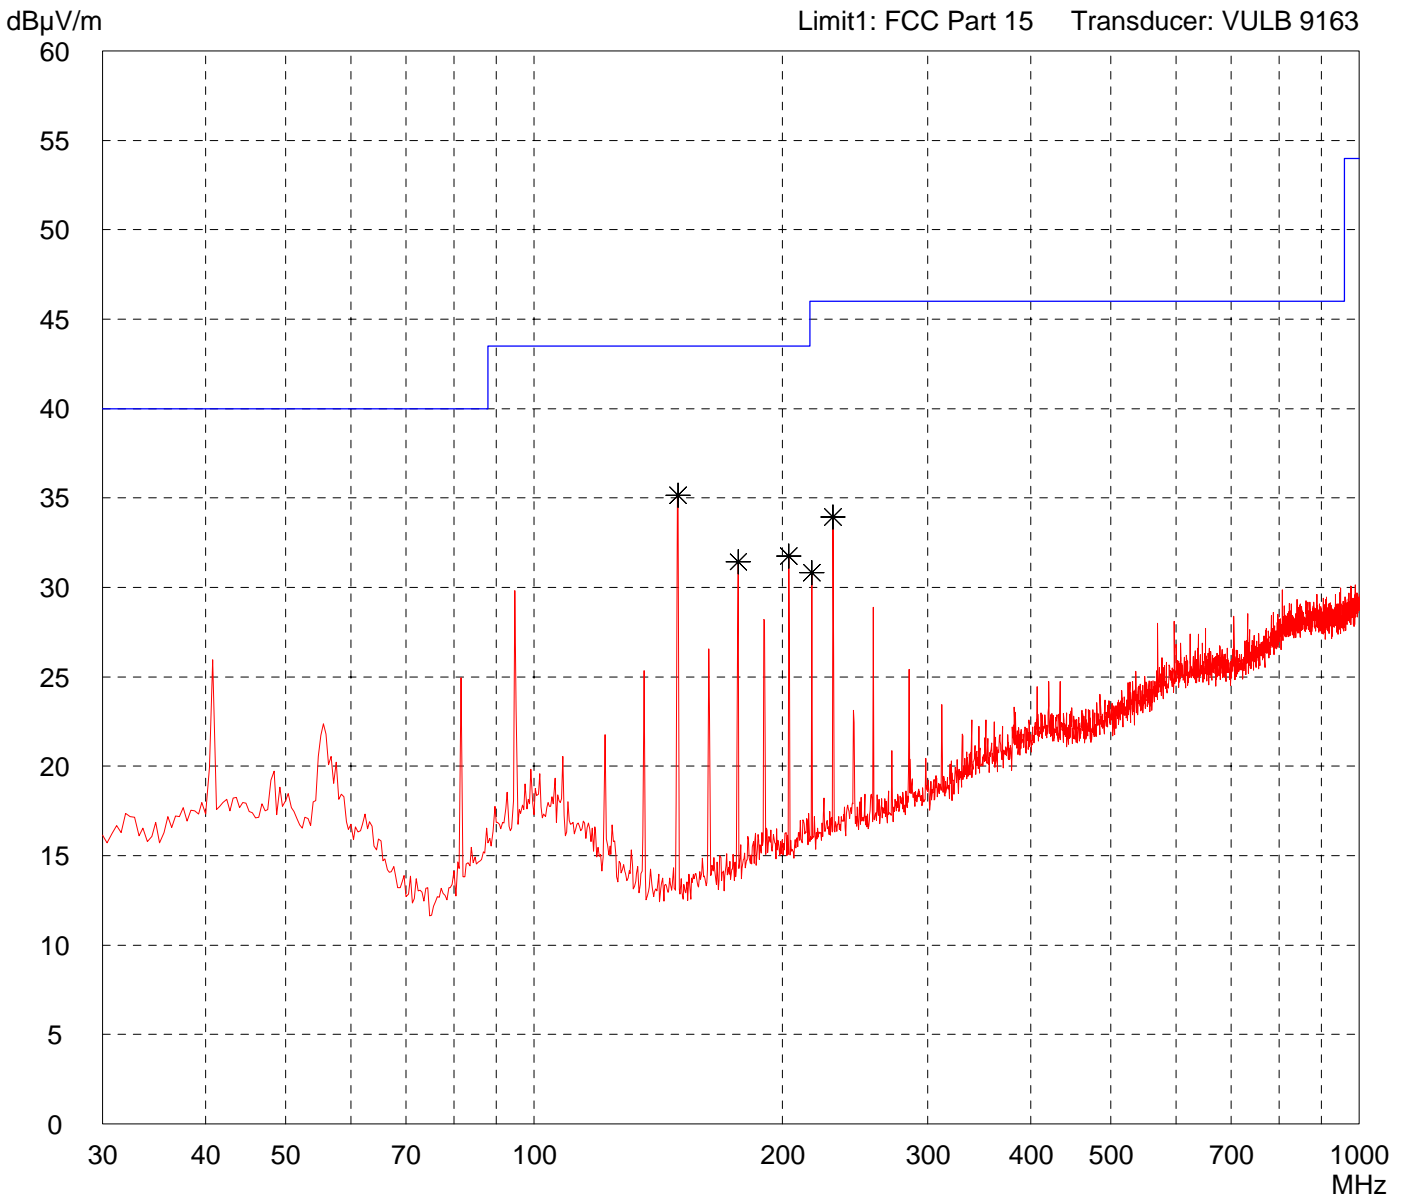

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:  
sd605

Serial no.:  
D052900585

Applicant:  
SKIDATA AG

Test site:  
Fully anechoic room, cabin no. 2

Tested on:  
Test distance 3 metres  
Horizontal Polarization

Date of test:  
2005-09-19

Operator:  
M. Steindl

Test performed:  
automatically

File name:  
default.emi

Comment:


- DC 5 V power supply
- Variant: Standard (V4.2)
- Antenna: sd648
- reading TAG (122 kHz)

Detector:  
Peak

List of values:  
Selected by hand

dB $\mu$ V/m

Limit1: FCC Part 15 Transducer: VULB 9163

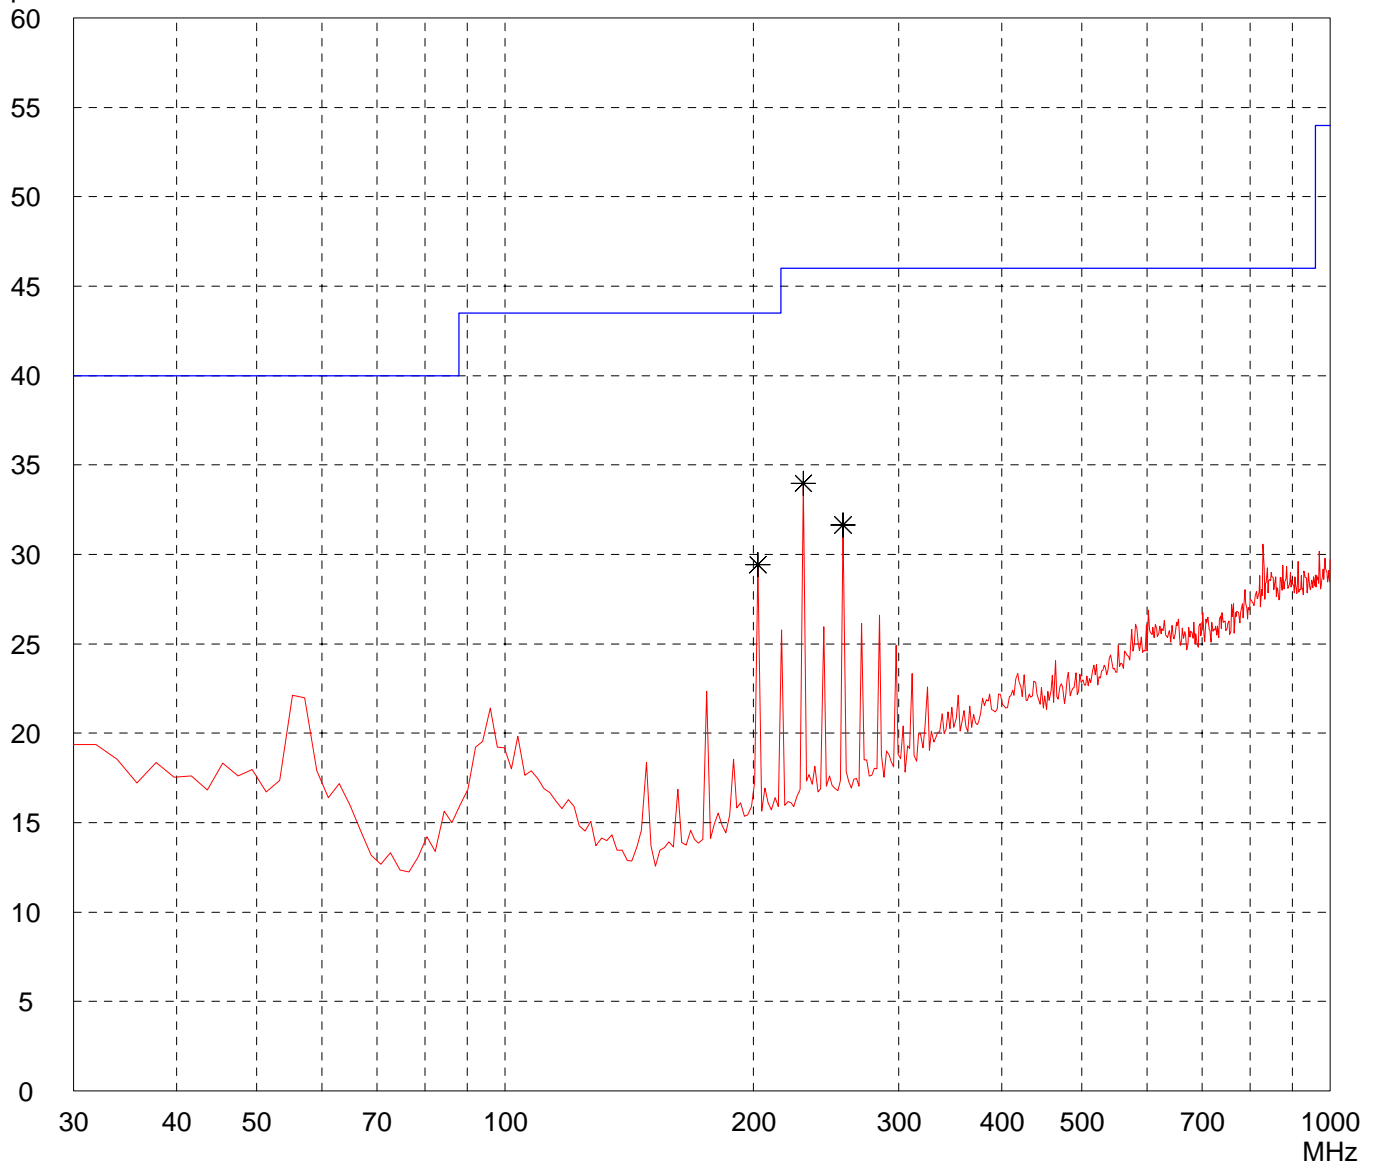

Result:  
Prescan

Project file:  
55426-50412

Page of Pages


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd648<br><br>- reading TAG (122 kHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

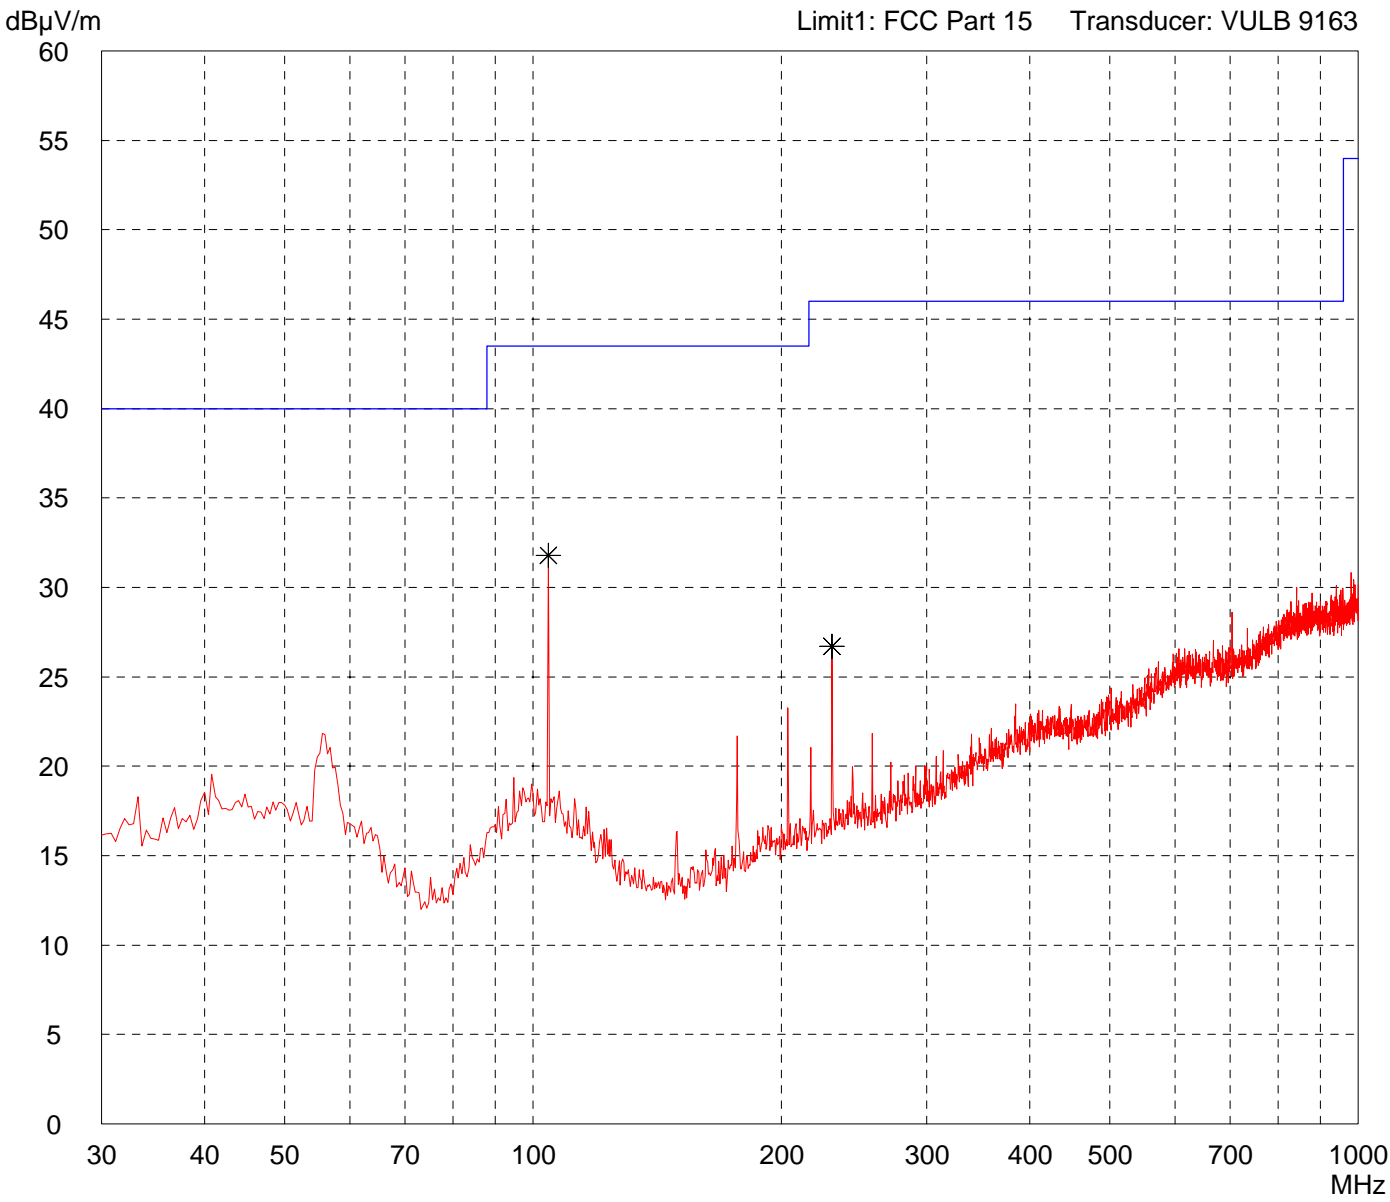

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                       |                           |
| Applicant:<br>SKIDATA AG  |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                  |                           |
| Tested on:<br>Test distance 3 metres<br>Horizontal Polarization |                           |
| Date of test:<br>2005-09-19                                     | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                                | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd648<br><br>- reading TAG (13.56 MHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

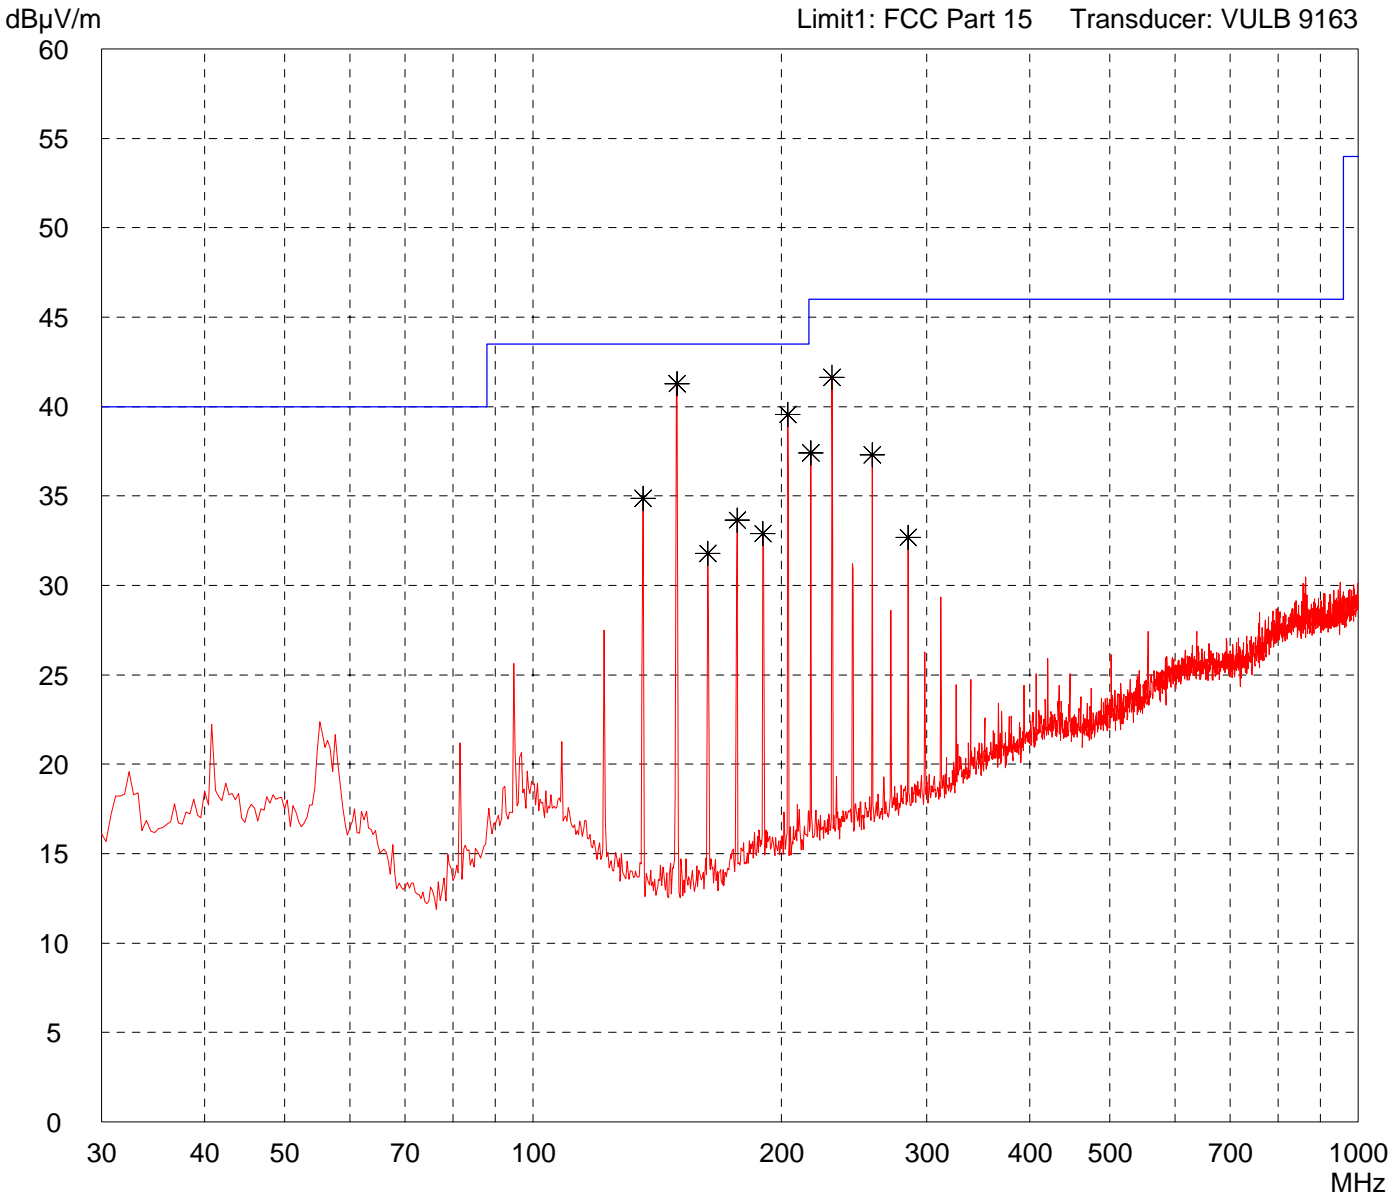

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|

|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|


# Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

|   |                           |
|---|---------------------------|
| Model:<br>sd605   |                           |
| Serial no.:<br>D052900585                                     |                           |
| Applicant:<br>SKIDATA AG                                      |                           |
| Test site:<br>Fully anechoic room, cabin no. 2                |                           |
| Tested on:<br>Test distance 3 metres<br>Vertical Polarization |                           |
| Date of test:<br>2005-09-19                                   | Operator:<br>M. Steindl   |
| Test performed:<br>automatically                              | File name:<br>default.emi |

|  |
|--|
| Comment:<br>- DC 5 V power supply<br><br>- Variant: Standard (V4.2)<br>- Antenna: sd648<br><br>- reading TAG (13.56 MHz) |
|--|

|                   |
|-------------------|
| Detector:<br>Peak |
|-------------------|

|                                     |
|-------------------------------------|
| List of values:<br>Selected by hand |
|-------------------------------------|

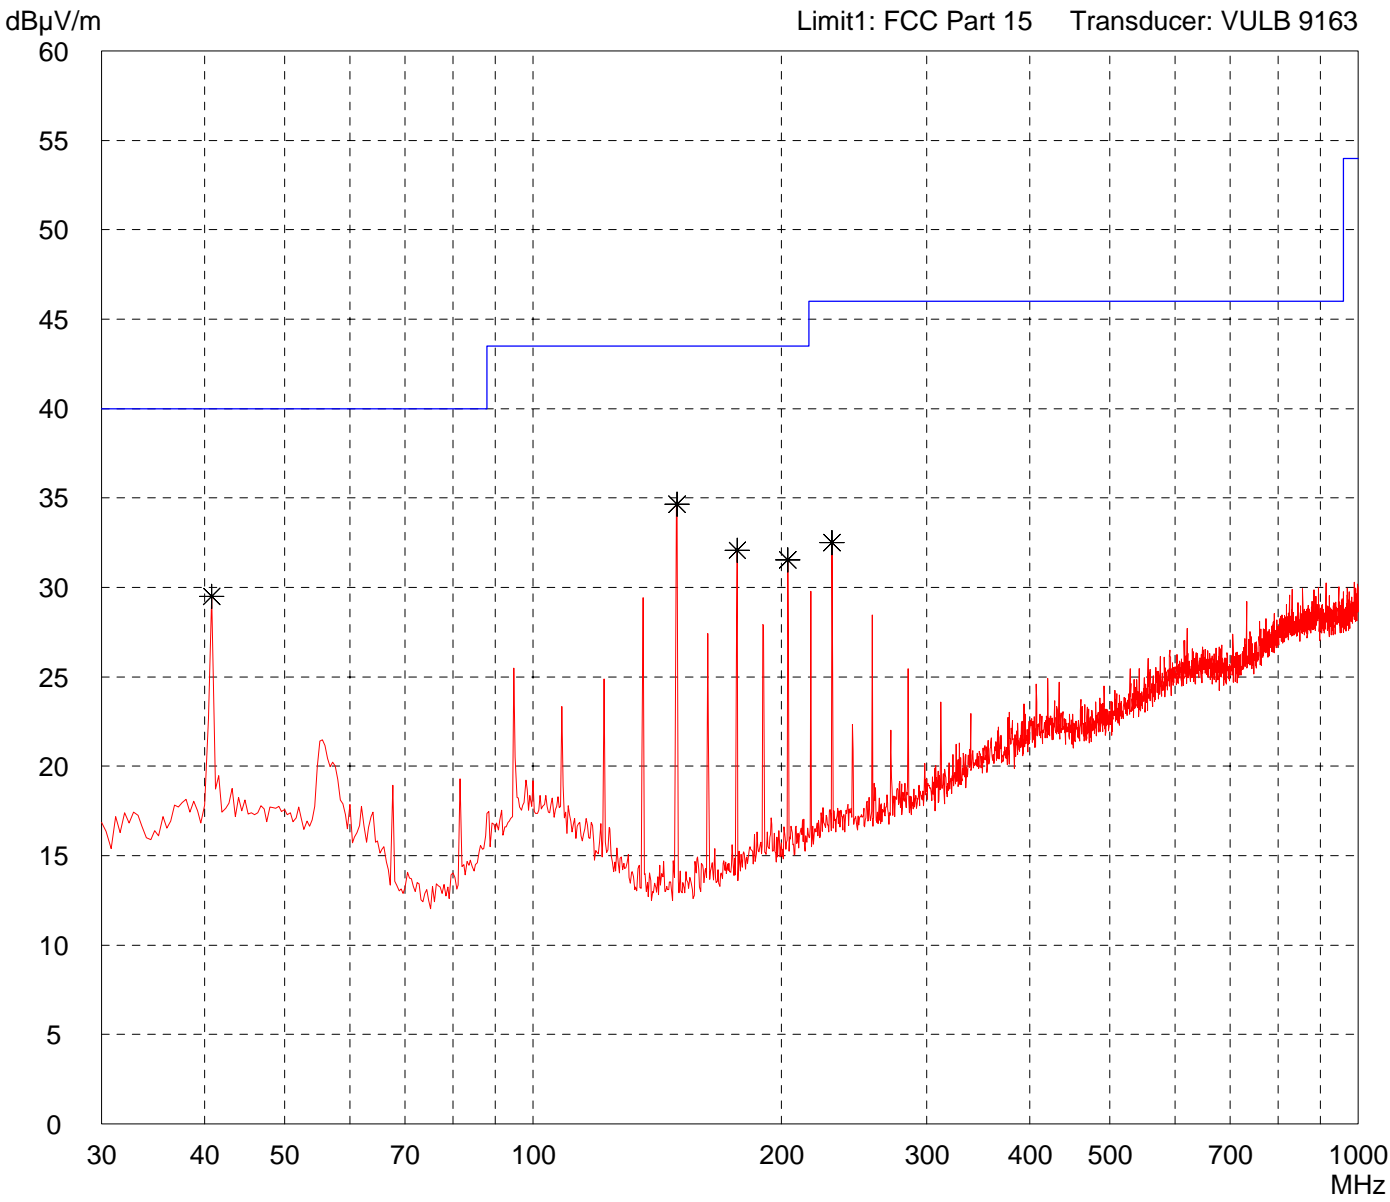

|                    |
|--------------------|
| Result:<br>Prescan |
|--------------------|


|                              |                     |
|------------------------------|---------------------|
| Project file:<br>55426-50412 | Page    of    Pages |
|------------------------------|---------------------|

# Restricted Bands of Operation acc. to FCC 15.205

|                                  |  |
|----------------------------------|--|
| <b>Model:</b><br>sd605           | <b>Mode:</b><br>- DC 5 V power supply<br>- Variant: Standard (V 4.2)<br>- Antenna: sd611 |
| <b>Serial No.:</b><br>D052900585 | - reading TAG (122 kHz)<br>- Measurement distance: 8.5 m                                 |
| <b>Applicant:</b><br>SKIDATA AG  |  |
|                                  |  |
|                                  |  |
|                                  |  |

Ref.Level 47 dBuV  
5 dB/Div.

ATT 10 dB

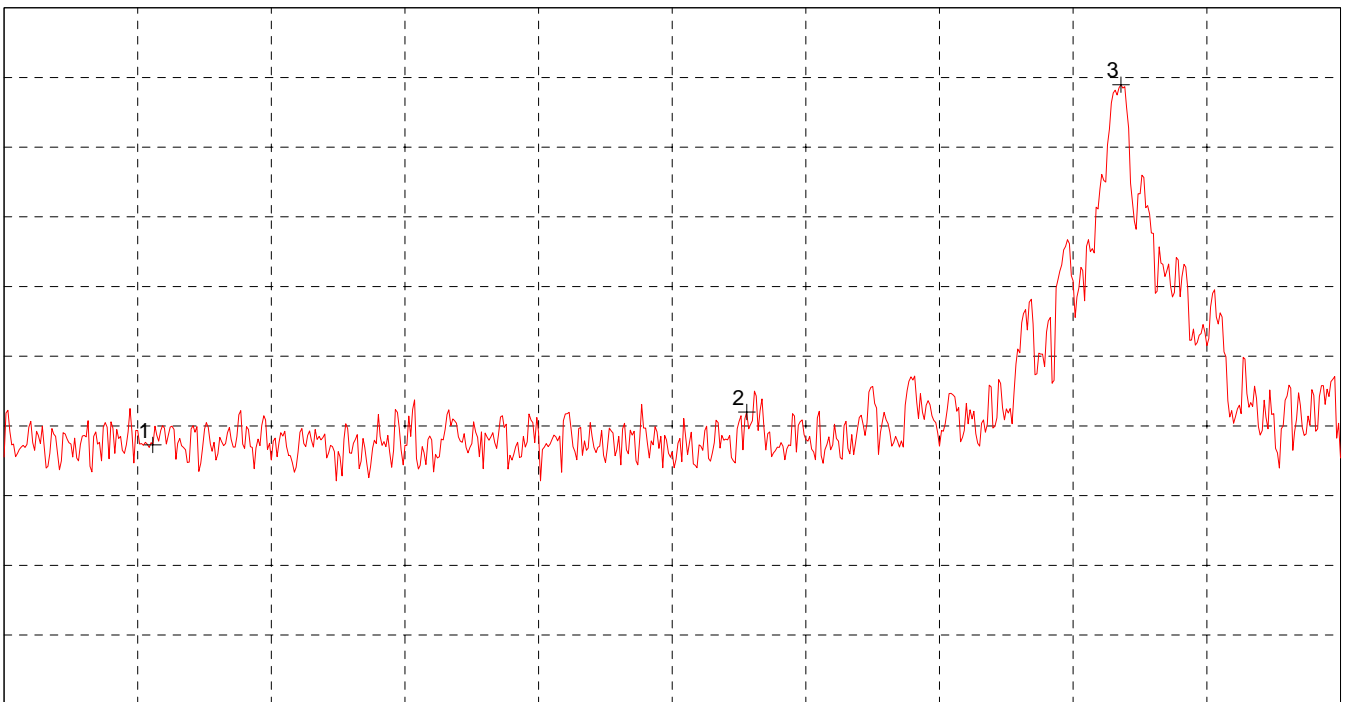

Start 85.000 kHz  
RBW 300 Hz

VBW 1 kHz

Stop 130.000 kHz  
SWP 1 s

### Multi Marker List

|       |             |            |
|-------|-------------|------------|
| No. 1 | 90.000 kHz  | 15.64 dBuV |
| No. 2 | 110.000 kHz | 18.00 dBuV |
| No. 3 | 122.610 kHz | 41.48 dBuV |

|                                 |                                     |
|---------------------------------|-------------------------------------|
| <b>Tested by:</b><br>M. Steindl | <b>Project-No.:</b><br>55426-050412 |
| <b>Date:</b><br>2005/09/22      | Page      of      pages             |