



SENTON

Choose certainty.
Add value.

25 June 2010

Prüfbericht / Test Report

Nr. / No. 69575-01059-3 (Edition 3)

Applicant: SKIDATA AG
Type of equipment: Tag Reader
Type designation: AC-MOBILEREADER
Order No.:
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.225

Industry Canada Radio Standards Specifications
RSS-Gen Issue 2, Section 7.2.2 and
RSS-210 Issue 7, Sections 2.2, 2.6, A2.6 (Category I Equipment)

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data.....	3
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements.....	8
6.2	Conducted AC Powerline Emission.....	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz	11
6.4	Radiated Emission in Fully or Semi Anechoic Room	13
6.5	Carrier Frequency Stability	16
7	Photographs Taken During Testing	18
8	Test Results.....	27
8.1	Occupied Bandwidth	29
8.2	Bandwidth of the Emission	33
8.3	Designation of Emissions.....	36
8.4	Spectrum Mask	37
8.5	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	39
8.6	Radiated Emission Measurement 9 kHz to 30 MHz	42
8.7	Radiated Emission Measurement 30 MHz to 1 GHz	43
8.8	Carrier Frequency Stability	45
8.9	Exposure of Humans to RF Fields.....	48
9	Referenced Regulations	50
10	Revision History	52
11	Charts taken during testing.....	53

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	AC-MOBILEREADER
Parts ² :	
Serial number(s):	094900003
Manufacturer:	SKIDATA AG
Type of equipment:	Tag Reader
Version:	series version
FCC ID:	QSS-TRM
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	13.553 MHz - 13.567 MHz
Frequency range:	
Operating frequency:	13.560 MHz
Type of modulation:	Amplitude modulation
Pulse train:	---
Pulse width:	---
Number of RF-channels:	1
Channel spacing:	---
Designation of emissions ³ :	
Type of antenna:	Inductive loop
Size/length of antenna:	0.0012 m ²
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	Battery supply
Specifications for power supply:	nominal voltage: 3.65 V minimum voltage: 3.10 V maximum voltage: 3.65 V

2 Administrative Data

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

Application details

Applicant (full address):	SKIDATA AG Untersbergstraße 40 A-5083 Gröding Austria
Contact person:	Mr. Christoph Sonderegger
Order number:	
Receipt of EUT:	03 February 2010 22 June 2010 (with active Bluetooth)
Date(s) of test:	February 2010 April 2010 (conducted emission test) June 2010 (radiated emissions up to 25 GHz)
Note(s):	

Report details

Report number:	69575-01059-3
Edition:	3
Issue date:	25 June 2010



3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	TÜV SÜD SENTON GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-PL-171/94-03
FCC test site registration number	90926
Industry Canada test site registration:	3050A-1
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225

of the Federal Communication Commission (FCC) and the

Radio Standards Specifications

RSS-Gen Issue 2, Section 7.2.2 and

RSS-210 Issue 7, Sections 2.2, 2.6, A2.6 (Category I Equipment)

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Thomas Eberl

Responsible for test report:

Mr. Thomas Eberl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

Reading Tag continuously

Configuration(s) of EUT

EUT is a stand alone device.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>
1	USB	signal/control port	Shielded	2 m

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	No devices connected			

List of support devices


<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	No support devices used			

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures


6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 7, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

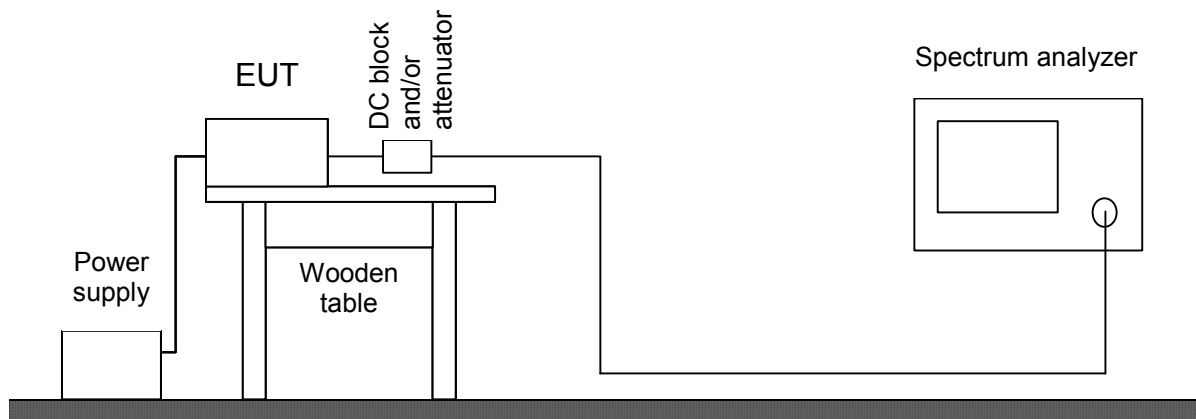

6.2 Conducted AC Powerline Emission

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 2, section 7.2.2
Guide:	ANSI C63.4 / CISPR 22
<p>Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:</p> <p>First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.</p> <p>If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.</p> <p>According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.</p> <p>Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.</p>	

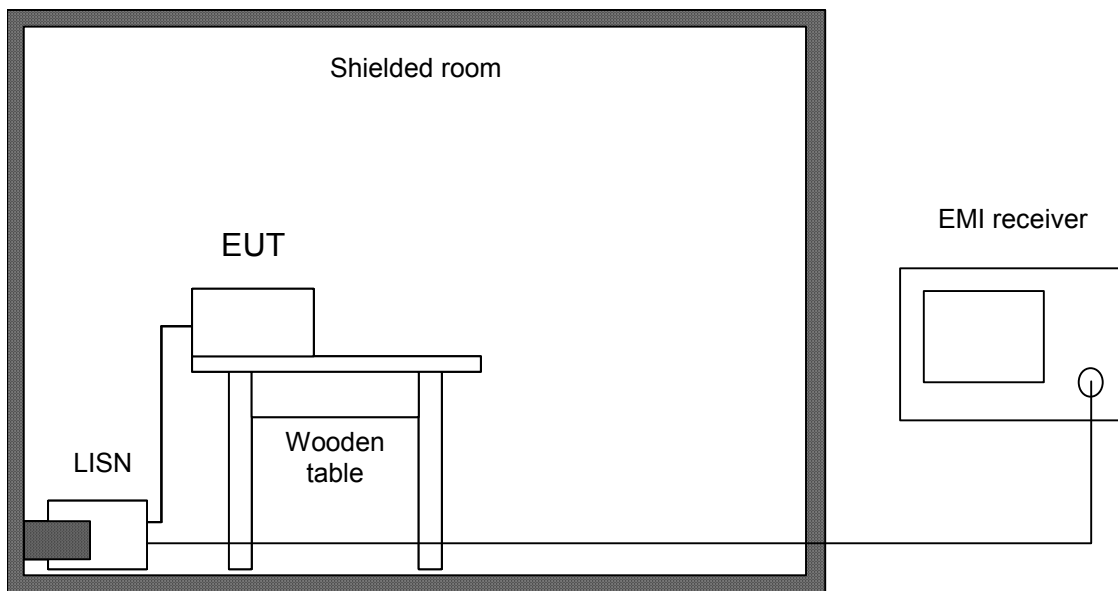




Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	ESHS 10	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/>	LISN	ESH3-Z5	862770/021	Rohde & Schwarz
<input type="checkbox"/>	LISN	ESH3-Z5	830952/025	Rohde & Schwarz
<input type="checkbox"/>	Artificial mains network	ESH 2-Z5	842966/004	Rohde & Schwarz
<input type="checkbox"/>	Shielded room	No. 1	1451	Albatross Projects
<input checked="" type="checkbox"/>	Shielded room	No. 4	3FD-100 544	Euroshield

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d) IC RSS-210 Issue 7, sections 2.2, 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

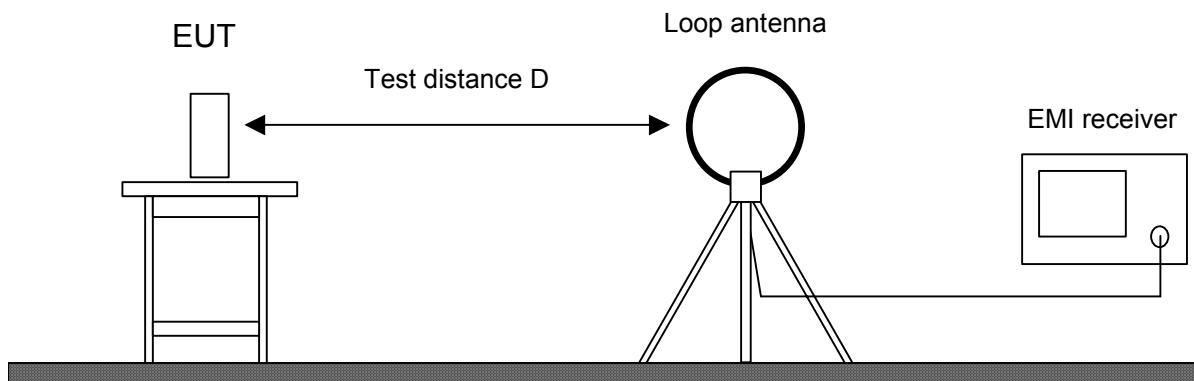


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/>	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
<input type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input checked="" type="checkbox"/>	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz a semi anechoic room is used (equal to an open field test-site) and the plots recorded in the fully anechoic room are indicated as prescans.</p>	

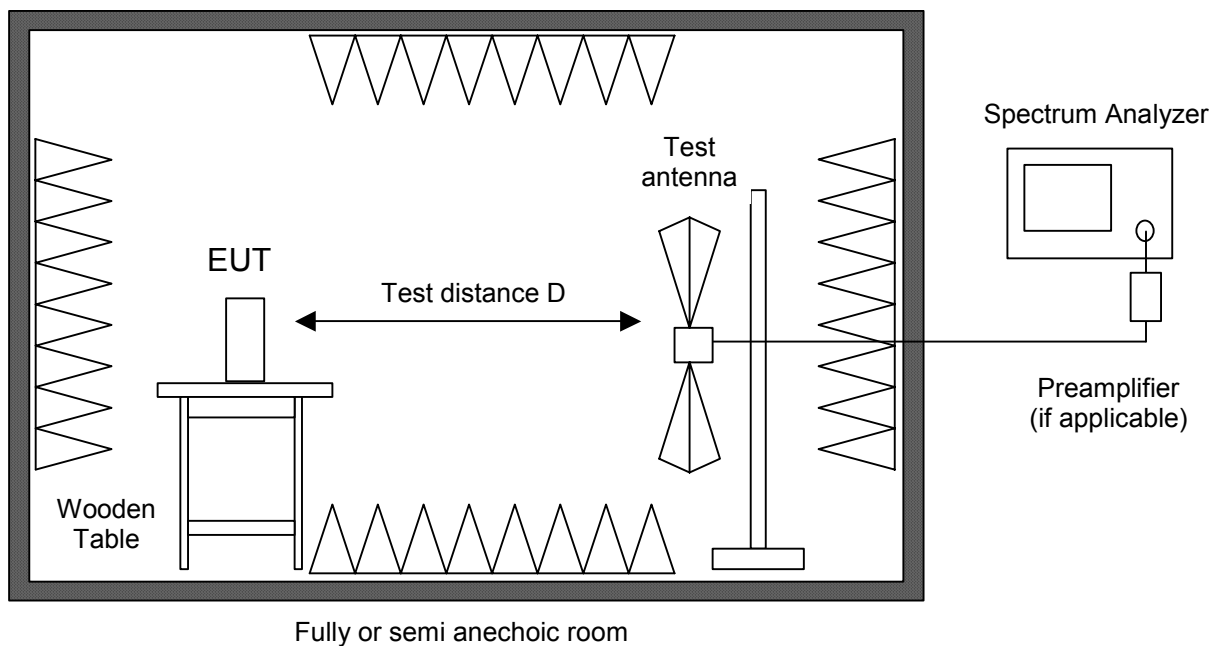


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	Spectrum analyzer	R 3271	05050023	Advantest
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	EMI test receiver	ESU8	100232	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input type="checkbox"/>	Preamplifier	R14601		Advantest
<input type="checkbox"/>	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
<input type="checkbox"/>	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
<input type="checkbox"/>	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
<input checked="" type="checkbox"/>	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
<input checked="" type="checkbox"/>	Trilog broadband antenna	VULB 9163	9163-214	Schwarzbeck
<input type="checkbox"/>	Horn antenna	3115	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-05	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-06	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-07	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens
<input checked="" type="checkbox"/>	Semi-anechoic room	No. 8	2057	Albatross Projects

6.5 Carrier Frequency Stability

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 2, section 4.7 and IC RSS-210 Issue 7, section A2.6
Guide:	ANSI C63.4
<p>The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.</p> <p>If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.</p> <p>For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:</p> <ul style="list-style-type: none"> the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage the battery nominal voltage 85% of the battery nominal voltage the battery operating end point voltage which shall be specified by the equipment manufacturer <p>The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.</p> <p>If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.</p>	

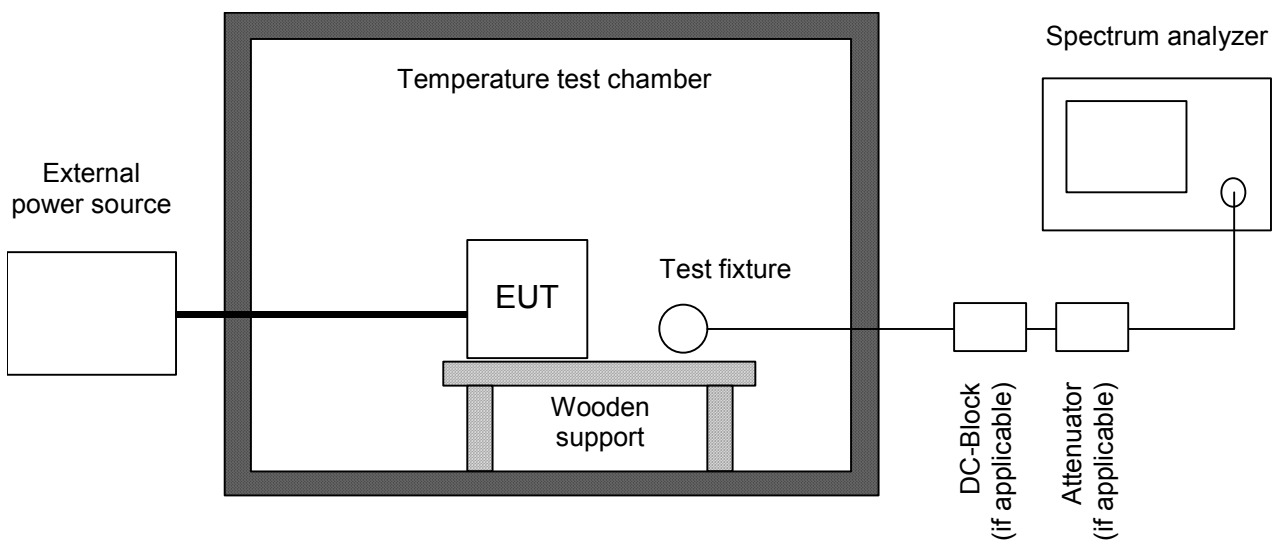

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input checked="" type="checkbox"/>	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/>	DC-block	7006	A2798	Weinschel
<input checked="" type="checkbox"/>	Attenuator	4776-10	9412	Narda
<input type="checkbox"/>	Attenuator	4776-20	9503	Narda
<input checked="" type="checkbox"/>	Test probe	TP01	001	Senton
<input type="checkbox"/>	Multimeter	21 III	76530546	Fluke
<input type="checkbox"/>	Multimeter	21 III	76381229	Fluke
<input type="checkbox"/>	Multimeter	Fluke 77 III	92370108	Fluke
<input type="checkbox"/>	Multimeter	Fluke 77 IV	93090238	Fluke
<input type="checkbox"/>	Multimeter	Fluke 177	96720024	Fluke
<input type="checkbox"/>	Multimeter	Fluke 177	96720025	Fluke
<input type="checkbox"/>	DC power supply	NGSM 32/10	203	Rohde & Schwarz
<input type="checkbox"/>	Isolating transformer	RT 5A	10387	Grundig
<input type="checkbox"/>	Isolating transformer	RT 5A	10416	Grundig
<input checked="" type="checkbox"/>	Temperature test chamber	HT4010	07065550	Heraeus



7 Photographs Taken During Testing


Test setup for conducted AC powerline emission measurement



**Test setup for conducted AC powerline emission measurement
- continued -**



Test setup for radiated emission measurement 9 kHz – 30 MHz

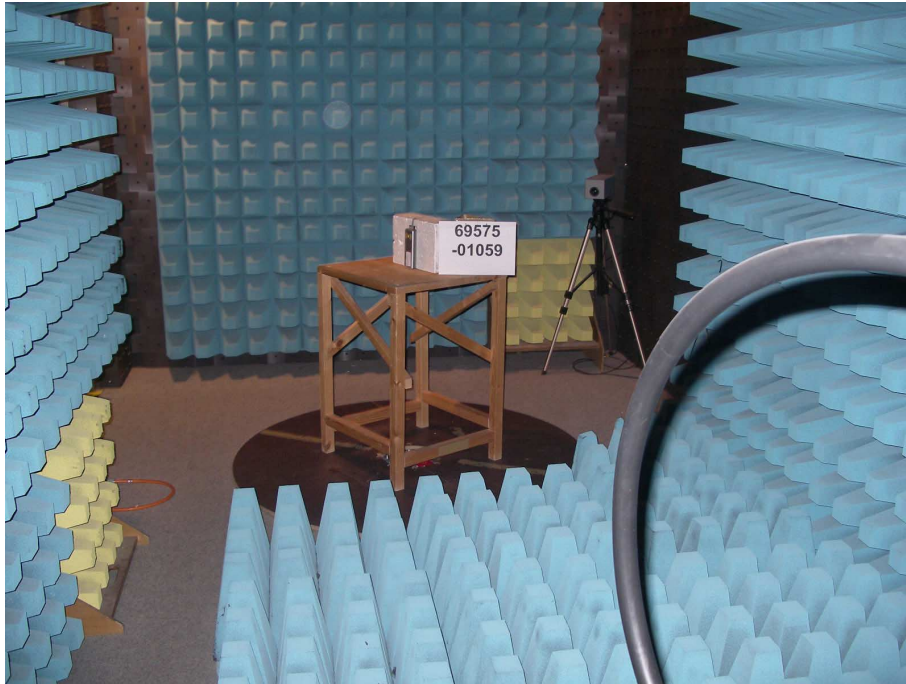


Test setup for radiated emission measurement (fully anechoic room)





**Test setup for radiated emission measurement
(fully anechoic room) - continued -**



Test setup for radiated emission measurement (semi anechoic chamber)

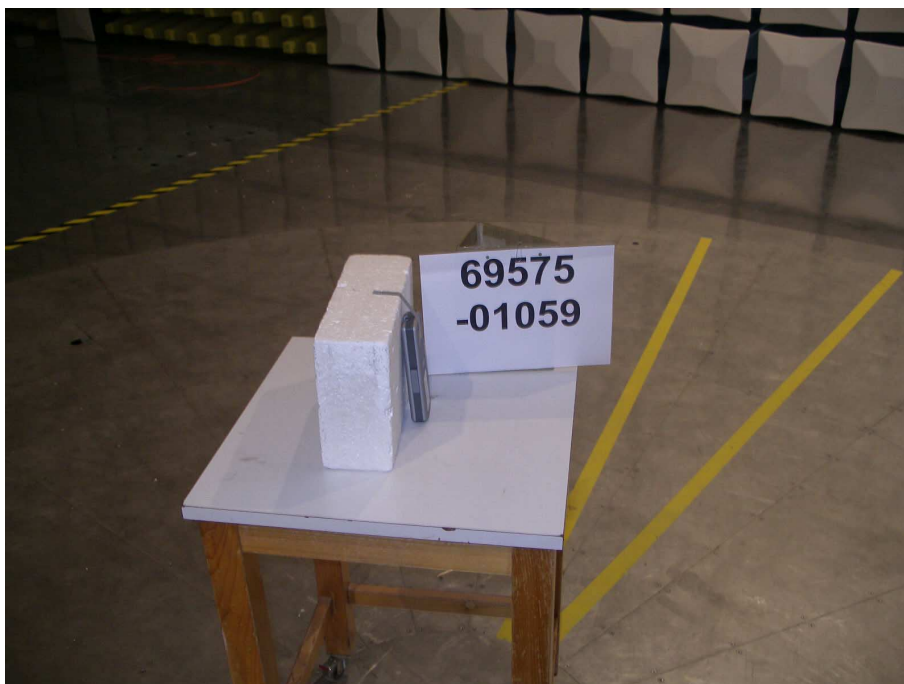

**Test setup for radiated emission measurement
(semi anechoic chamber) - continued -**

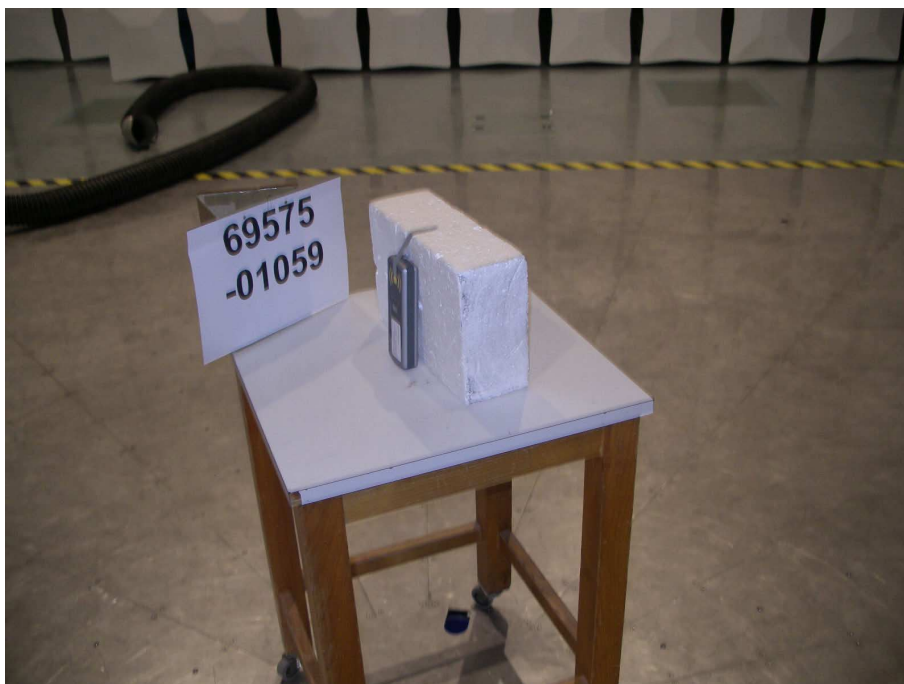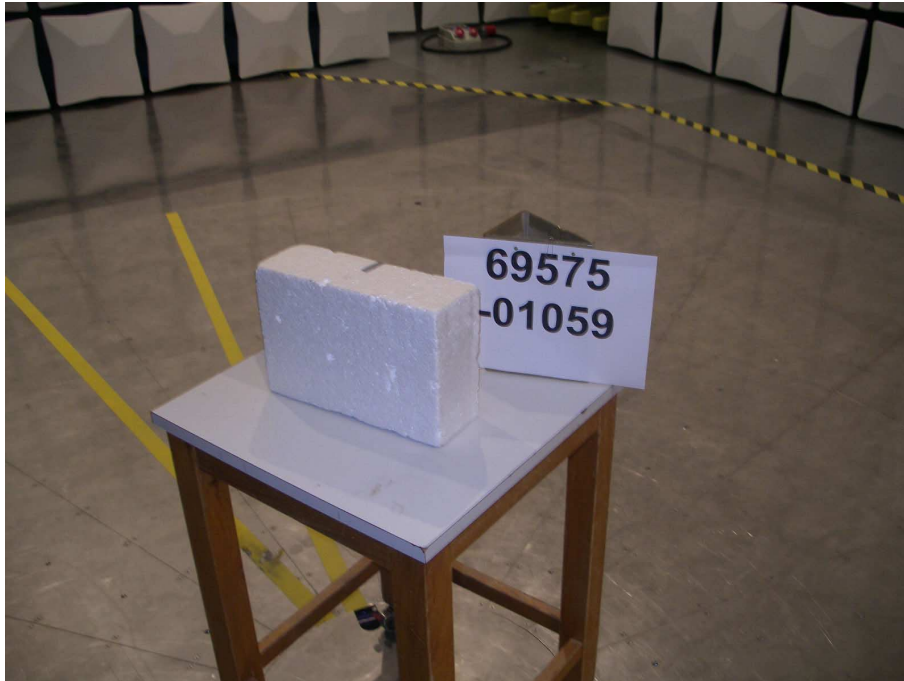

Test setup for carrier frequency stability measurement



8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	29	Recorded
15.215(c)	Bandwidth of the emission	33	Test passed
2.201, 2.202	Class of emission	36	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	39	Test passed
15.225(a)-(d)	Spectrum Mask	37	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	42	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 25 GHz	43	Test passed
15.225(e)	Carrier frequency stability	45	Test passed

⁵ See "Spectrum Mask" for the 13.36 to 13.41 MHz band. For all other restricted bands see "Radiated Emission".

IC RSS-Gen Issue 2			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	29	Recorded
3.2(h), 8	Designation of emissions	36	Calculated
4.5	Pulsed operation	---	Not applicable
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	39	Test passed
5.5	Exposure of Humans to RF Fields	48	Exempted from SAR and RF evaluation

IC RSS-210 Issue 7			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.2(a)	Restricted bands and unwanted emission frequencies	--- ⁶	Test passed
A2.6	Spectrum Mask	37	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 9 kHz to 30 MHz	42	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 30 MHz to 25 GHz	43	Test passed
A2.6	Carrier frequency stability	45	Test passed

⁶ See "Spectrum Mask" and "Unwanted emissions".

8.1 Occupied Bandwidth


Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.	
	The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.	
	The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	17 February 2010
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):



1 RM
 VIEW

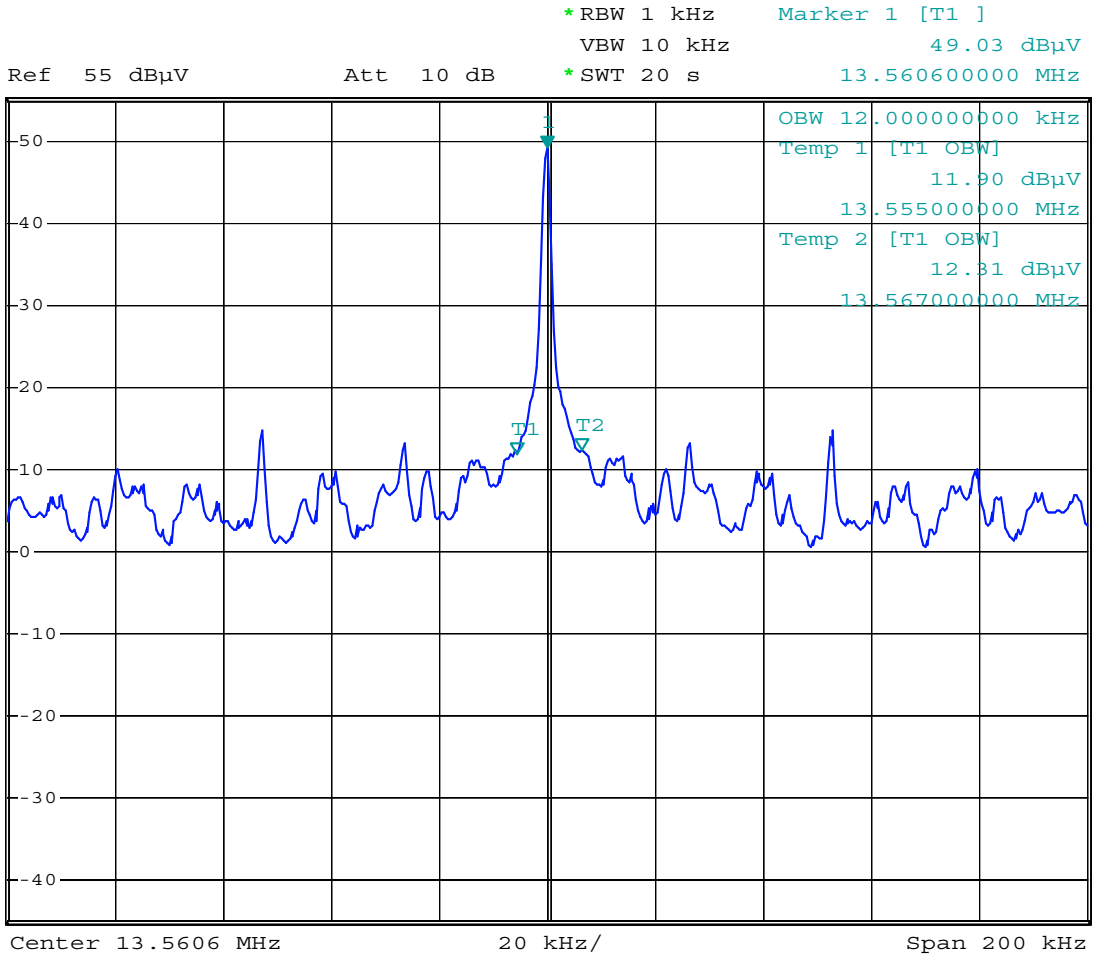

Date: 17.FEB.2010 15:24:59

Occupied Bandwidth (99 %): **12 kHz**



Occupied Bandwidth (continued)


Rules and specifications:	IC RSS-Gen Issue 2, section 4.6.1
Guide:	IC RSS-Gen Issue 2, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	19 February 2010
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):



1 RM
VIEW

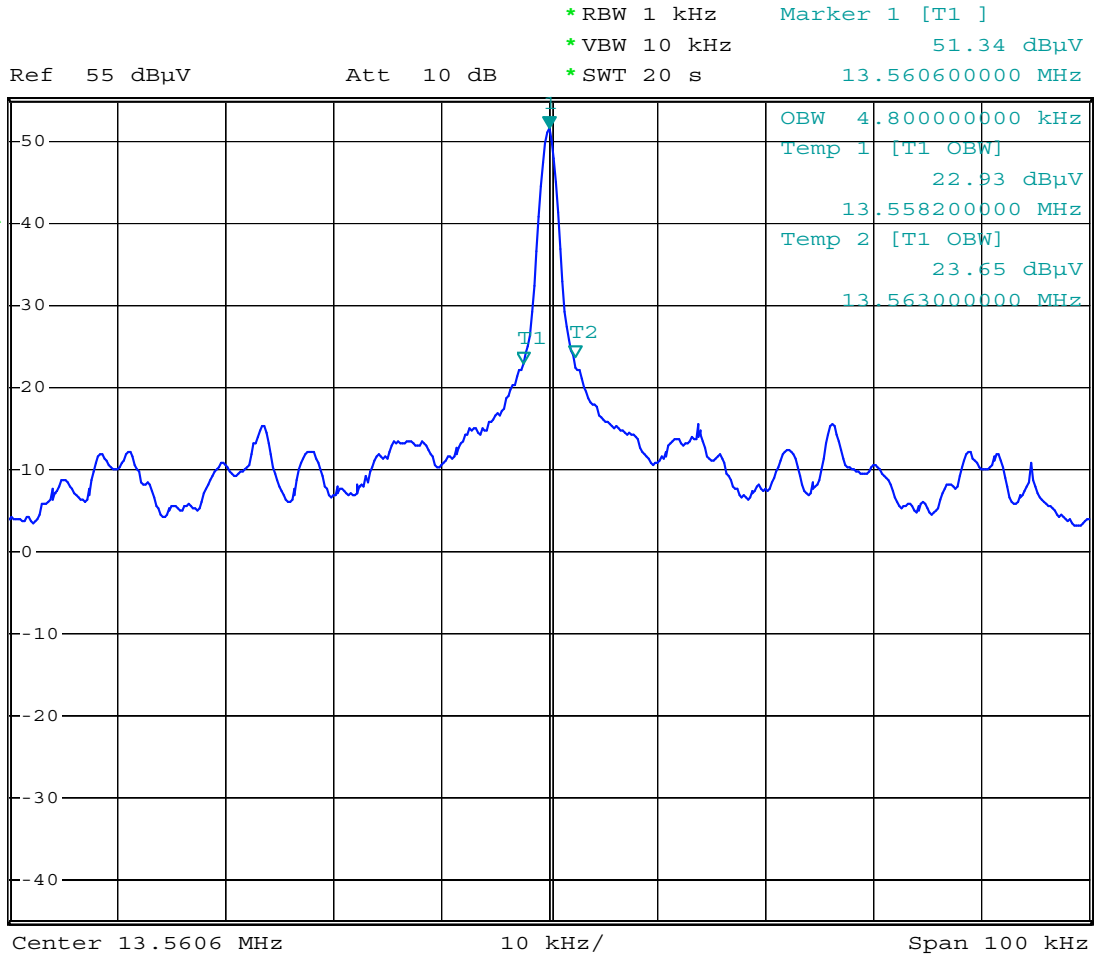

Date: 19.FEB.2010 13:43:30

Occupied Bandwidth (99 %): **4.8 kHz**

8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)		
Guide:	ANSI C63.4		
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>		
		Fundamental frequency	Minimum resolution bandwidth
		9 kHz to 30 MHz	1 kHz
		30 MHz to 1000 MHz	10 kHz
		1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.		
Measurement procedure:	Bandwidth Measurements (6.1)		


Comment:	
Date of test:	19 February 2010
Test site:	Fully anechoic room, cabin no. 2



SELECT TRACE
 1
 Ref 55 dBµV Att 10 dB

* RBW 1 kHz Delta 3 [T1]
 * VBW 3 kHz -21.08 dB
 * SWT 20 s 1.600000000 kHz

1 RM
 VIEW

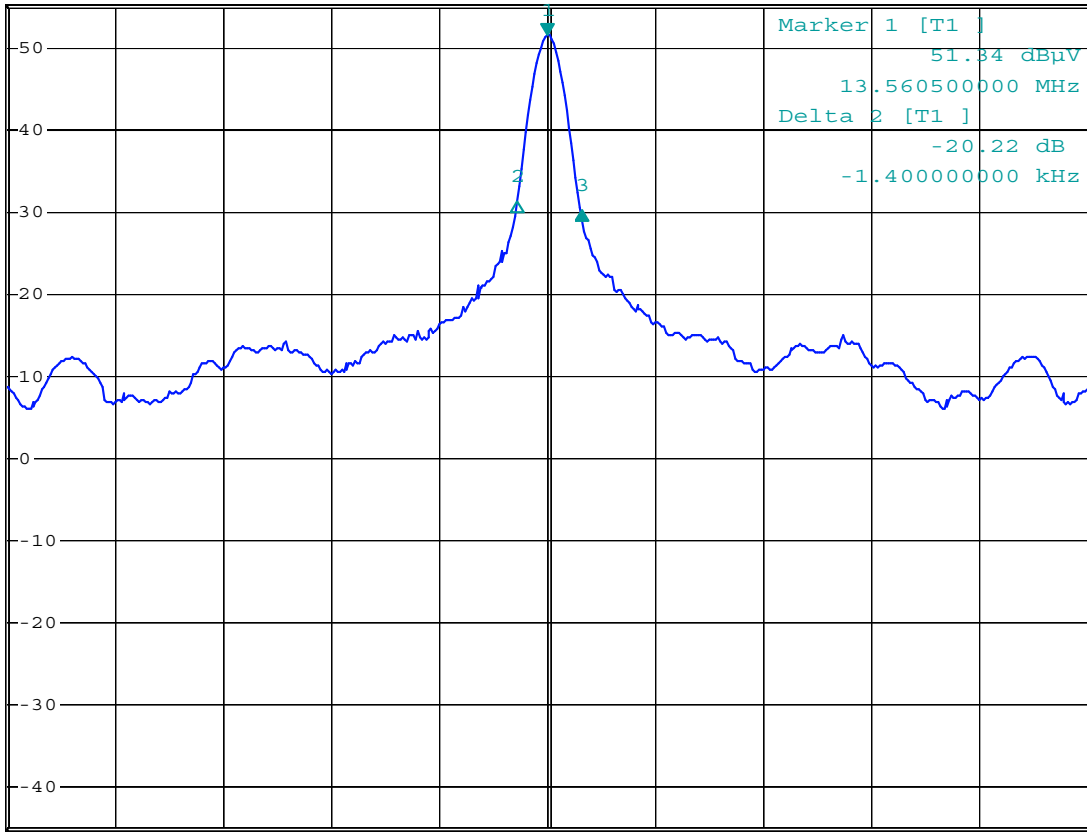

Center 13.5605 MHz 5 kHz/ Span 50 kHz

Date: 19.FEB.2010 13:51:26



Permitted frequency band:	13.553 MHz - 13.567 MHz	
20 dB bandwidth:	3 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.032 kHz - 0.085 kHz	
Bandwidth of the emission:	3.117kHz	within permitted frequency band⁷: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 2, sections 3.2(h) and 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	B = kHz
K = Overall numerical factor	K = 1
Calculation:	$B_n = 2 \cdot 1.5. \text{ kHz} \cdot 1 = 3 \text{ kHz}$


Designation of Emissions:	3k0A1D
---------------------------	---------------

8.4 Spectrum Mask

Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 7, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength (dB $\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	05 February 2010
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	-40 dB/decade

Test Result:	Test passed
--------------	-------------

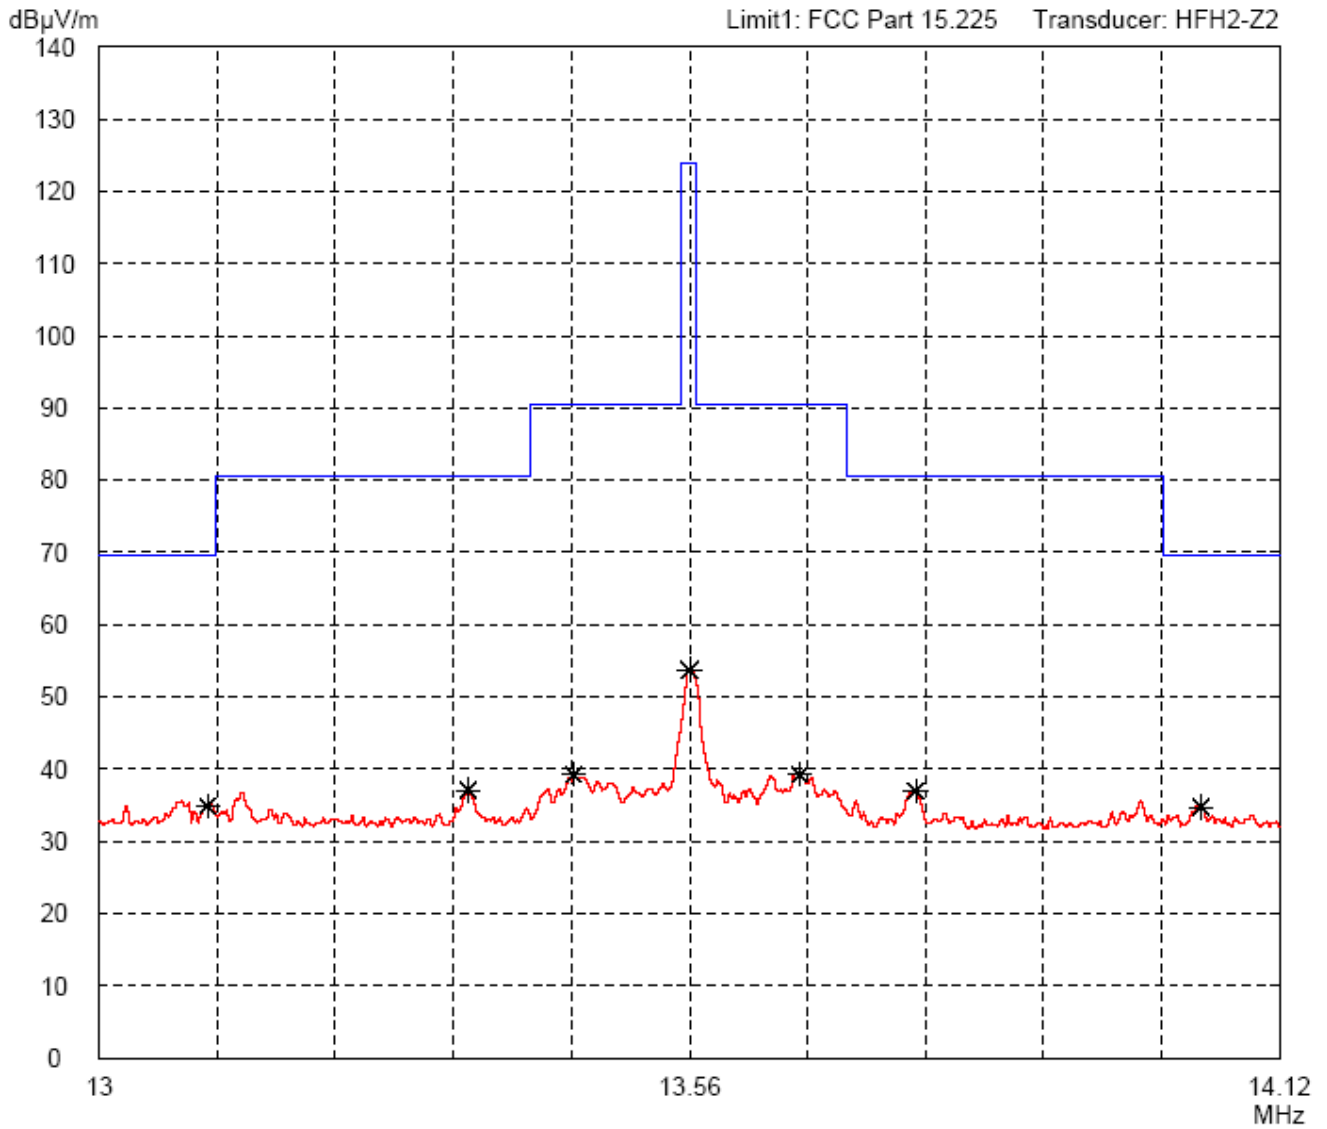

8.5 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 2, section 7.2.2		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	
Date of test:	19 April 2010
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------

Tested on:

Linecord Power supply Netbook, Phase L1

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.150	Quasi-Peak	40.9	0.0	40.9	66.0	25.1
0.200	Quasi-Peak	46.9	0.0	46.9	63.6	16.7
0.200	Average	37.3	0.0	37.3	53.6	16.3
0.265	Quasi-Peak	40.3	0.0	40.3	61.3	21.0
0.320	Quasi-Peak	37.1	0.0	37.1	59.7	22.6
0.400	Quasi-Peak	33.6	0.0	33.6	57.9	24.3
2.335	Quasi-Peak	34.2	0.0	34.2	56.0	21.8
2.400	Quasi-Peak	34.2	0.0	34.2	56.0	21.8
3.540	Quasi-Peak	34.3	0.0	34.3	56.0	21.7
4.120	Quasi-Peak	35.2	0.0	35.2	56.0	20.8
4.190	Average	27.2	0.0	27.2	46.0	18.8
4.480	Quasi-Peak	34.1	0.0	34.1	56.0	21.9
4.505	Average	26.6	0.0	26.6	46.0	19.4
9.255	Quasi-Peak	37.3	0.0	37.3	60.0	22.7
9.270	Average	31.6	0.0	31.6	50.0	18.4
10.650	Quasi-Peak	34.8	0.0	34.8	60.0	25.2
14.830	Quasi-Peak	36.8	0.0	36.8	60.0	23.2
15.185	Average	30.7	0.0	30.7	50.0	19.3
15.925	Average	29.8	0.0	29.8	50.0	20.2
15.965	Quasi-Peak	36.7	0.0	36.7	60.0	23.3

Tested on:

Linecord Power supply Netbook, Phase N

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.155	Quasi-Peak	41.2	0.0	41.2	65.7	24.5
0.190	Quasi-Peak	51.2	0.0	51.2	64.0	12.8
0.200	Average	37.1	0.0	37.1	53.6	16.5
0.255	Quasi-Peak	45.7	0.0	45.7	61.6	15.9
0.330	Quasi-Peak	39.5	0.0	39.5	59.5	20.0
0.380	Quasi-Peak	36.0	0.0	36.0	58.3	22.3
0.465	Quasi-Peak	33.6	0.0	33.6	56.6	23.0
2.840	Quasi-Peak	35.4	0.0	35.4	56.0	20.6
2.895	Average	26.6	0.0	26.6	46.0	19.4
3.170	Average	28.1	0.0	28.1	46.0	17.9
3.325	Quasi-Peak	36.5	0.0	36.5	56.0	19.5
3.655	Quasi-Peak	36.0	0.0	36.0	56.0	20.0
4.440	Average	29.1	0.0	29.1	46.0	16.9
4.545	Average	30.1	0.0	30.1	46.0	15.9
4.635	Quasi-Peak	36.9	0.0	36.9	56.0	19.1
7.915	Quasi-Peak	36.4	0.0	36.4	60.0	23.6
15.090	Quasi-Peak	37.4	0.0	37.4	60.0	22.6
15.115	Average	30.5	0.0	30.5	50.0	19.5
16.210	Quasi-Peak	34.5	0.0	34.5	60.0	25.5

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

8.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	05 February 2010
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value ($\text{dB}\mu\text{V}$)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value ($\text{dB}\mu\text{V}/\text{m}$)	Limit ($\text{dB}\mu\text{V}/\text{m}$)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	20.0	20.0	-19.1		20.9	84.0	63.1

Sample calculation of final values:

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V}/\text{m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB}/\text{m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value ($\text{dB}\mu\text{V}/\text{m}$) are relating to distance d.

8.7 Radiated Emission Measurement 30 MHz to 25 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b), 15.225(d) and 15.247 IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6, A2.6 and A8		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4))		

Comment:	
Date of test:	04 February 2010 24 June 2010, 25 June 2010
Test site:	Frequencies \leq 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	Frequencies \leq 8.2 GHz: 3 meters Frequencies $>$ 8.2 GHz: 1 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
40.680	vertical	Quasi-Peak	3.8	14.4		18.2	40.0	21.8
43.440	horizontal	Quasi-Peak	-3.7	14.5		10.8	40.0	29.2
67.800	vertical	Quasi-Peak	2.4	10.9		13.3	40.0	26.7
88.230	vertical	Quasi-Peak	-3.5	11.3		7.8	43.5	35.7
149.150	vertical	Quasi-Peak	4.6	9.7		14.3	43.5	29.2
203.400	vertical	Quasi-Peak	2.4	12.4		14.8	43.5	28.7
339.000	vertical	Quasi-Peak	2.6	15.9		18.5	46.0	27.5
493.770	vertical	Quasi-Peak	12.6	18.5		31.1	46.0	14.9
583.110	vertical	Quasi-Peak	9.2	20.4		29.6	46.0	16.4
905.280	horizontal	Quasi-Peak	-1.3	24.5		23.2	46.0	22.8
1064.000	horizontal	Peak	10.8	28.0		38.8	54.0	15.2
1140.000	vertical	Peak	16.1	28.3		44.4	54.0	9.6
1368.000	horizontal	Peak	9.2	29.2		38.3	54.0	15.7
1624.000	horizontal	Peak	8.5	30.3		38.8	54.0	15.2
2420.000	vertical	Peak	45.3	33.4		78.8		
2432.000	horizontal	Peak	46.8	33.5		80.3		
2436.000	vertical	Peak	55.5	33.5		89.0		
2452.000	horizontal	Peak	46.6	33.5		80.1		
2472.000	horizontal	Peak	30.9	33.6		64.5		
2480.000	vertical	Peak	51.5	33.6		85.1		
4825.200	vertical	Peak	9.7	41.0		50.7	54.0	3.3
4882.400	horizontal	Peak	7.9	41.2		49.1	54.0	4.9

Sample calculation of final values:


$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

8.8 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 2, section 4.7 and IC RSS-210 Issue 7, section A2.6
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.5)

Comment:	
Date of test:	04 February 2010

8.8.1 Carrier Frequency Stability vs. Temperature

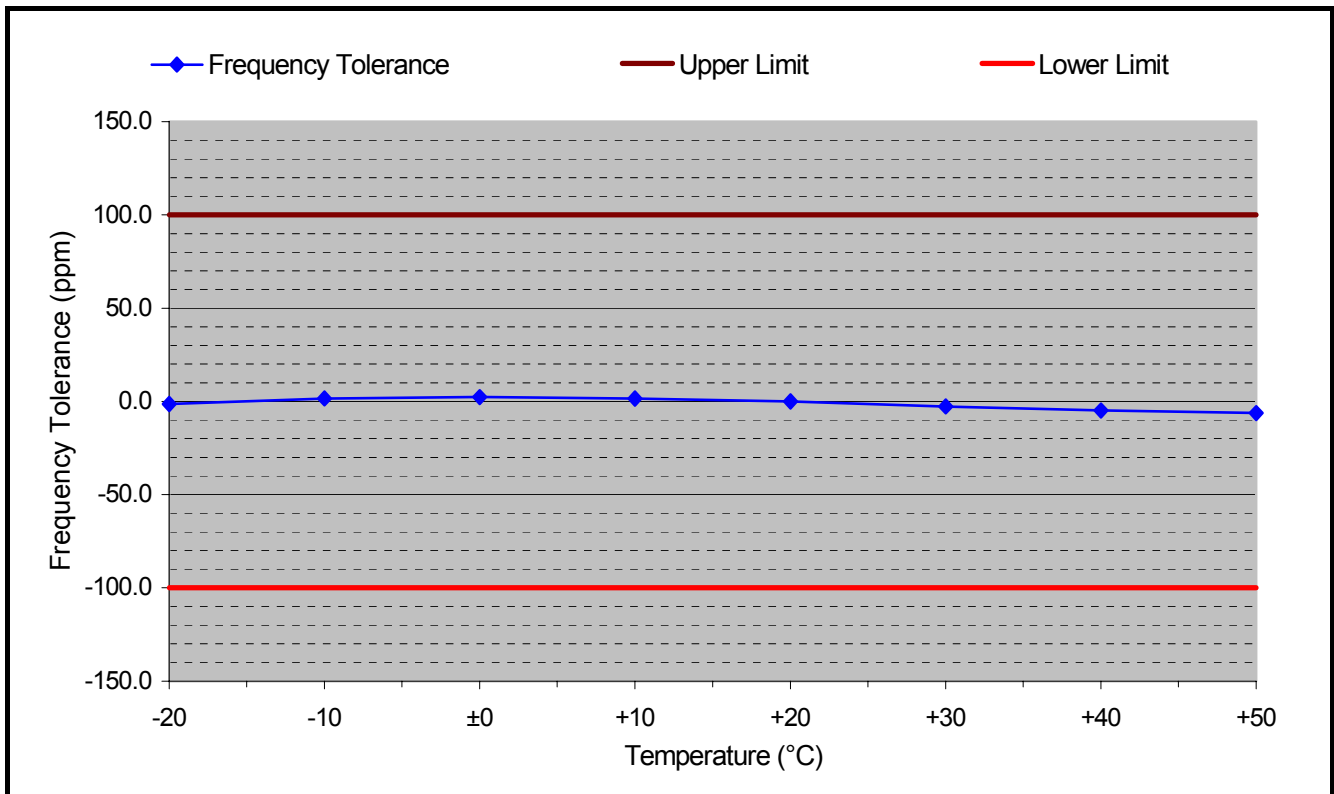


Supply voltage: 3.65 V Nominal frequency: 13.560594 MHz

Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.560575	-19	-1.4	+100.0	-100.0	98.6
-10	13.560616	22	1.6	+100.0	-100.0	98.4
±0	13.560626	32	2.3	+100.0	-100.0	97.7
+10	13.560615	21	1.5	+100.0	-100.0	98.5
+20	13.560594	0	0.0	+100.0	-100.0	100.0
+30	13.560556	-38	-2.8	+100.0	-100.0	97.2
+40	13.560528	-66	-4.9	+100.0	-100.0	95.1
+50	13.560509	-85	-6.3	+100.0	-100.0	93.7

Test Result: Test passed

8.8.2 Carrier Frequency Stability vs. Supply Voltage

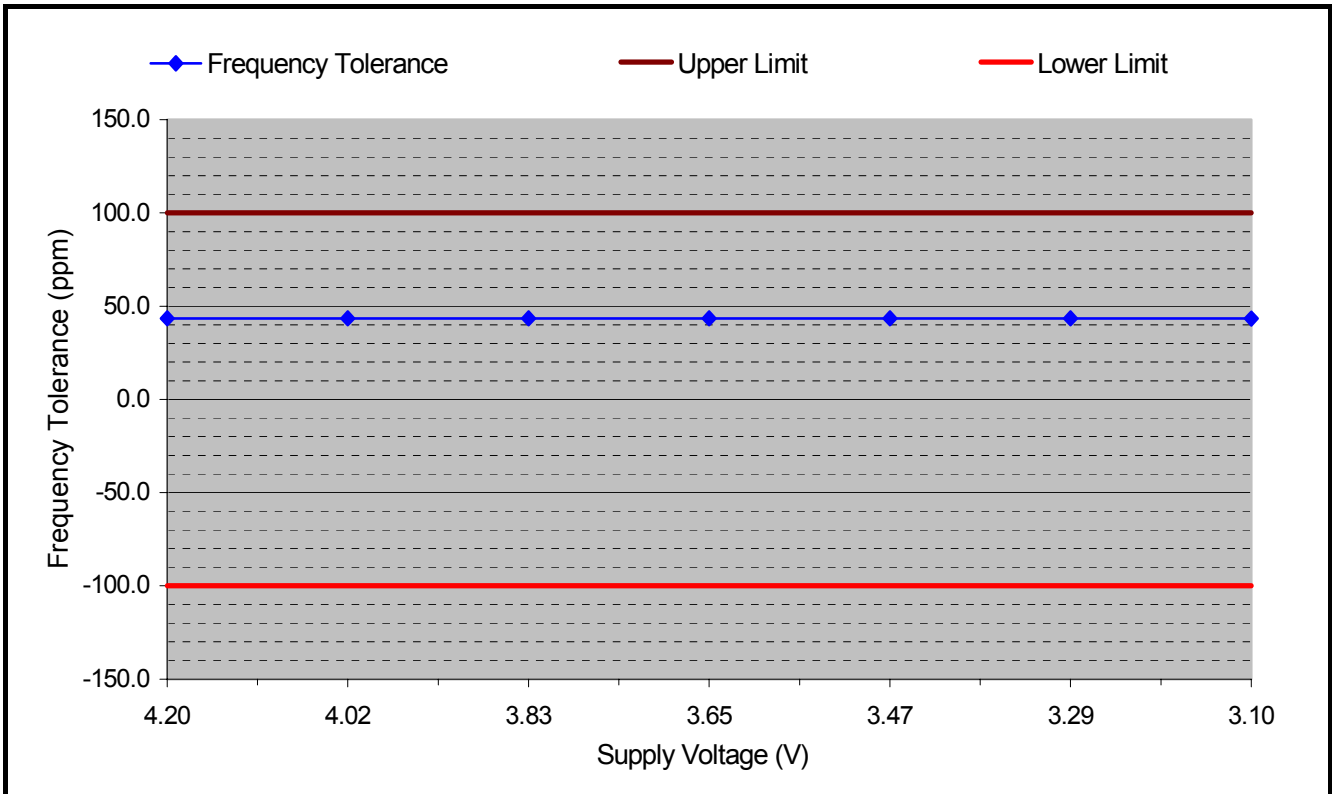

Temperature: +20 °C Battery End Point: 3.00 V
 Nominal frequency: 13.560000 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
4.20	13.560589	589	43.4	+100.0	-100.0	56.6
4.02	13.560589	589	43.4	+100.0	-100.0	56.6
3.83	13.560589	589	43.4	+100.0	-100.0	56.6
3.65	13.560589	589	43.4	+100.0	-100.0	56.6
3.47	13.560589	589	43.4	+100.0	-100.0	56.6
3.29	13.560589	589	43.4	+100.0	-100.0	56.6
3.10	13.560588	588	43.4	+100.0	-100.0	56.6

Test Result: Test passed

8.9 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 2, section 5.5
Guide:	IC RSS-102 Issue 2, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots\dots\dots \mathbf{W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$</p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p><input type="checkbox"/> the field strength⁸ in V/m: $FS = \dots\dots\dots \mathbf{V/m}$</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p>with:</p> <p>Distance between the antennas in m: $D = \dots\dots\dots \mathbf{m}$</p>			<input type="checkbox"/>	
<input checked="" type="checkbox"/> not detachable				
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁸:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{0.033^{-6} W}$ <p>with:</p> <p>Field strength in V/m: $FS = \mathbf{0.0001 V/m}$</p> <p>Distance between the two antennas in m: $D = \mathbf{10 m}$</p>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = \mathbf{0.033^{-6} W}$				

⁸ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.



Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input checked="" type="checkbox"/> less than or equal to 20 cm <input type="checkbox"/> greater than 20 cm		<input checked="" type="checkbox"/>		
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head <input checked="" type="checkbox"/> body-worn		<input checked="" type="checkbox"/>		
SAR evaluation				
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.				
<input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and its source-based time-averaged output power is less than, or equal to 200 mW for General Public Use and 1000 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 1 GHz up to 2.2 GHz inclusively and its source-based time-averaged output power is less than, or equal to 100 mW for General Public Use and 500 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 2.2 GHz up to 3 GHz inclusively and its source-based time-averaged output power is less than, or equal to 20 mW for General Public Use and 100 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 3 GHz up to 6 GHz inclusively and its source-based time-averaged output power) is less than, or equal to 10 mW for General Public Use and 50 mW for Controlled Use.				<input type="checkbox"/>
<input type="checkbox"/> SAR evaluation is documented in test report no.				
RF exposure evaluation				
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.				
<input checked="" type="checkbox"/> The device operates below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W.				<input checked="" type="checkbox"/>
<input type="checkbox"/> The device operates at or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W.				<input type="checkbox"/>
<input type="checkbox"/> RF exposure evaluation is documented in test report no.				

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2008
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2008
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 2 containing General Requirements and Information for the Certification of Radiocommunication Equipmment, published by Industry Canada	June 2007
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 7 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	June 2007
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 2 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	June 2007
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 3: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) , published by Industry Canada	June 2009
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002



TRC-43 Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada October 9, 1982



10 Revision History


Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	22.02.2010	Thomas Eberl (cj)	First Edition
2	19.04.2010	Christa Jäger	Edition 2 Update required for FCC-/IC-Certification Conducted Powerline Emission Measurement added
3	25.06.2010	Martin Steindl	Edition 3: Measurements for radiated emissions up to 25 GHz added



11 Charts taken during testing


Conducted Emission Test 150 kHz - 30 MHz
 according to FCC Part 15 Subpart C

Model: AC-MOBILEREADER	Mode: - Charging mode via USB - Powered from Netbook Samsung N 130
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord Power supply Netbook Phase L1	
Date of test: 04/19/2010	Operator: T. Eberl
Test performed: automatically	File name:
Detector: Peak / Final Results: QP	Final results: 20 dB Margin 25 Subranges

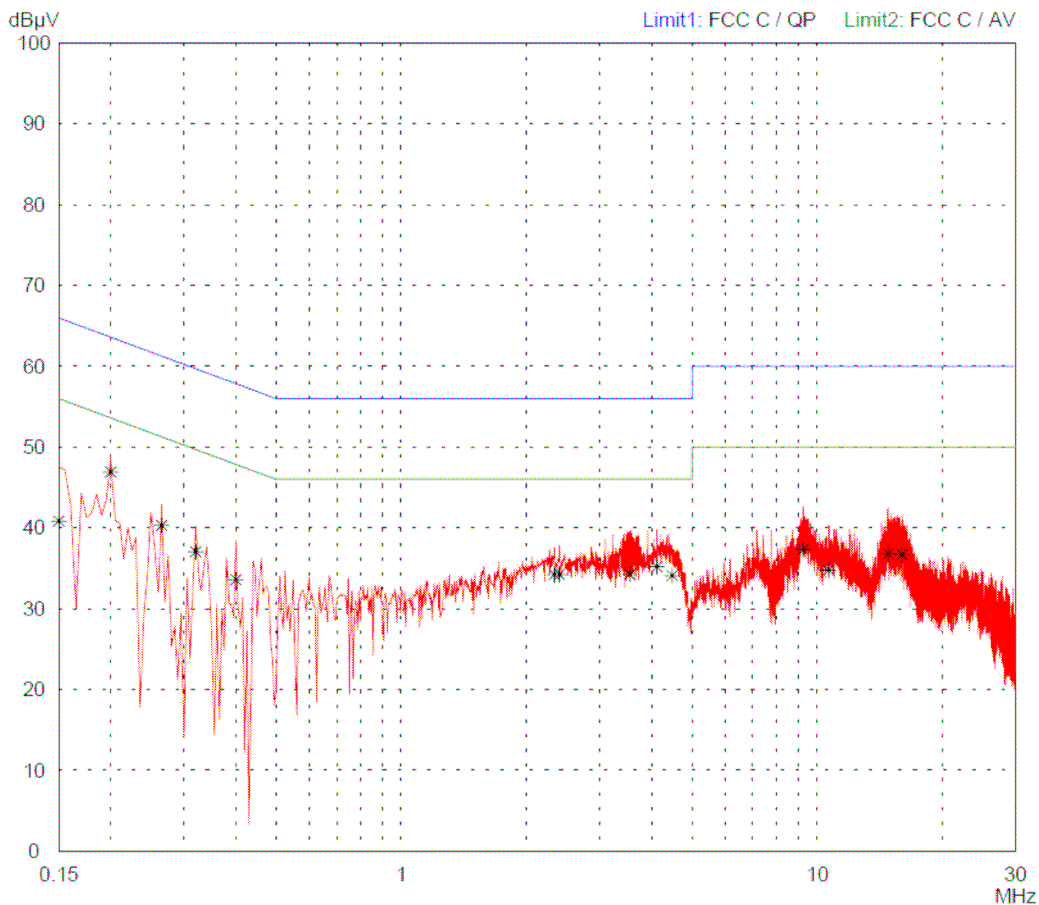


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Model: AC-MOBILEREADER</td></tr> <tr><td style="padding: 2px;">Serial no.: 09400003</td></tr> <tr><td style="padding: 2px;">Applicant: SKIDATA AG</td></tr> <tr><td style="padding: 2px;">Test site: Shielded room, cabin no. 4</td></tr> <tr><td style="padding: 2px;">Tested on: Linecord Power supply Netbook Phase L1</td></tr> <tr><td style="padding: 2px;">Date of test: 04/19/2010</td></tr> <tr><td style="padding: 2px;">Operator: T. Eberl</td></tr> <tr><td style="padding: 2px;">Test performed: automatically</td></tr> <tr><td style="padding: 2px;">File name:</td></tr> </table>	Model: AC-MOBILEREADER	Serial no.: 09400003	Applicant: SKIDATA AG	Test site: Shielded room, cabin no. 4	Tested on: Linecord Power supply Netbook Phase L1	Date of test: 04/19/2010	Operator: T. Eberl	Test performed: automatically	File name:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Mode: - Charging mode via USB - Powered from Netbook Samsung N 130</td></tr> </table>	Mode: - Charging mode via USB - Powered from Netbook Samsung N 130
Model: AC-MOBILEREADER											
Serial no.: 09400003											
Applicant: SKIDATA AG											
Test site: Shielded room, cabin no. 4											
Tested on: Linecord Power supply Netbook Phase L1											
Date of test: 04/19/2010											
Operator: T. Eberl											
Test performed: automatically											
File name:											
Mode: - Charging mode via USB - Powered from Netbook Samsung N 130											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Detector: Average / Final Results: AV</td></tr> </table>	Detector: Average / Final Results: AV	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Final results: 20 dB Margin 25 Subranges</td></tr> </table>	Final results: 20 dB Margin 25 Subranges								
Detector: Average / Final Results: AV											
Final results: 20 dB Margin 25 Subranges											

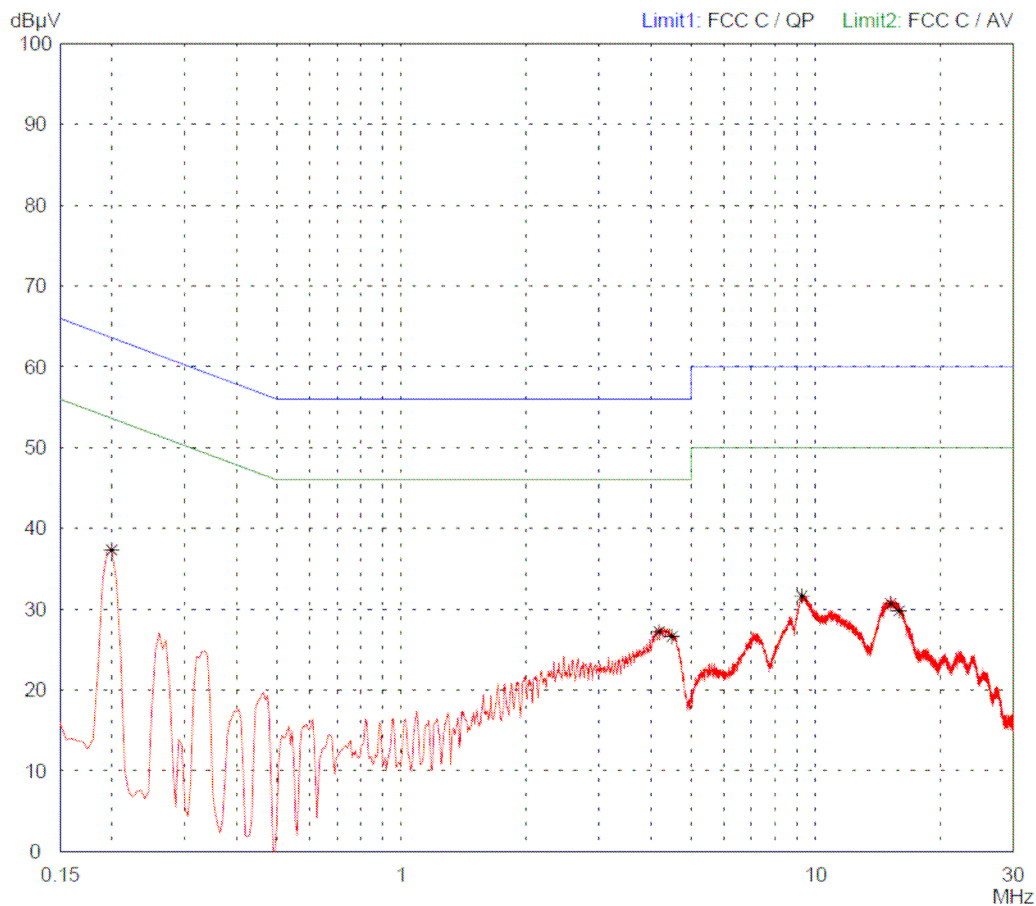

Conducted Emission Test 150 kHz - 30 MHz
 according to FCC Part 15 Subpart C


Model: AC-MOBILEREADER	Mode: - Charging mode via USB - Powered from Netbook Samsung N 130
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord Power supply Netbook Phase N	
Date of test: 04/19/2010	Operator: T. Eberl
Test performed: automatically	File name:
Detector: Peak / Final Results: QP	Final results: 20 dB Margin 25 Subranges

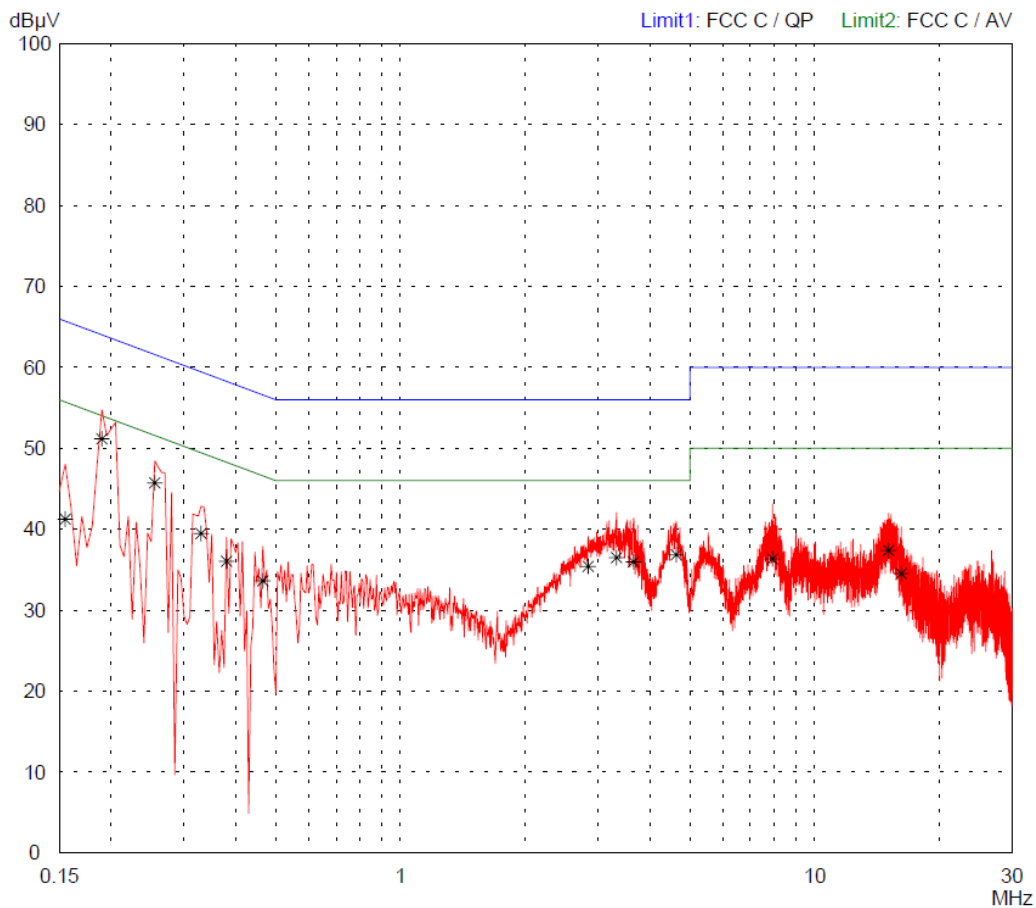

**Conducted Emission Test 150 kHz - 30 MHz
 according to FCC Part 15 Subpart C**

<p>Model: AC-MOBILEREADER</p> <p>Serial no.: 09400003</p> <p>Applicant: SKIDATA AG</p> <p>Test site: Shielded room, cabin no. 4</p> <p>Tested on: Linecord Power supply Netbook Phase N</p> <p>Date of test: 04/19/2010 Operator: T. Eberl</p> <p>Test performed: automatically File name:</p>	<p>Mode:</p> <ul style="list-style-type: none"> - Charging mode via USB - Powered from Netbook Samsung N 130
---	---


Detector: Average / Final Results: AV	Final results: 20 dB Margin 25 Subranges
---	---

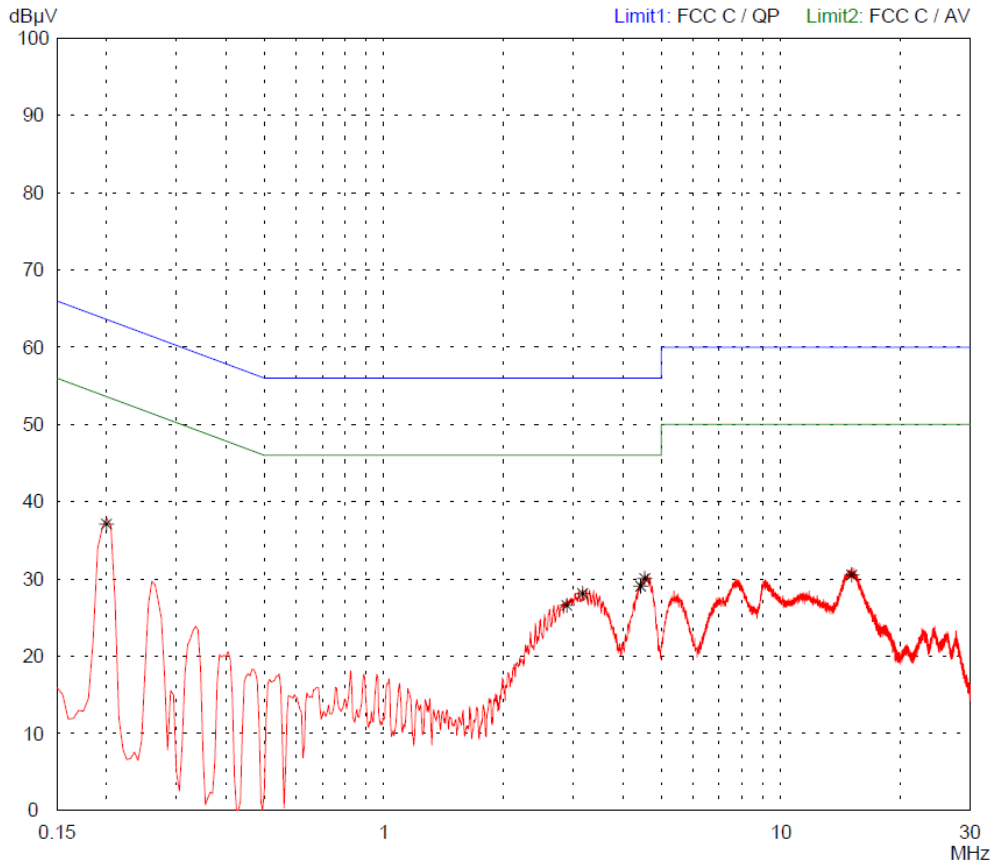

Result: Limit kept	Project file: 69575-01059 Page of Pages
------------------------------	--


**Radiated Emission Test 9 kHz - 30 MHz
 acc. to FCC Part 15 (Fully Anechoic Chamber)**

<p>Model: AC-MOBILEREADER</p> <p>Serial no.: 09400003</p> <p>Applicant: SKIDATA AG</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres</p> <p>Date of test: 02/05/2010</p> <p>Operator: T. Eberl</p> <p>Test performed: by hand</p> <p>File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - Test mode #2 - EUT in vertical position (1)
<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>

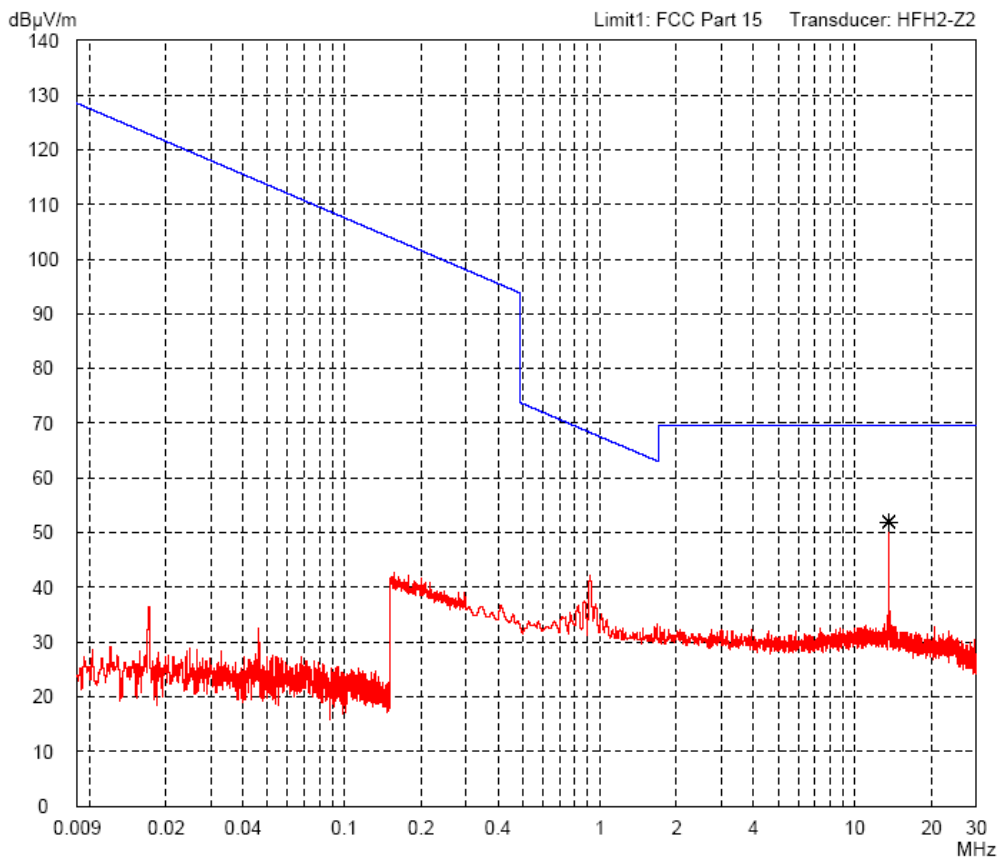


**Radiated Emission Test 9 kHz - 30 MHz
 acc. to FCC Part 15 (Fully Anechoic Chamber)**

<p>Model: AC-MOBILEREADER</p> <p>Serial no.: 09400003</p> <p>Applicant: SKIDATA AG</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres</p> <p>Date of test: 02/05/2010 Operator: T. Eberl</p> <p>Test performed: by hand File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - Test mode #2 - EUT in horizontal position - right side on table (2)
<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>

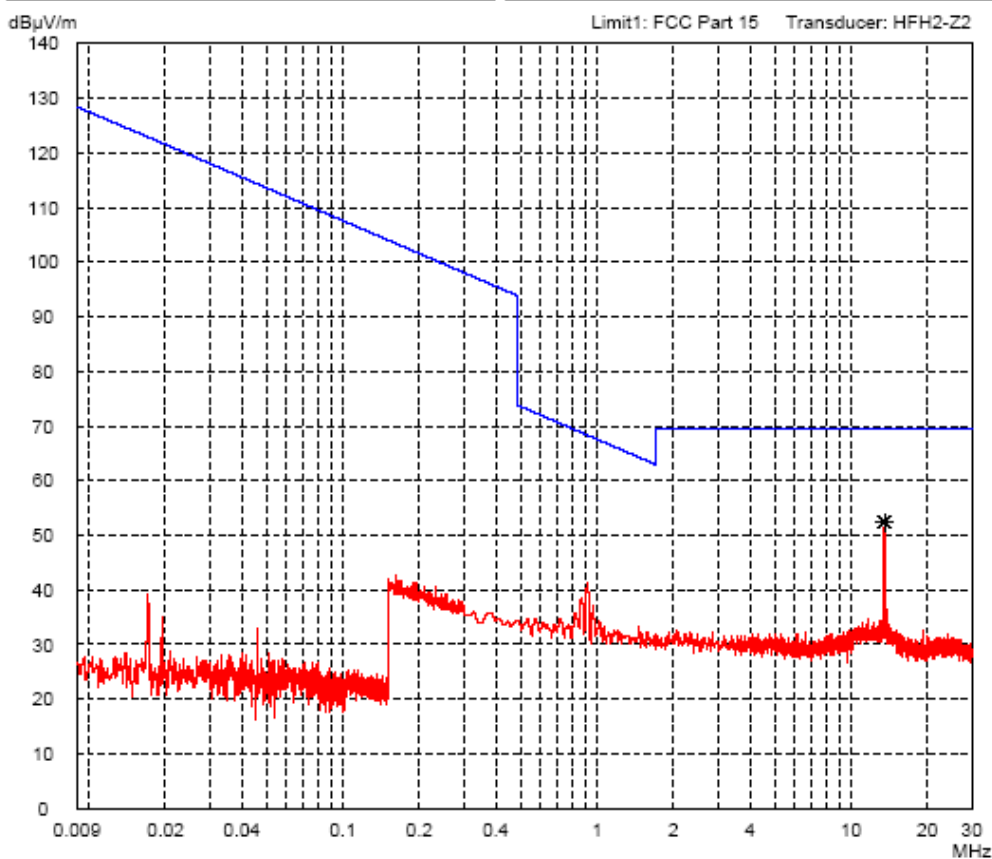


**Radiated Emission Test 9 kHz - 30 MHz
 acc. to FCC Part 15 (Fully Anechoic Chamber)**

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in horizontal position - rear side on table (3)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 02/05/2010	Operator: T. Eberl
Test performed: by hand	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

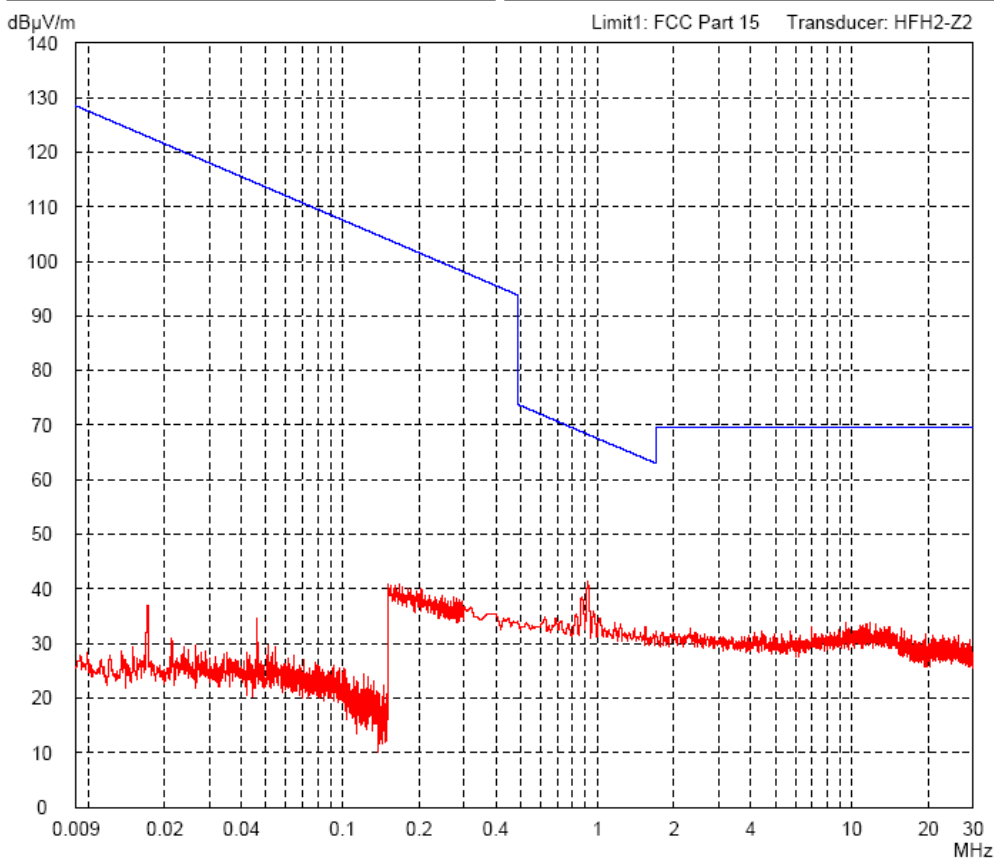


Radiated Emission Test 13 MHz - 14.12 MHz
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)

<p>Model: AC-MOBILEREADER</p> <p>Serial no.: 09400003</p> <p>Applicant: SKIDATA AG</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres</p> <p>Date of test: 02/05/2010 Operator: T. Eberl</p> <p>Test performed: by hand File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - Test mode #2 - EUT in vertical position
<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>

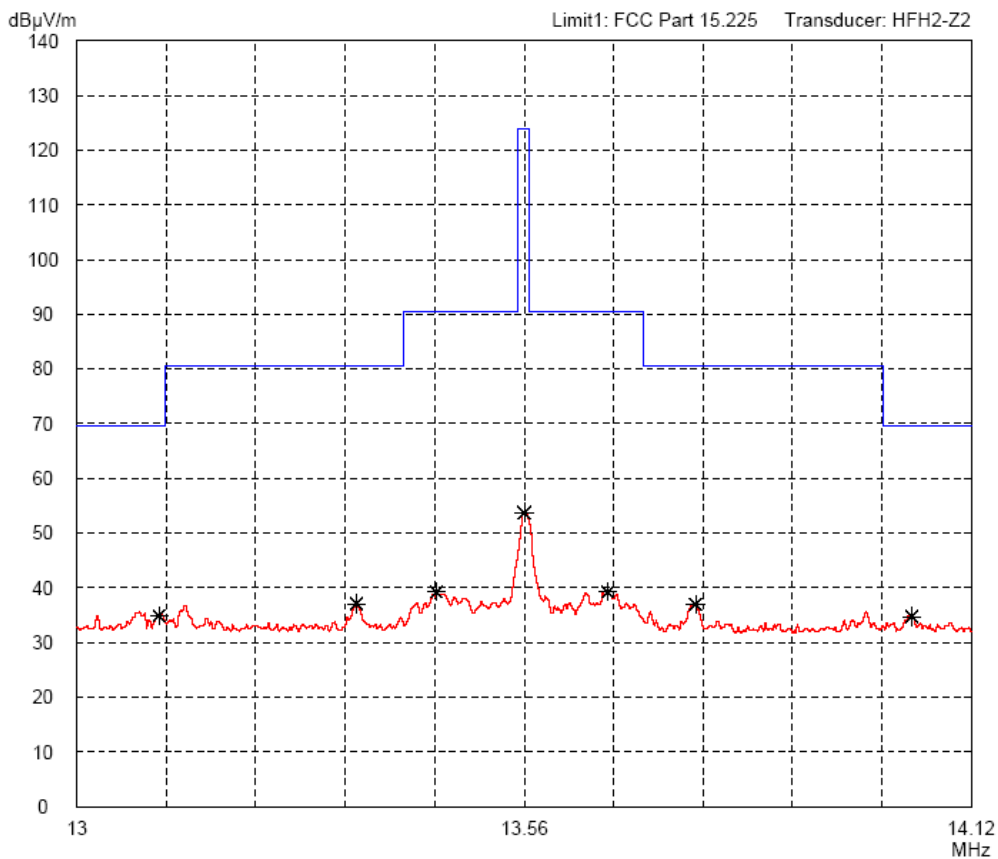

Radiated Emission Test 13 MHz - 14.12 MHz
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)


Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in horizontal position - right side on table (2)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 02/05/2010	Operator: T. Eberl
Test performed: by hand	File name: default.emi
Detector: Peak	List of values: Selected by hand

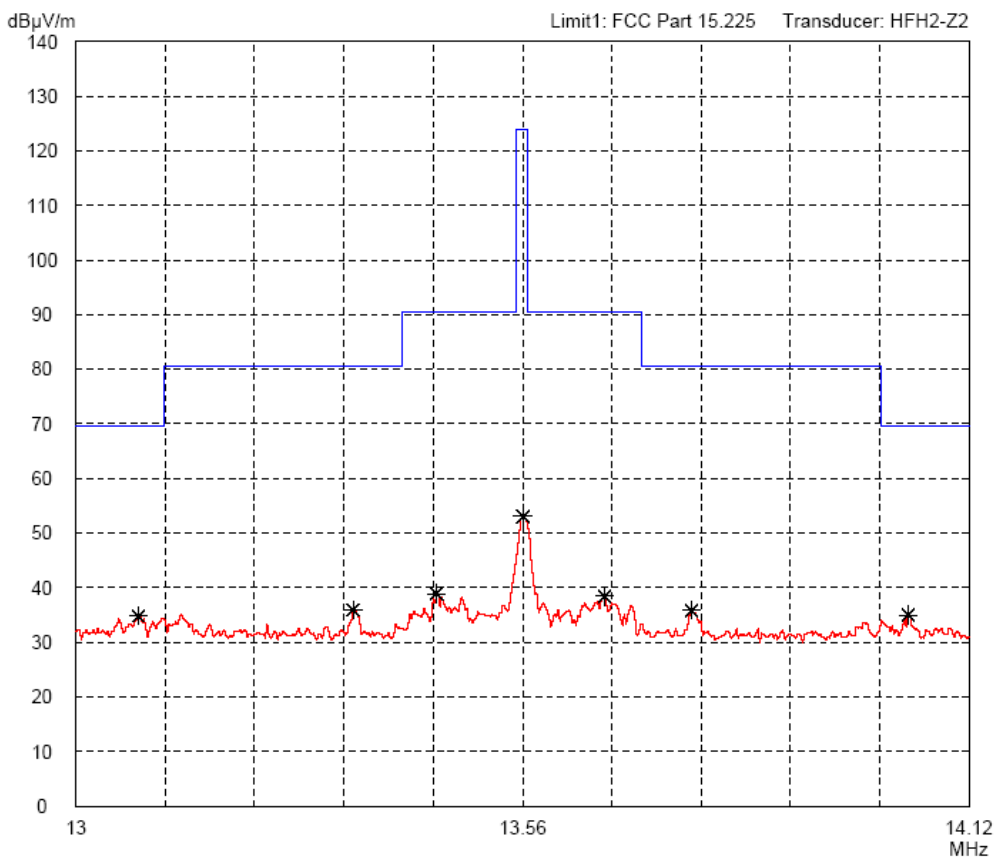


Radiated Emission Test 13 MHz - 14.12 MHz
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: AC-MOBILEREADER <hr/> Serial no.: 09400003 <hr/> Applicant: SKIDATA AG <hr/> Test site: Fully anechoic room, cabin no. 2 <hr/> Tested on: Test distance 3 metres <hr/> Date of test: Operator: 02/05/2010 T. Eberl <hr/> Test performed: File name: by hand default.emi	Comment: - TX mode - Test mode #2 - EUT in horizontal position - rear side on table (3)
---	--

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

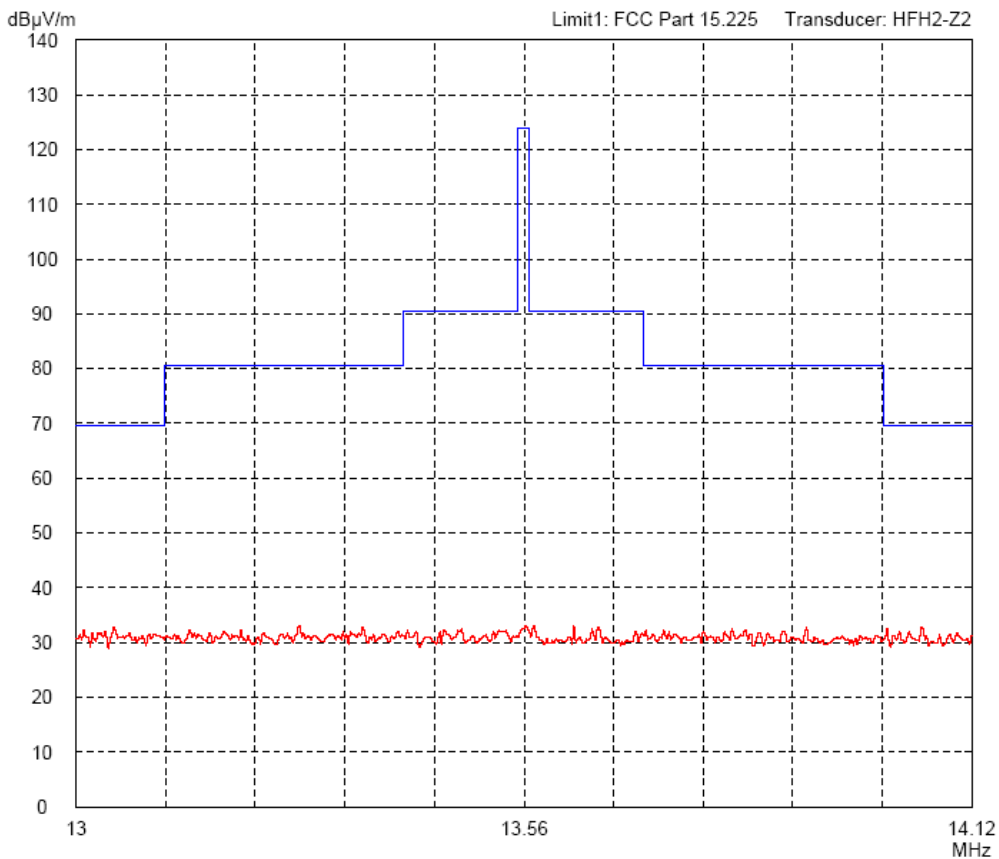


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)	
Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in vertical position (1)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 02/04/2010 Operator: T. Eberl	
Test performed: automatically File name: default.emi	
Detector: Peak	List of values: 10 dB Margin 50 Subranges

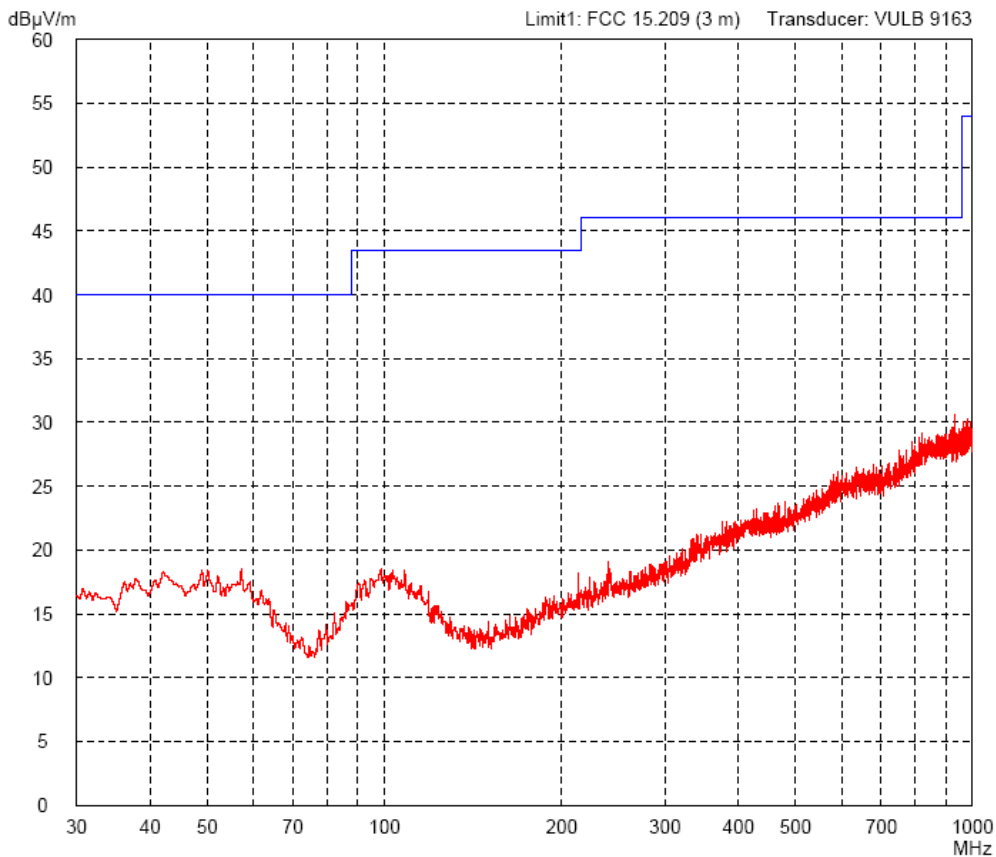


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in vertical position (1)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 02/04/2010	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

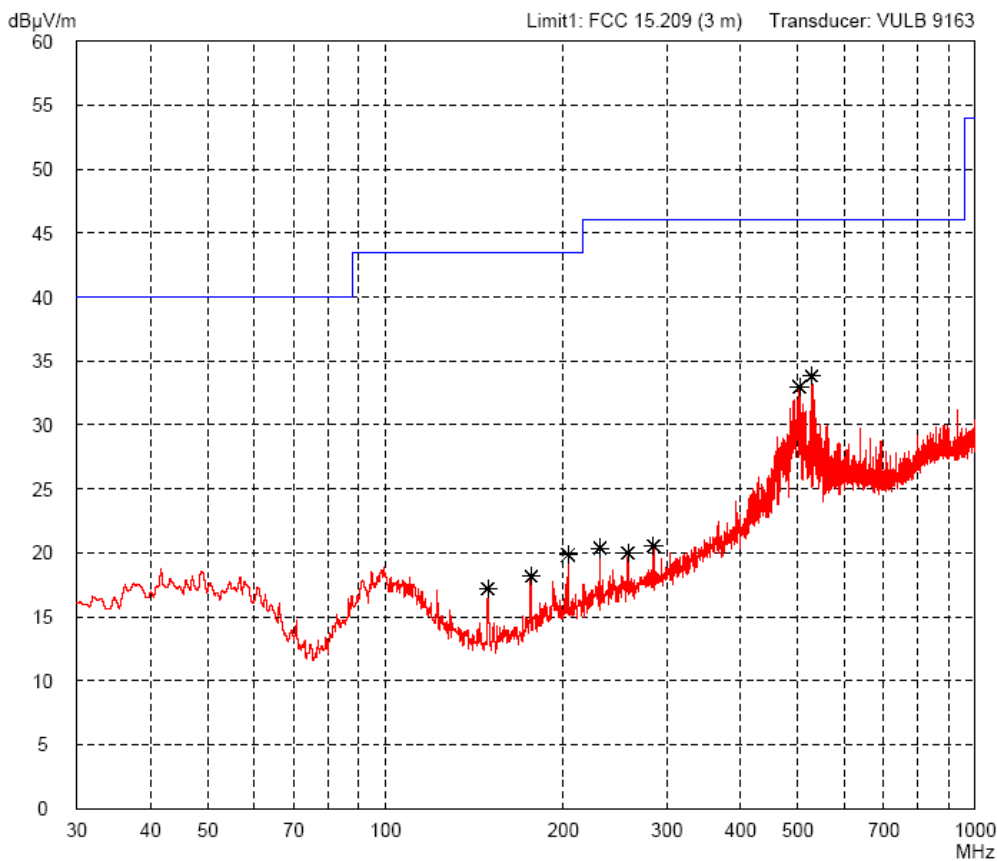


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in horizontal position - right side on table (2)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 02/04/2010	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

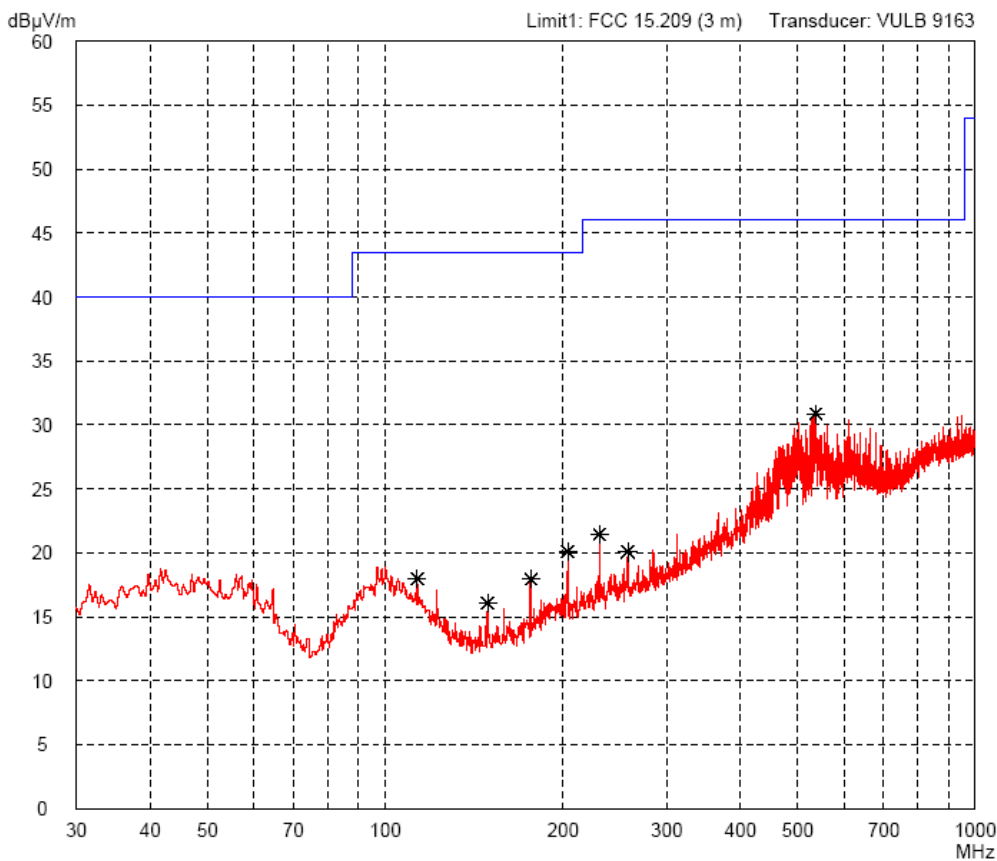


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in horizontal position - right side on table (2)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 02/04/2010 Operator: T. Eberl	
Test performed: automatically File name: default.emi	
Detector: Peak	List of values: 10 dB Margin 50 Subranges

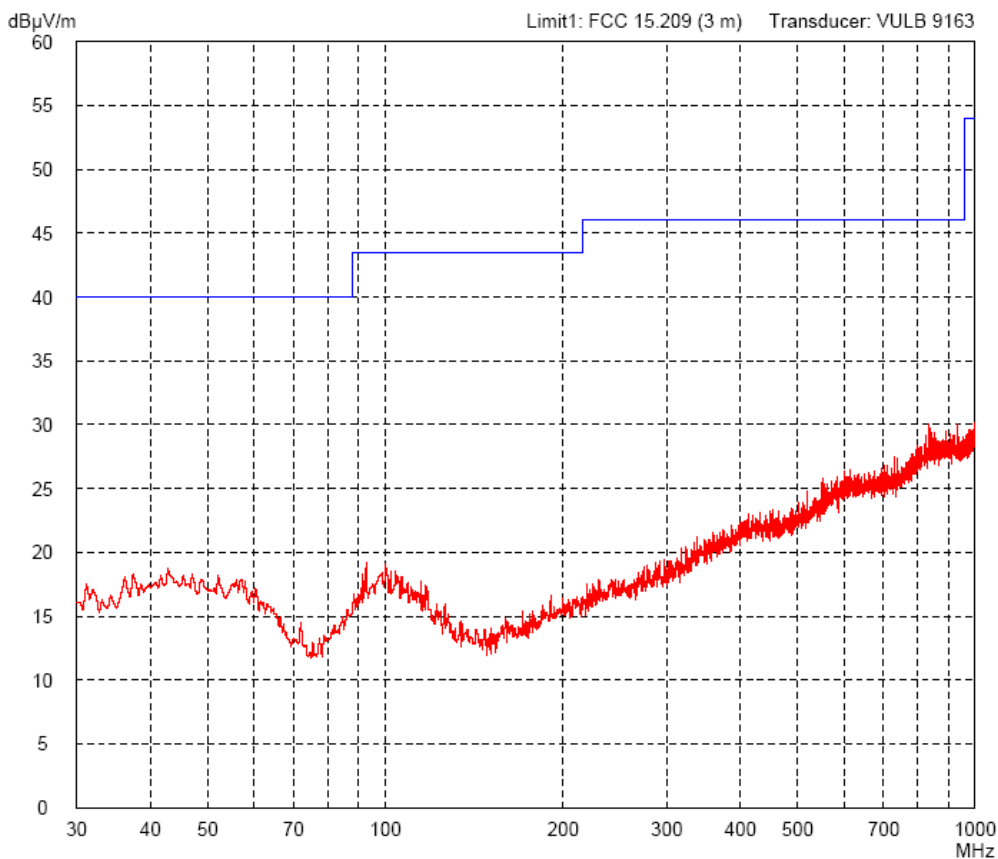


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in horizontal position - rear side on table (3)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 02/04/2010	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

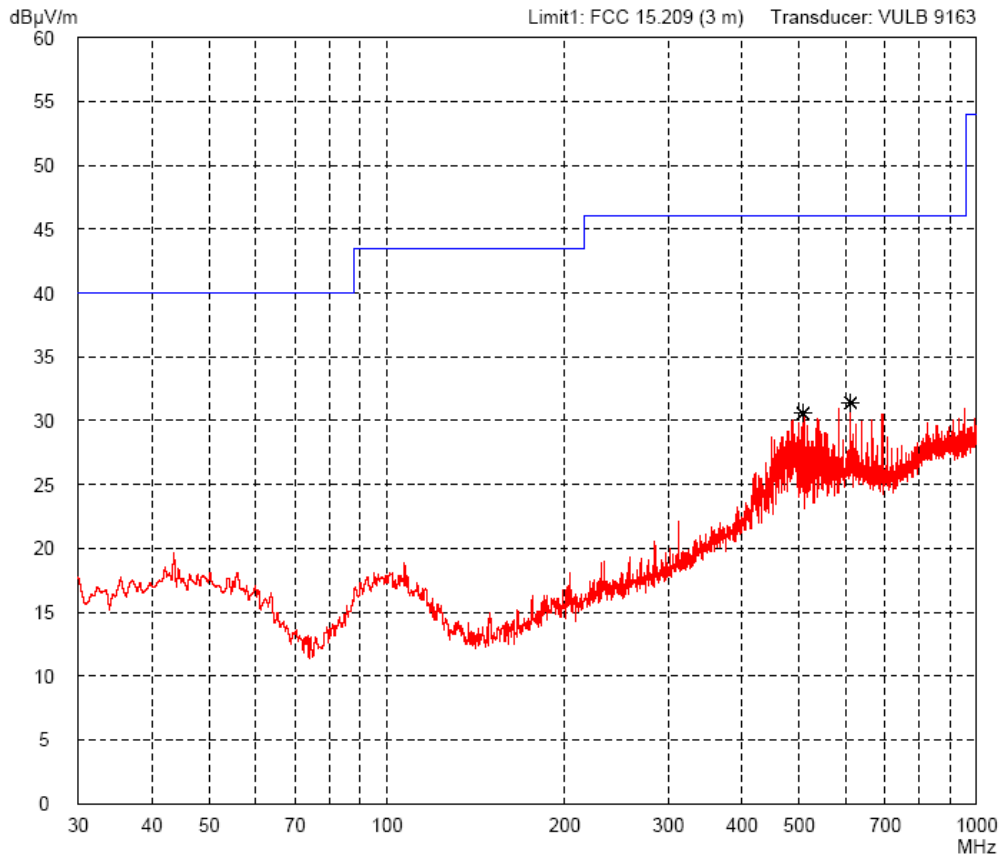


Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - EUT in horizontal position - rear side on table (3)
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 02/04/2010 Operator: T. Eberl	
Test performed: automatically File name: default.emi	List of values: Selected by hand
Detector: Peak	

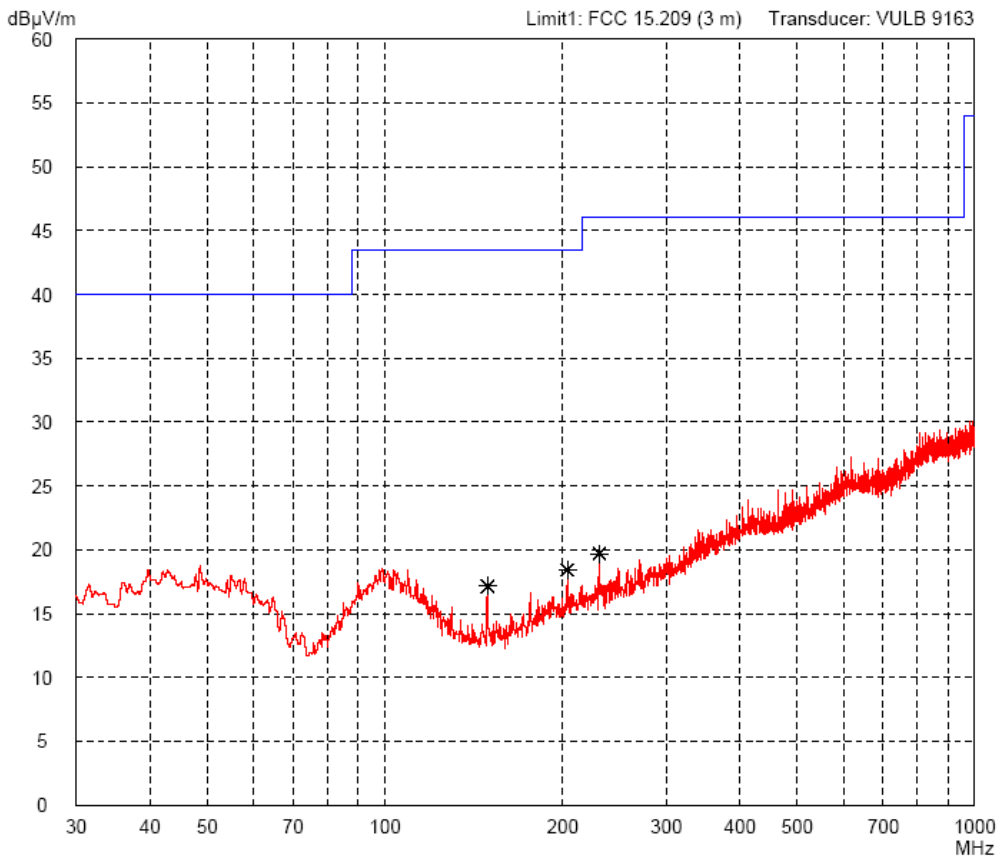


Radiated Emission Test 1 GHz - 3 GHz
 acc. to FCC Part 15 Subpart C (FAR)

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL laptop PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 06/23/2010	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

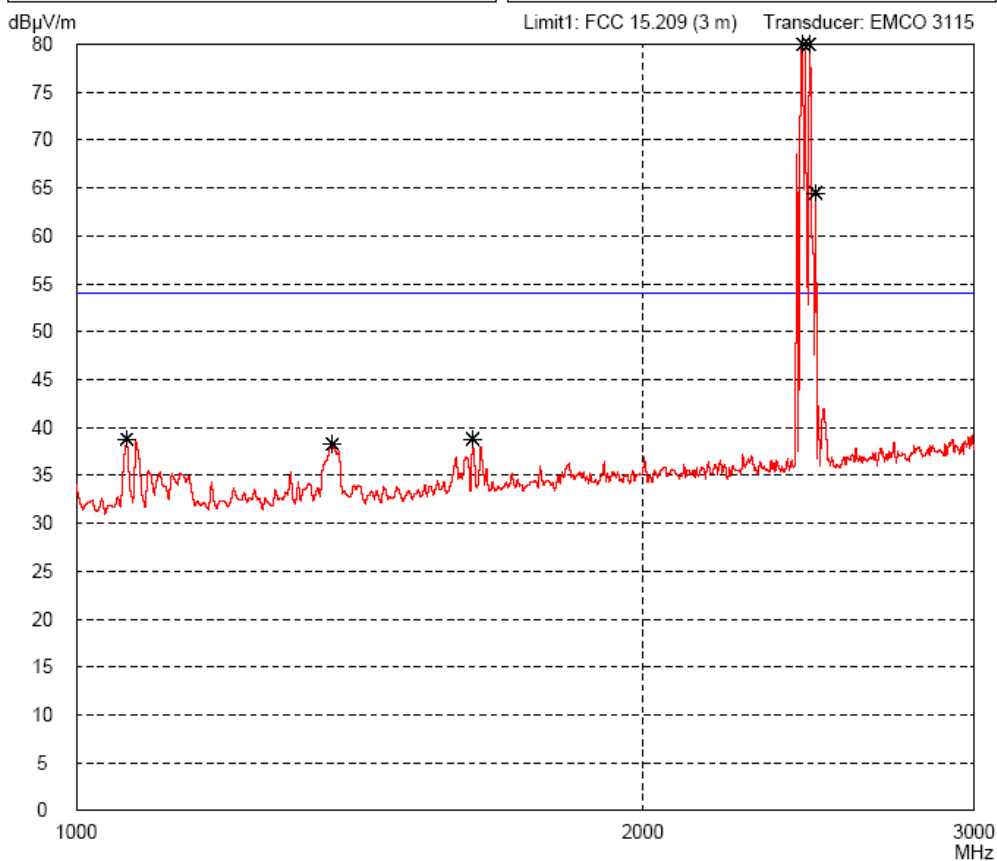

**Radiated Emission Test 1 GHz - 3 GHz
 acc. to FCC Part 15 Subpart C (FAR)**


Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 06/23/2010	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

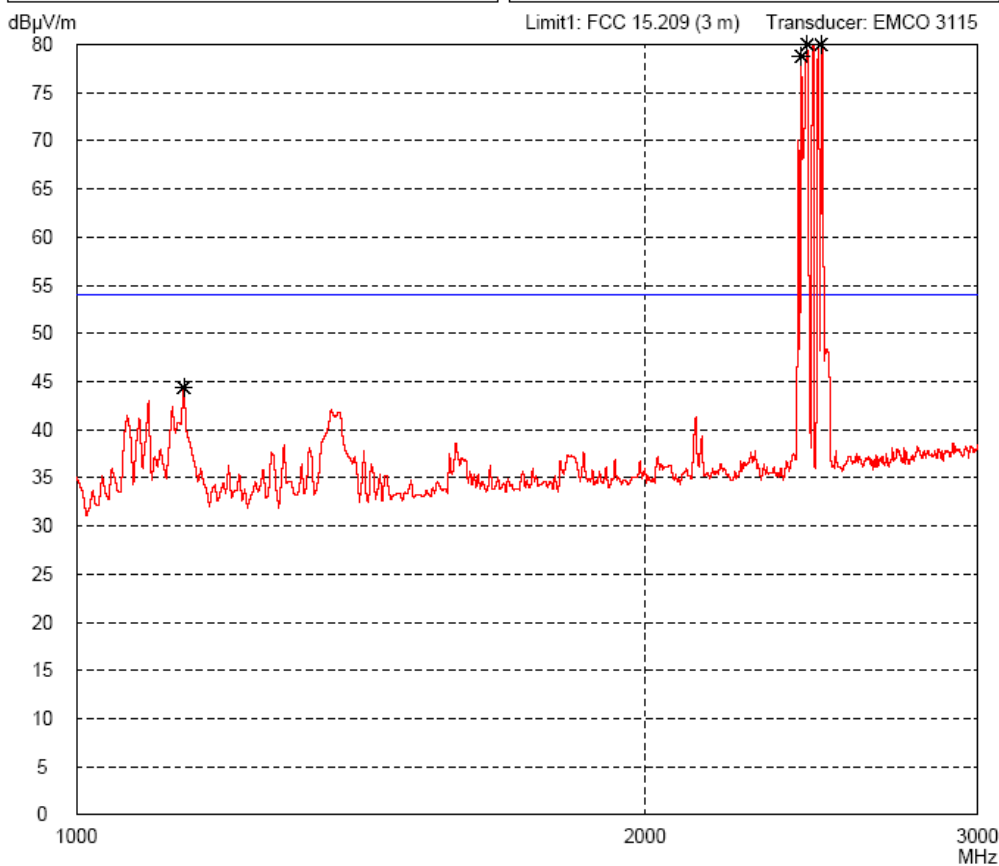


Radiated Emission Test 3 GHz - 8.2 GHz
 acc. to FCC Part 15 Subpart C (FAR)

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 06/23/2010	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

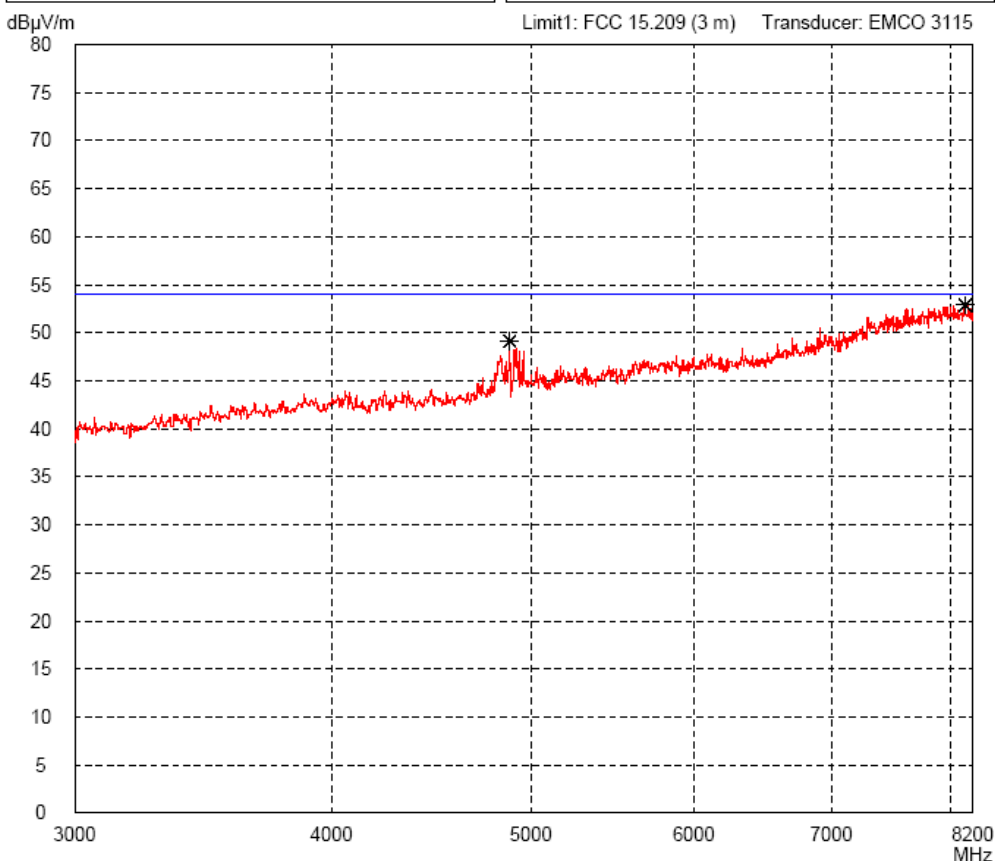


Radiated Emission Test 3 GHz - 8.2 GHz acc. to FCC Part 15 Subpart C (FAR)	
Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 06/23/2010	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

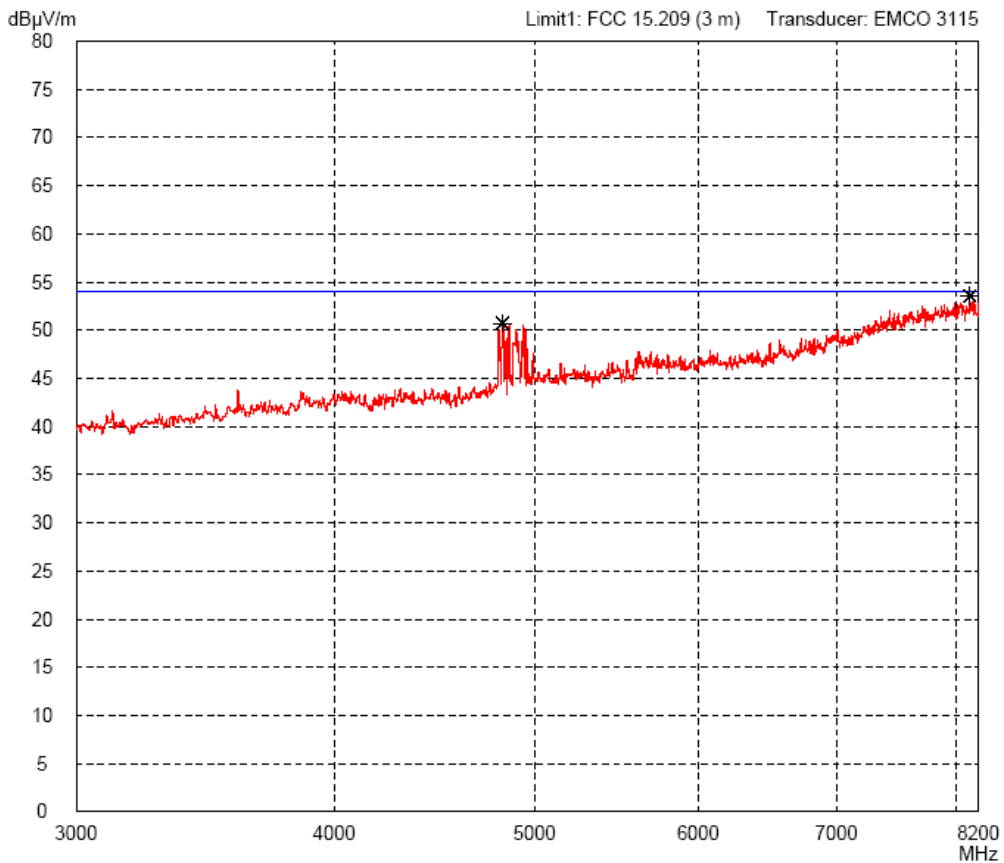

**Radiated Emission Test 8.2 GHz - 12.4 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER Serial no.: 09400003 Applicant: SKIDATA AG Test site: Fully anechoic room, cabin no. 2 Tested on: Test distance 1 meter Horizontal Polarization Date of test: 06/23/2010 Operator: M. Steindl Test performed: automatically File name: default.emi	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
---	---


Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

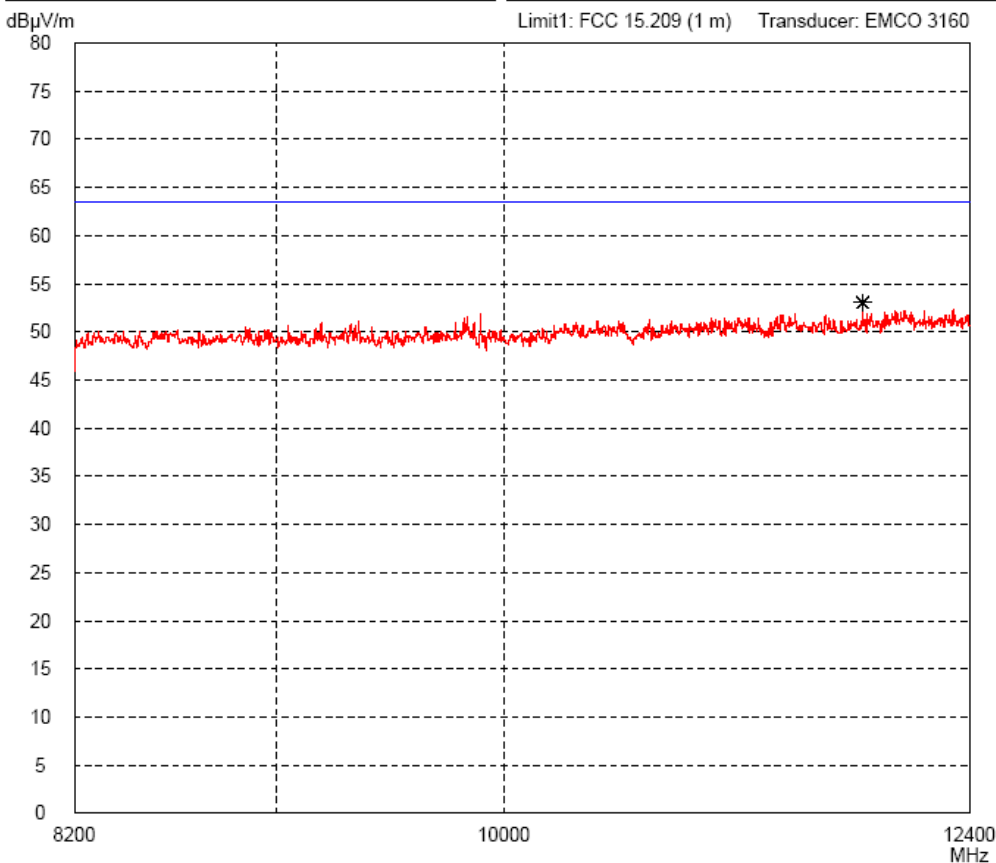

**Radiated Emission Test 8.2 GHz - 12.4 GHz
 acc. to FCC Part 15 Subpart C (FAR)**


Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 06/23/2010 Operator: M. Steindl	
Test performed: automatically File name: default.emi	

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

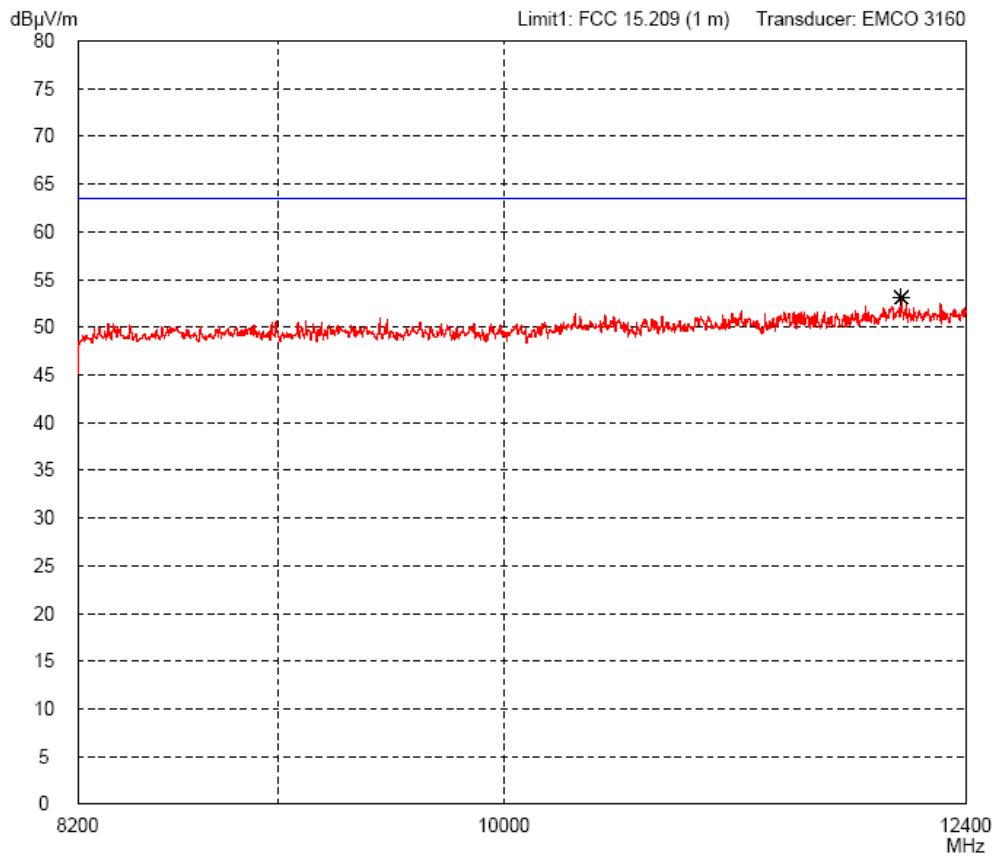


Radiated Emission Test 12.4 GHz - 18 GHz
 acc. to FCC Part 15 Subpart C (FAR)

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 06/23/2010	
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

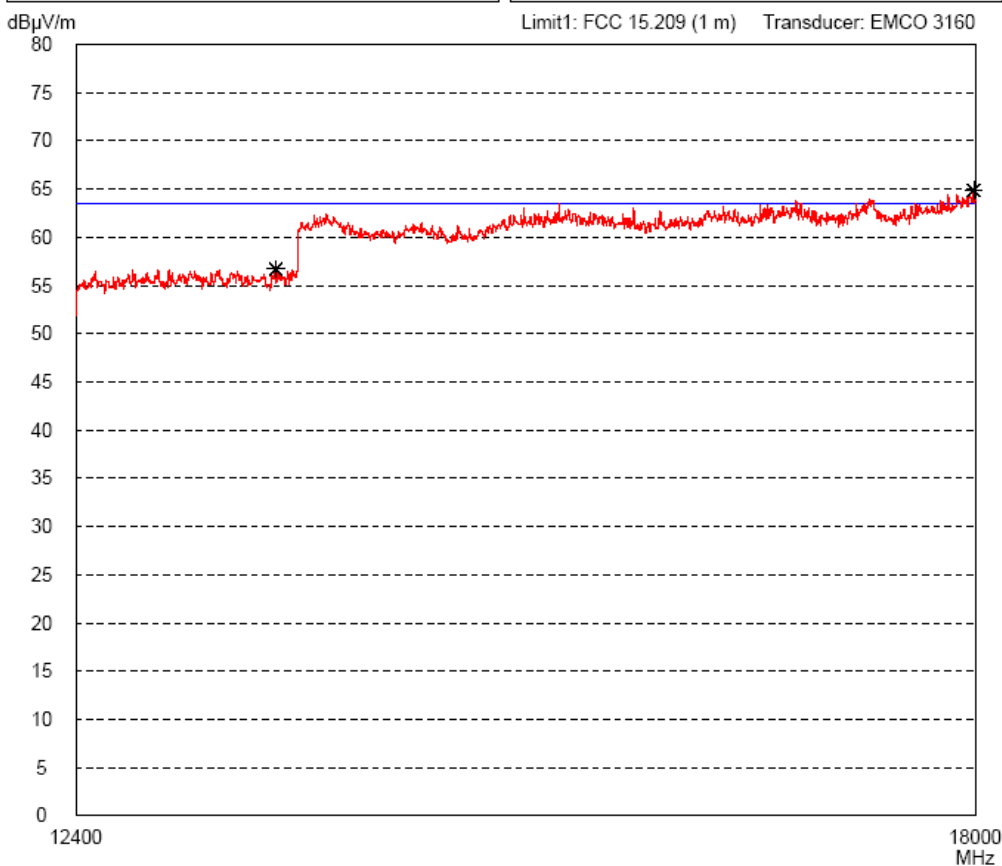


**Radiated Emission Test 12.4 GHz - 18 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 06/23/2010	
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

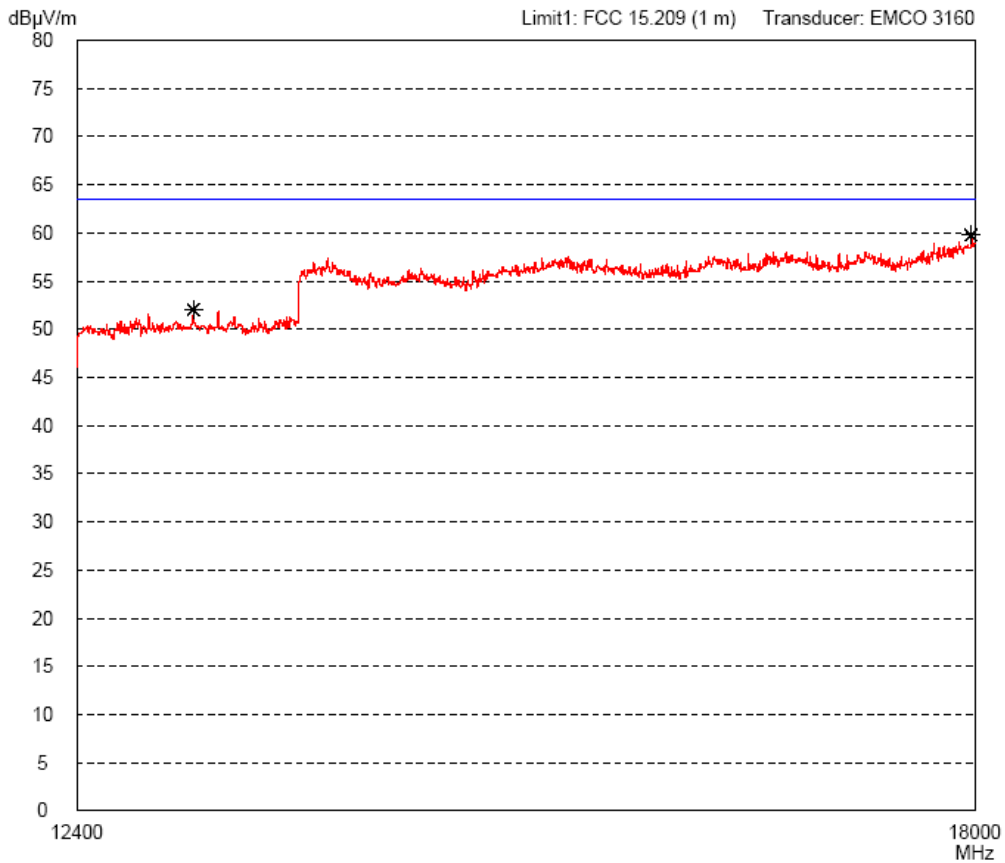


**Radiated Emission Test 12.4 GHz - 18 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Serial no.: 09400003	
Applicant: SKIDATA AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 06/23/2010	
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

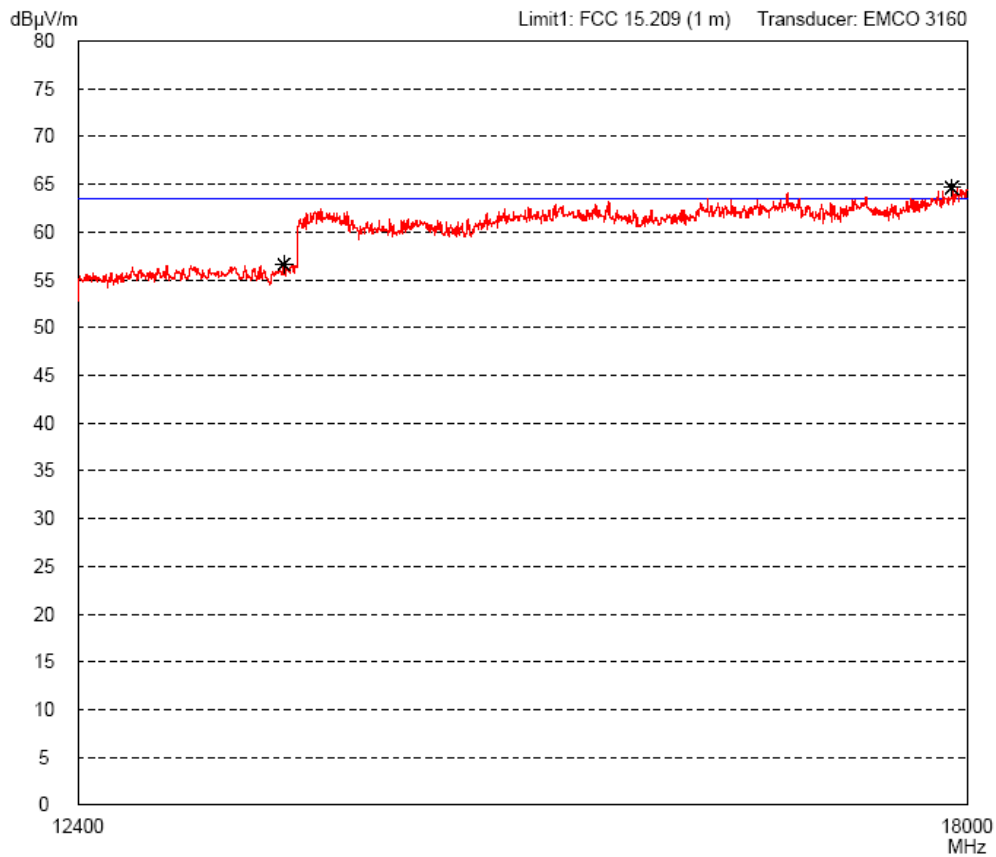

**Radiated Emission Test 12.4 GHz - 18 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: AC-MOBILEREADER <hr/> Serial no.: 09400003 <hr/> Applicant: SKIDATA AG <hr/> Test site: Fully anechoic room, cabin no. 2 <hr/> Tested on: Test distance 1 meter Vertical Polarization <hr/> Date of test: 06/23/2010 Operator: M. Steindl <hr/> Test performed: automatically File name: default.emi	Comment: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC
Detector: Peak	List of values: Selected by hand

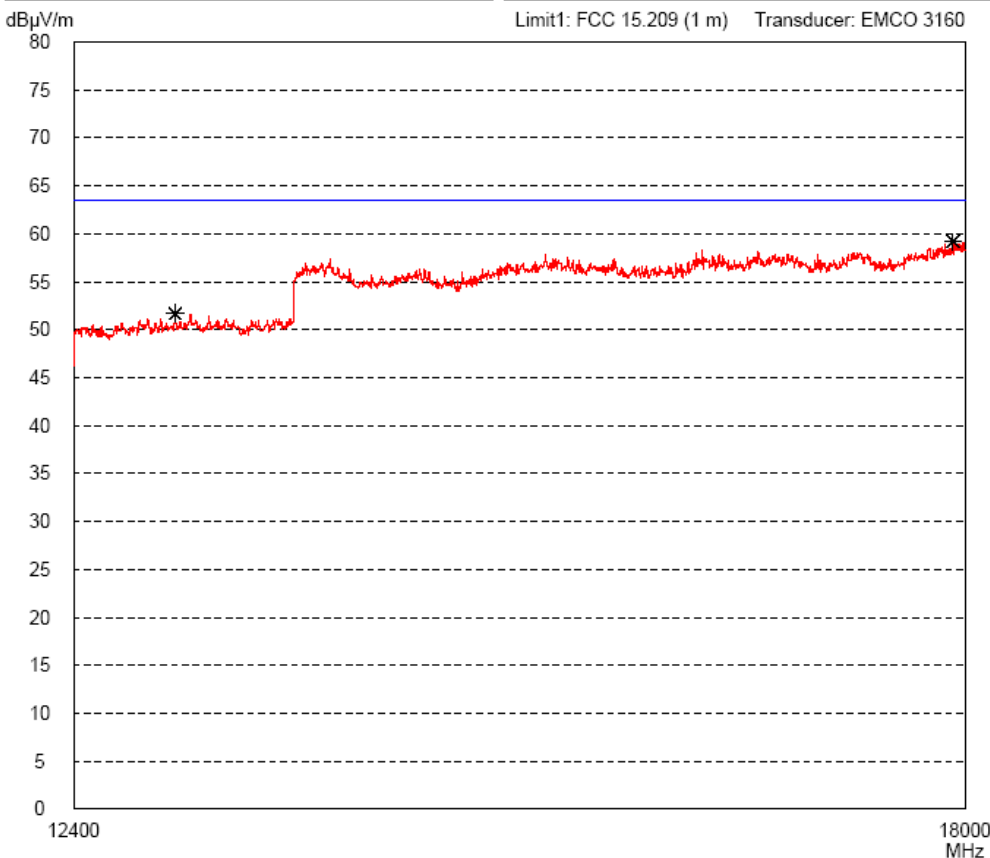


Radiated Emission Test acc. to FCC Part 15 Subpart C

Model: AC-MOBILEREADER	Mode: - TX mode - Test mode #2 - Bluetooth connected to DELL lapto PC - Distance: 1 m - Polarisation: vertical
Serial No.: 09400003	
Applicant: SKIDATA AG	

Ref.Level 79.8 dB μ V
 5 dB/Div.

ATT 0 dB

Ref. Offset 42.8 dB

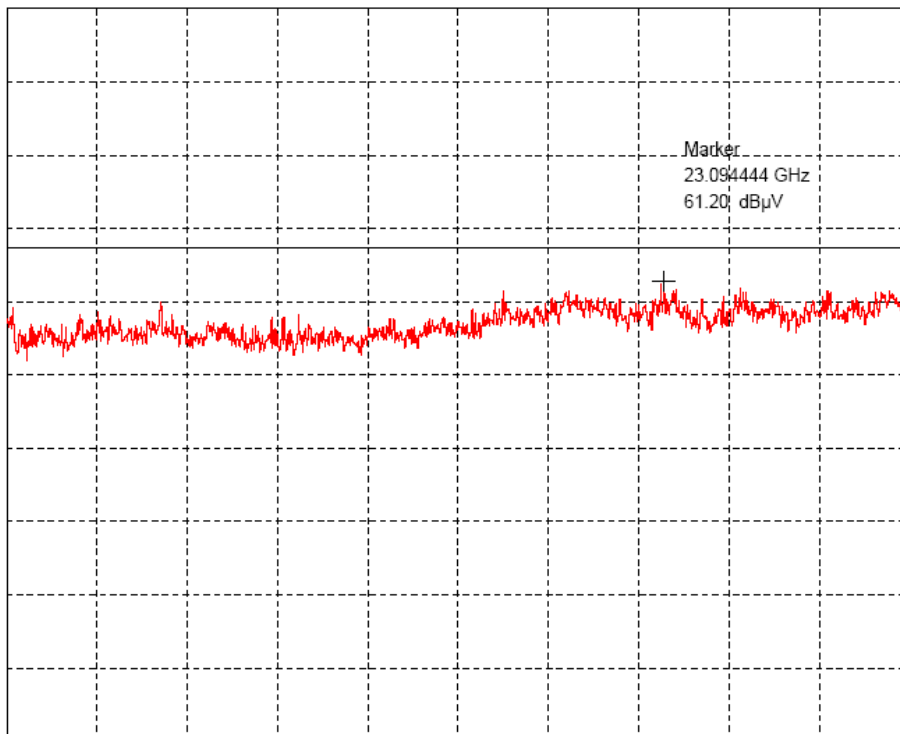

Start 18.000 GHz
 RBW 1 MHz

VBW 1 MHz

Stop 25.000 GHz
 SWP 40 ms

Tested by: M. Steindl	Project-No.: 69575-01059
Date: 2010/06/25	Page of pages