



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A06032005
Report No.: FCCA06032005
Page: 1 of 17
Date: Jun. 19, 2006

Product Name: SYSTEM 122
Model Number: ZT2SC, ZT2SCS
Applicant: ZENTAN TECHNOLOGY CO., LTD.
NO. 92, HSING-SHENG RD., CHIA-LI CHENG,
TAINAN HSIEN, TAIWAN, R.O.C.
Date of Receipt: Mar. 20, 2006
Finished date of Test: Apr. 25, 2006
Applicable Standards: 47 CFR Part 15, Subpart C
ANSI C63.4: 2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By :

Nick Hsieh
(Nick Hsieh)

Date:

2006/6/19

Approved By :

Johnson Ho
(Johnson Ho, Director)

Date:

6/19/2006

FCC ID: QSW2SCS

NVLAQ®

Lab Code: 200099-0

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 2 of 17 Date: Jun. 19, 2006
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------------------------------------------------------

Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT.....	3
1.1	DOCUMENT POLICY	3
1.2	TEST STATEMENT	3
2.	DESCRIPTION OF EUT AND TEST MODE	4
2.1	GENERAL DESCRIPTION OF EUT.....	4
2.2	DESCRIPTION OF EUT INTERNAL DEVICE.....	4
2.3	DESCRIPTION OF TEST MODE.....	4
2.4	DESCRIPTION OF SUPPORT UNIT	5
3.	DESCRIPTION OF APPLIED STANDARDS.....	5
4.	RADIATED EMISSION TEST.....	6
4.1	RADIATED EMISSION LIMIT.....	6
4.2	TEST EQUIPMENT.....	7
4.3	TEST SET-UP	8
4.4	TEST PROCEDURE	9
4.5	EUT OPERATING CONDITION	9
4.6	RADIATED EMISSION TEST RESULT	10
6	TIME DOMAIN AND DUTY CYCLE TEST.....	12
6.1	TEST EQUIPMENT.....	12
6.2	TEST SET-UP	12
6.3	TEST PROCEDURE	12
6.4	EUT OPERATING CONDITION	12
6.5	TIME DOMAIN AND DUTY CYCLE TEST RESULT	13
7.	PHOTOS OF TESTING.....	15
7	TERMS OF ABRIVATION.....	17

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 3 of 17 Date: Jun. 19, 2006
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------------------------------------------------------

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- The heartbeat simulator (see the test photo) was produced signal to EUT during the test.
- DC power source, 3V from Lithium battery, was used during the test.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 4 of 17 Date: Jun. 19, 2006
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------------------------------------------------------

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	SYSTEM 122
MODEL NO.	ZT2SC, ZT2SCS
POWER SUPPLY	DC 3V, 0.5mA
CABLE	N/A
I/O PORT	N/A
FREQUENCY BAND	127KHz±10%
CARRIER FREQUENCY	127KHz±10%
NUMBER OF CHANNEL	1
CHANNEL SPACING	0
MODULATION TYPE	PULSE
DUTY CYCLE	0.5-5%
MODE OF OPERATION	SIMPLEX
BIT RATE OF TRANSMISSION	1000 BIT/SEC
ANTENNA TYPE	Coils would be on ferrite cores and soldered to transmitter

NOTE :

ZT2SC and ZT2SCS are identical in all aspects except for enclosure.

The EUT is the transmitter part. For more detailed features, please refer to the User's Manual of EUT.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

2.3 DESCRIPTION OF TEST MODE

N/A (It is only applicable to more than one test mode.)

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 5 of 17 Date: Jun. 19, 2006
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------------------------------------------------------

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID / DOC	CABLE
1	HEART RATEMONITOR	ZENTAN	GT3	N/A	N/A

NOTE : For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of radio product and according to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

ANSI C63.4: 2003

All tests have been performed and recorded as per the above standards.

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 6 of 17 Date: Jun. 19, 2006
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------------------------------------------------------

4. RADIATED EMISSION TEST

4.1 RADIATED EMISSION LIMIT

All emission from EUT, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

FCC Part 15, Subpart C Section 15.209.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH ($\mu\text{V/m}$)
0.009 - 0.490	300	2400/F(kHz)
0.490-1.705	300	2400/F(kHz)
1.705-30.0	30	30
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
ABOVE 960	3	500

NOTE : 1. In the emission tables above , the tighter limit applies at the band edges.

2. Distance refers to the distance between measuring instrument , antenna , and the closest point of any part of the device or system.

According to the FCC Part 15, Subpart A Section 15.31(f)(2), the extrapolation factor of 40 dB/decade is used for measurement distances different then specified in with limits for frequencies below 30 MHz.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 7 of 17 Date: Jun. 19, 2006
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------------------------------------------------------

4.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM ANALYZER	9 kHz TO 7GHz	ROHDE & SCHWARZ	FSP7 10289	JUN. 2006 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2007 SRT
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	APR. 2007 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2006 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-1KW/ 860612	AUG. 2004 SRT
LOOP ANTENNA	9 kHz TO 30 MHz	R&S	FHF2-Z2/ 1162 1/2	OCT. 2006 R&S
EMITEST RECEIVER	9kHz~2.75GHz	R&S	ESCS30/830245/ 012	OCT. 2006 ETC

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.

<p>Spectrum Research & Testing Lab., Inc.  No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	<p>Reference No.: A06032005 Report No.: FCCA06032005 Page: 8 of 17 Date: Jun. 19, 2006</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------	-----------------------------------------------------------------------------------------------------------------------------------

4.3 TEST SET-UP

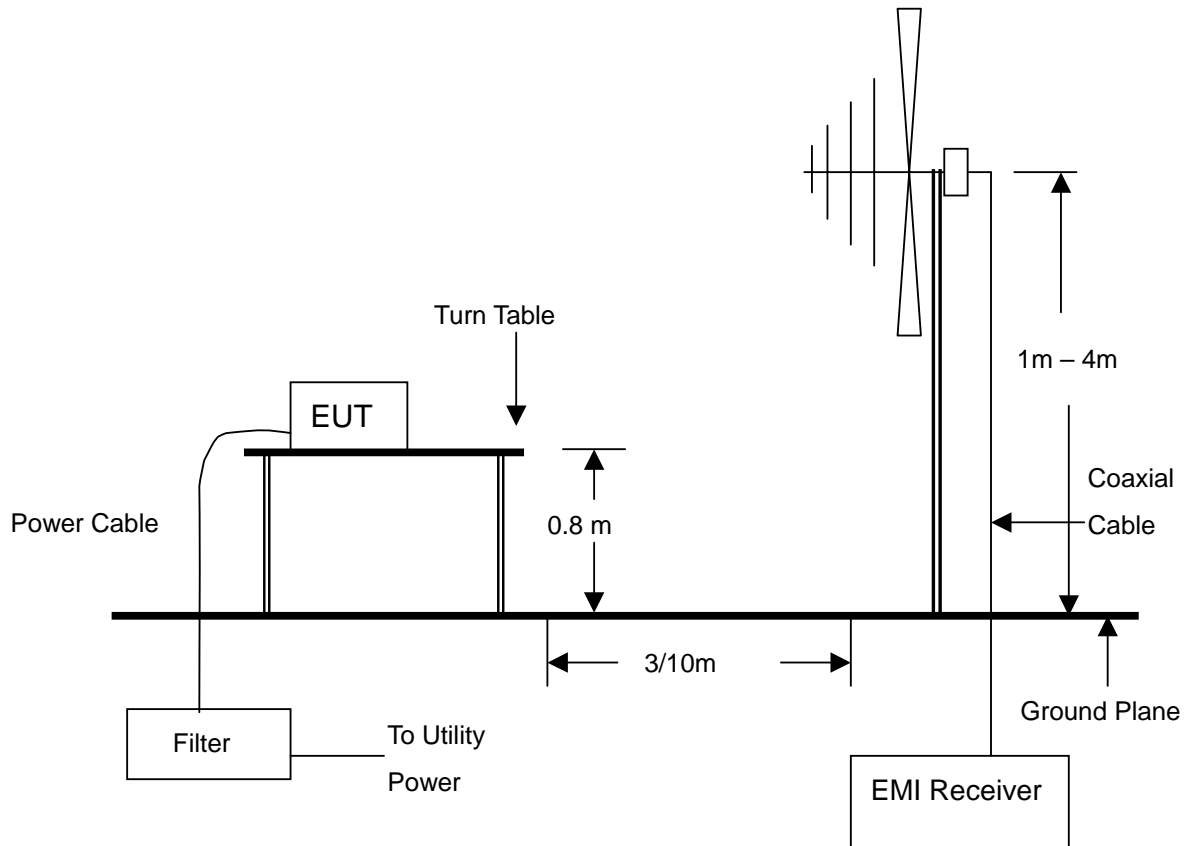

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 9 of 17 Date: Jun. 19, 2006
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------------------------------------------------------

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4. The measurements were made at an open area test site with 3 meter measurement distance. The frequency spectrum measured started from 9 kHz. All readings were quasi-peak value with 200Hz resolution bandwidth at frequency below 150kHz, and with 9kHz resolution bandwidth between 150 kHz and 30MHz . Under 30MHz to 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver.

4.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 10 of 17 Date: Jun. 19, 2006
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------	----------------------	-----------------------------------------------------------------------------------------------

4.6 RADIATED EMISSION TEST RESULT

Temperature:	24 °C	Humidity:	52%RH
Ferquency Range:	9kHz – 30MHz	Measured Distance:	3m
Spectrum Detector:	Q.P.	Tested by	Roger Horng

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
0.126	0.03	20.20	35.00	55.23	105.60	-50.37
0.241	0.03	20.20	12.60	32.83	99.96	-67.13
0.356	0.01	20.20	11.60	31.81	96.58	-64.77
0.507	0.00	20.20	*	*	93.50	*
0.634	0.00	20.10	*	*	91.56	*
0.761	0.00	20.10	*	*	89.98	*
0.888	0.00	20.10	*	*	88.64	*
1.015	0.00	20.10	*	*	87.47	*
1.269	0.00	20.08	*	*	85.53	*

- NOTE :**
1. Measurement uncertainty is less than +/- 4dB
 2. "*": Measurement does not apply for this frequency.
 3. Emission Level = Reading Value + Ant. Factor + Cable Loss
 4. $\text{Limit(dBuV/m)} = 20\log\{2400/F(\text{kHz})\} + 40\log(300/3) - 20\log(377)$ (The measurement distance at 300m)+40log(300/3)(The measurement distance at 3m)-20log(377)
 5. The field strength of other emission frequencies were very low against the limit.
 6. (F) : Fundamental frequency of transmitter.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005
		Report No.: FCCA06032005
		Page: 11 of 17
		Date: Jun. 19, 2006

Temperature:	24 °C	Humidity:	57 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Spectrum Detector:	Q.P.	Tested by	Roger Horng

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	EL(m)	AZ(°)
217.5900	2.60	10.28	15.6	28.5	46.0	-17.5	75.6	2.0
270.6900	2.98	12.38	6.5	21.9	46.0	-24.1	45.6	4.0
306.3400	3.05	13.83	3.2	20.1	46.0	-25.9	55.9	2.2
491.9200	4.08	16.08	4.5	24.7	46.0	-21.3	69.8	1.6
599.9000	4.60	17.39	5.8	27.8	46.0	-18.2	36.9	2.0
711.1200	5.07	21.10	6.3	32.5	46.0	-13.5	44.1	1.7

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	EL(m)	AZ(°)
167.7600	2.28	10.12	18.0	30.4	43.5	-13.1	63.9	4.0
264.0500	2.90	12.12	18.2	33.2	46.0	-12.8	51.6	1.9
401.4450	3.61	15.90	2.9	22.4	46.0	-23.6	63.4	2.1
542.6000	4.33	16.65	2.8	23.8	46.0	-22.2	64.9	4.0
646.9400	4.75	19.06	1.9	25.7	46.0	-20.3	70.9	3.3
730.0820	5.13	21.27	8.9	35.3	46.0	-10.7	39.8	2.2

- NOTE :**
1. Measurement uncertainty is less than +/- 4dB
 2. "": Measurement does not apply for this frequency.
 3. Emission Level = Reading Value + Ant. Factor + Cable Loss
 4. The field strength of other emission frequencies were very low against the limit.
 5. (F) : Fundamental frequency of transmitter.
 6. (*):The emission always below noise.

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 12 of 17 Date: Jun. 19, 2006
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------	----------------------	-----------------------------------------------------------------------------------------------

6 TIME DOMAIN AND DUTY CYCLE TEST

6.1 TEST EQUIPMENT


The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
Oscilloscope	100MHz 200Ms a/s	HP	54645A/ US39151317	APR. 2007 HP, ITRI

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 TEST SET-UP



6.3 TEST PROCEDURE

The EUT was transmitting continuously. The oscilloscope recorded signal values. The simulator's signal was imitated for normal use mode. The number of heartbeat is 130 times at one minute during the test.

6.4 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 13 of 17 Date: Jun. 19, 2006
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------	-----------------------------------------------------------------------------------------------


6.5 TIME DOMAIN AND DUTY CYCLE TEST RESULT

Temperature:	25 °C	Humidity:	55%RH
Tested by	Roger Horng	Tested Date:	Apr. 06, 2006

TIME DOMAIN:

Frequency (kHz)	Period (ms)	Duty cycle (%)	PASS/FAIL
126.0	1986.6	0.56	PASS

Time on:

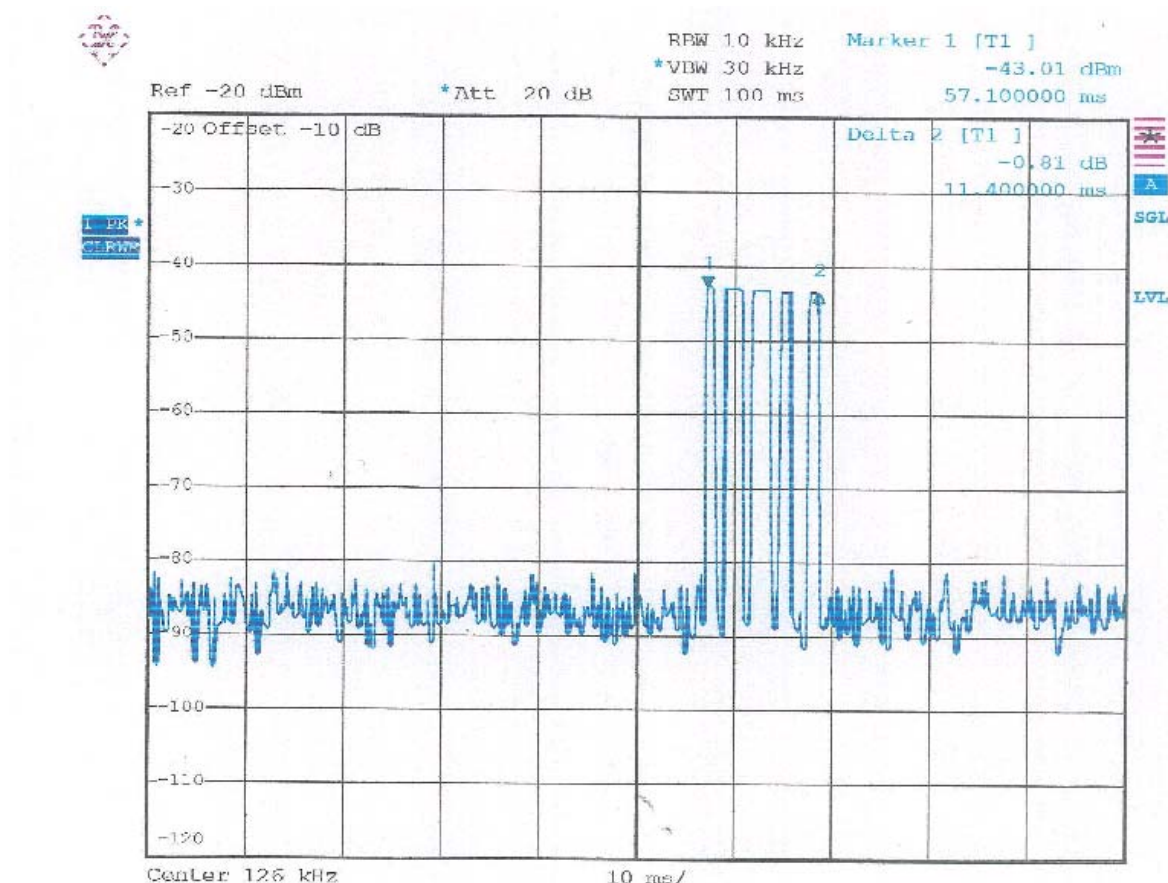




**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A06032005
Report No.: FCCA06032005
Page: 14 of 17
Date: Jun. 19, 2006

Total time:

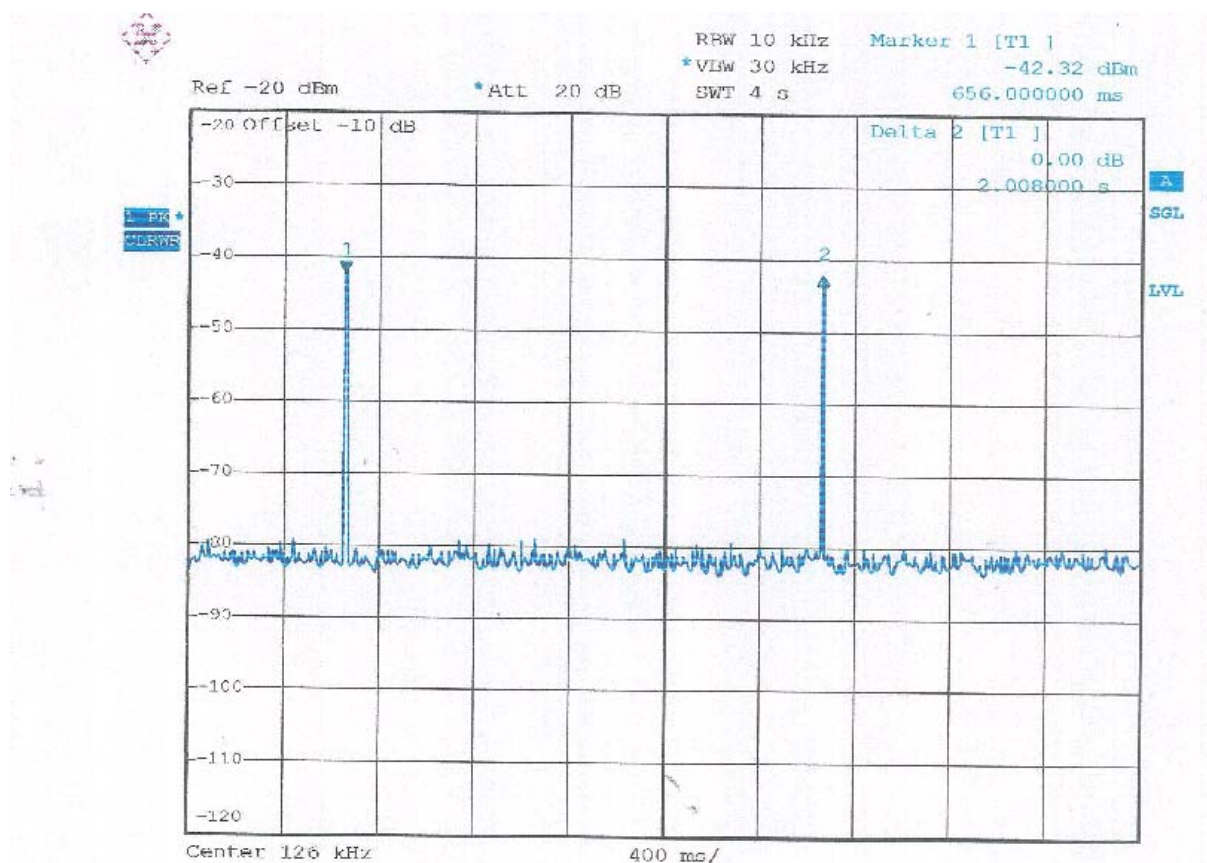

FCC ID: QSW2SCS



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A06032005
Report No.: FCCA06032005
Page: 15 of 17
Date: Jun. 19, 2006

7. PHOTOS OF TESTING

- Radiated test -Below 30MHz (Loop Antenna)



FCC ID: QSW2SCS



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A06032005
Report No.: FCCA06032005
Page: 16 of 17
Date: Jun. 19, 2006

-Raditated test-30~1000MHz (Bi-log Antenna)



FCC ID: QSW2SCS

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A06032005 Report No.: FCCA06032005 Page: 17 of 17 Date: Jun. 19, 2006
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------	----------------------	-----------------------------------------------------------------------------------------------

7 TERMS OF ABRIVATION

AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction